




US 20160075848A1


(19) **United States**(12) **Patent Application Publication**
Hall et al.(10) **Pub. No.: US 2016/0075848 A1**(43) **Pub. Date: Mar. 17, 2016**(54) **METHODS AND SYSTEMS FOR CARPET
RECYCLING**(71) Applicant: **HALL PATENTS, LLC**, DENISON,
TX (US)(72) Inventors: **David Hall**, Denison, TX (US); **Peggy
R. Hall**, Denison, TX (US)(21) Appl. No.: **14/949,070**(22) Filed: **Nov. 23, 2015****Related U.S. Application Data**(63) Continuation of application No. 14/098,205, filed on
Dec. 5, 2013, now Pat. No. 9,221,197.**Publication Classification**(51) **Int. Cl.**
C08J 11/08 (2006.01)
B02C 23/08 (2006.01)
B29B 17/02 (2006.01)(52) **U.S. Cl.**CPC **C08J 11/08** (2013.01); **B29B 17/02**
(2013.01); **B02C 23/08** (2013.01); **B29B**
2017/0293 (2013.01)

(57)

ABSTRACT

The present invention includes improved systems and methods for recycling one or more polymers from a carpet that has been contacted with a solvent to dissolve an adhesive carpet backing under conditions that dissolve the adhesive carpet backing to provide a reclaimed polymer composition, the improvement comprising a mechanical disruptor that both pulls and separates the polymers from the adhesive carpet backing concurrently in at least two different vectors for a time sufficient to separate the one or more polymers from the adhesive carpet backing following the step of dissolving the carpet backing with the solvent, contacting the portions of carpet, wherein the improvement provides for the complete separation of two or more polymer components, and the carpet adhesive, and the two or more polymers from the carpet are produced without substantially sheering the two or more polymers.

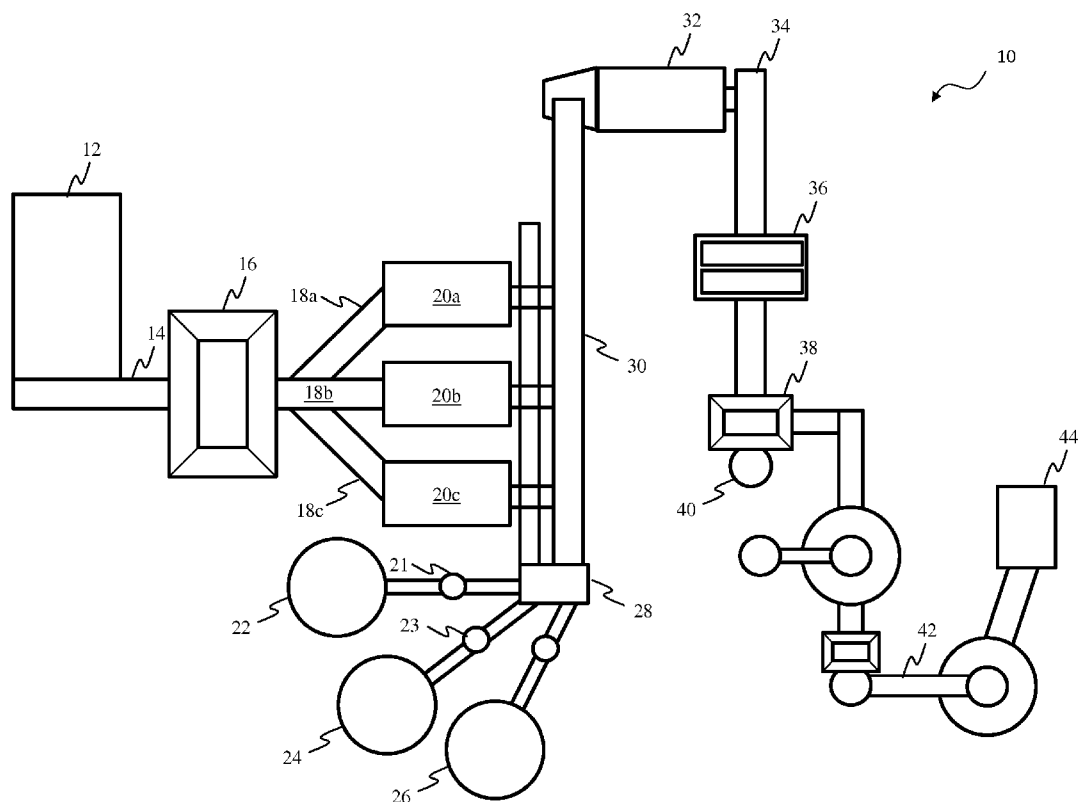

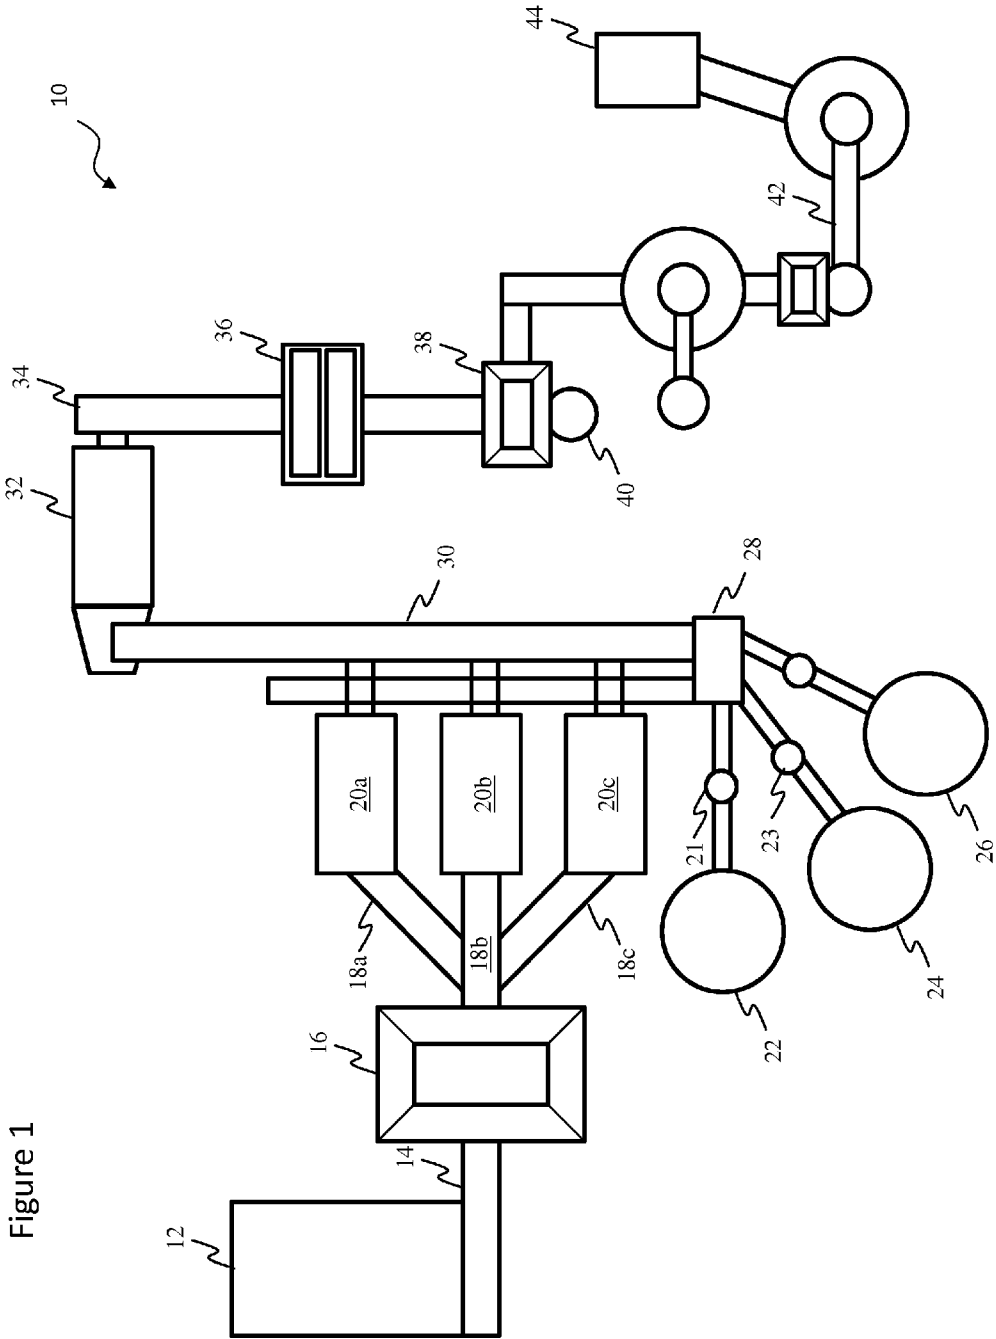

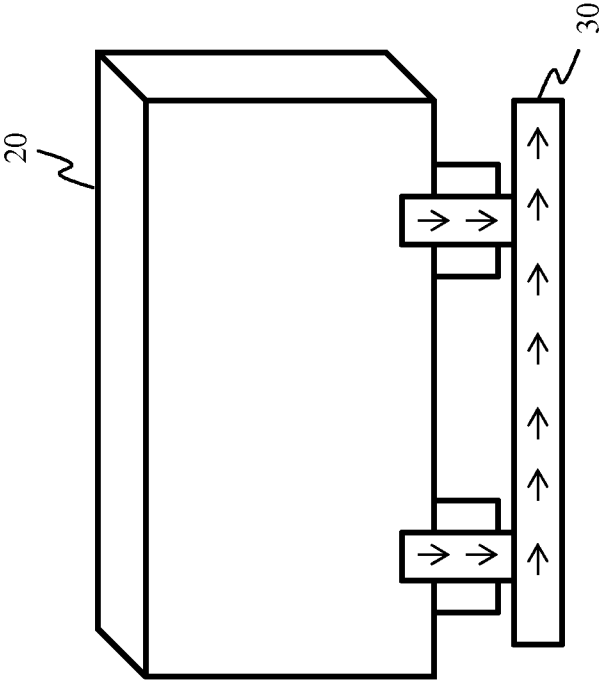


Figure 2

Figure 3

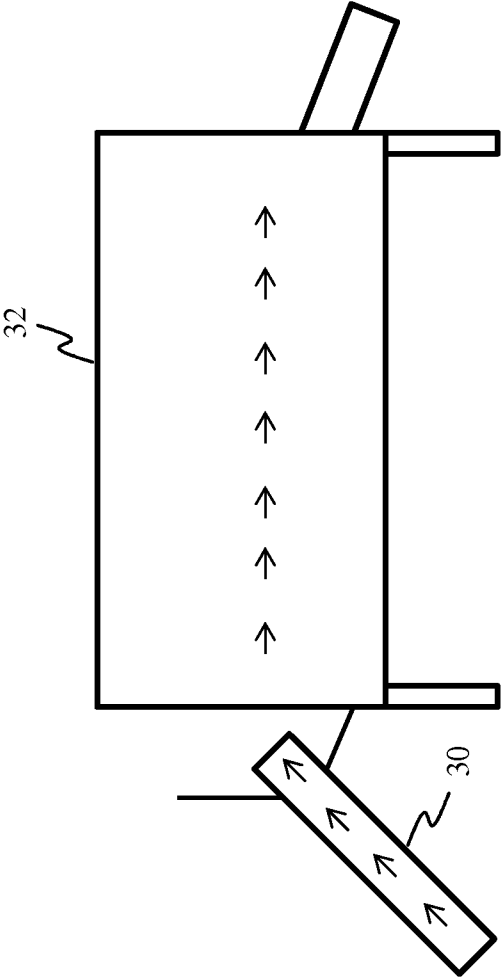
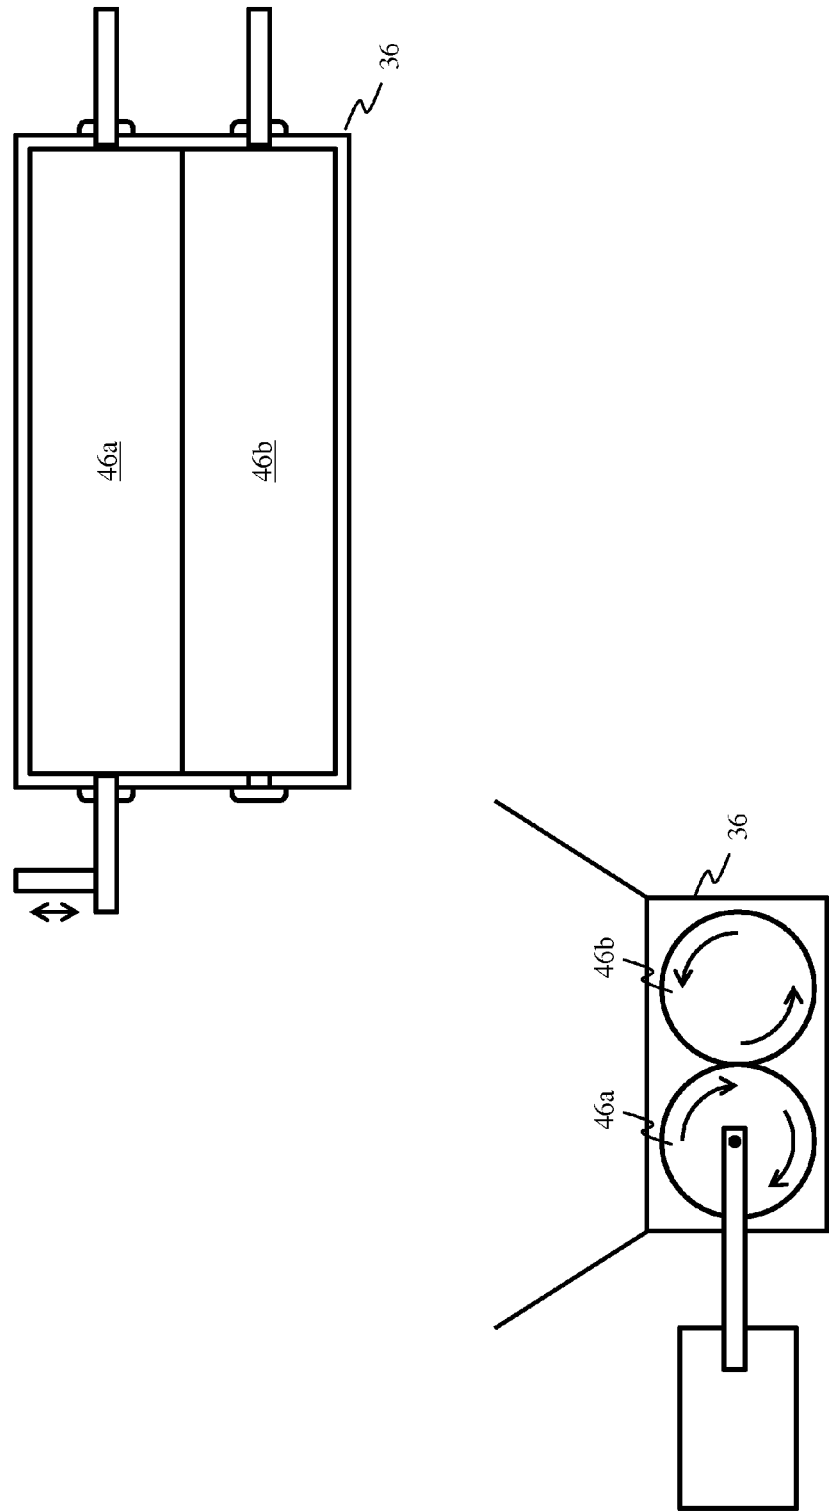


Figure 4



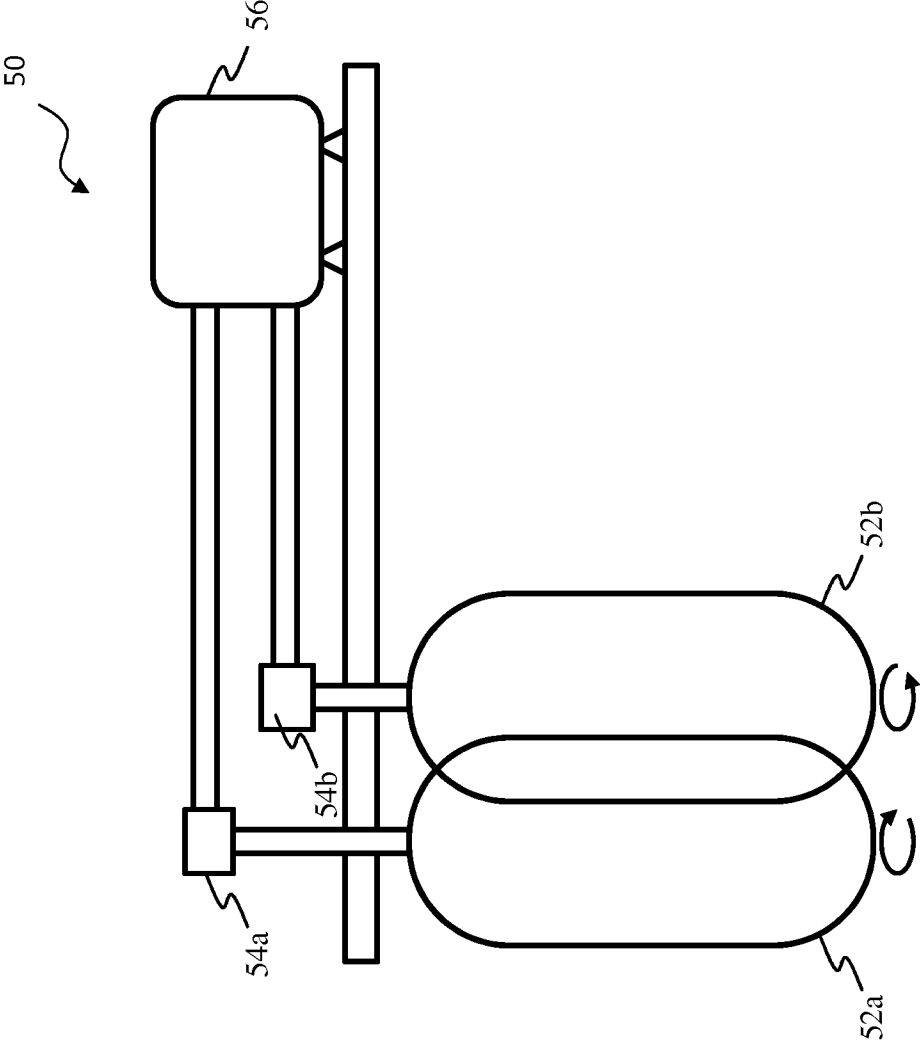


Figure 5

METHODS AND SYSTEMS FOR CARPET RECYCLING

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation patent application of U.S. Ser. No. 14/098,205 filed on Dec. 5, 2013 which claims priority to U.S. Provisional Application Ser. No. 61/846,826, filed Jul. 16, 2013. In addition, this application claims priority to PCT Patent Application Serial Number PCT/US2014/046793, filed Jul. 16, 2014. The foregoing applications are hereby incorporated by reference in their entirety.

TECHNICAL FIELD OF THE INVENTION

[0002] The present invention relates in general to the field of carpet recycling, and more particularly, to improved methods and systems for the comprehensive recycling of carpet components.

STATEMENT OF FEDERALLY FUNDED RESEARCH

[0003] None.

BACKGROUND OF THE INVENTION

[0004] Without limiting the scope of the invention, its background is described in connection with carpet recycling.

[0005] The problem of carpet recycling, as landfills reach capacity, is reaching a critical stage. One critical problem in the recycling arts today is the problem of waste during recycling processes using basic carpets. The problem becomes exacerbated as newer synthetic polymers and previously recycled materials are used to produce carpet. One unsolved problem in the recycling arts is the challenge that the carpet components are designed to be strongly commingled mechanically and chemically. Due to the strong chemical and mechanical bonding or attachment of the carpet components useful raw materials that are substantially contaminant-free, ash-free and in a substantially unaltered form following recycling has not been attained.

[0006] One method for carpet recycling is taught in U.S. Pat. No. 7,820,728, issued to Wright, et al., which is directed to methods and systems for recycling carpet and carpets manufactured from recycled material. Relevant to the improvements of the present invention are the methods for recycling carpet can recover one or more polymeric carpet components. Specifically, this patent teaches the dissolution of the backing of the polymeric carpet components using certain terpene solvents. However, despite the knowledge of this methodology as of the earliest filing date of this patent in 2006, substantially waste-free carpet recycling is not currently or widely available.

[0007] Another such invention is taught in U.S. Pat. No. 5,169,870, issued to Corbin, et al., for reclaiming ϵ -caprolactam from nylon 6 carpet. The process taught by this patent includes the continuous recovery of ϵ -caprolactam from a carpet made from nylon 6 and a backing that is inserted into a mechanical separator that prepares scrap-containing nylon 6 and waste. The scrap from the separator is fed to a depolymerizing reactor where the scrap is subjected to a depolymerization catalyst, temperatures of at least the melting point of nylon 6 and superheated steam to produce an ϵ -caprolactam containing distillate and more waste. The ϵ -caprolactam in

the distillate is said to separate the polymeric components from other volatile agents and is then purified.

[0008] Mechanical carpet disruption methods have been taught by a number of patents, including: U.S. Pat. No. 6,610,769, which discloses a method of employing an adhesive that can be completely removed by applying shear in the presence of an aqueous alkaline solution; U.S. Pat. No. 5,240,530, which discloses a method of grinding carpet to a fiber length of less than about one-quarter inch and washing in a water bath to allow the various materials of the carpet to be separated by density; U.S. Pat. No. 5,230,473, which discloses a method for disintegrating, separating, and segregating whole carpet by loosening and debonding the latex/filler binder system by repeated application of highly pressurized fluids such as air, water, heated air, steam, and chemical solutions, and repeated stripping with rotating elements; and U.S. Pat. No. 5,722,603, which discloses a method of recovering face fiber from a carpet employing numerous steps of shredding and impact forces that reduce particle size, separating and washing the particles with screens, followed by separation of the components in water in a hydrocyclone, with the option of using additives that are disrupted by sodium hydroxide and nonionic surfactants.

[0009] Despite these various methods and systems for recycling carpet, a need remains for the development of environmentally friendly systems and methods that lead to recycling the majority of the carpet components, with significantly reduced waste, using sustainable compositions and methods, and that yield high quality, clean carpet components that can be completely recycled.

SUMMARY OF THE INVENTION

[0010] The present inventors have found a novel methods, systems and improvements that make substantially contaminant-free, ash-free and in a substantially unaltered form carpet subcomponents following recycling attainable. In fact, it has been found that the recycled components using the methods and systems of the present invention provide a substantial advantage over the known methods, including, providing components that are almost completely recycled, in a substantially unaltered form, and using environmentally friendly components. It was found that all or substantially all the subcomponents of the carpet can be reused as a result of the methods and systems of the present invention without additional processing or cleaning. It was further found that the novel methods, systems and improvements of the present invention provide, for the first time, a solution to the problem that carpet components are designed to be strongly commingled mechanically and chemically, including newer carpet materials and structural designs that have made carpet recycling even more difficult.

[0011] In one embodiment, the present invention includes an improved system for recycling one or more polymers from a carpet that has been contacted with a solvent to dissolve an adhesive carpet backing under conditions that dissolve the adhesive carpet backing to provide a reclaimed polymer composition, the improvement comprising: a mechanical disruptor that both pulls and separates the polymers from the adhesive carpet backing concurrently in at least two different vectors for a time sufficient to separate the one or more polymers from the adhesive carpet backing following the step of dissolving the carpet backing with the solvent, contacting the portions of carpet, wherein the improvement provides for the complete separation of two or more polymer components,

and the carpet adhesive, and the two or more polymers from the carpet are produced without substantially sheering the two or more polymers. In one aspect, greater than 70, 75, 80, 85, 90, 95, 96, 97, 98, or 99% of the carpet components are recycled. In another aspect, substantially all the carpet components are recycled. In another aspect, the solvent is selected from at least one of a terpene solvent, a D-limonene, a pinene, an α -pinene or water. In another aspect, the mechanical disruptor comprises two or more mixing heads, blades, beaters, wisks, paddles, jets, screws, or rollers that provide the mechanical disruption in the at least two different vectors. In another aspect, the mechanical disruptor is contacted with the carpet components following partial or substantial dissolution of the adhesive carpet backing for a time sufficient to separate two or more different polymers from the carpet without substantially sheering the two or more polymers. In another aspect, the mechanical disruptor is contacted with the carpet components following partial or substantial dissolution of the adhesive carpet backing for 1 to 30, 2 to 25, 3 to 20, 4 to 15, 5 to 15, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, or 15 minutes without substantially sheering the two or more polymers. In another aspect, the one or more polymers are selected from at least one of a HDPE, LDPE, LLDPE, ULDPPE, VLDPE, VLLDPE, copolymers of ethylene and α -olefins, polypropylene, copolymers of propylene and α -olefins, copolymers of propylene and ethylene, EVA, and EMA. In another aspect, following the separation of the one or more polymers, the polymers are 70, 75, 80, 85, 90, 95, 96, 97, 98, or 99% ash-free. In another aspect, following the separation of the one or more polymers, the polymers are substantially ash-free. In another aspect, the mechanical disruptor comprises two or more mixing heads, blades, beaters, wisks, paddles, jets, screws, or rollers that provide the mechanical disruption in the at least two different vectors. In another aspect, the system further comprises one or more shredders capable of cutting the carpet into portions of a size that provides complete contact between the carpet and the solvent. In another aspect, the solvent further comprises an acid that improves the dissolution of the carpet adhesive.

[0012] Another embodiment of the present invention includes an improved method of recycling one or more polymers from a carpet that has been contacted with a solvent to dissolve an adhesive carpet backing under conditions that dissolve the adhesive carpet backing to provide a reclaimed polymer composition, the improvement comprising: prior to step of contacting the carpet with the solvent cutting the carpet into portions that provide complete contact between the carpet and the solvent; and following the step of dissolving the carpet backing with the solvent, contacting the portions of carpet with a mechanical disruptor that both pulls and separates the polymers from the adhesive carpet backing concurrently in at least two different vectors for a time sufficient to separate the one or more polymers from the adhesive carpet backing. In one aspect, greater than 70, 75, 80, 85, 90, 95, 96, 97, 98, or 99% of the carpet components are recycled. In another aspect, substantially all the carpet components are recycled. In another aspect, the solvent is selected from at least one of a terpene solvent, a D-limonene, a pinene, an α -pinene or water. In another aspect, the mechanical disruptor comprises two or more mixing heads, blades, beaters, wisks, paddles, jets, screws, or rollers that provide the mechanical disruption in the at least two different vectors. In another aspect, the mechanical disruptor is contacted with the carpet components following partial or substantial dissolu-

tion of the adhesive carpet backing for a time sufficient to separate two or more different polymers from the carpet without substantially sheering the two or more polymers. In another aspect, the mechanical disruptor is contacted with the carpet components following partial or substantial dissolution of the adhesive carpet backing for 1 to 30, 2 to 25, 3 to 20, 4 to 15, 5 to 15, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, or 15 minutes without substantially sheering the two or more polymers. In another aspect, the one or more polymers are selected from at least one of a HDPE, LDPE, LLDPE, ULDPPE, VLDPE, VLLDPE, copolymers of ethylene and α -olefins, polypropylene, copolymers of propylene and α -olefins, copolymers of propylene and ethylene, EVA, and EMA. In another aspect, following the separation of the one or more polymers, the polymers are 70, 75, 80, 85, 90, 95, 96, 97, 98, or 99% ash-free. In another aspect, following the separation of the one or more polymers, the polymers are substantially ash-free.

[0013] Yet another embodiment of the present invention includes an improved method of recycling one or more polymers from a carpet that has been contacted with a terpene solvent to dissolve an adhesive carpet backing under conditions that dissolve the adhesive carpet backing to provide a reclaimed polymer composition, the improvement comprising: prior to step of contacting the carpet with the terpene solvent cutting the carpet into portions that provide complete contact between the carpet and the solvent; and following the step of dissolving the carpet backing with the terpene solvent, contacting the portions of carpet with a mechanical disruptor that both pulls and separates the polymers from the adhesive carpet backing concurrently in at least two different vectors for a time sufficient to separate the one or more polymers from the adhesive carpet backing. In one aspect, greater than 70, 75, 80, 85, 90, 95, 96, 97, 98, or 99% of the carpet components are recycled. In another aspect, substantially all the carpet components are recycled. In another aspect, the terpene solvent is selected from at least one of D-limonene, a pinene, or α -pinene. In another aspect, the mechanical disruptor comprises two or more mixing heads, blades, beaters, wisks, paddles, jets, screws, or rollers that provide the mechanical disruption in the at least two different vectors. In another aspect, the mechanical disruptor is contacted with the carpet components following partial or substantial dissolution of the adhesive carpet backing for a time sufficient to separate two or more different polymers from the carpet without substantially sheering the two or more polymers. In another aspect, the mechanical disruptor is contacted with the carpet components following partial or substantial dissolution of the adhesive carpet backing for 1 to 30, 2 to 25, 3 to 20, 4 to 15, 5 to 15, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, or 15 minutes without substantially sheering the two or more polymers. In another aspect, following the separation of the one or more polymers, the polymers are 70, 75, 80, 85, 90, 95, 96, 97, 98, or 99% ash-free. In another aspect, following the separation of the one or more polymers, the polymers are substantially ash-free.

[0014] Yet another embodiment of the present invention includes a method of recycling one or more polymers from a carpet comprising: cutting the carpet into portions that provide complete contact between the carpet and the solvent; dissolving the carpet backing with the solvent; contacting the portions of carpet with a mechanical disruptor that both pulls and separates the polymers from the adhesive carpet backing concurrently in at least two different vectors for a time suffi-

cient to separate the one or more polymers from the adhesive carpet backing; and separating any remaining adhesive away from the one or more polymers by at least one of crushing or squeezing, wherein greater than 95, 96, 97, 98, or 99% of the carpet components are recycled.

[0015] Yet another embodiment of the present invention includes a system for recycling one or more polymers from a carpet comprising: one or more shredders capable of cutting the carpet into portions of a size that provides complete contact between the carpet and a solvent; a vat or container comprising a solvent capable of dissolving an adhesive backing of the carpet away from two or more carpet polymers that are to be recycled; a mechanical disruptor that both pulls and separates the polymers from an adhesive carpet backing concurrently in at least two different vectors for a time sufficient to separate the one or more polymers from the adhesive carpet backing following the step of dissolving the carpet backing with the solvent; and one or more rollers to crush any adhesive particles remaining on the carpet fibers, wherein the system achieves complete separation of two or more polymer components, and the carpet adhesive, and the two or more polymers from the carpet are produced without substantially sheering the two or more polymers.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] For a more complete understanding of the features and advantages of the present invention, reference is now made to the detailed description of the invention along with the accompanying figures and in which:

[0017] FIG. 1 is a diagram that outlines the overall process of the present invention;

[0018] FIG. 2 shows a detailed view of a processing step of the present invention;

[0019] FIG. 3 shows a detailed view of another processing step of the present invention;

[0020] FIG. 4 shows a detailed view of another processing step of the present invention;

[0021] FIG. 5 shows a detailed view of a processing step of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0022] While the making and using of various embodiments of the present invention are discussed in detail below, it should be appreciated that the present invention provides many applicable inventive concepts that can be embodied in a wide variety of specific contexts. The specific embodiments discussed herein are merely illustrative of specific ways to make and use the invention and do not delimit the scope of the invention.

[0023] To facilitate the understanding of this invention, a number of terms are defined below. Terms defined herein have meanings as commonly understood by a person of ordinary skill in the areas relevant to the present invention. Terms such as “a”, “an” and “the” are not intended to refer to only a singular entity, but include the general class of which a specific example may be used for illustration. The terminology herein is used to describe specific embodiments of the invention, but their usage does not delimit the invention, except as outlined in the claims.

[0024] The problem of carpet recycling continues to grow as landfills reach capacity and the need increases for reduced costs. One critical problem in the recycling arts today is the problem of waste that results from recycling processes that

only recovery 30, 40, 50, 60, or even 70% of the carpets' components. The problem becomes exacerbated as newer synthetic polymers and previously recycled materials are used to produce carpet from these materials. Furthermore, it is also necessary to recycle the adhesives used to provide rigidity to the carpet. Another unsolved problem in the recycling arts is the challenge that the carpet components are designed to be strongly commingled mechanically and/or chemically. That is, by design, carpet components are not intended to be easy to separate. Due to the strong chemical and mechanical bonding or attachment of the carpet components the isolation of useful raw materials for recycling that are substantially contaminant-free, ash-free and in a substantially unaltered form following recycling has not been attained.

[0025] The present invention provides critical and long needed improvements to previously developed methods that, despite their promise, are not in use today. In other words, while one or more subprocesses that can be used with the present invention have been available and under development for half a dozen years or more, the promise of the methodology has failed to reach its potential due to the lack of one or more critical improvements that make a complete, improved process possible. That is, despite the availability of these methods a viable process is not producing, to date, the recycling of substantially all the raw components of a carpet in a sound, commercially viable manner.

[0026] The present invention provides, for the first time, the improvements necessary to recycle the majority of the carpet components, including 70, 75, 80, 90, 95, 96, 97, 98, 99, or almost 100% of the fibers from a carpet. These recycled fibers are also produced in a manner that provides a final product that is substantially ash-free and that is clean enough to be used directly in a new carpet. The process of the present invention also provides recycling of the majority of the adhesive, including 70, 75, 80, 90, 95, 96, 97, 98, 99, or almost 100% of the adhesive. Furthermore, the processes of the present invention can use as solvents during certain process steps components solvents that are from renewable sources, biocompatible, and/or recyclable. The components can be used multiple times and can be regenerated multiple times in a continuous or batch process to yield and separate all the components of a carpet in need of recycling. Furthermore, the improvement provided herein eliminates the need for hauling carpet in need of recycling vast distances as the process can be made in small processing locations or can be scaled-up to generate clean recycled carpet, raw materials that can then be shipped at a greatly reduced cost as unwanted materials (e.g., dirt, backing and adhesive) have been removed prior to shipping.

[0027] The following is one example of carpet recycling that can be used with the present invention and that incorporates the improvements herein. The present invention includes a processing plant and process for harvesting fiber from carpet that generally begins with sorting of the carpet by type, e.g., carpets that include nylon, polypropylene, polyester (e.g., “PET” (polyethylene terephthalate) or “PTT” (polytrimethylene terephthalate)), acrylic, wool and wool blends. Next, once the carpet already sorted into its category, the carpet can be loaded on a conveyor to be shredded into, e.g., 5, 4, 3, 2, 1.5, 1, 0.5 inch or smaller pieces. Once the carpet is fragmented, it may be advantageous to separate loose fibers, e.g., pet hair, with a vacuum prior to proceeding to the next step. From the shredder the carpet fragments travel by con-

veyor to a vat to be combined with a solution that dissolves the adhesive, e.g., heated water, a terpene solvent (e.g., d-limonene or (Orange oil), d-limonene mix, or other terpene solvents), and/or a biocompatible acid, such as acetic acid. It has been found that when using the heated water method, the heated water temperature should be between 120° F. to 140° F., with certain improved results obtained at 130° F., plus or minus, 1, 2, 3, 4, 5, or 10 degrees. When using a biocompatible terpene solvent, the temperature can be between 120° F. to 140° F., however, at a lower temperature the terpene solvents (d-limonene or Orange oil combined with d-limonene). A certain advantage has been found by the present inventors when combining the terpene solvent with one or more biocompatible acids, e.g., acetic acid that permits the use of a lower concentration of the terpene solvent. While a high temperature can be used, the terpene solvent can begin to evaporate, which can be mitigated by placing the solvent-carpet mix into a pressurized vessel, or can be mixed with acid to reduce the need to increase the temperature, which causes evaporation of the solvent. The use of acid with the water or terpene solvent method provides another unique advantage of the present invention.

[0028] Next, the carpet fragment and solvent solution are mixed, e.g., at slow speed for 15 to 20 minutes, or more, with clockwise and counter-clockwise rotation. Generally, the carpet fragment and solvent solution will be combined in a manner that completely saturates the carpet fragments and provides maximum exposure of the carpet adhesive, adhesives attached to the carpet, contaminants in the carpet (e.g., and dirt in the carpet fragments) to the solvent solution. In one embodiment of the present invention, both the water solvent and terpene solvent processes are used in series, which is used first can depend on the nature of the carpet fragments, e.g., if the carpet fragments are known to contain organic or hydrophobic dirt or contamination (e.g., motor oil), it may be advantageous to use the terpene solvent method before the water process. Likewise, if the carpet contains hydrophilic contamination, e.g., pet urine, then the water solvent process can be used first.

[0029] After the carpet fragments have been exposed to the water, acid, and/or terpene solvent solution, the solution is drained from the vat, and can pass through a filtration system to remove solid contaminants, e.g., pet hair, loose fibers, paint, or other contaminants from the adhesive dissolving solution, which can be transported to a holding tank for reuse. The carpet fragments can then proceed one or more optional rinse cycles, that can include one or more rinses with warm water. The water used for the rinse can then be placed in a holding tank for addition to the solvent solution, thus recycling that portion of the solutions used in the overall process. One or more additional rinse cycles that use, e.g., warm water, can be used prior to the separation step. Often, the rinse can last from just a rinse to a residence time of 5, 10, 15, 20, 25, 30, or more minutes at which time, a rinse solution (e.g., water) is drained through a filtration system and reused for rinsing or used in an upstream process.

[0030] The next step provides one of the unexpected and important improvements of the present invention. While the water and terpene solvent processes have been used in the art, one of the critical steps that has defied solution has been the separation of the components of basic carpet, the adhesive backing and the one or more polymer fibers (e.g., blender turn on to higher speed to break up carpet fibers). Often carpet includes two or three components, an adhesive backing, an

optional mat of fibers that help trap or mechanically restrain the carpet fibers (which is the portion of the carpet that is visible to the carpet owner), and the carpet fibers themselves, which are embedded in the optional mat and/or the adhesive by a variety of methods. The present inventors have found that the separation step has to address the nature of the mechanical connection between the carpet fibers, the adhesive and/or the optional mat of fibers or polymers. A critical improvement and complete carpet fiber was obtained by using at two different vectors of mechanical separation. The skilled artisan will recognize that a “vector” provides both a direction and a magnitude. As used in the context of the present invention, the term vector refers to a mechanical force that has both a direction and a magnitude, such as that created by, e.g., mechanical blender blades that not only “tug” at the fibers in one or more directions, but that also have a pull strength or magnitude that draws the individual fibers (be it a carpet fiber or the polymers in the mat) away from each other in two or more different directions at the same time. The amount of mechanical strength and the total time during which the carpet fragments are separated is one of the important improvements provided by the present invention. The present inventors have found that both have to be limited so that the carpet fibers and the polymer strands of fibers that comprise the mat are not shredded during the process. However, the time and strength must be such that the carpet fibers and the mats are separated from each other and the adhesive. It has been found that two or more blender blades operating in unison operating at a range from 1 to 1850 rpms provide sufficient mechanical pull in two or more vectors to separate the carpet components to achieve from 70, 75, 80, 90, 95, 96, 97, 98, 99, or almost 100 percent separation in just 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 20 or 25 minutes without damaging the carpet components. In certain embodiments, the two vectors of mechanical disruption can be performed or caused by, e.g., mixing or blender blades, heads, beaters, whisks, paddles, jets, screws, or rollers. In certain specific, but not limiting examples, the blender blades can have a speed from 1-208 rpms, 2-224 rpms, 3-244 rpms, 4-265 rpms, and 5-287 rpms, 10-300 rpms, 25-400 rpms, 50-500 rpms, 75-750 rpms, 100-1,000 rpms, 150-1,500 rpms, and 200-1850 rpms. For testing and comparison purposes, the two or more mechanical vectors for disrupting the fibers can be measured at 1-208 rpms, 2-224 rpms, 3-244 rpms, 4-265 rpms, and 5-287 rpms, 10-300 rpms, using a hand blender, e.g., Rival Hand Mixer Model#HM-743, which can provide separation of 70, 75, 80, 90, 95, 96, 97, 98, 99, or almost 100 percent separation in just 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15 minutes. While the size of the mixing or blender blades, heads, beaters, whisks, paddles, jets, screws, or rollers for providing the mechanical separation can be varied from, 3-4 inches, 4-6 inches, 6-12 inches, or measured in feet (1, 2, 3, 4, 5, 6, 7, 8, 9, 10 or more), the skilled artisan will be able to select the proper mechanical separation as outlined hereinabove. Briefly, the skilled artisan will generally select that size and speed that are optimal for mechanical separation that effectively separates the fibers while minimizing any damage to the fibers. As is apparent from this description, the method can be adapted for batch and/or continuous separation so long as the two vector mechanical disruption causes effective separation of the fibers while minimizing any damage to the fibers.

[0031] Following separation of the carpet components, the separated fibers can travel from the separation tank, via conveyor, into a hot air drying system, e.g., a rotating drying system that can optionally include a vacuum that helps sepa-

rate lighter fibers (e.g., polypropylene fibers that are used to make the mat), from the heavier carpet fibers.

[0032] Upon exiting dryer, fibers fall into the mouth hopper leading into a press, e.g., a roller press, or even a hydraulic roller press. By pressing the fibers, the present invention eliminates any adhesive that did not dissolve or separate from the mat and/or fibers during the mechanical disruption step. Crushing the adhesive has been found to be an effective way to remove any adhesive caked or still attached to the one or more polymer fibers and provides another improvement of the present invention. Furthermore, the press also continues the breakdown of carpet fibers by physically breaking solid bonds. Exiting press fibers can then enter a vacuum system: that can separate any remaining particles of adhesive, the polypropylene or other polymer fibers that form part of the mat, and the generally longer and heavier carpet fibers (e.g., nylon fibers). Generally, the first vacuum system will draw the lighter polypropylene backing or mat fibers from the heavier carpet fibers. The carpet fibers can then be gathered (e.g., baled) or continue on to a 2nd vacuum system that then draws the carpet fibers into a final destination for shipping, e.g., a sealed trailer, a baler or other method of compressing the fibers without much damage.

[0033] In one specific method, the adhesive can be separated by a high temperature, boiling, or substantially boiling, water method. Carpet comes into production area in bales. Carpet is then un-baled put on conveyor, which leads to a shedder, where the carpet is cut into pieces. Carpet pieces are then sent via a conveyor to a vat, which is mixed with water. The water is brought to a temperature at or about a boiling temperature and stirred with a multi-blade blender at low revolutions per minute (RPM) for up to 1 hour. Then the blender RPM is increased to create separation, run for 2-5 minutes. This separates nylon, polypropylene and calcium. The remaining water is sent through a filtration system to be reused. This process may be repeated multiple times, e.g., 1, 2, 3, 4, or more times. When rinse is complete, the carpet fibers run threw a drying system. After drying, the fibers are sent to a hydraulic pressure roller system. This system will cause the remaining calcium and latex to break away from the nylon and polypropylene. Then the product is sent through the first vacuum system that will separate the nylon from the calcium, latex and polypropylene.

[0034] The remainder of the product will be sent through a second drying system, which separates the polypropylene from the latex and calcium. Once the process is complete, the carpet fiber (e.g., nylon), mesh backer (e.g., polypropylene), and the adhesive (e.g., latex and calcium) are all ready to be reused.

[0035] Other parameters that can be important for proper separation of the carpet components include, e.g., on-going solution measurements (e.g., to maintain the percentage of terpene solvent and/or acid balance, temperature and concentration of adhesive), tank (vat) variances, carpet type (Nylon 6, Nylon 66, PET, etc.), rotating hot air and measuring drying temperature, and/or the use of one or more tanks (e.g., 3 tanks, each with sufficient volume for each rinsing step). Mixing will generally be slow in the solvent solution (d-limonene or Orange oil, water, and/or acid) as the solvent is heated. Another parameter is to make sure the carpet is fully soaked in the solvent solution. Finally, before the solvent is recycled a screen can be used to separate any loose fibers of other components of the carpet before sending the solvent back to a holding tank). Another parameter that has been found to be

important for proper separation is to adjust the mixer settings to a speed that will separate carpet fibers apart from the adhesive. (During any subsequent separation step, which include a second exposure to the solvent and/or rinsing steps, the mixer speed can be reduced, with allows hardened adhesive to further break down without harming the carpet fibers. Finally, hardened adhesive can also be separated from the carpet fibers and/or mesh backing materials by compressing the carpet components between two or more rollers that break the adhesive crystals or hardened adhesive into a powder, which can then be recaptured using, e.g., a vacuum system or even gravity.

[0036] The final improvement of the present invention is the ability to recycle the adhesive backing (commonly a combination of latex and calcium) by separating it from the water or solvent solution by skimming, filtration, screening, evaporation of the water or solvent, etc., for use as, e.g., a concrete or asphalt additive. Generally, reusing and/or regenerating the solvent are preferred. Certain mechanical and chemical features of the latex and calcium backing are favorable for use as a concrete, grout, or cement additive, with or without the inclusion of some of the polypropylene or other fibers. Thus, the present invention provides improvements to current processes that permit for the almost complete recycling of every portion of the carpet.

[0037] In addition to the above, some additional features can be varied in the improvements of the present invention, including, for newer carpet pieces (e.g., less than a year old) the solvent solution percentage may have to be increased to 30% to 35% d-limonene or Orange oil d-limonene to water. The recycling of newer carpet can also benefit from heating to 120° F. to 140° F. best temperature is 130° F. For heavily used or older carpet pieces the percentage of terpene solvent, the temperature of the water, and/or the addition of acid, can be increased to e.g., 20% to 30% d-limonene or orange oil, which are then heated to processing temperature, which will often be at the higher end of the temperature range. While higher concentrations of the solvent solution, e.g., **20, 30, 40, 50, 60, 75, 80, 85, 90** or up to 100% volume-to-volume of the solution, however, higher concentrations are often avoided to reduce cost, however, in certain embodiments the present invention includes those higher percentages, which will reduce the processing time required and often the amount of mechanical disruption (strength and/or time). Finally, the water and/or solvent solution can include 10% to 20% volume to volume or a solution of acetic acid (e.g., 5%, 10%, 15%, 20%, 25%, or glacial acetic acid), which can be added to the terpene solvent solution (d-limonene and orange oil/d-limonene) to reduce cost and/or processing time.

[0038] FIG. 1 is a diagram that outlines the comprehensive carpet recycling process **10** of the present invention. The carpet to be recycled enters shredder **12**, and the shredded carpet is then placed on conveyor **14**. An optional shredded carpet holding tank **16**, is shown downstream from conveyor **14** and before diverting shredded carpet into one or more conveyors **18a**, **18b** and **18c**. The next step in the process involves placing the shredded carpet into one or more solvent or dissolution vats **20a**, **20b**, and/or **20c**. Following the requisite amount of time in the solvent, the carpet components to be recycled can be transferred to new vats for the cleaning and/or mechanical disruption steps (not depicted), or the downstream processing steps can occur in the same vats **20a**, **20b** and/or **20c**. In the process depicted in FIG. 1, the same vats are used for dissolving the adhesive, and the subsequent

washing steps by connecting the vats **20a**, **20b** and/or **20c** to, e.g., a solvent tank **22**, a first rinse tank **24** and a second rinse tank **26**, which are shown connected to a pump **28**. After processing, the separated fibers are taken via one or more conveyors **30** to a dryer **32**, which can be a hot and/or rotating dryer with or without a vacuum. Following the dryer **32**, a conveyor **34** takes the dried carpet components to a roller **36**, which is depicted connected to a first vacuum **38**, which is alternatively (as shown) connected to a second vacuum **40**. The second vacuum **40**, in this configuration, captures the longer and/or heavier carpet fibers, which are then transferred via conveyor **42** to a system that compresses the fibers without causing extensive damage, e.g., bailing station **44**.

[0039] FIG. 2 shows a detailed view of a processing step of the present invention in vat **20**, with additional detail, in which conveyors **30** are depicted at or below the bottom of the vat **20**.

[0040] FIG. 3 shows a detailed view of another processing step of the present invention that involves the dryer **32**, which is connected to the conveyor **30**, in this case depicted as a rotating, heated drum.

[0041] FIG. 4 shows a detailed view of another processing step of the present invention, in this case the roller or press **36**, which is shown as a top view and as internal side view of the roller mechanisms **46a** and **46b**.

[0042] FIG. 5 shows a detailed view of a processing step of the present invention that includes the mechanical disruption system **50**. The mechanical disruption system **50** is depicted having a pair of blender blades **52a**, **52b**, which rotate to produce the mechanical disruption in two or more vectors of the present invention. Often, the blades will be counter-rotating and the present invention can operate with 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 75, 80, 90, 100, 150, 200, 250, 300, 400, 500, 600, 700, 750, 800, 900, 1,000 or more pairs of mechanical disruptors, e.g., mixing heads, blades, beaters, whisks, paddles, jets, screws, or rollers. In this embodiment, the shafts of the blender blades **52a**, **52b**, are connected to gear boxes **54a**, **54b**, which is connected to a motor **56**.

[0043] It is contemplated that any embodiment discussed in this specification can be implemented with respect to any method, kit, reagent, or composition of the invention, and vice versa. Furthermore, compositions of the invention can be used to achieve methods of the invention.

[0044] It will be understood that particular embodiments described herein are shown by way of illustration and not as limitations of the invention. The principal features of this invention can be employed in various embodiments without departing from the scope of the invention. Those skilled in the art will recognize, or be able to ascertain using no more than routine experimentation, numerous equivalents to the specific procedures described herein. Such equivalents are considered to be within the scope of this invention and are covered by the claims.

[0045] All publications and patent applications mentioned in the specification are indicative of the level of skill of those skilled in the art to which this invention pertains. All publications and patent applications are herein incorporated by reference to the same extent as if each individual publication or patent application was specifically and individually indicated to be incorporated by reference.

[0046] The use of the word “a” or “an” when used in conjunction with the term “comprising” in the claims and/or the specification may mean “one,” but it is also consistent with

the meaning of “one or more,” “at least one,” and “one or more than one.” The use of the term “or” in the claims is used to mean “and/or” unless explicitly indicated to refer to alternatives only or the alternatives are mutually exclusive, although the disclosure supports a definition that refers to only alternatives and “and/or.” Throughout this application, the term “about” is used to indicate that a value includes the inherent variation of error for the device, the method being employed to determine the value, or the variation that exists among the study subjects.

[0047] As used in this specification and claim(s), the words “comprising” (and any form of comprising, such as “comprise” and “comprises”), “having” (and any form of having, such as “have” and “has”), “including” (and any form of including, such as “includes” and “include”) or “containing” (and any form of containing, such as “contains” and “contain”) are inclusive or open-ended and do not exclude additional, unrecited elements or method steps. In certain embodiments, the present invention may also include methods and compositions in which the transition phrase “consisting essentially of” or “consisting of” may also be used, and which refer to the use of the active components or solutions of the present invention with no additional active agent(s).

[0048] The term “or combinations thereof” as used herein refers to all permutations and combinations of the listed items preceding the term. For example, “A, B, C, or combinations thereof” is intended to include at least one of: A, B, C, AB, AC, BC, or ABC, and if order is important in a particular context, also BA, CA, CB, CBA, BCA, ACB, BAC, or CAB. Continuing with this example, expressly included are combinations that contain repeats of one or more item or term, such as BB, AAA, AB, BBC, AAABCCCC, CBBAAA, CABABB, and so forth. The skilled artisan will understand that typically there is no limit on the number of items or terms in any combination, unless otherwise apparent from the context.

[0049] As used herein, words of approximation such as, without limitation, “about”, “substantial” or “substantially” refers to a condition that when so modified is understood to not necessarily be absolute or perfect but would be considered close enough to those of ordinary skill in the art to warrant designating the condition as being present. The extent to which the description may vary will depend on how great a change can be instituted and still have one of ordinary skill in the art recognize the modified feature as still having the required characteristics and capabilities of the unmodified feature. In general, but subject to the preceding discussion, a numerical value herein that is modified by a word of approximation such as “about” may vary from the stated value by at least plus-or-minus 1, 2, 3, 4, 5, 6, 7, 10, 12 or 15%.

[0050] All of the compositions and/or methods disclosed and claimed herein can be made and executed without undue experimentation in light of the present disclosure. While the compositions and methods of this invention have been described in terms of preferred embodiments, it will be apparent to those of skill in the art that variations may be applied to the compositions and/or methods and in the steps or in the sequence of steps of the method described herein without departing from the concept, spirit and scope of the invention. All such similar substitutes and modifications apparent to those skilled in the art are deemed to be within the spirit, scope and concept of the invention as defined by the appended claims.

What is claimed is:

1. An improved method of recycling one or more polymers from a flooring material that has been contacted with a solvent to provide a reclaimed polymer, the improvement comprising:

cutting the flooring material into portions to provide contact between the flooring material and the solvent; and contacting the portions of flooring material with a mechanical disruptor that both pulls and separates the one or polymers concurrently in at least two different directions for a time sufficient to separate the one or more polymers, wherein the polymers are removed from an adhesive backing of the flooring material.

2. The method of claim 1, wherein greater than 70, 75, 80, 85, 90, 95, 96, 97, 98, or 99% of the carpet components are recycled.

3. The method of claim 1, wherein the mechanical disruptor is defined further as comprising two or more mixing heads, blades, beaters, whisks, paddles, jets, screws, or rollers that provide the mechanical disruption in the at least two different directions.

4. The method of claim 1, wherein the solvent is selected from at least one of a terpene solvent, a D-limonene, a pinene, an α -pinene or water.

5. The method of claim 1, wherein the wherein the solvent is a soy based solvent.

6. The method of claim 1, wherein the mechanical disruptor is contacted with the portions of the flooring material for a time sufficient to separate the one or more polymers without substantially sheering the one or more polymers.

7. The method of claim 1, wherein the mechanical disruptor is contacted with the carpet components for 1 to 30, 2 to 25, 3 to 20, 4 to 15, 5 to 15, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, or 15 minutes without substantially sheering the two or more polymers.

8. The method of claim 1, wherein the one or more polymers are selected from at least one of a HDPE, LDPE, LLDPE, ULDPE, VLDPE, VLLDPE, copolymers of ethylene and α -olefins, polypropylene, copolymers of propylene and α -olefins, copolymers of propylene and ethylene, EVA, and EMA.

9. The method of claim 1, wherein following the separation of the one or more polymers, the one or more polymers are at least about 70% ash-free.

10. The method of claim 1, wherein following the separation of the one or more polymers, the one or more polymers are substantially ash-free.

11. A method of recycling one or more polymers from a flooring material comprising:

subjecting a flooring material cut into portions that permit contact between the flooring material to a solvent that dissolves an adhesive backing thereof;

contacting the flooring material portions with a mechanical disruptor that both pulls and separates one or more polymers of the flooring material from the adhesive backing

concurrently in at least two different directions for a time sufficient to separate the one or more polymers from the adhesive backing; and

separating any remaining adhesive away from the one or more polymers by at least one of crushing or squeezing, wherein greater than about 70% of components of the flooring material may be recycled.

12. The method of claim 11, wherein greater than about 90% of components of the flooring material may be recycled.

13. The method of claim 11, wherein substantially all components of the flooring material may be recycled.

14. The method of claim 11, wherein the solvent is selected from at least one of a terpene solvent, a D-limonene, a pinene, an α -pinene or water.

15. The method of claim 11, wherein the mechanical disruptor comprises two or more mixing heads, blades, beaters, whisks, paddles, jets, screws, or rollers that provide the mechanical disruption in the at least two different vectors.

16. The method of claim 11, wherein the flooring material portions are contacted with the mechanical disruptor after subjecting the flooring material portions to the solvent.

17. The method of claim 11, wherein the flooring material portions are contacted with the mechanical disruptor for about 1 to 30 minutes to separate the one or more polymers without substantially sheering the one or more polymers

18. The method of claim 11, wherein the one or more polymers are selected from at least one of a HDPE, LDPE, LLDPE, ULDPE, VLDPE, VLLDPE, copolymers of ethylene and α -olefins, polypropylene, copolymers of propylene and α -olefins, copolymers of propylene and ethylene, EVA, and EMA.

19. The method of claim 11, wherein following the separation of the one or more polymers, the one or more polymers are at least about 70% ash-free.

20. A system for recycling one or more polymers from a flooring material cut into portions that allow contact with a solvent comprising:

a vat or container configured to accept portions of a cut flooring material and subject the cut flooring material portions to the solvent;

a mechanical disruptor that both pulls and separates the one or more polymers from an adhesive backing concurrently in at least two different directions for a time sufficient to separate the one or more polymers from the adhesive backing following subjecting the cut flooring material portions to the solvent; and

one or more rollers configured to crush adhesive particles remaining on the one or more polymers, wherein the system achieves complete separation of the one or more polymer components and the adhesive backing without substantially sheering the one or more polymers.

* * * * *