

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
28 February 2008 (28.02.2008)

PCT

(10) International Publication Number
WO 2008/024401 A1

- (51) **International Patent Classification:**
H01M 8/02 (2006.01) H01M 8/24 (2006.01)
 - (21) **International Application Number:**
PCT/US2007/018575
 - (22) **International Filing Date:** 22 August 2007 (22.08.2007)
 - (25) **Filing Language:** English
 - (26) **Publication Language:** English
 - (30) **Priority Data:**
11/509,328 23 August 2006 (23.08.2006) US
 - (71) **Applicant (for all designated States except US):** BALLARD POWER SYSTEMS INC. [CA/CA]; 9000 Glenlyon Parkway, Burnaby, British Columbia V5J 5J8 (CA).
 - (71) **Applicant (for ZW only):** BALLARD MATERIAL PRODUCTS INC. [US/US]; Two Industrial Avenue, Lowell, Massachusetts 01851-5199 (US).
 - (72) **Inventor; and**
 - (75) **Inventor/Applicant (for US only):** FARRINGTON, Simon [GB/CA]; 3273 West 2nd Avenue, Vancouver, British Columbia V6K 1K9 (CA).
 - (74) **Agents:** HERMANN, Karl, R. et al.; Seed Intellectual Property Law Group PLLC, Suite 5400, 701 Fifth Avenue, Seattle, Washington 98104-7064 (US).
 - (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
 - (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
- with international search report
 - before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) **Title:** BIPOLAR SEPARATORS WITH IMPROVED FLUID DISTRIBUTION

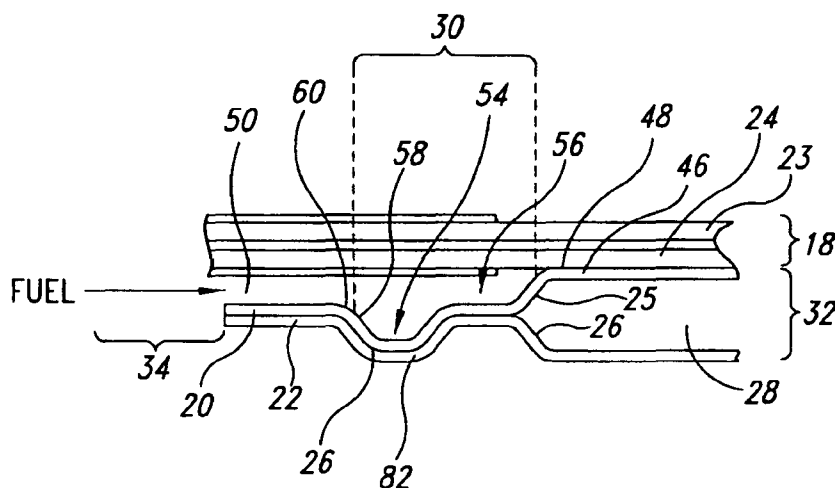

(57) **Abstract:** A fuel cell separator having a first plate (20), the first plate (20) including an active surface (48) comprising a reactant flow field (46) and a header (30) fluidly connected thereto, an opposing non-active surface, and a header channel (50) fluidly connected to the header (30), wherein the header (30) further includes a recess (54) directly fluidly connected to one end of the header channel (50), wherein the recess (54) comprises a top perimeter (60) and a side wall (58). In one embodiment, the header channel (50) is formed on the active surface (48) of the plate. In another

embodiment, the header channel is formed on the non-active surface of the plate and the side wall of the header further comprises at least one fluid port (94) fluidly connected to the end of the header channel.

WO 2008/024401 A1

BIPOLAR SEPARATORS WITH IMPROVED FLUID DISTRIBUTION

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit under 35 U.S.C. § 119(e) of U.S. Provisional Patent Application No. 60/_____, filed August 23, 2006 (formerly U.S. Application No. 11/509,328, converted to provisional by Petition dated August 20, 2007), which provisional application is incorporated herein by reference in its entirety.

BACKGROUND

Technical Field

The present invention relates to bipolar separators for fuel cells and, in particular, bipolar separators with improved flow properties.

Description of the Related Art

Electrochemical fuel cells convert reactants to generate electric power and reaction products. Electrochemical fuel cells generally employ an electrolyte interposed between two electrodes, namely a cathode and an anode, to form an electrode assembly, which is typically interposed between two electrically conductive flow field plates or separator plates (separators) made of carbonaceous, graphitic, and/or metallic materials. These separators act as current collectors, provide support for the electrodes, and provide passages for the reactants and products. Such separators may comprise channels to direct the flow of reactants to the anode and the cathode, and to remove excess reactants and their reaction products, such as water formed during fuel cell operation.

Fuel cells may employ bipolar separators having an anode flow field on one surface, and a cathode flow field on the opposing surface. Alternatively, a bipolar separator may be employed having an anode flow field plate with an anode flow field on its active surface, and a cathode flow field plate with a cathode flow field on its active surface, joined together around their peripheral edges to form a coolant flow field

between their non-active surfaces. In such cases, the bipolar separator is sealed so the coolant does not leak from the fuel cell.

Typically, a number of fuel cells are electrically coupled in series to form a fuel cell stack. The fuel cell stack may contain supply and exhaust manifolds for directing the flow of reactants to/from the fuel cell stack. In some cases, the anode and cathode plates have header regions (“headers”) between the manifold openings and the respective flow fields. The primary function of such headers is to evenly distribute flow to or from the manifold openings and the respective flow fields. This is accomplished by providing paths for the fluid to travel having various distances (as determined by the width of the flow field) with minimum differences in flow resistance between the various paths.

Existing header configurations generally cause unacceptably high gas velocities where the gas exits the manifold openings and enters the headers, which results in uneven flow (*i.e.*, uneven “sharing”) between the flow channels in the flow field. For example, the flow channels that are closer to the manifold opening will receive reactant at a higher pressure than the flow channels that are farther from the manifold opening, thus resulting in different channel-to-channel flow distributions. Furthermore, manufacturing defects may create slightly different flow channel geometries for each of the flow channels (*e.g.*, different cross-sectional areas), resulting in different flow resistances and, thus, different channel-to-channel flow distributions.

As a result, there remains a need to develop bipolar separators with improved fluid distribution properties. The present invention addresses this issue and provides further related advantages.

BRIEF SUMMARY

Briefly, the present invention relates to a fuel cell separator comprising a first plate, the first plate comprising an active surface comprising a flow field and a header fluidly connected thereto, an opposing non-active surface, and a header channel fluidly connected to the header, wherein the header further comprises a recess directly fluidly connected to one end of the header channel, wherein the recess comprises a top

perimeter and a side wall. In other embodiments, the invention relates to an electrochemical fuel cell stack comprising the fuel cell separator.

According to one embodiment of the present invention, the header channel is formed on the active surface of the first plate between a manifold opening and the recess. The manifold opening may be a supply manifold opening, wherein fluid is supplied from the manifold opening to a flow field on the active surface of the first plate through the header channel and the recess. Alternatively, the manifold opening may be an exhaust manifold opening, wherein fluid is exhausted from the flow field on the active surface of the first plate to the manifold opening through the recess and the header channel.

According to another embodiment of the present invention, the header channel is formed on the non-active surface of the first plate between the manifold opening and the recess. In this embodiment, the side wall of the header further comprises a fluid port fluidly connected to the end of the header channel. The manifold opening may be a supply manifold opening, wherein fluid is supplied from the manifold opening to a flow field on the active surface of the first plate through the header channel, the fluid port, and the recess. Alternatively, the manifold opening may be an exhaust manifold opening, wherein fluid is exhausted from the flow field on the active surface of the first plate to the manifold opening through the recess, the fluid port, and the header channel.

According to yet another embodiment of the present invention, the fuel cell separator further comprises a second plate, the second plate comprising a second active surface and an opposing second non-active surface adjoining the first non-active surface. In one embodiment, the second plate comprises a second flow field and a second header fluidly connected thereto on the second active surface, and a second header channel fluidly connected to the second header, wherein the second header further comprises a second recess directly fluidly connected to one end of the second header channel, wherein the second recess comprises a second top perimeter and a second side wall.

According to another embodiment of the present invention, an electrochemical fuel cell stack comprises: a plurality of electrode assemblies each

comprising a first electrode, a second electrode, and an electrolyte interposed between the first and second electrodes; and a separator interposed between adjacent pairs of the plurality of electrode assemblies. The separator comprises a first plate, the first plate comprising a first active surface comprising a first reactant flow field and a first header
5 fluidly connected thereto, an opposing first non-active surface, and a first header channel fluidly connected to the first header, wherein the first header further comprises a first recess directly fluidly connected to one end of the first header channel, wherein the first recess comprises a first top perimeter and a first side wall.

These and other aspects of the invention will be evident upon review of
10 the following disclosure and attached figures.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

In the figures, identical reference numbers identify similar elements or acts. The sizes and relative positions of elements in the figures are not necessarily drawn to scale. For example, the shapes of various elements and angles are not drawn
15 to scale, and some of these elements are arbitrarily enlarged and positioned to improve figure legibility. Further, the particular shapes of the elements, as drawn, are not intended to convey any information regarding the actual shape of the particular elements, and have been solely selected for ease of recognition in the figures.

Figure 1 shows an exploded view of an electrochemical fuel cell stack
20 according to one embodiment of the present invention.

Figure 2A shows a plan view of the bipolar separator from the anode side according to one embodiment of the present invention.

Figure 2B shows a plan view from the cathode side of the bipolar separator of Figure 1A.

25 Figure 3A shows a cross-sectional view of the bipolar separator at section A-A of Figure 1A.

Figure 3B shows a cross-sectional view of the bipolar separator at section B-B of Figure 1A.

30 Figure 4A shows a plan view of the bipolar separator from the anode side according to another embodiment of the present invention.

Figure 4B shows a plan view from the cathode side of the bipolar separator of Figure 3A.

Figure 5A shows a cross-sectional view of the recess in the bipolar separator according to another embodiment of the present invention.

5 Figure 5B shows a cross-sectional view of the recess in the bipolar separator according to another embodiment of the present invention.

Figure 5C shows a cross-sectional view of the recess in the bipolar separator according to another embodiment of the present invention.

10 Figure 5D shows a cross-sectional view of the recess in the bipolar separator according to another embodiment of the present invention.

Figure 5E shows a cross-sectional view of the recess in the bipolar separator according to another embodiment of the present invention.

Figure 6A shows a cross-sectional view of the recess in the bipolar separator according to another embodiment of the present invention.

15 Figure 6B shows a cross-sectional view of the recess in the bipolar separator according to another embodiment of the present invention.

Figure 6C shows a cross-sectional view of the recess in the bipolar separator according to another embodiment of the present invention.

20 Figure 7A shows a plan view of the bipolar separator from the anode side according to another embodiment of the present invention.

Figure 7B shows a plan view of the bipolar separator from the cathode side according to another embodiment of the present invention.

Figure 8A shows a cross-sectional view of the bipolar separator at section C-C of Figure 7A.

25 Figure 8B shows a cross-sectional view of the bipolar separator at section D-D of Figure 7A.

Figure 9 shows a plan view of the bipolar separator from the anode side according to another embodiment of the present invention.

DETAILED DESCRIPTION

Unless the context requires otherwise, throughout the specification and claims which follow, the word “comprise” and variations thereof, such as “comprises” and “comprising” are to be construed in an open, inclusive sense, that is as “including
5 but not limited to”.

The present invention is generally related to bipolar separators for fuel cells, such as phosphoric acid fuel cells, solid oxide fuel cells, and, in particular, polymer electrolyte membrane fuel cells. Bipolar separators may also be employed in electrolyzers having an electrode assembly structure.

10 Figure 1 is an exploded perspective view of a fuel cell stack incorporating the bipolar separator of the present invention. Fuel cell stack 10 includes a pair of end plate assemblies 12,14 and a plurality of stacked fuel cell assemblies 16, each comprising a membrane assembly 18 disposed between an anode plate 20 and a cathode plate 22. Anode 24 of electrode assembly 18 contacts the active surface of anode plate 20 and the cathode of electrode assembly 18 (not shown) contacts the active
15 surface of cathode plate 22. Non-active surface 25 of anode plate 20 of a fuel cell assembly cooperates with non-active surface 26 of cathode plate 22 of an adjacent fuel cell to form a coolant flow field 28 therebetween. Fluid streams are supplied to and exhausted from stack 10 via inlet and outlet ports 30 in end plate assemblies 12,14.
20 Aligned internal manifold openings are formed in the plates and the membrane assemblies to form internal manifolds extending through stack 10, discussed in further detail below.

Figure 2A is a plan view of bipolar fuel cell separator 32 from the anode side, while Figure 2B is a plan view of bipolar fuel cell separator 32 from the cathode
25 side. Bipolar fuel cell separator 32 includes a fuel supply manifold opening 34 and oxidant supply manifold opening 36, with corresponding fuel exhaust manifold opening 38 and oxidant exhaust manifold opening 40, as well as coolant supply manifold opening 42 and coolant exhaust manifold opening 44.

Figure 3A is a cross-sectional view of bipolar fuel cell separator 32
30 along line A-A of Figure 2A, and Figure 3B is a cross-sectional view of bipolar fuel cell separator 32 along line B-B of Figure 2A.

Referring to Figure 3A, separator 32 includes an anode plate 20 and a cathode plate 22. Anode plate 20 comprises an anode flow field with anode flow channels 46 on active surface 48, a fuel supply manifold opening 34, and a fuel supply header 30 fluidly connecting manifold opening 34 with flow channels 46. Anode supply header channel 50 fluidly connects manifold opening 34 to header 30. Header 30 contains a recess 54 formed in plate 20. In the illustrated embodiment, recess 54 is formed between header channel 50 and remainder portion 56 of header 30, and fluidly connects them. In operation, a fluid, such as fuel (represented by the arrow), is supplied from manifold opening 34 to header channel 50 and flows into recess 54 prior to flowing into remainder portion 56 and then into flow channels 46. Side walls 58 of recess 54 extend from top perimeter 60 down into anode plate 20. Recess 54 may be deeper than remainder portion 56, for example, on the same plane as the bottom of flow channels 46 (not shown).

Referring to Figure 3B, cathode plate 22 comprises a cathode flow field with cathode flow channels 62 on active surface 64, an oxidant supply manifold opening 36, and an oxidant supply header 66 fluidly connecting manifold opening 36 with flow channels 62. Cathode supply header channel 68 fluidly connects manifold opening 36 with header 66. Recess 70 of cathode plate 22 is formed between header channel 68 and remainder portion 72 of header 66, and fluidly connects them. In operation, a fluid, such as an oxidant (represented by the arrow), is supplied from manifold opening 36 to header channel 68 and flows into recess 70 prior to flowing into remainder portion 72 and then into flow channels 62. Side walls 74 of recess 70 extend from bottom perimeter 76 up into cathode plate 22. Recess 70 may be deeper than remainder portion 72, for example, on the same plane as the bottom of flow channels 62 (not shown).

Without being bound by theory, it is believed that recess 54,70 helps to eliminate pressure gradients within header 30,66, respectively, and to decrease the fluid velocity as it is supplied to remainder portion 56,72, respectively. Thus, the fluid flowing out of recess 54,70 will be more uniformly supplied from header 30,66, respectively, to flow channels 46,62, respectively, thereby creating a more uniform channel-to-channel flow distribution therein.

In both of Figures 3A and 3B, membrane assembly 18 is depicted for purpose of illustrating the flow of fuel and oxidant, respectively. In Figure 2A, anode 24 of membrane assembly 18 is in contact with the anode flow field. In Figure 2B, cathode 23 of membrane assembly 18 is in contact with the cathode flow field. It should be understood that a membrane assembly would be adjacent both the anode and cathode flow field of bipolar fuel cell separator 32, although only a single membrane assembly is illustrated in Figures 3A and 3B.

As illustrated in Figures 2A and 2B, the manifold openings are formed in the plate. However, one of ordinary skill in this field will appreciate that external openings may be formed in frames attached to the edge of the separator. For example, in Figure 4A, separator 32 comprises a frame 78 that contains manifold openings, which surrounds cathode flow channels 62 and header 66, and is externally attached to the peripheral edge of cathode flow field plate 22. In other embodiments, header 66 may be formed in frame 78, if desired, which surrounds cathode flow channels 62, such as shown in Figure 4B. Other separator and frame arrangements may be employed, if desired, such as described in co-pending application titled "Bipolar Flow Field Plate Assembly and a Method of Making the Same", U.S. Application No. 11/509,325, filed August 23, 2006.

Recesses 54,70 may be any planar shape or configuration, such as, but not limited to, square, rectangular, circular, and triangular. In certain embodiment, referring to Figure 5A, the angle of side walls 58,74 (*i.e.*, the slope of the side walls relative to active surfaces 48,64, respectively) may be between about 45° to about 90°, generally from about 60° to about 90°, and typically from 80° to 90°. In certain embodiments, sidewalls 58,74 may be chamfered at top perimeter 60,76, as shown in Figure 5A. In other embodiments, side walls 58,74 may be curved to reduce flow resistance within the respective recess as the fluid enters the recess, such as that shown in Figures 5B and 5C. In yet other embodiments, top perimeter 60,76 may further comprise a lip 80 that protrudes from top perimeter 60,76, as shown in Figure 5D, it being understood that the end of header channels 52,68 pass through lip 80 into recesses 54,70. In other embodiments, header channel 52,68 may be on a different plane than remainder portion 56,72, as shown in Figure 5E.

Referring again to Figures 3A and 3B, plates 20,22 each comprise a ridge 82 on its active surface in the corresponding position to recess 54,70, respectively, on the active surface of the adjacent plate. For example, in Figure 3A ridge 82 protrudes from cathode plate 22 to accommodate recess 54 of anode plate 20. Recess 54 contacts non-active surface 25 of cathode plate 22 at ridge 82 so that recess 54 may be made deeper than remainder portion 56 of anode plate 20, if desired.

In Figures 3A and 3B, recesses 54,70 contact ridge 82 of the respective adjacent plate. In alternative embodiments, recesses 54,70 do not contact ridge 82 of the respective adjacent plate, as shown by gap 84 in Figure 6A. In other embodiments, openings in either plate are employed in forming the header recess. For example, in the embodiment illustrated in Figure 6C, sidewalls 58 of the opening in plate 20 cooperate with adjacent surfaces of ridge 82 to form recess 54. Alternatively, recess 54 of plate 20 may protrude through a corresponding opening 86 in plate 22, as shown in Figure 6B.

In the illustrated embodiments, and as illustrated in Figures 3A and 3B, non-active surface 25 of anode plate 20 and non-active surface 26 of cathode plate 22 cooperate to form a coolant flow field 28 therebetween. Coolant is provided between non-active surfaces 25,26 from coolant supply manifold opening 42, and exits coolant exhaust manifold opening 44, as shown in Figures 2A and 2B. In some embodiments, coolant flow channels may be formed in coolant flow field 28 on at least one of non-active surfaces 25,26 (not shown).

Anode and cathode plates 20,22 may be formed from a carbonaceous or graphitic material, such as impregnated expanded graphite, or from a metallic material, such as a coated steel, and may be bonded together to form bipolar flow field plate 32 by any means known in the art. For example, an adhesive may be placed into a seal groove that circumscribes the manifold openings and/or the coolant flow field on the non-active surface of the anode and/or cathode plate to adhesively join the plates, such as described in U.S. Patent No. 6,777,127. As another example, metallic anode and cathode plates may be welded around the manifold openings and/or the coolant flow field on the non-active surface of the anode and/or cathode plate to bond the plates together.

In the embodiments discussed above, header channels 50,68 are formed on the active surface of the plate. Alternatively, header channels 50,68 may be formed on the non-active surface of the plate, as described herein below.

Figure 7A is a plan view of a bipolar fuel cell separator 88 from the anode side and Figure 7B is a plan view of bipolar fuel cell separator 88 from the cathode side.

Figure 8A is a cross-sectional view of bipolar fuel cell separator 88 along line C-C of Figure 7A, and Figure 8B is a cross-sectional view of bipolar fuel cell separator 88 along line D-D of Figure 7A.

Referring to Figure 8A, separator 88 includes an anode plate 20 and a cathode plate 22. Anode plate 20 comprises an anode flow field with anode flow channels 46 on active surface 48, a fuel supply manifold opening 34, and a fuel supply header 50 fluidly connecting manifold opening 34 with flow channels 46. Anode supply header channel 92 fluidly connects manifold opening 34 to header 50. Header 50 contains a recess 54 formed in plate 20 that is formed between header channel 92 and remainder portion 56, and fluidly connects them. In the illustrated embodiment, anode supply header channel 92 is formed between non-active surfaces 25,26 and extends from manifold opening 34 to recess 54 via fluid port 94. Fluid port 94 penetrates through the thickness of anode plate 20 into recess 54, thereby fluidly connecting manifold opening 34 to flow channels 46. In operation, a fluid, such as fuel (represented by the arrow), is supplied from manifold opening 20 to header channel 92 and flows into recess 54 prior to flowing into remainder portion 56 and then into flow channels 46. Side walls 58 of recess 54 extend from top perimeter 60 down into anode plate 20. Both recess 54 and region 93 help to create a more uniform channel-to-channel flow distribution in flow channels 46.

Referring to Figure 8B, cathode plate 22 comprises a cathode flow field with cathode flow channels 62 on active surface 64, an oxidant supply manifold opening 36, and an oxidant supply header 66 fluidly connecting manifold opening 36 with flow channels 62. Cathode supply header channel 96 fluidly connects manifold opening 36 with header 66. Header 66 contains a recess 70 formed in plate 22 that is formed between header channel 96 and remainder portion 72, and fluidly connects

them. In the illustrated embodiment, cathode supply header channel 96 is formed between non-active surfaces 25,26 and extends from manifold opening 36 to recess 70 via fluid port 98. Fluid port 98 penetrates through the thickness of cathode plate 22 into recess 70, thereby fluidly connecting manifold opening 36 to flow channels 62. In operation, a fluid, such as oxidant (represented by the arrow), is supplied from manifold opening 36 to header channel 96 and flows into recess 70 prior to flowing into remainder portion 72 and then into flow channels 62. Side walls 74 of recess 70 extend from bottom perimeter 76 down into cathode plate 22. Both recess 70 and region 97 help to create a more uniform channel-to-channel flow distribution in flow channels 62.

As mentioned earlier, in the illustrated embodiment, non-active surfaces 25,26 of anode and cathode plates 20,22, respectively, cooperate to provide header channels 92,96 for directing the fluid from a respective fuel or oxidant manifold opening to the respective flow channels. It should be understood that although header channels 92,96 each traverse the same non-active surfaces 25,26 of anode and cathode plates 20,22, header channels 92,96 are fluidly isolated from each other and from the coolant, for example, by the use of additional seals and/or adhesives. In other embodiments, only one of the anode and cathode plates comprises header channels 92,96 and fluid ports 94,98, respectively.

In both of Figures 8A and 8B, membrane assembly 18 is depicted for purpose of illustrating the flow of fuel and oxidant, respectively. In Figure 7A, anode 24 of membrane assembly 18 is in contact with the anode flow field and in Figure 7B, cathode 23 of membrane assembly 18 is in contact with the cathode flow field. It should be understood that a membrane assembly would be adjacent both the anode and cathode flow field of bipolar fuel cell separator 88, although only a single membrane assembly is illustrated in Figures 8A and 8B.

In another embodiment, a plurality of fluid ports 94,98 may be formed in the plates to fluidly connect the manifold openings to the respective active surfaces, such as anode plate 20 shown in Figure 9. Two fluid ports 94 fluidly connect manifold opening 34 to flow channels 46 via anode header supply channel 92 formed on the non-active side of anode plate 20. For example, fluid, such as fuel, is supplied from manifold opening 34 to anode supply header channel 92 (formed on the non-active

surface of anode plate 20 and defined by the dotted lines) to recess 54 via fluid ports 94, and then to remainder portion 56 and flow channels 46.

In any of the above embodiments, headers 50,66 further contain header protrusions 100, as shown in Figures 2, 4A, 4B, 7A, 7B, and 9. Header protrusions 100
5 may protrude from active surface 48,64 to support the contacting electrodes of the electrode assemblies in headers 30,66. One of ordinary skill in the art will appreciate that header protrusions 100 may be any configuration and is not limited to the configurations shown in the figures. However, the use of header protrusions 100 is optional.

10 In any of the above embodiments, anode plate 20 and cathode plate 22 may further comprise seal grooves for accommodating seals that fluidly isolate each of the manifolds and the flow channel area.

In the foregoing embodiments, the manifold openings, headers, and recesses are illustrated at the inlet or “supply” of the plates. However, one of ordinary
15 skill in the art will appreciate that the recesses may also be formed at the headers at the outlet or “exhaust” of the plates. In such instances, the fluid from the flow channels flows from the remainder of the header to the recess before entering the header channel that fluidly connects to the exhaust manifold opening. Furthermore, anode and cathode
20 plates are shown in the figures with recesses 54,70, respectively. In other embodiments, only one of the anode and the cathode plates comprises recesses 54,70, respectively.

All of the above U.S. patents, U.S. patent application publications, U.S. patent applications, foreign patents, foreign patent applications and non-patent
25 publications referred to in this specification and/or listed in the Application Data Sheet, are incorporated herein by reference, in their entirety.

While particular elements, embodiments, and applications of the present invention have been shown and described, it will be understood that the invention is not limited thereto since modifications may be made by those skilled in the art without
30 departing from the spirit and scope of the present disclosure, particularly in light of the foregoing teachings.

CLAIMS

What is claimed is:

1. A fuel cell separator comprising a first plate, the first plate comprising:
 - a first active surface comprising a first reactant flow field and a first header fluidly connected thereto;
 - an opposing first non-active surface; and
 - a first header channel fluidly connected to the first header;wherein the first header further comprises a first recess directly fluidly connected to one end of the first header channel, wherein the first recess comprises a first top perimeter and a first side wall.
2. The separator of claim 1 wherein the side wall has a draft angle of less than about 90 degrees with respect to the first active surface.
3. The separator of claim 1 further comprising at least one protrusion extending from the first active surface.
4. The separator of claim 1 wherein the plate material is selected from the group consisting of a metallic, carbonaceous, graphitic, and polymeric materials.
5. The separator of claim 1 wherein the first header is formed on the first active surface.
6. The separator of claim 1 wherein the first header channel is formed in the first non-active surface, and the first side wall of the first header further comprises at least one fluid port fluidly connected to the end of the first header channel.

7. The separator of claim 6 wherein at least a portion of the first side wall is curved.

8. The separator of claim 1 wherein the first plate further comprises a manifold opening fluidly connected to the other end of the first header channel that cooperate to form an internal manifold.

9. The separator of claim 1 further comprising a second plate comprising a second active surface and an opposing second non-active surface adjoining the first non-active surface.

10. The separator of claim 9 wherein the first and second non-active surfaces are bonded together.

11. The separator of claim 9 wherein the first and second non-active surfaces cooperate to form a coolant flow field therebetween.

12. The separator of claim 9 wherein the first plate is an anode plate and the second plate is a cathode plate.

13. The separator of claim 9 wherein the first header is a supply header.

14. The separator of claim 9 wherein the first header is an exhaust header.

15. The separator of claim 9 wherein the second plate further comprises:

a second flow field and a second header fluidly connected thereto on the second active surface; and

a second header channel fluidly connected to the second header;

wherein the second header further comprises a second recess directly fluidly connected to one end of the second header channel, wherein the second recess comprises a second top perimeter and a second side wall.

16. An electrochemical fuel cell stack comprising:

a plurality of electrode assemblies each comprising a first electrode, a second electrode, and an electrolyte interposed between the first and second electrodes;

a separator interposed between adjacent pairs of the plurality of electrode assemblies, the separator comprising a first plate, the first plate comprising:

a first active surface comprising a first reactant flow field and a first header fluidly connected thereto;

an opposing first non-active surface; and

a first header channel fluidly connected to the first header;

wherein the first header further comprises a first recess directly fluidly connected to one end of the first header channel, wherein the first recess comprises a first top perimeter and a first side wall.

17. The fuel cell stack of claim 16 wherein the first header is formed on the first active surface.

18. The fuel cell stack of claim 16 wherein the first header channel is formed in the first non-active surface, and the first side wall of the first header further comprises at least one fluid port fluidly connected to the end of the first header channel.

19. The fuel cell stack of claim 16 further comprising a second plate comprising a second active surface and an opposing second non-active surface adjoining the first non-active surface.

20. The fuel cell stack of claim 19 wherein the second plate further comprises:

a second flow field and a second header fluidly connected thereto on the second active surface; and

a second header channel fluidly connected to the second header;

wherein the second header further comprises a second recess directly fluidly connected to one end of the second header channel, wherein the second recess comprises a second top perimeter and a second side wall.

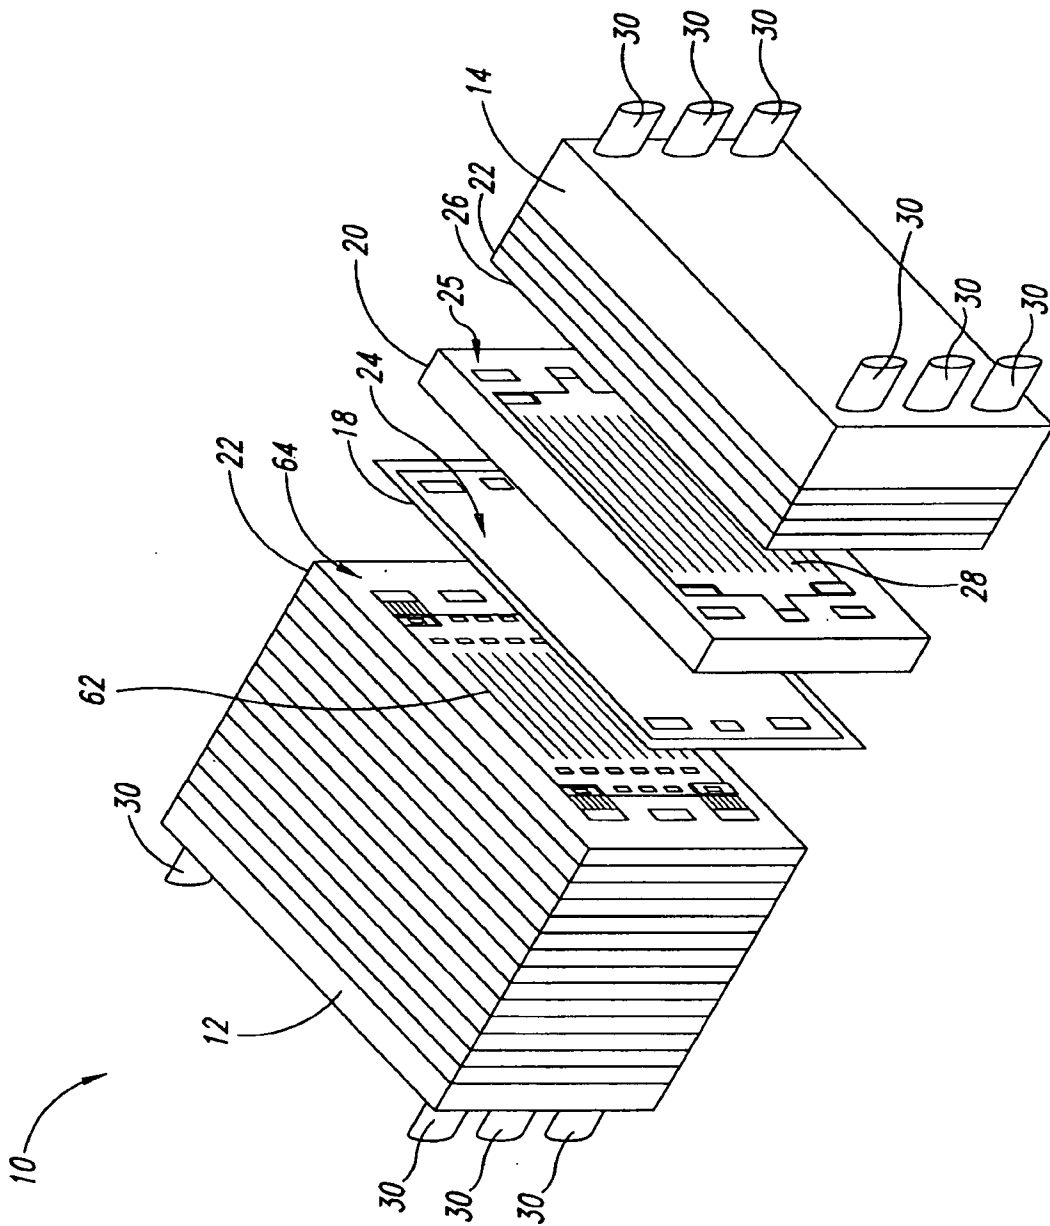


FIG. 1

2/10

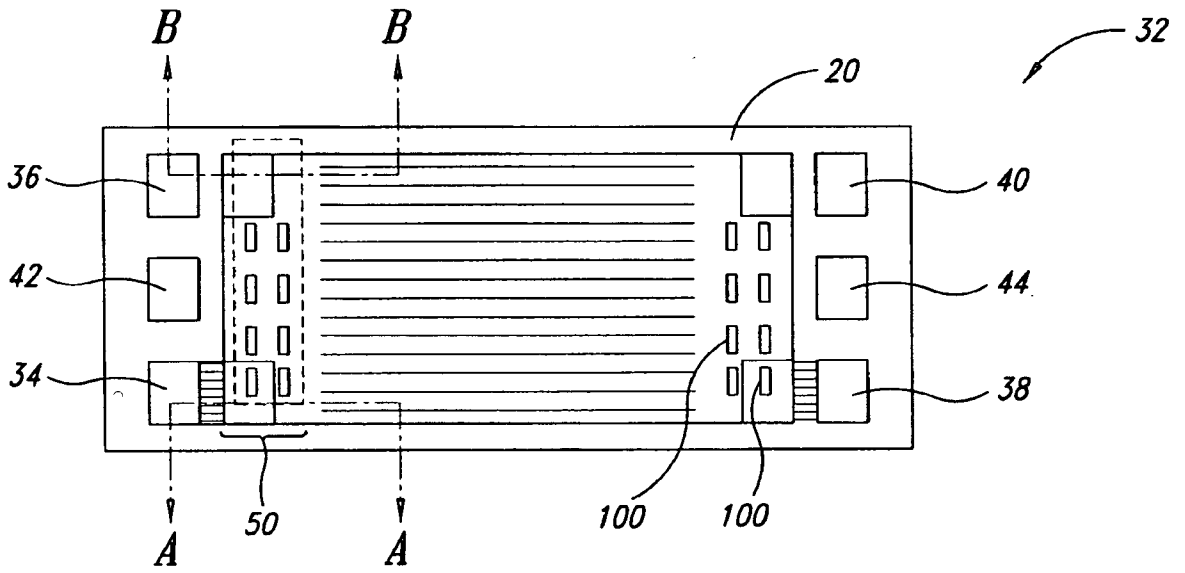


FIG. 2A

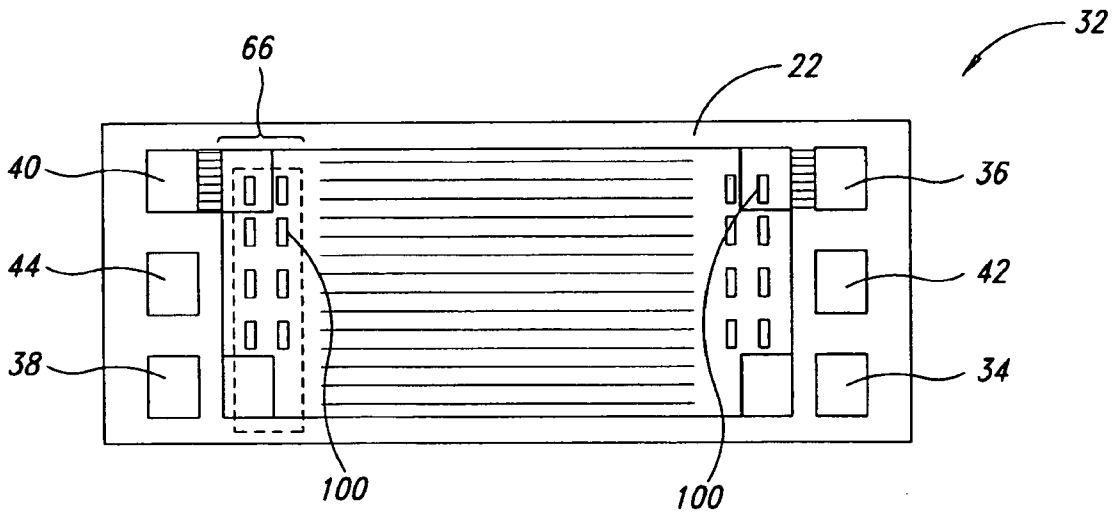


FIG. 2B

3/10

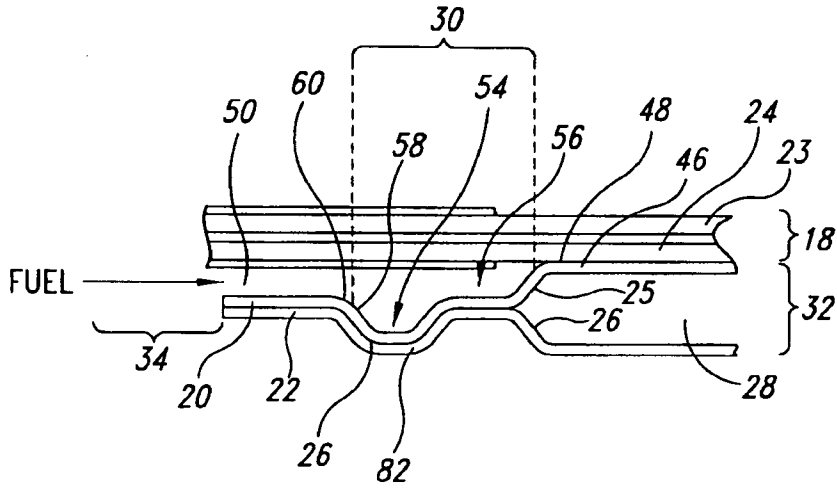


FIG. 3A

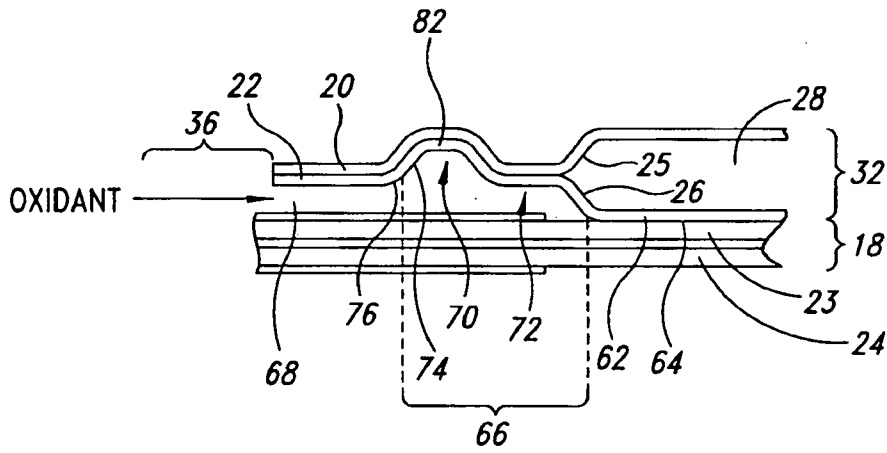


FIG. 3B

4/10

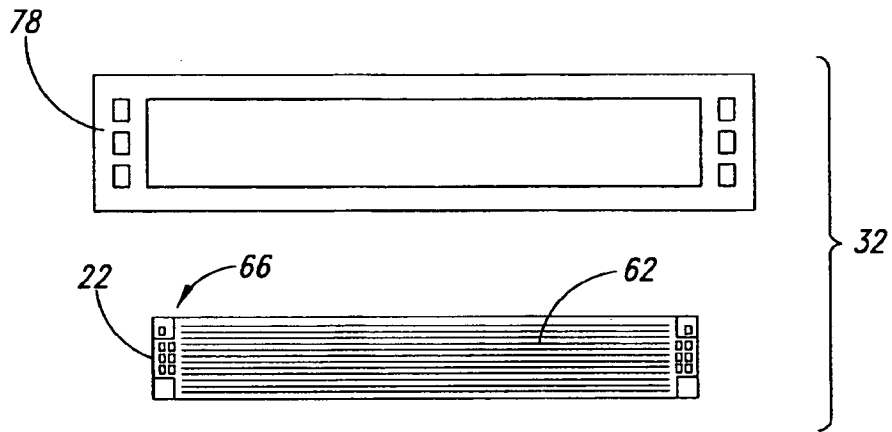


FIG. 4A

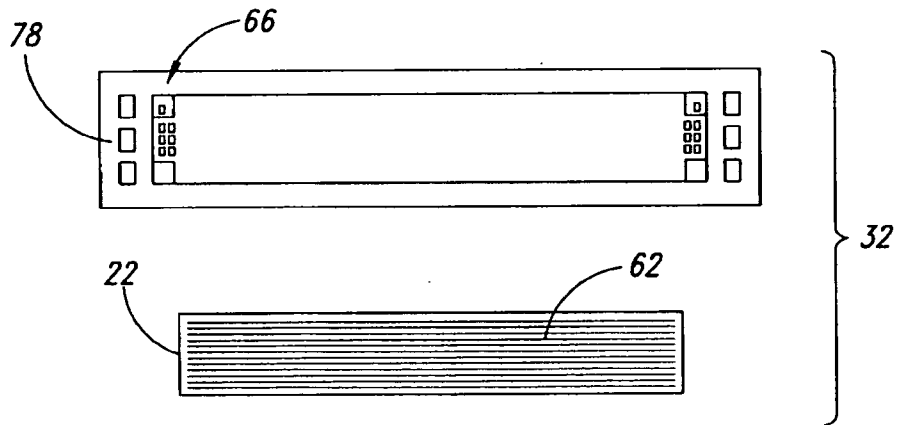


FIG. 4B

5/10

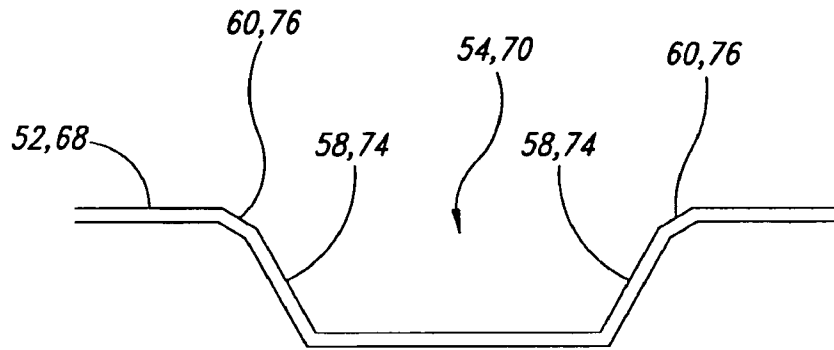


FIG. 5A

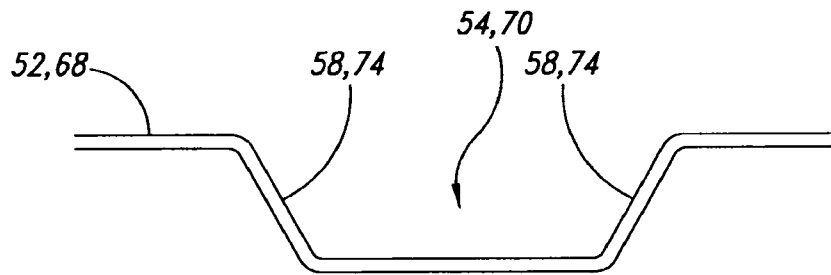


FIG. 5B

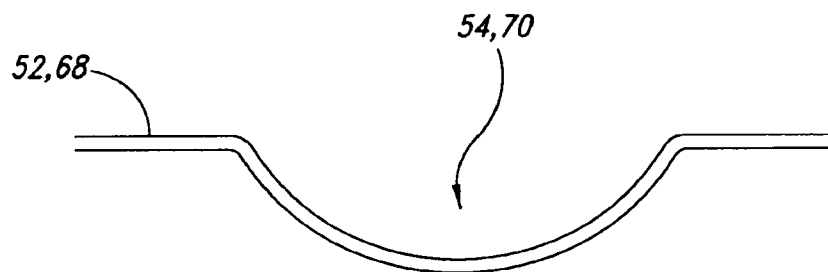


FIG. 5C

6/10

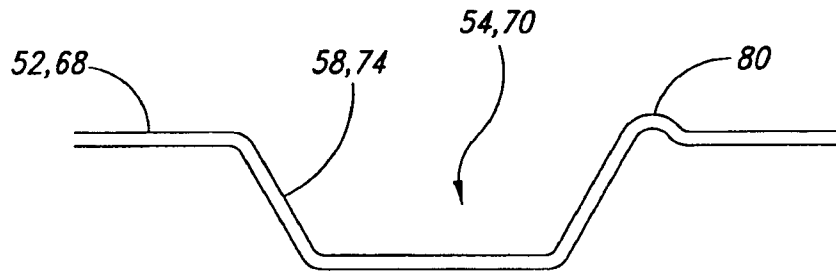


FIG. 5D

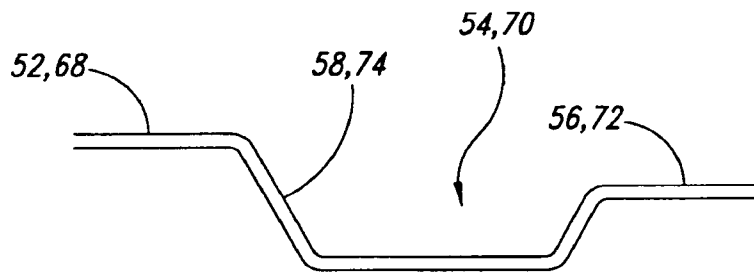


FIG. 5E

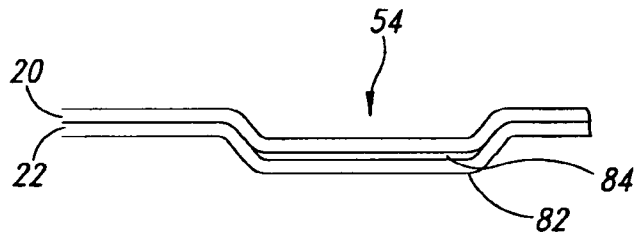


FIG. 6A

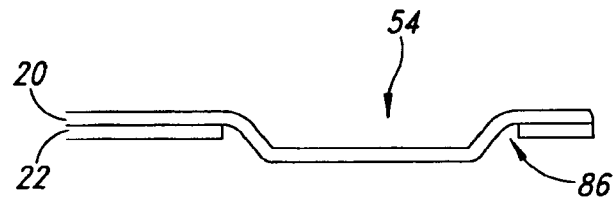


FIG. 6B

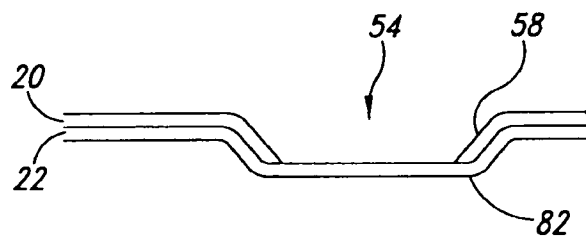


FIG. 6C

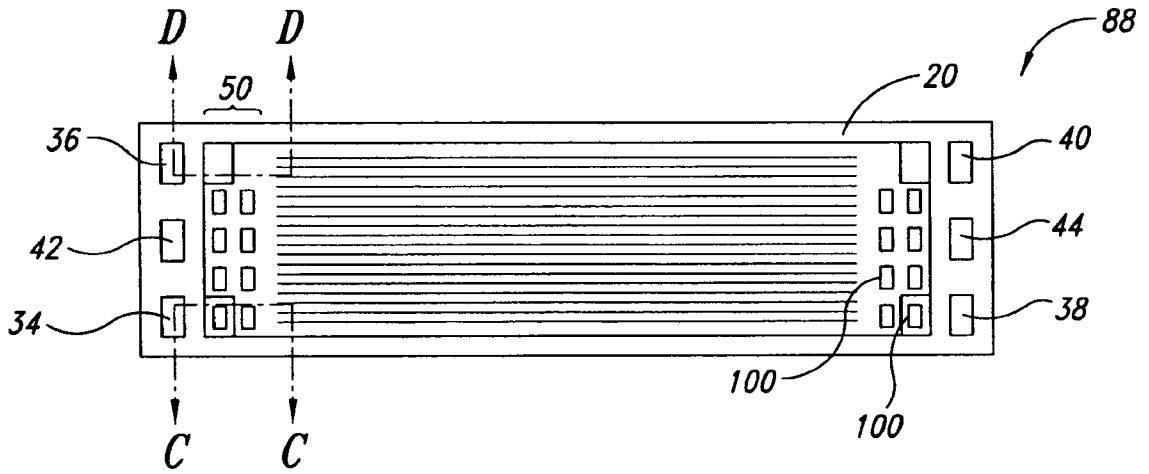


FIG. 7A

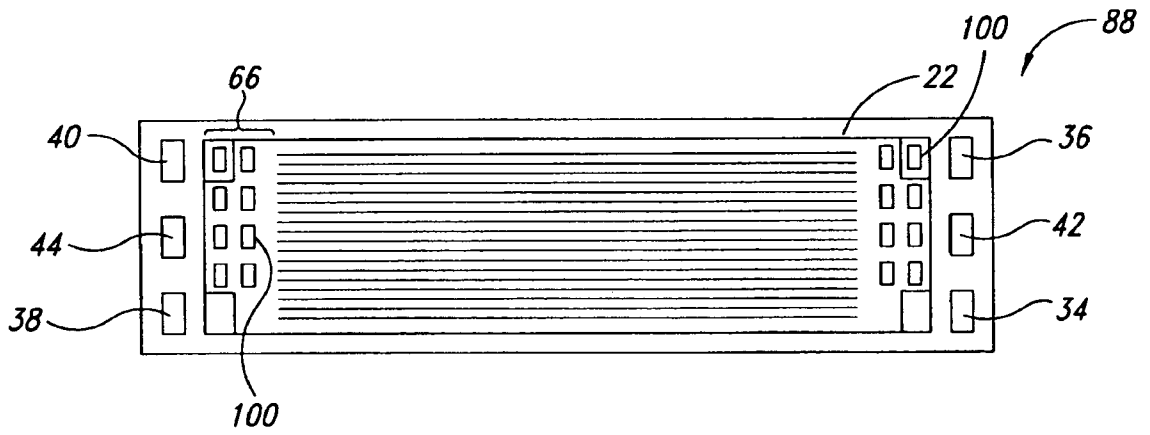


FIG. 7B

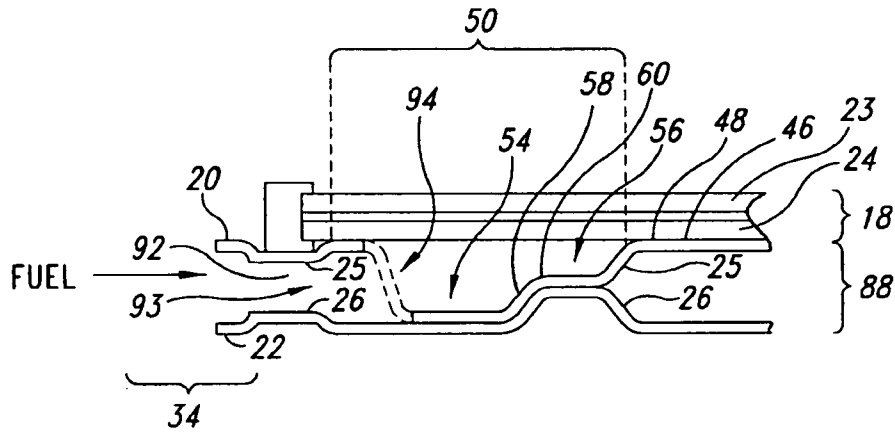


FIG. 8A

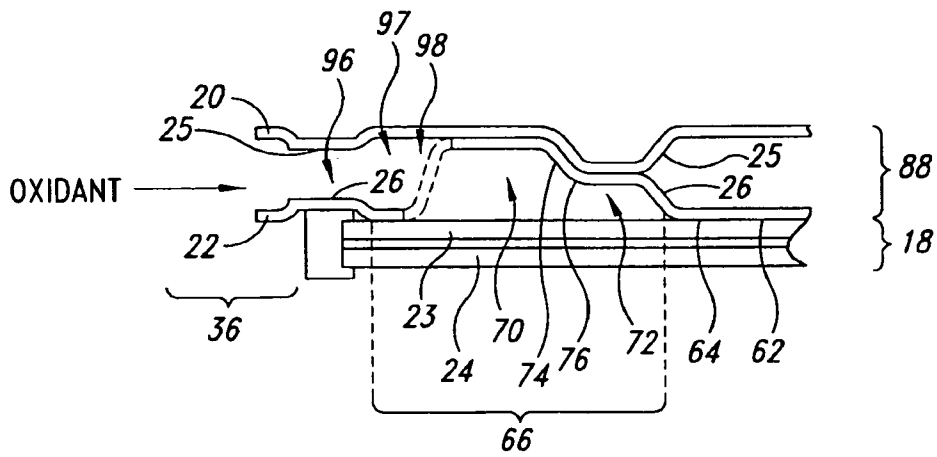


FIG. 8B

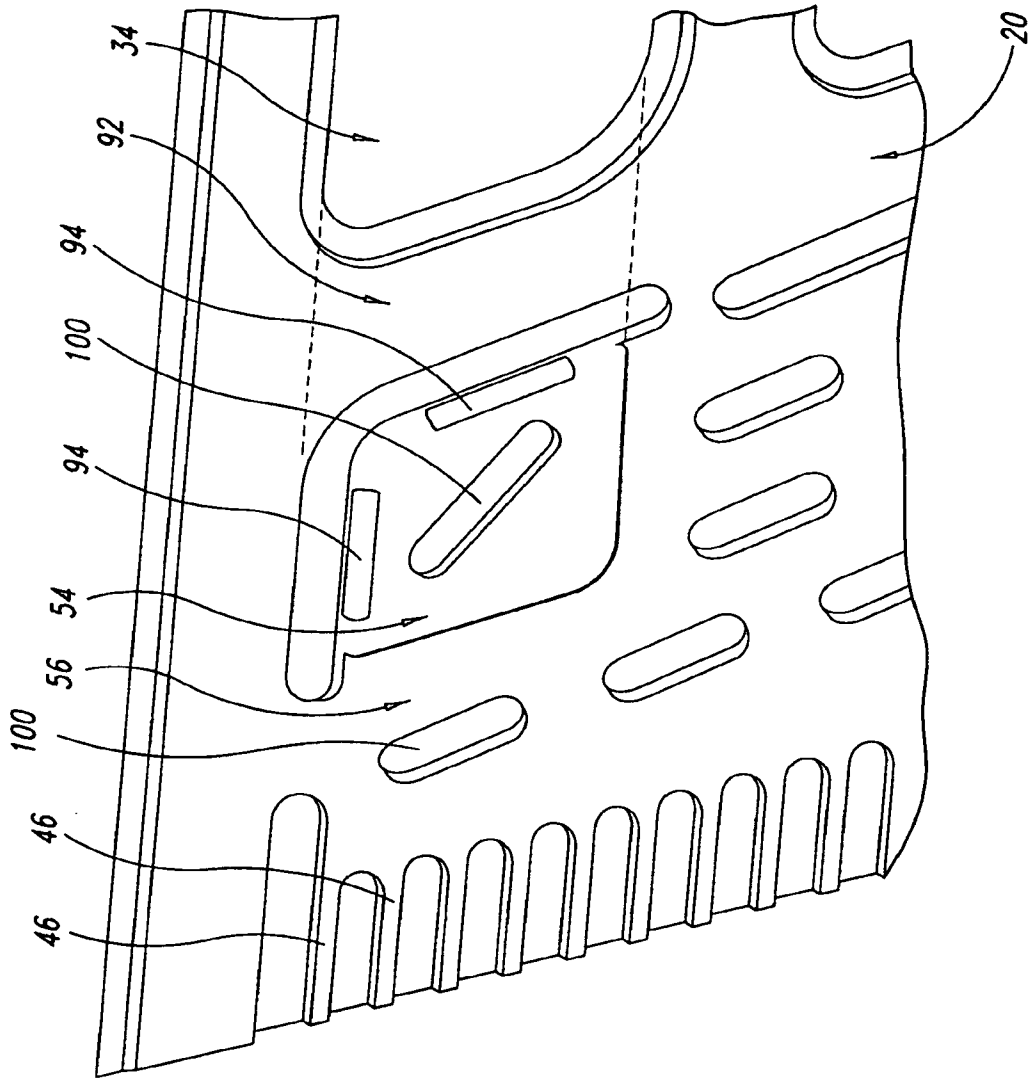


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/018575

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01M8/02 H01M8/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2006/003220 A1 (SUGIURA SEIJI [JP] ET AL) 5 January 2006 (2006-01-05) figures 1-11 paragraph [0005] paragraph [0010] paragraph [0014] - paragraph [0015]	1-20
A	US 2005/271910 A1 (BAI DINGRONG [CA] ET AL) 8 December 2005 (2005-12-08) figures 6-9 paragraph [0016] - paragraph [0017]	1-20
A	US 2004/115512 A1 (FUJII YOSUKE [JP] ET AL) 17 June 2004 (2004-06-17) figures 1-13	1-20
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

11 January 2008

Date of mailing of the international search report

18/01/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

FERNANDEZ MORALES, N

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/018575

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 441 403 A (ASIA PACIFIC FUEL CELL TECH [TW]) 28 July 2004 (2004-07-28) paragraph [0031] figures 1-8	1-20
A	US 2006/172177 A1 (SCHERER JOACHIM [DE] ET AL) 3 August 2006 (2006-08-03) figures 1-3	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2007/018575

Patent document cited in search report	Publication date	Publication date	Patent family member(s)	Publication date
US 2006003220	A1	05-01-2006	NONE	
US 2005271910	A1	08-12-2005	AU 2005253175 A1 CA 2567933 A1 WO 2005122305 A1 EP 1754271 A1 KR 20070030241 A	22-12-2005 22-12-2005 22-12-2005 21-02-2007 15-03-2007
US 2004115512	A1	17-06-2004	NONE	
EP 1441403	A	28-07-2004	CN 1507094 A	23-06-2004
US 2006172177	A1	03-08-2006	DE 102004057447 A1	01-06-2006