



HU000029024T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 029 024**(13) **T2****EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA(21) Magyar ügyszám: **E 13 782661**(22) A bejelentés napja: **2013. 10. 23.**

(96) Az európai bejelentés bejelentési száma:

EP 20130782661

(97) Az európai bejelentés közzétételi adatai:

EP 2916689 A1 **2014. 05. 15.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2916689 B1 **2016. 07. 20.**(51) Int. Cl.: **A47B 95/00** (2006.01)

(86) A nemzetközi (PCT) bejelentési szám:

PCT/EP 13/003197

(87) A nemzetközi közzétételi szám:

WO 14072026

(30) Elsőbbségi adatok:

MI20121894 **2012. 11. 07.** **IT**

(72) Feltaláló(k):

CATTANEO, Carlo, I-22060 Figino Serenza (Como) (IT)

(73) Jogosult(ak):

Leonardo S.r.L., 22060 Figino Serenza (IT)

(74) Képviselő:

SBGK Szabadalmi Ügyvivői Iroda, Budapest

(54)

Tökéletesített függesztő vasalat faliszekrény falı szerelvényéhez

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 916 689 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
20.07.2016 Bulletin 2016/29

(21) Application number: **13782661.6**

(22) Date of filing: **23.10.2013**

(51) Int Cl.:
A47B 95/00 (2006.01)

(86) International application number:
PCT/EP2013/003197

(87) International publication number:
WO 2014/072026 (15.05.2014 Gazette 2014/20)

(54) **PERFECTED HANGING BRACKET FOR THE WALL ASSEMBLY OF A WALL-CUPBOARD**
VERBESSERTE AUFHÄNGEKLAMMER ZUR WANDMONTAGE EINES WANDKASTENS
SUPPORT DE SUSPENSION PERFECTIONNÉ POUR L'ASSEMBLAGE MURAL D'UN PLACARD
MURAL

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **07.11.2012 IT MI20121894**

(43) Date of publication of application:
16.09.2015 Bulletin 2015/38

(73) Proprietor: **Leonardo S.r.L.**
22060 Figino Serenza (IT)

(72) Inventor: **CATTANEO, Carlo**
I-22060 Figino Serenza (Como) (IT)

(74) Representative: **Martegani, Franco et al**
via Carlo Alberto, 41
20900 Monza (IT)

(56) References cited:
WO-A1-2004/032681 WO-A1-2010/012504
DE-A1- 2 615 425

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a visible hanging bracket for the wall assembly of a wall-cupboard, with perfected fixing means to the shoulder of the same cupboard.

[0002] Hanging brackets in which a hook is positioned at the free end of an arm extending externally from a box-shaped body made of plastic material, are well-known to experts in the field.

[0003] Said box-shaped body contains two mechanisms for regulating the position of the hook in height and depth, respectively, destined to be hooked to a wall support, which can consist of a plate, a shaped metallic section, peg or other equivalent means.

[0004] The hanging bracket thus structured is fixed to the shoulder of the cupboard by means of self-tapping screws, or pressure-yielding pins made of plastic material, having a sawtooth profile, in correspondence with the upper corners of the cupboard, defined by the shoulder, possible lining and cap.

[0005] The screws are pass-through, i.e. they pass through the box-shaped body and are screwed directly onto the shoulder of the cupboard, whereas the pins extend integrally laterally from the box-shaped body made of plastic material and are pressure-inserted into a corresponding seat of the shoulder itself.

[0006] A hanging bracket of the type briefly described above is object, for example, of patents EP 0033179 B1 and EP 0632979 A1.

[0007] There are also other types of hanging brackets, which substantially differ from each other in the supports (bases) with which they are fixed to the cupboard, and also in the means with which the positions in height and depth (inclination) of the anchoring hook can be regulated.

[0008] These hanging brackets, as illustrated for example in patent EP 1228720 B1, generally consist of a metal base equipped of a side flange which, during the assembly phase, is fixed by screws or expanding pegs inside holes positioned on the shoulder of the cupboard.

[0009] As already mentioned, the above known hanging brackets comprise a movable hooking element (arm) with a hook for anchoring the same hanging bracket to the wall, which, as described in EP 1228720 B1, is operated by screw/nut-screw mechanisms, possibly equipped with angular transmissions, capable of allowing the regulation of the position of the hook (see also EP 0033179 B1 and EP 0632979 A1).

[0010] Even if these known hanging brackets are functional and respond to existing regulations relating to the safety of wall-cupboards, in view of the current tendency to reduce the thicknesses of the panels forming the wall-cupboards and the ever-increasing diffusion of this type of furniture, which are often excessively loaded, it may happen that this wall-cupboard/hanging bracket coupling is not always effective, durable and above all safe.

[0011] As the very stability of the wall-cupboard is

based on this constraint, dangerous falling and/or breakage of the hanging bracket may occur, due to the shear forces acting on the wall-cupboard/hanging bracket coupling, which are generated when the cupboard is loaded.

[0012] The above drawbacks mainly arise in the hanging brackets object of EP 0033179 B1 and EP 0632979 A1 with a box-shaped body made of plastic material.

[0013] In order to overcome the above drawbacks of the known art, EP2303069A1 proposes a hanging bracket having a metal base, equipped with pins, also metallic, which are inserted into corresponding holes of the shoulder of the cupboard.

[0014] These pins, in direct contact with the surface of the hole of the shoulder, guarantee an optimum resistance to shear stress.

[0015] Yielding pegs made of plastic material and having a sawtooth profile, can collaborate with these metal pins for fixing them to the shoulder of the cupboard.

[0016] The hanging bracket is obviously also fixed to the shoulder of the cupboard by means of traditional self-tapping screws.

[0017] A general objective of the present invention is to solve the drawbacks of the known art mentioned above in an even simpler and more economic way with respect to that proposed in EP2303069A1, by providing a hanging bracket for anchoring a wall-cupboard to the wall, which is capable of resisting high shear stress that can be generated in the cupboard/hanging bracket coupling once the cupboard has been loaded.

[0018] Another objective is to provide a hanging bracket which guarantees an easy and firm assembly on any type of wall-cupboard.

[0019] In view of the above objectives, according to the present invention, a visible hanging bracket has been conceived for the wall assembly of a wall-cupboard having the characteristics specified in the main claim and enclosed dependant claims.

[0020] The structural and functional characteristics of the present invention and its advantages with respect to the known art will appear even more evident from the following description, referring to the enclosed drawings, which show an example of a hanging bracket produced according to the innovative principles of the same invention.

[0021] In the drawings:

- Figures 1 and 2 are two exploded perspective views illustrating a hanging bracket according to the invention, from the two opposite sides;
- figure 3 is a perspective view of the assembled hanging bracket from the same side as figure 1;
- figure 4 is a perspective view of the assembled hanging bracket from the same side as figure 2, but taken partially from above;
- figure 5 is a raised view illustrating the hanging bracket of figures 1-4, fixed to a wall-cupboard and anchored to a supporting section fixed to the wall;
- figure 6 is a partial section taken according to the

- line VI-VI of figure 5;
- figure 7 is an enlarged sectional detail illustrating the fixing unit according to the invention for fixing a hanging bracket to the shoulder of a wall-cupboard; and
- figures 8 and 9 are two perspective views illustrating the fixing phases of the hanging bracket to a wall-cupboard, only partially drawn.

[0022] With reference to the drawings, a visible hanging bracket for anchoring a wall-cupboard to the wall is indicated as a whole by 10.

[0023] Said hanging bracket 10, visible in a perspective view in figures 1-4, is suitable for allowing the anchorage of a wall-cupboard 11 to a wall P and, for use, it is fixed on one side to an inner side wall (shoulder) 12 of the above-mentioned wall-cupboard 11.

[0024] As clearly illustrated in EP 2303069A1, to which reference should be made and which - for a better understanding of the present invention - when necessary, should be considered an integrant part of the present invention, the hanging bracket 10 comprises an arm 13 with an end hook 14, for anchorage to a section 15 (or equivalent support) fixed to the wall P (figure 5). For this purpose, the hook 14 protrudes through a hole 16 produced through a possible lining 17 of the cupboard 11 (figures 8 and 9).

[0025] For fixing the hanging bracket 10 to the shoulder 12, the latter is prepared with holes 18 suitable for receiving the fixing means according to the invention, which are in the form of fixing units U, as explained in detail hereunder.

[0026] As clearly described and illustrated in EP2303069A1, a first and a second mechanism 19, 20 for regulating the position of the hanging bracket in height and depth, respectively, cooperate with the arm 13.

[0027] More specifically, the arm 13 and regulation mechanism 19 and 20 are assembled on a metallic base 21 comprising a flange 22 which serves for fixing the hanging bracket 10 to the shoulder 12 of the wall-cupboard 11. Preferably, but not necessarily, said flange 22 is integrally produced from the base 21, so as to form a step 23 for spacing the arm 13 and relative regulation mechanisms 19, 20 from the shoulder 12.

[0028] Preferably, but not necessarily, said flange 22 is situated in a position beneath said arm 13.

[0029] In short, as it is of a type which is well-known to experts in the field, in this example of hanging bracket, the first height regulation mechanism 19 comprises a screw 24, with a manoeuvring head 25, which can be screwed onto a nut 26 blocked on the base 21. As can be seen from the drawings, the end of the screw 24, opposite to the head 25, is operatively connected to the arm 13 through an arched cursor C. In this way, by rotating the screw 24, the inclination of the arm 13 varies and consequently also the position in height of the hanging bracket 10. For this purpose, the arm 13, at the opposite end with respect to the hook 14, is constrained in an articulated way (loosely) to a nut 30, enveloping it by

means of shaped opposing appendages (arms) 27.

[0030] The second mechanism 20 for regulating the depth comprises, on the contrary, a screw 28, with a manoeuvring head 29, which can be screwed onto said nut 30 which is blocked on the articulated arm 13.

[0031] In this way, by rotating the screw 28, an axial movement of the arm 13 is caused, and therefore also of the position in depth of the hanging bracket 10.

[0032] According to the invention, the flange 22 typically comprises one or more fixing units U (at least one). Each unit U comprises a metallic collar 31 on which a peg 32 in the form of a yielding pin made of plastic material, is fitted (externally).

[0033] The outer cylindrical surface (casing) of said peg 32 characteristically comprises a sawtooth portion 33 (or equivalent) and a smooth portion 33A.

[0034] More specifically, said peg 32 is axially perforated as in F and has an end seat 34 on which the collar 31 is inserted.

[0035] Said peg 32 is fixed to the collar 31 by means of a pass-through screw 35, through a corresponding hole F1 of the flange 22 and the axial hole F of the same peg 32 (figure 7).

[0036] As can be clearly seen in figures 8 and 9, the hanging bracket 10 produced according to the invention, is fixed to the shoulder 12 of the cupboard by pressure-inserting the pegs 32 (the units U) inside the holes 18 situated in the shoulder 12 itself.

[0037] It should be noted that, thanks to the sawtooth profile 33 (or equivalent), the peg 32 guarantees a stable fixing of the hanging bracket 10 to the shoulder 12 of the cupboard and, thanks to the smooth surface 33A, which corresponds exactly to the surface of the hole 18, ensures a high shear resistance.

[0038] Self-tapping screws (not shown) can also be envisaged for fixing the hanging bracket 10 to the shoulder 12, passing through holes F2 of the flange 22.

[0039] A top 36 can also be included (fig. 9).

[0040] From what is described above with reference to the figures, it is evident that a visible hanging bracket for anchoring a wall-cupboard to the wall, according to the invention, is particularly inexpensive to produce. The objective specified in the preamble of the description has therefore been achieved.

[0041] The hanging bracket 10 according to the present invention also guarantees an easy and firm assembly on any type of wall-cupboard, preventing any possible misalignment of the hanging bracket 10 itself with respect to the relative cupboard, also when the cupboard is loaded.

[0042] This firm positioning is achieved thanks to the presence of the fixing units U, shear-resistant, protruding from the flange 22 towards the shoulder 12 of the wall-cupboard 11, wherein said shear-resistant fixing units U cooperate with traditional fixing means (not shown), such as screws or expansion pegs, generally equipped with gripping teeth, to guarantee a stable positioning of the hanging bracket 10 on the shoulder 12 of the wall-cup-

board 11.

[0043] The forms of the visible hanging bracket for fixing a wall-cupboard to the wall according to the invention, as also the materials, can obviously differ from that shown for purely illustrative and non-limiting purposes in the drawings.

[0044] The protection scope of the invention is therefore delimited by the enclosed claims.

Claims

1. A hanging bracket (10) for the wall assembly (P) of a wall-cupboard (11) of the type comprising, in combination: a metallic base (21), an arm (13) assembled and articulated on said base (21) and protruding from it with a hook (14) suitable for being anchored to a plate (or other equivalent element (15)) fixed to said wall (P), first and second regulation mechanisms (19, 20) for regulating the position of said arm (13) in height and in depth, respectively, a flange (22) integral with said base (21) and equipped with at least one fixing unit (U) of the hanging bracket (10) to said wall-cupboard (11), wherein said fixing unit (U) comprises a cutting-resistant element cooperating with a fixing peg (32) of the hanging bracket (10) to a shoulder (12) of the cupboard (11), said peg (32) being fitted onto a collar (31) protruding from said flange (22), there also being reciprocal fixing means between said collar (31) and said peg (32), to make them integral with each other, said peg (32) being a pin suitable for being press-inserted into a corresponding hole (18) positioned in the shoulder (12) of said wall-cupboard (11) said collar (31) being produced in a single piece from said flange (22) said pin being a flexible plastic pin having a sawtooth profile
characterized in that said peg (32) has an inner end-seat (34) fitted on the outside of said collar (31).
2. The hanging bracket (10) according to claim 1, **characterized in that** said peg (32) has an outer cylindrical surface with a sawtooth portion (33) (or equivalent) and with a smooth portion (33A), said portions (33) and (33A) being suitable for being coupled with said hole (18).
3. The hanging bracket (10) according to claim 1, **characterized in that** said flange (22) is produced in a single piece from said base (21).
4. The hanging bracket (10) according to claim 1, **characterized in that** said reciprocal fixing means between said collar (31) and said peg (32) consists of a screw (35) passing through a hole (F1) of said collar and being screwed into a corresponding axial hole (F) of said peg (32).

5. The hanging bracket (10) according to claim 1, **characterized in that** said first regulation means (19) comprise a screw (24) with an operating head (25) which is screwed onto a nut (26) blocked on the base (21), the end of the screw (24), opposite to the head (25), being operatively connected to the arm (13) through an arched cursor (C), so that by rotating the screw (24), the inclination of the arm (13), and therefore the position of the hanging bracket (10), is varied in height, the arm (13), at the opposite end with respect to the hook (14), being articulated.
6. The hanging bracket (10) according to claim 1, **characterized in that** said second regulation means (20) comprise a screw (28), with an operating head (29), which is screwed onto a nut (30) which is blocked on the arm (13), said arm (13) being slackly constrained in an articulated manner to said nut (30) by means of arms (27), so that, by rotating the screw (28), there is an axial movement of the arm (13) and consequently the position in depth of the hanging bracket (10).

Patentansprüche

1. Aufhängebügel (10) für die Wandmontage (P) eines Wandschranks (11) von dem Typ, umfassend, in Kombination: eine Metallbasis (21), einen Arm (13), der an der Basis (21) montiert und angelenkt ist und von dieser mit einem Haken (14) vorsteht, der zur Verankerung an einer Platte (oder einem anderen gleichwertigen Element (15)), das an der Wand (P) befestigt ist, geeignet ist, einem ersten und zweiten Regulierungsmechanismus (19, 20) zum Regulieren der Position des Arms (13) jeweils in Höhe bzw. Tiefe, einen Flansch (22), der einstückig mit der Basis (21) ist und mit zumindest einer Befestigungseinheit (U) des Aufhängebügels (10) an dem Wandschrank (11) ausgestattet ist, wobei die Befestigungseinheit (U) ein schnittfestes Element umfasst, das mit einem Befestigungszapfen (32) des Aufhängebügels (10) an einer Schulter (12) des Schrankes (11) zusammenwirkt, wobei der Zapfen (32) an einen Bund (31) angesetzt ist, der von dem Flansch (22) vorsteht, wobei es auch wechselseitig Befestigungsmittel zwischen dem Bund (31) und dem Zapfen (32) gibt, um diese integral miteinander zu machen, wobei der Zapfen (32) ein Stift ist, der zum Einpressen in ein entsprechendes Loch (18) geeignet ist, das in der Schulter (12) des Wandschranks (11) angeordnet ist, wobei der Bund (31) in einem einzigen Stück aus dem Flansch (22) hergestellt ist, wobei der Stift ein flexibler Kunststoffstift mit einem Sägezahnprofil ist,
dadurch gekennzeichnet, dass der Zapfen (32) einen inneren Endsitz (34) aufweist, der an der Außenseite des Bundes (31) angesetzt ist.

2. Aufhängebügel (10) nach Anspruch 1, **dadurch gekennzeichnet, dass** der Zapfen (32) eine äußere zylindrische Oberfläche mit einem Sägezahnabschnitt (33) (oder Gleichwertigem) und mit einem glatten Abschnitt (33A) aufweist, wobei die Abschnitte (33) und (33A) zur Kopplung mit dem Loch (18) geeignet sind. 5
3. Aufhängebügel (10) nach Anspruch 1, **dadurch gekennzeichnet, dass** der Flansch (22) aus einem einzigen Stück aus der Basis (21) hergestellt ist. 10
4. Aufhängebügel (10) nach Anspruch 1, **dadurch gekennzeichnet, dass** die wechselseitigen Befestigungsmittel zwischen dem Bund (31) und dem Zapfen (32) aus einer Schraube (35) bestehen, die durch ein Loch (F1) des Bundes verläuft und in ein entsprechendes axiales Loch (F) des Zapfens (32) geschraubt ist. 15
5. Aufhängebügel (10) nach Anspruch 1, **dadurch gekennzeichnet, dass** das erste Regulierungsmittel (19) eine Schraube (24) mit einem Betätigungskopf (25) umfasst, auf die eine Mutter (26) geschraubt ist, die an der Basis (21) verblockt ist, wobei das Ende der Schraube (24) entgegengesetzt zu dem Kopf (25) funktional mit dem Arm (13) durch einen gebogenen Gleiter (C) verbunden ist, so dass durch Drehen der Schraube (24) die Neigung des Arms (13), und damit die Position des Aufhängebügels (10) in der Höhe variiert wird, wobei der Arm (13) an dem entgegengesetzten Ende mit Bezug auf den Haken (14) angelenkt ist. 20
6. Aufhängebügel (10) nach Anspruch 1, **dadurch gekennzeichnet, dass** das zweite Regulierungsmittel (20) eine Schraube (28) mit einem Betätigungskopf (29) umfasst, auf die eine Mutter (30) geschraubt ist, die an dem Arm (13) verblockt ist, wobei der Arm (13) lose auf eine angelenkte Weise an der Mutter (30) mittels Armen (27) eingeschränkt ist, so dass es durch Drehen der Schraube (28) eine axiale Bewegung des Arms (13) und folglich der Position in der Tiefe des Aufhängebügels (10) gibt. 25

Revendications

1. Ferrure de suspension (10) pour le montage sur un mur (P) d'un placard mural (11) du type comportant, en combinaison : une base métallique (21), un bras (13) monté et articulé sur ladite base (21) et faisant saillie depuis celle-ci avec un crochet (14) destiné à être accroché à une plaque (ou à un autre élément équivalent (15)) fixée audit mur (P), un premier et un second mécanismes de réglage (19, 20) pour régler la position dudit bras (13) respectivement en hauteur et en profondeur, un rebord (22) solidaire de ladite 50

base (21) et muni d'au moins un moyen de fixation (U) de la ferrure de suspension (10) sur ledit placard mural (11), ledit moyen de fixation (U) comprenant un élément incassable coopérant avec un pion de fixation (32) de la ferrure de suspension (10) sur un épaulement (12) du placard (11), ledit pion (32) étant placé sur une bague (31) dépassant dudit rebord (22), un moyen de fixation mutuelle étant également présent entre ladite bague (31) et ledit pion (32), pour les rendre solidaires l'un de l'autre, ledit pion (32) étant un goujon destiné à être inséré à force dans un trou correspondant (18) ménagé dans l'épaulement (12) dudit placard mural (11), ladite bague (31) étant réalisée d'un seul tenant dans ledit rebord (22), ledit goujon étant un goujon flexible en matière plastique à profil en dents de scie,; **caractérisée en ce que** ledit pion (32) a un logement intérieur d'extrémité (34) placé à l'extérieur de ladite bague (31) 20

2. Ferrure de suspension (10) selon la revendication 1, **caractérisée en ce que** ledit pion (32) a une surface extérieure cylindrique avec une partie en dents de scie (33) (ou d'une forme équivalente) et avec une partie lisse (33A), lesdites parties (33) et (33A) étant destinées à se loger dans ledit trou (18).
3. Ferrure de suspension (10) selon la revendication 1, **caractérisée en ce que** ledit rebord (22) est réalisé d'un seul tenant avec ladite base (21).
4. Ferrure de suspension (10) selon la revendication 1, **caractérisée en ce que** ledit moyen de fixation mutuelle entre ladite bague (31) et ledit pion (32) consiste en une vis (35) passant par un trou (F1) de ladite bague et vissée dans un trou axial correspondant (F) dudit pion (32).
5. Ferrure de suspension (10) selon la revendication 1, **caractérisée en ce que** ledit premier moyen de réglage (19) comprend une vis (24), avec une tête d'actionnement (25), qui est vissée sur un écrou (26) bloqué sur la base (21), l'extrémité de la vis (24), opposée à la tête (25), coopérant avec le bras (13) par l'intermédiaire d'un curseur arqué (C); de façon qu'en faisant tourner la vis (24) on modifie l'inclinaison du bras (13) et donc la position en hauteur de la ferrure de suspension (10), le bras (13) à l'extrémité opposée par rapport au crochet (14) étant articulé.
6. Ferrure de suspension (10) selon la revendication 1, **caractérisée en ce que** ledit second moyen de réglage (20) comprend une vis (28), avec une tête d'actionnement (29), qui est vissée sur un écrou (30) bloqué sur le bras (13), ledit bras (13) étant retenu d'une manière lâche et articulée dans ledit écrou (30) à l'aide de bras (27) de façon qu'une rotation de la 55

vis (28) produise un mouvement axial du bras (13)
et par conséquent un réglage de la position en pro-
fondeur de la ferrure de suspension (10).

5

10

15

20

25

30

35

40

45

50

55

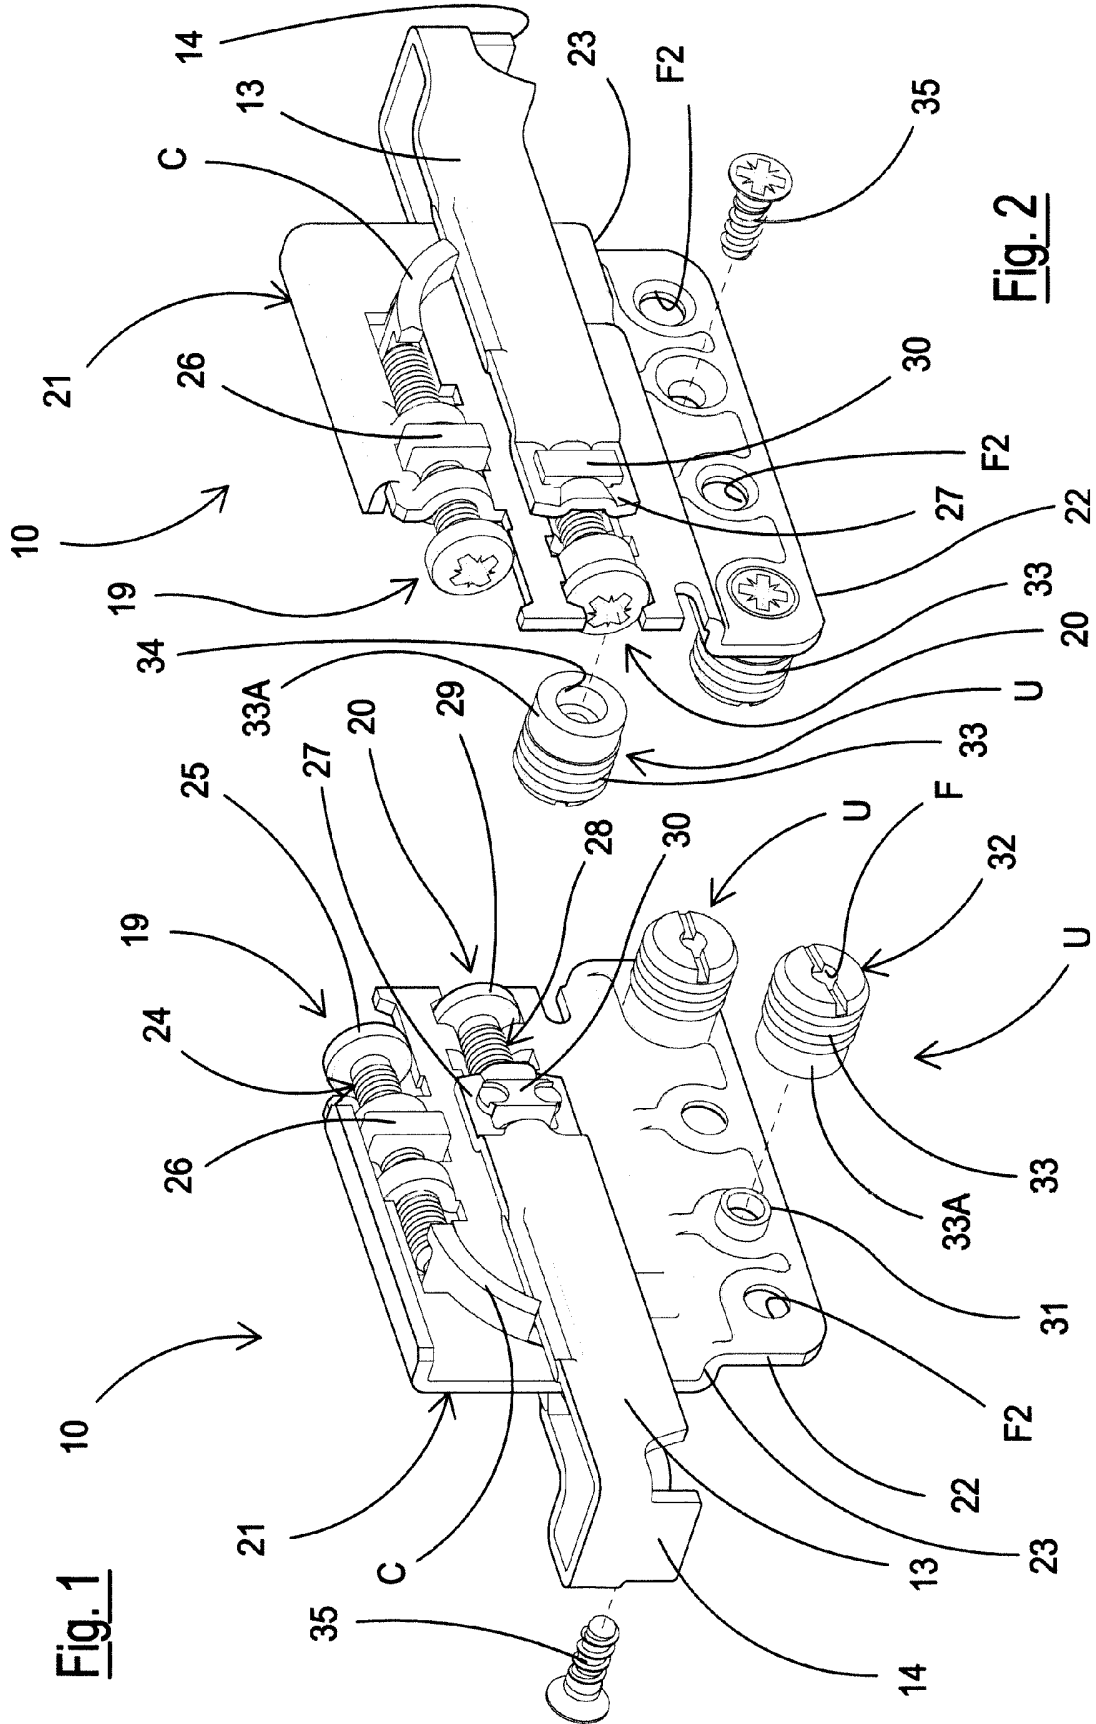


Fig. 3

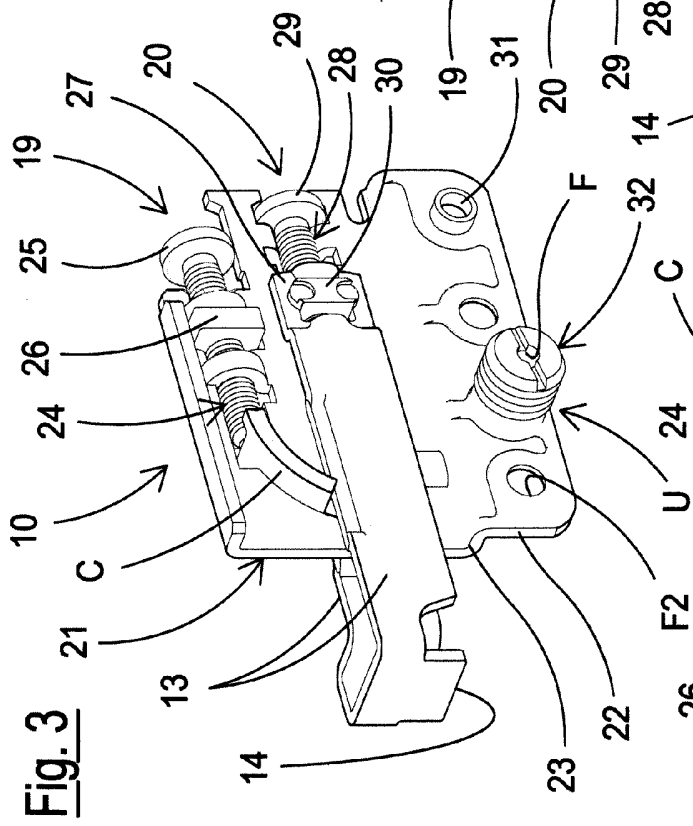


Fig. 5

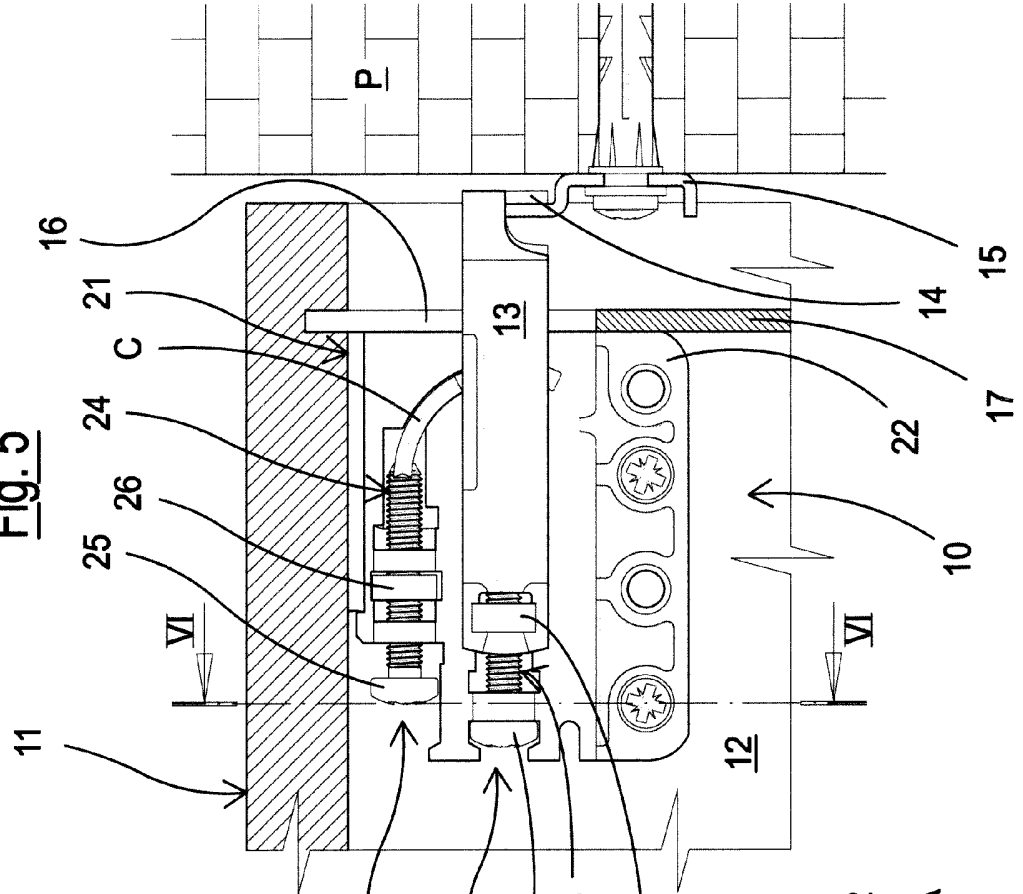
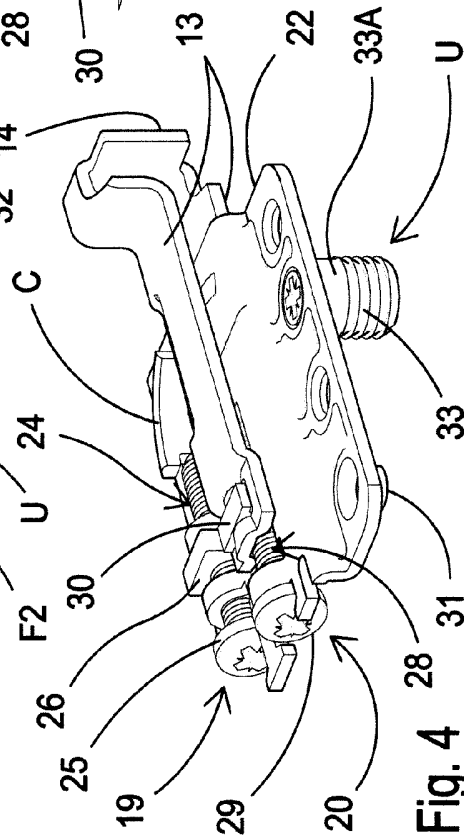


Fig. 4






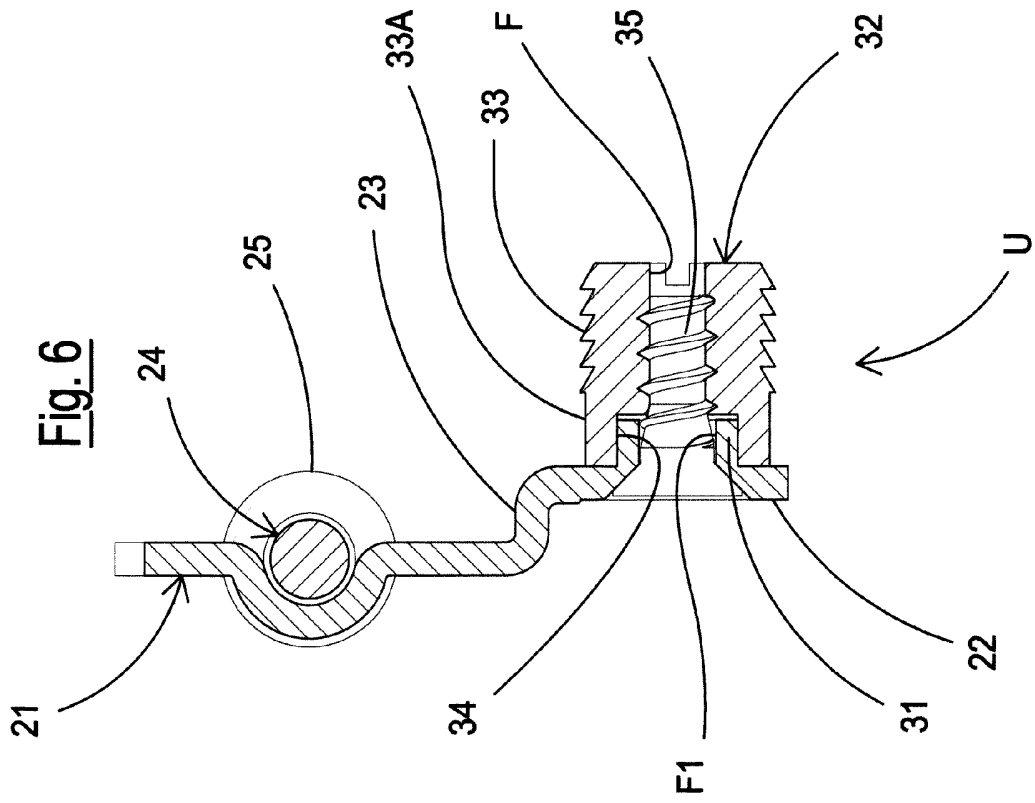


Fig. 7

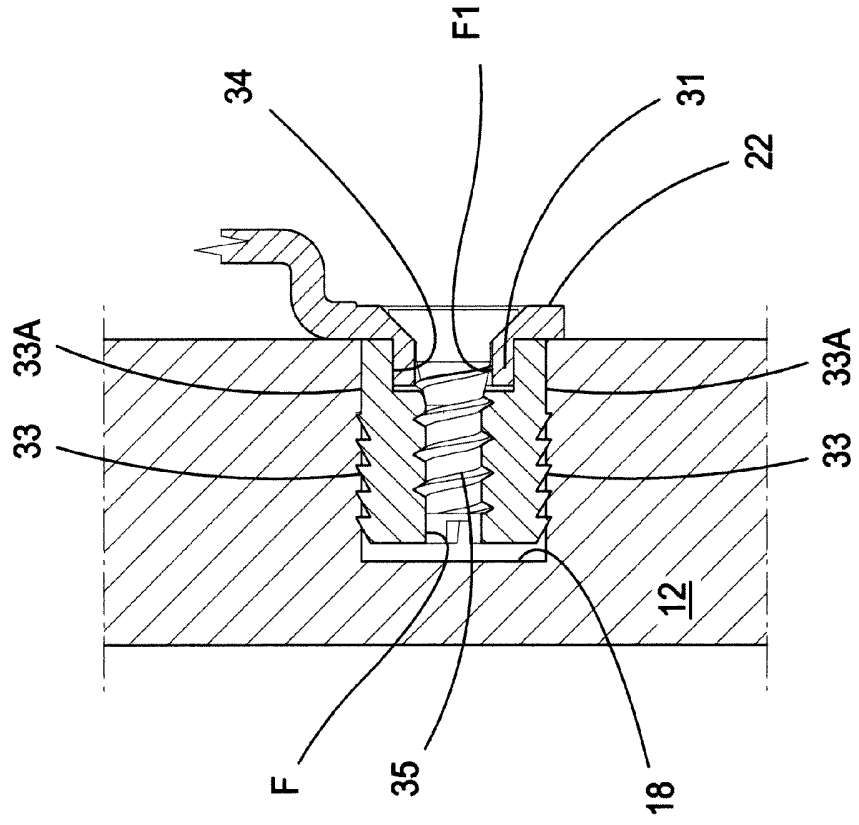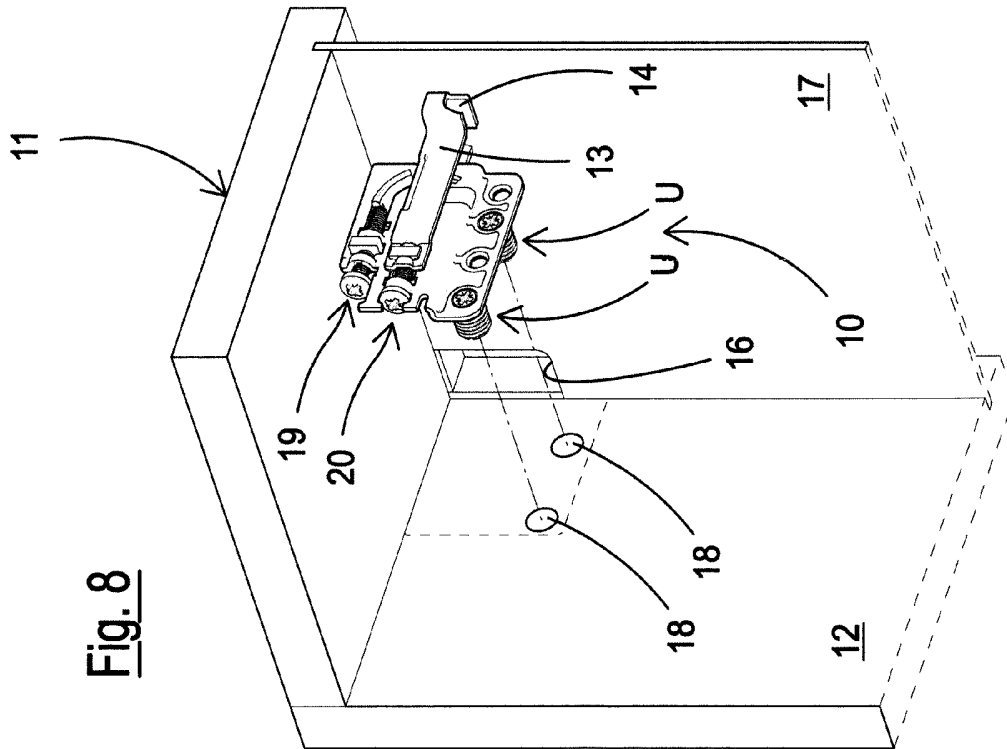

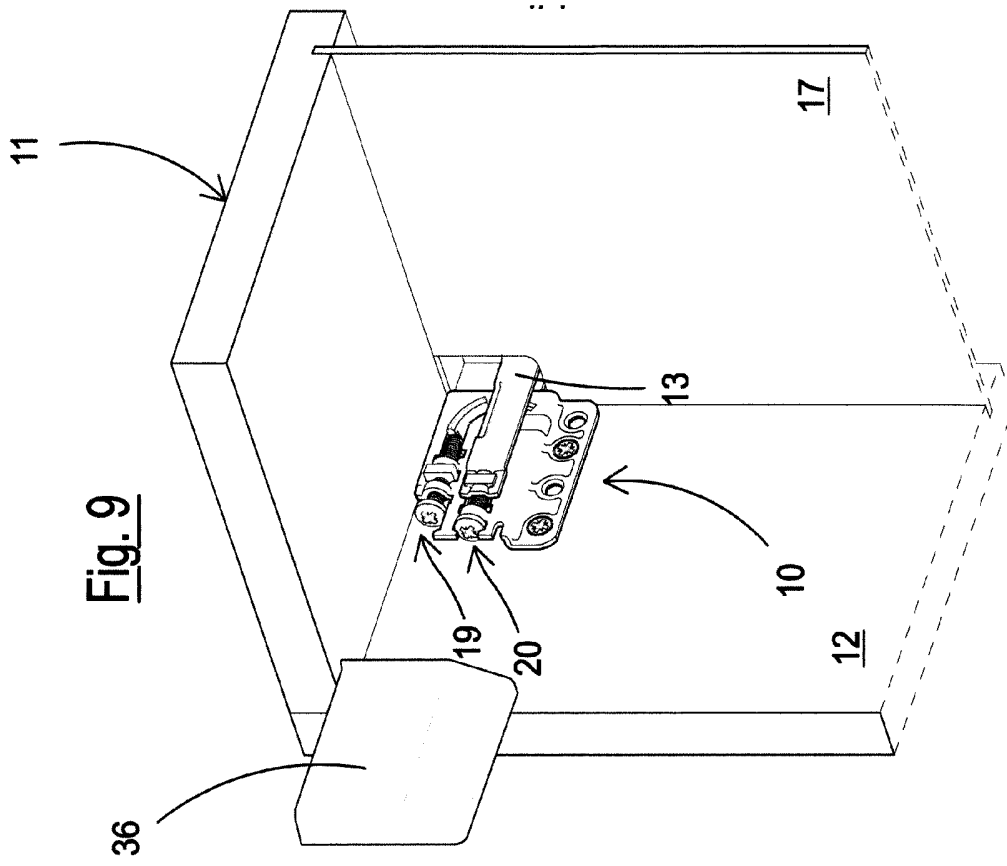

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0033179 B1 [0006] [0009] [0012]
- EP 0632979 A1 [0006] [0009] [0012]
- EP 1228720 B1 [0008] [0009]
- EP 2303069 A1 [0013] [0017] [0024] [0026]

TÖKÉLETESÍTETT FÜGGESZTŐ VASALAT FALISZEKRÉNY FALI SZERELVÉNYÉHEZ

SZABADALMI IGÉNYPONTOK

1. Függesztő vasalat (10) faliszekrény (11) fali szerelvényéhez (P), amely vasalat típusa szerint magában foglal együttesen: egy fém talplemezt (21), egy, a talplemezhez (21) szerelt és rajta csuklósan mozgó és belőle egy kampóval (14) kiemelkedő kart (13), amely hozzáerősíthető egy, a falhoz (P) rögzített laphoz (vagy más, egyenértékű elemhez (15)), első és második szabályozó szerkezeteket (19, 20) a kar (13) helyzetének magasságban, illetve mélységben történő szabályozására, egy peremet (22), amely egy darabból van a talplemezzel (21), és el van látva legalább egy, a függesztő vasalatot (10) a faliszekrényhez (11) rögzítő egységgel (U), amely rögzítő egység (U) magában foglal egy, a függesztő vasalatot (10) a szekrény (11) egy vállához (12) rögzítő csappal (32),

amely csap (32) rá van illesztve egy, a peremből (22) kiemelkedő karimára (31), ellenoldali rögzítő eszköz is van a karima (31) és a csap (32) között, hogy ezeket egy egységgé tegye, a csap (32) egy olyan túske, amely bepréselhető a faliszekrény (11) vállában (12) elhelyezett megfelelő furatba (18), a karima (31) egy darabban van készítve a peremből (22), és a túske egy fűrészfog profilú, hajlékony, műanyag túske,

azzal jellemezve, hogy a csapnak (32) van egy, a karima (31) külsejére illesztett belső, végoldali fészke (34).

2. Az 1. igénypont szerinti függesztő vasalat (10), azzal jellemezve, hogy a csap (32) külső hengeres felületének van egy fűrészfogas (vagy azzal egyenértékű) része (33) és egy sima része (33A), amely részek (33 és 33A) összeköthetők a furattal (18).

3. Az 1. igénypont szerinti függesztő vasalat (10), azzal jellemezve, hogy a perem (22) egy darabban van készítve a talplemezből (21).

4. Az 1. igénypont szerinti függesztő vasalat (10), azzal jellemezve, hogy a karima (31) és a csap (32) közötti ellenoldali rögzítő eszközt egy csavar (35) képezi, amely átmegy a karima egy furatán (F1), és be van csavarozva a csap (32) egy megfelelő tengelyirányú furatába (F).

5. Az 1. igénypont szerinti függesztő vasalat (10), azzal jellemezve, hogy az első szabályozó eszköz (19) magában foglal egy csavart (24) meghúzó fejjel (25), amely csavar be van csavarozva egy, a talplemezen (21) elfordulásában gátolt anyába (26), és amely csavarnak (24) a fejjel (25) ellentétes vége egy ívelt csúszócsapon (C) keresztül működésileg hozzá van kötve a karhoz (13), úgyhogy a csavar (24) forgatásával a kar (13) dőlésszöge és ezért a függesztő vasalat (10) magasságbeli helyzete megváltozik, a

kar (13) a kampóval (14) ellentétes végen csuklósan mozog.

6. Az 1. igénypont szerinti függesztő vasalat (10), azzal jellemezve, hogy a második szabályozó eszköz (20) magában foglal egy csavart (28) meghúzó fejjel (29), amely csavar be van csavarozva egy, a karon (13) elfordulásában gátolt anyába (30), amely kar (13) karok (27) segítségével csuklós módon, lazán hozzá van szorítva az anyához (30), úgyhogy a csavar (28) forgatása a kar (13) tengelyirányú mozgását váltja ki, és ennek következtében a függesztő vasalat (10) mélységbeli helyzete változik.

(A meghatalmazott)

Dr. János János János
Dr. János János János
Dr. János János János
Dr. János János János