



(51) International Patent Classification:

H05K 7/14 (2006.01) *A47B 57/40* (2006.01)
A47B 96/02 (2006.01) *F16M 13/02* (2006.01)
A47B 57/42 (2006.01)

(21) International Application Number:

PCT/IL2020/050433

(22) International Filing Date:

12 April 2020 (12.04.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

265964 11 April 2019 (11.04.2019) IL

(71) Applicants: **KETER PLASTIC LTD.** [IL/IL]; 1 Sapir Street, 14th Floor, Industrial Zone, 4685205 Herzliya (IL). **MILWAUKEE ELECTRIC TOOL CORPORATION** [US/US]; 13135 West Lisbon Road, Brookfield, Wisconsin 53005 (US).

(72) Inventors: **BRUNNER, Yaron**; 3657900 Kibutz Gvat (IL). **SHANY, Izhar**; 3657900 Kibutz Gvat (IL). **PARIZER, Uri**; P.O.B. 133, 1292300 Kibbutz Hukok (IL). **VARDI-BOUGAY, Ayala**; 24 Saar St., 2514700 Kefar Ve-

radim (IL). **BARTON, George**; 4110 West Freistadt Road, Mequon, Wisconsin 53092 (US).

(74) Agent: **DE VRIES, David**; REINHOLD COHN AND PARTNERS, POB 13239, 6113102 Tel Aviv (IL).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: RACKING SYSTEM AND COUPLER

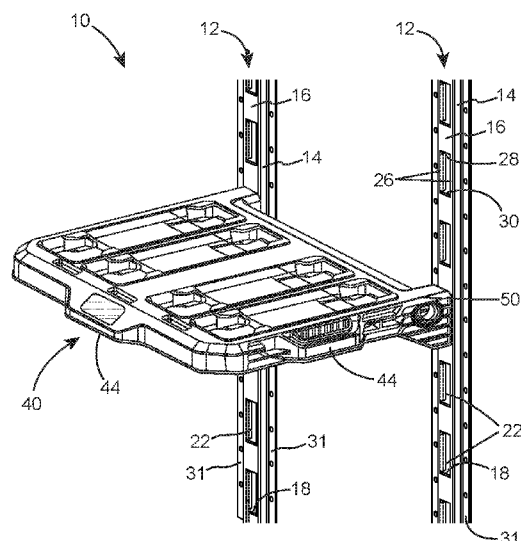


FIG. 1

(57) Abstract: A wall mounting system comprising at least one wall mount articulable to a wall, and at least one coupling member; the mounting portion comprises two parallelly disposed side walls with a locking portion at a distal end thereof, for snug insertion into the locking slot of the wall mount; and the coupling member is configured with an obstructing plunger slidingly displaceable within a space between side walls, between a locked position, at which the plunger at least partially projects into the first locking recess, and an unlocked position at which the plunger is retracted into the space and out of the first locking recess. And a tolerance cancellation mechanism for a wall coupling member articulable to a wall mount, comprising a pivotal fastener member configured with an asymmetric sector-like shape with a wall engaging arc surface for bearing against a wall surface.

Published:

— *with international search report (Art. 21(3))*

- 1 -

RACKING SYSTEM AND COUPLER

TECHNOLOGICAL FIELD

The present disclosure is concerned with a wall mounting system, and more particularly it is concerned with an E-track coupling/fastener mechanism for a racking system. The disclosure is further concerned with a coupler for used in conjunction with
5 an E-track system.

BACKGROUND ART

References considered to be relevant as background to the presently disclosed subject matter are listed below:

- US2,970,358
- 10 - US6,948,691
- US8,028,845
- US8,985,922

Acknowledgement of the above references herein is not to be inferred as meaning that these are in any way relevant to the patentability of the presently disclosed subject
15 matter.

BACKGROUND

E-Track is a versatile mounting system that can be mounted vertically or horizontally on any carrying wall surface, for anchoring and fastening thereto different utility modules, such as storage and display facilities, load bars, fastener straps, cargo
20 securing arrangements, and the like. The system can be used for erecting truss systems, scaffolding, stages, different enclosures, etc.

E-track Systems provide reliable articulation and are fit for withstanding heavy loads, and yet are easily attachable and detachable from a wall mount, offering great versatility and modulation whereby a wide variety of bars, straps, beams and the like can
25 be articulated with the wall mount.

- 2 -

US2,970,358 discloses a fastening mechanism employed to connect releasably a strap or webbing to an anchor member.

US6,948,691 discloses a mounting apparatus is provided for mounting a computer server in a server rack structure. The server rack defines a first and second mounting
5 apertures. A slide is provided having a bracket mounted to one end thereof. The bracket includes a first wall abutting the rack, and a second wall transverse to the first wall. A portion of the bracket extends into the first mounting aperture. A latch is mounted on the second wall of the bracket. The latch is movable between a first position wherein the latch extends into the second mounting aperture, and a second position wherein the latch does
10 not extend into the mounting aperture. The latch cooperates with the portion of the bracket extending into the first mounting aperture to limit vertical movement of the bracket with respect to the rack.

US8,028,845 discloses, by one of its aspects, a rack for an E-track, comprising: a member; said member having a clip portion; said clip portion
15 having a wall, said wall having a bottom indent and a top indent; whereby said top indent and said bottom indent are capable of being removably secured to an E-track. wherein said clip has a shoulder that is capable of contacting said wall; said shoulder is capable of biasing toward a clip portion distal side further comprising said clip having a clip spring receiving member that extends from
20 said clip towards said wall; said clip having a neck that extends upwardly from said shoulder; said wall having a wall spring receiving member; whereby a spring may be disposed on said clip spring receiving member and said wall spring receiving member, and said spring capable of biasing said shoulder against said wall; and said clip portion having a clip portion distal side and a
25 clip portion proximal side; said clip portion proximal side being disposed between said clip portion distal side and said member; and said neck may be capable of being pulled away from said clip portion distal side.

US8,985,922 discloses a rack having a member; the member having a clip portion; the clip portion having a wall, the wall having a bottom indent and a top indent; whereby
30 the top indent and the bottom indent are capable of being removably secured to an E-track.

- 3 -

GENERAL DESCRIPTION

According to a first aspect of the present disclosure there is provided a wall mounting system comprising at least one wall mount articulable to a wall, and at least one coupling member; the at least one wall mount has a mounting wall configured with
5 rectangle locking slot; the at least one coupling member has at a proximal side a utility portion attachable to a utility module, and at a distal side a mounting portion attachable to the wall mount; said mounting portion comprises two parallelly disposed side walls with a locking portion at a distal end thereof, for snug insertion into the locking slot; said side walls comprise a first locking lug with an associated first locking recess, and a second
10 locking lug with an associated second locking recess, disposed in register with one another, said first locking recess being deeper than said second locking recess;

and wherein the coupling member is further configured with an obstructing plunger slidably displaceable within a space between the side walls, between a locked position, at which the plunger at least partially projects into the first locking recess, and
15 an unlocked position at which the plunger is retracted into the space and out of the first locking recess.

A second aspect of the present disclosure is directed to a coupling member having at a proximal side a utility portion attachable to a utility module, and at a distal side a mounting portion attachable to a wall mount, said mounting portion comprises two
20 parallelly disposed side walls with a locking portion at a distal end thereof, configurable for snug arresting within a locking slot of a wall mount; said side walls comprise a first locking lug with an associated first locking recess, and a second locking lug with an associated second locking recess, disposed in register with one another, said first locking recess is deeper than said second locking recess;

25 wherein the coupling member is further configured with an obstructing plunger slidably displaceable within a space between the side walls, between a locked position, at which the plunger at least partially projects into the first locking recess, and an unlocked position at which the plunger is retracted into the space and out of the first locking recess.

30 The arrangement is such that articulation or detaching of the coupling member from the wall mount takes place by displacing the coupling member so that the first locking recess encounters a first narrow edge of the rectangle locking slot, thereby facilitating tilting of the coupling member so that an opposite narrow edge of the rectangle

- 4 -

locking slot can swing over the second locking lug, into or out of the second locking recess, i.e. into respective articulation or detaching from the wall mount.

However, the arrangement is further such, that displacing the coupling member so that the first locking recess encounters a first narrow edge of the rectangle locking slot
5 can be facilitated only when the plunger is at the retracted, unlocked position.

The distance between respective edges of the first locking lug and the second locking lug is greater than the length of the rectangle locking slot, whereby the coupling member is barred from axial displacement, i.e. prevented from articulation or detaching from the wall mount, respectively.

10 The arrangement is such that at the locked position the obstructing plunger is disposed within the top locking recess thus preventing lateral displacement of coupling member so that the first locking recess displaces towards encountering with the edge of the locking slot of the wall mount, thus prohibiting engagement with or disengagement from, the wall mount, respectively.

15 At an articulated position the narrow edges of the locking slot are received within the first locking recess and the second locking recess, respectively, wherein a portion of a front wall face and a portion of a back wall face of the mounting wall are disposed between respective walls of the first locking recess and the second locking recess, thereby providing axial support oriented in both forward and backward direction.

20 The at least one wall mount is configured with a receiving space disposed behind the mounting wall, wherein upon attaching thereto a coupling member the locking portion extends through the locking slot with the first locking lug and the second locking lug disposed within said receiving space.

According to yet an aspect of the present disclosure there is a tolerance cancelation
25 mechanism, for use with a wall mounting system, such as an E-track coupling system, and configured for eliminating or substantially reducing freedom degree between a wall mount and a designated coupling member articulable thereto. The tolerance cancelation mechanism can be used in conjunction with a variety of E-track coupling systems and is not restricted to the wall mounting system disclosed herein or to any other configuration.

30 According to the disclosure there is a wall coupling member articulable to a wall mount, the wall coupling member comprising a tolerance cancelation mechanism comprising a fastener member pivotally articulated at a pivot point to a portion of a wall coupling member; said fastener member configured with an asymmetric sector-like shape

- 5 -

having a wall engaging arc surface, wherein the fastener member is pivotable between at least one locked position at which a locking portion of the arc surface extends beyond a proximal bearing wall portion of the wall coupling member, and an unlocked position at which the locking portion does not exceed said proximal wall portion.

5 According to a specific configuration the wall engaging arc surface is defined by at least a first radii and a second radii, wherein said first radii originates at the pivot point and said second radii is longer than said first radii and originating at an imaginary point extending behind said pivot point.

10 The wall engaging arc surface of the fastener member is eccentrically pivotal about the pivot point, whereby the fastener member is swingable between the at least one locked position at which the locking portion projects beyond the proximal bearing wall portion of the wall coupling member and gradually into the unlocked position at which the locking portion retracts from the proximal bearing wall portion.

15 The proximal bearing wall portion of the wall coupling member is defined as a most proximal wall surface of the wall coupling member, facing a wall mount.

20 According to yet an aspect of the disclosure there is a wall mounting system comprising a wall mount and at least one designated coupling member articulable thereto, said wall mount comprising one or more locking slots disposed at a front wall surface thereof; said coupling member comprising a tolerance cancelation mechanism comprising a fastener member pivotally articulated at a pivot point to a portion of a wall coupling member; said fastener member configured with an asymmetric sector-like shape having a wall engaging arc surface, wherein the fastener member is pivotable between at least one locked position at which a locking portion of the arc surface extends beyond a proximal bearing wall portion of the wall coupling member and said locking portion bears
25 against the front wall surface of the wall mount, and an unlocked position at which the locking portion does not exceed said proximal wall portion, at which the locking portion is spaced from the front wall surface of the wall mount.

30 The arrangement is such that upon articulating a coupling member with a locking slot of a wall mount the tolerance cancelation mechanism is activated allowing the wall engaging arc surface so slide over a front wall surface of the wall mount, bearing against it and thus eliminating or substantially reducing freedom degree between therebetween, wherein further the eccentric wall engaging arc surface is pivoted into the locked position entails greater contact force and enhanced tolerance cancelation.

- 6 -

Any one or more of the following features, designs and configurations can be encompassed in any of the aspects of the present disclosure, solely or in various combinations thereof.

- 5 • The wall mounting system according to the present disclosure can be used in conjunction with a so-called E-track mounting system;
- The coupling member according to the present disclosure can be used in conjunction with a so-called E-track mounting system;
- The at least one wall mount can extend on a wall mountable rack;
- 10 • The at least one wall mount can be a singular article integral with or attached to a carrying wall, stationary or mobile;
- The at least one wall mount can be configured over a utility module, such as tool boxes, work benches, etc.;
- The at least one wall mount can be articulable to a wall at any desired orientation, e.g. a vertical orientation, at a horizontal orientation, inclined, 15 ground mounted, ceiling mounted, etc.;
- At an articulated position the at least one coupling member is disposed substantially normal to the mounting wall of the wall mount;
- The length of the second locking lug can be similar to the obstruction depth of the obstructing plunger;
- 20 • The distance between the second locking lug and the first locking recess is similar to the distance between the second locking recess and an obstruction depth of the obstructing plunger;
- At the locked position of the obstructing plunger, a lateral face thereof can extend between the first locking lug and the first locking recess;
- 25 • At a vertical mounting orientation the coupling member can be disposed such that the first locking lug is disposed above the second locking lug and wherein the second recess rests over the second narrow edge of the rectangle locking slot;
- The obstructing plunger can be configured a sliding rod having a round 30 cross section;
- The obstructing plunger can be configured with a chamfered distal end;

- 7 -

- The obstructing plunger can be slidably supported over a support surface within the space between the side walls of the coupling member;
- The obstructing plunger can be configured for displacing substantially normal to the mounting wall of the wall mount;
- 5 • The obstructing plunger can be axially displaceable along an axis normal to a proximal wall of the first locking lug;
- The proximal wall of the first locking lug can be parallel and coplanar with the proximal wall of the second locking lug;
- The obstructing plunger can be biased into its locked position;
- 10 • Biasing the obstructing plunger into its locked position can be facilitated by a biasing element disposed within the coupling member;
- The obstructing plunger can be manipulated by an axially displaceable manipulating member disposed at a distal portion of the coupling member;
- The manipulating member can be a trigger-like member;
- 15 • The biasing element of the obstructing plunger can be articulated to the manipulating member;
- The trigger-like manipulating member is axially displaceable within a finger-safe opening;
- The side walls of the coupling member can be configured with a front wall portion, assuming a U-like shaped section;
- 20 • At the locked position a distal end portion of the obstructing plunger can project into support opening configured at a front wall portion extending between side walls of the coupling member;
- The side walls of the coupling member can be integral or integrated with one another;
- 25 • At least proximal facing edges of one or both of the first locking lug and the second locking lug can be chamfered, to facilitate easy attaching and detaching from the wall mount;
- The utility portion of the coupling member can be integral with or detachable attachable to a utility module;
- 30 • The utility module can be a shelving system, a support rack, a belt, a harness, cargo securing arrangements, load bars, structure frames, etc.;

- 8 -

- The tolerance cancelation mechanism can be a cam-like mechanism, displaceable between at least one locked position and an unlocked position;
- The cam-like mechanism of the tolerance cancelation mechanism can be continuously pivotally displaceable, between respective angular positions, whereby the wall engaging arc surface displaces over the wall surface to hereby tighten contact therebetween and cancel tolerances therebetween;
- The tolerance cancelation mechanism can be an automatic mechanism, whereby the fastener member can be configured for spontaneous displacing into the locked position;
- The fastener member can be pivotally articulated to the wall coupling member over a horizontally extending pivot axis, whereby the fastener member is configured for spontaneous displacing into the locked position under force of gravity;
- The fastener member can be spring biased into the locked position, whereby articulating the wall coupling member on a wall mount requires momentarily displacing the fastener member into the unlocked position;
- The fastener member can be configured for manually displacement into the unlocked position;
- The pivot axis can be disposed at any orientation with the fastener member non-biased or biased into any of its respective positions;
- The fastener member can be configured with a manipulating grip for manually pivotal displacing it between the respective closed and open position;
- The manipulating grip can be one or more finger grips laterally extending from a side wall of the fastener member;
- The manipulating grip can be a recessed portion configured at a sidewall of the fastener member;
- The manipulating grip can be a gripping surface configured at a bottom surface of the fastener member;
- The fastener member can have a U-like shaped cross section;
- The fastener member can have an L-like shaped cross section;
- The tolerance cancelation mechanism can be configured with a clicking arrangement, wherein one or both of a surface of the fastener member and a

- 9 -

facing surface of the coupling member is configured with one or more projections, and the other one or both of the surface of the fastener member and a facing surface of the coupling member is configured with corresponding depressions, whereby pivotal displacement of the fastener member generates light clicking motion;

- An inside wall surface of the fastener member can be configured with one or more relief surfaces for overcoming lateral projection from a surface of the coupling member;
- At least a portion of the wall engaging arc surface can be configured with friction enhancing arrangement, for enhancing arresting of the fastener member at a locked position;
- The friction enhancing arrangement can be roughening of at least a portion of the wall engaging arc surface; such roughening can be for example knurling, ribs, projections, depressions, etc.;
- Contact of the wall engaging arc surface with a front wall surface of the wall mount can be along a line or lines or a surface.

EMBODIMENTS

In the following, embodiments of the present disclosure are described by means of numbered embodiments. These numbered embodiments are intended as an addition to the above disclosure and are not limiting.

1. A wall mounting system comprising at least one wall mount articulable to a wall, and at least one coupling member; the at least one wall mount has a mounting wall configured with rectangle locking slot; the at least one coupling member has at a proximal side a utility portion attachable to a utility module, and at a distal side a mounting portion attachable to the wall mount; said mounting portion comprises two parallelly disposed side walls with a locking portion at a distal end thereof, for snug insertion into the locking slot; said side walls comprise a first locking lug with an associated first locking recess, and a second locking lug with an associated second locking recess, disposed in register with one another, said first locking recess being deeper than said second locking recess;

and wherein the coupling member is further configured with an obstructing plunger slidably displaceable within a space between the side walls, between a locked

- 10 -

position, at which the plunger at least partially projects into the first locking recess, and an unlocked position at which the plunger is retracted into the space and out of the first locking recess.

2. A wall mounting system according to embodiment 1, wherein the wall
5 mounting system is used in conjunction with an E-track mounting system.

3. A wall mounting system according to embodiment 2, wherein the at least one wall mount is a singular article integral with or attached to a carrying wall, stationary or mobile.

4. A wall mounting system according to embodiment 1, wherein the at least one
10 wall mount extends on a wall mountable rack.

5. A wall mounting system according to embodiment 1, wherein the at least one wall mount is configured over a utility module.

6. A wall mounting system according to embodiment 1, wherein the at least one wall mount is articulable to a wall disposed at an orientation selected from a vertical
15 orientation, a horizontal orientation, an inclined orientation, a ground mounting orientation, and a ceiling mounted orientation.

7. A wall mounting system according to embodiment 1, wherein at an articulated position the at least one coupling member is disposed substantially normal to the mounting wall of the wall mount.

8. A wall mounting system according to embodiment 7, wherein at a vertical
20 mounting orientation the coupling member is disposed such that the first locking lug is disposed above the second locking lug and wherein the second recess rests over a second narrow edge of the rectangle locking slot.

9. A wall mounting system according to embodiment 1, wherein the at least one
25 wall mount is configured with a receiving space disposed behind the mounting wall, wherein upon attaching thereto a coupling member the locking portion extends through the locking slot with the first locking lug and the second locking lug disposed within said receiving space.

10. A tolerance cancelation mechanism for a wall coupling member articulable to
30 a wall mount, the wall coupling member comprising a tolerance cancelation mechanism comprising a fastener member pivotally articulated at a pivot point to a portion of a wall coupling member; said fastener member configured with an asymmetric sector-like shape having a wall engaging arc surface, wherein the fastener

- 11 -

member is pivotable between at least one locked position at which a locking portion of the arc surface extends beyond a proximal bearing wall portion of the wall coupling member, and an unlocked position at which the locking portion does not exceed said proximal wall portion.

5 **11.** A wall mounting system comprising a wall mount and at least one designated coupling member articulable thereto, said wall mount comprising one or more locking slots disposed at a front wall surface thereof; said coupling member comprising a tolerance cancelation mechanism comprising a fastener member pivotally articulated at a pivot point to a portion of a wall coupling member; said fastener member
10 configured with an asymmetric sector-like shape having a wall engaging arc surface, wherein the fastener member is pivotable between at least one locked position at which a locking portion of the arc surface extends beyond a proximal bearing wall portion of the wall coupling member and said locking portion bears against the front wall surface of the wall mount, and an unlocked position at which the locking portion does not
15 exceed said proximal wall portion, at which the locking portion is spaced from the front wall surface of the wall mount.

20 **12.** The tolerance cancelation mechanism of embodiment 10 or 11, wherein the wall engaging arc surface is defined by at least a first radii and a second radii, wherein said first radii originates at the pivot point and said second radii is longer than said first radii and originating at an imaginary point extending behind said pivot point.

25 **13.** The tolerance cancelation mechanism of embodiment 10 or 11, wherein the wall engaging arc surface of the fastener member is eccentrically pivotal about the pivot point, whereby the fastener member is swingable between the at least one locked position at which the locking portion projects beyond the proximal bearing wall portion of the wall coupling member and gradually into the unlocked position at which the locking portion retracts from the proximal bearing wall portion.

30 **14.** The tolerance cancelation mechanism of embodiment 10 or 11, wherein the proximal bearing wall portion of the wall coupling member is defined as a most proximal wall surface of the wall coupling member, facing a wall mount.

30 **15.** The tolerance cancelation mechanism of embodiment 10 or 11, wherein the arrangement is such that upon articulating a coupling member with a locking slot of a wall mount the tolerance cancelation mechanism is activated allowing the wall engaging arc surface to slide over a front wall surface of the wall mount, bearing

- 12 -

against it and thus eliminating or substantially reducing freedom degree between therebetween, wherein further the eccentric wall engaging arc surface is pivoted into the locked position entails greater contact force and enhanced tolerance cancelation.

16. The tolerance cancelation mechanism of embodiment 10 or 11, being an
5 automatic mechanism, whereby the fastener member is configured for spontaneous displacing into the locked position.

17. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the fastener member is pivotally articulated to the wall coupling member over a horizontally extending pivot axis, whereby the fastener member is configured for
10 spontaneous displacing into the locked position under force of gravity.

18. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the fastener member is spring biased into the locked position, whereby articulating the wall coupling member on a wall mount requires momentarily displacing the fastener member into the unlocked position.

19. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the fastener member is spring biased into the unlocked position, whereby articulating the wall coupling member on a wall mount requires momentarily displacing the fastener member into the locked position.

20. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the fastener member is configured for manually displacement into the unlocked position.

21. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the pivot axis is disposed at any orientation with the fastener member non-biased or biased into any of its respective positions.

22. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the fastener member is configured with a manipulating grip for manually pivotal
25 displacing it between the respective closed and open position.

23. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the manipulating grip is one or more finger grips laterally extending from a side wall of the fastener member.

24. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the manipulating grip is a recessed portion configured at a sidewall of the fastener member.

- 13 -

25. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the manipulating grip is a gripping surface configured at a bottom surface of the fastener member.
26. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the
5 fastener member has a U-like shaped cross section.
27. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the fastener member has an L-like shaped cross section.
28. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the tolerance cancelation mechanism is configured with a clicking arrangement, wherein
10 one or both of a surface of the fastener member and a facing surface of the coupling member is configured with one or more projections, and the other one or both of the surface of the fastener member and a facing surface of the coupling member is configured with corresponding depressions, whereby pivotal displacement of the fastener member generates light clicking motion.
- 15 29. The tolerance cancelation mechanism of embodiment 10 or 11, wherein an inside wall surface of the fastener member can be configured with one or more relief surfaces for overcoming lateral projection from a surface of the coupling member.
30. The tolerance cancelation mechanism of embodiment 10 or 11, wherein at least a portion of the wall engaging arc surface is configured with friction enhancing
20 arrangement, for enhancing arresting of the fastener member at a locked position.
31. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the friction enhancing arrangement is roughening of at least a portion of the wall engaging arc surface; such roughening can be for example knurling, ribs, projections, depressions, etc.
- 25 32. The tolerance cancelation mechanism of embodiment 10 or 11, wherein contact of the wall engaging arc surface with a front wall surface of the wall mount is along a line or lines or a surface.
33. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the wall engaging arc surface has a gradually decreasing radii length, from a top portion
30 to a bottom portion.
34. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the wall engaging arc surface has a generally smooth surface.

- 14 -

35. The tolerance cancelation mechanism of embodiment 10 or 11, wherein the fastener member is a cam-like mechanism, displaceable between at least one locked position and an unlocked position.

36. The tolerance cancelation mechanism of embodiment 35, wherein the cam-like
5 mechanism is continuously pivotally displaceable, between respective angular positions, whereby the wall engaging arc surface displaces over the wall surface to thereby tighten contact therebetween and cancel tolerances therebetween.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to better understand the subject matter that is disclosed herein and to
10 exemplify how it may be carried out in practice, embodiments will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

Fig. 1 is a perspective proximal (front) view of a rack system according to an example of the present disclosure;

15 **Fig. 2** is a perspective distal (back) view of a wall mount rack fitted with coupling members according to an embodiment of the disclosure;

Fig. 3A is an enlarged perspective back view of a portion of the rack system, with the coupling member at a locked position;

Fig. 3B is the same as Fig. 3A, with an enveloping shelve removed from the
20 coupling member;

Fig. 3C is a cross section along line III – III in Fig. 3B;

Fig. 3D is a planar view of Fig. 3C;

Fig. 3E is a close up perspective front view of a portion of the rack system, with the coupling member at a locked position;

25 **Fig. 4A** is the same as Fig. 3A, with the wall mount rack removed;

Fig. 4B is the same as Fig. 4A, with the enveloping shelve removed from the coupling member;

Fig. 4C is front, top perspective view of the coupling member of the present disclosure, at a locked position, isolated from other elements;

30 **Fig. 4D** is a back, top perspective view of Fig. 4C;

- 15 -

Fig. 5A is a perspective back view of a portion of the rack system, with the enveloping shelf removed from the coupling member, and with the coupling member at an unlocked position;

Fig. 5B is a front perspective view of Fig. 5A;

5 **Fig. 6A** is an enlarged perspective back view of a portion of the rack system, with the coupling member at an unlocked position;

Fig. 6B is the same as Fig. 6A with the wall mount rack removed;

Fig. 6C is the same as Fig. 6B, with the enveloping shelf removed from the coupling member;

10 **Fig. 6D** is a back vertical section taken along line VI – VI in Fig. 5A;

Fig. 6E is the same as Fig. 6D, however at a front view;

Fig. 6F is front, top perspective view of the coupling member of the present disclosure, at a locked position, isolated from other elements;

Fig. 6G is a back, top perspective view of Fig. 6F;

15 **Figs. 7A to 7D** are perspective back views illustrating consecutive steps of detaching a utility module, namely a shelf system from a wall mount rack;

Fig. 8A is a perspective view of a coupling member according to the present disclosure, wherein the utility module is an integrated fastening strap;

20 **Fig. 8B** is a perspective view of a coupling member according to the present disclosure, wherein the utility module is configured at a distal end with a utility module articulation member; and

Fig. 9 illustrates the rack system of Fig. 1, with a utility module detachably attached to the rack system;

25 **Fig. 10A** is a perspective view of a rack system configured with a tolerance cancelation mechanism, according to an aspect of the disclosure, the system illustrated at a locked position;

Fig. 10B is an enlargement of the portion marked 10B in Fig. 10A;

Fig. 10C is the same as Fig. 10B, with a support shelf removed for sake of clarity;

30 **Fig. 10D** is a planar side view of Fig. 10C;

Fig. 10E is a proximal perspective view of a portion of only the wall coupling member with the tolerance cancelation mechanism at the locked position;

Fig. 10F is a planar side view of Fig. 10E;

- 16 -

Fig. 10G is a proximal perspective view of one only the wall coupling member articulated to a wall mount;

Fig. 11A is a side, partial image, of the rack system configured with a tolerance cancelation mechanism, at an open position;

5 **Fig. 11B** is a perspective view of a fastener member of the tolerance cancelation mechanism;

Fig. 12 is a sectioned view along line XII – XII in Fig. 10E;

Fig. 13A is the same as Fig. 10C, however with the tolerance cancelation mechanism at the unlocked position;

10 **Fig. 13B** is a planar side view of Fig. 13A;

Fig. 13C is the same as Fig. 13B, with the mounting rack removed;

Fig. 13D is a proximal perspective view of a portion of only the wall coupling member with the tolerance cancelation mechanism at the unlocked position;

15 **Fig. 14A** is a perspective view of a rack system configured with a tolerance cancelation mechanism, the system illustrated at a rack-mounting position;

Fig. 14B is an enlargement of the portion marked 14B in Fig. 14A, with a support shelf removed for sake of clarity;

Fig. 14C is a planar side view of Fig. 14B;

20 **Fig. 14D** is a proximal perspective view of a portion of only the wall coupling member with the tolerance cancelation mechanism at the rack-mounting position;

Fig. 15A is a perspective view of a rack system configured with a tolerance cancelation mechanism, the system illustrated at a rack unmounting position;

Fig. 15B is an enlargement of the portion marked 15B in Fig. 15A, with a support shelf removed for sake of clarity;

25 **Fig. 15C** is a planar side view of Fig. 15B;

Fig. 15D is the same as Fig. 15C, with the mounting rack removed; and

Fig. 15E is a proximal perspective view of a portion of only the wall coupling member with the tolerance cancelation mechanism at the rack unmounting position.

DETAILED DESCRIPTION OF EMBODIMENTS

30 In Fig. 1 of the drawings there is illustrated a wall mounted rack system generally designated **10**, comprising a pair of parallelly disposed wall mountable mounting racks **12** of the so-called E-Track configuration, each configured with a central longitudinal

- 17 -

projection **14** having a front wall face **16** with a receiving space **18** there behind, and further said front wall face **16** is configured with a plurality of rectangle locking slots **22**.

Each slot has a pair of longitudinal edges **26** (often folded in sheet material, e.g. parallel disposed flaps **29**), and a first narrow edge **28** and a second narrow edge **30**. The
5 flaps **29** are spaced apart within the receiving space **18** and are disposed so as to snugly accommodate a locking portion of a coupling member, as will be described herein after. Side shoulders **31** of the mounting rack **12** facilitate articulation same to any surface.

Whilst in the illustrated example the wall mount is one of many locking slots **22** disposed on a vertically disposed mounting rack **12**, it should be appreciated that other
10 configurations are possible too, e.g. a single wall mount attachable to, or integral with any bearing wall surface. Furthermore, the wall mount, either a rack or a single mount, can be disposed at any desired orientation, e.g. vertical orientation, horizontal orientation, inclined orientation, ground mounted orientation and ceiling mounted orientation.

An exemplary utility module is illustrated in Figs. 1 and 2, namely a shelving/rack
15 member generally designated **40**, configured as a carry support member, thus provided with carrying handles **44** and at least at a top face thereof there is configured a multi-location modular articulating system **46**. However, it is appreciated that a coupling member according to the present disclosure can be used in conjunction with a variety of utility modules, wherein the racking/shelve system disclosed herein is a mere example.

20 Disposed within side wall portion **50** of the shelve **40** there is a load bar **60** integrally configured with a coupling member **70**, seen isolated in Figs. 4C, 4D, 6F and 6G. The load bar **60** is a mere example and in the illustrated example it is removably received within the side wall portion **50** of the shelve **40**, though it can just as well be used as a plain shelf support bar, mounting bar for different purposes, etc. Thus, load bar
25 is a form of a utility module which in the illustrated example is integrally configured coupling member **70**.

The coupling member **70** received within a distal end of the load bar **60**, and comprises two parallelly disposed side walls **72** with a locking portion **75** at a distal end thereof, for snug insertion into any one of the rectangle locking slots **22** of the mounting
30 racks **12**, whereby the external width **W** of the side walls **72** corresponds with the distance between the flaps **29**.

- 18 -

The side walls **72** are formed out, in the present example, as a uniform unit with a front wall portion **74** therebetween, imparting the structure a U-like cross section, with a space **76** disposed between the side walls **72**.

The locking portion **75** is configured with a first locking lug **80** projecting
5 upwards and associated with a first locking recess **82**, and a second locking lug **84** projecting downward and associated with a second locking recess **86**, where said first locking recess **82** and second locking recess **86** are disposed in register with one another, i.e. having a distal wall **88** and **90** respectively of each of the first locking lug **80** and the second locking lug **84** aligned with one another.

10 It is also seen that the first locking recess **82** has a depth **D₁** deeper than the depth **D₂** of said second locking recess **86** (when measured from the respective end most portion).

The coupling member **70** is further configured with an obstructing plunger **96** slidably displaceable within the space **76** extending between the side walls **72**, said
15 obstructing plunger **96** being slidably displaceable between a locked position (as in Figs. 2, 3 and 4), and an unlocked position (as in Figs. 5 and 6). At the locked position the obstructing plunger **96** projects into the first locking recess **82**, above an innermost wall thereof **83**, whilst at the an unlocked position the plunger is retracted into the space **76** and out of the first locking recess **82**. At the locked position a chamfered distal end **97** of
20 the obstructing plunger **96** projects through an opening **99** at the front wall portion **74**, thereby supporting the plunger.

The obstructing plunger **96** is secured at a proximal end thereof within a closed trigger like manipulating member **100** fitted for only sliding displacement within the load bar **60** and comprises a biasing member in form of a coiled compression spring **102**
25 bearing at a proximal end against a spring support **104** within the load bar **60**, and at opposed, distal end, is mounted on a support boss **106** of the manipulating member **100** and bears there against. The like manipulating member **100** is configured with a secured/closed finger grip aperture **110**, whereby sliding manipulating of the obstructing plunger **96** from its normally locked position to the open position is carried out by
30 inserting one's finger into the finger grip aperture **110** of manipulating member **100** and pulling it backwards against the biasing effect of the spring **102**. The secured/closed finger grip aperture **110** offers safety in the sense that the risk of pinching a user's finger is reduced.

- 19 -

It is seen throughout the examples illustrated herein that at least a finger grip portion of the manipulating member **100** extends in register with a corresponding opening **129** in the side wall portion **50** of the shelf **40** and **131** in the coupling member **70**

The minimal length $L_{\min}$ between the respective inner most wall portions of the first and second locking recesses **82** and **86** is shorter than the maximal length $L_{\max}$ between the ends of the first locking lug **80** and the second locking lug **84**, however wherein the minimal length $L_{\min}$ is smaller than the length of the locking slot **22**, whilst the maximal length $L_{\max}$ is greater than the length of the locking slot **22**. Thus, the locking portion **75** cannot be inserted into a locking slot or removed therefrom by axial displacement, but special maneuvering is required, as will be described hereinafter with reference to Figs. 7A to 7D.

Further appreciated, at the normally locked position, wherein the obstructing plunger **96** is disposed within the first locking recess **82**, it in fact increase the minimal length, giving rise to an effectively 'locked length' L_{lock} wherein $L_{\min} < L_{\text{lock}} < L_{\text{ma}}$. Thus the arrangement is such that articulation or detaching of the coupling member **70** from the mounting racks **12** takes place by displacing the coupling member so that the first locking recess **82** encounters the first narrow edge **28** of the rectangle locking slot **22**, thereby facilitating tilting of the coupling member **70** so that the second narrow edge **30** of the rectangle locking slot **22** can swing over the second locking lug **84**, into or out of the second locking recess **86**, i.e. into respective articulation or detaching from the wall mount. However, displacing the coupling member **70** such that the first locking recess **82** encounters the first narrow edge **28** of the rectangle locking slot **22** can be facilitated only when the obstructing plunger **96** is at the retracted, unlocked position.

The arrangement is such that at the locked position the obstructing plunger is disposed within the top locking recess thus preventing lateral displacement of coupling member so that the first locking recess displaces towards encountering with the edge of the locking slot of the wall mount, thus prohibiting engagement with or disengagement from, the wall mount, respectively.

Turning now to Figs. 7A to 7D it will be explained how a shelf **40** is detached from a supporting mounting rack **12**. It is appreciated that the shelf **40** is articulated to two mounting rack **12**, whereby unlocking of the coupling member **70** members should be performed simultaneously, e.g. using the two index fingers of the individual. For sake of clarity reference hereinafter is made to manipulating a single coupling member **70**.

- 20 -

At a first stage, the manipulating member **100** is retracted by introducing a finger into the finger grip aperture **110** and displacing it against the biasing effect, in direction of arrow **140**, into the unlocked position (Fig. 7A), resulting in corresponding retraction of the obstructing plunger **96** into the unlocked position. Now only can detaching take
5 place.

At a second stage, the shelve **40** is displaced upwards, in direction of arrow **144** (Fig. 7B), whereby an innermost wall thereof **83** of the first locking recess **82** encounters the first narrow edge **28** of the locking slot **22**.

At a third stage, the shelve **40** is tilted upwards, in direction of arrow **146** (Fig. 7C) whereby the second locking lug **84** is free to swing out from the locking slot **22**, from the second narrow edge **30** of locking slot **22**, and finally wherein the shelve **40** can be removed (**148** in Fig. 7D).

It is appreciated that mounting a shelve (or any other utility module configured with a coupling member according to the disclosure, takes place in a reverse sequence of
15 operations, however wherein attaching the coupling member to the mounting rack or other wall mount, is possible only upon displacing the obstructing plunger into its retracted, unlocked position.

Fig. 8A illustrates a coupling member according to the present disclosure, generally designated **150**, configured with a hosing portion **152** having at a distal end thereof a locking portion **156** similar to locking portion **75** disclosed hereinabove, and at
20 a proximal end (utility portion) it is integrally configured with a securing belt **160** having a locking buckle **162** at its free end. A manipulating member **164** is configured for manipulating the obstructing plunger **166** as disclosed herein before.

In the example of Fig. 8B a coupling member according to the present disclosure, generally designated **170**, is configured with a hosing portion **172** having at a distal end thereof a locking portion **174** similar to locking portion **75** disclosed hereinabove, with a
25 manipulating member **176** is configured for manipulating the obstructing plunger **178** as disclosed herein before and at a proximal end (utility portion) it is integrally configured with a utility module attachment generally designated **180** and configured for articulation
30 thereto any utility module (not shown).

The example of Fig. 9 illustrates the wall mounted rack system **10** of Fig. 1, with a shelve **40** articulated to the mounting racks **12** and with a container **45** detachable

- 21 -

articulated to the multi-location modular articulating system **46** at a top face of the shelf **40**.

Further attention is now directed to Figs. 10 to 15, directed to yet an aspect of the disclosure, concerned with a tolerance cancelation mechanism for use in conjunction with a coupling member of a rack system. Whilst the following drawings make reference to a particular rack system, it is appreciated that the tolerance cancelation mechanism of the present disclosure can be used with other rack systems as well, setting as an example the rack mounting system exemplified herein before with reference to the preceding drawings.

It is further appreciated that the wall mount can be of any shape and size, applicable over any surface, at any orientation, and can be configured with any one or more mounting/locking slots.

The wall mounting rack system generally designated **200** (Fig. 10A) comprises two parallelly disposed wall mountable racks **202**, each configured with a plurality of elongate mounting slots **204**. A pair of wall coupling members **208** is provided (Fig. 10G), one of which is articulated to the respective wall rack **202**, and a support shelf **210** mounted over both wall coupling members **208** and secured thereto. US8,028,845 discloses a rack mounting system similar to that illustrated in Figs. 10 to 15, however is devoid of the tolerance cancelation mechanism as will be disclosed hereinafter.

A tolerance cancelation mechanism generally designated **220** is provided, comprising a fastener member **222** pivotally articulated at **224** to the wall coupling member **208** about a horizontally disposed axle **226** (Fig. 11B).

The fastener member **222** is a bifurcated-like element (best seen in Fig. 11B), embracing between its two parallelly extending side walls **223A** and **223B** a portion of the wall coupling members **208**.

configured with an asymmetric sector-like shape, defined between at least a first radii **R₁** and a second, greater radii **R₂** ($R_2 > R_1$) shown in Fig. 11A, wherein the first radii **R₁** extends from the pivot point **224**, and the second radii **R₂** extends from an imaginary location **228** behind (and above) the pivot point **224**.

The fastener member **222** is configured with a wall engaging arc surface **230** (an arc, though non symmetric and disposed along said at least one pivot radii **224** and at least one imaginary radii extending from an imaginary origin **228**), such that a top portion of the wall engaging arc surface **230** has a longer radii than a lower portion thereof. Further,

- 22 -

the wall engaging arc surface **230** is generally smooth and however has a locking portion of the arc surface configured with several friction/grip enhancing ribs **232** projecting from the smooth surface **230**, the purpose of which will be discussed hereinafter.

It is further seen that the fastener member **222** comprises on its side wall with a
5 manipulating grip in the form of a lateral projection **238** (on both sides thereof) with roughened top portion, for manually pivotal displacing it between the respective closed and open position, to be discussed hereinafter. More so, a bottom wall surface **240** of the fastener member **222** is configured with roughening, so as to form an under-grip for manipulation the fastener member **222** into the unlocked position (to be discussed
10 hereinafter).

The fastener member **222** is pivotally articulated to the wall coupling members **208** and is so positioned that it is pivotable between a locked position (Figs 10A to 10G; 12) and an unlocked position (Figs. 13 to 115). At the locked position a locking portion (friction enhancing ribs **232**) of the arc surface **230** extends beyond a proximal bearing
15 wall portion **250** of the wall coupling member **208** (best appreciated in Fig. 10F, wherein the dashed line marked **X** is an imaginary extension of the proximal bearing wall portion **250**) and an unlocked position at which the locking portion does not exceed said proximal wall portion. At the unlocked position the locking portion (friction enhancing ribs **232**) of the arc surface **230** extends behind (or flush with) the proximal bearing wall portion
20 **250** (best appreciated in Figs. 13B and 13C, wherein the dashed line marked **X** is an imaginary extension of the proximal bearing wall portion **250**).

The proximal bearing wall portion **250** of the wall coupling member **208** is a surface which at an assembled position can bare against a wall surface **251** of the wall mountable racks **202**. Also noted, in Fig. 11B, an inside surface of the side walls **223A**
25 and **223B** is configured with ribs **254** which at the assembled position are disposed in tight proximity over a laterally projecting bulge **258** projecting from side wall surface of the wall coupling member **208**, such that pivotal swinging of the fastener member **222** between its respective locked position and unlocked position entails a clicking sound associated with mild distinct angular positions.

30 The arrangement is such that the fastener member **222** acts as a cam-like mechanism, wherein the wall engaging arc surface **230** is configured for following the wall surface **251** of the wall mountable rack **202**, whereby the arc surface **230** roles over the wall surface **251**, until obtaining maximum angular pivot thereof, obtaining maximum

- 23 -

tolerance cancelation. Any such location, where the fastener member **222** is barred from further pivotal displacement is referred to as a locked position. However, wherein each such locked position is a relevant location and can change depending on clearance between the coupling member **208** and the wall mountable rack **202**.

5 In the illustrated example the cam-like mechanism (i.e. wall engaging arc surface **230**) is continuously pivotally displaceable, between respective angular positions, whereby the wall engaging arc surface displaces over the wall surface to thereby tighten contact therebetween and cancel tolerances therebetween.

The tolerance cancelation mechanism is provided so as to eliminating or
10 substantially reducing freedom between the wall coupling members **208** (and respectively any element supported thereby, such as a rack/shelve **210** or any other utility) and between the wall mount (racks **202**), thus to provide a stable a shake free articulation therebetween.

The arrangement is such that upon articulating of a coupling member **208** with a locking slot **204** of a wall mount **202**, the tolerance cancelation mechanism **222** is
15 activated, allowing the wall engaging arc surface **230** so slide over the front wall surface **251** of the wall mount **202**, bearing against it and thus eliminating or substantially reducing freedom degree between therebetween, wherein further the eccentric wall engaging arc surface **230** is pivoted into the locked position (i.e. in a downwards direction as indicated by arrow **260**) entails greater contact force and enhanced tolerance
20 cancelation.

Mounting a coupling member **208** over a wall mount rack **202** takes place by positioning a bottom indent **261** over a bottom edge of the elongate mounting slot **204**. Then, while pressing an arresting clip **263** (Figs. 14A to 14D), the top locking recess **265** (now vacant from obstructing portion **267**) is introduced into the elongate mounting slot
25 **204**, and the arresting clip **263** is released. Once the coupling members **208** are leveled into the horizontal position, the tolerance cancelation mechanism **220** is automatically activated and drops down (in direction of arrow **260**) into the locked position, whereby the friction enhancing ribs **232** encounter the wall surface **251** of the wall mountable racks **202** and bear there against. Enhanced tolerance cancelation cab be facilitated by further
30 pressing the friction enhancing ribs **232** against the wall surface **251** by applying downwards directed force over the lateral projection **238**. Once the fastener member **222** bears against the wall surface **251**, at the locked position, any tolerances ('freedom of motion') between the coupling members **208** and the wall mount rack **202** is eliminated.

- 24 -

Disengaging a coupling member **208** from the wall mount rack **202** takes place in a reverse sequence of operations. Namely, first the tolerance cancelation mechanism **220** is deactivated into its unlocked position, by pivotal displacing the fastener member **222** in a counter clockwise direction (i.e. against the direction indicated by arrow 260). This
5 is facilitated by pressing upwards against the bottom wall surface **240** of the fastener member **222** or by elevating the fastener member **222** through lateral projection **238**, whereby the locking portion **232** of the arc surface **230** unlocks and disengages from the wall surface **251**, enabling detaching the wall coupling member **208** from the wall mountable racks **202**.

10

CLAIMS:

1. A coupling member having at a proximal side a utility portion attachable to a utility module, and at a distal side mounting portion attachable to a wall mount, said mounting portion comprises two parallelly disposed side walls with a locking portion
5 at a distal end thereof, configurable for snug arresting within a locking slot of a wall mount; said side walls comprise a first locking lug with an associated first locking recess, and a second locking lug with an associated second locking recess, disposed in register with one another, said first locking recess is deeper than said second locking recess;
10 wherein the coupling member is further configured with an obstructing plunger slidably displaceable within a space between the side walls, between a locked position, at which the plunger at least partially projects into the first locking recess, and an unlocked position at which the plunger is retracted into the space and out of the first locking recess.
- 15 2. A coupling member according to claim 1, wherein articulation or detaching of the coupling member from the wall mount takes place by displacing the coupling member so that the first locking recess encounters a first narrow edge of a rectangle locking slot of the wall mount, thereby facilitating tilting of the coupling member so that an opposite narrow edge of the rectangle locking slot can swing over the second
20 locking lug, into or out of the second locking recess, i.e. into respective articulation or detaching from the wall mount.
3. A coupling member according to claim 2, wherein displacing the coupling member so that the first locking recess encounters a first narrow edge of the rectangle locking slot can be facilitated only when the plunger is at the retracted, unlocked
25 position.
4. A coupling member according to claim 2, wherein the distance between respective edges of the first locking lug and the second locking lug is greater than the length of the rectangle locking slot, whereby the coupling member is barred from axial displacement.
- 30 5. A coupling member according to claim 1, wherein at the locked position the obstructing plunger is disposed within the top locking recess thus preventing lateral displacement of coupling member so that the first locking recess displaces towards

- 26 -

encountering with the edge of the locking slot of the wall mount, thus prohibiting engagement with or disengagement from, the wall mount, respectively.

6. A coupling member according to claim 1, wherein at an articulated position the narrow edges of the locking slot are received within the first locking recess and the second locking recess, respectively, wherein a portion of a front wall face and a portion of a back wall face of the mounting wall are disposed between respective walls of the first locking recess and the second locking recess, thereby providing axial support oriented in both forward and backward direction.

7. A coupling member according to claim 1, wherein for use in conjunction with an E-track mounting system.

8. A coupling member according to claim 1, attachable to a wall mount disposed at any desired orientation selected from vertical orientation, horizontal orientation, inclined orientation, ground mounted orientation and ceiling mounted orientation.

9. A coupling member according to claim 1, wherein the length of the second locking lug is similar to the obstruction depth of the obstructing plunger.

10. A coupling member according to claim 1, wherein the distance between the second locking lug and the first locking recess is similar to the distance between the second locking recess and an obstruction depth of the obstructing plunger.

11. A coupling member according to claim 1, wherein at the locked position of the obstructing plunger, a lateral face thereof extends between the first locking lug and the first locking recess.

12. A coupling member according to claim 1, wherein the obstructing plunger is configured a sliding rod having a round cross section.

13. A coupling member according to claim 1, wherein the obstructing plunger is configured with a chamfered distal end.

14. A coupling member according to claim 1, wherein the obstructing plunger slidably supported over a support surface within the space between the side walls of the coupling member.

15. A coupling member according to claim 1, wherein the obstructing plunger is configured for displacing substantially normal to the mounting wall of the wall mount.

16. A coupling member according to claim 1, wherein the obstructing plunger is biased into its locked position.

- 27 -

17. A coupling member according to claim 16, wherein the biasing the obstructing plunger into its locked position is facilitated by a biasing element disposed within the coupling member.
18. A coupling member according to claim 1, wherein the obstructing plunger is
5 manipulated by an axially displaceable manipulating member disposed at a distal portion of the coupling member.
19. A coupling member according to claim 18, wherein the manipulating member is a trigger-like member.
20. A coupling member according to claim 19, wherein the biasing element of the
10 obstructing plunger is articulated to the manipulating member.
21. A coupling member according to claim 20, wherein the trigger-like manipulating member is axially displaceable within a finger-safe opening.
22. A coupling member according to claim 1, wherein the side walls of the coupling member are configured with a front wall portion, assuming a U-like shaped
15 section.
23. A coupling member according to claim 1, wherein at the locked position a distal end portion of the obstructing plunger projects into a support opening configured at a front wall portion extending between side walls of the coupling member.
24. A coupling member according to claim 1, wherein the side walls of the
20 coupling member are integral or integrated with one another.
25. A coupling member according to claim 1, wherein the at least proximal facing edges of one or both of the first locking lug and the second locking lug are chamfered.
26. A coupling member according to claim 1, wherein the obstructing plunger is normally biased into the locked position.
- 25 27. A tolerance cancelation mechanism for a wall coupling member articulable to a wall mount, the wall coupling member comprising a tolerance cancelation mechanism comprising a fastener member pivotally articulated at a pivot point to a portion of a wall coupling member; said fastener member configured with an asymmetric sector-like shape having a wall engaging arc surface, wherein the fastener
30 member is pivotable between at least one locked position at which a locking portion of the arc surface extends beyond a proximal bearing wall portion of the wall coupling member, and an unlocked position at which the locking portion does not exceed said proximal wall portion.

- 28 -

28. A wall mounting system comprising a wall mount and at least one designated coupling member articulable thereto, said wall mount comprising one or more locking slots disposed at a front wall surface thereof; said coupling member comprising a tolerance cancelation mechanism comprising a fastener member pivotally articulated
5 at a pivot point to a portion of a wall coupling member; said fastener member configured with an asymmetric sector-like shape having a wall engaging arc surface, wherein the fastener member is pivotable between at least one locked position at which a locking portion of the arc surface extends beyond a proximal bearing wall portion of the wall coupling member and said locking portion bears against the front wall surface
10 of the wall mount, and an unlocked position at which the locking portion does not exceed said proximal wall portion, at which the locking portion is spaced from the front wall surface of the wall mount.

15

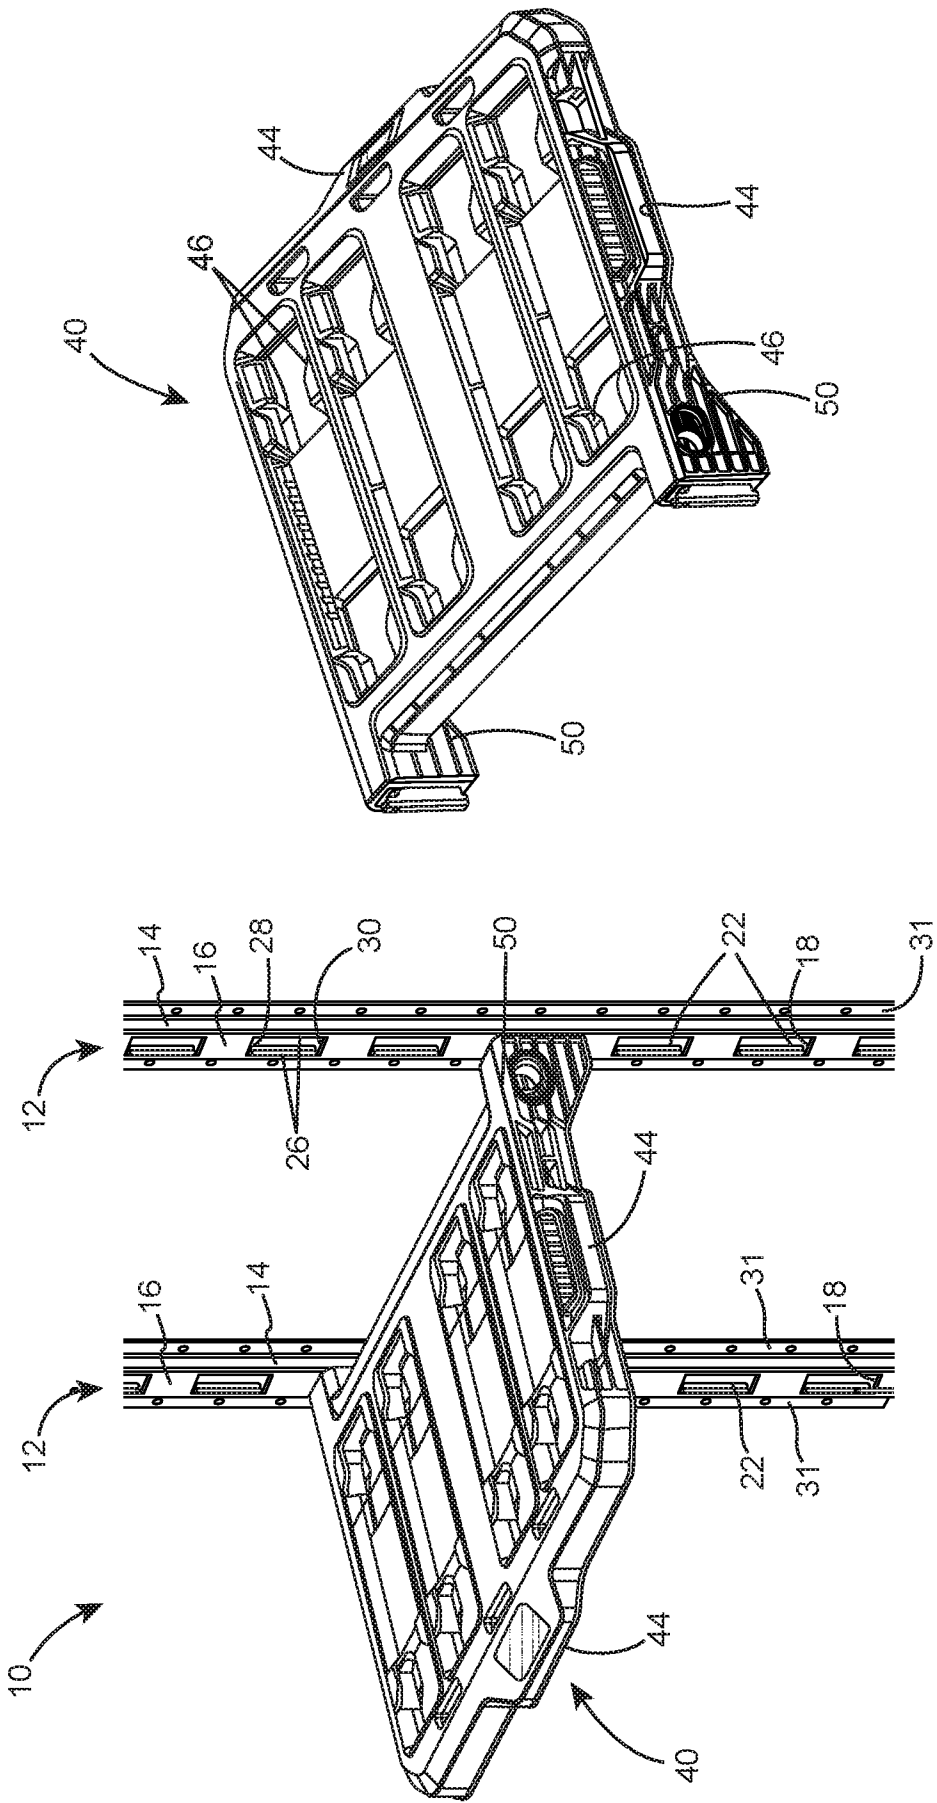


FIG. 2

FIG. 1

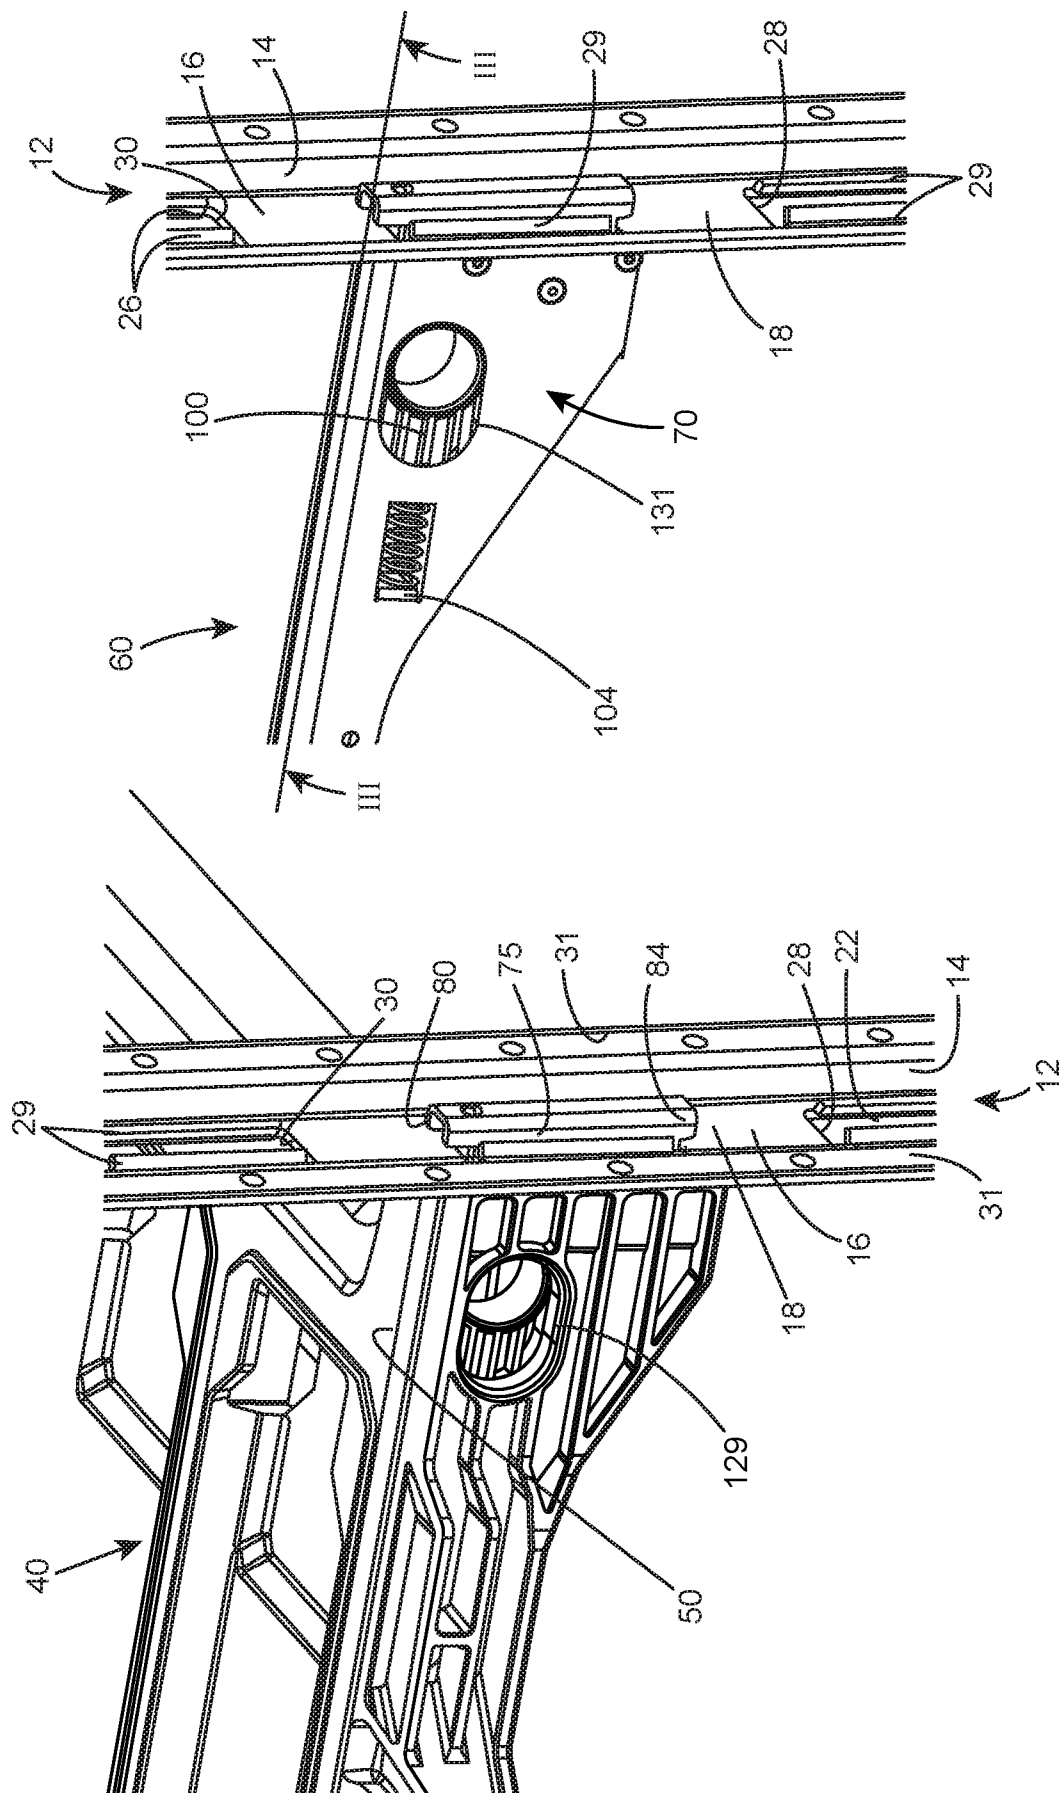


FIG. 3B

FIG. 3A

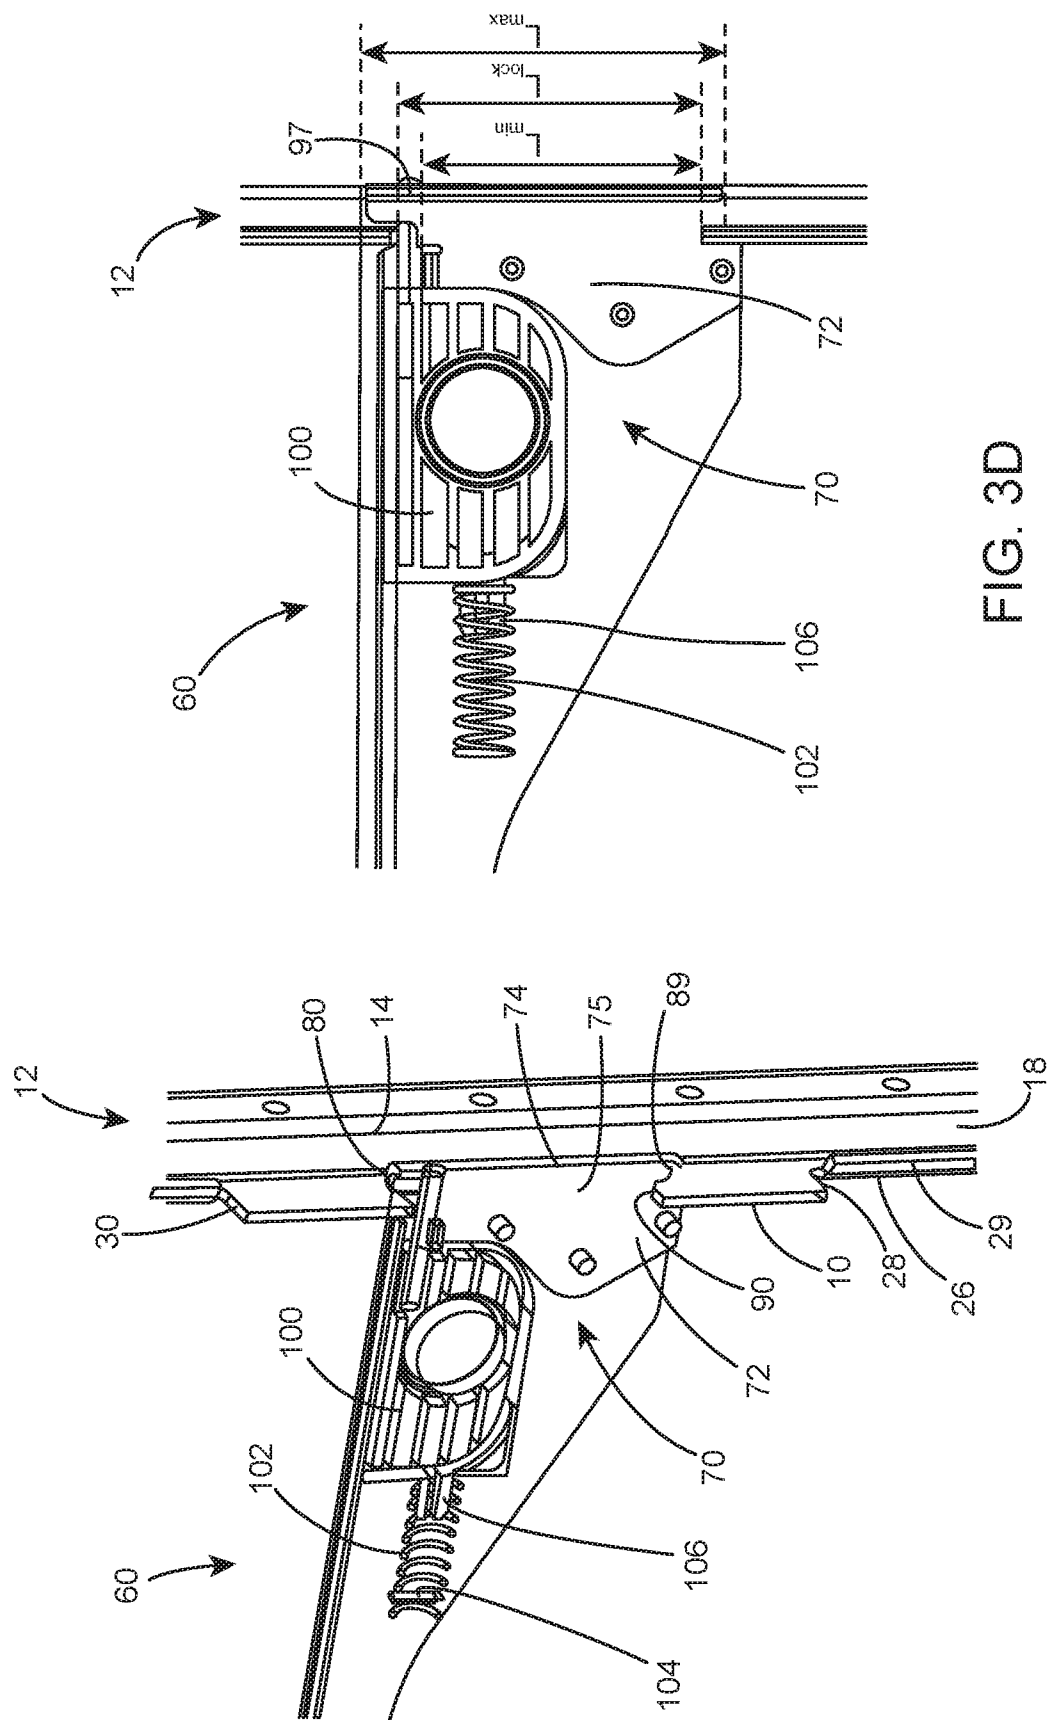


FIG. 3D

FIG. 3C

4/28

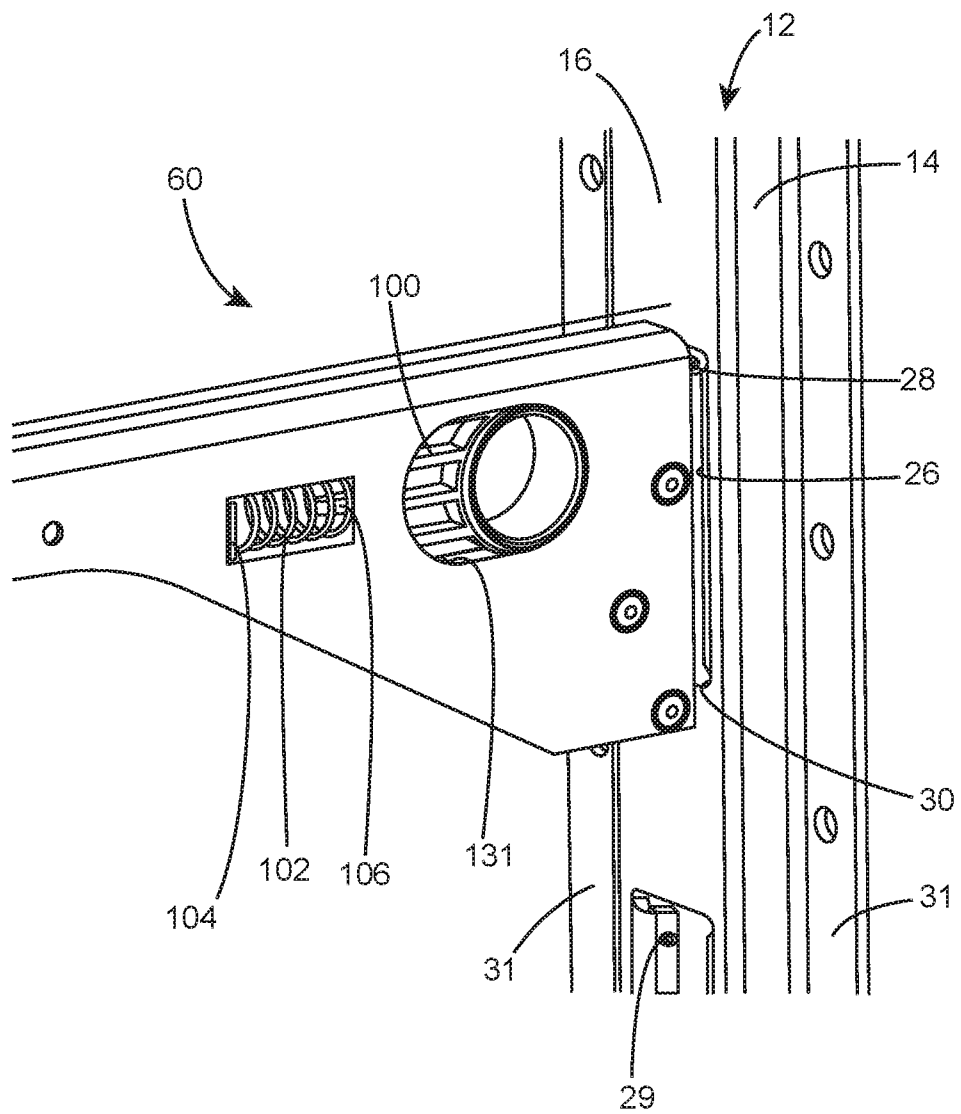


FIG. 3E

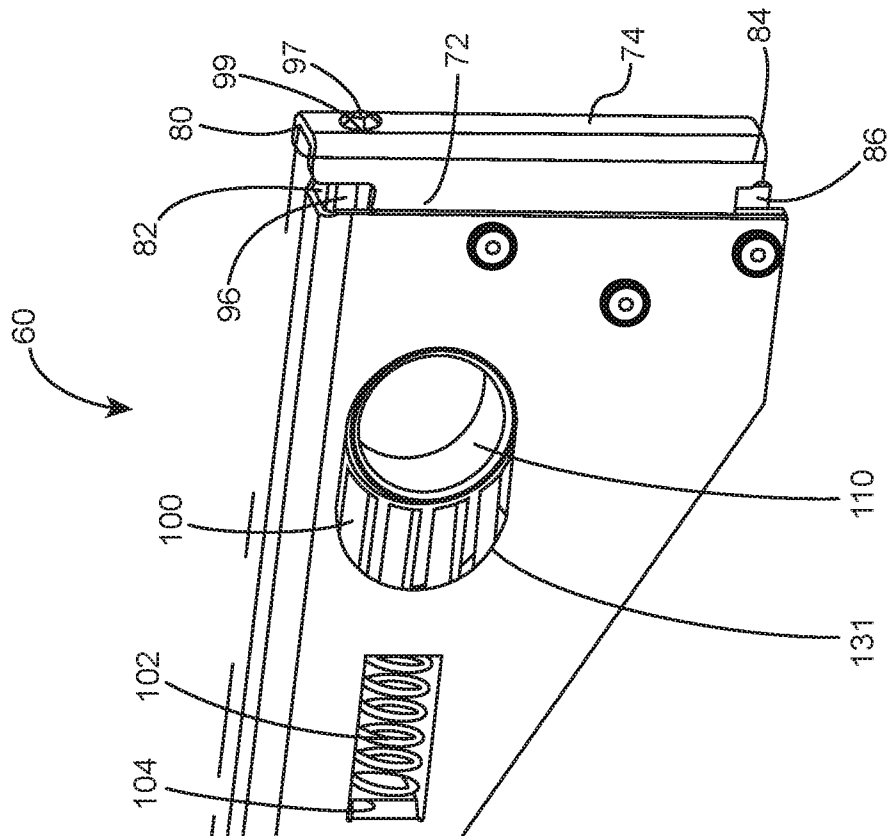


FIG. 4B

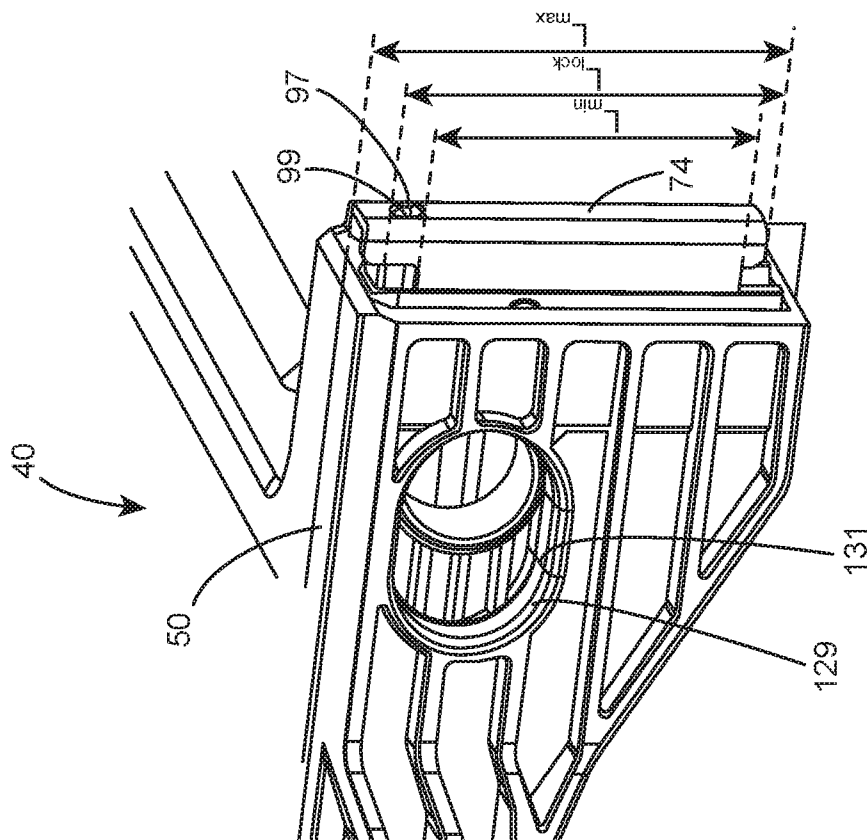


FIG. 4A

6/28

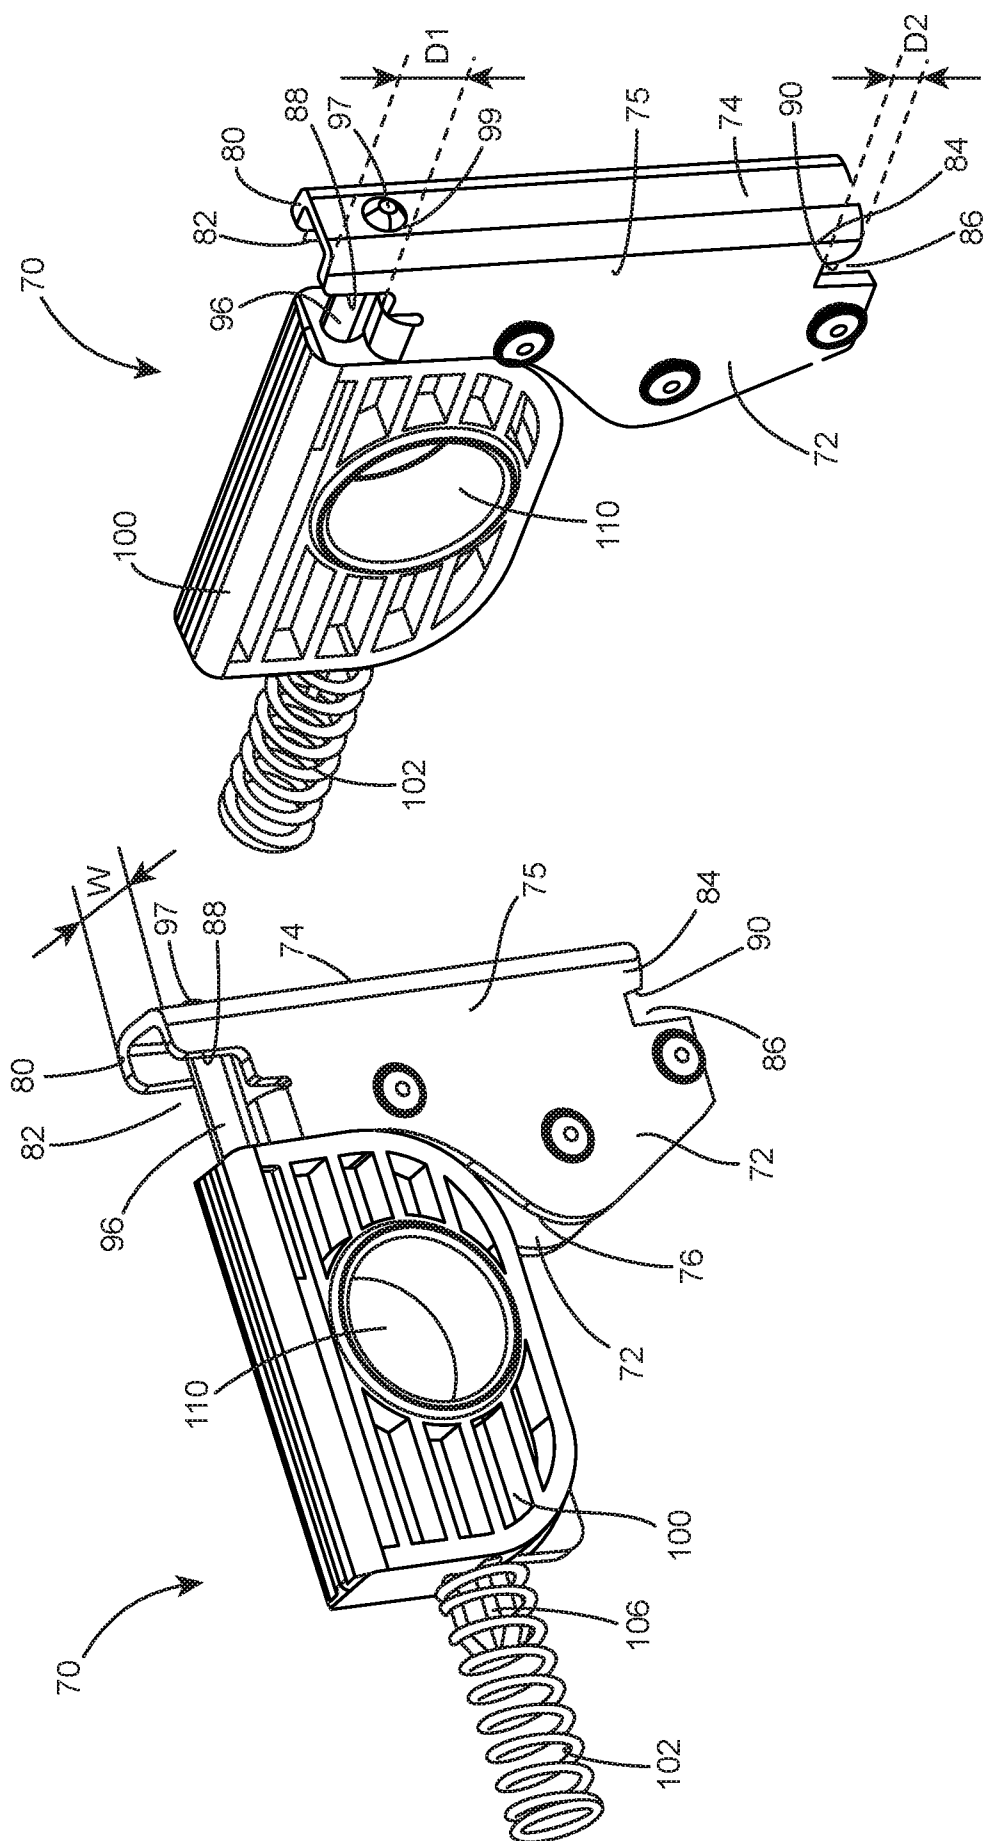


FIG. 4D

FIG. 4C

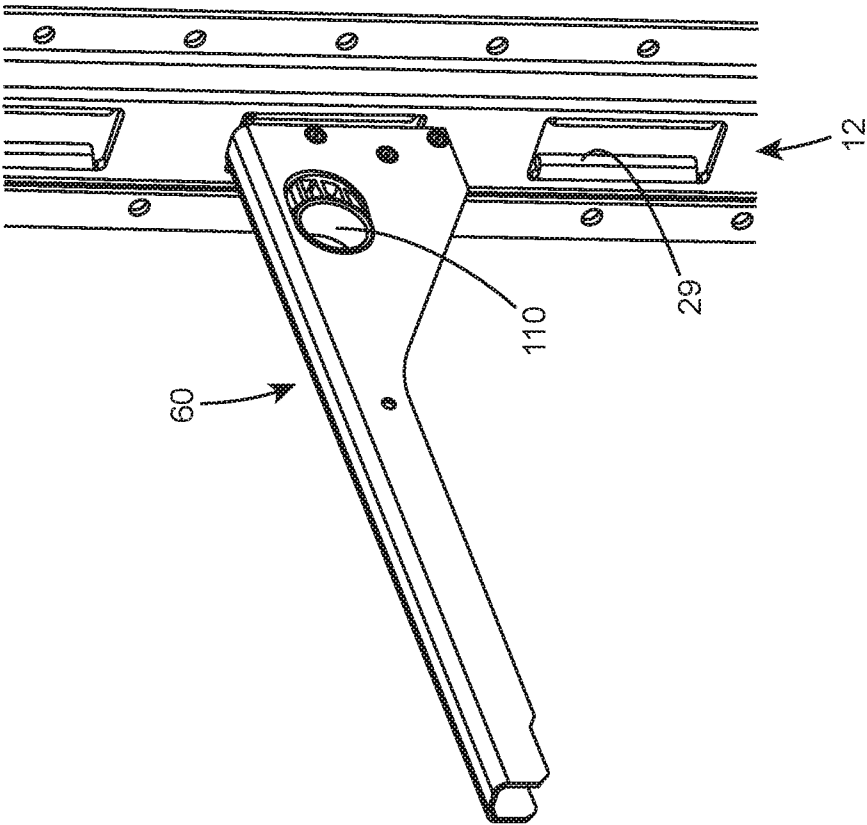


FIG. 5B

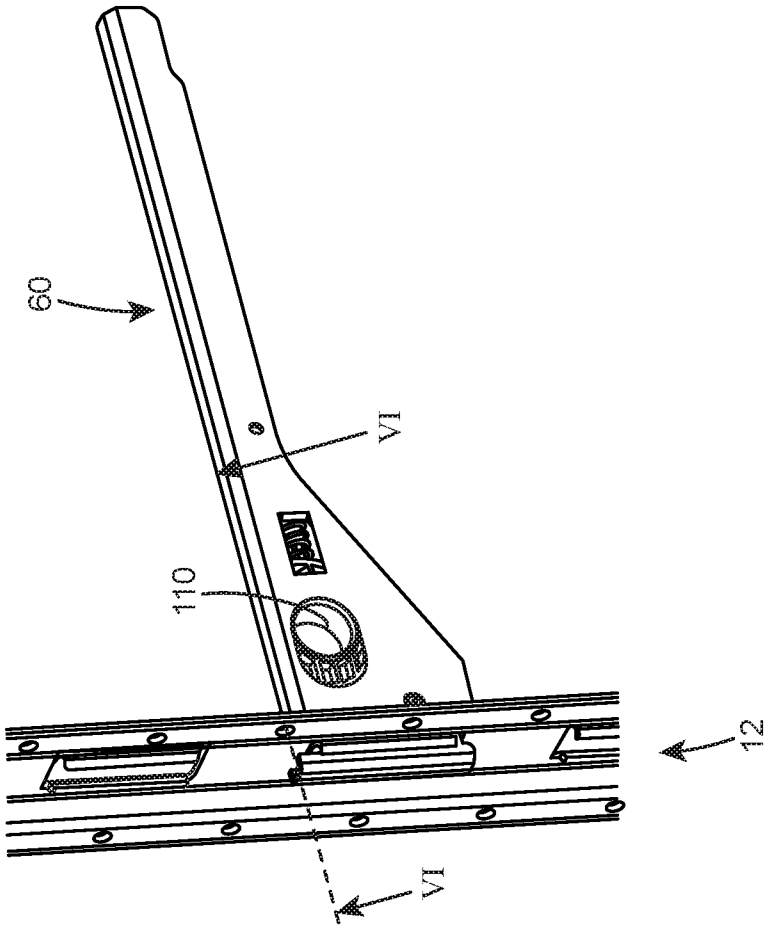


FIG. 5A

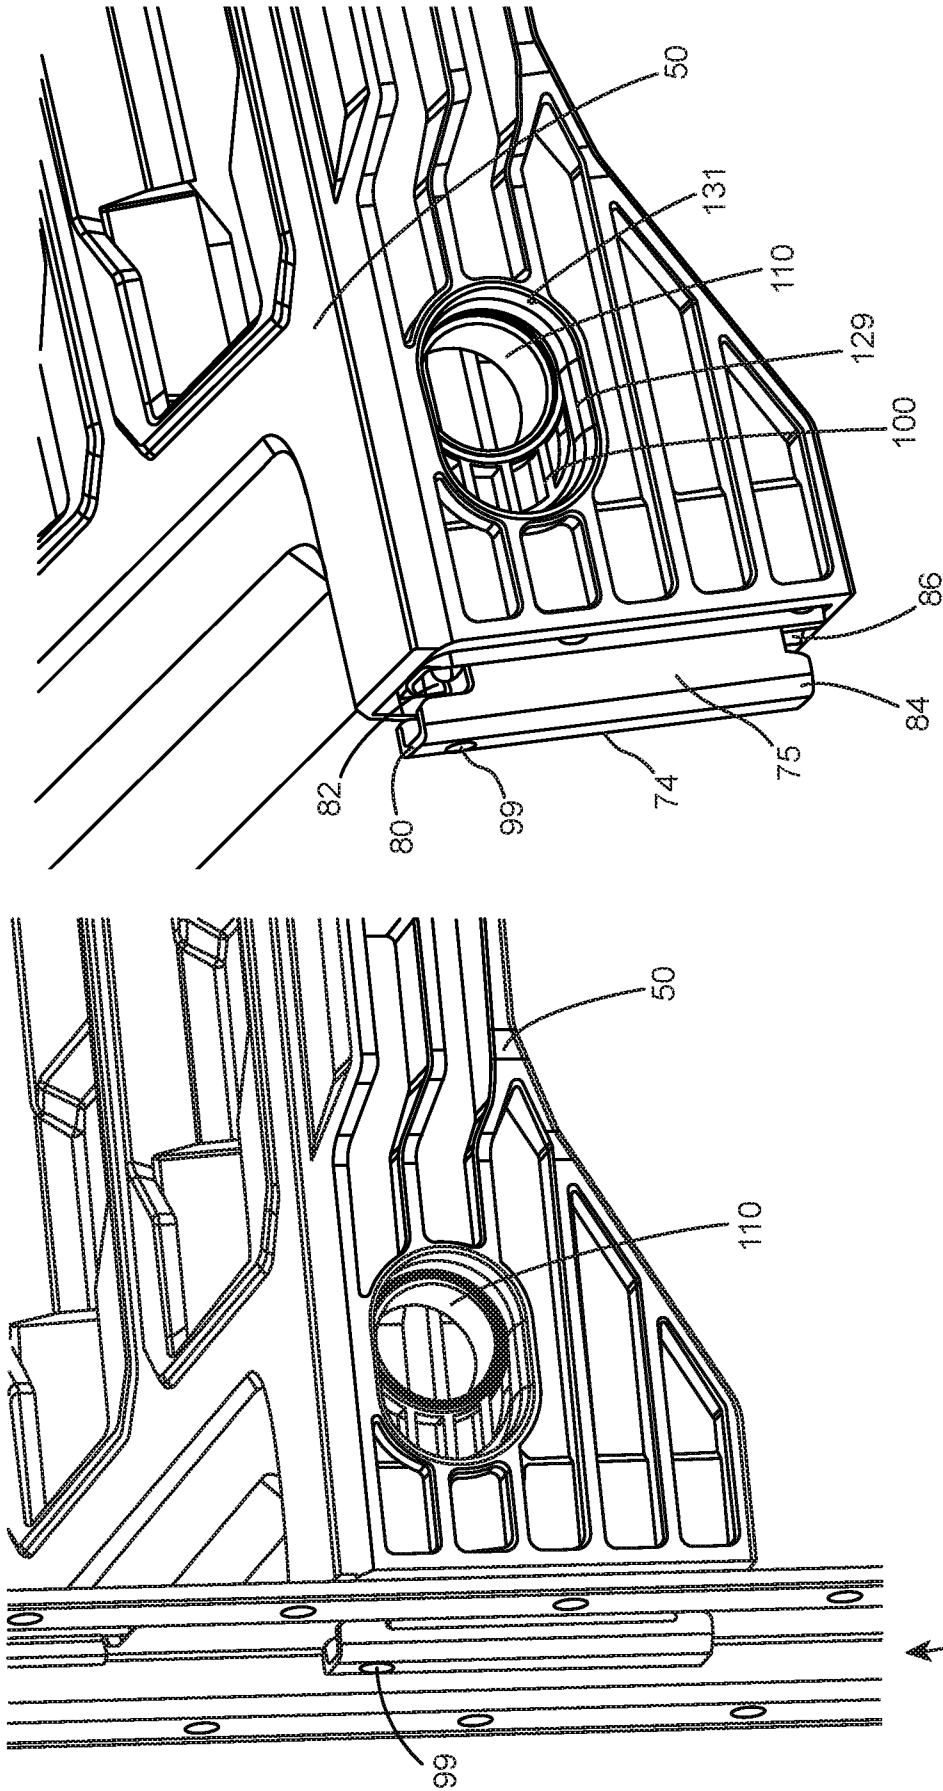


FIG. 6B

FIG. 6A

9/28

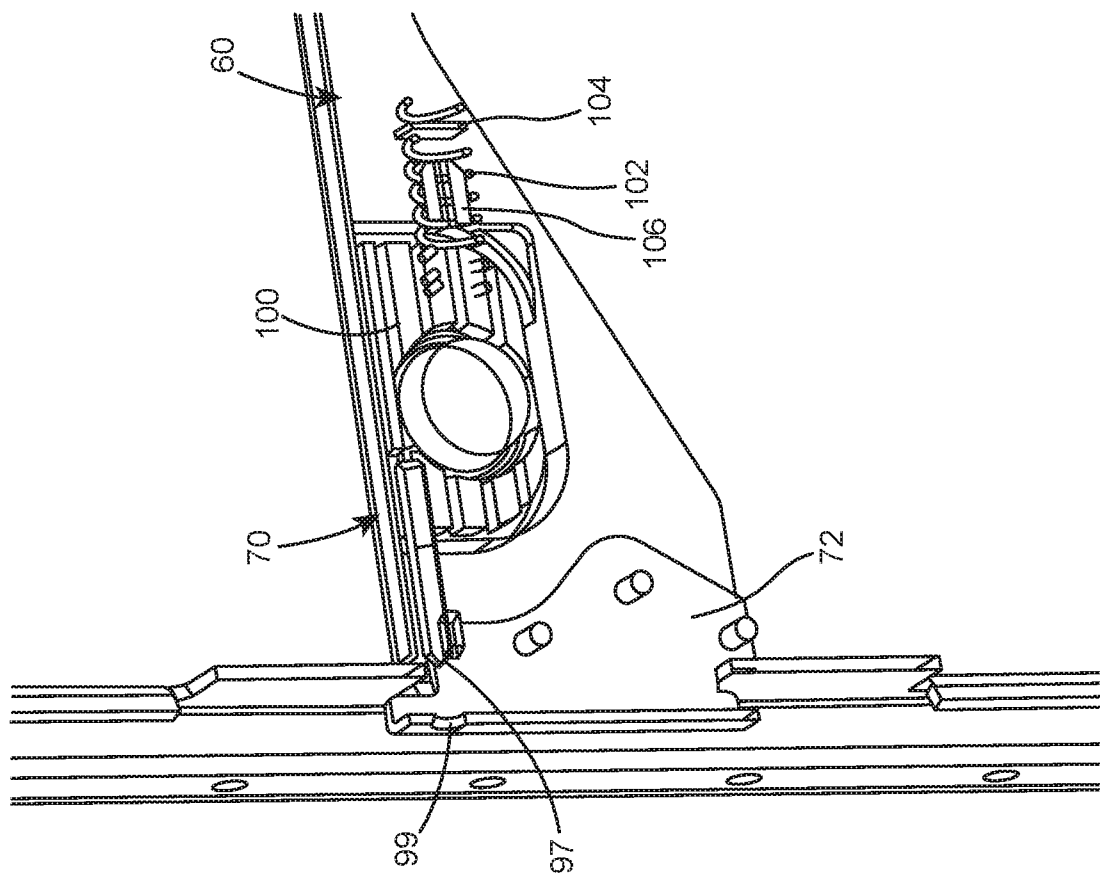


FIG. 6D

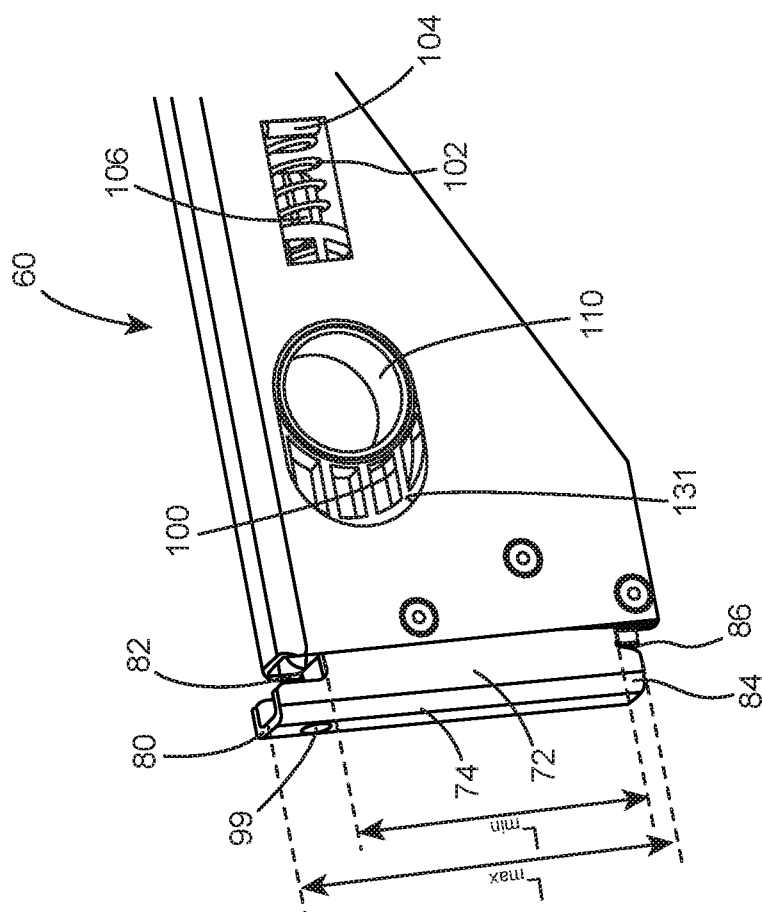


FIG. 6C

10/28

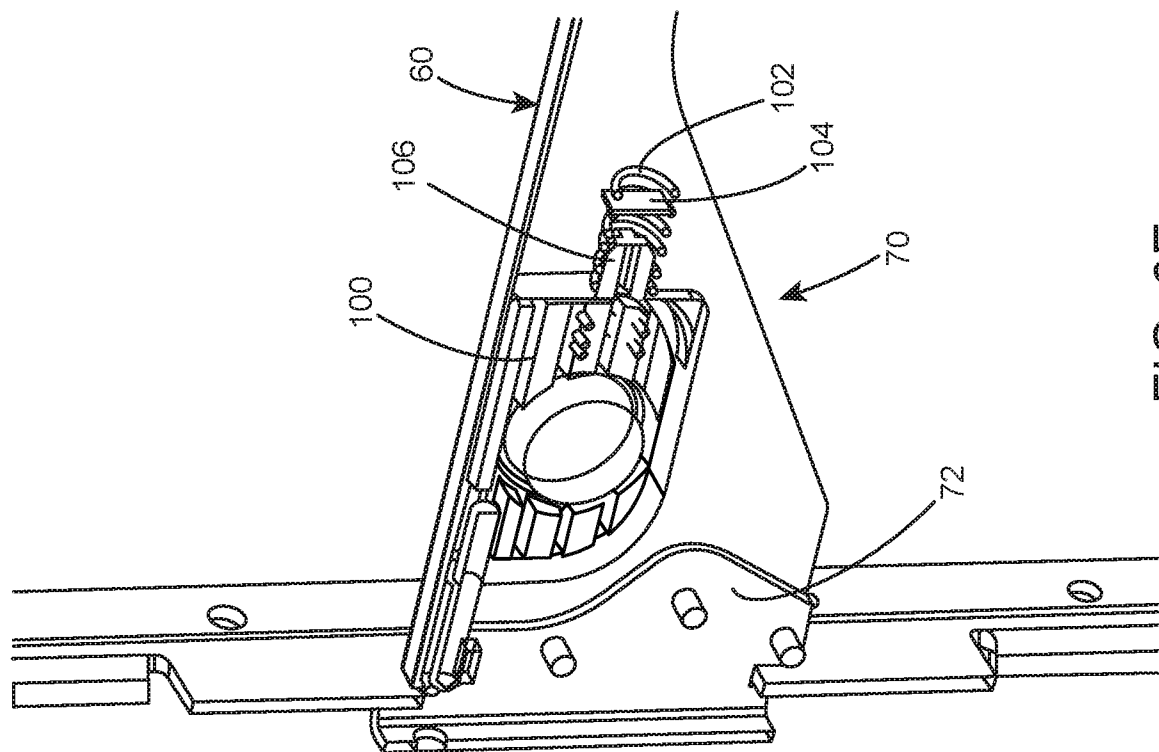


FIG. 6E

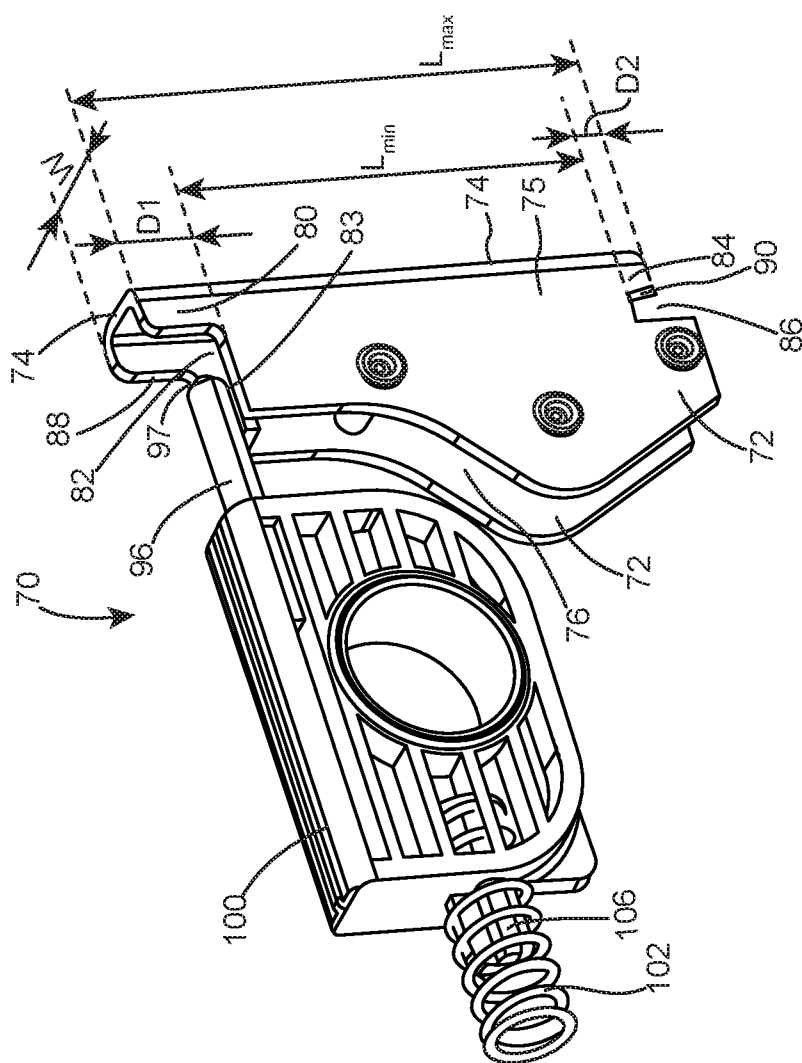


FIG. 6F

11/28

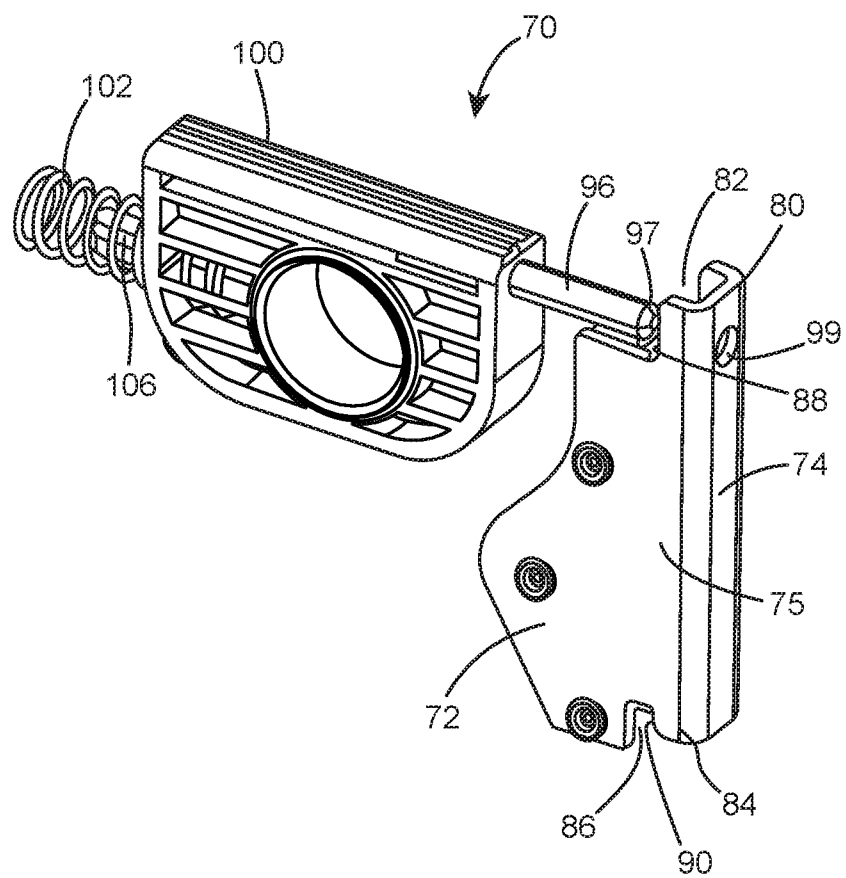


FIG. 6G

12/28

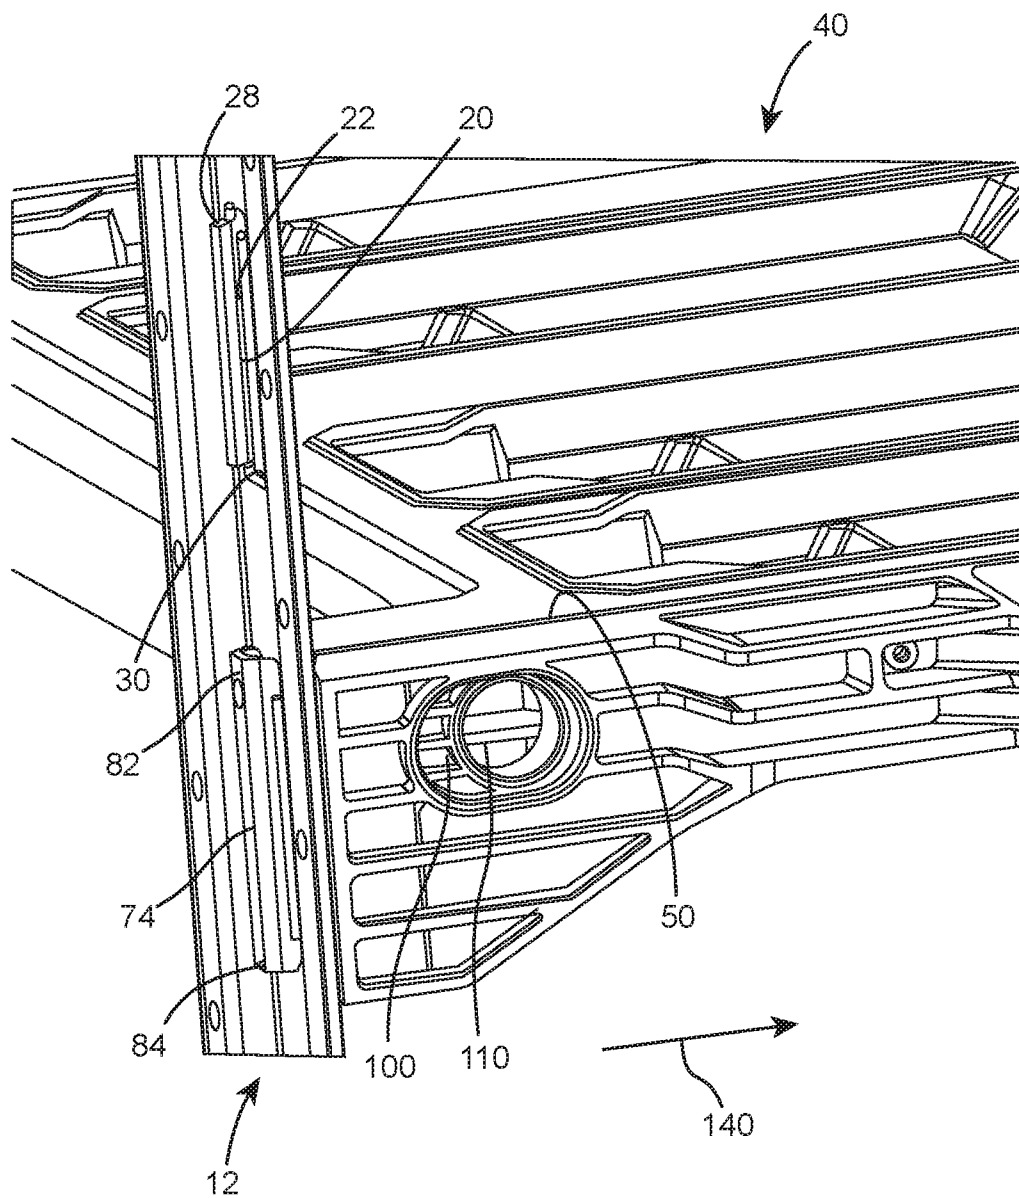


FIG. 7A

13/28



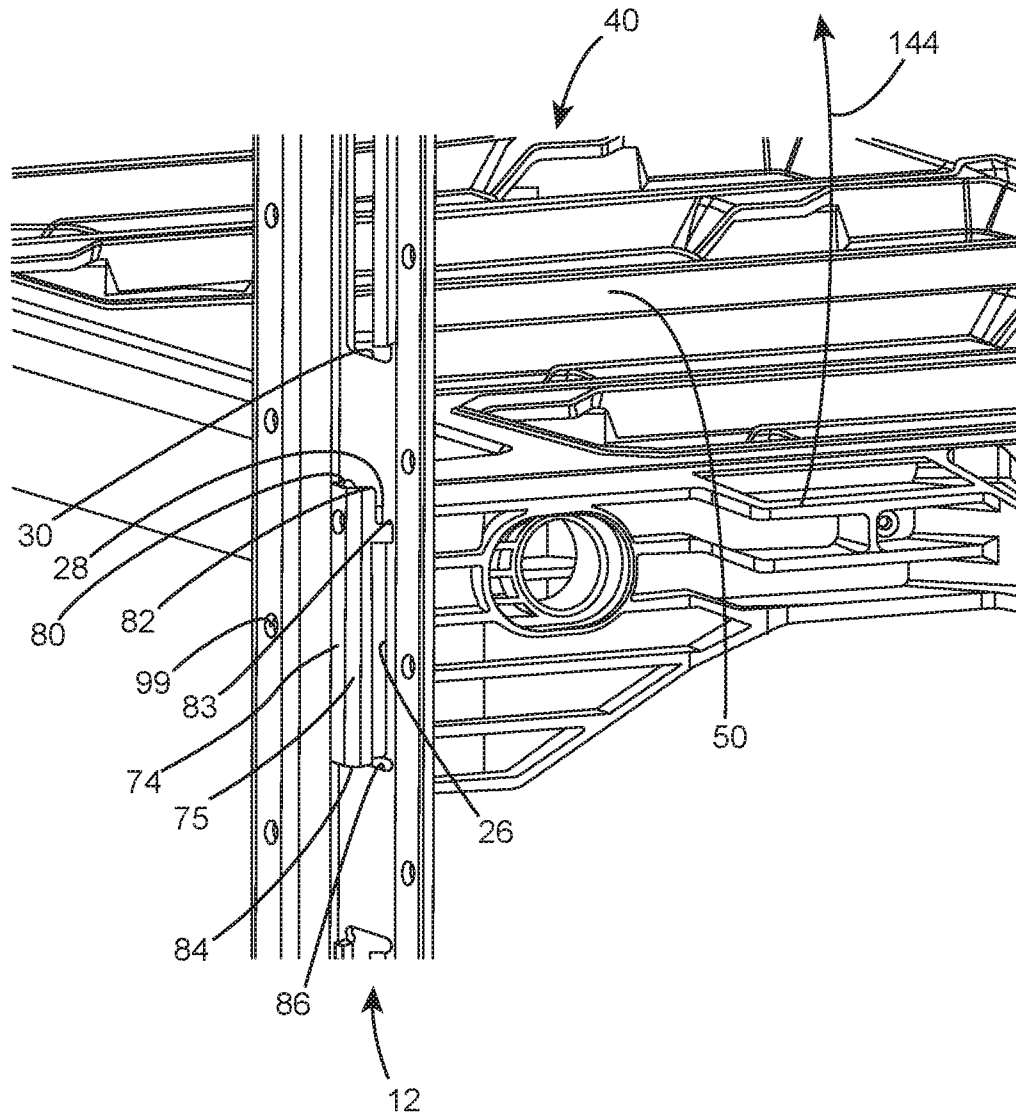


FIG. 7B

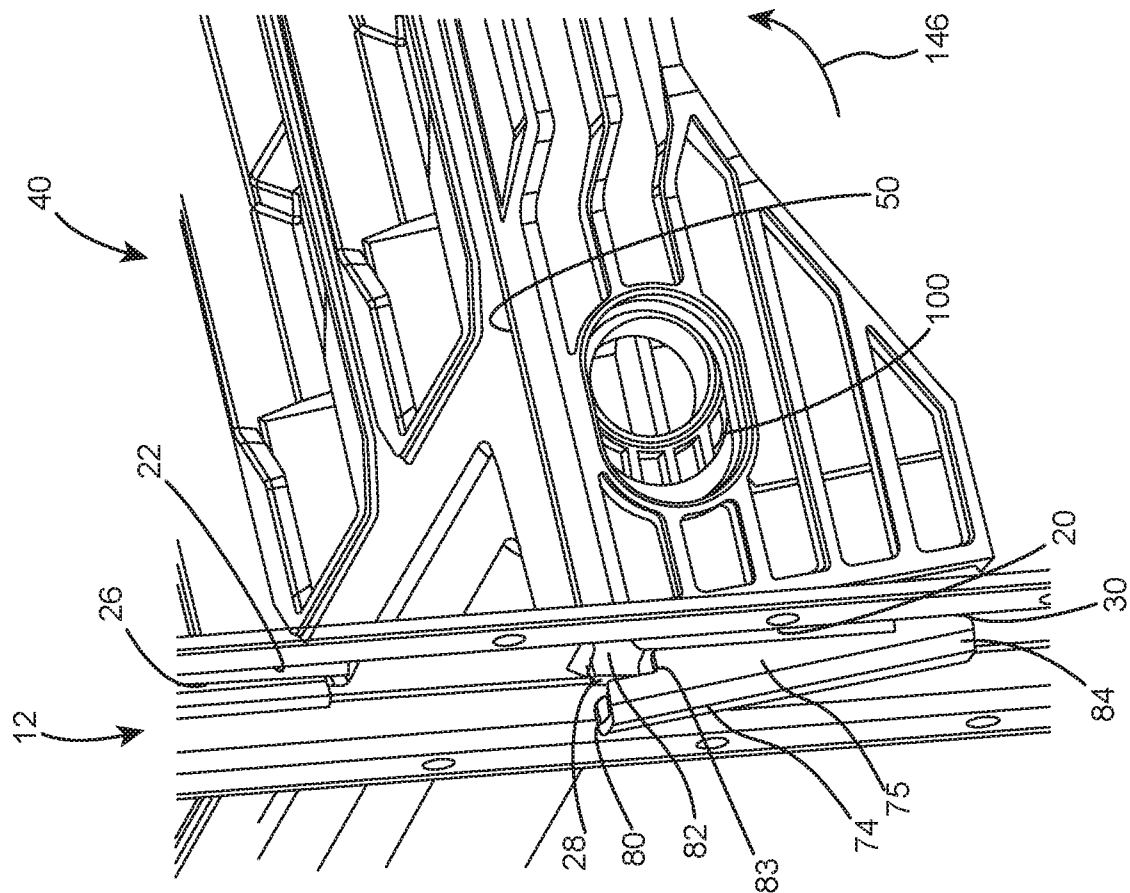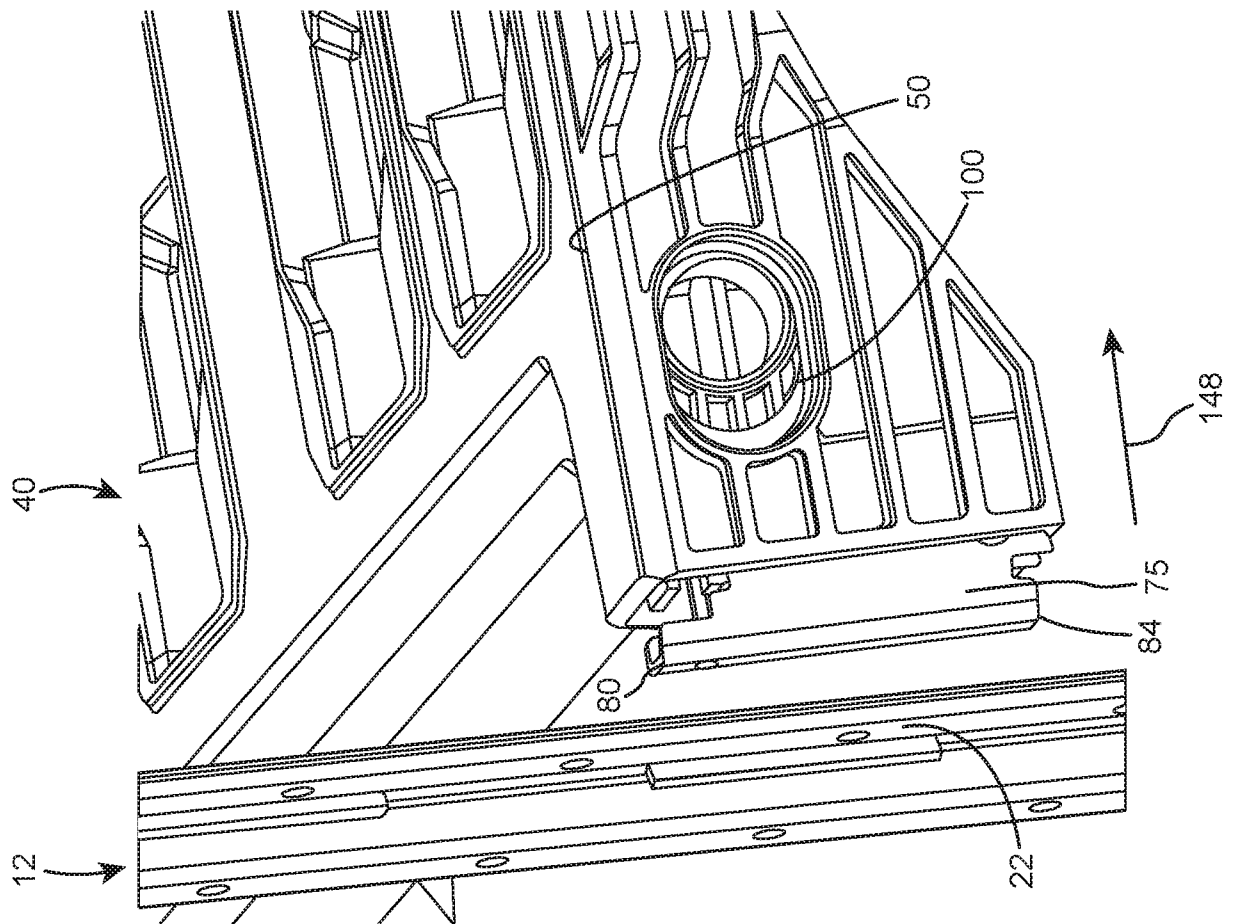

15/28

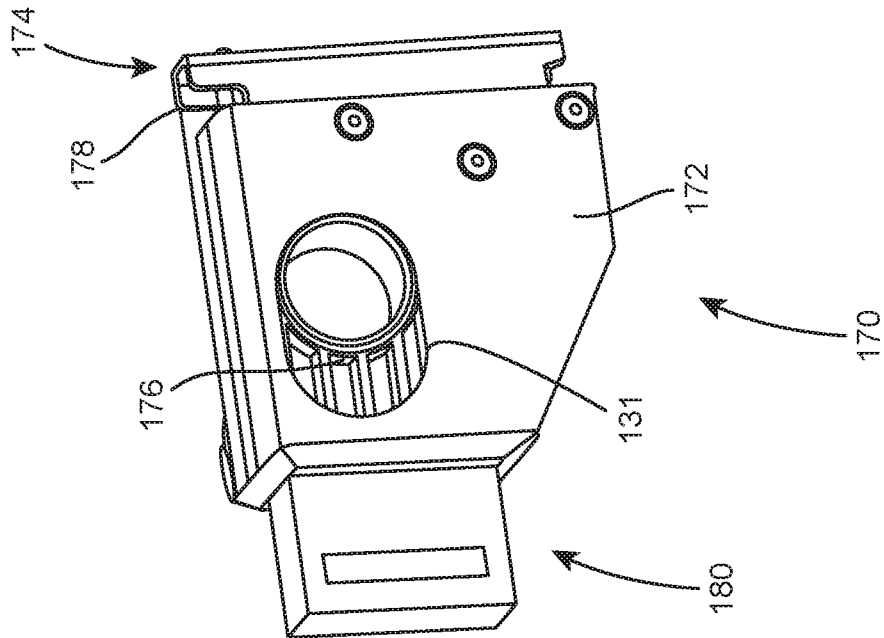


FIG. 8B

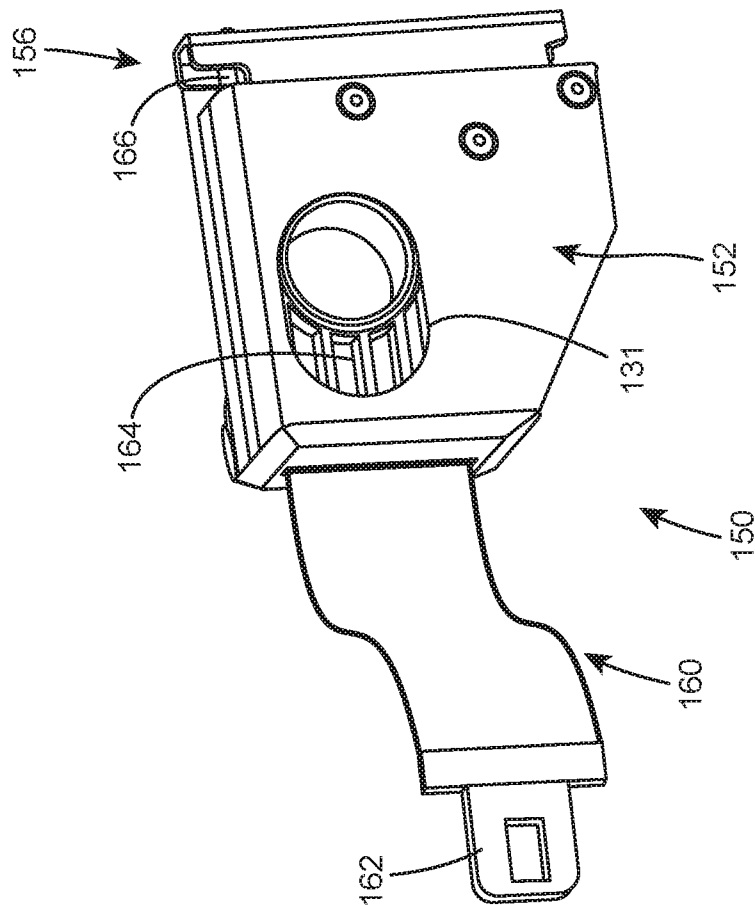


FIG. 8A

16/28

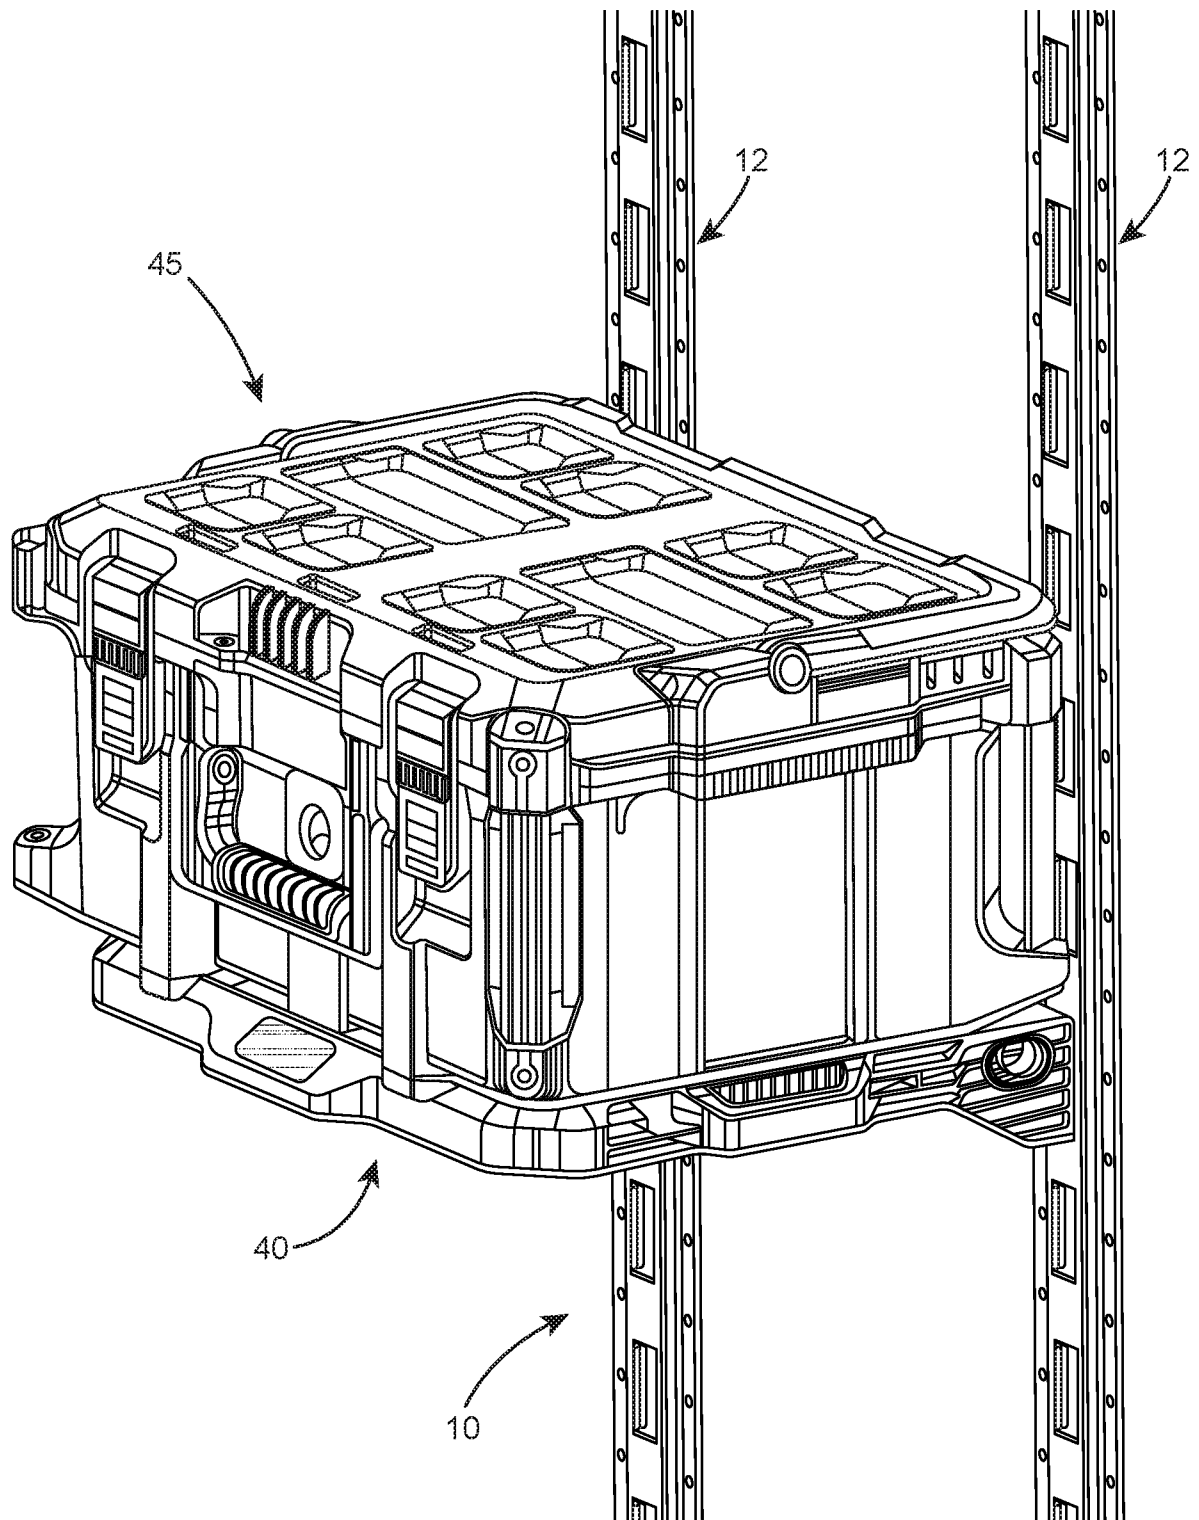


FIG. 9

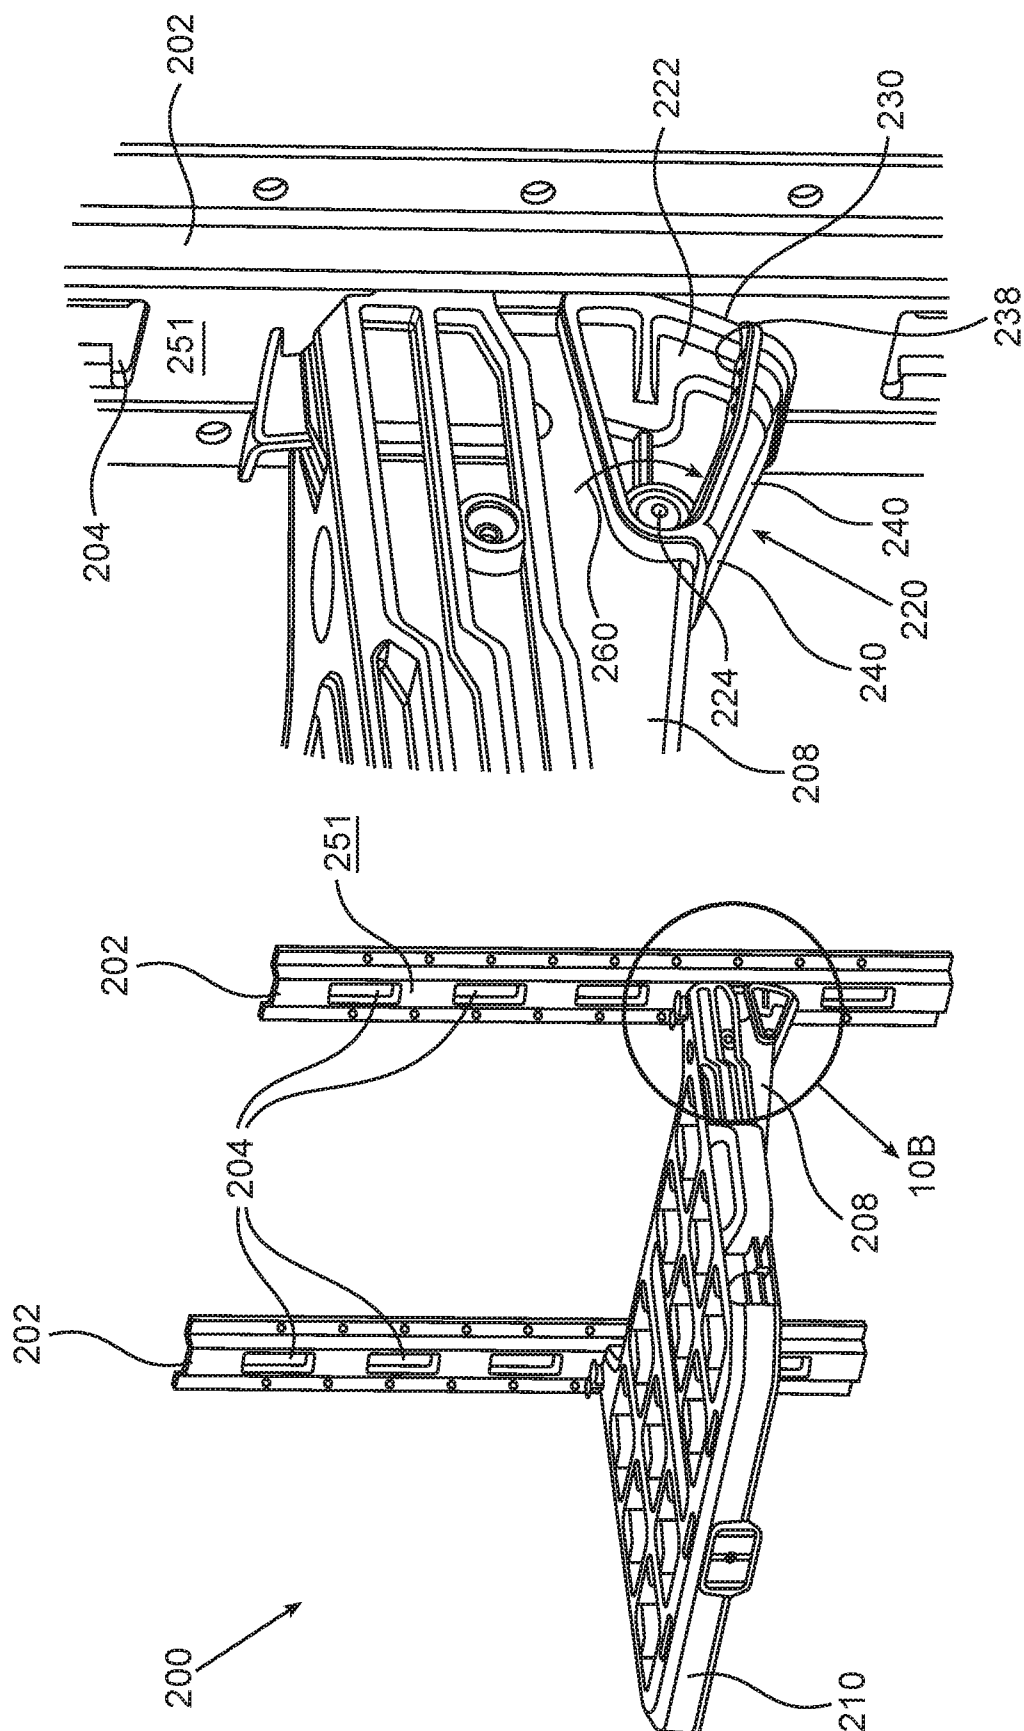


Fig. 10B

Fig. 10A

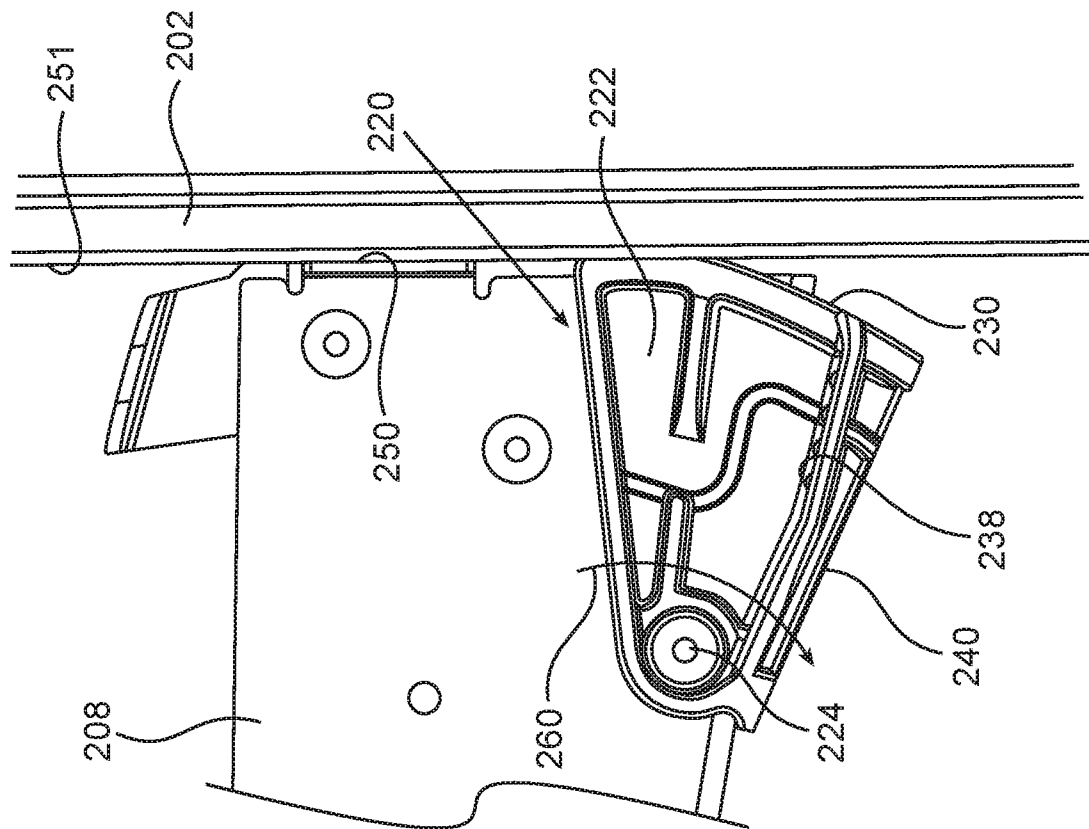


Fig. 10D

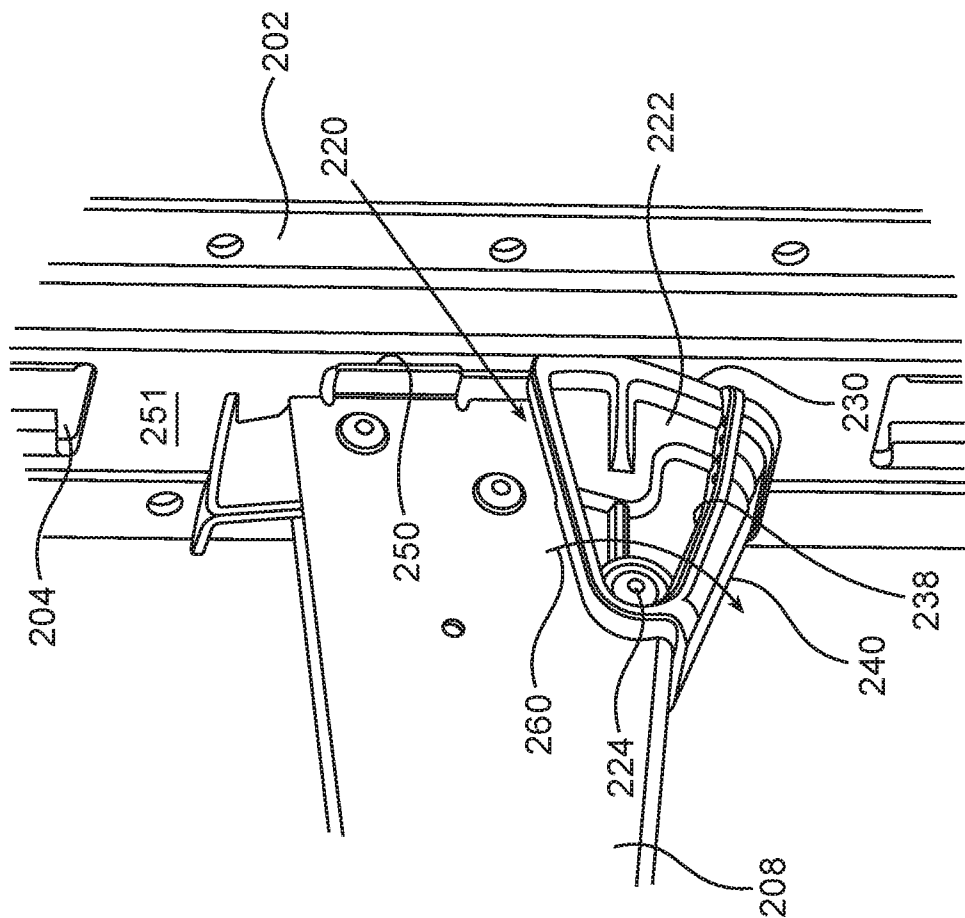


Fig. 10C

19/28

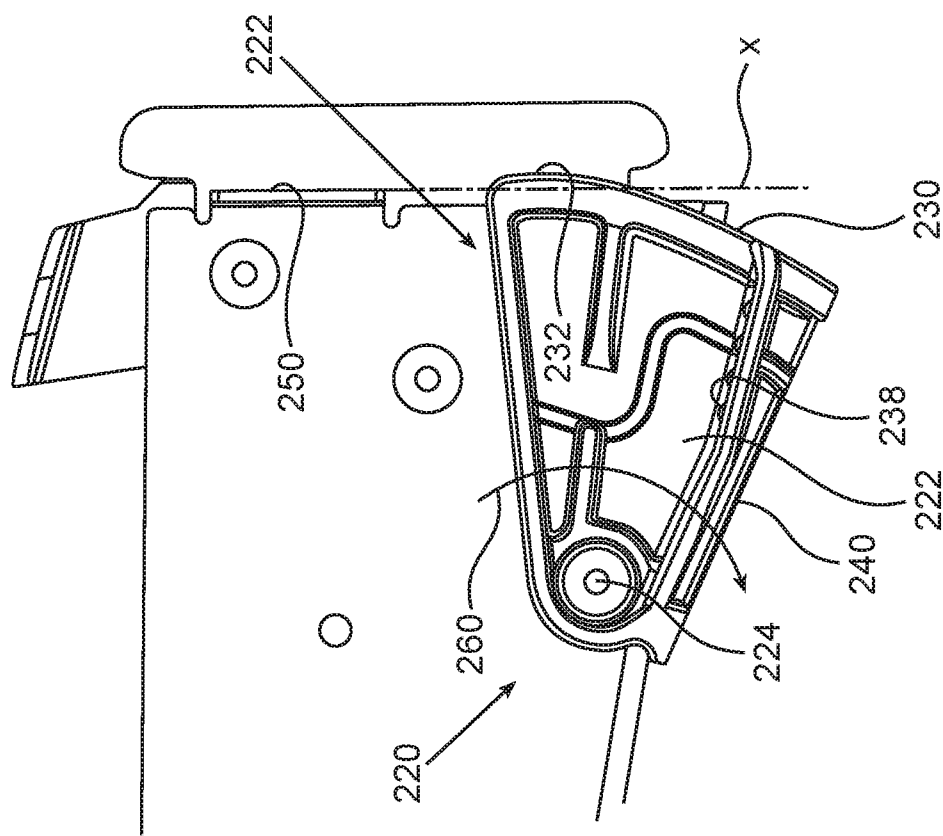


Fig. 10F

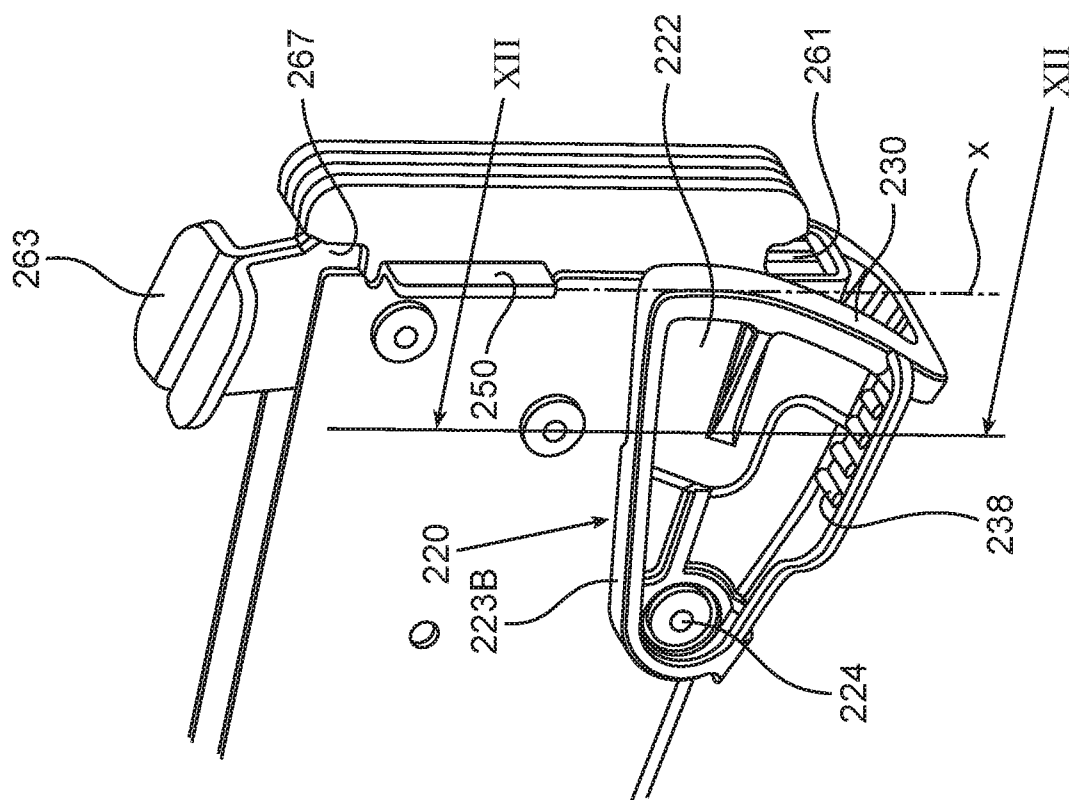


Fig. 10E

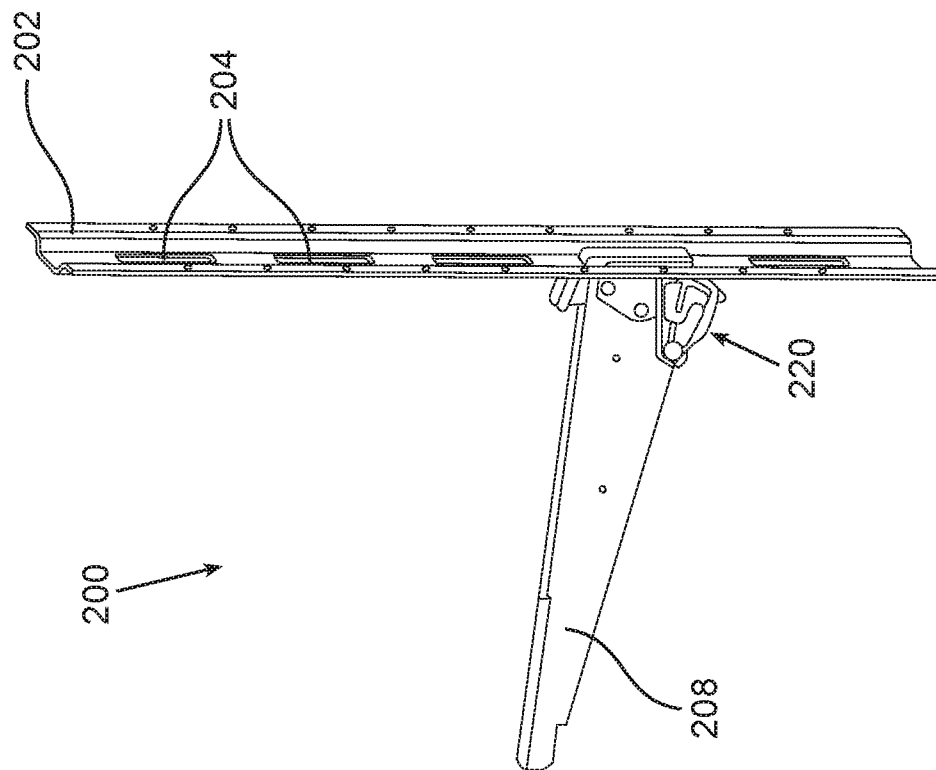


Fig. 10G

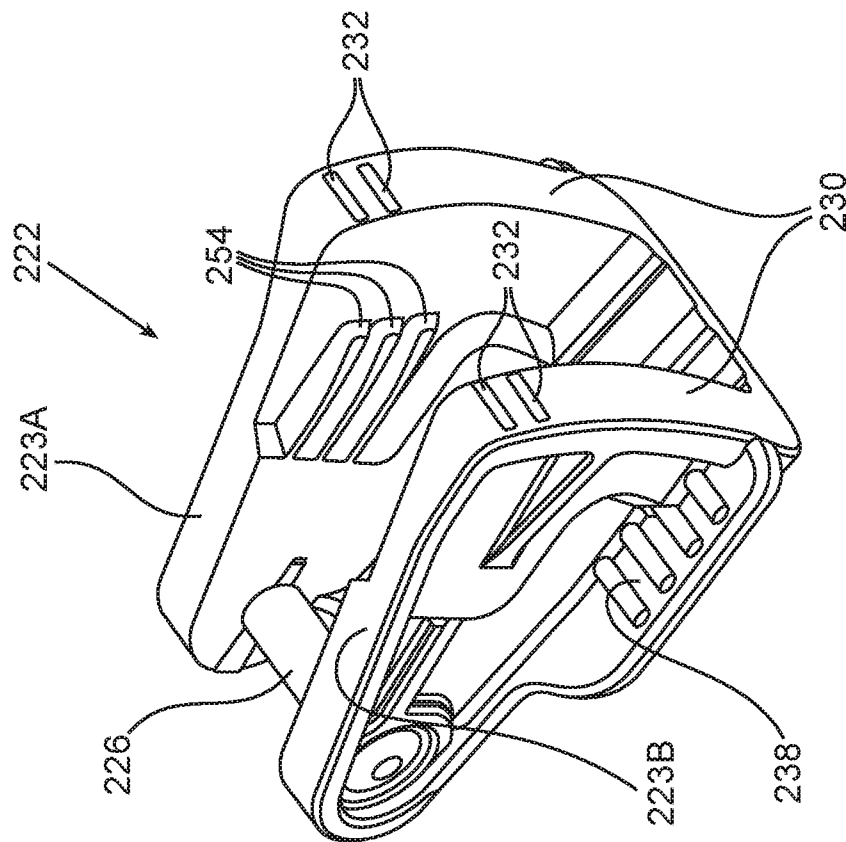


Fig. 11B

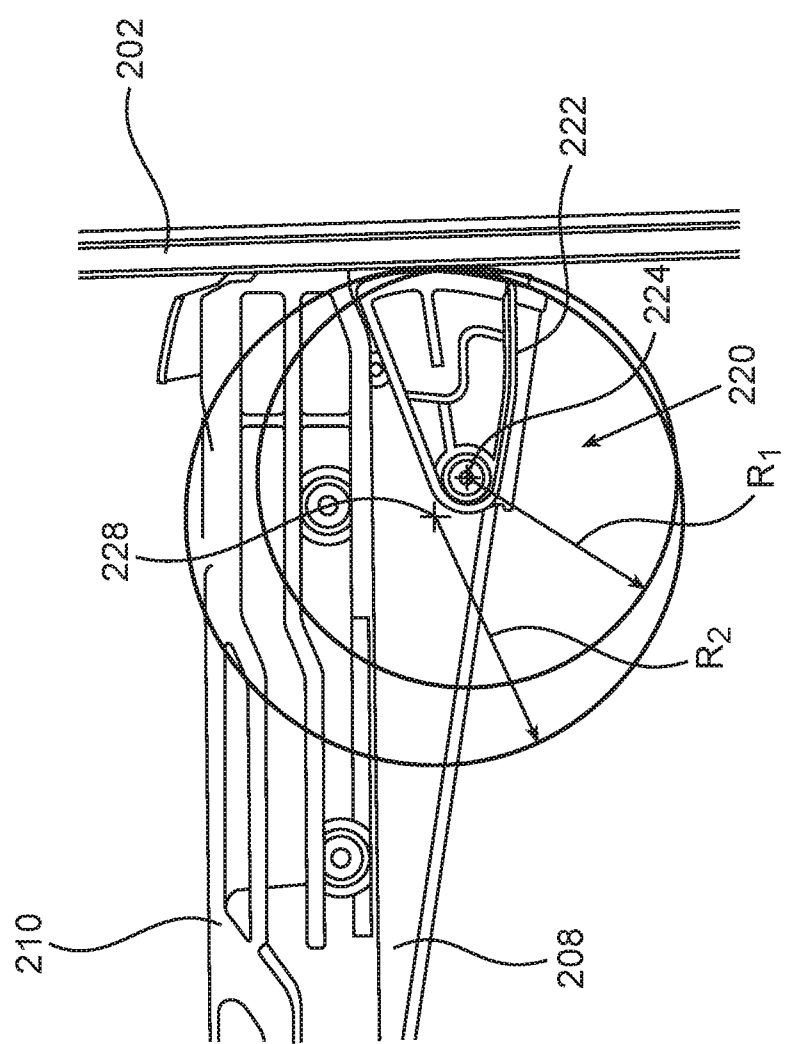


Fig. 11A

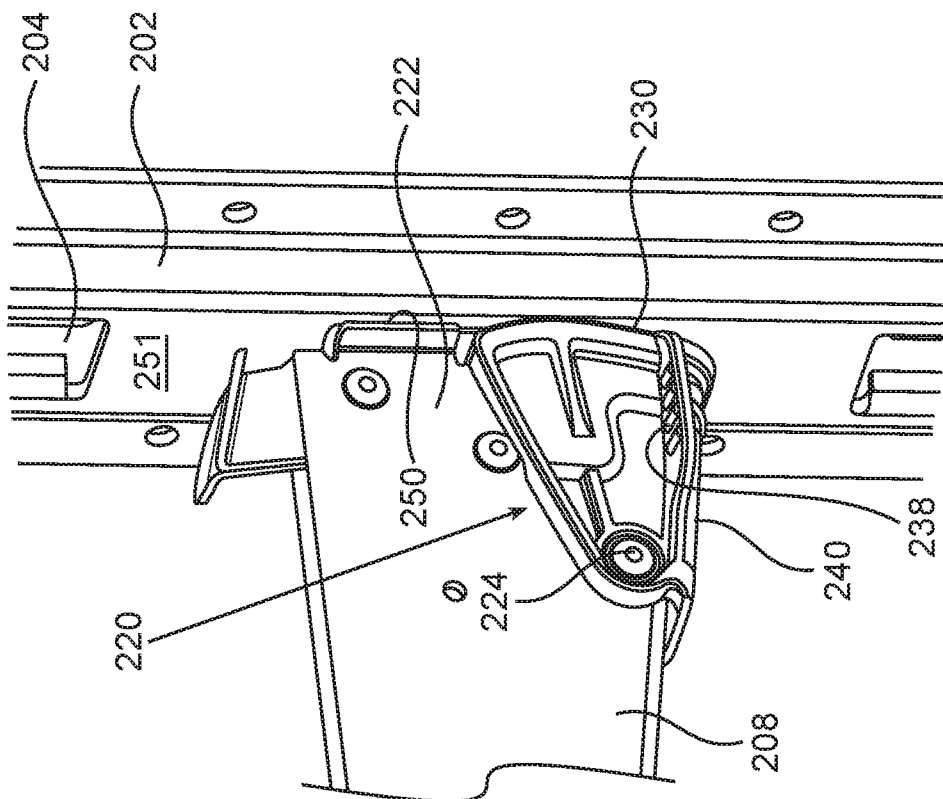


Fig. 13A

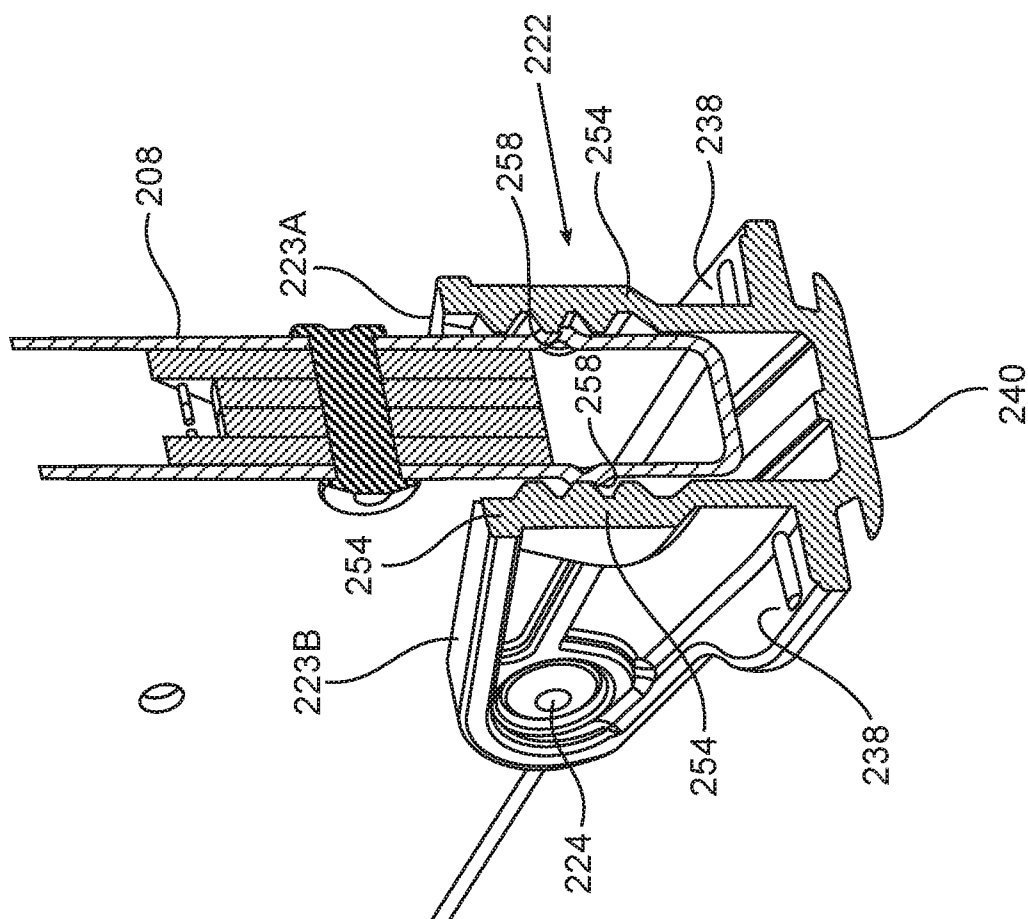


Fig. 12

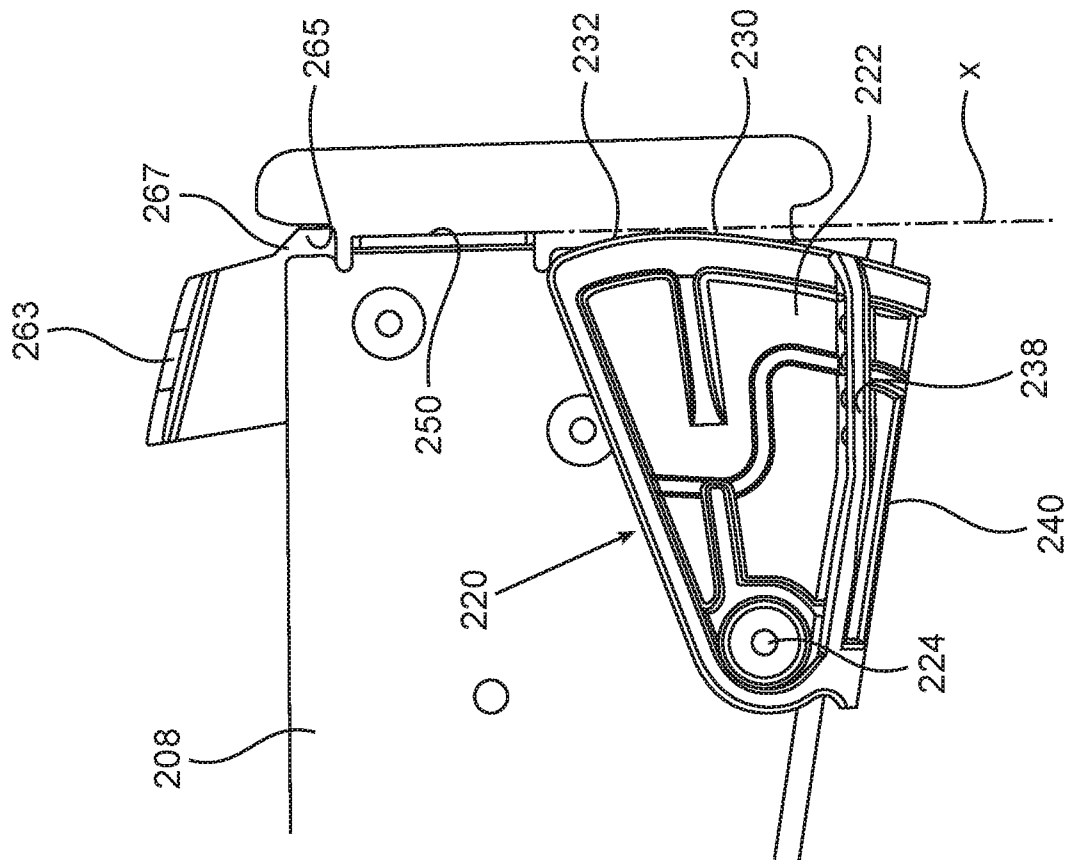


Fig. 13C

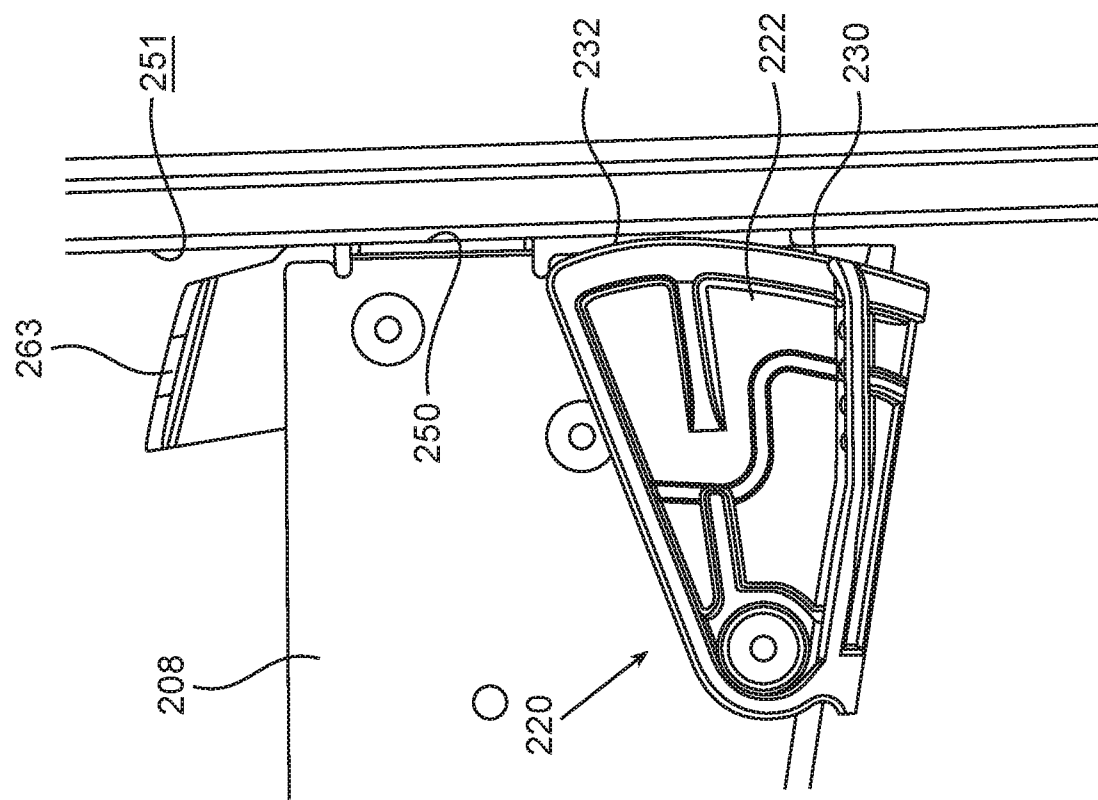


Fig. 13B

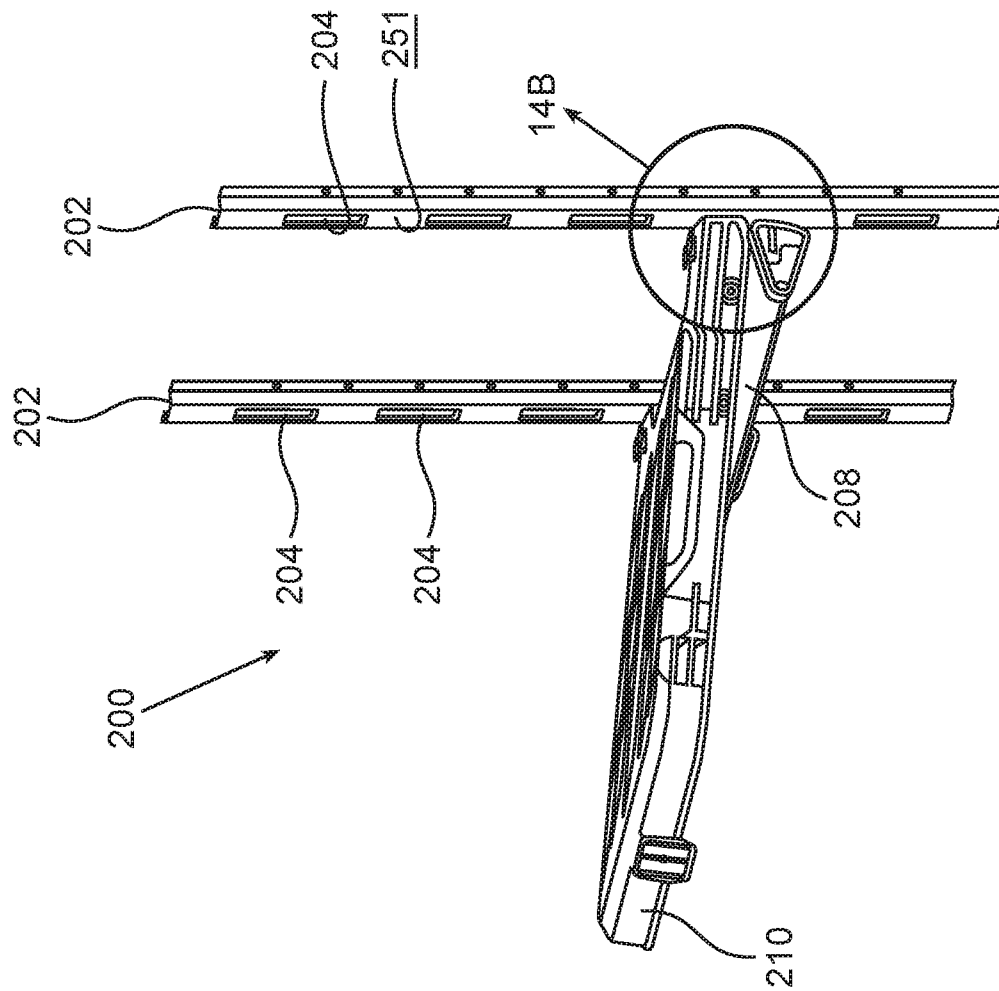


Fig. 14A

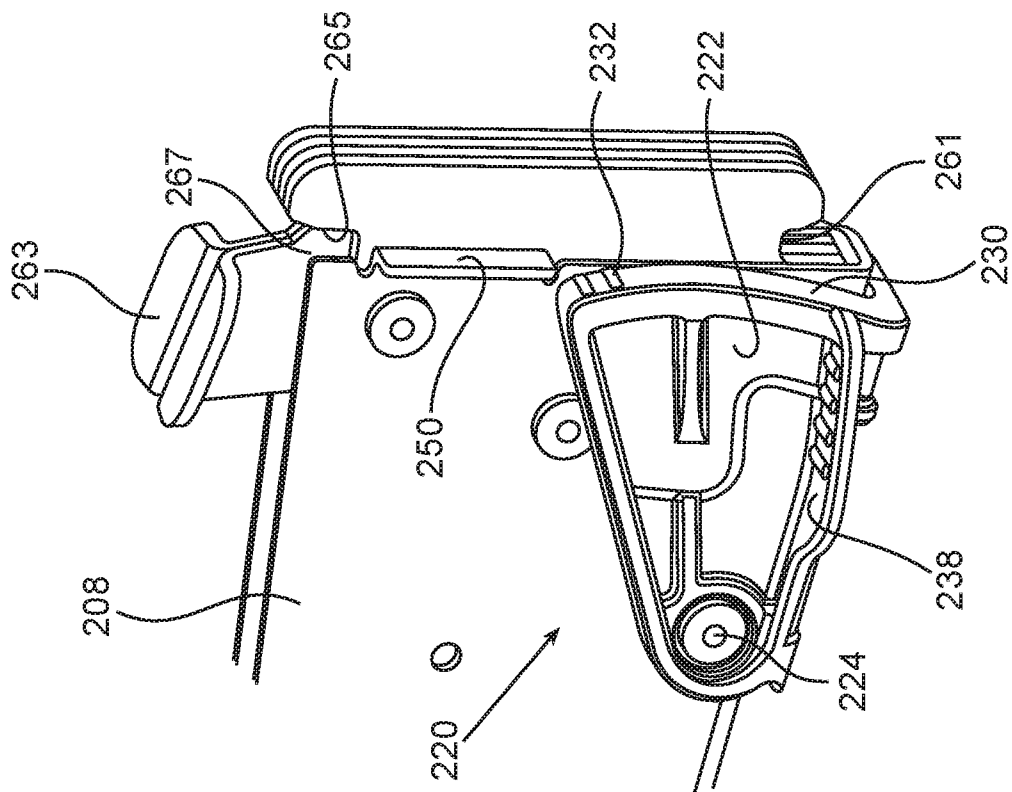


Fig. 13D

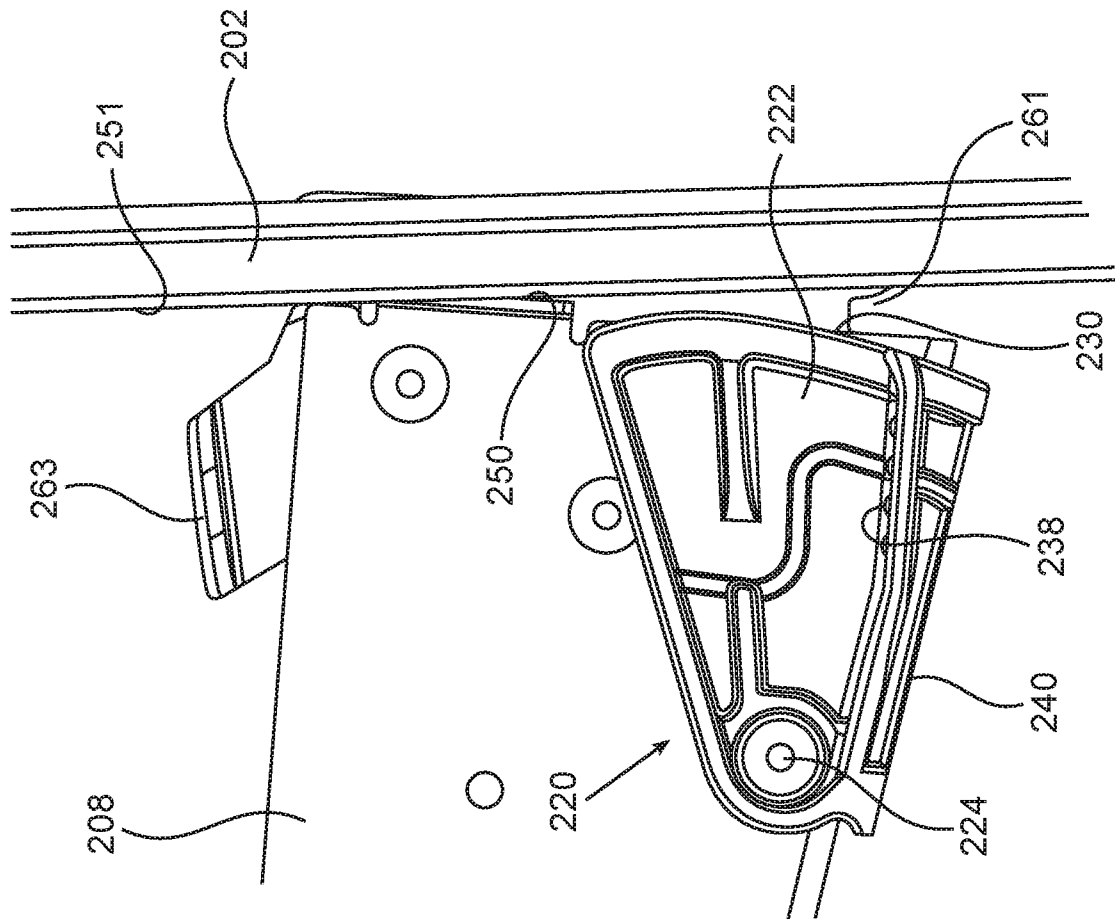


Fig. 14C

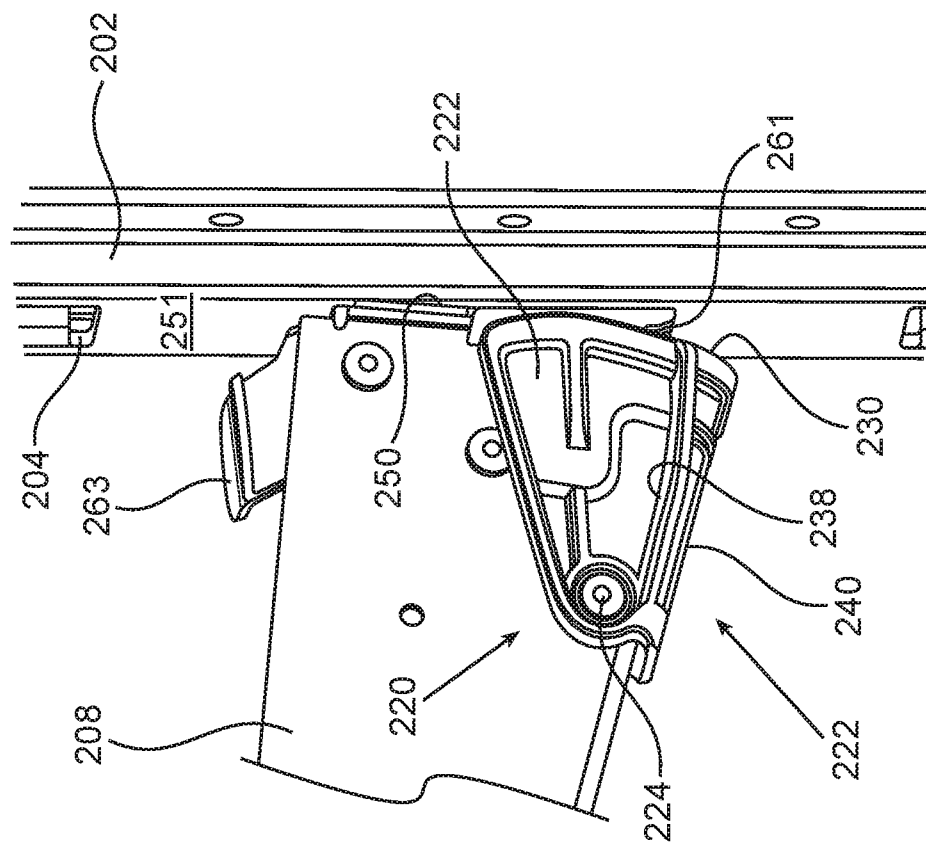


Fig. 14B

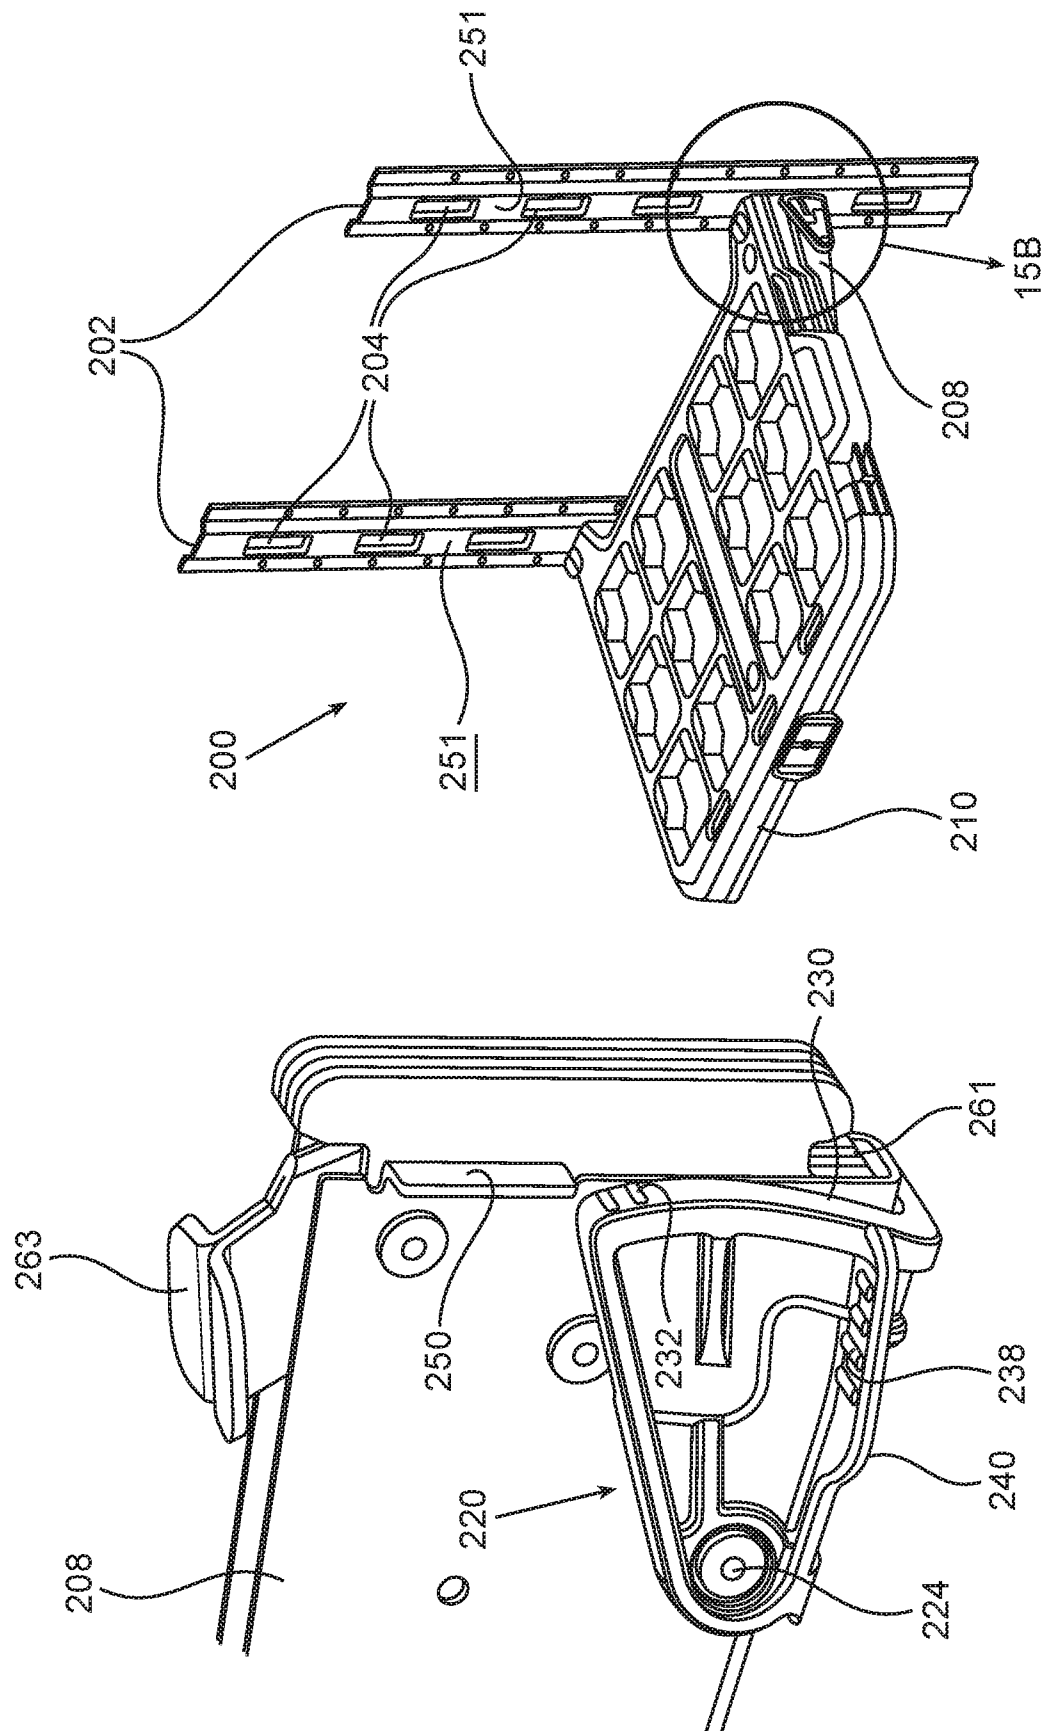


Fig. 15A

Fig. 14D

27/28

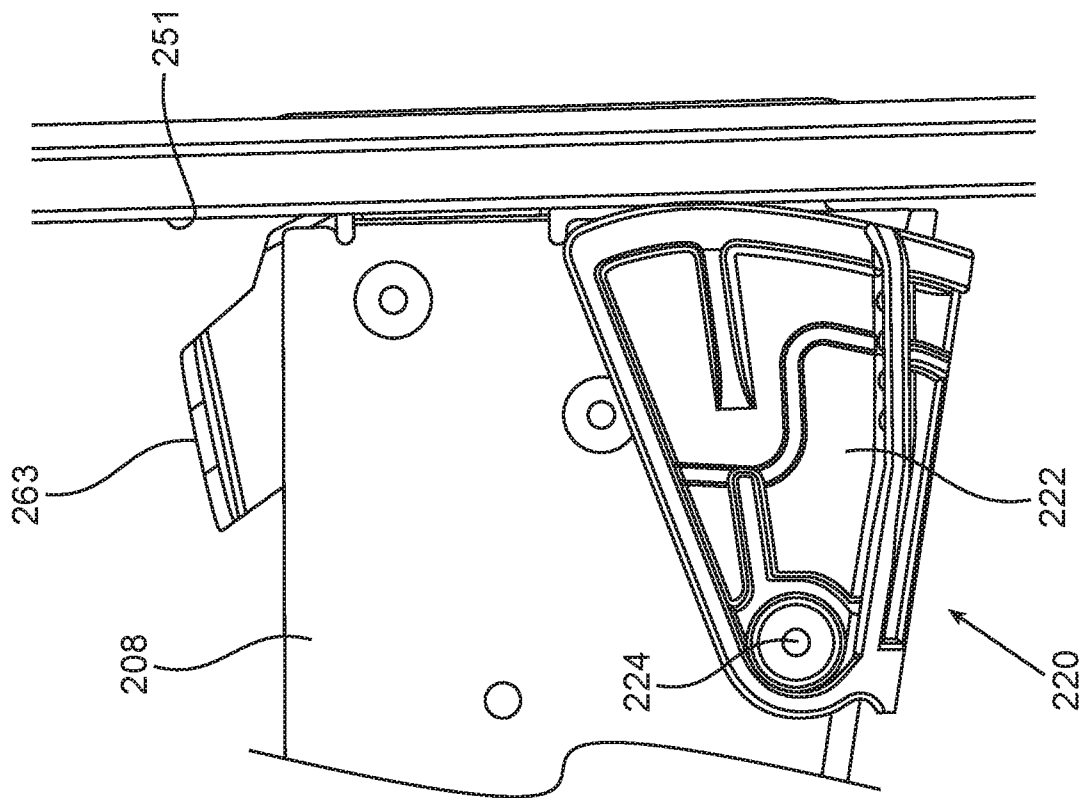


Fig. 15C

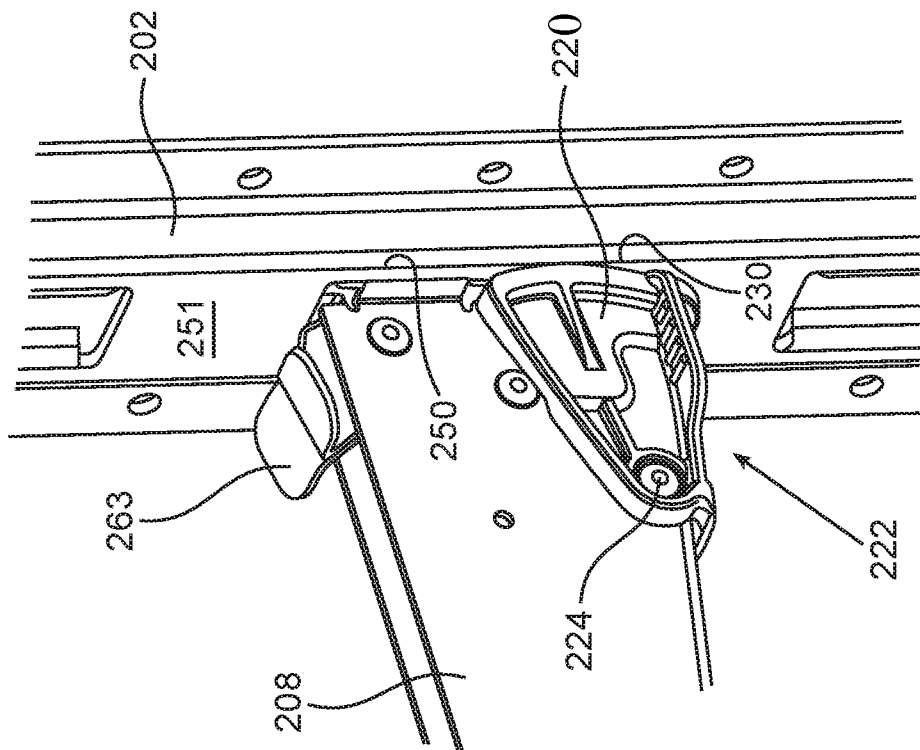


Fig. 15B

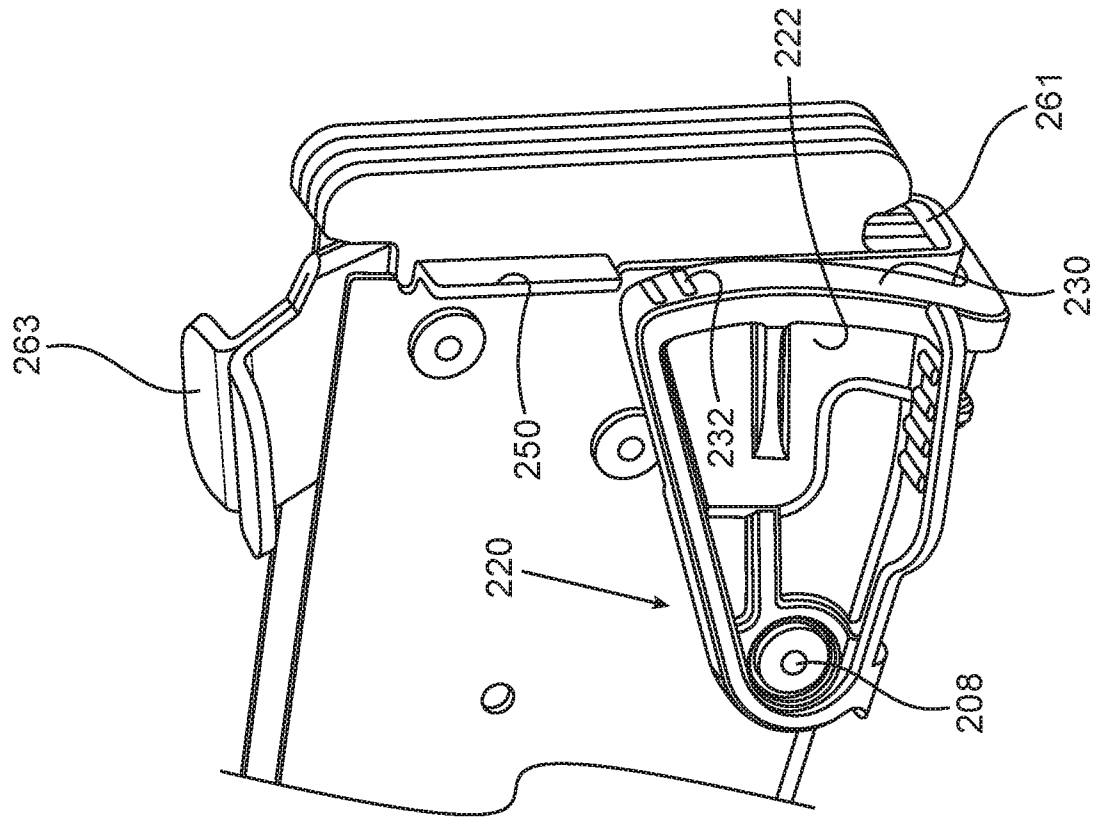


Fig. 15E

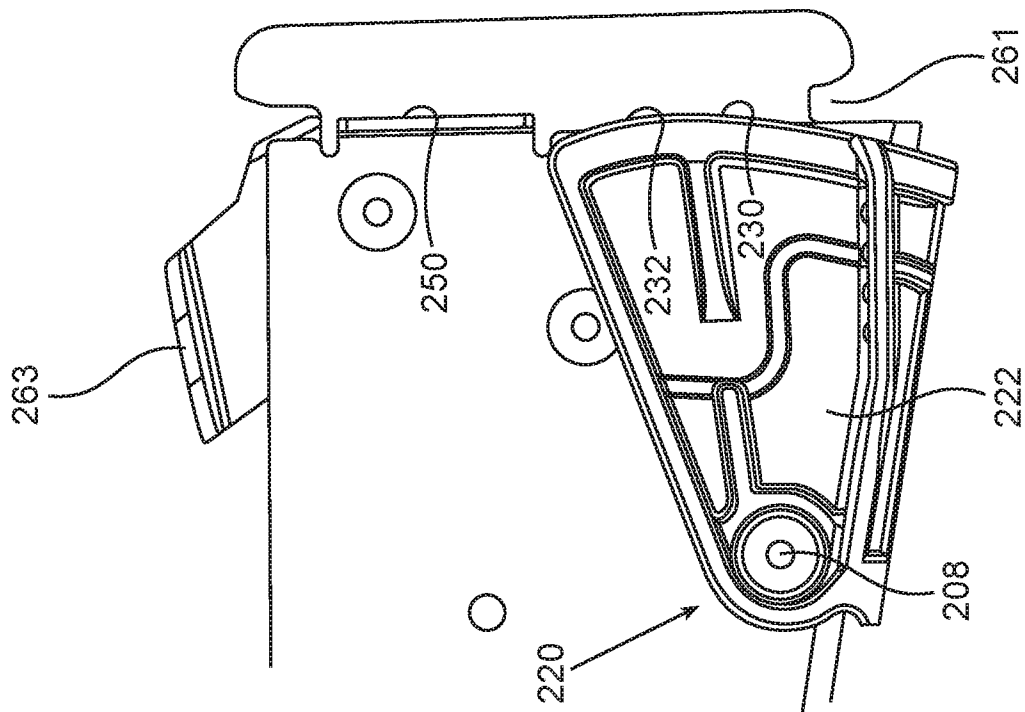


Fig. 15D

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2020/050433

A. CLASSIFICATION OF SUBJECT MATTER IPC (20200101) H05K 7/14, A47B 96/02, A47B 57/42, A47B 57/40, F16M 13/02 CPC (20190101) H05K 7/14, A47B 96/028, A47B 57/425, A47B 57/408, F16M 13/02 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC (20200101) H05K 7/14, A47B 96/02, A47B 57/42, A47B 57/40, F16M 13/02 CPC (20190101) H05K 7/14, A47B 96/028, A47B 57/425, A47B 57/408, F16M 13/02 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Databases consulted: Esp@cenet, Google Patents, Orbit		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2013146551 A1 ELECTROLUX HOME PROD INC. 13 Jun 2013 (2013/06/13) The whole document	1-26
A	US 2011174939 A1 PARTS EXPRESS INTERNATIONAL INC. 21 Jul 2013 (2013/07/21) The whole document	27,28
A	US 20090236482 A1 SS3 STORAGE SYSTEMS L.L.C 24 Sep 2009 (2009/09/24) The whole document	1-26
A	US 20180153312 A1 BUCK JAMES; GANNON GREG; POLVERE DENNIS; KITELEY ADAM P 07 Jun 2018 (2018/06/07) The whole document	1-26
A	US 5538213 A BROWN OFFICE SYSTEMS INC. 23 Jul 1996 (1996/07/23) The whole document	1-26
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 19 Jun 2020		Date of mailing of the international search report 21 Jun 2020
Name and mailing address of the ISA: Israel Patent Office Technology Park, Bldg.5, Malcha, Jerusalem, 9695101, Israel Email address: pctoffice@justice.gov.il		Authorized officer BITTON Oren Telephone No. 972-73-3927228

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2020/050433

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 0711098 D0 PROTREND CO LTD. 10 Dec 2008 (2008/12/10) The whole document	1-26
A	GB 2110076 A OSTLING BERNT; JOHANSSON PER OLOF 15 Jun 1983 (1983/06/15) The whole document	27,28
A	US 20130068903 A1 PEERLESS IND INC?[US]; PEERLESS IND INC. 21 Mar 2013 (2013/03/21) The whole document	27,28

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2020/050433

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

See extra sheet.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2020/050433

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet):

* This International Searching Authority found multiple inventions in this international application, as follows:

Invention/s 1 A coupling member comprises a locking portion, Claim/s 1-26

said side walls comprise a first locking lug with first locking recess, and a second locking lug with second locking recess, said first locking recess is deeper than said second locking recess; wherein the coupling member is further configured with an obstructing plunger, at which the plunger at least partially projects into the first locking recess, and an unlocked position at which the plunger is retracted into the space and out of the first locking recess.

Invention/s 2 A tolerance cancelation mechanism comprising a fastener member pivotally articulated at a pivot point to a portion of a wall coupling member, Claim/s 27,28

wherein the fastener member is pivotable between at least one locked position at which a locking portion of the arc surface extends beyond a proximal bearing wall portion, and an unlocked position at which the locking portion does not exceed said proximal wall portion.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IL2020/050433

Patent document cited search report			Publication date	Patent family member(s)			Publication Date
US	2013146551	A1	13 Jun 2013	US	2013146551	A1	13 Jun 2013
				US	8881660	B2	11 Nov 2014
				AU	2012347415	A1	26 Jun 2014
				AU	2012347415	B2	18 May 2017
				BR	112014013850	A2	13 Jun 2017
				CN	104768423	A	08 Jul 2015
				CN	104768423	B	04 Aug 2017
				EP	2787865	A2	15 Oct 2014
				KR	20140108673	A	12 Sep 2014
				RU	2014127887	A	10 Feb 2016
				WO	2013086495	A2	13 Jun 2013
				WO	2013086495	A3	26 Mar 2015
US	2011174939	A1	21 Jul 2013	US	2011174939	A1	21 Jul 2011
				US	8235341	B2	07 Aug 2012
US	20090236482	A1	24 Sep 2009	NONE			
US	20180153312	A1	07 Jun 2018	NONE			
US	5538213	A	23 Jul 1996	US	5538213	A	23 Jul 1996
GB	0711098	D0	10 Dec 2008	GB	0711098	D0	18 Jul 2007
				GB	2449934	A	10 Dec 2008
				GB	2449934	B	31 Aug 2011
GB	2110076	A	15 Jun 1983	GB	2110076	A	15 Jun 1983
				GB	2110076	B	11 Sep 1985
				DE	3242544	A1	09 Jun 1983
				FR	2517240	A1	03 Jun 1983

International application No.
PCT/IL2020/050433

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
		SE 8107083 A	28 May 1983
		SE 441254 B	23 Sep 1985
US 20130068903 A1	21 Mar 2013	NONE	