



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : C08F 297/08, C09J 153/00	A1	(11) International Publication Number: WO 94/21700 (43) International Publication Date: 29 September 1994 (29.09.94)
(21) International Application Number: PCT/US94/03060 (22) International Filing Date: 21 March 1994 (21.03.94) (30) Priority Data: 08/035,021 22 March 1993 (22.03.93) US (71) Applicant: EXXON CHEMICAL PATENTS INC. [US/US]; 5200 Bayway Drive, Baytown, TX 77520 (US). (72) Inventors: TURNER, Howard, William; 303 Elder Glen, Webster, TX 77598 (US). HLATKY, Gregory, George; 1114 Indian Autumn, Houston, TX 77062 (US). YANG, Henry, Wu-Hsiang; 4818 River Hill Drive, Kingwood, TX 77522 (US). GADKARI, Avinash, Chandrakant; 696 Pinelock, #1708, Webster, TX 77598 (US). LICCIARDI, Gary, Frederick; 20003 Big Timber, Humble, TX 77346 (US). (74) Agents: BELL, Catherine, L.; Exxon Chemical Company, P.O. Box 2149, Baytown, TX 77522-2149 (US) et al.		(81) Designated States: CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: BLOCK COPOLYMERS FROM IONIC CATALYSTS (57) Abstract A process for the production of block copolymers of ethylene and an α -olefin such as propylene by using an ionic catalyst system including a metallocene component and a component having a cation capable of donating a proton and a compatible non-coordinating anion. Novel block copolymers are produced.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

APPLICATION FOR PATENT

Title: BLOCK COPOLYMERS FROM IONIC CATALYSTS

5

SPECIFICATIONCross-Reference to Related Applications

10 This application is a Continuation-In-Part of
Copinging USSN 477,791 filed February 9, 1990 which is a
Continuation-In-Part of copending U.S. Patent Application
Nos. 133,052 filed December 21, 1987 and 133,480 filed
December 22, 1987. Copending U.S. Patent Application No.
15 133,052 is in turn a Continuation-In-Part of U.S. Patent
Application No. 011,471 filed January 30, 1987.
Copinging U.S. Patent Application No. 133,480 is in turn
a Continuation-In-Part of U.S. Patent Application No.
008,800 filed January 30, 1987 all of which are
20 incorporated by reference. This application is also
related to copending USSN 07/917,008.

FIELD OF THE INVENTION

25 This invention relates to a method for preparing
block and tapered copolymers by polymerizing ethylene and
other olefins in the presence of an activated
cyclopentadienyl transition metal catalyst system. More
particularly, this invention relates to a process for the
30 production of multiblock and tapered copolymers of
ethylenically unsaturated monomers. The invention also
related to the multiblock and tapered copolymers
produced.

- 2 -

BACKGROUND OF THE INVENTION

Block copolymers are well known and have been used commercially as components in adhesives, as melt processable rubbers, impact resistant thermoplastics, and as compatibilizers, or "surfactants", for emulsifying polymer-polymer blends.

A block copolymer is created when two or more polymeric segments, or blocks, of different chemical composition are covalently bonded in an end-to-end fashion. Block copolymers have certain advantages over blends. Firstly, the segments are covalently bonded to each other, thereby eliminating the interface problem. Secondly, block copolymers can be used to strengthen blends of immiscible polymers by serving as "emulsifiers," which encourage physical connections between the phase, and thus improve the interfacial adhesion and load transferring capability of the components.

While a wide variety of block copolymer architectures are possible, most block copolymers of interest involve the covalent bonding of hard plastic segments which are crystalline or glassy, to elastomeric blocks forming thermoplastic elastomers. Other block copolymers, such as rubber-rubber, glass-glass, and glass-crystalline block copolymers are also possible and may have commercial importance. Two common types of block copolymer structures are the diblock and triblock forms. However, multiblock copolymers, in which more than three segments are bonded together, are also desirable.

Block copolymers are similar to, yet distinct from, tapered polymers. In a tapered copolymer the composition of comonomer is gradually varied from one end of the polymer to the other. Tapered copolymers are

- 3 -

commercially used as viscosity modifiers, oil additives, thermoplastic elastomers, and impact-resistant plastics.

Block copolymers have been made by anionic polymerization routes. Butadiene-isoprene block copolymers have been synthesized using the sequential addition technique. In sequential addition, a certain amount of one of the monomers is contacted with the catalyst. Once the monomer has reacted to extinction, forming the first block, a certain amount of the second monomer species is introduced and allowed to react to form the second block. The process may be repeated as desired using the same or other anionically polymerizable monomers.

Likewise, olefin based block copolymers have not been successfully synthesized through coordination catalysis. Several difficulties arise in the use of known coordination catalysts for the block copolymerization of olefins. Among those are the fact that conventional catalysts are typically multi-sited, and a significant fraction of the active sites are unstable. This leads to random chain initiation and termination which, in turn, lowers the theoretical block copolymer yield. What is desired, and what practice of this invention provides, is a catalyst system with well-characterized structure and reactivity which has a single active site. The system should have well-defined and stable polymerization kinetics and be free of aluminum alkyls or other chain transfer agents.

SUMMARY OF THE INVENTION

The invention comprises a process for the production of novel block copolymers of ethylene with an α -olefin and the polymers obtained therefrom. The process includes sequentially contacting ethylene with an α -

- 4 -

olefin monomer in a suitable solvent at 0°C in the presence of an activated cyclopentadienyl catalyst system to produce a block or tapered block copolymer. The activated catalyst will polymerize α -olefins to form tapered polymers and multiblock polymers such as di- and tri-block homopolymers and copolymers of ethylene and propylene with one or more other alpha-olefins.

BRIEF DESCRIPTION OF THE DRAWING

10

Figure 1 is a graph of the percent insolubles vs. polymerization time in minutes.

Figure 2 is graph of the tensile strength of EP/PP block copolymers at 100 and 120 degrees C.

Figure 3 is a graph of the effect of EP block polymerization time on blocking efficiency.

DESCRIPTION OF PREFERRED EMBODIMENTS

The invention provides (1) novel di, tri-, and multi-block copolymers and tapered copolymers of ethylene, 1-olefins, diolefins, cyclic olefins, acetylenes and other unsaturated monomers; and (2) the processes for polymerizing said block copolymers.

Activated Catalyst System - General System

The process of this invention is practiced with that class of catalyst referred to, disclosed, and described in U.S. Patents 5,055,438; 5,057,475; 5,096,867; 5,017,714; 5,153,157; copending USSN's 542,236 filed June 22, 1990; 468,382 filed May 21, 1991; 885,170 filed May 18, 1992; 737,611 filed July 19, 1991; 926,006 filed August 5, 1992; 07/133,052 and 07/133,480 and EPA's 277,003, 277,004, published June 3, 1988; EPA 129,368

- 5 -

published December 22, 1984, EPA 520,732 published
December 30, 1992 all of which are incorporated by
reference herein. The activated catalyst is prepared by
combining at least two components. The first of these is
5 a mono or bis(cyclopentadienyl) derivative of a Group IV-
B metal compound containing at least one ligand which
will combine with the second activator component or at
least a portion thereof such as a cation portion thereof.
The second component may be an alumoxane or a
10 noncoordinating anion.

Choice of Group IV Metal Component

In general, most Group IVB metal components may be
15 combined with most activator components to produce an
active olefin polymerization catalyst.


To obtain block copolymer with a hard segment and a
soft segment, it is important to choose a catalyst
20 capable of producing both. For example, a chiral
activated catalyst will produce stereoregular polyolefins
while an achiral activated catalyst typically produces
non-stereoregular, even amorphous polyolefins. As an
example, a chiral cyclopentadienyl hafnium based catalyst
25 could be used to produce hard blocks of isotactic
polypropylene and at different reaction conditions the
same catalyst could then produce soft "elastomer" blocks
of EP.

30 Anionic coordination complexes containing
perfluorophenyl-, trifluoromethylphenyl-, or bis-
trifluoromethylphenyl rings are preferred. When the non-
coordinating anion contains a plurality of boron atoms,
more effective catalysts are obtained with activator
35 compounds containing larger anions.

Preferred Catalysts for the Production of Block and
Tapered Copolymers

5 Preferred catalyst systems for the production of
block copolymers are single-sited living catalysts.
Living catalysts are those systems in which chain
transfer is substantially nonexistent and the rate of
initiation is fast compared to propagation. Catalysts
10 which have finite chain transfer rates may also be useful
for the production of block and tapered copolymers if the
rate of propagation is fast relative to termination. It
is also important that the average chain lifetimes are
reasonably long (minutes to hours) in order to permit
15 adequate time for modifications of the reactor conditions
(e.g. changing monomer feed streams). While most
reasonably stable ionic catalysts described above will
under suitable conditions produce block and/or tapered
copolymers of nonpolar olefins, it is preferred that the
20 catalyst be: 1) thermally stable (recoverable as a single
organometallic complex), 2) versatile in terms of random
copolymer synthesis (i.e. capable of preparing HDPE, i-
PP, s-PP, EP-rubber, LLDPE etc.), 3) capable of producing
high molecular weight polymers at reasonable temperatures
25 and pressures, 4) high activity (fast propagation
catalysts) and 5) slow in chain termination reactions so
that few chains of polymer product are produced per hour
per site.

30 Preferred activated biscyclopentadienyl catalysts
are represented by the formulae:



- 7 -

wherein: M is titanium, zirconium or hafnium; (A-Cp) is either (Cp)(Cp*) or Cp-A'-Cp*; and Cp and Cp* are the same or different substituted or unsubstituted cyclopentadienyl radicals; A' is a covalent bridging group containing a Group IV-A element; L' is a neutral Lewis base; X₁ is a hydride radical, hydrocarbyl radical having from 1 to 20 carbon atoms, substituted-hydrocarbyl radical, wherein 1 or more of the hydrogen atoms are replaced with a halogen atom, having from 1 to 20 carbon atoms, or organo-metalloid radical comprising a Group IV-A element wherein each of the hydrocarbyl substituents contained in the organo portion of said organo-metalloid, independently, contain from 1 to 20 carbon atoms; X₃ is a hydride, halide, hydrocarbyl radical, a C₁ - C₂₀ hydrocarbyl radical wherein one or more of the hydrogen atoms is replaced by a halogen atoms, organometalloid radical wherein each hydrocarbyl substitution in the organo portion contains from 1 to 20 carbon atoms and the metal is a Group IVA metal and B' is a noncoordinating anion. In another preferred embodiment B' can be replaced with an alumoxane, preferably methylalumoxane. These catalysts are preferred catalysts for the production of block and tapered copolymers of ethylene, 1-olefins, dienes, cyclic olefins and other unsaturated monomers. Ionic catalysts of this form where M= Hf are the most preferred. Polymerizations using hafnium systems of this form under standard random copolymer conditions as described in our copending U.S. Patent Application No. 133,480 produce high molecular weight HDPE, LLDPE, a-PP, i-PP, s-PP, and EP-rubber at rates comparable to similar Zr-based catalysts. In another embodiment one of the Cp rings could be replaced by a heteroatom ligand as described in US 5,055,438, incorporated by reference above. Tapered and block copolymers containing the above segments can be produced using the appropriate hafnium ionic catalysts using the

techniques and process conditions set forth in the following sections.

Processes for the Production of Block and Tapered
Copolymers

5
10
15
Many procedures for modifying the reactor conditions and monomer feeds for the production of block copolymers have been developed and applied using conventional Ziegler-Natta catalysts. The processes include batch reactors and sequential additions techniques, series batch reactors, loop and tubular reactors, and fluidized bed reactors. A review of the processes and patents is given in chapter 4 of "Block Copolymers" [D. C. Allport and W. H. James; John Wiley and Sons, New York 1973]. In principle, the catalysts of this invention can be used in any of the processes described above for the production of well-defined block copolymers.

20
25
30
35
The most demanding process, that is the process which requires the longest chain lifetimes, is sequential addition. In the first step of the sequential addition process, the catalyst is placed in a well stirred batch reactor in a suitable solvent and first segment of the block copolymer is grown by adding a specific number of molar equivalents of monomer(s). The catalyst consumes all of the monomer(s) prior to addition of the second monomer(s) (a different set of monomers than in the first step). This procedure can be repeated to prepare multiblock copolymers. As an added step the polymerization vessel can be vacuumed free of substantially all leftover monomer or vented of monomer and/or purged with nitrogen or other suitable inert dry gases in between some or all of the monomer addition steps.

Sequential Addition Conditions: Solvent

Preferably, the solvent should normally disperse or
5 dissolve the catalyst to form a well-mixed system. The
most preferred catalysts for block copolymer synthesis,
(ACpHfMe(L'))[B(C₆F₅)₄], are prepared in toluene and form
non-miscible, toluene-dispersible phases. The
concentration of toluene in the catalyst phase depends on
10 temperature and the structure of the catalyst. While
aliphatic hydrocarbons, fluorinated hydrocarbons, and
chlorinated aromatic hydrocarbons may be used in this
invention, the preferred solvents for the preparation of
block copolymers from the most preferred catalysts are
15 aromatic hydrocarbons such as toluene, xylene, ethyl
benzene and the like.

Temperature

20 The reactor temperature strongly affects the yield
of block copolymer and must be adjusted depending on the
type and concentration of monomers and catalyst used.
The general procedure for determining this condition is
to 1) find the maximum temperature where high molecular
25 weight polymer segments can be prepared and 2) confirm
the molecular weight is controlled by the catalyst-to-
monomer ratio at this temperature. The general trend is
that higher temperatures cause chain transfer to be more
rapid relative to propagation and therefore give lower
30 block copolymer yields. The process may be carried out
at temperatures of -80°C to 80°C, however, it is
preferred that the temperature be in the range of -10°C
to 20°C.

Concentration of Catalyst

5 The concentration should be high enough to produce
significant rates of polymerization under the generally
low pressure conditions of sequential addition. The
concentration should not be so high as to produce
uncontrollable exotherms upon exposure to the monomer.
The exotherm can be controlled, however, by adjusting the
10 rate of monomer addition during the formation of a block
segment. This level of control allows for a large range
of acceptable catalysts concentrations. The process may
be carried out at catalyst concentrations ranging from 6×10^{-6} to 6×10^{-2} moles of catalyst/liter of solution,
15 however it is preferred that catalyst levels be in the
range of 1×10^{-4} to 3×10^{-3} moles of catalyst/liter of
solution.

Monomer Concentration

20 The amount of monomer added depends on the molecular
weight of the targeted polymer and the moles of active
catalyst in the reactor. Molar ratios of monomer to
catalyst may be in the range of 10:1 to 10,000:1. The
25 monomers may be added quickly or may be metered in to the
reactor to control exotherms.

Order of Monomer Addition

30 Precipitation of polymer (with catalyst attached)
causes undesirable broadening of the molecular weight
distribution due to mass transport limitations and poor
mixing. It is therefore preferred to prepare the soluble
block (generally the elastomeric segment) in the first
35 stage of the reaction. Thus, as indicated in the
examples, when ethylene is added in the first step in the
synthesis of a HDPE-b-atactic-PP diblock copolymer the

- 11 -

initially formed polyethylene precipitates with the catalyst and the final molecular weight distribution of crude block copolymer product is rather broad ($M_w/M_n = 3.0$). Addition of propylene in the first step produces a system which remains homogenous throughout the block copolymer synthesis, yielding a crude product having a much narrower $M_w/M_n = (1.7-1.8)$.

Method of Monomer Addition

10

Monomer may be added and removed in such a way that the resulting block copolymer has excellent properties, such as blocking efficiency. This is accomplished by applying a 5 to 10 psi (~ 34 kPa to ~ 69 kPa) vacuum and purging the reactor with a dry inert gas, such as nitrogen, between monomer addition steps. In a preferred embodiment a minimum vacuum needed is 5 psi. The dry inert gas purge may be at 5 psi or above, preferably at or above 15 psi even more preferably between 5 and 25 psi in a two liter reactor. As is well known to those of ordinary skill in the art the pressures will vary with the size and other conditions of the reactor. Thus these numbers are a guide and not meant to be absolute.

25

Preparation of Tapered and Random Copolymers

Addition of stoichiometric amounts of a mixture of two olefins to the reactor under block copolymer conditions will naturally produce tapered copolymer because the monomers will generally have different reactivities with the catalyst. Thus, the head of the polymer will be rich in the more reactive comonomer while the polymer tail will contain larger amounts of the slower reacting comonomer. The extent of tapering will depend on magnitude of the difference of monomer reactivity. The extent of tapering can be controlled by

- 12 -

metering the two monomers into the reactor at different rates.

Random copolymers such as non-crystalline ethylene-
5 propylene rubber can be made under block copolymer
conditions by adding the fast monomer (ethylene) to the
catalyst/propylene mixture at a rate where the desired
amount of ethylene has been added when all the propylene
has been consumed. This procedure is exemplified for a
10 ethylene-propylene elastomer containing 50 mole %
propylene.

In a preferred embodiment, tapered block copolymers
having properties typical of thermoplastic elastomers
15 (TPE's) can be produced. These particular tapered block
copolymers typically strong and elastic, having a low
modulus at low strain, high tensile strengths, up to 2500
psi or more, and a tension set of 14 to 25. These
tapered copolymers are also characterized by an ethylene
20 content of 15 to 25 mole %, preferably 18 to 23 mole %.
These tapered block copolymers can be produced by using a
chiral hafnium catalyst, such as those used in the
examples below, at a reaction temperature of -10 degrees
C to 20 degrees C, preferably -5 degrees C to 10 degrees
25 C. However, higher temperatures could be used, depending
on the heat dissipation system utilized. These tapered
block copolymers apparently have long stereoregular
segments of crystalline polypropylene that are probably
formed when the concentration of ethylene in the feed
30 drops to a low level. The DSC melting curves of these
polymers typically show a broad melting peak with a sharp
crystallization peak at low temperatures.

Block Copolymer Products

35

The novel polymer products of this invention are
olefinic block and tapered copolymers having narrow


molecular weight distributions and well defined di-, tri-, multiblock or tapered structures. The polymer segments which can be incorporated into these architectures include 1) elastomers such as atactic polypropylene, atactic poly-1-olefins, and ethylene/1-olefin copolymers wherein the ethylene comonomer is a C₃-C₁₈ 1-olefin such as ethylene-propylene, ethylene butene, and ethylene-octene copolymers ethylene-propylene-diene terpolymers and other crosslinkable elastomeric olefins; 2) thermoplastics such as high density polyethylene, linear low density polyethylene having melting points from 80-135°C (e.g. ethylene-propylene and other ethylene-1-olefin copolymers wherein each 1-olefin has from 4 to 20 carbon atoms), ethylene/diene copolymers such as ethylene/ethyldiene-norbornene copolymers, isotactic polypropylene having melting points from 100°C-165°C, syndiotactic polypropylenes having melting points from 100°C-165°C, semi-isotactic polypropylenes and other crystalline 1-olefin homo and copolymers; and 3) glasses such as homo-polycyclopentene, homopolynorbornene and the like. The average molecular weight of the polymer segments included in the novel block copolymers of this invention can be in the range of from 100-1,000,000 daltons, preferably from 30,000 to 200,000 daltons. The molecular weight distributions (Mw/Mn) of the crude and/or fractionated block copolymer are preferably 5 or less, even more preferably 3 or less, even more preferably 2.5 or less, and even more preferably 2 or less. As indicated above and in the examples following the percentage of block copolymer in the crude product can vary from 1% to 100%, preferably from 50% to 90% depending on the application and the conditions of the experiment. Furthermore, preferred block copolymers of this invention have blocking efficiencies of 30% or greater, preferably 50% or greater, more preferably 70% or greater, even more preferably 90% or greater, and most preferably 95% or greater. In a preferred embodiment

shorter reaction times and lower reactor temperatures are used to produce block copolymers having enhanced blocking efficiency.

5 The block copolymers of this invention can also be formulated into a wide variety of adhesives by blending the block copolymers with one or more solid or liquid tackifiers and optionally other known components such as oils, plasticizers, fillers, antioxidants, coloring
10 agents, and the like. Useful tackifiers include natural rosins, hydrogenated or non-hydrogenated linear, branched or cyclic aliphatics or aromatics and mixtures thereof. The tackifiers may be present at from 5 weight percent to 95 weight percent based upon the weight of the
15 composition. Fillers and other additives may be present at up to 150 weight percent based upon the weight of the copolymer and the tackifiers.

20 The block copolymers may also be molded or shaped into articles such as bumpers, shoe soles, dash boards, automotive parts, containers, sheeting and the like by methods known in the art. Fillers and other additives known in the art, such as carbon black, silica, talc, glass, glass fibers, antioxidants, plasticizers, oils,
25 waxes, coloring agents, and the like may further be added to the compositions before or after molding or shaping. The block copolymers can also be used in foams, sealants, coatings, weather strippings, sound absorbers and the like with the appropriate additives known to those of
30 ordinary skill in the art, such as foaming agents, tackifiers, oils, plasticizers, films and the like.

35 The block copolymers of this invention can be represented by the following general formula:



- 15 -

wherein each A is a polymer segment having an average molecular weight from 100 to 1,000,000 daltons chosen independently from homopolymers consisting of HDPE, homo and copolymers of cyclic olefins, such as

5 polycyclopentene and polynorbornene, and isotactic, atactic, and syndiotactic poly-1-olefins such as atactic-PP, isotactic-PP, syndiotactic-PP; random copolymers of 1-olefins and diolefins such as ethylene-propylene rubber, ethylene-propylene-hexadiene rubber, ethylene-

10 butene rubber, linear low density polyethylenes, such that no adjacent segments are the same polymer composition.

Novel block copolymers of this invention include but

15 are not limited to diblock copolymers such as (HDPE)(EP), (i-PP)(EP), (LLDPE)(a-PP), (HDPE)(a-PP), (LLDPE)(HDPE) and the like, and triblock copolymers such as (HDPE)(EP)(HDPE), (HDPE)(EP)(LLDPE), (LLDPE)(a-PP)(LLDPE), (HDPE)(a-PP)(LLDPE), (i-PP)(EP)(i-PP), (s-


20 PP)(EP)(s-pp) and the like. It will be recognized to those well versed in the field that the isotactic polypropylene segments contained in the block copolymers of this invention have microstructure defects which are not observed in conventional i-PP materials prepared

25 using titanium Ziegler-Natta catalyst. The microstructure defects which are unique to isotactic polypropylenes prepared using metallocene catalysts arise from 1-3 and 2-1 additions to propylene. The melting points of such materials can vary from 60°C to 165°C

30 depending on the total number total defects.

The tapered copolymers can be represented by similar general formula where the transitions between idealized polymer segments A_n are gradual. These gradient

35 transitions between segments are represented by arrows.



- 16 -

An example of this would be a polymer prepared by reacting a 50-50 mixture of ethylene and propylene with a living catalyst which has a high preference for ethylene over propylene. The tapered polymer obtained in such an experiment would be designated by the following formula:

HDPE--->EP--->a-PP

The GPC data was obtained on a Waters 150 GPC instrument (MCL, Baytown) equipped with an RI detector. The samples were run at ca. 140°C in trichlorobenzene solvent. The molecular weights were calculated from the PP calibration curves. The thermal behavior of the polymers was recorded by DuPont 912 Differential Scanning Calorimeter. The room temperature and the high temperature tensile properties of polymers were tested on Instron 4505. The polymers were compression molded on a Carver Press into thin sheets and allowed to condition for 24 hours. The micro-tensile specimens were cut and pulled at a crosshead speed of either 2 or 20 in/min. The samples were equilibrated for 5-10 minutes in an environmental chamber prior to testing for high temperature tensile properties. The tension set was measured in terms of % residual strain after holding the sample at 100% strain for 10 minutes followed by relaxation.

Example 1: First Ethylene then Propylene

The reactor was cooled to 0°C and charged with 400 mls of toluene and 0.20 mmoles of catalyst (bis cyclopentadienyl hafnium dimethyl and N,N, dimethylanilinium tetrakis(pentafluorophenyl)boron. Ethylene (4.0 grams; 0.143 moles) was added to 0°C and 2 psig over 25 minutes. After all the ethylene was consumed, propylene (6 grams; 0.139 moles) was added; after 30 minutes the reactor was dropped and the product

- 17 -

collected. The crude product contained 50 mole % propylene, had a $M_n = 87,000$ with a molecular weight distribution of 3.0. The crude product was washed with hexane at room temperature to remove any a-PP which was not in the form of block copolymer. The hexane insoluble material contained crystalline HPDE (as determined by IR) and 30 mole % propylene; the M_n was 144,000 with a molecular weight distribution of 1.89. The hexane soluble fraction was a-PP, did not contain ethylene (by IR), and had a M_n of 63,000 with a molecular weight distribution of 1.47. Based on the extraction studies, it was concluded that 50-60% of the a-PP chains were incorporated into a block copolymer under these conditions.

15

Example 2: First Propylene then Ethylene

The procedure of Example 1 was repeated except propylene was added first. The crude product had 41 mole % propylene (IR), a M_n of 170,000 with a molecular weight distribution of 1.78. A pad was pressed and extracted with hexane for 4 hours. At this point, the material contained 37 mole % propylene and very crystalline HDPE. The pad was further extracted with toluene at room temperature for 50 hours with no loss of weight. The extracted "diblock" had a M_n of 230,000 and a molecular weight distribution of 1.48 (the hexane solubles were a-PP having a M_n of 125,000 and a molecular weight distribution of 1.72).

30

Example 3: Mw Control in Block Copolymer Synthesis

Using the procedure in Example 2, 3.0 grams of propylene (0.070 moles) were added to 0.20 mmole of the catalyst. After the propylene (0.071 moles) was completely consumed, 2.0 grams of ethylene were added to the system. The resulting product was washed with hexane

35

at room temperature to remove any a-PP. The resulting block copolymer had a M_n of 107,000 and a molecular weight distribution of 1.68, and contained 42 mole % propylene by IR spectroscopy.

5

Example 4: Effect of Temperature

The procedure of Example 1 was followed except the temperature was varied. If the temperature is raised the effect is to lower the efficiency of the block formation. The temperature was raised from 0°C to 10°C and the blocking efficiency was reduced to less than 10%. When the temperature was lowered to -5°C, the blocking efficiency improved 78%.

15

Example 5: Increasing Time Between Monomer Addition

A series of block copolymerizations were run at 0°C and the time between the addition of propylene and ethylene was varied from 6 to 42 minutes. The crude products were collected, analyzed by GPC and IR, then extracted with hexane at room temperature for 65 hours to remove unblocked a-PP. In a well-behaved system wherein the extraction technique removes all of the a-PP, a logarithmically increase in the percent of hexane extractables with time would be expected. The data of this example is shown in Fig. 1 in graphical form. The Y-axis represents the percent of polypropylene which is incorporated into the block copolymer. The extractables were isolated and analyzed by GPC and IR; they were all pure a-PP. The correlation is close to the linear result expected so that this technique can be used to evaluate the kinetics of chain loss under a variety of conditions. This result confirms the ability to make true block copolymers, and confirms that hexane extraction is a good measure of block copolymer efficiency for this polymer system.

35

Example 6: Preparation of EP

The procedure of Example 1 was followed except where
5 noted. In this example, 1.6 grams of propylene (0.037
moles) were added to $[\text{Cp}_2\text{HfMe}_2][\text{B}(\text{pfp})_4]$ (0.30 mmole) in
400 cc of toluene at 0°C. Immediately after the
propylene addition, 1.1 grams of ethylene (0.039 moles)
was metered in over 3 minutes. After six minutes, the
10 product was recovered yielding 2.7 grams of amorphous EP
rubber. The product was non-crystalline by IR; the
polymer had a M_n of 96,000 and a molecular weight
distribution of 1.69.

15 Example 7: Preparation of EP

The procedure of Example 1 was followed except where
noted. In this example 3.2 grams of propylene (0.074
moles) was added to $[\text{Cp}_2\text{HfMe}_2][\text{B}(\text{pfp})_4]$ (0.30 mmole) in
20 400 cc of toluene at 0°C. Ethylene (2.2 grams; 0.078
moles) was added to the reactor over 5.5 minutes. The
product was recovered yielding 5.7 grams of EP rubber
having a M_n of 155,000, and molecular weight distribution
of 1.48. The IR showed some degree of PE-crystallinity.

25

Example 8: Preparation of EP-b-HDPE

Example 6 was repeated to prepare "living" EP-
rubber. After all the monomer had been consumed,
30 ethylene (1.1 grams) was added to prepare the desired
block copolymer. The product was recovered yielding 4.25
grams of copolymer. The IR showed PE crystallinity and
the polymer had thermoplastic-like properties. The onset
of T_g was -52.9°C and the product had a melting point of
35 119°C. The M_n of the crude product was 161,000 with a
molecular weight distribution of 1.59.

Example 9: aPP-HDPE di-Block Copolymer

Blocks were synthesized as follows:

To 400 ml. of toluene containing 0.29 mmoles of
5 $\text{Cp}_2\text{Hf}(\text{Me})_2$ $\text{DMA}(\text{B}(\text{pfp})_4)$, 2.3 g. of propylene was added
first to a two liter zipperclave reactor at 0°C.
($\text{DMA}(\text{B}(\text{pfp})_4)$ = N,N-dimethylanilinium terakis
(pentafluorophenyl) boron.) After 6 minutes of
polymerization, the pressure dropped to approximately 1
10 psi. The reactor was then vented through a Nujol
bubbler. A 5-6 psi vacuum was applied at the end of the
PP reaction, followed by purging with 20 psi of N_2 . 20
psi of N_2 was charged into the reactor while stirring and
then vented to aid in removing any remaining propylene
15 monomer dissolved in the solution. After venting N_2 , 1.5
gm. of ethylene was added slowly and allowed 1-3 minutes
for complete reaction. The resulting polymer was
precipitated in the methanol and then extracted with
hexane for 24 hours at room temperature. Soluble aPP was
20 extracted by hexane whereas HDPE of aPP-HDPE block
copolymer remained insoluble. Both hexane-soluble and
insoluble species were then subjected to GPC and FTIR
analysis for MW and composition. This vacuum/ N_2 purging
technique produced an end product with a high degree of
25 HDPE formation. Characterization results are summarized
in table 1.

Mechanical properties (tensile, elongation, and
tension set) were also measured for the aPP-HDPE di-block
30 copolymers made. All measurements were done on an
Instron model 4505 with crosshead speed set at 20
inches/minute. Test conditions for the tension set
measurements were as follows: 100% elongation for 10
minutes at room temperature, then released. Percent
35 deformation was measured immediately and after 10
minutes.

TABLE 1

Table 1 aPP-HDPE Di-Block Copolymers

Charge No. 17005-	87-41	95-45	97-46	101-48	103-49
Yield (gm)	4.87	4.03	4.04	5.24	4.56
<u>Hexane Insolubles</u>					
wt. %	76	80	86	91	78
PP content, wt. %	36	44	57	49	43
Modulus, psi	1673	2150	2820	2467	2217
Elongation, %	602	400	382	567	476
Tensile, psi	1308	998	933	1345	1134
Tension Set, %	—	46	57	53	59
T _m , °C	107	108	117	119	116
M _n , x 1000	218	295	245	255	239
M _w /M _n	1.35	1.61	1.54	1.93	1.69
<u>Hexane Solubles</u>					
M _n , x 1000	—	114	101	112	102
M _w /M _n	—	1.76	1.72	2.12	1.6
<u>% C₂⁺ as aPP</u>	47	36	22	17	40
<u>Cat. Activity</u>					
Mole Di-block/mole cat.	0.059	0.038	0.0049	0.065	0.051
Mole aPP/mole cat.	—	0.025	0.019	0.014	0.034
Active cat. Mole %	—	6.3%	6.8%	7.9%	8.5%

Example 10: HDPE-aPP-HDPE Tri-Blocks

Synthesis of tri-block copolymers was performed under the same conditions as Example 9. In order to avoid precipitation of the first HDPE block in the toluene solution, a small amount of gas phase $C_3=$ was charged into the reactor and polymerized prior to adding the first block $C_2=$ monomer. We applied 10 psi vacuum, followed with a 20 psi N_2 purge between each monomer sequence before addition of a new monomer. The final products were precipitated in methanol and dried in a vacuum oven. In order to analyze the product composition, samples were extracted in hexane for 24 hours at room temperature. Block copolymers of HDPE-aPP or HDPE-aPP-HDPE would remain insoluble, whereas aPP would be extracted in this solvent. All soluble as well as insoluble samples were then subjected to MW and compositional analysis by GPC and FTIR. The results for total yields, weight percent of hexane extraction, MW and propylene content are summarized in the following table 2.

Table 2HDPE-aPP-HDPE Tri-block Copolymers

	Reac. I (17005-159)	Reac. II (17005-161)	Reac. III (17005-163)
<u>Total Yield (gm)</u>	2.41	6.97	9.03
<u>Hexane insoluble</u>			
wt%	95	59	92
Propylene content, wt%	25.8	51.9	50.4
Modulus, psi	-	2157	2444
Elongation, %	-	670	638
Tensile, psi	-	2398	2256
Tension set, % (10 min at 100%)	-	28	32
Mn, ($\times 10^{-3}$)	125	346	331
Mw/Mn	2.1	1.8	2.1
<u>Hexane Soluble</u>			
Mn ($\times 10^{-3}$)	-	121	115
Mw/Mn	-	2.4	3.1

- 23 -

Results of FTIR analysis show that all of the hexane soluble are 100% aPP.

In order to assess the mechanical properties of the linear tri-block copolymers, we synthesized six more samples according to the same reaction conditions as previously described. Table 3 summarizes the data. Samples #51, #53 and #54 were run with block ratios of 1:3:1. Samples #55, #56 and #52 were run with a block ratio of 1:6:1. Sample #52 was run with twice the amount of monomers charged and with the same level of catalyst concentration. We obtained a $M_n=306,000$ (almost double) with a similar narrow $M_w/M_n=2.0$.

Table 3

TABLE 3 HDPE-aPP-HDPE Tri-Block Copolymers

Block Ratio	1:3:1			1:6:1		
	51	53	54	55	56	52
Charge No.						
Total Yield (gm)	8.87	9.15	8.95	7.43	7.44	13.19
Hexane Insolubles, wt. %	86	79	72	41	47	71
PP content, wt. %	56	64	60	80	74	59
Modulus, psi	1821	1567	2607	859	1243	2933
Elongation, %	676	737	723	810	930	629
Tensile, psi	1630	1638	2039	1198	1625	2171
Tension Set, %	36	24	28	25	19	33
Tm, °C	134	119	121	110/137	119	129
Mn, x 1000	287	293	270	241	207	306
Mw/Mn	1.9	1.9	1.9	1.9	1.9	2.0
Mole. polymer chain/mole. cat.	0.09	0.09	0.08	0.04	0.06	0.11
<u>Hexane Solubles</u>						
Mn, x 1000	171	206	197	222	192	207
Mw/Mn	2.0	2.0	1.9	2.1	2.0	1.9
Mole. polymer chain/mole. cat.	0.03	0.03	0.04	0.07	0.07	0.06
Mole % Active Cat.	0.12	0.12	0.12	0.11	0.13	0.17

Example 11: HDPE-EP-HDPE Tri-block Copolymers

The procedure set out in Example 9 was followed. Three reactions were run with each reaction being terminated at the end of each blocking sequence. Samples of the hexane-soluble and insoluble fractions for each of these reactions were subjected to MW and compositional analysis by GPC and FTIR. Table 4 below summarizes the results.

<u>Table 4</u>			
Reactions	I	II	III
Total Yields(g)	2.06	9.06	9.80
Mn ($\times 10^{-3}$)	237	190	299
Mw/Mn	2.05	2.70	2.19
<u>Hexane Insoluble</u>			
Wt%	99.6	36.2	51.8
PP Content, wt%	5.4	*	*
Mn ($\times 10^{-3}$)	189	324	297
Mw/Mn	2.28	1.94	2.37
<u>Hexane Solubles**</u>			
Wt%	0.4	63.8	48.2
Mn ($\times 10^{-3}$)	-	164	-
Mw/Mn	-	2.44	-

* The FTIR PP content was too high to be accurately calculated.

** FTIR shows hexane solubles contain both aPP and EP.

Three additional reactions were run using the same reaction conditions as previously described but varying the block ratio and the middle block E/P composition. Table 5 summarizes results from these runs.

Table 5
HDPE-EP-HDPE Block Copolymers
 (same reaction conditions as in Example 1)

5	Charge No. 17005-	125-57	127-58	129-59
	Block Ratio, by wt.	1:2.5:1	1:3.6:1	1:13:1
	E/P Ratio, by wt.	1:1	1:6	1:12
	Total Yield, g	7.2	8.2	13.6
10	Exotherm, °C	1	5	20
	<u>Hexane Insolubles</u>			
	Wt %	97	(30)	36
	Propylene content, wt%	45.9	85.2	-
15	Modulus, psi	1560	3107	550
	Elongation, %	509	290	885
	Tensile, psi	1046	1204	688
	Tension set, %	26	45	46
20	(10%, 100%)			
	Mn(K)	510	544	156
	Mw/Mn	1.8	2.1	3.4
	Mol. polymer/ Mol. catalyst	0.047	0.016	0.108
25	<u>Hexane Solubles</u>			
	Wt %	3	70	64
	Mn, 1000	309	470	121
	Mw/Mn	2.0	2.3	4.1
30	Mol. polymer/ Mol. catalyst	0.0024	0.042	0.248

Example 12: EP-RCP Block Copolymers

35 Sequential monomer addition technique was used to
 synthesize (A) EP-b-RCP Block Copolymers and (B) EP-b-iPP
 Block Copolymers. (RCP is a tapered or random copolymer
 of propylene and an alpha olefin preferably ethylene. In
 the tapered RCP, the polymer chain is amorphous in one
 40 end and gradually becomes semi-crystalline toward the
 other end.) Removal of the residual ethylene of the "EP"
 block by vacuum technique was used to synthesize EP/PP
 block copolymers consisting of isotactic "PP" block and
 tapered copolymers (147-1, 149-1, 150-1). The catalyst
 45 used was MeSi₂(bis-indenyl) hafnium dimethyl, indicated
 in the tables as "Hf-*", with DMAH(B(pfp)₄).

- 27 -

The procedure of example 9 was used except where noted. The polymerization runs were carried out in a 1 L autoclave reactor using toluene diluent. The "EP" block was formed first followed by the "PP" block. In between monomer addition steps the reactor was vented completely (0 psi pressure) or subjected to vacuum/nitrogen purge cycle. The yield was determined by completely drying the crude product in the vacuum oven at 100°C for at least 24 hours. The crude product was then subjected to heptane extraction at RT/50°C for 24 hours. The heptane soluble fraction is the unblocked EP copolymer and heptane insoluble part is EP-b-PP block copolymer.

A. Synthesis and Characterization of EP-block-RCP

(Random Co-Polymer):

Sequential monomer addition technique was employed. "EP" block was formed first followed by the "PP" block. The reactor was vented in between monomer addition steps. The details of the polymerization conditions and the characterization data of block copolymers are reported in Table 7. A control "EP" run was carried out under similar conditions to simulate "EP" block of EP/PP block copolymer. The crude product obtained in the block run was subjected to the heptane extraction at room temperature.

(B) Synthesis and Characterization of EP-block-iPP:

We followed the procedure in Example 12A above, however, by applying vacuum in between the "EP" and "PP" block, we were able to remove the residual C₂ of "EP" block. The resultant block copolymers exhibited a sharp melting peak in the range of 135-138°C corresponding to the "iPP" block. The polymerization conditions and the characterization of EP-b-iPP block copolymers and tapered copolymers are reported in Table 8 and A. The crude

product formed in the block run was subjected to heptane extraction at 50°C to insure complete removal of the unblocked EP copolymer. The heptane insoluble fraction was considered to be the block copolymer. The wt% EP in
5 the block copolymer is calculated from the results obtained in the heptane extraction studies. Mechanical properties are listed in tables 9 and 10.

TABLE

Table A

ID #	Mole% C ₂ In Feed	Polymzn. Temp. (°C)	Polymzn. Time (min.)	Conv. %	Hep. Sol. at RT (Wt%)	Mole% C ₂ In Polymer (H NMR)	Mn/MWD (by GPC)	CI (PP) (by FTIR)
16768-147-1	28	27 to 40	3.0	100	68.0	24	38.4 K/2.9	0.36
16768-149-1	28	0 to 10	1.5	100	28.0	22	93.8 K/1.8	0.41
16768-150-1	25	-5 to 5	1.5	100	27.0	20	95.8 K/1.7	0.38
16768-156-1	33.3	26 to 27	5.0	100	100	30	80.5 K/1.7	0.1
17450-8-1	33.3	8 to 9	10.0	76	100	34.8	98.8/1.6	0.12
17450-26-1	33.3	6 to 8	2.0	89	100	32	91.4 K/1.6	0.1

Conditions: Hf - */DMAH-B(pfp)₄ = 0.5 X 10⁻⁴ - 1.0 X 10⁻⁴ moles

TABLE 7

Synthesis Conditions and Characterization of EP-block-RCP
 Conditions: $[Hf-\star] = 1.25 \times 10^{-4} M$ $[DMAH-B(pfp)_4] = 1.25 \times 10^{-4} M$

ID #	Run Type	Feed Comp. EP Block (Molar)		C ₃ Conc PP Block (Molar)	Polymzn. Time (min.)		Polymzn. Temp. (°C)		Conv. %	Wt% RCP	Mn/MWD	MP (°C)	
		[C ₂]	[C ₃]		EP	PP	EP	PP					
146-1	EP-PP	0.33	0.825	0.413	1.0	2.0	27 to 41	35	100	30	35 K/4.2	126	
146-2		Hep Sol. (7 wt%)									27.3 K/3.9		
146-3		Block(Hep Insol)									65 K/2.3		
147-1	EP	0.33	0.825		3.0		27 to 40		100		38.4 K/2.9		
148-1	EP-PP	0.33	0.825	0.413	1.5	6.0	0 to 7	7	92.4	25	104.6 K/2.1	130	
148-2		Hep Sol. (10 wt%)									31.4 K/3.5		
148-3		Block(Hep Insol)									125 K/2.0		
149-1	EP	0.33	0.825		1.5		0 to 10		100		93.8 K/1.8		
151-1	EP-PP	0.33	0.975	0.33	1.5	3.0	-5 to 5	5	100	25	115.3 K/1.7	120	
151-2		Hep Sol. (8 wt%)									59.4 K/2.0		
151-3		Block(Hep Insol)									128 K/1.6		
150-1	EP	0.33	0.975		1.5		-5 to 5		100		95.8 K/1.7		

TABLE 8

Synthesis Conditions (Vacuum Technique Used) and Characterization of EP-block-Iso-PP
 Conditions: $[Hf - *] = 1.0 \times 10^{-4}$ moles $[DMAH-B(pfp)_4] = 1.0 \times 10^{-4}$ moles

ID #	Run Type	Feed Comp. EP Block (Molar)		C ₃ Conc PP Block (Molar)	Polymzn. Time (min.)		Polymzn. Temp. (°C)		Conv. %	Hep. Sol. @ 50C	Wt% EP (Extrn)	Mn/MWD	MP (°C)
14-1	EP-PP	[C ₂]	[C ₃]		EP	PP	EP	PP					
14-2		0.66	0.33	0.66	6	6	1 to 10	9	100	40%		126 K/2.3	
14-3		Hep. Sol. Block(Hep Insol)									26	124 K/2.2	137
15-1	EP	0.66	0.33		6		-1 to 7		100	100%		265 K/2.2	
17-1	EP-PP	0.33	0.165	0.66	6	4	12 to 15	14	100	20%		134 K/2.4	
17-2		Hep. Sol. Block(Hep Insol)									22	106 K/2.4	
17-3												344 K/2.1	138
19-1	EP-PP	0.44	0.22	0.66	6	4	6 to 8	8	93	28%		143 K/2.6	
19-2		Hep. Sol. Block(Hep Insol)									30	78 K/1.7	137
19-3												224 K/2.0	
26-1	EP	0.44	0.22		2		6 to 8		90	100%		92 K/1.6	

TABLE 8 (cont)

[illegible]

- 33 -

TABLE 9

5	ID #	Stress @ Yield (psi)	% Strain @ Yield	Tensile Strength (psi)	% Strain @ Break	Toughness (in-lb/in ³)
	14-3	2,364	17	4,221	714	18,220
	17-3	2,883	16	3,264	526	12,160
10	19-3	3,264	13	5,115	714	22,230
	24-3	1,931	19	3,900	774	17,660
	29-3	3,051	16	4,489	700	19,310
15	isoPP Mn = 237 K MWD = 2.16	3,688	12	3,440	470	12,100

20

Table 10

ID #	100% Modulus (psi)	300% Modulus (psi)	Tensile Strength (psi)	% Strain @ Break	% Recovery After 100% Strain
147-1	268	333	1,500	1,320	90
149-1	469	558	1,587	870	85
150-1	427	503	1,750	1,035	85
146-3	859	979	2,734	822	60
148-3	983	1,127	2,616	726	55
151-3	961	1,100	3,100	788	55

Claims:

1. A process for producing block or tapered
5 copolymers comprising the steps of:

(i) contacting under polymerization conditions in a
polymerization reactor a first olefinic monomer(s) with
an activated catalyst complex which is the reaction
10 product of:

(a) a cyclopentadienyl Group IVB metal component,
and

15 (b) a second component of an alumoxane or a
compatible non-coordinating anion to produce a first
living polymer; and

(ii) sequentially adding to said living polymer at
20 least a second monomer(s) to copolymerize with said first
polymer to produce a block or tapered copolymer; and


(iii) recovering a block or tapered copolymer having
a molecular weight distribution of 3 or less.
25

2. The process of claim 1 wherein the
polymerization is vented or purged with a dry gas in
between steps (i) and (ii).

30 3. The process of claim 1 wherein the
polymerization reactor is vented or subjected to a vacuum
and purged with a dry gas in between steps (i) and (ii).

4. The process of claim 1, 2 or 3 wherein the
35 block copolymer is a diblock or triblock copolymer.

5. The process of claim 1 wherein the activated catalyst complex product is represented by the formulae:



wherein: M is titanium, zirconium or hafnium; (A-Cp) is either (Cp)(Cp*) or Cp-A'-Cp; and Cp and Cp* are the same or different substituted or unsubstituted cyclopentadienyl radicals; A' is a covalent bridging group containing a Group IV-A element; L' is a neutral Lewis base; X₁ is a hydride radical, hydrocarbyl radical having from 1 to 20 carbon atoms, substituted-hydrocarbyl radical; wherein 1 or more of the hydrogen atoms are replaced with a halogen atom, having from 1 to 20 carbon atoms, or organo-metalloid radical comprising a Group IV-A element wherein each of the hydrocarbyl substituents contained in the organo portion of said organo-metalloid, independently, contain from 1 to 20 carbon atoms; X₃ is a hydride, halide, hydrocarbyl radical, a C₁ - C₂₀ hydrocarbyl radical wherein one or more of the hydrogen atoms is replaced by a halogen atoms, organometalloid radical wherein each hydrocarbyl substitution in the organic portion contains from 1 to 20 carbon atoms and the metal is a Group IVA metal and B' is a noncoordinating anion.

6. The process of claim 1, wherein the catalyst is the reaction product bis(cyclopentadienyl) hafnium dimethyl and N,N-dimethylanilinium terakis(pentafluorophenyl)boron.

7. The process of claim 1 wherein said steps (i) and (ii) are carried out at a temperature of from -5°C to 10°C.

- 36 -


8. The process of claim 1 wherein any of said monomers is selected from the group consisting of ethylene, propylene, and 1-butene.

5 9. The product of the process of claim 1, wherein the product is a tapered copolymer comprising from 15 to 25 mole percent ethylene and having a molecular weight distribution of 2.5 or less.

10 10. The product of the method of claim 1 characterized by a blocking efficiency of 30% or greater.

11. Olefinic block or tapered copolymers having a Mw/Mn 3 or less represented by the formula:

15



wherein n is an integer, each A represent a polymer segment having an average of Mw of from 100 to 1,000,000 daltons and adjacent A's represent different olefinic polymer segments, A being selected from the group consisting of: atactic, syndiotactic or isotactic polymers of one or more of olefins, diolefins, α -olefins, cyclic olefins and polymers of one or more of olefins, diolefins, α -olefins, cyclic olefins.

20 25

12. The copolymers of claim 11 wherein each A is selected from atactic-polypropylene, isotactic-polypropylene, syndiotactic-polypropylene, polyethylene, ethylene propylene copolymers, ethylene butene copolymer, ethylene α -olefin copolymer, HDPE, LLDPE.

30

13. The block copolymers of claim 11 wherein said copolymer is a diblock of (HDPE)(EP), (i-PP)(EP), (LLDPE)(a-PP) or (LLDPE)(HDPE) or a triblock of (HDPE)(EP)(HDPE), (HDPE)(EP)(LLDPE), (LLDPE)(a-PP)(LLDPE), (HDPE)(a-pp)(LLDPE) or (i-PP)(EP)(i-PP).

35

14. An adhesive comprising block copolymer of claim 11 and a tackifier.

5 15. A molded article or a foam comprising block copolymer of claim 11.

1 / 3

FIG. 1

$$y = -.8802x + 82.9358, R\text{-squared: } .946$$



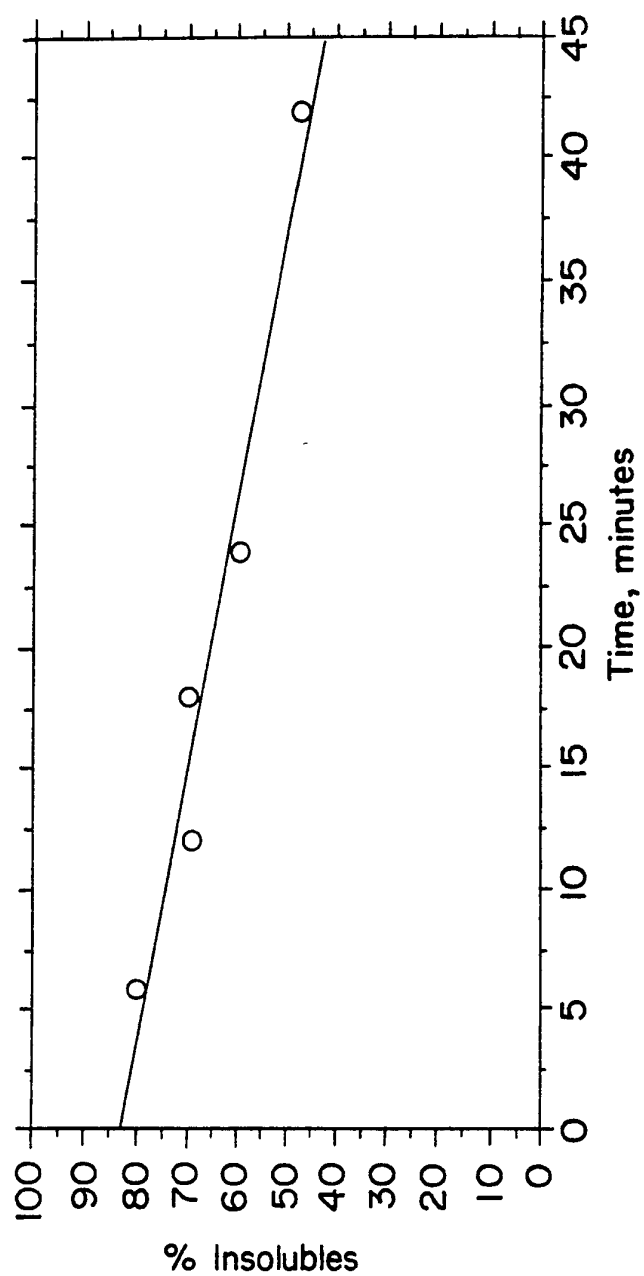


FIG. 2

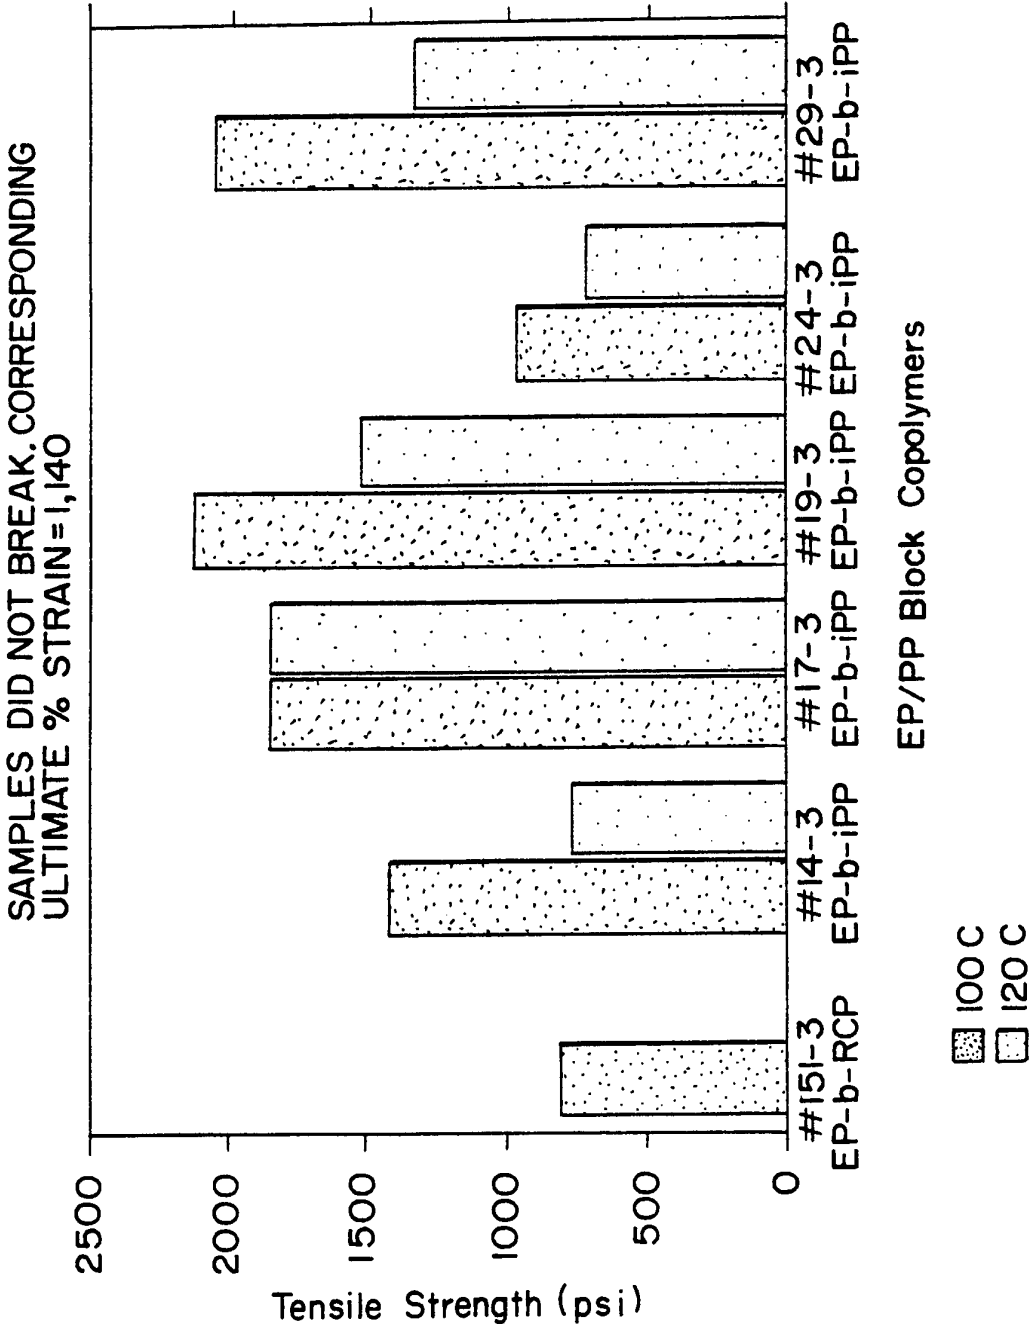

3 / 3

FIG. 3

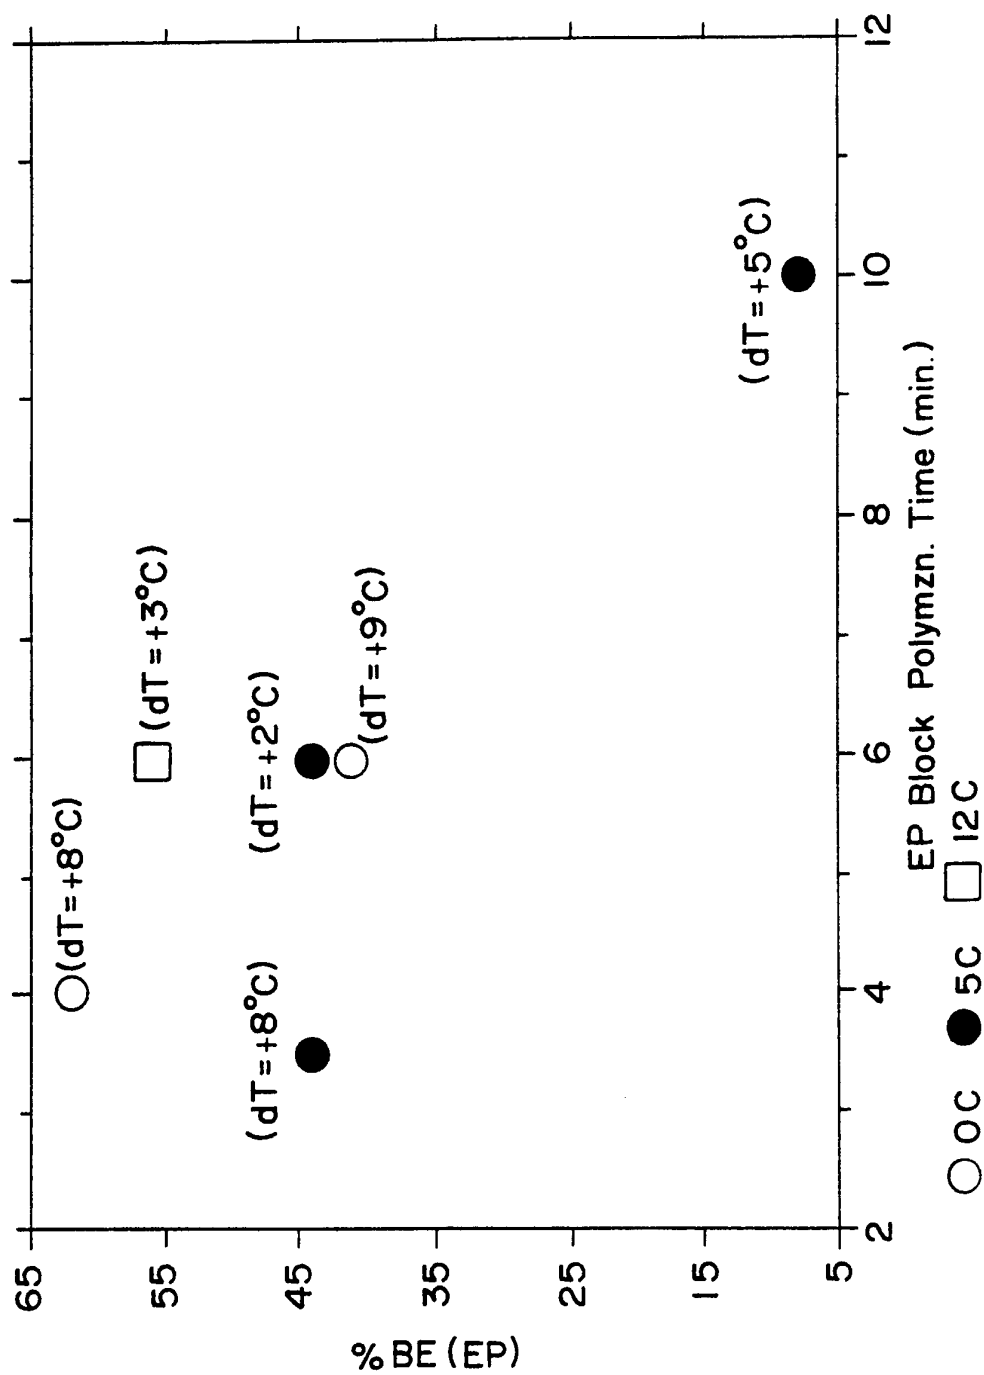

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 94/03060

A. CLASSIFICATION OF SUBJECT MATTER
IPC 5 C08F297/08 C09J153/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 5 C08F C09J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO,A,91 12285 (EXXON CHEMICAL PATENTS INC.) 22 August 1991 see page 29, line 22 - page 31, line 22; claims 1-15; examples ---	1-15
X	DE,A,41 30 429 (BASF) 18 March 1993 see claims 1-6; examples; table ---	1
X	EP,A,0 433 986 (HOECHT AG.) 26 June 1991 see claims; example 5 ---	1
A	EP,A,0 433 990 (HOECHST AG.) 26 June 1991 see claims; examples -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

18 July 1994

Date of mailing of the international search report

- 8. 08. 94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Loiselet-Taisne, S

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 94/03060

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9112285	22-08-91	AU-A- 7324491 EP-A- 0513216 JP-T- 5503546	03-09-91 19-11-92 10-06-93
DE-A-4130429	18-03-93	WO-A- 9306145	01-04-93
EP-A-0433986	26-06-91	DE-A- 3942365 AU-B- 646826 AU-A- 6830090 JP-A- 4114050 US-A- 5232993	27-06-91 10-03-94 27-06-91 15-04-92 03-08-93
EP-A-0433990	26-06-91	DE-A- 3942364 AU-B- 647433 AU-A- 6830190 US-A- 5280074	27-06-91 24-03-94 27-06-91 18-01-94