

(51) International Patent Classification:

F01L 7/02 (2006.01) F01L 7/08 (2006.01)

(21) International Application Number:

PCT/EP2019/073575

(22) International Filing Date:

04 September 2019 (04.09.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1814488.1 06 September 2018 (06.09.2018) GB
1814524.3 06 September 2018 (06.09.2018) GB

(71) Applicant: **RCV ENGINES LIMITED** [GB/GB]; 4
Telford Road Ferndown Industrial Estate, Wimborne Dorset
BH21 7QL (GB).

(74) Agent: **JENSEN & SON**; 366-368 Old Street, London
EC1V9LT (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the identity of the inventor (Rule 4.17(i))

Published:

— with international search report (Art. 21(3))

(54) Title: A ROTARY VALVE INTERNAL COMBUSTION ENGINE

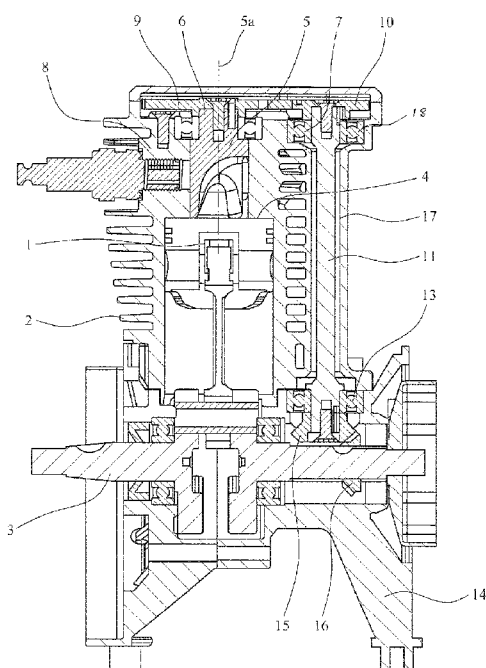


FIG. 1

(57) Abstract: A rotary valve internal combustion engine A rotary valve internal combustion engine has a piston (1) connected to a crankshaft (3) and reciprocating in a cylinder (2), a combustion chamber (4) being defined in part by the piston. The engine has a rotary valve (5) rotatable in a valve housing (8) fixed relative to the cylinder (2), the rotary valve having a valve body (9) containing a volume (9) defining, in part, the combustion chamber 4 and further having in a wall part (11) thereof a port (12) giving, during rotation of the valve, fluid communication successively to and from the combustion chamber via inlet and exhaust ports (13, 14) in the valve housing. The valve body has a non-uniform radial profile along its axial length and/or about its axis of rotation to accommodate changes in the profile of the valve body during operation to maintain a substantially constant clearance between the valve body and the housing throughout the length of the valve body.

A Rotary valve internal combustion engine

The present invention relates to a rotary valve internal combustion engine in which the control of the intake and exhaust of combustion gases is achieved by means of a rotary valve.

Such rotary valves are known, for example in the applicant's Patent No. GB 2467947B. Rotary valve engines are known to have problems of sealing as there is a conflict between minimising the clearances between the relatively rotating bodies, which improves efficiency, but runs the increasing risk of overheating and seizing. Attempts have been made for many years to make a commercially acceptable engine utilising rotary valves, notably by Aspin, but these have mostly been unsuccessful. In the prior art, such as DE 4217608 A1 and DE 4040936 A1, this conflict is recognised and attempts to solve the problem are made by providing complex cooling arrangements or simply saying the problem is solved by using suitable materials. In practice, larger than desired clearances are provided to reduce the risk of seizing, at the cost of reducing the efficiency of the engine and increased emissions, which creates difficulties in meeting current regulations and customer expectations

There is an inherent problem in reducing the gap because of the differential thermal expansion between the rotary valve body and the valve housing caused, in part, by the higher temperatures that the rotary valve body reaches compared to the valve housing. This is caused in part by the fact that the valve body is located in the combustion chamber at the point of maximum temperature generation, and also has poorer thermal pathways through which to conduct the heat away to the outside world. In contrast the valve housing has the advantage that it is able to conduct the heat away directly by the provision of external cooling means such as fins or water cooling.

The present invention seeks to provide means to overcome the known problems.

According to the present invention there is provided a rotary valve internal combustion engine comprising: a piston connected to a crankshaft which piston reciprocates in a cylinder, the cylinder having a combustion end, a combustion chamber being defined in part by the piston and the combustion end of the cylinder, a valve housing fixed at an outer portion of the combustion end of the cylinder and defining a bore and a generally cylindrical rotary valve rotatable about a rotary valve axis with a close sliding fit in the bore in the valve housing, the rotary valve having a hollow valve body having an interior volume forming a part of the combustion chamber, wherein the interior volume of the hollow valve body is subjected to combustion gases throughout the combustion process, and further

having in a wall part thereof a port giving, during rotation of the valve, fluid communication successively to and from the combustion chamber via inlet and exhaust ports in the valve housing, a sealing function being carried out between the surface of the main body of the rotary valve and a contiguous surface of the bore in the valve housing, wherein the sealing function is carried out between the surface of the body of the rotary valve and the surface of the valve housing only, wherein the valve body has a non-uniform radial profile along its axial length and/or about its axis of rotation to accommodate changes in the profile of the valve body during operation generated by the temperature gradient along the length of the valve body, thereby to maintain a substantially constant clearance between the valve body and the housing throughout the contiguous length of the valve body.

In a preferred embodiment, the valve body is tapered along its axial extent with the diameter of the valve at its open end in the combustion chamber being smaller at ambient temperature than the diameter at its end remote from the combustion chamber to accommodate changes in the profile of the valve body during operation.

The valve body may be frusto-conical along at least part of its length.

Preferably, in another embodiment, the valve has a concentric driveshaft mounted in the valve housing so as to allow a slight degree of radial movement of the valve in the valve housing so that the valve acts as an active seal valve.

In this embodiment, the end of the valve driveshaft adjacent the valve body has a reduced diameter to allow said slight degree of radial movement of the valve in the valve housing.

In a further embodiment, there is shown a rotary valve internal combustion engine comprising: a piston connected to a crankshaft which piston reciprocates in a cylinder, the cylinder having a combustion end, a combustion chamber being defined in part by the piston and the combustion end of the cylinder, a valve housing fixed at an outer portion of the combustion end of the cylinder and defining a bore and a generally cylindrical rotary valve rotatable about a rotary valve axis with a close sliding fit in the bore in the valve housing, the rotary valve having a hollow valve body having an interior volume forming a part of the combustion chamber, wherein the interior volume of the hollow valve body is subjected to combustion gases throughout the combustion process, and further having in a wall part

thereof a port giving, during rotation of the valve, fluid communication successively to and from the combustion chamber via inlet and exhaust ports in the valve housing, a sealing function being carried out between the surface of the main body of the rotary valve and a contiguous surface of the bore in the valve housing, wherein the sealing function is carried out between the surface of the body of the rotary valve and the surface of the valve housing only, wherein the valve body has a constant diameter along its length contiguous with the valve housing and the valve housing has a non-uniform radial profile along its axial length and/or about its axis of rotation to accommodate changes in the profile of the valve body during operation generated by the temperature gradient along the length of the valve body, thereby to maintain a substantially constant clearance between the valve body and the housing throughout the contiguous length of the valve body.

Preferred embodiments of the present invention will now be described by way of example with reference to the accompanying drawings, in which:-

Figure 1 shows a cross-sectional view of a single cylinder air cooled engine,
Figure 2 is a schematic view of one embodiment of the rotary valve body.

Referring now to Figure 1, there is shown a single cylinder air cooled engine. The engine has a cylinder housing containing the cylinder 2. A piston 1 is connected in the conventional manner to a crankshaft 3 mounted for rotation in a crankcase 14 for reciprocation in the cylinder 2. The upper part of the cylinder 2 is closed by a combustion chamber 4 in a combustion chamber housing. The flow of inlet air/fuel mix and exhaust gas into and out of the combustion chamber 4 is controlled by a rotary valve 5. In this embodiment, the valve 5 is rotatable in a valve housing 8 in the combustion chamber housing about an axis 5a which is co-axial with the axis of the cylinder 2. In other embodiments, the axis of rotation of the valve body is offset from the axis 5a of the cylinder 2.

At its end remote from the combustion chamber 4, the rotary valve 5 has a concentric drive shaft 6 carrying a single race ball bearing 7 which rotatably supports the valve 5 in the valve housing 8. The valve driveshaft 6 is secured to a coaxial driven gear 9 which meshes with a drive gear 10 of a drive arrangement 11 through which the driven gear 9 and hence the rotary valve 5 is connected to the crankshaft 3. The drive arrangement 11 includes a drive shaft 12 which is located in a channel or tube 17 in the cylinder housing and mounted for rotation in an upper bearing 18 adjacent the drive gear 10 and a lower bearing 13 adjacent the crankshaft 3. The driveshaft 11 carries a bevel gear 15 which

meshes with a corresponding bevel gear 16 secured on the crankshaft for rotation with the crankshaft 3. Thus, the rotation of the crankshaft 3 and hence the piston movement is coordinated with the rotation of the rotary valve 5 so that the engine operates on the conventional four stroke cycle. To achieve this, the diameter of the driven gear 9 is twice that of the drive gear 10 so that the rotary valve 5 rotates at half engine speed.

Referring now to Figure 2 also, there is shown more detail of the rotary valve 5 which comprises a generally cylindrical rotary valve body 5 rotatable about a rotary valve axis 5a with a close sliding fit in the bore in the valve housing 8, the rotary valve 5 having a hollow valve body having an interior volume 19 forming a part of the combustion chamber. The valve has a generally cylindrical body part comprising the valve body 19 itself which is slightly larger in diameter than the shaft 6, which forms a shoulder 14 against which the inner race of the ball bearing 7 is located. The valve body 19 extends into the combustion chamber and has in its interior a volume 20 which forms part of the combustion chamber 4 and which is subject to combustion gases at all stages of the combustion process. The valve body 19 is rotatable in the bore in a valve housing 8 with a close sliding fit. The valve body has a nonuniform profile along its axial length and/or about its axis of rotation to accommodate changes in the profile of the valve body during operation. In this embodiment, the diameter of the valve body is tapered in a frusto-conical manner and at ambient temperatures has a smaller diameter at the lower peripheral edge 22 of the wall 23 of the valve body which projects into the combustion chamber. The taper is designed to compensate for differing expansion of the valve along its axial length in use caused principally by the temperature gradient along the length of the valve which occurs in practice. In this way, in normal operating conditions, the peripheral gap between the valve body and the bore in which it rotates remains substantially constant throughout the length of the valve body. Furthermore, the rotational cross-section of the valve body may be non-uniform to accommodate variations in temperature across the diameter of the valve such as may occur in the region of the peripheral edges of the port 21. These edges may have a slightly smaller diametral extent to compensation for the heat concentration which inevitably occurs at such edges. These measures effectively eliminate the risk of seizing of the engine due to local hot spots which may occur, for example, at these edges. Although described as having a tapered body, the taper may not be uniform throughout the length of the valve, but will be determined by the actual temperature gradient along the axial extent of the valve which occurs in normal use.

This embodiment has a constant diameter for the bore in the housing with the shaping being carried out on the valve, body but it will be understood that the valve body may be cylindrical with the bore in

the housing having a shaped profile. Because of the different heat dissipation characteristics of the housing compared with the valve body, the shaping of the housing will be different from the shaping necessary when it is on the valve body. The objective is to ensure that the clearance between the valve body and the housing is kept as constant, and as small, as possible throughout its length to maximise the engine efficiency for maximum power and at the same time minimising its emissions. The valve 5 and the valve housing 8 are formed of aluminium.

The shaft 6 part of the rotary valve 5 is only slightly smaller in diameter than the valve body 19 to provide the shoulder 14. The shaft is solid to provide a good path for conducting heat from the valve body 19 to the exterior. Adjacent the shoulder 14, the shaft 6 has a slight undercut to enable slight radial movement of the valve body so that during the combustion stages the combustion pressure when it is high, serves to bias the valve port towards the outlet port in the valve housing so that the valve acts as an active seal reducing gas leakage.

The rotary valve body 19 has a port 21 which, during rotation of the valve, enables fluid communication successively to and from the interior volume of the valve and hence the combustion chamber via inlet and exhaust ports in the valve housing. In this embodiment the port is in the form of a recess formed in the lower peripheral edge 22 of the wall 23 of the valve body adjacent to the combustion chamber 4 the recess extending upwardly from this lower edge of the wall of the valve to form the port 21 in the side of the valve.

In the present embodiment, it is the profile of the valve body which is non-uniform which rotates in a uniform cylindrical bore in the valve housing. In an alternative construction it is possible for the profile of the valve body to be a uniform constant diameter cylindrical form with the non-uniform profile being formed in the bore in the valve housing.

Although described as a single cylinder engine, it will be understood that the invention is equally applicable to multi cylinder engines which may be of in-line, Vee or horizontally opposed configuration. Furthermore, although described as a spark ignition engine the invention is equally applicable to a compression ignition engine.

Although the example given is for an engine with the axis of rotation of the rotary valve coaxial with or parallel to the axis of the cylinder, it will be understood that axis of rotation of the valve could be

angularly offset from the axis of the cylinder. The invention is equally applicable to rotary valve engines where the axis of rotation of the valve is parallel to the axis of rotation of the crankshaft, or indeed at any intermediate angle.

According to a further embodiment, there is provided a rotary valve internal combustion engine operating on the four stroke cycle comprising: a piston connected to a crankshaft located in a crankcase which piston reciprocates in a cylinder, the cylinder having a combustion end, a combustion chamber being defined in part by the piston and the combustion end of the cylinder, a valve housing fixed at an outer portion of the combustion end of the cylinder and defining a bore and a rotary valve rotatable about a rotary valve axis in the bore in the valve housing, the rotary valve having a hollow valve body having an interior volume forming a part of the combustion chamber, wherein the interior volume of the hollow valve body is subjected to combustion gases throughout the combustion process, and further having in a wall part thereof a port giving, during rotation of the valve, fluid communication successively to and from the combustion chamber via inlet and exhaust ports in the valve housing wherein a fluid passage is provided between the inlet port and the crankcase.

Preferably, a carburettor is connected to the inlet tract to provide a fuel air mix to the inlet tract, the fluid passage being connected to the inlet tract downstream of the carburettor. The fluid passage may comprise a pipe.

The further embodiment will now be described by way of example with reference to Figure 3 which shows a perspective view of the underside of the engine of Figure 1.

Referring now to Figure 3 there is shown a perspective underside view of the engine according to Figure 1 showing the crankcase 3 and a carburettor 26 connected to an inlet tract 52 downstream of the carburettor 26 and hence to a fluid connection to the inlet port 27 of the engine. A fluid connection between inlet tract 52 and the crankcase 3 is formed by a pipe 51 which is connected to the crankcase 3 by a connection 53 adjacent to the bevel gears 15, 16 of the drive arrangement 11.

The fluid connection between the crankcase and the inlet tract allows blow-by gases in the crankcase generated by leakage of combustion gases past the piston during combustion, to be vented into the inlet tract and hence to the inlet port 27. In operation, during each upward stroke of the piston a negative pressure is generated in the crankcase caused by the increase in crankcase volume and this will draw a small amount of inlet gas from the inlet tract into the crankcase. This inlet gas will mix with the crankcase gases. During each downward stroke of the piston which reduces the crankcase volume, a small amount of the crankcase gas will be expelled into the inlet tract. This will allow an

equilibrium between inlet mixture and crankcase mixture to build up in the crankcase ensuring the lubrication of the crankcase.

CLAIMS

1. A rotary valve internal combustion engine comprising: a piston connected to a crankshaft which piston reciprocates in a cylinder, the cylinder having a combustion end, a combustion chamber being defined in part by the piston and the combustion end of the cylinder, a valve housing fixed at an outer portion of the combustion end of the cylinder and defining a bore and a generally cylindrical rotary valve rotatable about a rotary valve axis with a close sliding fit in the bore in the valve housing, the rotary valve having a hollow valve body having an interior volume forming a part of the combustion chamber, wherein the interior volume of the hollow valve body is subjected to combustion gases throughout the combustion process, and further having in a wall part thereof a port giving, during rotation of the valve, fluid communication successively to and from the combustion chamber via inlet and exhaust ports in the valve housing, a sealing function being carried out between the surface of the main body of the rotary valve and a contiguous surface of the bore in the valve housing, wherein the sealing function is carried out between the surface of the body of the rotary valve and the surface of the valve housing only wherein the valve body has a non-uniform radial profile along its axial length and/or about its axis of rotation to accommodate changes in the profile of the valve body during operation generated by the temperature gradient along the length of the valve body, thereby to maintain a substantially constant clearance between the valve body and the housing throughout the contiguous length of the valve body.
2. A rotary valve internal combustion engine according to claim 1 in which the valve body is tapered along its axial extent with the diameter of the valve at its open end in the combustion chamber being smaller at ambient temperature than the diameter at its end remote from the combustion chamber to accommodate changes in the profile of the valve body during operation.
3. A rotary valve internal combustion engine according to claim 1 or 2, wherein the valve body is frusto-conical along at least part of its length.
4. A rotary valve internal combustion engine according to any one of the preceding claims, wherein the valve has a concentric driveshaft mounted in the valve housing so as to allow a slight degree of radial movement of the valve in the valve housing so that the valve acts as an active seal valve.

5. A rotary valve internal combustion engine according to claim 4 wherein the end of the valve driveshaft adjacent the valve body has a reduced diameter to allow said slight degree of radial movement of the valve in the valve housing.

6. A rotary valve internal combustion engine comprising: a piston connected to a crankshaft which piston reciprocates in a cylinder, the cylinder having a combustion end, a combustion chamber being defined in part by the piston and the combustion end of the cylinder, a valve housing fixed at an outer portion of the combustion end of the cylinder and defining a bore and a generally cylindrical rotary valve rotatable about a rotary valve axis with a close sliding fit in the bore in the valve housing, the rotary valve having a hollow valve body having an interior volume forming a part of the combustion chamber, wherein the interior volume of the hollow valve body is subjected to combustion gases throughout the combustion process, and further having in a wall part thereof a port giving, during rotation of the valve, fluid communication successively to and from the combustion chamber via inlet and exhaust ports in the valve housing, a sealing function being carried out between the surface of the main body of the rotary valve and a contiguous surface of the bore in the valve housing, wherein the sealing function is carried out between the surface of the body of the rotary valve and the surface of the valve housing only, wherein the valve body has a constant diameter along its length contiguous with the valve housing and the valve housing has a non-uniform radial profile along its axial length and/or about its axis of rotation to accommodate changes in the profile of the valve body during operation generated by the temperature gradient along the length of the valve body, thereby to maintain a substantially constant clearance between the valve body and the housing throughout the contiguous length of the valve body.

-1/3-

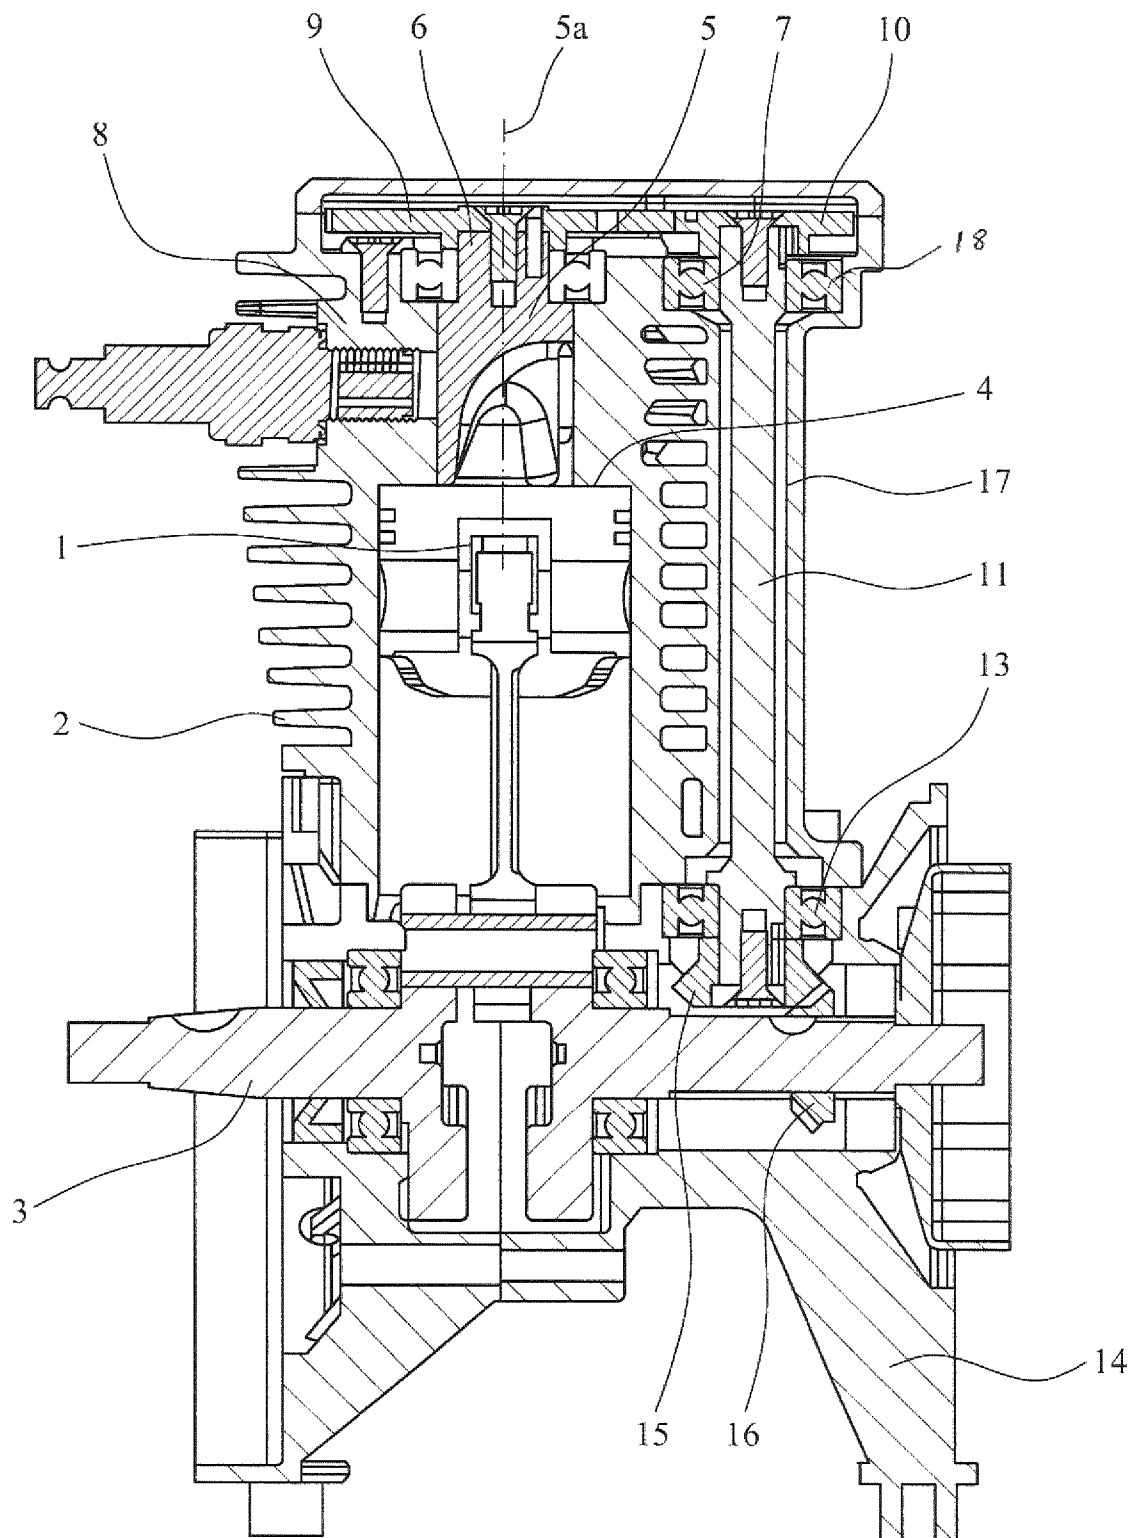


FIG. 1

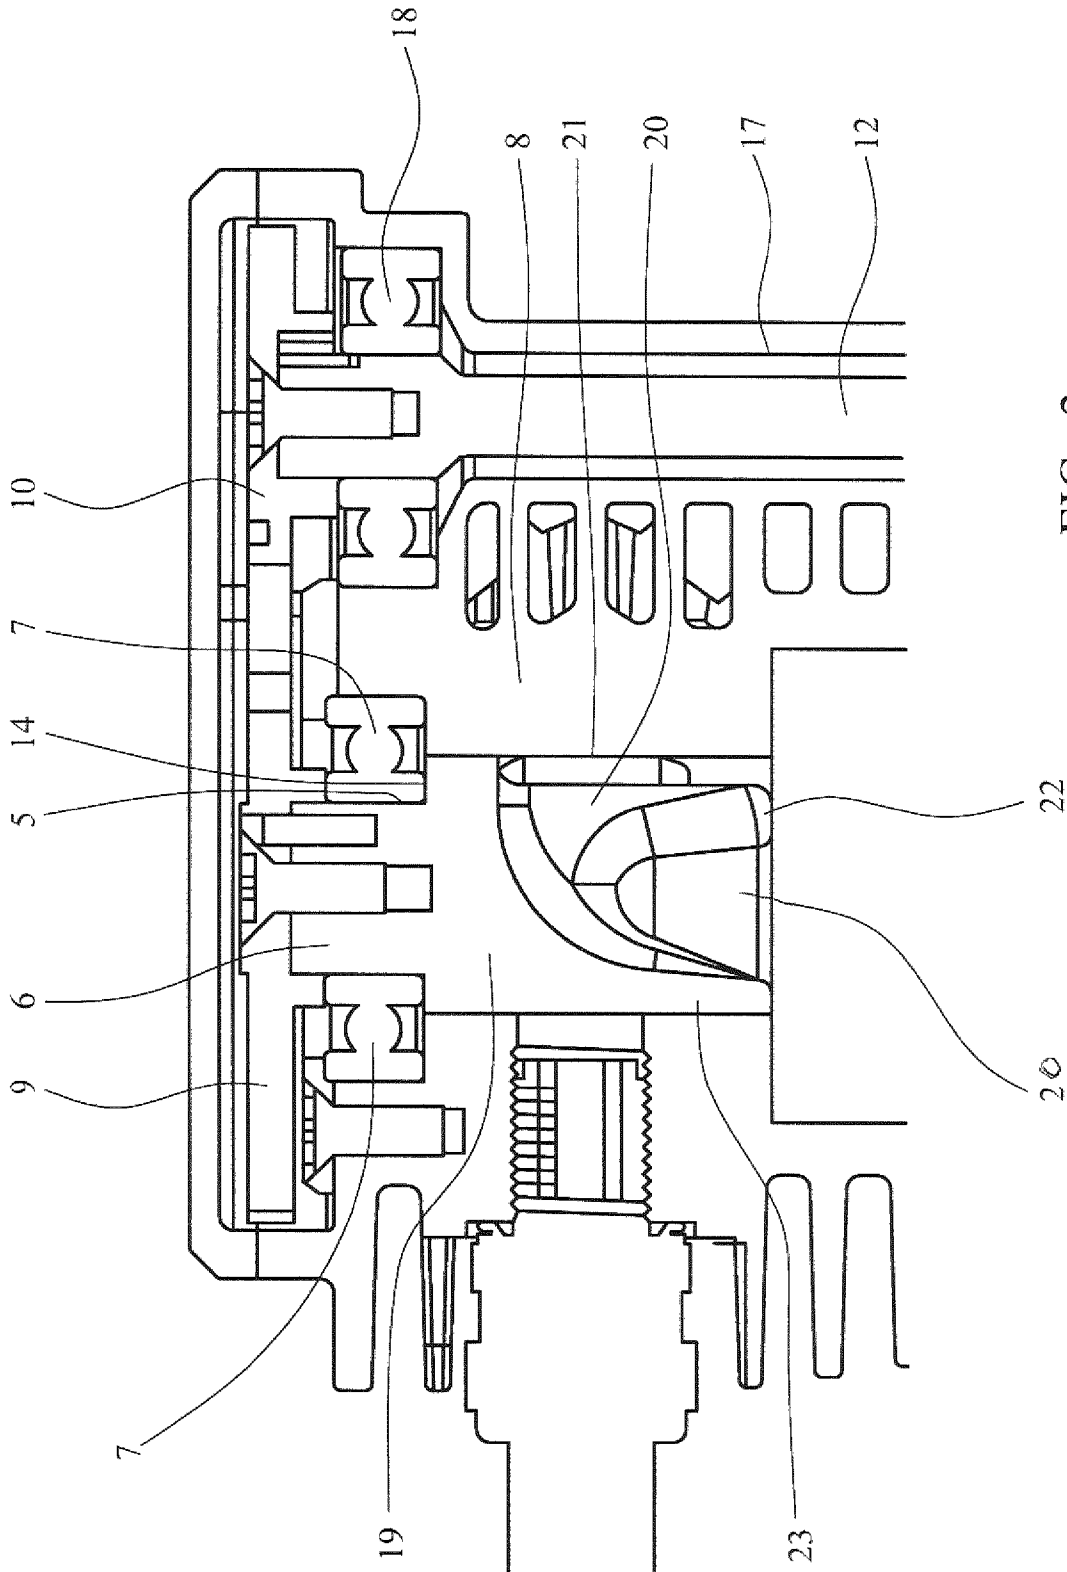


FIG. 2

-3/3-

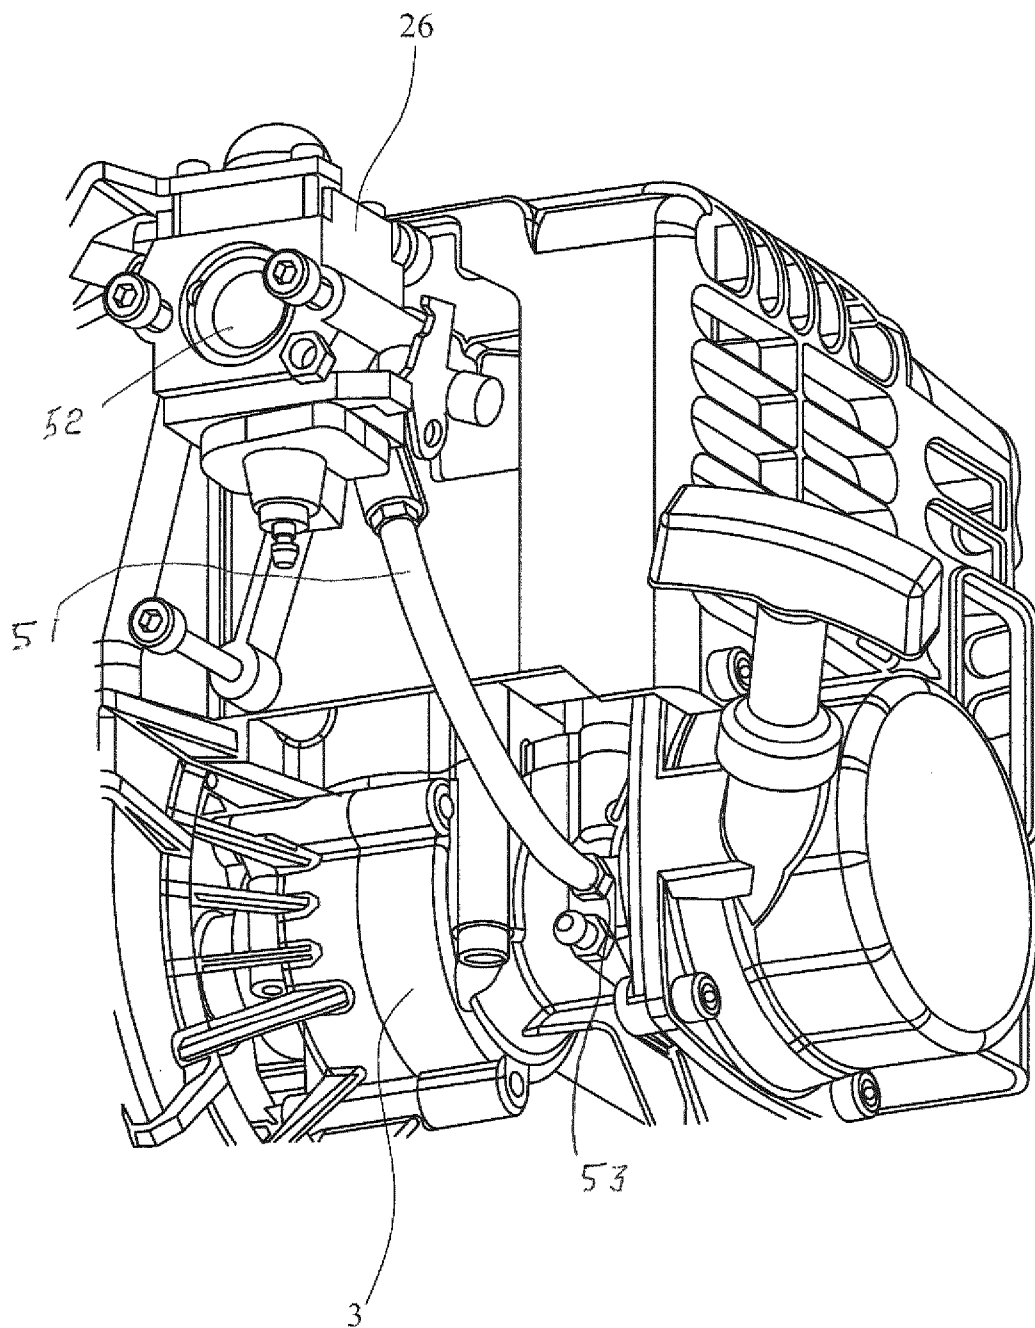


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/073575

A. CLASSIFICATION OF SUBJECT MATTER
INV. F01L7/02 F01L7/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 146 528 A (ROLAND CHILTON) 7 February 1939 (1939-02-07) figures 1-4	1-6
X	GB 2 467 947 A (RCV ENGINES LTD [GB]) 25 August 2010 (2010-08-25) figures 1-3 page 4, lines 1-15	1-6
X	DE 820 652 C (HERRMANN HEINRICH) 12 November 1951 (1951-11-12) figure 1	1-6
X	US 473 685 A (C.V. WEISS) 26 April 1892 (1892-04-26) figures 1,3	1-6
	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 October 2019

Date of mailing of the international search report

23/10/2019

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Aubry, Yann

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2019/073575

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 40 40 936 A1 (KLOECKNER HUMBOLDT DEUTZ AG [DE]) 25 June 1992 (1992-06-25) cited in the application figure 3 -----	1-6

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/073575

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2146528	A	07-02-1939	NONE

GB 2467947	A	25-08-2010	CN 102325969 A 18-01-2012
		EP 2399009 A1 28-12-2011	
		GB 2467947 A 25-08-2010	
		JP 5497796 B2 21-05-2014	
		JP 2012518739 A 16-08-2012	
		KR 20120011844 A 08-02-2012	
		US 2011308491 A1 22-12-2011	
		WO 2010094917 A1 26-08-2010	

DE 820652	C	12-11-1951	NONE

US 473685	A	26-04-1892	NONE

DE 4040936	A1	25-06-1992	NONE
