



(11) **EP 2 372 254 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
26.06.2019 Bulletin 2019/26

(51) Int Cl.:
F24C 15/20^(2006.01)

(21) Application number: **10003438.8**

(22) Date of filing: **30.03.2010**

(54) **RANGE COMPRISING A HOUSING WALL AND AN ASSEMBLY FOR MOUNTING A VENTING DUCT IN SAID HOUSING WALL**

HERD UMFASSEND EINE GEHÄUSEWAND UND EINE EINHEIT ZUR MONTAGE EINES
BELÜFTUNGSKANALS IN DIE GEHÄUSEWAND

CUISINIÈRE COMPRENANT UN COUVERCLE ET UN ENSEMBLE POUR ASSEMBLER UN
CONDUIT D'AÉRATION DANS LA FACE DU COUVERCLE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(43) Date of publication of application:
05.10.2011 Bulletin 2011/40

(73) Proprietor: **Electrolux Home Products
Corporation N.V.
1130 Brussels (BE)**

(72) Inventors:
• **Echtler, Werner
90763 Fürth (DE)**

• **Wälzlein, Klaus
91126 Schwabach (DE)**

(74) Representative: **Electrolux Group Patents
AB Electrolux
Group Patents
105 45 Stockholm (SE)**

(56) References cited:
**EP-A1- 0 391 762 EP-A1- 1 609 637
DE-A1-102004 050 614**

EP 2 372 254 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a range comprising a housing wall and an assembly for mounting a venting duct in said housing wall.

[0002] In ranges or ovens for preparing food often venting ducts are provided for the removal of vapors from the oven muffle.

[0003] For example, from EP 0 834 702 B1 or DE 10200405614 there is known a device for removing fumes from an oven muffle, which device comprises a flexible fume tube which is connected to the oven muffle and a holding device for mounting the outlet end of the fume tube.

[0004] It is an object of the present invention to provide for a range comprising a housing wall and an assembly for mounting a venting duct in said housing wall which facilitates mounting of the venting duct and which thus allows an easy but yet fast and secure mounting of the venting duct. Furthermore, it is an object of the present invention to provide for a range comprising a housing wall and an assembly for mounting a venting duct in said housing wall which allows secure mounting of venting ducts at differing thicknesses of the housing wall of the household appliance where the venting duct is to be mounted.

[0005] In accordance with the present invention the above objects are solved by a range comprising a housing wall and an assembly for mounting a venting duct in the housing wall as it is defined in claim 1.

[0006] In accordance with the present invention the outlet end of the connector member and the mounting portion of the outlet member are adapted for snap-fit connection, that is these two members are designed such that one of the two members has at least one projection which in the assembled state projects into a corresponding recess or depression of the respective other member, wherein during assembling the two members at least one of the two members is temporarily deformed until the projection snaps into the corresponding recess or depression that is provided at the respective other member.

[0007] With the outlet member and the connector being held together by snap-fit connection, the mounting of the assembly can be done simply by pushing these two parts together, that is fast and efficiently and without the need for any specific tools. With further the connector member comprising biasing means, which in the assembled state rests resiliently against the inner side of the housing wall, the connector member and hence the entire assembly is permanently and securely held at the housing wall of the household appliance irrespective of the thickness of the housing wall. In this manner, the assembly is fixedly held and compensates tolerances in the thickness of the housing wall of the household appliance. Furthermore, the design of the assembly suggested herein allows to use one and the same type of assembly for different housing types of the household appliance, such as for different

models of a household appliance, such as a range or a hob, which is offered with different housing or frame materials such as a stainless steel and enameled metal, wherein the stainless steel housing provides for thinner housing walls than the enameled metal housing.

[0008] Preferred embodiments of the present invention are defined in the dependent claims.

[0009] In particular, while in preferred embodiments the venting duct is a fume tube for connection to an oven muffle, such as in an electric or gas fired range or in a microwave oven, the assembly also can be applied to advantage in other household appliances, such as refrigerators or the like.

[0010] The biasing means can comprise a plurality of resilient tabs, which laterally project from the connector member. While such tabs could be spring-loaded members, resiliency of the tabs preferably is provided by the selection of the material and geometry of the connector member. A particularly cost-effective solution consists in designing the connector member as a molded plastic member, wherein the resilient tabs are formed as an integral part of the connector member.

[0011] Preferably, the abutment member comprises a rim which extends along the circumference of the mounting portion of the outlet member. Since the outlet member usually is mounted within an opening of the housing wall of the household appliance, which opening is slightly larger than the cross-section of the mounting portion, such a circumferential rim, in addition to providing for an abutment surface, serves the double purpose of hiding the gap which is formed between the inner wall of the opening in the housing wall and the outer circumference of the mounting portion inserted therein.

[0012] In preferred embodiments the inlet end of the connector member and the venting duct are provided with means for snap-fit connection between the connector member and the venting duct. Thus, similarly as was the case for the mounting of the outlet member and the connector member, providing for a snap-fit connection also allows a quick and simple mounting operation, which does not require any specific mounting tools and also obviates the need to apply any separate fixing means to secure the connection, such as screws, clamps, brackets or the like.

[0013] In order to provide for a snap-fit connection between the connector member and the venting duct, the connector member, at its inlet end, can be provided with latch members for engaging respective latch surfaces, which are provided at the venting duct. The latch members in such embodiments can comprise resilient tabs which are provided in a circumferential wall of the connector member. For example, if the connector member is a molded plastic component, wherein the plastic material provides for a certain elasticity, the latch members can be formed by providing a generally V-shaped or U-shaped break-through in the wall of the connector member so as to provide for generally V-shaped or U-shaped

resilient tabs, which at their tips comprise a latching projection, which, when sliding a venting duct above the inlet end of the connector member, engage a respective recess provided in the venting duct.

[0014] The material of the venting duct will be selected in dependency of the type of household appliance in which the venting duct is to be used. Particularly, if the household appliance is a range and the venting duct thus is a fume tube via which hot fumes can be removed from the oven muffle, the venting duct preferably is a metal tube, such as an aluminum tube.

[0015] In order to facilitate the mounting of the venting duct and also to provide for more flexibility of use of the venting duct, the venting duct preferably comprises a section of flexible tubing. In such case, the respective recess provided in the venting duct may be a depression of a corrugated inner wall of the flexible tubing. The assembly described above is of particular advantage when used in a range comprising such assembly in combination with an oven muffle or in a hob to be connected to an oven muffle of an oven and wherein the venting duct comprises a first end which is connected to the inlet end of the connector member and a second end which is connected to the oven muffle.

[0016] While in such a range the output member could be provided in any part of the housing of the range, the range preferably comprises a hob and a frame for mounting the hob, wherein the frame comprises an opening which is adapted to accommodate the mounting portion of the outlet member.

[0017] A preferred embodiment of the range suggested herein is described below by reference to the drawings, in which:

- FIG. 1 is an exploded perspective view of an assembly for mounting a venting duct in a range in accordance with the present invention;
- FIG. 2 is a side view of the assembly shown in FIG. 1 when mounted;
- FIG. 3 is a sectional view of the arrangement shown in FIG. 2; and
- FIG. 4 is a perspective view of a hob frame at which there is mounted an assembly as shown in FIGS. 1 to 3.

[0018] FIG. 1 shows the terminal end of a venting duct 10, which may be a fume tube for venting fumes from an oven muffle (not shown).

[0019] In order to provide for an easy-to-assemble arrangement for providing for an outlet of the venting duct 10 at a housing wall 12 of a household appliance, such as a range or an oven, there is provided an outlet member 14 having a generally tubular mounting portion 18 which is inserted from the exterior side of the housing through a correspondingly shaped opening 20 provided in the

housing wall 12. Outlet member 14 at its upper end comprises a venting outlet 22 which in the embodiment shown in the drawings further comprises a deflector 24 to impart a certain flow direction to the fumes exiting venting duct 10. Since in the embodiment shown in the drawings the mounting assembly is designed for use in a range wherein the outlet member is attached to the rear part of a hob frame 26 (see FIG. 4), deflector 24 is adapted to direct the fumes exiting the venting duct towards the front of the range, so that any fumes can be removed by an extractor hood as it often is provided above the hob.

[0020] As is further shown in FIGS. 1 to 3, outlet member 14 comprises a circumferential rim 30 which is located at the upper end of the mounting portion 18 and which acts as an abutment member with which output member 14 abuts against the upper surface of the housing wall 12 when the outlet member is inserted into opening 20.

[0021] As is shown in FIGS. 1 to 3, connector member 16, which in the embodiment shown in the drawings is a molded plastic part, comprises an upper section which is adapted for engagement with the outlet member 14 and with the lower side of housing wall 12, and further comprises a lower section which forms the inlet end of connector member 16 and which is adapted for connecting venting duct 10. Thus, the upper section of connector member 16, which constitutes the outlet end 32 of connector member 16 has an inner cross-section the shape of which corresponds to the outer cross-section of mounting portion 18 of outlet member 14. In the embodiment shown in the drawings the inlet end 34 of connector member 16 has a circular cross-section, which corresponds to the inner cross-section of venting duct 10.

[0022] In order to allow for a particularly quick and easy assembly of the individual components, outlet member 14 and connector member 16 are designed for snap-fit connection. To this end mounting portion 18 is provided at its front and rear sides with a centrally located recess 36 for engagement with correspondingly located latching projections 38 provided at the inner front and rear sides of the outlet end 32 of connector member 16 (see also FIG. 3).

[0023] In order to fixedly secure the mounting assembly at housing walls of varying thickness, connector member 16 at its upper end is provided with laterally projecting resilient tabs 40, which in the non-assembled state extend slightly upwards beyond the upper edge of the outlet end of connector member 16 and which in the assembled state bear against the lower side of housing wall 12. The mounting assembly thus can be used for different models of similar household appliances such as a range, which are manufactured for example either with a hob frame that is made of stainless steel or with an enameled hob frame.

[0024] In order to provide for simple and quick attachment of the venting duct to the connector member, also the connector member and the venting duct are adapted for snap-fit connection. To this end, connector member 16 comprises latch members 42, which in the embodi-

ment shown in FIGS. 1 to 3 are formed by providing a generally U-shaped recess 44 in the sidewall of the inlet end of connector member 16, wherein there is provided a latching projection 46 at the tip of tabs 42. Venting duct 10 is provided with correspondingly located recesses 48, which accommodate the latching members 46 when the venting duct 10 is pushed over the inlet end 34 of connector member 16.

[0025] In the central region of connector member 16 where the tubular inlet end merges into the outlet end there is provided a circumferential rim 50, which acts as stop for a venting duct that is slid onto the inlet end 34 of connector member 16.

[0026] As will be appreciated from the above description, the present invention provides for a mounting assembly, by which a venting duct can be mounted in a particularly simple and rapid manner in a housing wall of a household appliance, and which yet provides for a secure and play-free mounting of the assembly to housing walls of varying thickness.

List of reference signs

[0027]

10	venting duct
12	housing wall
14	outlet member
16	connector member
18	mounting portion
20	opening
22	venting outlet
24	deflector member
26	hob frame
30	abutment member
32	outlet end
34	inlet end
36	recess
38	latching projection
40	biasing tab
42	latch member
44	recess
46	latch surface
48	recess
50	stop

Claims

1. A range comprising a housing wall (12) and an assembly for mounting a venting duct (10) in said housing wall (12), the assembly comprising:
 - (a) an outlet member (14) comprising a venting outlet (22), a generally tubular mounting portion (18), and an abutment member (30) for abutment against the exterior side of said housing wall (12); and

(b) a connector member (16) comprising an inlet end (34) adapted for fixing said venting duct (10), and an outlet end (32) adapted for attachment to the mounting portion (18) of the outlet member (14);

characterized in that

(c) the outlet end (32) of said connector member (16) and the mounting portion (18) of said outlet member (14) are adapted for snap-fit connection, and

(d) said connector member (16) comprises biasing means (40) adapted to rest resiliently against the inner side of said housing wall (12) so as to exert a force which biases the connector member away from said housing wall.

2. The range of claim 1, wherein said venting duct (10) is a fume tube for connection to an oven muffle.
3. The range of claim 1 or 2, wherein said biasing means (40) comprises a plurality of resilient tabs laterally projecting from said connector member (16).
4. The range of any one of the preceding claims, wherein, in order to provide for a snap-fit connection between said connector member (15) and said outlet member (14), said mounting portion (18) of the outlet member (14) comprises at least one recess (36) and said connector member (16) comprises a latching projection (38), which in the assembled state of the assembly projects into said recess.
5. The range of claim 4, wherein said outlet member (14) has an oblong cross-section, and said recess (36) is provided in at least one of the wider sides of the oblong cross-section.
6. The range of any one of the preceding claims, wherein said abutment member (30) comprises a rim extending along the circumference of the mounting portion (18) of the outlet member (14).
7. The range of any one of the preceding claims, wherein said inlet end (34) of said connector member (16) and said venting duct (10) are provided with means (42, 48) for snap-fit connection between said connector member and said venting duct.

10. The range of any one of the preceding claims, wherein said outlet member (14) and/or said connector member (16) are molded plastic members.
11. The range of any one of the preceding claims, wherein said venting duct (10), at least in the section thereof which provides for connection to the inlet end (34) of the connector member, comprises a metal tube, preferably an aluminum tube.
12. The range of any one of the preceding claims, wherein said venting duct (10) comprises a section of flexible tubing.
13. The range of claim 12 in dependency on claim 8, wherein the latch surfaces (48) are portions of a corrugated inner wall of the flexible tubing.
14. The range of any one of the preceding claims, comprising an oven muffle, wherein said venting duct (10) comprises a first end which is connected to the inlet end (34) of said connector member (16) and a second end which is connected to the oven muffle.
15. The range of claim 14, further comprising a hob, and a frame (26) for mounting said hob, wherein the frame comprises an opening (20) adapted to accommodate the mounting portion (18) of said outlet member (14).

Patentansprüche

1. Herd umfassend eine Gehäusewand (12) und eine Anordnung zur Anbringung eines Entlüftungskanals (10) in der Gehäusewand (12), die Anordnung umfassend:
- (a) ein Auslasselement (14) umfassend einen Entlüftungsauslass (22), einen allgemein röhrenförmigen Befestigungsabschnitt (18) und ein Anlageelement (30) zur Anlage gegen die Außenseite der Gehäusewand (12); und
- (b) ein Verbinderelement (16) umfassend ein Einlassende (34), das zur Befestigung des Entlüftungskanals (10) geeignet ist, und ein Auslassende (32), das zur Anbringung des Befestigungsabschnitts (18) des Auslasselements (14) geeignet ist;
- dadurch gekennzeichnet, dass**
- (c) das Auslassende (32) des Verbinderelements (16) und der Befestigungsabschnitt (18) des Auslasselements (14) für eine Einrastverbindung geeignet sind, und
- (d) das Verbinderelement (16) Vorspannmittel (40) umfasst, das geeignet ist, spannkraftig gegen die Innenseite der Gehäusewand (12) an-

zuliegen, um eine Kraft auszuüben, die das Verbinderelement weg von der Gehäusewand vorspannt.

2. Herd nach Anspruch 1, wobei der Entlüftungskanal (10) ein Wrasenschlauch zur Verbindung mit einer Ofenmuffel ist.
3. Herd nach Anspruch 1 oder 2, wobei das Vorspannmittel (40) mehrere nachgiebige Laschen umfasst, die seitlich von dem Verbinderelement (16) abstehen.
4. Herd nach einem der vorhergehenden Ansprüche, wobei, um eine Einrastverbindung zwischen dem Verbinderelement (15) und dem Auslasselement (14) bereitzustellen, der Befestigungsabschnitt (18) des Auslasselements (14) mindestens eine Aussparung (36) umfasst und das Verbinderelement (16) einen Rastvorsprung (38) umfasst, der im zusammengeführten Zustand der Anordnung in die Aussparung hineinragt.
5. Herd nach Anspruch 4, wobei das Auslasselement (14) einen länglichen Querschnitt aufweist und die Aussparung (36) in mindestens einer der breiteren Seiten des länglichen Querschnitts vorgesehen ist.
6. Herd nach einem der vorhergehenden Ansprüche, wobei das Anlageelement (30) einen Rand umfasst, der sich den Umfang des Befestigungsabschnitts (18) des Auslasselements (14) entlang erstreckt.
7. Herd nach einem der vorhergehenden Ansprüche, wobei das Einlassende (34) des Verbinderelements (16) und der Entlüftungskanal (10) mit Mitteln (42, 48) für eine Einrastverbindung zwischen dem Verbinderelement und dem Entlüftungskanal versehen sind.
8. Herd nach Anspruch 7, wobei das Verbinderelement (16) an seinem Einlassende (34) Rastelemente (42) zum Eingreifen in entsprechende Rastflächen (48) umfasst, die am Entlüftungskanal (10) vorgesehen sind.
9. Herd nach Anspruch 8, wobei die Rastelemente (42) nachgiebige Laschen umfassen, die in einer Umfangswand des Verbinderelements (16) vorgesehen sind.
10. Herd nach einem der vorhergehenden Ansprüche, wobei das Auslasselement (14) und/oder das Verbinderelement (16) geformte Kunststoffelemente sind.
11. Herd nach einem der vorhergehenden Ansprüche, wobei der Entlüftungskanal (10) zumindest in des-

sen Abschnitt, der eine Verbindung mit dem Einlassende (34) des Verbinderelements bereitstellt, ein Metallrohr umfasst, vorzugsweise ein Aluminiumrohr.

12. Herd nach einem der vorhergehenden Ansprüche, wobei der Entlüftungskanal (10) einen Abschnitt aus flexiblem Schlauch umfasst.
13. Herd nach Anspruch 12 in Abhängigkeit von Anspruch 8, wobei die Rastflächen (48) Abschnitte einer gewellten Innenwand des flexiblen Schlauchs sind.
14. Herd nach einem der vorhergehenden Ansprüche, umfassend eine Ofenmuffel, wobei der Entlüftungskanal (10) ein erstes Ende, das mit dem Einlassende (34) des Verbinderelements (16) verbunden ist, und ein zweites Ende, das mit der Ofenmuffel verbunden ist, umfasst.
15. Herd nach Anspruch 14, ferner umfassend ein Kochfeld und einen Rahmen (26) zur Anbringung des Kochfelds, wobei der Rahmen eine Öffnung (20) umfasst, die geeignet ist, den Befestigungsabschnitt (18) des Auslasselements (14) aufzunehmen.

Revendications

1. Cuisinière comprenant une paroi de logement (12) et un ensemble pour monter un conduit d'aération (10) dans ladite paroi de logement (12), l'ensemble comprenant:

(a) un élément de sortie (14) présentant une sortie d'aération (22), une partie de montage essentiellement tubulaire (18) et un élément de butée (30) pour buter contre le côté extérieur de ladite paroi de logement (12); et
(b) un élément de connecteur (16) présentant une extrémité d'entrée (34) adaptée pour la fixation dudit conduit d'aération (10), et une extrémité de sortie (32) adaptée pour être attachée à la partie de montage (18) de l'élément de sortie (14);
caractérisée en ce que
(c) l'extrémité de sortie (32) dudit élément de connecteur (16) et la partie de montage (18) dudit élément de sortie (14) sont adaptées pour réaliser une connexion par encliquetage, et
(d) ledit élément de connecteur (16) comprend des moyens de poussée (40) adaptés pour s'appuyer de façon élastique contre le côté intérieur de ladite paroi de logement (12) de manière à exercer une force qui pousse l'élément de connecteur à l'écart de ladite paroi de logement.

2. Cuisinière selon la revendication 1, dans laquelle ledit conduit d'aération (10) est un tube pour fumée à connecter à une moufle de four.

- 5 3. Cuisinière selon la revendication 1 ou 2, dans laquelle lesdits moyens de poussée (40) comprennent une pluralité de languettes élastiques qui font saillie latéralement à partir dudit élément de connecteur (16).

- 10 4. Cuisinière selon l'une quelconque des revendications précédentes, dans laquelle, pour établir une connexion par encliquetage entre ledit élément de connecteur (15) et ledit élément de sortie (14), ladite partie de montage (18) de l'élément de sortie (14) comporte au moins un évidement (36) et ledit élément de connecteur (16) comprend une saillie de verrouillage (38) qui, dans l'état assemblé de l'ensemble, fait saillie dans ledit évidement.

- 20 5. Cuisinière selon la revendication 4, dans laquelle ledit élément de sortie (14) présente une section transversale oblongue, et ledit évidement (36) est prévu dans au moins un des côtés plus larges de la section transversale oblongue.

- 25 6. Cuisinière selon l'une quelconque des revendications précédentes, dans laquelle ledit élément de butée (30) comprend un rebord qui s'étend le long de la circonférence de la partie de montage (18) de l'élément de sortie (14).

- 30 7. Cuisinière selon l'une quelconque des revendications précédentes, dans laquelle ladite extrémité d'entrée (34) dudit élément de connecteur (16) et ledit conduit d'aération (10) sont pourvus de moyens (42, 48) pour réaliser une connexion par encliquetage entre ledit élément de connecteur et ledit conduit d'aération.

- 40 8. Cuisinière selon la revendication 7, dans laquelle ledit élément de connecteur (16), à son extrémité d'entrée (34), comprend des éléments de verrou (42) pour engager des surfaces de verrouillage respectives (48) prévues au niveau du conduit d'aération (10).

- 45 9. Cuisinière selon la revendication 8, dans laquelle lesdits éléments de verrou (42) comprennent des languettes élastiques prévues dans une paroi circonférentielle dudit élément de connecteur (16).

- 50 10. Cuisinière selon l'une quelconque des revendications précédentes, dans laquelle ledit élément de sortie (14) et/ou ledit élément de connecteur (16) est (sont) un (des) élément(s) en plastique moulé.

- 55 11. Cuisinière selon l'une quelconque des revendications précédentes, dans laquelle ledit conduit d'aé-

ration (10), au moins dans la section de celui-ci qui établit la connexion à l'extrémité d'entrée (34) de l'élément de connecteur, comprend un tube de métal, de préférence un tube d'aluminium.

5

- 12.** Cuisinière selon l'une quelconque des revendications précédentes, dans laquelle ledit conduit d'aération (10) comprend une section de tubage souple.

- 13.** Cuisinière selon la revendication 12 quand elle dépend de la revendication 8, dans laquelle les surfaces de verrouillage (48) sont des parties d'une paroi intérieure ondulée du tubage souple.

10

- 14.** Cuisinière selon l'une quelconque des revendications précédentes, comprenant un moufle de four, dans laquelle ledit conduit d'aération (10) présente une première extrémité qui est connectée à l'extrémité d'entrée (34) dudit élément de connecteur (16) et une seconde extrémité qui est connectée au moufle de four.

15

20

- 15.** Cuisinière selon la revendication 14, comprenant en outre une plaque de cuisson et un cadre (26) pour monter ladite plaque de cuisson, dans lequel le cadre comporte une ouverture (20) qui est adaptée pour recevoir la partie de montage (18) dudit élément de sortie (14).

25

30

35

40

45

50

55

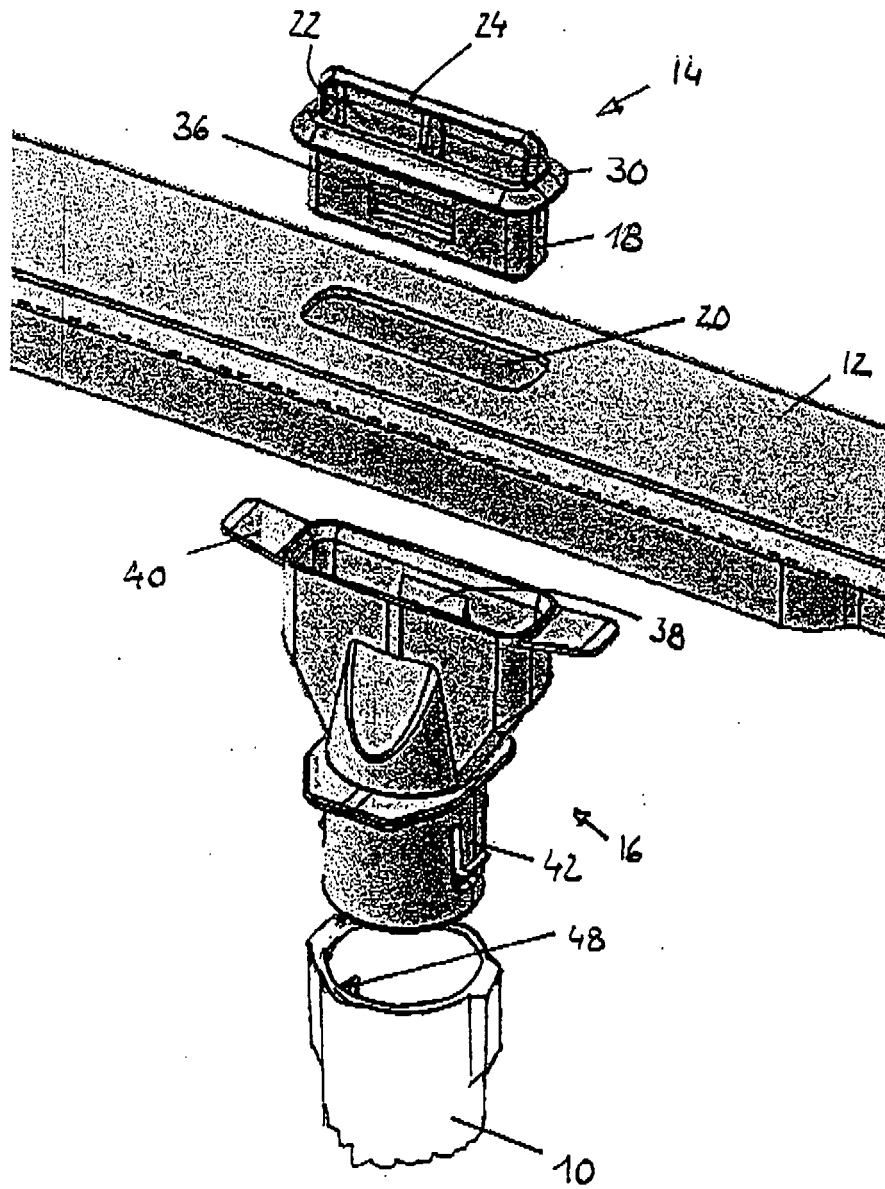


FIG. 1

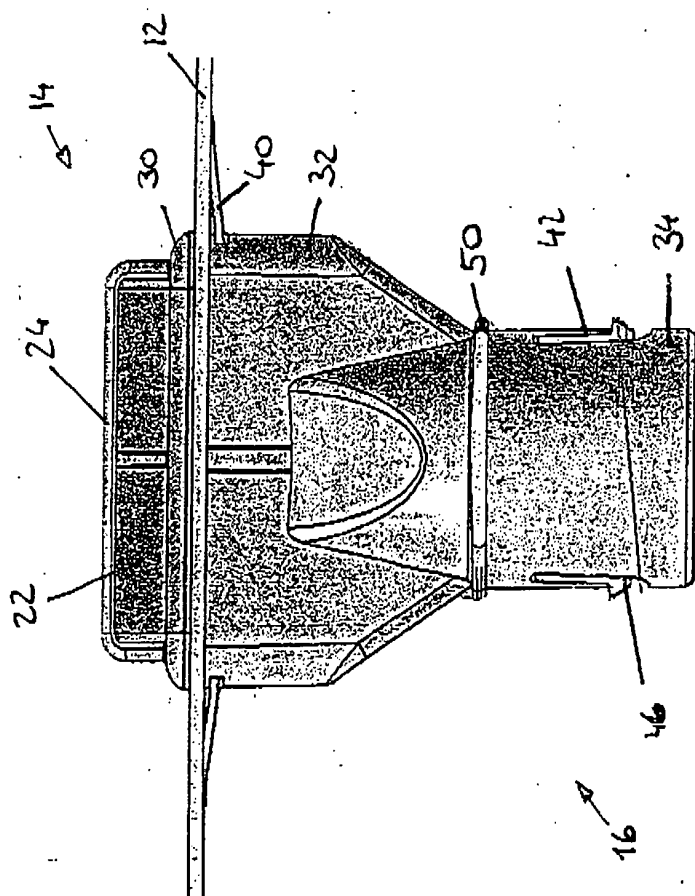


Fig. 2

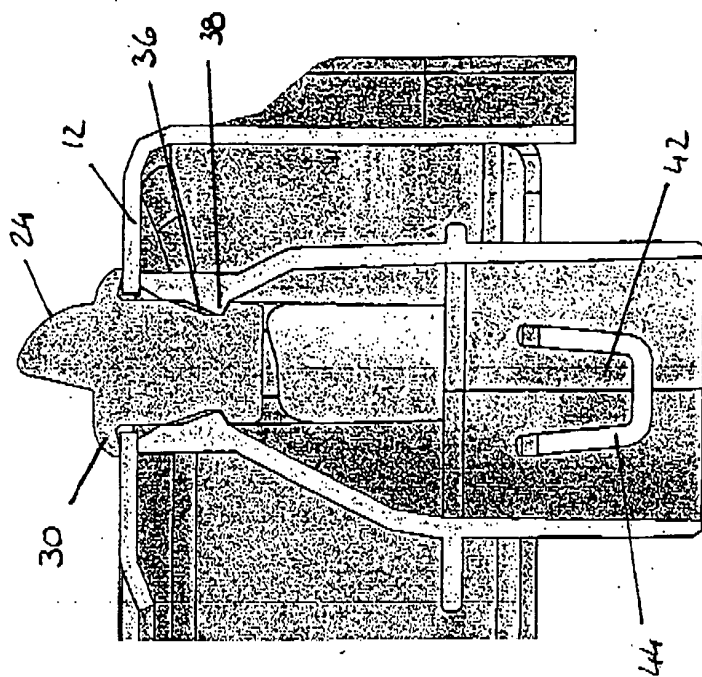


Fig. 3

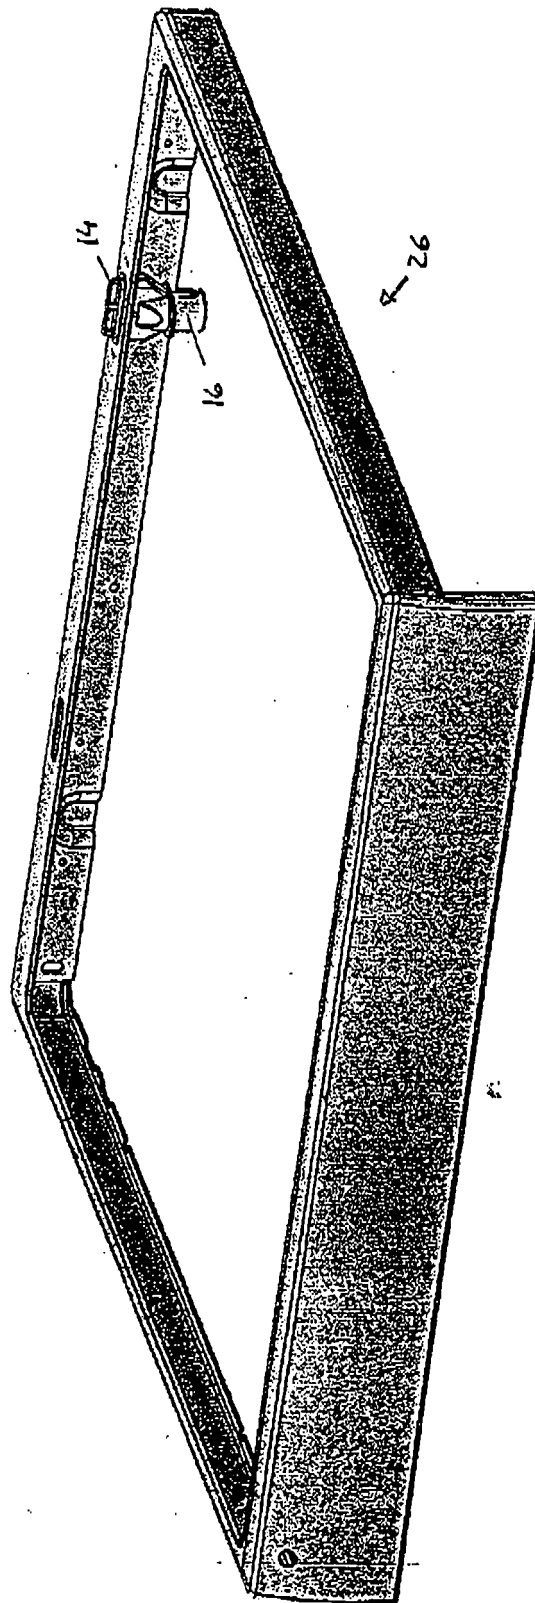


FIG. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0834702 B1 [0003]
- DE 10200405614 [0003]