

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/018879 A1

(51) International Patent Classification⁷: **F04C 29/10**,
13/00

(21) International Application Number:
PCT/JP2003/010207

(22) International Filing Date: 11 August 2003 (11.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002-239728 20 August 2002 (20.08.2002) JP

(71) Applicant (for all designated States except US): **EBARA
CORPORATION** [JP/JP]; 11-1, Haneda Asahi-cho,
Ohta-ku, Tokyo 144-8510 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **IJIMA, Naoki**

[JP/JP]; c/o Ebara Densan Ltd., 11-1, Haneda Asahi-cho,
Ohta-ku, Tokyo 144-8575 (JP). **WATANABE, Jiro**
[JP/JP]; c/o Ebara Densan Ltd., 11-1, Haneda Asahi-cho,
Ohta-ku, Tokyo 144-8575 (JP). **CHINO, Hiroyuki**
[JP/JP]; c/o Ebara Densan Ltd., 11-1, Haneda Asahi-cho,
Ohta-ku, Tokyo 144-8575 (JP). **YANAGISAWA, Kiyoshi**
[JP/JP]; c/o Ebara Corporation, 11-1, Haneda Asahi-cho,
Ohta-ku, Tokyo 144-8510 (JP). **KAWAMURA, Takeshi**
[JP/JP]; c/o Ebara Corporation, 11-1, Haneda Asahi-cho,
Ohta-ku, Tokyo 144-8510 (JP).


(74) Agents: **WATANABE, Isamu** et al.; GOWA Nishi-Shin-
juku 4F, 5-8, Nishi-Shinjuku 7-chome, Shinjuku-ku, Tokyo
160-0023 (JP).

(81) Designated States (national): CN, KR, US.

(84) Designated States (regional): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

[Continued on next page]

(54) Title: VACUUM PUMP AND METHOD OF STARTING THE SAME

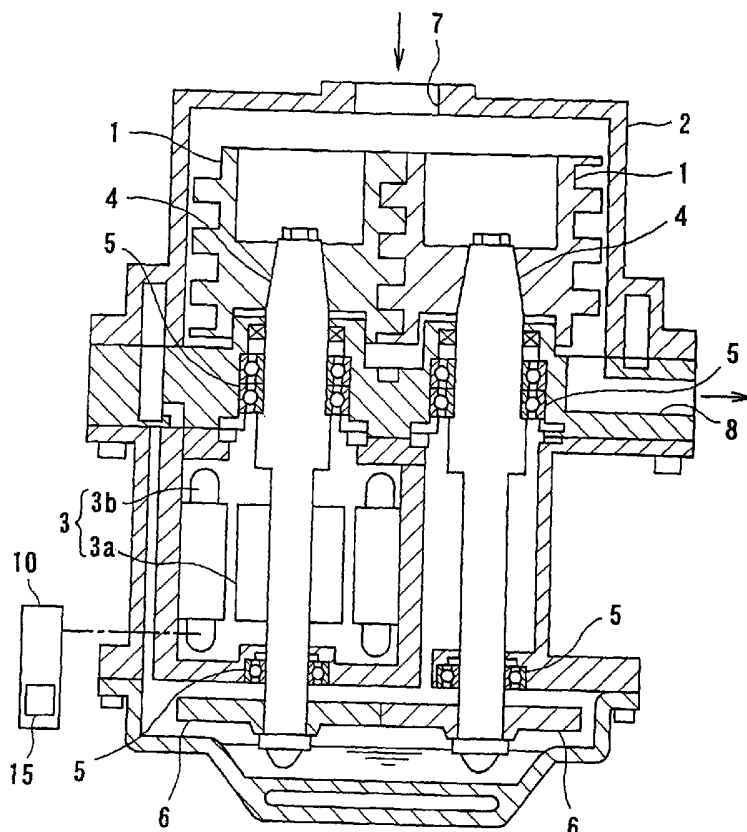

(57) Abstract: The present invention relates to a vacuum pump and a method of starting a vacuum pump. The vacuum pump includes a pump rotor (1) rotatably disposed in a casing (2), and a pump-rotor controller (15) for controlling rotation of the pump rotor (1) in a forward direction or a reverse direction in accordance with a predetermined pattern at the time of starting the vacuum pump.



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DESCRIPTION**VACUUM PUMP AND METHOD OF STARTING THE SAME****Technical Field**

5 The present invention relates to a vacuum pump and a method of starting a vacuum pump, and more particularly to a vacuum pump for evacuating a gas from a chamber used in a semiconductor fabrication apparatus or the like, and a method of starting such a vacuum pump.

10

Background Art

 In a semiconductor fabrication apparatus, a vacuum pump is widely used for evacuating a gas used in a semiconductor fabrication process from a chamber and producing a vacuum environment in the chamber. As this type of vacuum pump, there has been known a positive-displacement vacuum pump having Roots-type or screw-type pump rotors.

15

 Generally, the positive-displacement vacuum pump comprises a pair of pump rotors disposed in a casing, and a motor for rotating the pump rotors. A small clearance is formed between the pair of the pump rotors themselves and also between the pump rotors and the inner surface of the casing so that the pump rotors are rotated in a noncontact manner. When the pair of the pump rotors are synchronously rotated in the opposite directions by energizing the motor, a gas drawn from an inlet port into the casing is delivered toward an outlet port and is thus evacuated from a chamber or the like connected to the inlet port of the vacuum pump.

20

25

30

 Some gases used in the semiconductor fabrication process contain components which are solidified or liquidized when the temperature of the gases is lowered. Generally, in the above positive-displacement vacuum pump, the heat of compression is generated during the process of delivering the gas toward the

outlet port, and hence the vacuum pump has a high temperature during operation. Therefore, while the vacuum pump maintains a high temperature, even if the vacuum pump evacuates the gas containing the above components, the components are not solidified or liquidized, and a good evacuation is thus carried out.

However, when the operation of the vacuum pump is stopped and the temperature of the vacuum pump is gradually lowered, the components contained in the gas are solidified or liquidized, and are deposited in the clearance between the pump rotors and between the pump rotors and the casing (hereinafter, the solidified or liquidized components are referred to as a product). Consequently, such product prevents the rotation of the pump rotors, and hence the pump rotors cannot be rotated by a starting torque of the motor, thus causing a failure of the restart of the vacuum pump. Further, in addition to the failure of the restart of the vacuum pump, an excessive load is applied to the motor to cause the motor to overheat, and hence the vacuum pump cannot be operated safely.

Furthermore, in recent years, there has been developed a motor-drive technique for driving an induction motor, a brushless DC motor, or the like with the use of an inverter such as a frequency converter. If such a motor-drive technique is used in the vacuum pump, a torque of the motor for starting the vacuum pump is limited by capacities of parts used in the inverter. Consequently, the motor can generate only a limited torque, and the starting operation of the vacuum pump tends to be more difficult.

Disclosure of Invention

The present invention has been made in view of the above drawbacks. It is therefore an object of the present invention to provide a vacuum pump which can be normally started even if

a product solidified or liquidized in a casing of the vacuum pump presents an obstacle to the rotation of the pump rotor.

Another object of the present invention is to provide a method of starting such a vacuum pump.

5 In order to achieve the above object, according to one aspect of the present invention, there is provided a vacuum pump comprising: a pump rotor rotatably disposed in a casing; and a pump-rotor controller for controlling rotation of the pump rotor in a forward direction or a reverse direction in accordance
10 with a predetermined pattern at the time of starting the vacuum pump. The rotation of the pump rotor in the forward direction is defined as the rotation of the pump rotor in a direction in which a gas drawn in the casing is delivered from an inlet side of the casing toward an outlet side of the casing. The rotation
15 of the pump rotor in the reverse direction is defined as the rotation of the pump rotor in a direction opposite to the forward direction.

 In a preferred aspect of the present invention, the predetermined pattern includes a combination of at least two
20 of rotation of the pump rotor in the forward direction, rotation of the pump rotor in the reverse direction, and stop of the pump rotor.

 In a preferred aspect of the present invention, the predetermined pattern is set in the pump-rotor controller such
25 that the pump rotor is driven in the order of the rotation in the forward direction, the stop, and the rotation in the forward direction.

 In a preferred aspect of the present invention, the predetermined pattern is set in the pump-rotor controller such
30 that the pump rotor is rotated in the order of the reverse direction and the forward direction.

 According to the present invention, if the product solidified or liquidized in the casing prevents the rotation

of the pump rotor, the pump rotor is rotated in accordance with a predetermined pattern to thereby remove the product, thus enabling the vacuum pump to be started normally.

In a preferred aspect of the present invention, the vacuum
5 pump further comprises a state-judging device for judging whether the pump rotor is rotated normally or not at the time of starting the vacuum pump; wherein when the state-judging device judges that the pump rotor is not rotated normally at the time of starting the vacuum pump, the pump rotor is rotated in accordance with
10 the predetermined pattern.

According to the present invention, when the pump rotor can be rotated normally, a normal-starting operation is carried out, thus enabling the vacuum pump to be started quickly.

According to another aspect of the present invention, there
15 is provided a method of starting a vacuum pump having a pump rotor rotatably disposed in a casing, comprising: controlling rotation of the pump rotor in a forward direction or a reverse direction at the time of starting the vacuum pump in accordance with a predetermined pattern; and rotating the pump rotor in
20 the forward direction in a steady state for evacuation.

In a preferred aspect of the present invention, the predetermined pattern includes a combination of at least two of rotation of the pump rotor in the forward direction, rotation of the pump rotor in the reverse direction, and stop of the pump
25 rotor.

In a preferred aspect of the present invention, the predetermined pattern is set such that the pump rotor is driven in the order of the rotation in the forward direction, the stop, and the rotation in the forward direction.

30 In a preferred aspect of the present invention, the predetermined pattern is set such that the pump rotor is rotated in the order of the reverse direction and the forward direction.

In a preferred aspect of the present invention, a method

of starting a vacuum pump further comprises judging whether the pump rotor is rotated normally or not; wherein the pump rotor is rotated in accordance with the predetermined pattern when the pump rotor is judged not to be rotated normally.

5 According to another aspect of the present invention, there is provided a method of starting a vacuum pump, comprising: judging whether the pump rotor is rotated normally or not; controlling rotation of the pump rotor in a forward direction or a reverse direction at the time of starting the vacuum pump in accordance
10 with a predetermined pattern when the pump rotor is judged not to be rotated normally; and rotating the pump rotor in the forward direction in a steady state for evacuation.

Brief Description of Drawings

15 FIG. 1 is a cross-sectional view showing a vacuum pump according to a first embodiment of the present invention;

FIG. 2 is a schematic view showing a control system including a pump-rotor controller according to the first embodiment of the present invention;

20 FIG. 3 is a schematic view showing a control system including a pump-rotor controller according to a second embodiment of the present invention;

FIG. 4 is a schematic view showing a control system including a pump-rotor controller according to a third embodiment of the
25 present invention;

FIG. 5 is a schematic view showing a control system including a pump-rotor controller according to a fourth embodiment of the present invention; and

FIG. 6 is a schematic view showing a control system including
30 a pump-rotor controller according to a fifth embodiment of the present invention.

Best Mode for Carrying Out the Invention

A vacuum pump and a method of starting a vacuum pump according to embodiments of the present invention will be described below with reference to the drawings.

5 Although a vacuum pump according to the present embodiments is used for evacuating a gas from a chamber used in a semiconductor fabrication apparatus, the present invention is not limited to such an application. FIG. 1 is a cross-sectional view showing a vacuum pump according to a first embodiment of the present
10 invention.

As shown in FIG. 1, the vacuum pump according to the first embodiment comprises a pair of pump rotors 1, 1 each having a screw groove, a casing 2 for housing the pump rotors 1, 1, and a motor 3 for rotating the pump rotors 1, 1. The casing 2 has
15 an inlet port 7 for drawing a gas therein and an outlet port 8 for discharging the gas therefrom. The pump rotors 1, 1 are fixed respectively to two shafts 4, 4 which are rotatably supported by bearings 5, 5.

One of the shafts 4, 4 has a motor rotor 3a fixed thereto,
20 and a motor stator 3b is disposed so as to enclose the motor rotor 3a. The motor rotor 3a and the motor stator 3b constitute the motor 3. In this embodiment, the motor 3 comprises an induction motor. Timing gears 6, 6 are fixed to end portions of the shafts 4, 4, respectively, and the pair of the pump rotors
25 1, 1 are synchronously rotated in the opposite directions by the timing gears 6, 6. A small clearance is formed between the pair of the pump rotors 1, 1 themselves and also between the pump rotors 1, 1 and the inner surface of the casing 2 so that the pump rotors 1, 1 are rotated in a noncontact manner.

30 With the above structure, when the pair of the pump rotors 1, 1 are rotated by energizing the motor 3, a gas is drawn from the inlet port 7 and delivered from an inlet side to an outlet side of the casing 2 along the screw grooves of the engaging

pump rotors 1, 1, and is then discharged from the outlet port 8. In this manner, the gas is continuously delivered from the inlet side to the outlet side, thereby evacuating the gas from a chamber (not shown in the drawings) connected to the inlet port 7. The chamber is incorporated in a semiconductor fabrication apparatus.

As shown in FIG. 1, the vacuum pump of this embodiment comprises a control system 10 for controlling the operation of the vacuum pump. The control system 10 incorporates a pump-rotor controller 15 therein for controlling rotation of the pump rotors 1, 1 and stop of the pump rotors 1, 1.

FIG. 2 is a schematic view showing the control system including the pump-rotor controller according to the first embodiment of the present invention.

As shown in FIG. 2, the control system comprises a three-phase power source 11, an earth leakage breaker (ELB) 12, an electromagnetic contactor 13, and a thermal protector 14. The three-phase power source 11 is connected to the electromagnetic contactor 13 through the earth leakage breaker (ELB) 12, and the electromagnetic contactor 13 is connected to the motor 3 through the thermal protector 14. The pump-rotor controller 15 for controlling the rotation of the pump rotors 1, 1 (only one pump rotor is schematically shown in FIG. 2) and the stop of the pump rotors 1, 1 is connected to the electromagnetic contactor 13. A circuit breaker (CB) may be used instead of the earth leakage breaker (ELB) 12.

A start-switch (not shown) of the vacuum pump is connected to the pump-rotor controller 15, and when the start-switch is operated, a start-command signal is sent from the pump-rotor controller 15 to the electromagnetic contactor 13. The electromagnetic contactor 13 is activated in response to the start-command signal, and a three-phase voltage is applied to the motor 3 from the three-phase power source 11. Therefore,

a rotational torque for rotating the pump rotors 1, 1 in forward directions is imparted to the pump rotors 1, 1 from the motor 3, thus starting the vacuum pump. The thermal protector 14 is provided for breaking current supplied from the three-phase power source 11 to stop the operation of the vacuum pump when the motor 3 is overloaded, thus preventing the overload and the overheat of the motor 3 from occurring.

The pump-rotor controller 15 includes a timer 16, and when the vacuum pump is started, the pump rotors 1, 1 are rotated or stopped in accordance with a predetermined pattern set in the timer 16 in advance. In this embodiment, the pattern of the timer 16 is set such that the pump rotors 1, 1 are driven in the order of (1) forward-direction rotation (rotation of the pump rotors 1, 1 in the forward directions), (2) stop, and (3) forward-direction rotation. When the pump rotors 1, 1 are rotated in the forward directions, one of the pump rotors 1, 1 is rotated in one direction (e.g. clockwise direction) and another pump rotor 1 is rotated in the opposite direction (e.g. counterclockwise direction). In this case, the gas is drawn from the inlet port 7 into the casing 2, and delivered toward the outlet port 8 and discharged from the outlet port 8. The rotation of the pump rotors 1, 1 in the forward directions is defined as the rotation of the pump rotors 1, 1 in directions in which the gas drawn in the casing 2 is delivered from the inlet port 7 toward the outlet port 8.

Therefore, when the vacuum pump is started, first, the rotational torque for rotating the pump rotors 1, 1 in the forward directions is imparted to the pump rotors 1, 1 from the motor 3. Thereafter, the rotational torque imparted to the pump rotors 1, 1 is reduced to zero once. Subsequently, the rotational torque for rotating the pump rotors 1, 1 in the forward directions is imparted to the pump rotors 1, 1 from the motor 3 again.

In this manner, when the vacuum pump is started, the pump

rotors 1, 1 are rotated and then stopped, and are rotated again. Therefore, forces of the pump rotors 1, 1 can be applied to a product deposited in the clearance between the pump rotors 1, 1 and the casing 2. As a result, the product which has been
5 solidified is embrittled and removed, thus enabling the vacuum pump to be started normally. In the case where a pattern for allowing the pump rotors 1, 1 to repeat its rotation and stop several times is set in the timer 16, the reliability of removal of the product can be further enhanced. After the vacuum pump
10 is started normally, the pump rotors 1, 1 are rotated in the forward directions in a steady state for evacuation.

Next, a vacuum pump and a method of starting a vacuum pump according to a second embodiment of the present invention will be described with reference to FIG. 3. The basic structure of
15 a vacuum pump of this embodiment is the same as that of the first embodiment, and will not be described in detail below.

FIG. 3 is a schematic view showing a control system including a pump-rotor controller according to the second embodiment of the present invention.

20 As shown in FIG. 3, a control system of this embodiment comprises a three-phase power source 11, an earth leakage breaker (ELB) 12, and a frequency converter 21. The three-phase power source 11 is connected to the frequency converter 21 through the earth leakage breaker (ELB) 12, and the frequency converter
25 21 is connected to the motor 3. The frequency converter 21 comprises a rectifier 22, a power transistor 23 for generating a waveform to rotate the motor 3, and a frequency-conversion controller 24 for controlling the frequency converter 21. A pump-rotor controller 15 for controlling rotation of the pump
30 rotors 1, 1 and stop of the pump rotors 1, 1 is connected to the frequency converter 21.

The pump-rotor controller 15 includes a timer 16, as with the first embodiment. Specifically, when a start-switch (not

shown) is operated, a start-command signal is sent from the pump-rotor controller 15 to the frequency converter 21, and a three-phase voltage is applied to the motor 3 from the three-phase power source 11. Thus, the pump rotors 1, 1 are rotated in accordance with a predetermined pattern set in the timer 16 in advance. In this embodiment, as with the first embodiment, the pattern is set in the timer 16 such that the pump rotors 1, 1 are driven by the motor 3 in the order of (1) forward-direction rotation, (2) stop, and (3) forward-direction rotation. A pattern for allowing the pump rotors 1, 1 to repeat its rotation and stop several times may be set in the timer 16.

Although an induction motor is used as the motor 3 in this embodiment, the induction motor can be replaced with a brushless DC motor by replacing the frequency-conversion controller 24 with a brushless-DC-motor controller. In this case also, as in the case of the induction motor, the pump rotor can be rotated in accordance with a predetermined pattern.

Next, a vacuum pump and a method of starting a vacuum pump according to a third embodiment of the present invention will be described with reference to FIG. 4. The basic structure of a vacuum pump and parts of a control system denoted by identical reference numerals are the same as those of the first embodiment, and will not be described in detail below.

FIG. 4 is a schematic view showing a control system including a pump-rotor controller according to the third embodiment of the present invention.

As shown in FIG. 4, a control system comprises a three-phase power source 11, an earth leakage breaker (ELB) 12, a first electromagnetic contactor 13A, a second electromagnetic contactor 13B, and a thermal protector 14. An induction motor is used as the motor 3. The first electromagnetic contactor 13A and the second electromagnetic contactor 13B are connected to a pump-rotor controller 15, respectively, and are activated by

receiving an operation-command signal from the pump-rotor controller 15. The three-phase power source 11 is connected to the first electromagnetic contactor 13A and the second electromagnetic contactor 13B through the earth leakage breaker (ELB) 12, and the first electromagnetic contactor 13A and the second electromagnetic contactor 13B are connected to the motor 3 through the thermal protector 14. The first electromagnetic contactor 13A applies a three-phase voltage of the three-phase power source 11 to the motor 3 with the phase sequence being kept as it is. On the other hand, the second electromagnetic contactor 13B applies the three-phase voltage of the three-phase power source 11 with the phase sequence being inverted from the phase sequence of the three-phase voltage of the three-phase power source 11.

The pump-rotor controller 15 is constructed so as to rotate the pump rotors 1, 1 in forward directions or reverse directions in accordance with a predetermined pattern set in the pump-rotor controller 15 in advance through the first electromagnetic contactor 13A and the second electromagnetic contactor 13B. Specifically, an operation-command signal is sent from the pump-rotor controller 15 to the first electromagnetic contactor 13A and the second electromagnetic contactor 13B alternately in accordance with the predetermined pattern. The pattern is set in the pump-rotor controller 15 such that the pump rotors 1, 1 are rotated in the order of the reverse directions and the forward directions. When the pump rotors 1, 1 are rotated in the forward directions, one of the pump rotors 1, 1 is rotated in one direction (e.g. clockwise direction) and another pump rotor 1 is rotated in the opposite direction (e.g. counterclockwise direction). In this case, the gas is drawn from the inlet port 7 into the casing 2 and discharged from the outlet port 8. On the other hand, when the pump rotors 1, 1 are rotated in the reverse directions, the pump rotors 1, 1 are rotated

in directions opposite to the directions of the pump rotors 1, 1 which are rotated in the forward directions. The rotation of the pump rotors 1, 1 in the reverse directions is defined as the rotation of the pump rotors 1, 1 in directions opposite to the forward directions.

The operation of the vacuum pump having the above structure of this embodiment will be described in detail below. When a start-switch (not shown) of the vacuum pump is operated, first, the operation-command signal is sent from the pump-rotor controller 15 to the second electromagnetic contactor 13B. By activating the second electromagnetic contactor 13B, the three-phase voltage having an inverted phase sequence is applied to the motor 3 through the second electromagnetic contactor 13B, and hence the rotational torque for rotating the pump rotors 1, 1 in the reverse directions is imparted to the pump rotors 1, 1 from the motor 3. Thereafter, the pump-rotor controller 15 stops sending the operation-command signal to the second electromagnetic contactor 13B. At the same time, the operation-command signal is sent from the pump-rotor controller 15 to the first electromagnetic contactor 13A. By activating the first electromagnetic contactor 13A, the three-phase voltage of the three-phase power source 11 is applied to the motor 3 through the first electromagnetic contactor 13A with the phase sequence being kept as it is. Therefore, the rotational torque for rotating the pump rotors 1, 1 in the forward directions is imparted to the pump rotors 1, 1 from the motor 3.

In this manner, by rotating the pump rotors 1, 1 in the reverse directions or the forward directions at the time of starting the vacuum pump, the forces of the pump rotors 1, 1 can be applied to the product deposited in the gap between the pump rotors 1, 1 and the casing 2. As a result, the product is removed, thus enabling the vacuum pump to be started.

Next, a vacuum pump and a method of starting a vacuum pump

according to a fourth embodiment of the present invention will be described with reference to FIG. 5. The basic structure of a vacuum pump and parts of a control system denoted by identical reference numerals are the same as those of the second embodiment, and will not be described in detail below.

FIG. 5 is a schematic view showing a control system including a pump-rotor controller according to the fourth embodiment of the present invention.

As shown in FIG. 5, a pump-rotor controller 15 is constructed so as to send a start-command signal 101 for starting the vacuum pump and a control signal 102 for rotating the pump rotors 1, 1 in the forward directions or the reverse directions in accordance with a predetermined pattern to the frequency-conversion controller 24 of the frequency converter 21. A pattern is set in the pump-rotor controller 15 such that the pump rotors 1, 1 are rotated in the order of the reverse directions and the forward directions at the time of starting the vacuum pump, as with the third embodiment.

The control system of this embodiment shown in FIG. 5 is operated to start the vacuum pump as follows: When a start-switch (not shown) is operated, the start-command signal 101 is sent from the pump-rotor controller 15 to the frequency-conversion controller 24. At the same time, the control signal 102 for rotating the motor 3 in the reverse direction is sent from the pump-rotor controller 15 to the frequency-conversion controller 24. Therefore, the rotational torque for rotating the pump rotors 1, 1 in the reverse directions is imparted to the pump rotors 1, 1 from the motor 3. Thereafter, the control signal 102 for rotating the motor 3 in the forward direction is sent from the pump-rotor controller 15 to the frequency-conversion controller 24, and hence the rotational torque for rotating the pump rotors 1, 1 in the forward directions is imparted to the pump rotors 1, 1 from the motor 3.

Although an induction motor is used as the motor 3 in this embodiment, the induction motor can be replaced with a brushless DC motor by replacing the frequency-conversion controller 24 with a brushless-DC-motor controller. In this case also, as in
5 the case of the induction motor, the pump rotors 1, 1 can be rotated in the forward directions or the reverse directions in accordance with a predetermined pattern.

Next, a vacuum pump and a method of starting a vacuum pump according to a fifth embodiment of the present invention will
10 be described with reference to FIG. 6. The basic structures of a vacuum pump and a control system of this embodiment are the same as those of the fourth embodiment, and will not be described in detail below.

FIG. 6 is a schematic view showing a control system including
15 a pump-rotor controller according to the fifth embodiment of the present invention.

The vacuum pump of this embodiment comprises a current monitor 27 for monitoring current supplied to the motor 3. The current monitor 27 serves as a state-judging device for judging
20 whether the pump rotors 1, 1 are rotated normally or not at the time of starting the vacuum pump. When the current monitor 27 detects that current supplied to the motor 3 is in an abnormal state, the current monitor 27 judges that the pump rotors 1, 1 are not rotated normally. Specifically, if the product or the
25 like deposited in the casing 2 prevents the pump rotors 1, 1 from being rotated, current supplied to the motor 3 is detected to be in the abnormal state, and hence the current monitor 27 can judge that the pump rotors 1, 1 are not rotated normally.

Further, when the current monitor 27 judges that the
30 rotation of the pump rotors 1, 1 is abnormal, the current monitor 27 sends an operation signal to the pump-rotor controller 15. The pump-rotor controller 15 is activated by receiving the operation signal to thereby rotate the motor 3 in accordance

with a predetermined pattern which is set in the pump-rotor controller 15 in advance.

Specifically, in this embodiment, the pump-rotor controller 15 does not work until the operation signal is sent from the current monitor 27 to the pump-rotor controller 15. Therefore, when the pump rotor can be rotated normally, the normal-starting operation is carried out, thus enabling the vacuum pump to be started quickly.

As a state-judging device, a rotation monitor for monitoring the rotation of the pump rotors 1, 1 or a product monitor for monitoring the amount of the product deposited in the casing 2 may be provided instead of the current monitor 27. In the case where the product monitor is provided, an optical sensor or a thermocouple may be used for monitoring the amount of the product deposited in the casing 2. In this case, when the amount of the product is increased to a predetermined value, the product monitor may send the operation signal to the pump-rotor controller 15.

Although the vacuum pump according to the embodiments of the present invention has two pump rotors engaging with each other, the present invention can be applied to a vacuum pump having a single pump rotor or more than two pump rotors. In these cases also, the rotation of the pump rotor (or pump rotors) in a forward direction (or forward directions) is defined as the rotation of the pump rotor (or pump rotors) in a direction (or directions) in which a gas is delivered from an inlet side toward an outlet side. The rotation of the pump rotor (or pump rotors) in a reverse direction (or reverse directions) is defined as the rotation of the pump rotor (or pump rotors) in a direction (or directions) opposite to the forward direction (or forward directions).

As described above, according to the present invention, even if the product solidified or liquidized in the casing prevents

the pump rotor from being rotated, the product is removed by the pump rotor which is rotated in accordance with the predetermined pattern. Therefore, the vacuum pump can be started normally.

5

Industrial Applicability

The present invention is applicable to a vacuum pump and a method of starting a vacuum pump, and more particularly to a vacuum pump for evacuating a gas from a chamber used in a semiconductor fabrication apparatus or the like, and a method of starting such a vacuum pump.

10

CLAIMS

1. A vacuum pump comprising:
a pump rotor rotatably disposed in a casing; and
5 a pump-rotor controller for controlling rotation of said pump rotor in a forward direction or a reverse direction in accordance with a predetermined pattern at the time of starting said vacuum pump.
- 10 2. A vacuum pump according to claim 1, wherein said predetermined pattern includes a combination of at least two of rotation of said pump rotor in said forward direction, rotation of said pump rotor in said reverse direction, and stop of said pump rotor.
- 15 3. A vacuum pump according to claim 2, wherein said predetermined pattern is set in said pump-rotor controller such that said pump rotor is driven in the order of the rotation in said forward direction, the stop, and the rotation in said forward
20 direction.
4. A vacuum pump according to claim 2, wherein said predetermined pattern is set in said pump-rotor controller such that said pump rotor is rotated in the order of said reverse
25 direction and said forward direction.
5. A vacuum pump according to any one of claims 1 to 4, further comprising:
a state-judging device for judging whether said pump rotor
30 is rotated normally or not at the time of starting said vacuum pump;
wherein when said state-judging device judges that said pump rotor is not rotated normally at the time of starting said vacuum pump, said pump rotor is rotated in accordance with said
35 predetermined pattern.

6. A method of starting a vacuum pump having a pump rotor rotatably disposed in a casing, comprising:

controlling rotation of said pump rotor in a forward
5 direction or a reverse direction at the time of starting said vacuum pump in accordance with a predetermined pattern; and
rotating said pump rotor in said forward direction in a steady state for evacuation.

10 7. A method of starting a vacuum pump according to claim 6, wherein said predetermined pattern includes a combination of at least two of rotation of said pump rotor in said forward direction, rotation of said pump rotor in said reverse direction, and stop of said pump rotor.

15 8. A method of starting a vacuum pump according to claim 7, wherein said predetermined pattern is set such that said pump rotor is driven in the order of the rotation in said forward direction, the stop, and the rotation in said forward direction.

20 9. A method of starting a vacuum pump according to claim 7, wherein said predetermined pattern is set such that said pump rotor is rotated in the order of said reverse direction and said forward direction.

25 10. A method of starting a vacuum pump according to any one of claims 6 to 9, further comprising:

judging whether said pump rotor is rotated normally or not;
30 wherein said pump rotor is rotated in accordance with said predetermined pattern when said pump rotor is judged not to be rotated normally.


11. A method of starting a vacuum pump, comprising:
judging whether said pump rotor is rotated normally or
not;

controlling rotation of said pump rotor in a forward
5 direction or a reverse direction at the time of starting said
vacuum pump in accordance with a predetermined pattern when said
pump rotor is judged not to be rotated normally; and

rotating said pump rotor in said forward direction in a
steady state for evacuation.

1/4

FIG. 1

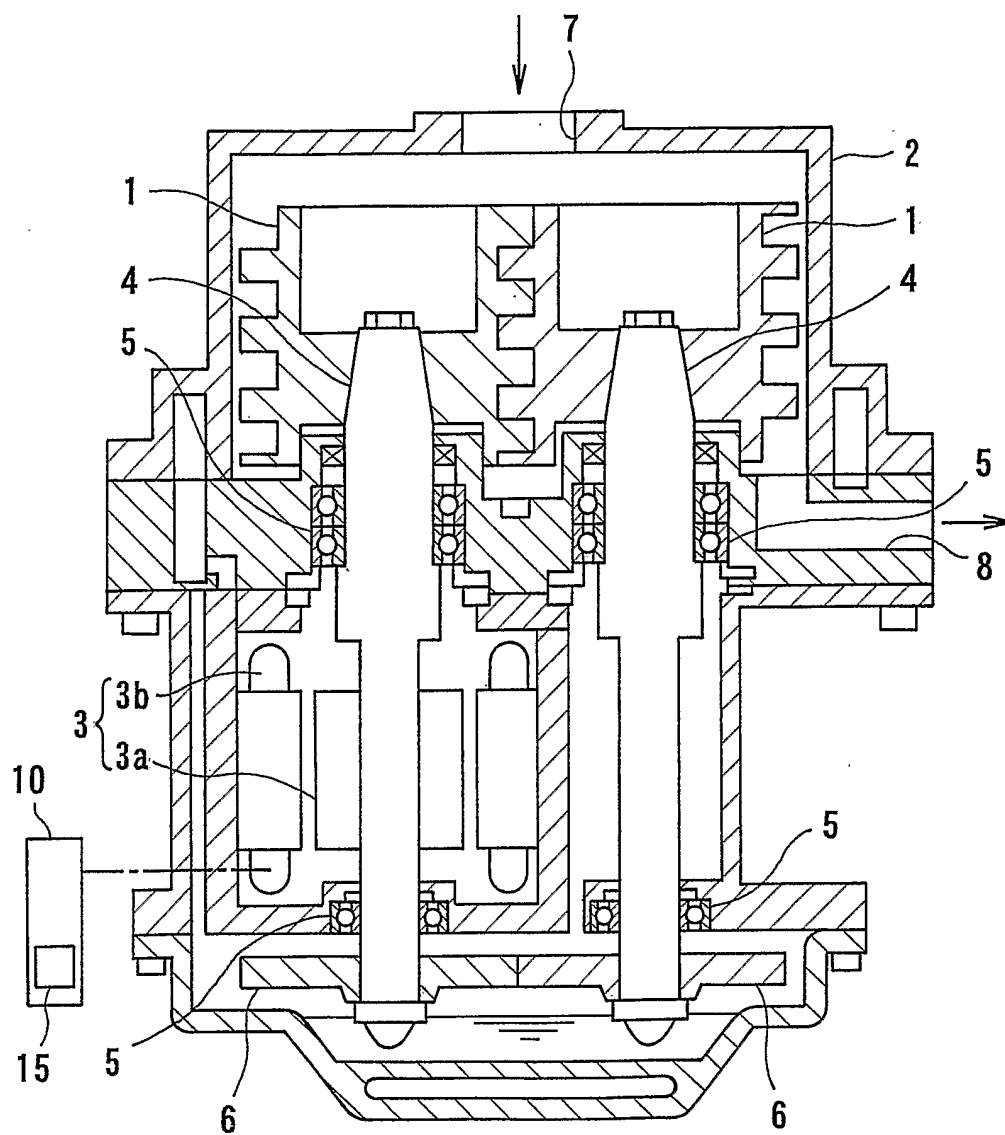

2/4

FIG. 2


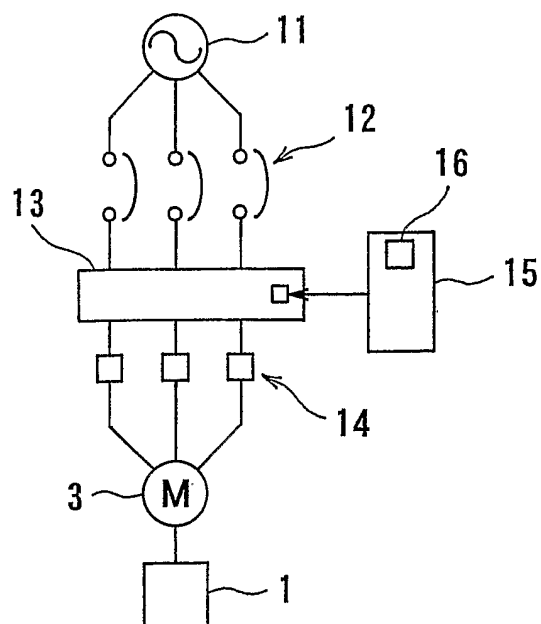


FIG. 3

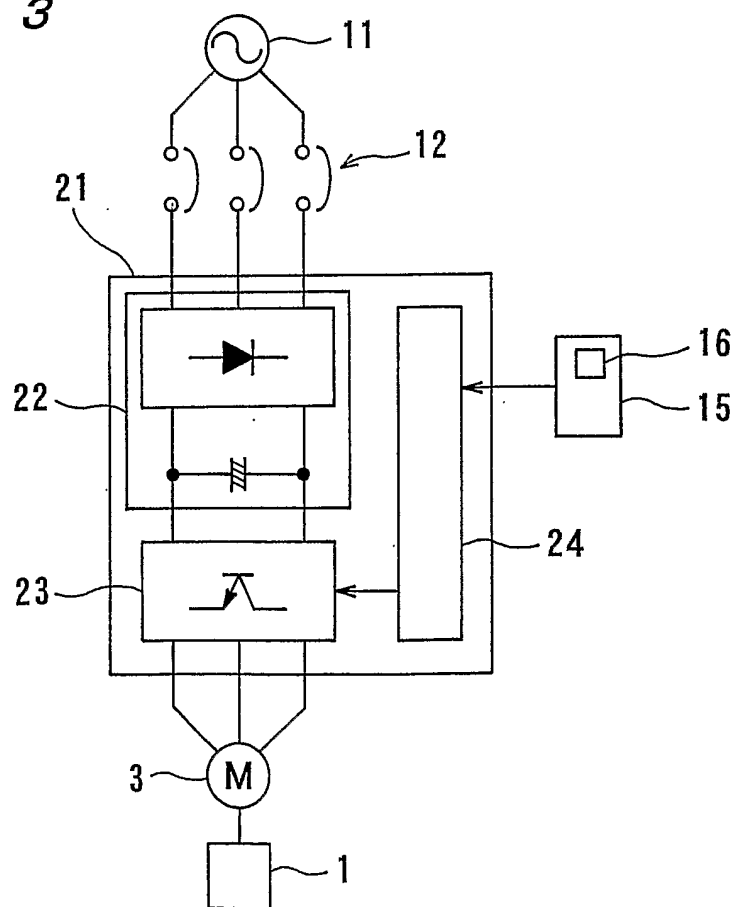

3/4

FIG. 4



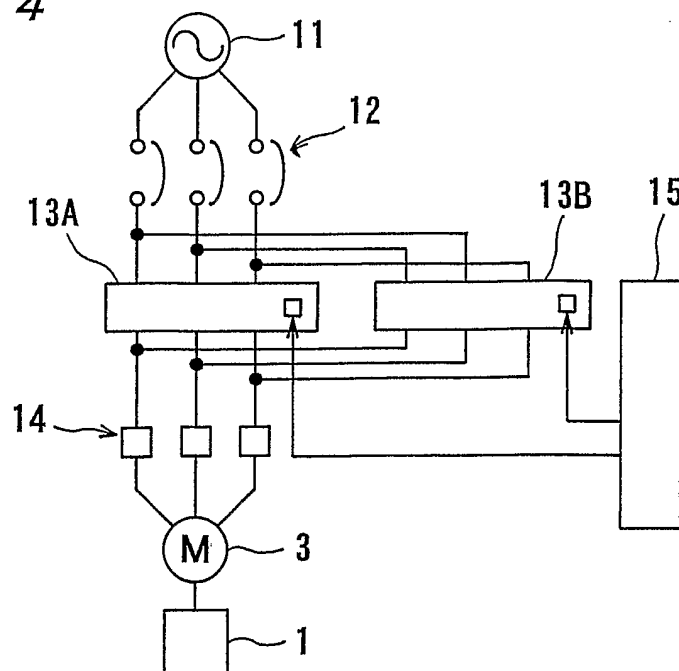


FIG. 5

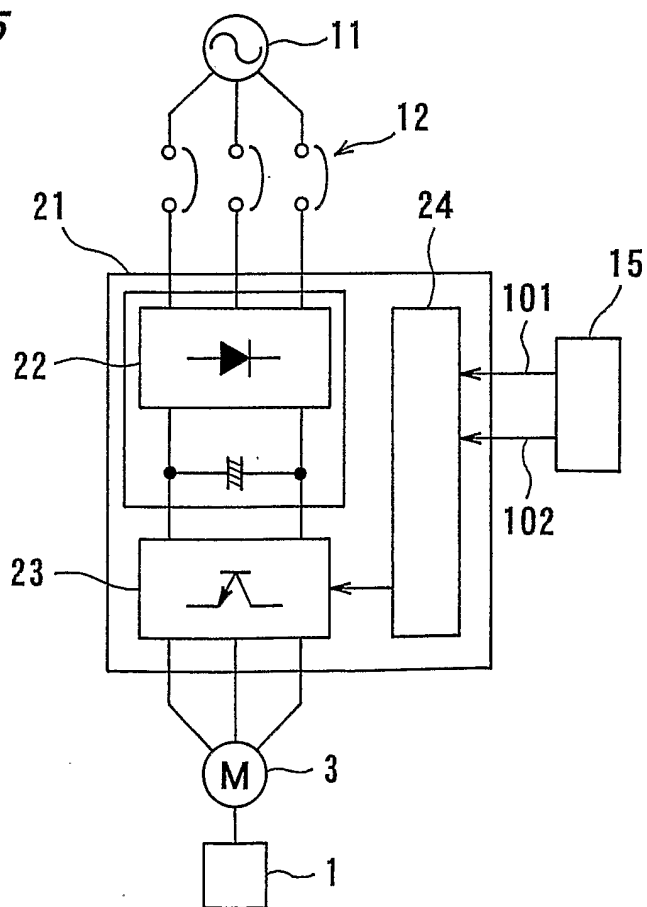

4/4

FIG. 6

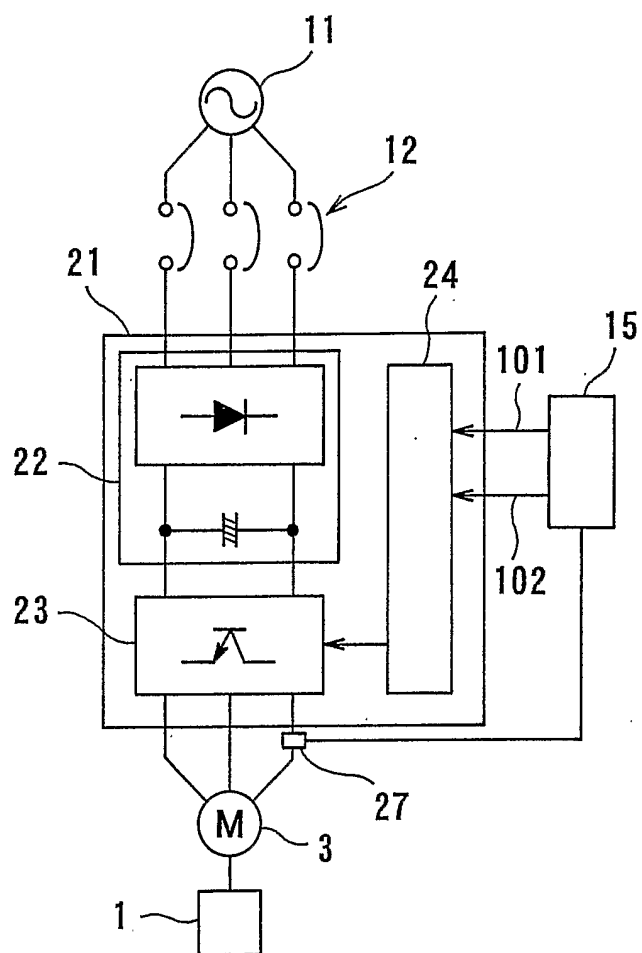

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 03/10207

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F04C29/10 F04C13/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F04C G05B H01L F04B F04D F01C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 961 291 A (KOYANO SHINJI ET AL) 5 October 1999 (1999-10-05) figures 1,10,16-28 column 1, line 10 - line 12 column 6, line 30 - line 44 column 8, line 53 -column 9, line 18 column 9, line 66 -column 10, line 13 ---	1-3,5-8, 10,11
X	GB 2 102 072 A (DENCO AGR LIMITED) 26 January 1983 (1983-01-26) the whole document ---	1,2,4,6, 7,9
X	US 4 664 601 A (MATSUBARA KATSUMI ET AL) 12 May 1987 (1987-05-12) figures 1-3 column 2, line 67 -column 3, line 13 --- -/--	1,6



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

5 November 2003

Date of mailing of the international search report

12/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lequeux, F

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 03/10207

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 081 380 A (EBARA CORP) 7 March 2001 (2001-03-07) figures 1-3 column 4, line 52 -column 5, line 33 -----	1,5,6, 10,11
X	US 5 518 373 A (HARADA KIYOHICO ET AL) 21 May 1996 (1996-05-21) figures 1-8 column 1, line 63 -column 2, line 16 column 2, line 43 - line 47 column 4, line 12 - line 17 column 4, line 66 -column 6, line 13 -----	1-3,5-8, 10,11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 03/10207

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5961291	A	05-10-1999	JP 10073088 A KR 230827 B1	17-03-1998 15-11-1999
GB 2102072	A	26-01-1983	NONE	
US 4664601	A	12-05-1987	JP 1915681 C JP 6031627 B JP 61031687 A	23-03-1995 27-04-1994 14-02-1986
EP 1081380	A	07-03-2001	JP 2000038999 A EP 1081380 A1 US 6474949 B1 WO 9960272 A1 TW 483988 B	08-02-2000 07-03-2001 05-11-2002 25-11-1999 21-04-2002
US 5518373	A	21-05-1996	JP 6241183 A	30-08-1994