



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : H01H</p>	<p>A2</p>	<p>(11) International Publication Number: WO 00/70631 (43) International Publication Date: 23 November 2000 (23.11.00)</p>
<p>(21) International Application Number: PCT/DK00/00227 (22) International Filing Date: 4 May 2000 (04.05.00) (30) Priority Data: PA 1999 00685 17 May 1999 (17.05.99) DK PA 1999 00864 17 June 1999 (17.06.99) DK (71) Applicant (for all designated States except US): NKT RESEARCH A/S [DK/DK]; Priorparken 878, DK-2605 Brøndby (DK). (72) Inventors; and (75) Inventors/Applicants (for US only): RASMUSSEN, Claus, Nygaard [DK/DK]; Knivholtvej 16, 1. tv., DK-2720 Vanløse (DK). NIELSEN, Jørgen, Nygård [DK/DK]; Lavendelhaven 75, DK-2830 Virum (DK). ØSTERGAARD, Jens, Jacob [DK/DK]; C. T. Barfodvej 11, 1. tv., DK-2000 Frederiksberg (DK). (74) Agent: NKT RESEARCH A/S; Priorparken 878, DK-2605 Brøndby (DK).</p>		<p>(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>Without international search report and to be republished upon receipt of that report.</i></p>
<p>(54) Title: A METHOD FOR OVERCURRENT PROTECTION IN A SUPERCONDUCTING CABLE</p>		
<p>(57) Abstract</p>		
<p>By a method and a superconducting cable for overcurrent protection, a current detector comprising a circuit breaker or a current limiter is inserted in series with the superconducting cable, which current detector can be constituted by a superconducting material quenching at a lower current than the cable conductor of the superconducting cable. When the current in the superconducting material gets too high, it is for a short time period fed to a cold shunt that is coupled in parallel with the cable conductors of the superconducting cable. After the short time period, the current is fed to a hot shunt that is coupled in parallel outside the cable conductors of the cable, causing heat dissipation to be effected at room temperature. By use of the method and the cable according to the invention, destruction of the cable is prevented should the superconducting cable lose its superconductivity, e.g. due to cooling failure, whereupon normal operation may soon be resumed without restoration of damages being necessary.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

A method for overcurrent protection in a superconducting cable.

The invention relates to a method for overcurrent protection in a superconducting cable.

5

Furthermore, the invention relates to a superconducting cable.

When using superconducting cables in a high-voltage system, it is important that said cables are protected from overcurrents since the result of overcurrents in the cable conductor of a superconducting cable is loss of superconductivity thereof.

10

This means that the cable could soon be exposed to destruction, since the superconducting tapes conducting the current are not at all adapted to transmit large currents, when they are not superconducting.

15

A typical requirement for a superconducting cable is that it should be protected from overcurrents.

This protection requirement may e.g. be that the cable should be able to withstand approximately 40 kA for 1 second.

20

The object of the invention is now to provide a method for protecting a superconducting cable, accommodating the requirements stipulated above.

The objective of the invention is fulfilled by a method of the type defined in the preamble of claim 1, the method being characterized in that a current detector, which can be constituted by a part of or all of the cable, is inserted in series with the cable conductor of the superconducting cable.

25

Hence, constant monitoring of the current in the superconducting cable during operation is ensured, so that if the current exceeds some predetermined limits, the current will be broken or limited prior to a destructive, heavy heating of the cable.

30

By the insertion, as indicated in claim 2, of at least one superconducting piece as current detector, reliable overcurrent detection is obtained, since the superconducting pieces - if exposed to a current that is too high - exit their superconducting state, causing an intense generation of heat in the superconducting pieces.

35

This generation of heat can then be used if, as indicated in claim 3, a fuse is inserted as a circuit breaker to break the current to the cable conductors of the superconducting cable.

5 With a view to accommodating the time delay in a circuit breaker, specifically the inevitable time delay defined by the period of time necessary for breaking a current by means of a circuit breaker, it is advantageous, as indicated in claim 4, to insert a cold shunt in parallel with the cable conductors of the superconducting cable, the cold shunt being designed to be capable of carrying e.g. 40kA in 0.1 second.

10

For diversion of the current to the superconducting cable after the above-mentioned 0.1 second has elapsed, an electrical conductor is preferably inserted, as indicated in claim 5, in parallel with the cable conductor of the cable and the current detector, said electrical conductor having a higher impedance than the superconducting cable

15

when in its superconducting state.
Thus, when the superconducting state ceases, the current is allowed to be diverted in the hot shunt.

Additional appropriate embodiments of the method are set out in claims 6-8.

20

As already mentioned, the invention also relates to a superconducting cable.

This cable is of the type defined in the preamble of claim 9 and is characterised in that the cable conductor of the cable is connected in series with a current detector

25

for detecting overcurrents and a circuit breaker or a current limiter.

Appropriate embodiments of the cable are set out in the independent claims 8-14.

30

In the following, the invention will be discussed in greater detail with reference to an exemplary embodiment shown in the drawings in which:

Fig. 1 shows a basic construction of a superconducting cable with overcurrent protection according to the invention,

35

Fig. 2 shows a more detailed construction of an embodiment of the cable with overcurrent protection according to the invention,

Fig. 3 shows the relationship with respect to time between currents flowing in the cable according to Fig. 2 in an overcurrent situation, whereas

5 Fig. 4 shows in perspective and partially intersected a superconducting cable with overcurrent protection according to the invention.

In Fig. 1 a superconducting cable is denoted by 1, said superconducting cable possibly, as known in the art, being constructed of a core, around which one or more
10 layers of superconducting tapes is/are wound.

Current detectors 3, 4 are coupled to the ends of the cable, the current detectors having built-in circuit breakers or current limiters.

The current detectors may e.g. comprise superconducting pieces such as YBCO or
15 Bi 2212 with built-in circuit breakers, and may be dimensioned such that they quench at a lower current than the superconductor of the actual cable, implying that if the current in the superconducting pieces exceeds a certain value, then the current to the superconducting cable will be broken after a short period of time.

By use of current limiters, the current will naturally be limited.

20 A hot shunt is coupled in parallel with a series connection of the superconducting pieces and the cable conductors of the superconducting cable, said shunt being capable of diverting the current supplied for a short period of time if the current detectors break the current or the current limiter limits the current.

25 Fig. 2 shows a more detailed embodiment of the superconducting cable according to the invention.

In this figure, 13 denotes current detectors corresponding to those denoted by 3 and 4 in Fig. 1.

The reference number 7 denotes a superconducting cable corresponding to the cable 1 of Fig. 1. A cold shunt is provided in parallel with the cable conductors of the
30 cable, the shunt being denoted by the reference number 11. This shunt is cooled to the temperature of the superconductor. On the outside of this cold shunt is a cryostat 8, and on the outside thereof is an electrical insulation 9.

On the inside of the electrical insulation 9, an electrical conductor 10 is provided,
35 which is made e.g. of copper and serves as a hot shunt at ambient temperature, cf. below.

The operation of the current detector in the superconducting cable will now be explained in greater detail with reference to the current plot of Fig. 3.

5 If it is ascertained that a current, which is too high, is flowing in the superconducting pieces 3, 4 or 13, the current will in a short time period flow in the cold shunt 11.

Then the current will be fed to the hot shunt 10, wherein the current will increase steeply as indicated by the broken line in Fig. 3 at the time 0.1s. At the same time,
10 the current in the cold shunt 11 will decrease steeply.

Damage to the superconducting cable in the event that its superconductivity ceases can thus be avoided, which means that it becomes ohmic and consequently not capable of conducting the usual currents that can be conducted in the superconducting
15 state.

Fig. 4 shows in perspective and partially intersected a superconducting cable as occurring in actual practice, which can be used in connection with the current protection as explained in connection with the preceding figures.

20 In this figure, 12 denotes a shield on the outside of which is a jacket 14. Inside the jacket is a dielectric insulator 15 surrounding an outer steel tube 16.

Inside the steel tube 16, spacers 17 are arranged that are supported by an aluminium foil 18 abutting an inner steel tube 19.

25 Inside the inner steel tube 19 a number of superconducting tapes 20 are wound around a hollow core 21.

The cooling of the superconducting tapes can be effected by supplying refrigerant to the channel 22 of the hollow core.

30 The reference number 23 denotes the position in which the cold shunt can be placed as explained above, whereas the reference number 24 denotes the position within the dielectric insulator, where the hot shunt can be placed.

C l a i m s:

1. A method for overcurrent protection in a superconducting cable,
5 c h a r a c t e r i z e d in that a current detector, which can be constituted by a part of
or all of the cable, is inserted in series with the cable conductor of the
superconducting cable.
2. A method according to claim 1, c h a r a c t e r i z e d in that at least one super-
10 conducting piece is inserted as the current detector.
3. A method according to claim 1 or 2, c h a r a c t e r i z e d in that a fuse is inserted
as the circuit breaker.
- 15 4. A method according to any of claims 1-3, c h a r a c t e r i z e d in that a cold
shunt is inserted in parallel with the cable conductors of the superconducting cable.
5. A method according to any of claims 1-4, c h a r a c t e r i z e d in that an electri-
cal conductor is inserted in parallel with the cable conductors of the superconducting
20 cable and the current detector or current limiter, said electrical conductor having a
higher impedance than the superconducting cable when in its superconducting
state.
6. A method according to any of claims 1-6, c h a r a c t e r i z e d in that a material
25 comprising a superconducting material quenching at a lower current than the super-
conducting cable is inserted as the current detector.
7. A method according to any of claims 1-6, c h a r a c t e r i z e d in that the current
detector comprises a relay or a fuse, a thyristor, a transistor, or similar power elec-
30 tronic components.
8. A method according to any of claims 1-7, c h a r a c t e r i z e d in that the current
detector is constituted by a current-dependent resistance.

9. A superconducting cable characterized in that the cable conductors of the cable are connected in series with a current detector for overcurrent detection and a circuit breaker or current limiter.

5 10. A superconducting cable according to claim 9, characterized in that the circuit breaker comprises a fuse.



11. A superconducting cable according to claim 8 or 9, characterized in that the current detector is constituted by a superconducting material such as YBCO or
10 Bi 2212.

12. A superconducting cable according to any of claims 8-11, characterized in that a cold shunt is coupled in parallel with the cable conductor of the cable. The cold shunt is wound in such a way that the current in this is reduced to a minimum
15 during normal operation.

13. A superconducting cable according to any of claims 10-12, characterized in that a shunt at ambient temperature is coupled in parallel with the superconducting material of the superconducting cable, and the current detector.

20

14. A superconducting cable according to claim 9, characterized in that the circuit breaker comprises high-speed power electronics.

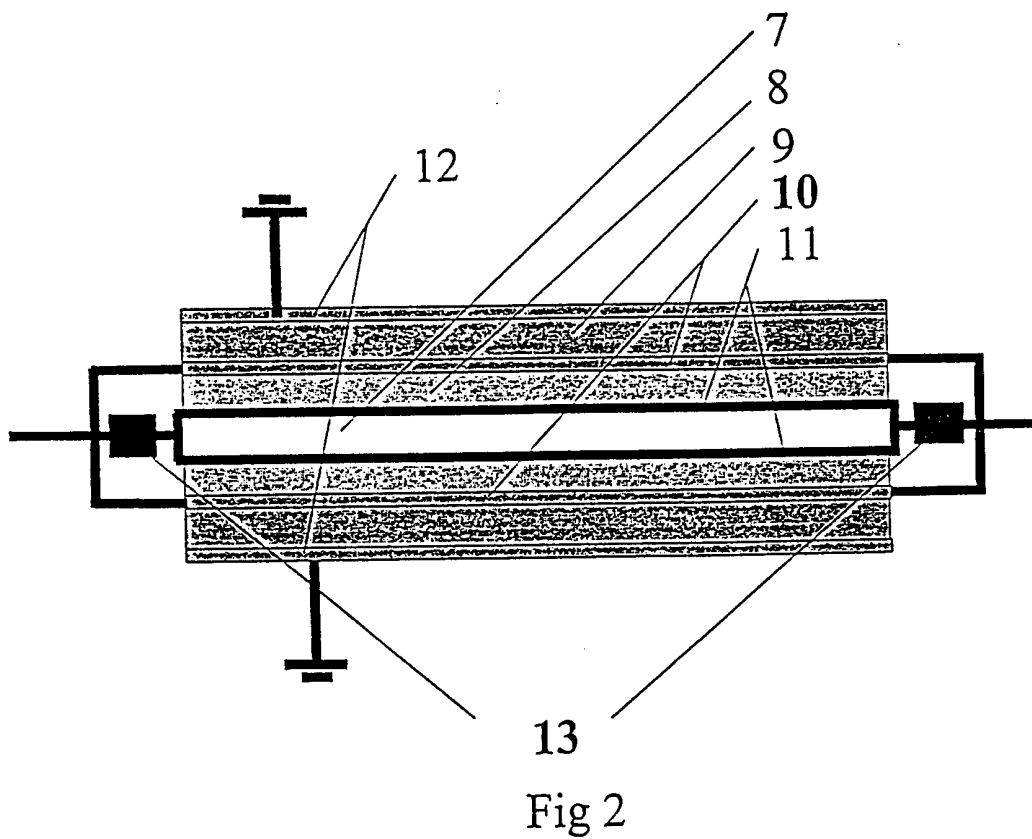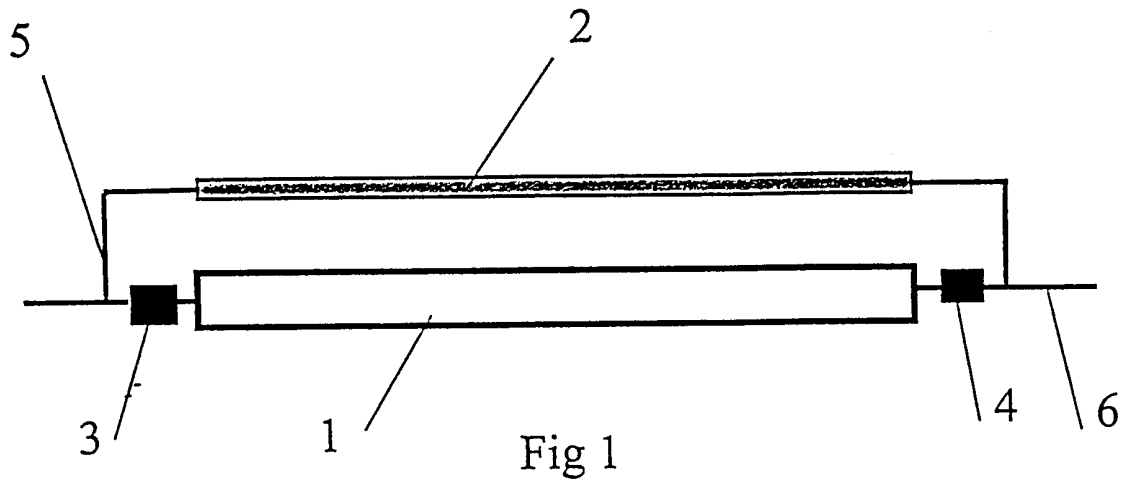

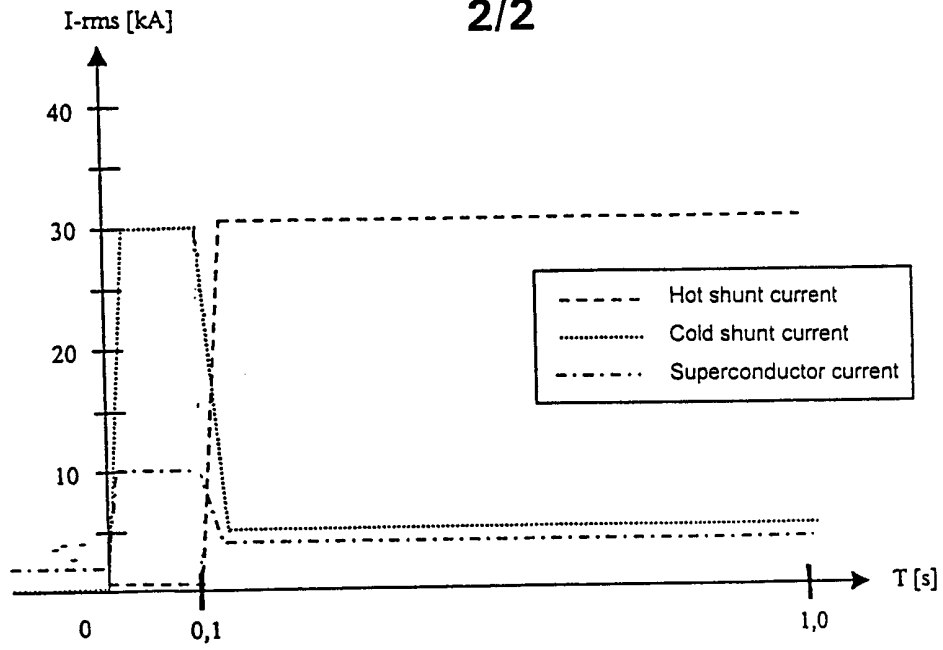


Fig 3

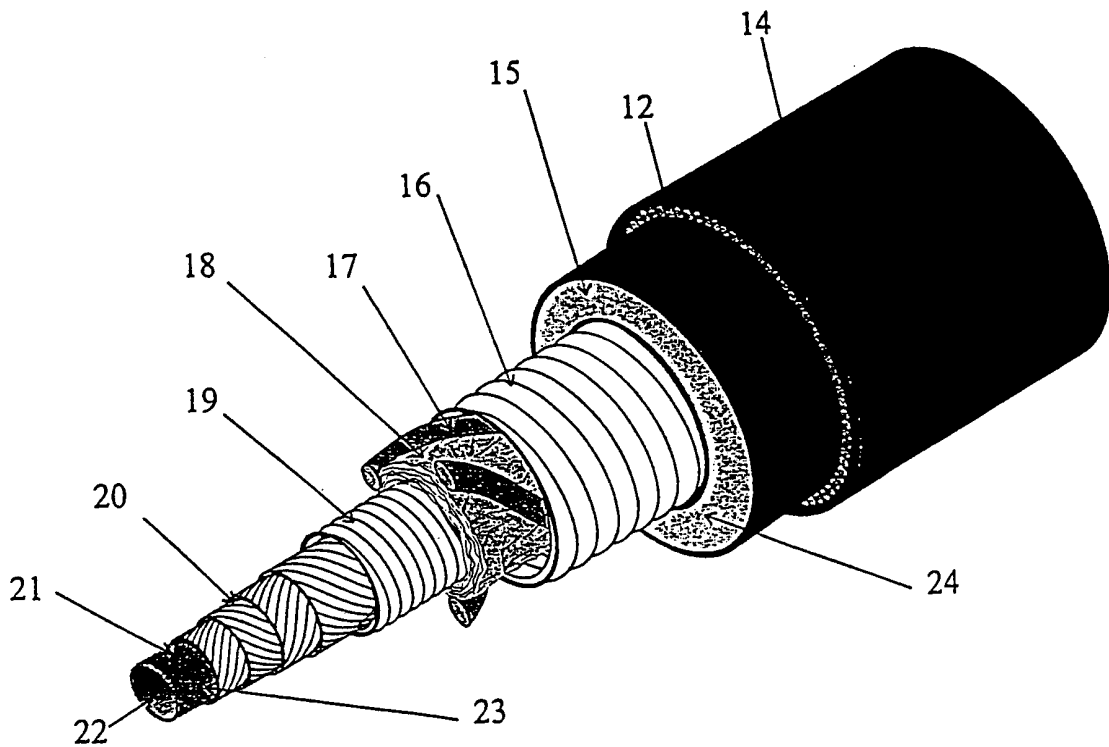


Fig 4