



(11) **EP 1 338 075 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Description Paragraph(s) 07

(51) Int Cl.:
H02J 9/06 (2006.01)

(86) International application number:
PCT/US2001/044558

(48) Corrigendum issued on:
02.01.2008 Bulletin 2008/01

(87) International publication number:
WO 2002/045248 (06.06.2002 Gazette 2002/23)

(45) Date of publication and mention
of the grant of the patent:
31.10.2007 Bulletin 2007/44

(21) Application number: **01999034.0**

(22) Date of filing: **28.11.2001**

(54) **MULTI-FUNCTIONAL AC/DC CONVERTER**

MULTIFUNKTIONS-AC/DC-WANDLER

CONVERTISSEUR MULTIFONCTION C.A./C.C.

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR

(30) Priority: **30.11.2000 US 250390 P**
19.10.2001 US 85788

(43) Date of publication of application:
27.08.2003 Bulletin 2003/35

(73) Proprietor: **Honeywell International Inc.**
Morristown, New Jersey 07960 (US)

(72) Inventor: **LAZAROVICH, David**
Thornhill, Ontario, CA 00001 (CA)

(74) Representative: **Hucker, Charlotte Jane**
Gill Jennings & Every LLP
Broadgate House
7 Eldon Street
London EC2M 7LH (GB)

(56) References cited:
US-A- 5 606 244 US-A- 5 783 872
US-A- 5 864 221

EP 1 338 075 B9

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to an AC to DC converter of an electrical power system.

[0002] A conventional power system design includes a Transformer Rectifier Unit ("TRU") as main DC power source, the output voltage of which varies with applied load. Due to the varying nature of its output voltage, the TRU has been considered unsuitable for charging batteries that rely on for backup/auxiliary power supply. Specifically, the varying nature of the TRU output voltage does not enable a constant potential or constant current charging mode. To address this drawback, some systems use an ON/OFF device to connect and disconnect the battery from the TRU bus to improve charging performance.

[0003] Another conventional approach utilizes a DC generator as a main power source to generate a constant output voltage. Although such a DC generator is suitable for charging batteries at constant potential, this approach can neither limit the current flowing into the battery at the beginning of the starting cycle nor compensate for temperature variations, which strongly influence the battery State of Charge ("SOC"). Also, by not controlling the amount of trickle charge, the DC generator causes the battery to lose electrolytes over time.

[0004] Yet another conventional approach utilizes a Regulated Transformer Rectifier Unit ("RTRU") as a main DC source with constant output voltage: The RTRU can charge batteries at constant potential, but can neither limit the current flowing into the battery nor compensate for temperature variations. Also, by not controlling the amount of trickle charge, the RTRU causes the battery to lose electrolytes over time.

[0005] Due to the above drawbacks, additional equipment, such as a separate battery charger, is commonly used in addition to the main DC power source. Since the charging voltage may be high at times, the battery must be disconnected from the main DC bus of the power system during charging. This requires special power bus arrangements and restricts the use of the battery as a bus presence, thereby affecting DC power system flexibility and quality.

[0006] US-A-5864221 discloses a multi-functional apparatus for regulating voltage supplied to electrodes and delivered to a rechargeable battery via a bus bar.

[0007] The present invention addresses these drawbacks of conventional power system designs by providing a multi-functional apparatus for regulating voltage supplied to electrical loads and delivered to a rechargeable battery via a DC power bus, comprising:

aAC to DC converter receiving an AC supply voltage, converting said AC supply voltage to a regulated DC voltage, and outputting said regulated DC voltage to said DC power bus, thereby supply said regulated voltage to an electrical load connected to said DC power bus and to said rechargeable battery, which

is continuously connected to said DC power bus; and a power controller controlling conversion performed by said AC to DC converter as a function of a characteristic of said battery. The present invention is suitable for implementation in an aircraft power system to maintain the voltage output within the compliance range of the DC power bus (e.g., between 27.5 and 29.5 Vdc) while adjusting the output voltage to efficiently charge a battery connected to the bus and/or start an APU connected to the bus.

[0008] In one embodiment of the present invention, a multi-functional AC to DC converter includes a power control unit that monitors the current level drawn by a recharging battery and controls the voltage output by the AC to DC conversion circuitry based on the charging state of the battery. In a first power control stage, in which the battery is completely or nearly discharged, the power control unit controls the output voltage to a relatively low level (within the compliance range of the power system) to prevent the battery from drawing an uncontrolled or excessive amount of current. As the battery charges, and its internal impedance increases, the power control unit allows the output voltage to increase, thereby maintaining the current flowing to the battery at an adequate level for efficiently charging the battery. When the output voltage reaches a threshold level, the power control unit initiates a second control stage to maintain the output voltage constant at the elevated level (e.g., near the upper compliance limit of the DC power bus) so that the battery continues to charge, albeit at continually decreasing current. During this second power control stage, the power control unit in one implementation of the present invention controls output voltage as a function of battery temperature so that the output voltage is lower for higher battery temperatures and higher for lower battery temperatures. This temperature compensation improves the efficiency of the battery charging process. When the current drawn by the battery drops below a threshold level (e.g., indicating that the battery is about 80% percent recharged), the power control unit initiates a third power control stage to lower the output voltage to a nominal regulated level (e.g., 28 Vdc in an aircraft DC bus implementation) to trickle charge the battery (i.e., achieve constant potential trickle charge mode). This third power control stage prevents electrolyte loss during trickle charge.

[0009] By incorporating multiple functions in a single unit, the AC to DC converter of the present invention improves reliability because additional Line Replaceable Units ("LRUs") and associated switching devices are not required to connect/disconnect the charging battery to/from the DC power bus and requires less control and power wiring. Furthermore, because the recharging battery may be continuously connected to the DC power bus, the present invention enables No-Break-Power-Transfers (NBPT) in the DC subsystem during AC power interrupts or other system failures and reduces DC system weight and cost as compared to a system requiring

a separate battery charger.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Other aspects and advantages of the present invention will become apparent upon reading the following detailed description and upon reference to the drawings, in which:

[0011] FIG. 1 is a block diagram illustrating an exemplary implementation of a multi-functional AC to DC converter and its integration into a typical aerospace DC Subsystem according to the present invention;

[0012] FIG. 2 is a block diagram of a multi-functional AC to DC converter according to an embodiment of the present invention;

[0013] FIG. 3 is a diagram illustrating the power control stages utilized by a multi-functional AC to DC converter to implement a battery charging control sequence according to an embodiment of the present invention; and

[0014] FIG. 4 is a block diagram of an exemplary DC/DC converter configuration, which is implemented as part of a multifunctional AC to DC converter in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION

[0015] FIG. 1 illustrates an exemplary implementation of a multi-functional AC to DC converter and its integration into a typical aerospace DC Subsystem according to the present invention. In the exemplary implementation shown in FIG. 1, a multi-functional converter 100, a battery 200, and an auxiliary power unit 400 are connected to a DC power bus 300, which may be one of multiple DC power buses of an aircraft power subsystem. It should be readily apparent that various electrical loads and other elements may be connected to the DC power bus 300. The multi-functional converter 100 receives an AC input (e.g., 115 or 230 Vac) and outputs a voltage that is regulated in accordance with principles of the present invention discussed in detail below. A battery current sensor 10 is provided between the DC power bus 300 and the battery 200 to monitor current flow to the battery 200. Likewise, an APU current sensor 20 is provided between the DC power bus 300 and the APU 400 to monitor current flow to the APU 400.

[0016] The multi-functional converter 100 receives the output of the battery current sensor 10 and the APU current sensor 20, as well as the output of a temperature sensor 210, which monitors temperature of the battery 200. The multi-functional converter 100 also receives the point-of-regulation ("POR") voltage as an indication of increasing/decreasing load levels on the DC power bus 300. As described in detail below, the multi-functional converter 100 controls output voltage to be within the compliance range of the corresponding DC power subsystem (e.g., within the range of 27.5 to 29 Vdc for aircraft implementation) while adjusting the output voltage to efficiently recharge and prevent electrolyte loss of the bat-

tery 200. Furthermore, the multi-functional converter 100 adjusts the output voltage during start-up of the APU 400 to limit the starting current of the APU 400 to a level needed for efficient start up. The AC to DC converter 100 may independently start the APU 400 or assist a battery in the starting process.

[0017] FIG. 2 is a block diagram of a multi-functional AC to DC converter 100 configuration according to an embodiment of the present invention. As seen in FIG. 2, the multi-functional converter 100 includes: (a) a first stage AC/DC converter 110; (b) a switching module 120; (c) a power control unit 130; (d) an output transformer 140; (e) and an output rectifier and filter unit 150. As in a conventional power system design, the first stage AC/DC converter receives 3-phase AC voltage (e.g., 115 or 230 Vac at 400 Hz or variable frequency of 360 to 800 Hz) and converts the 3-phase AC voltage to an intermediate DC voltage (e.g., 270 Vdc). This initial AC to DC conversion may be performed by a combination of phase-conversion and rectification circuitry. For example, a 3-phase to 9-phase auto-transformer (not shown) may convert the input 3-phase voltage to a 9-phase AC voltage connected to an 18-pulse rectifier (not shown) to convert the resulting 9-phase AC voltage to DC voltage. It should be apparent that alternative configurations may be utilized to convert the input 3-phase voltage to an intermediate DC voltage. The switching module 120 converts the DC voltage output by the first stage AC/DC converter 110 to an AC voltage based on switch gating signals output by the power control unit 130. The switching module 120 may be implemented as a known "H-bridge" configuration of power devices, e.g., insulated gate bipolar transistors ("IGBTs") in which two IGBT pairs are alternatively activated to create an AC voltage across the primary winding of the output transformer 140.

[0018] According to the present invention, the switching control module 120 generates an AC voltage having a root-mean-square ("RMS") level that is controlled by the power-control unit 130 based on one or more of the following: (1) output of the battery current sensor 10; (2) output of the battery temperature sensor 210; (3) output of the APU current sensor 20; and (4) POR voltage, which indicates load on the DC power bus 300. This switching control is discussed in more detail below with reference to FIGS. 3 and 4. The AC voltage output by the switching module 120 is transformed to a lower AC voltage by the output transformer 140 (i.e., a step-down transformer). The lower AC voltage output by the output transformer 140 is rectified and filtered by the output rectifier and filter unit 150 to output a regulated voltage level to the DC power bus 300. The regulated voltage output by the output rectifier and filter unit 150 is also fed back to the power control unit 130 to assist regulating voltage to a desired level.

[0019] Operation of the power control unit 130 for achieving efficient battery charging will next be described with reference to the diagram of FIG. 3, which illustrates output voltage (solid line) and battery input current

(dashed line), as measured by the battery current sensor 10, over a charging cycle of the battery 200. As illustrated in FIG. 3, the power control unit 130 operates to achieve three recharge stages of the battery 200 while maintaining the output voltage within the compliance range of the DC power bus 300 (e.g., between 27.5 and 29.5 Vdc). In a first power control stage, in which the battery is completely or nearly discharged, the power control unit 130 controls the output voltage to a relatively low level (within the compliance range of the power system) that maintains constant limited current flow into the battery 200. This power control stage prevents the battery 200 from drawing an uncontrolled or excessive amount of current which could damage the battery or overload the converter 100.

[0020] As the battery 200 charges, and its internal impedance increases, the power control unit 130 allows the output voltage to increase, thereby maintaining the current flowing to the battery 200 at a constant level. When the output voltage reaches a maximum threshold level, e.g., just under the upper compliance level of the DC power bus, the power control unit 130 initiates a second control stage to maintain the output voltage constant at or near the maximum converter output voltage so that the battery 200 continues to charge, albeit at continually decreasing current. During this second control stage, the charging current into the battery 200 decreases continually due to the increase in the internal battery impedance. During this second power control stage, the power control unit 130 in one implementation of the present invention controls output voltage as a function of battery temperature to optimize the battery charging process, such that the output voltage is made lower for higher battery temperatures and higher for lower battery temperatures. This temperature compensation improves battery charging efficiency.

[0021] Lastly, when the current drawn by the battery drops below a threshold level (e.g., indicating that the battery is about 80% percent recharged), the power control unit 130 initiates a third power control stage to lower the output voltage to a nominal regulated level (e.g., 28 Vdc in an aircraft DC bus implementation) to trickle charge the battery (i.e., achieve constant potential trickle charge mode). This voltage level is lower than the one employed during the second control stage in order to minimize the electrolyte loss. During this trickle charge constant voltage stage, the charging current into the battery 200 is maintained at a very low level (e.g., 1 amp or less). By following changes in battery current and output voltage of the converter 100 over time, the power control unit 130 can determine within certain limits the level of battery charge and output a signal indicating the estimated charge state of the battery. For example, the power control unit 130 may output a signal to the Flight Deck in an aircraft implementation to indicate readiness of the battery 200 for flight.

[0022] While controlling the output voltage of the converter 100, the power control unit 130 ensures that the

output voltage is maintained within a range that is compliant with the requirements of the power quality standard in use for the application. This voltage level enables the battery 200 to be continuously connected to the DC power bus 300. Thus, the battery 200 is readily available during AC power interrupt or other system failures. The above-described battery charging stages may be implemented in the power control unit 130 in the form of a dedicated integrated circuit ("IC") card and may be implemented with hardware, software, or a combination of hardware and software. In order to optimize the charging process, the voltage applied may be temperature compensated, e.g., lower for higher battery temperatures and higher when low battery temperatures are measured.

[0023] FIG. 4 illustrates an exemplary configuration for the power control unit 130, the switching module 120, the output transformer 140, and the output rectifier and filter unit 150. As shown in FIG. 4, the power control unit 130 includes a pulse width modulation ("PWM") unit 132 that receives a measure of POR voltage, current measurements for the battery 200 and APU 400, temperature of the battery 200, and a measure of output voltage of the converter 100. The PWM unit 132 generates a sequence of pulses, the width of which are varied depending on at least one characteristic of the battery 200 (e.g., depending on the battery charge state). The pulse width may further be adjusted to account for changes in load, reflected by the POR voltage, and to account for a start up condition of the APU 400. The PWM unit 132 outputs the generated PWM signal to the gate driver 134, which drives the switches of the switching module 120.

[0024] As seen in FIG. 4, the switching module 120 according to one implementation of the present invention is a conventional H-bridge configuration of power devices, which are n-channel IGBTs in the exemplary implementation shown in FIG. 4. The switching module 120 shown in FIG. 4 includes first, second, third, and fourth IGBT modules 122, 124, 126, and 128, each formed of an IGBT and an anti-parallel diode, the anode of the anti-parallel diode being connected to the emitter of the corresponding IGBT and the cathode being connected to the collector of the corresponding IGBT. The gates of the first, second, third, and fourth IGBT modules 122, 124, 126, and 128 are connected to receive an output of the gate driver 134. The first IGBT module 122 and the second IGBT module 124 (diagonally positioned) share a common connection to the gate driver 134, thus constituting a first IGBT module pair, and the third IGBT module 126 and the fourth IGBT module 128 (diagonally positioned) share a common connection to the gate driver 134, thus constituting a second IGBT module pair. The PWM switching signals output by the gate driver 134 to the IGBT module pairs are offset so that that IGBT module pairs alternately turn ON/OFF, thereby creating an AC voltage across the primary winding of the transformer 140, which is a center-tapped transformer in the exemplary configuration of FIG. 4.

[0025] As shown in FIG. 4, the collector of the first IGBT

module 122 is connected to the (+) output of the first stage AC/DC converter 110. Likewise, the collector of the fourth IGBT module 128 is connected to the (+) output of the first stage AC/DC converter 110. The emitter of the first IGBT module 122 is connected to the collector of the third IGBT module 126 and to a first side of the primary winding of the output transformer 140. The emitter of the fourth IGBT module 128 is connected to the collector of the second IGBT module 124 and to a second side of the primary winding of the output transformer 140. The emitter of the third IGBT module 126 and the emitter of the second IGBT module 124 are connected to the (-) output of the first stage AC/DC converter 110. By alternately activating two switching module pairs formed of the first and second IGBT modules 122, 124 and the third and fourth IGBT modules 126, 128 respectively, the gate driver 134 causes the switching module 120 to create an alternating voltage across the primary winding of the output transformer 140. The RMS value of this alternating voltage is affected by the pulse width of the gating signals output by the gate driver 134, which is altered as a function of at least one of: battery charge characteristics, battery temperature, APU start condition, and POR voltage according to principles of the present invention.

[0026] As further shown in FIG. 4, the output rectifier and filter unit 150 includes a pair of diodes 152a, 152b, each connected to an end of the secondary winding of the output transformer 140 to convert the transformed AC voltage to DC. The output rectifier and filter unit 150 further includes an inductor 154 connected between the output of the pair of diodes 152a, 152b and the output of the output rectifier and filter unit 150 and a capacitor 156 connected between the output end of the inductor 154 and a negative terminal of the converter arrangement, which is shown as a grounded connection in the implementation of FIG. 4. This arrangement of the inductor 154 and the capacitor 156 filters the rectified DC voltage resulting from the pair of diodes 152a, 152b. It should be recognized that various alternative arrangements may be suitable for the output rectifier and filter unit 150.

[0027] Although operation of the power control unit 130 has been discussed above based on recharge characteristics of the battery 200, the power control unit 130 may also continuously monitor the current drawn by the APU 400 (as shown in FIG. 2.) When used in an APU start application, the power control unit 130 limits the starting current drawn by the APU 400 to a value which is suitable for the converter 110 to independently start the APU 400 or to start the APU 400 in conjunction with a battery. As further shown in FIG. 2, the power control unit 130 continuously monitors the POR voltage so as to regulate output voltage as a function of load. Increased load on the DC power bus 300 will cause higher losses to occur in the first stage AC to DC converter 110, which will result in lower RMS voltage applied to the output transformer 140. Thus, the power control unit 130 adjusts the pulse width for the switch gating signals output to the switching module 120 based on load levels to maintain

the desired output voltage of the converter 100.

[0028] By incorporating multiple functions in a single unit, the AC to DC converter 100 of the present invention improves reliability because additional Line Replaceable Units ("LRUs") and associated switching devices are not required to connect/disconnect the charging battery 200 to/from the DC power bus 300 and requires less control and power wiring. Furthermore, because the recharging battery 200 may be continuously connected to the DC power bus 300, principles of the present invention enable No-Break-Power-Transfers (NBPT) in the DC subsystem during AC power interrupts or other system failures and reduces DC system weight and cost as compared to a system requiring a separate battery charger.

Claims

1. A multi-functional apparatus (100) for regulating voltage supplied to electrical loads and delivered to a rechargeable battery (200) via a DC power bus (300), comprising:

a AC to DC converter (110, 120, 140, 150) receiving an AC supply voltage, converting said AC supply voltage to a regulated DC voltage, and outputting said regulated DC voltage to said DC power bus (300), thereby supply said regulated voltage to an electrical load connected to said DC power bus and to said rechargeable battery, which is continuously connected to said DC power bus; and
a power controller (130) controlling conversion performed by said AC to DC converter (110, 120, 140, 150) as a function of a characteristic of said battery (200).

2. The apparatus according to claim 1, wherein said DC power bus (300) is a power bus of an aerospace power system with electrical load connected thereto.
3. The apparatus according to claim 1, wherein said power controller (130) controls conversion performed by said AC to DC converter (110, 120, 140, 150) so that said AC to DC converter (110, 120, 140, 150) outputs a DC voltage that maintains a constant current flow into said battery (200) from said DC bus (300) during a first control mode.
4. The apparatus according to claim 1, wherein said power controller (130) controls conversion performed by said AC to DC converter (110, 120, 140, 150) so that said AC to DC converter (110, 120, 140, 150) outputs a first constant DC voltage during a second control mode.
5. The apparatus according to claim 4, wherein said power controller (130) controls conversion per-

formed by said AC to DC converter (110, 120, 140, 150) so that said AC to DC converter (110, 120, 140, 150) outputs a second constant DC voltage, which is lower than said first constant DC voltage, during a third control mode.

6. The apparatus according to claim 1, wherein said AC to DC converter (110, 120, 140, 150) includes:

a first AC to DC conversion stage (110) converting said AC supply voltage to an intermediate DC voltage;
a switching module (120) converting said intermediate DC voltage to an intermediate AC voltage;
an output transformer (140) transforming said intermediate AC voltage to a step-down AC voltage; and
a rectifier (150) converting said step-down AC voltage to a DC voltage.

7. The apparatus according to claim 6, wherein said power controller (130) generates a switch gating signal and outputs said switch gating signal to said switching module (120) to control a root-mean-square level of said intermediate AC voltage.

8. The apparatus according to claim 7, wherein said power controller (130) generates a pulse width modulated switching signal having a pulse width that varies depending on a recharge state of said battery (200).

9. The apparatus according to claim 1, wherein said power controller (130) controls conversion performed by said AC to DC converter (110, 120, 140, 150) as a function of temperature of said battery (200).

10. The apparatus according to claim 1, wherein said AC/DC converter (110, 120, 140, 150) outputs said regulated DC voltage to an auxiliary power unit (400) via said DC power bus (300) and said power controller (130) further controls conversion performed by said AC to DC converter (110, 120, 140, 150) as a function of current drawn by said auxiliary power unit (400).

Patentansprüche

1. Multifunktionsvorrichtung (100) zum Regeln einer elektrischen Lasten zugeführten und an eine wiederaufladbare Batterie (200) über einen Gleichstrombus (DC-Leistungsbus) (300) gelieferten Spannung, umfassend:

einen Wechselstrom-Gleichstrom-Wandler

(AC/DC) (110, 120, 140, 150), der eine AC-Versorgungsspannung empfängt, die AC-Versorgungsspannung in eine geregelte DC-Spannung umwandelt und die geregelte DC-Spannung an den DC-Leistungsbus (300) ausgibt, um dadurch die geregelte Spannung an eine mit dem DC-Leistungsbus verbundene elektrische Last und an die wiederaufladbare Batterie zu liefern, die ständig mit dem DC-Leistungsbus verbunden ist; und
einen Leistungscontroller (130), der eine von dem AC/DC-Wandler (110, 120, 140, 150) durchgeführte Umwandlung als Funktion einer Charakteristik der Batterie (200) steuert.

2. Vorrichtung nach Anspruch 1, wobei der DC-Leistungsbus (300) ein Leistungsbus eines Luft- und Raumfahrt-Leistungssystems mit daran angeschlossener elektrischer Last ist.

3. Vorrichtung nach Anspruch 1, wobei der Leistungscontroller (130) die von den AC/DC-Wandler (110, 120, 140, 150) durchgeführte Umwandlung so steuert, daß der AC/DC-Wandler (110, 120, 140, 150) eine Gleichspannung ausgibt, die einen konstanten Stromfluß in die Batterie (200) von dem DC-Bus (300) während eines ersten Steuermodus aufrechterhält.

4. Vorrichtung nach Anspruch 1, wobei der Leistungscontroller (130) die von den AC/DC-Wandler (110, 120, 140, 150) durchgeführte Umwandlung so steuert, daß der AC/DC-Wandler (110, 120, 140, 150) eine erste konstante Gleichspannung während eines zweiten Steuermodus ausgibt.

5. Vorrichtung nach Anspruch 4, wobei der Leistungscontroller (130) die von den AC/DC-Wandler (110, 120, 140, 150) durchgeführte Umwandlung so steuert, daß der AC/DC-Wandler (110, 120, 140, 150) eine zweite konstante Gleichspannung während eines dritten Steuermodus ausgibt, die niedriger ist als die erste konstante Gleichspannung.

6. Vorrichtung nach Anspruch 1, wobei der AC/DC-Wandler (110, 120, 140, 150) folgendes enthält:

eine erste AC/DC-Umwandlungsstufe (110), die die AC-Versorgungsspannung in eine Zwischengleichspannung umwandelt;
ein Schaltmodul (120), das die Zwischengleichspannung in eine Zwischenwechselspannung umwandelt;
einen Ausgangstransformator (140), der die Zwischenwechselspannung in eine heruntertransformierte Wechselspannung transformiert; und
einen Gleichrichter (150), der die heruntertrans-

formierte Wechselspannung in eine Gleichspannung umwandelt.

7. Vorrichtung nach Anspruch 6, wobei der Leistungscontroller (130) ein Schalteransteuersignal erzeugt und das Schalteransteuersignal an das Schaltmodul (120) ausgibt, um einen Effektivpegel der Zwischenwechselspannung zu steuern. 5
8. Vorrichtung nach Anspruch 7, wobei der Leistungscontroller (130) ein impulsbreitenmoduliertes Schaltsignal mit einer Impulsbreite erzeugt, die je nach einem Wiederaufladungszustand der Batterie (200) variiert. 10
9. Vorrichtung nach Anspruch 1, wobei der Leistungscontroller (130) eine von dem AC/DC-Wandler (110, 120, 140, 150) durchgeführte Umwandlung als Funktion der Temperatur der Batterie (200) steuert. 15
10. Vorrichtung nach Anspruch 1, wobei der AC/DC-Wandler (110, 120, 140, 150) die geregelte Gleichspannung an eine Hilfsstromeinheit (400) über den DC-Leistungsbus (300) ausgibt und der Leistungscontroller (130) weiterhin eine von dem AC/DC-Wandler (110, 120, 140, 150) ausgeführte Umwandlung als Funktion eines von der Hilfsstromeinheit (400) gezogenen Stroms steuert. 20

Revendications

1. Appareil multifonction (100) pour réguler la tension fournie à des charges électriques et délivrée à une batterie rechargeable (200) via un bus d'alimentation C.C. (300), comprenant : 25
 - un convertisseur C.A./C.C. (110, 120, 140, 150) recevant une tension d'alimentation C.A., convertissant ladite tension d'alimentation C.A. en une tension C.C. régulée et transmettant ladite tension C.C. régulée audit bus d'alimentation C.C. (300), fournissant ainsi ladite tension régulée à une charge électrique connectée audit bus d'alimentation C.C. et à ladite batterie rechargeable qui est connectée en continu audit bus d'alimentation C.C.; et 30
 - un contrôleur d'alimentation (130) contrôlant la conversion effectuée par ledit convertisseur C.A./C.C. (110, 120, 140, 150) en fonction d'une caractéristique de ladite batterie (200). 35
2. Appareil selon la revendication 1, dans lequel ledit bus d'alimentation C.C. (300) est un bus d'alimentation d'un système d'alimentation aérospatial avec une charge électrique connectée à lui. 40
3. Appareil selon la revendication 1, dans lequel ledit 45

contrôleur d'alimentation (130) contrôle la conversion effectuée par ledit convertisseur C.A./C.C. (110, 120, 140, 150) de sorte que ledit convertisseur C.A./C.C. (110, 120, 140, 150) émette une tension C.C. qui maintienne un flux de courant constant dans ladite batterie (200) provenant dudit bus C.C. (300) dans un premier mode de contrôle.

4. Appareil selon la revendication 1, dans lequel ledit contrôleur d'alimentation (130) contrôle la conversion effectuée par ledit convertisseur C.A./C.C. (110, 120, 140, 150) de sorte que ledit convertisseur C.A./C.C. (110, 120, 140, 150) émette une première tension C.C. constante dans un deuxième mode de contrôle. 15
5. Appareil selon la revendication 4, dans lequel ledit contrôleur d'alimentation (130) contrôle la conversion effectuée par ledit convertisseur C.A./C.C. (110, 120, 140, 150) de sorte que ledit convertisseur C.A./C.C. (110, 120, 140, 150) émette une seconde tension C.C. constante, qui est inférieure à ladite première tension C.C. constante, dans un troisième mode de contrôle. 20
6. Appareil selon la revendication 1, dans lequel ledit convertisseur C.A./C.C. (110, 120, 140, 150) comprend : 25

un premier étage de conversion C.A./C.C. (110) convertissant ladite tension d'alimentation C.A. en une tension C.C. intermédiaire;
un module de commutation (120) convertissant ladite tension C.C. intermédiaire en une tension C.A. intermédiaire;
un transformateur de sortie (140) transformant ladite tension C.A. intermédiaire en une tension C.A. abaissée; et
un redresseur (150) convertissant ladite tension C.A. abaissée en une tension C.C. 30

7. Appareil selon la revendication 6, dans lequel ledit contrôleur d'alimentation (130) génère un signal déclencheur de commutation et transmet ledit signal déclencheur de commutation audit module de commutation (120) pour contrôler un niveau efficace de ladite tension C.A. intermédiaire. 35
8. Appareil selon la revendication 7, dans lequel ledit contrôleur d'alimentation (130) génère un signal de commutation modulée en largeur d'impulsion ayant une largeur d'impulsion qui varie selon un état de recharge de ladite batterie (200). 40
9. Appareil selon la revendication 1, dans lequel ledit contrôleur d'alimentation (130) contrôle la conversion effectuée par ledit convertisseur C.A./C.C. (110, 120, 140, 150) en fonction de la température de ladite 45

batterie (200).

- 10.** Appareil selon la revendication 1, dans lequel ledit convertisseur C.A./C.C. (110, 120, 140, 150) transmet ladite tension C.C. régulée à une unité d'alimentation auxiliaire (400) via ledit bus d'alimentation C.C. (300), et ledit contrôleur d'alimentation (130) contrôle en outre la conversion effectuée par ledit convertisseur C.A./C.C. (110, 120, 140, 150) en fonction du courant consommé par ladite unité d'alimentation auxiliaire (400).

15

20

25

30

35

40

45

50

55

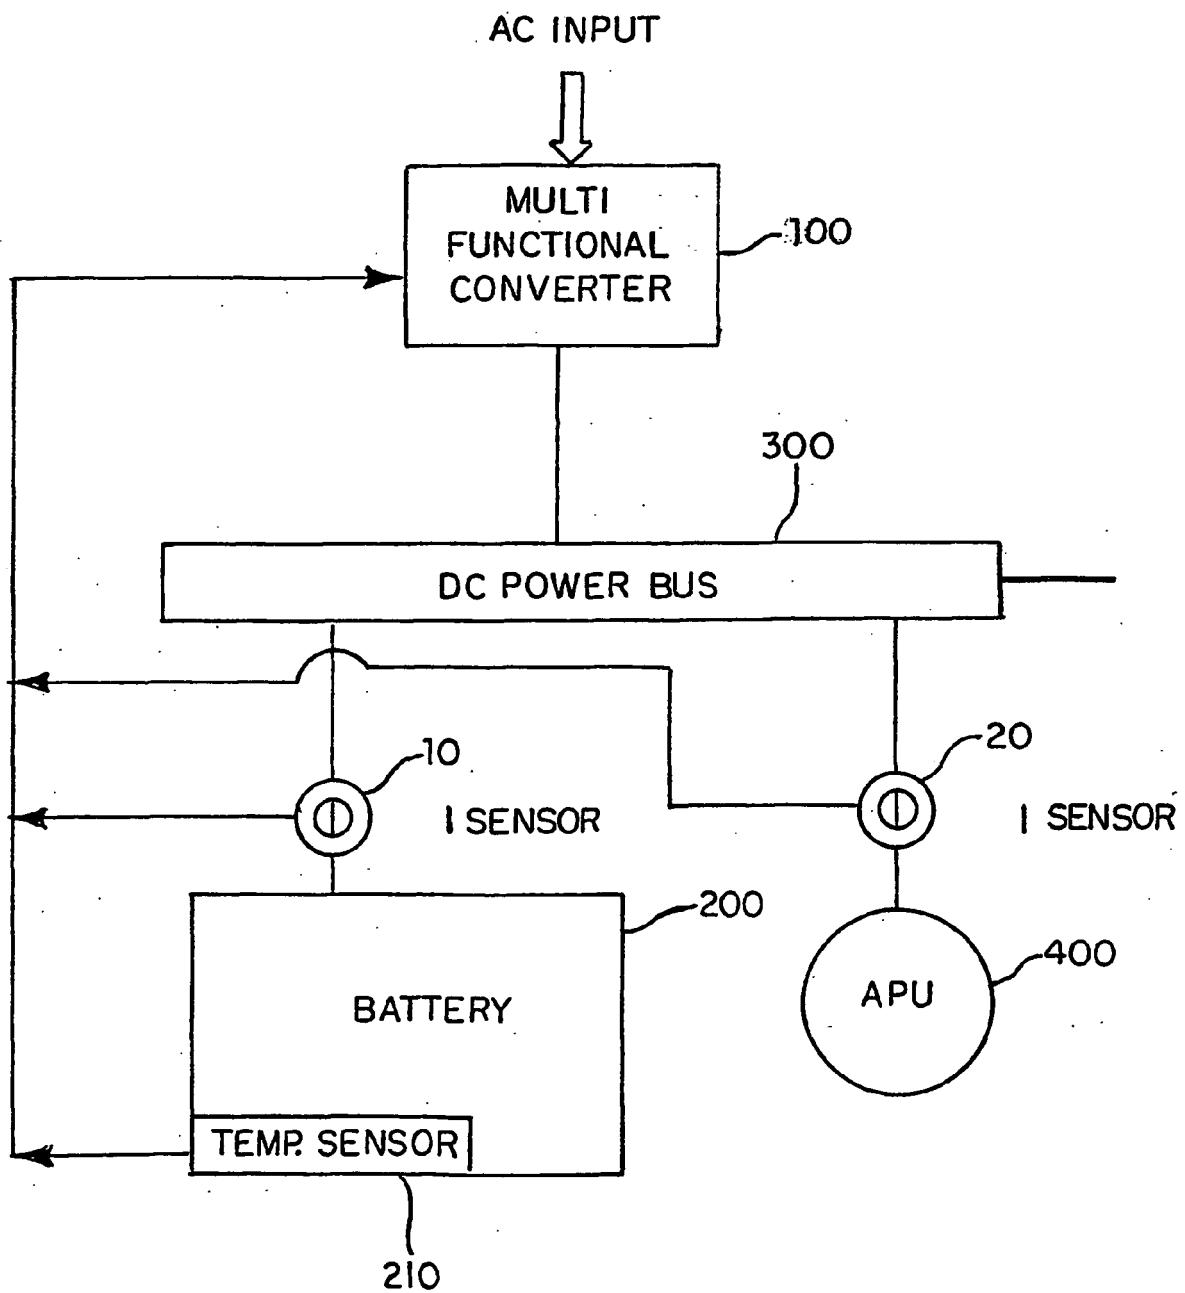
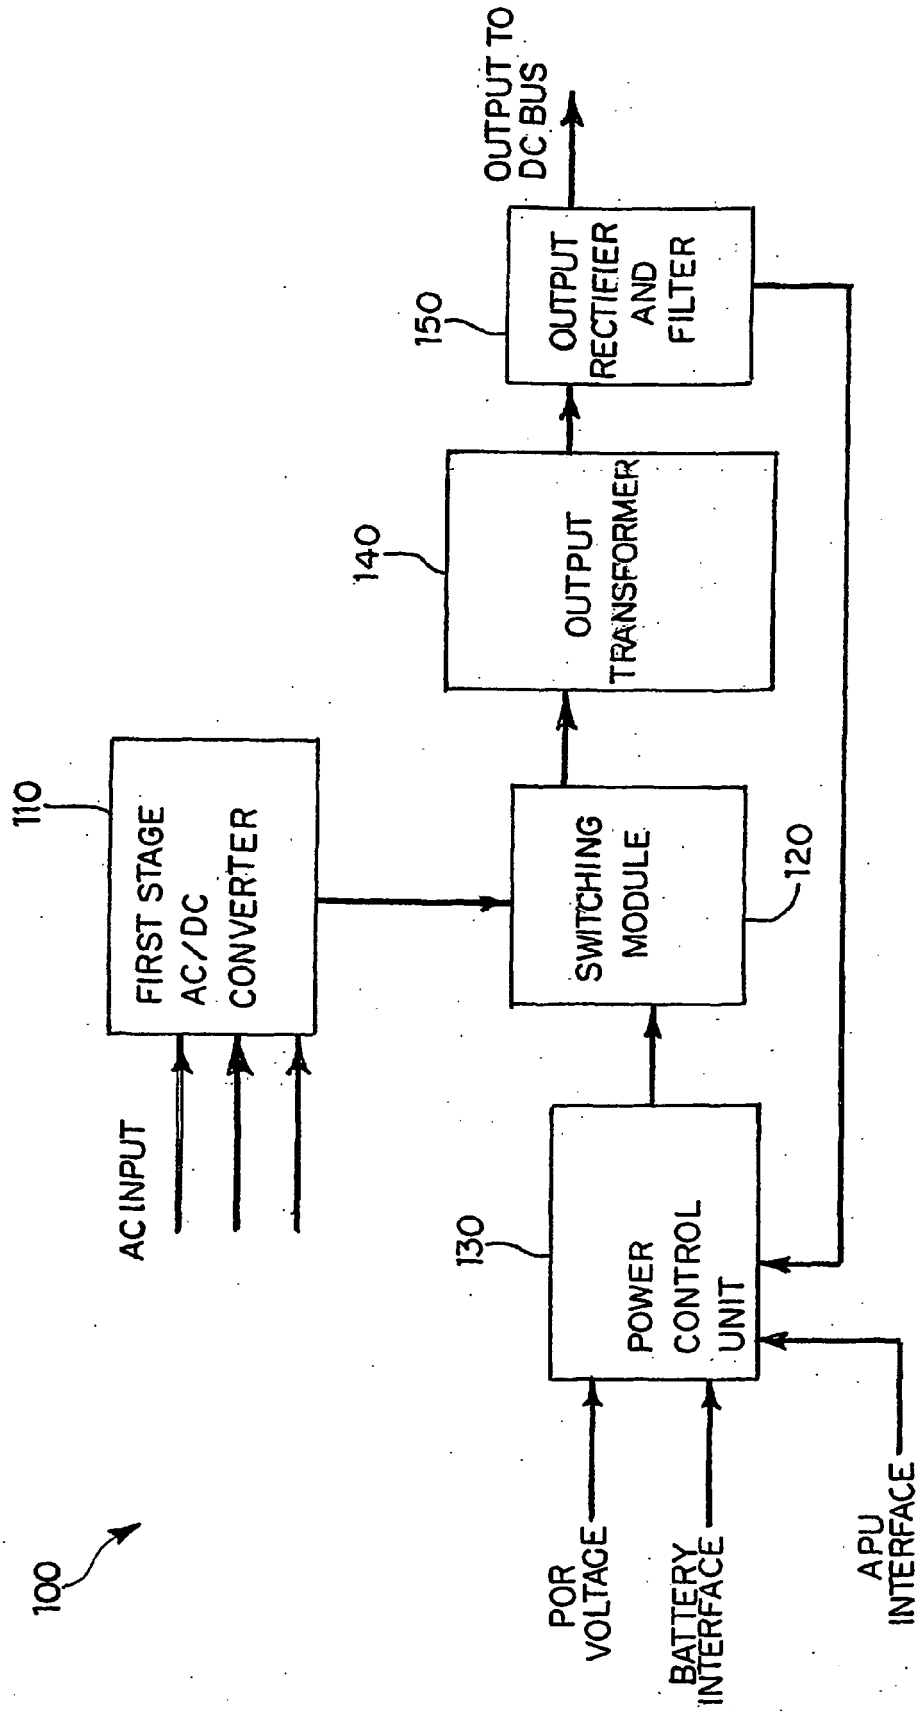


FIG. 1




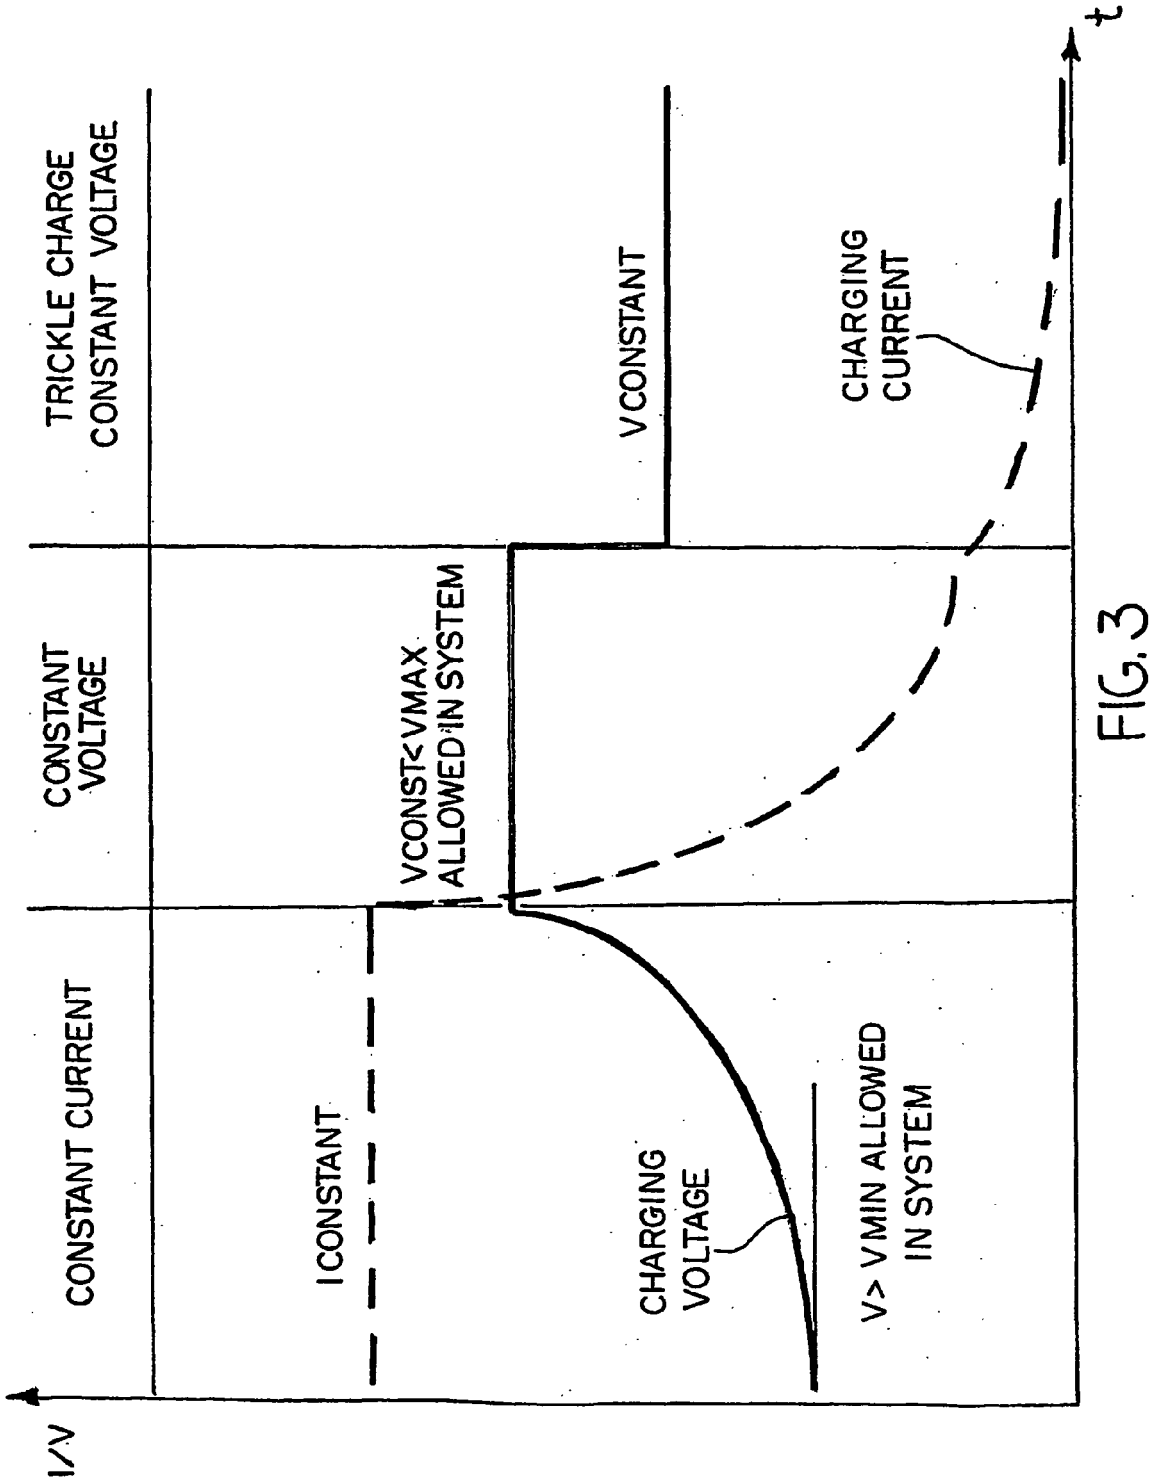


FIG. 3

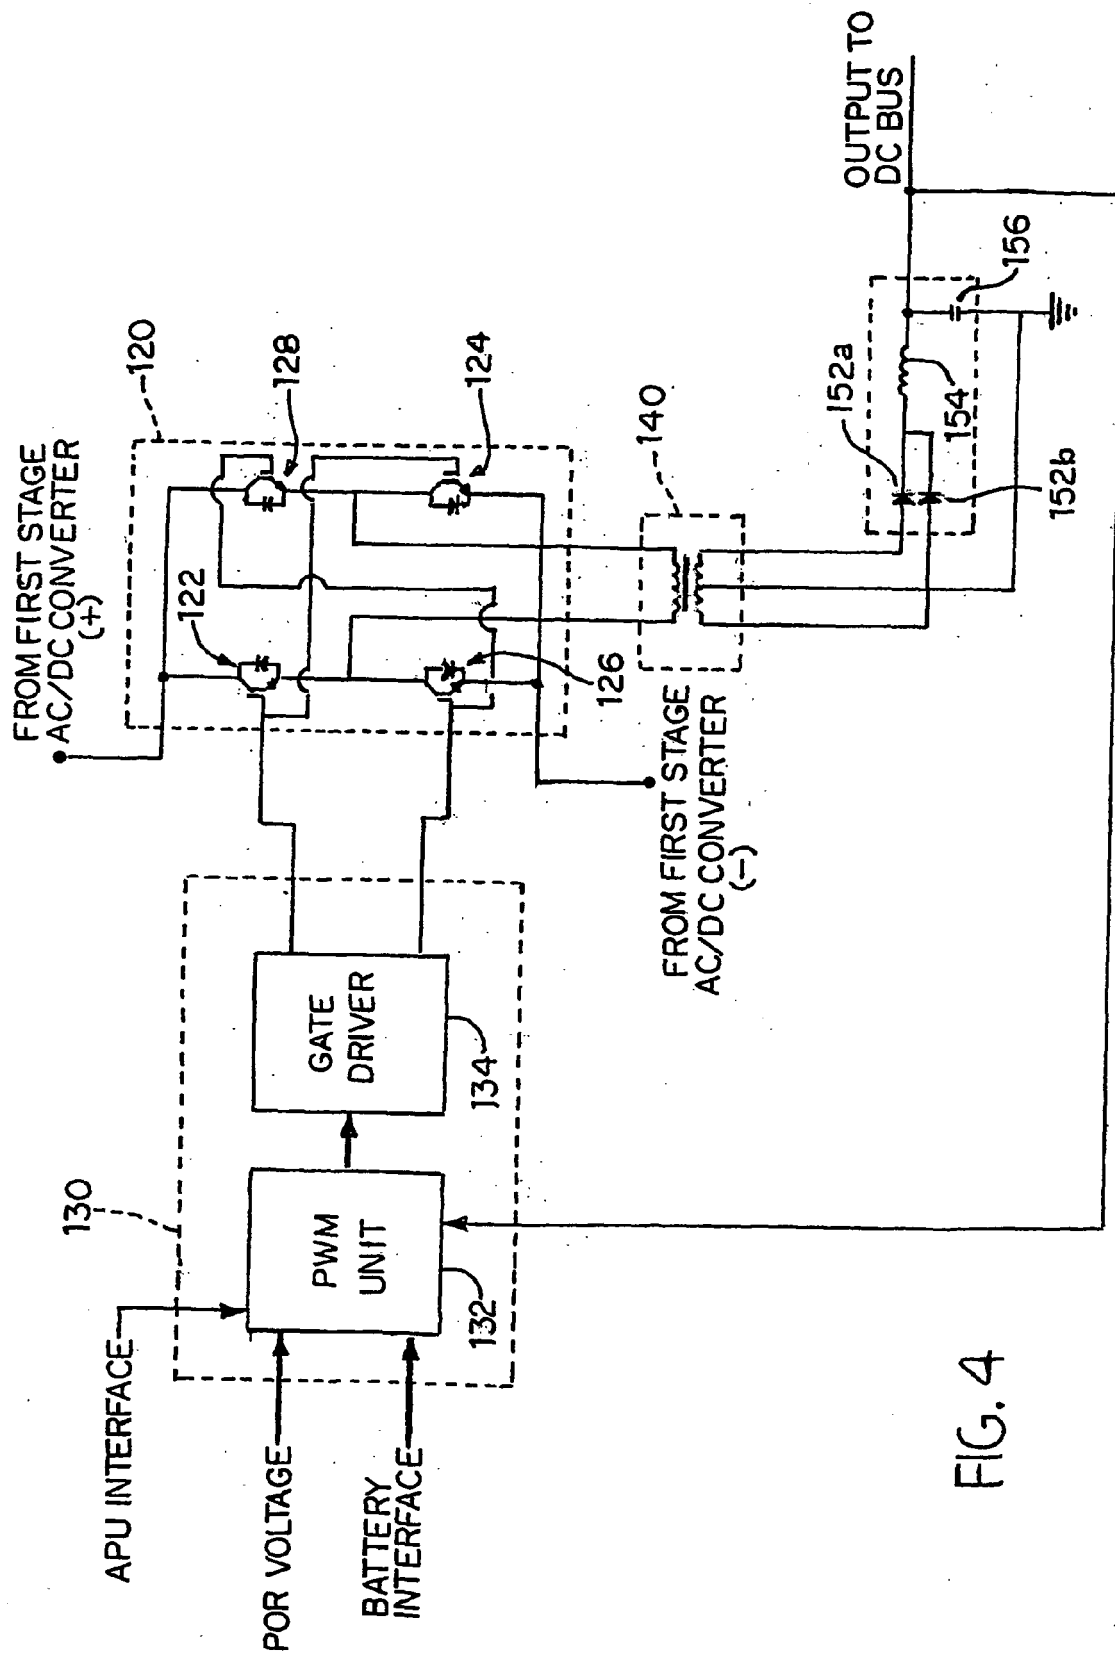

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5864221 A [0006]