

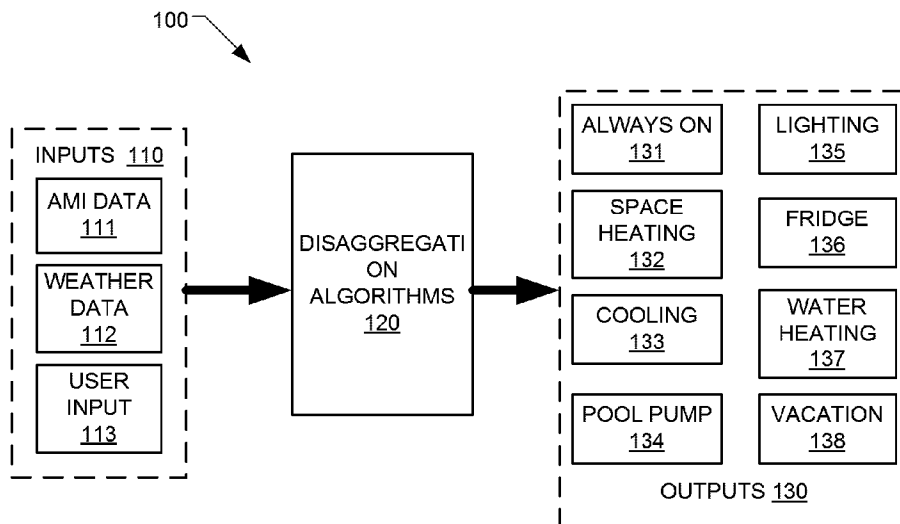


(86) Date de dépôt PCT/PCT Filing Date: 2017/12/27
(87) Date publication PCT/PCT Publication Date: 2018/06/21
(45) Date de délivrance/Issue Date: 2022/06/28
(85) Entrée phase nationale/National Entry: 2019/06/13
(86) N° demande PCT/PCT Application No.: IB 2017/058441
(87) N° publication PCT/PCT Publication No.: 2018/109754
(30) Priorité/Priority: 2016/12/15 (US62/434,992)

(51) Cl.Int./Int.Cl. *G01R 21/133* (2006.01),
G01R 31/34 (2020.01), *G06F 15/00* (2006.01)
(72) Inventeurs/Inventors:
SHYR, ALEX, US;
GARUD, VIVEK, US;
SHARAN, MAYANK, US;
GUPTA, ABHAY, US;
PAREKH, PRATIK, US;
AGGARWAL, ROHIT, US
(73) Propriétaire/Owner:
BIDGELY INC., US
(74) Agent: BERESKIN & PARR LLP/S.E.N.C.R.L., S.R.L.

(54) Titre : AMELIORATIONS APPORTEES A DES TECHNIQUES DE DESAGREGATION D'ENERGIE BASSE FREQUENCE

(54) Title: IMPROVEMENTS IN LOW FREQUENCY ENERGY DISGGREGATION TECHNIQUES



(57) **Abrégé/Abstract:**

The present invention teaches methods of performing appliance itemization based on consumption data, including: receiving at a processor the data; determining if the data includes active signals and/or inactive signals; upon detection of an active signal: detecting and estimating active water heating consumption and lighting consumption; upon detection of an inactive signal: detecting and estimating passive water heating consumption, refrigerator consumption; and detecting vacation mode. Methods are disclosed of appliance itemization based whole house consumption data consumption from an advanced metering infrastructure device, the data being at 15, 30, or 60 minute intervals, including: applying disaggregation models to provide detection and estimation of any lighting, water heating, refrigeration, pool pumps, heating, or cooling appliances; applying rule-based models to provide detection and estimation of any cooking, laundry, entertainment and/or miscellaneous appliances; wherein the disaggregation models and the rule-based models provide for a near complete appliance level itemization and estimation.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
21 June 2018 (21.06.2018)



(10) International Publication Number
WO 2018/109754 A3

(51) International Patent Classification:

G01R 21/133 (2006.01) G06F 15/00 (2006.01)
G01R 31/34 (2006.01)

(21) International Application Number:

PCT/IB2017/058441

(22) International Filing Date:

27 December 2017 (27.12.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/434,992 15 December 2016 (15.12.2016) US

(71) Applicant: **BIDGLEY INC.** [US/US]; 110 Pioneer Way, Suite G, Mountain View, California 94041 (US).

(72) Inventors: **SHYR, Alex**; 71 Tyrella Court, Mountain View, California 94043 (US). **GARUD, Vivek**; 10905 Beechwood Lane, Los Altos, California 95024 (US). **Mayank Sharan**; E-301, ISCON Harmony, gotri-sevasi road, Gotri,

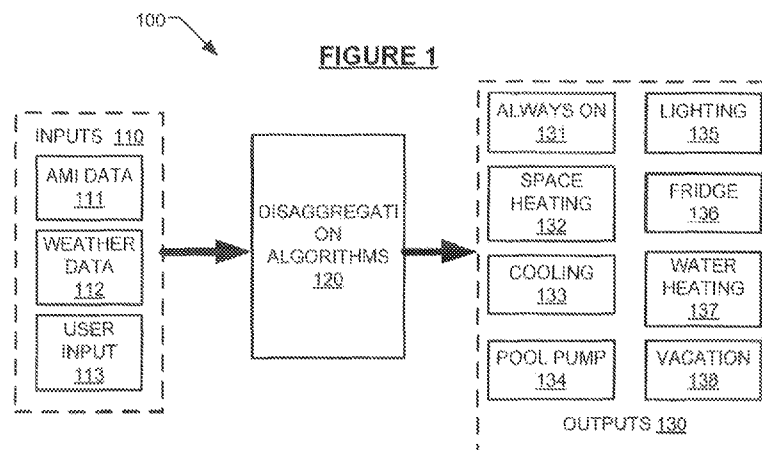
Vadodara, Gujarat 390021 (IN). **GUPTA, Abhay**; 20278 Clay Street, Cupertino, California 95014 (US). **PAREKH, Pratik**; 557 2nd Street, San Francisco, CA 94107 (US).

(74) Agent: **LANDMARK INTELLECTUAL PROPERTY LAW, PLLC**; 919 East Main Street, Suite 1000, Richmond, Virginia 23219 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

(54) Title: IMPROVEMENTS IN LOW FREQUENCY ENERGY DISAGGREGATION TECHNIQUES



(57) Abstract: The present invention teaches methods of performing appliance itemization based on consumption data, including: receiving at a processor the data; determining if the data includes active signals and/or inactive signals; upon detection of an active signal: detecting and estimating active water heating consumption and lighting consumption; upon detection of an inactive signal: detecting and estimating passive water heating consumption, refrigerator consumption; and detecting vacation mode. Methods are disclosed of appliance itemization based whole house consumption data consumption from an advanced metering infrastructure device, the data being at 15, 30, or 60 minute intervals, including: applying disaggregation models to provide detection and estimation of any lighting, water heating, refrigeration, pool pumps, heating, or cooling appliances; applying ml-based models to provide detection and estimation of any cooking, laundry, entertainment and/or miscellaneous appliances; wherein the disaggregation models and the rule-based models provide for a near complete appliance level itemization and estimation.

[Continued on next page]



WO 2018/109754 A3

WO 2018/109754 A3

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*
- *with information concerning request for restoration of the right of priority in respect of one or more priority claims (Rules 26bis.3 and 48.2(b)(vii))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

(88) Date of publication of the international search report:

26 July 2018 (26.07.2018)

1 **IMPROVEMENTS IN LOW FREQUENCY**
2 **ENERGY DISAGGREGATION TECHNIQUES**
3

4 **RELATED APPLICATIONS**

5 [001] This application claims priority to U.S. Provisional Patent Application No.
6 62/434,992, filed on 15 December 2016, entitled “AMI Disaggregation”.

7 **BACKGROUND**

8 [002] In the residential energy sector, disaggregation is the task of itemizing energy
9 consumption, attributing that consumption to various appliances throughout a home.
10 Generally, disaggregation may be performed on data captured the home, without the need to
11 enter the property.

12 [003] Once the energy consumption is disaggregated, specific appliance usage or loads,
13 and trends in customer behavior, may be identified. Presenting users with such information in
14 an understandable format may allow users to take appropriate action to actively reduce total
15 energy consumption. Moreover, providing itemized information per specific appliance may
16 also permit users to determine if acquiring a new or replacement appliance (for example,
17 through purchase, lease, or rental) would reduce energy costs sufficient to validate such price
18 of purchase, lease, or rental. Accurate disaggregation may enable personalized and actionable
19 insights to be presented to a customer, which may positively influence customer engagement
20 as well as sentiment towards the energy-providing utility.

1 [004] Typically, a software analysis is performed on past data collected. Therefore such
2 prior art techniques may be useful in breaking down the energy usage or itemizing the electric
3 energy bill post-consumption, but fail to provide near real-time information that may
4 immediately empower users to modify their energy usage. With regard to appliances such as
5 heating or air conditioning -- for which usage is based upon immediate conditions -- such data
6 of previous usage may provide limited assistance in modifying present behavior and usage.

7 [005] Moreover, most published techniques use data at a high sampling rate (ranging from
8 one sample every second to one million or more samples per second). However, several
9 available sources of energy use data do not provide such high-resolution data that typically
10 enables specific appliance signatures to be extracted. For example, while utility companies
11 collect data usage, this is typically performed for validation of billing cycles, and is generally
12 collected at a fifteen (15) minute or one hour interval. Accordingly, this data is generally not
13 specific enough for most published NIALM techniques to perform a useful energy
14 disaggregation and generate a clear appliance signature.

15 [006] However, systems and methods in the existing art generally do not provide for
16 accurate, actionable disaggregated data based on lower resolution data. For example, systems
17 and methods existing in the art generally do not properly or accurately perform disaggregation
18 on data received in 15-minute, 30-minute, or hourly intervals. Such lower-resolution data may
19 be obtained from, for example, advanced metering infrastructure (AMI) devices. For example,
20 AMI may provide automated, two-way communication between a smart meter and a utility.
21 This may provide interval data, as well as real-time data.

1 [007] Accordingly, systems and methods that can utilize data received from AMI are
2 desirable. More specifically, systems and methods of disaggregation that can be performed on
3 lower resolution data (for example, data sampled at 15-minute, 30-minute, and/or hourly
4 intervals) as received from smart meters over an AMI are desirable.

5
6 SUMMARY OF THE INVENTION

7 [008] Some aspects of the present invention may include a method of performing
8 appliance itemization based on consumption data for a whole house, comprising: receiving at
9 a processor the consumption data; determining by the processor if the consumption data
10 includes active signals and/or inactive signals; upon detection of an active signal: detecting by
11 the processor, based at least in part on the active signal, active water heating, and if active
12 water heating is detected, estimating active water heating consumption; detecting by the
13 processor, based at least in part on the active signal, lighting, and if lighting is detected,
14 estimating lighting consumption; upon detection of an inactive signal: detecting by the
15 processor, based at least in part on the inactive signal, passive water heating, and if detected,
16 estimating passive water heating consumption; detecting by the processor, based at least in part
17 on the inactive signal, refrigeration, and if refrigeration is detected, estimating refrigerator
18 consumption; detecting by the processor, based at least in part on the inactive signal, vacation
19 mode.

20 [009] Some aspects of the present invention may include a method of performing
21 appliance itemization based on consumption data for a whole house received from an advanced

1 metering infrastructure (AMI) device, the consumption data being of a low resolution
2 comprising data received at fifteen (15) minute, thirty (30) minute, or sixty (60) minute
3 intervals, the method comprising: receiving at a processor the consumption data; determining
4 by the processor if the consumption data includes active signals and/or inactive signals; upon
5 detection of an active signal: detecting by the processor, based at least in part on the active
6 signal, active water heating, and if active water heating is detected, estimating active water
7 heating consumption at least in part by estimating a typical amplitude of a water heater,
8 behavior modeling, and data smoothing, wherein behavior modeling comprises user-specific
9 patterns are modeled, including attributes of time of day and day of week; detecting by the
10 processor, based at least in part on the active signal, lighting based at least in part by identifying
11 arcs of consumption in time periods where lighting is expected to be used, wherein identifying
12 arcs of consumption comprises: removing unsuitable data points from the consumption data;
13 cleaning the consumption data using percentile filtering, minimum value removal, and/or
14 smoothing noise removal; detecting and removing seasonal loads by selecting time points
15 showing seasonal characteristics including contiguous days of absence or presence when
16 typically occurring lighting is absent; extracting a lighting band, comprising a collection of
17 times in a day at which lighting is present; if lighting is detected, estimating lighting
18 consumption at each data point along with lighting capacity parameters, timings of lighting,
19 and seasonality; upon detection of an inactive signal: detecting by the processor, based at least
20 in part on the inactive signal, passive water heating based at least in part on amplitude
21 estimation, frequency estimation, and temperature correlation, and if detected, estimating
22 passive water heating consumption at least in part by estimating typical amplitude and

1 frequency of passive pulses, determined by a power rating of a detected water heater and the
2 typical duration of passive pulses, wherein the duration of passive pulses is a function of a
3 temperature setting of the water heater, insulation of the water heater, and the outside
4 temperature; detecting by the processor, based at least in part on the inactive signal,
5 refrigeration at least in part by analyzing data during low activity periods in which regular
6 pulses of a refrigeration compressor motor are detectable, and if refrigeration is detected,
7 estimating refrigerator consumption at least in part by: analyzing several months of
8 consumption data and identifying low activity periods; scoring each low activity period for
9 quality; compiling low activity periods that meet a quality threshold; using a regression
10 machine learning model to, based on the low activity periods that meet the quality threshold,
11 predict refrigeration consumption; and detecting by the processor, based at least in part on the
12 inactive signal, vacation mode by identifying multiple consecutive days of static, lower-than-
13 average consumption; and providing to a customer an itemization of detected appliances and
14 estimated consumption for each detected appliance.

15 [0010] Some aspects of the present invention may include a method of performing
16 appliance itemization based at least in part on consumption data for a whole house received
17 from an advanced metering infrastructure (AMI) device, the consumption data being of a low
18 resolution comprising data received at fifteen (15) minute, thirty (30) minute, or sixty (60)
19 minute intervals, the method comprising: applying disaggregation models to the consumption
20 data to provide detection and estimation of any present lighting appliances, water heating
21 appliances, refrigeration appliances, pool pumps, heating appliances, or cooling appliances;
22 applying rule-based models to the consumption data to provide detection and estimation of any

1 present cooking appliances, laundry appliances, entertainment devices or appliances, and
2 miscellaneous appliances; wherein the disaggregation models and the rule-based models
3 provide for a complete or near complete appliance level itemization and estimation for the
4 whole house.

5 [0011] These and other aspects will become apparent from the following description of the
6 invention taken in conjunction with the following drawings, although variations and
7 modifications may be effectuated without departing from the scope of the novel concepts of
8 the invention.

9
10 **BRIEF DESCRIPTION OF THE DRAWINGS**

11 [0012] The present invention can be more fully understood by reading the following
12 detailed description together with the accompanying drawings, in which like reference
13 indicators are used to designate like elements. The accompanying figures depict certain
14 illustrative embodiments and may aid in understanding the following detailed description.
15 Before any embodiment of the invention is explained in detail, it is to be understood that the
16 invention is not limited in its application to the details of construction and the arrangements of
17 components set forth in the following description or illustrated in the drawings. The
18 embodiments depicted are to be understood as exemplary and in no way limiting of the overall
19 scope of the invention. Also, it is to be understood that the phraseology and terminology used
20 herein is for the purpose of description and should not be regarded as limiting. The detailed
21 description will make reference to the following figures, in which:

1 [0013] Figure 1 depicts, in accordance with some embodiments of the present invention,
2 an exemplary disaggregation pipeline, or flow, showing exemplary input sources and types of
3 outputs.

4 [0014] Figure 2 depicts, in accordance with some embodiments of the present invention,
5 an exemplary chart of itemization of appliances as determined by disaggregation and/or a rule-
6 based model.

7 [0015] Figure 3 depicts, in accordance with some embodiments of the present invention,
8 an exemplary graph of always-on energy usage.

9 [0016] Figure 4 illustrates, in accordance with some embodiments of the present invention,
10 an exemplary graph of total energy consumption showing space heater consumption.

11 [0017] Figure 5 illustrates, in accordance with some embodiments of the present invention,
12 an exemplary graph of total energy consumption showing cooling usage energy consumption.

13 [0018] Figure 6 illustrates, in accordance with some embodiments of the present invention,
14 an exemplary heat map showing pool pump usage.

15 [0019] Figure 7 illustrates, in accordance with some embodiments of the present invention,
16 an exemplary graph of energy usage with lighting usage indicated thereon.

17 [0020] Figure 8 illustrates, in accordance with some embodiments of the present invention,
18 an exemplary graph of energy usage with lighting usage indicated thereon.

19 [0021] Figure 9 illustrates, in accordance with some embodiments of the present invention,
20 an exemplary graph of energy usage of a refrigerator, over a day.

21 [0022] Figure 10 illustrates, in accordance with some embodiments of the present
22 invention, an exemplary graph of energy usage over a day, indicated refrigerator use.

1 [0023] Figure 11 depicts, in accordance with some embodiments of the present invention,
2 a flow chart indicating an exemplary methodology for identifying refrigerator energy usage.

3 [0024] Figure 12 depicts, in accordance with some embodiments of the present invention,
4 an exemplary graph of energy usage utilized in a sliding window function, used at least in part
5 to identify refrigerator usage.

6 [0025] Figure 13 illustrates, in accordance with some embodiments of the present
7 invention, an exemplary graph of energy usage of a water heater, over a day.

8 [0026] Figure 14 illustrates, in accordance with some embodiments of the present
9 invention, an exemplary graph of energy usage of a tank water heater.

10 [0027] Figure 15 illustrates, in accordance with some embodiments of the present
11 invention, an exemplary graph of energy usage of a tankless water heater.

12 [0028] Figure 16 illustrates, in accordance with some embodiments of the present
13 invention, an exemplary heatmap showing scheduled water heater usage.

14 [0029] Figure 17 illustrates, in accordance with some embodiments of the present
15 invention, a flowchart of an exemplary approach to determining water heater usage.

16 [0030] Figure 18 illustrates, in accordance with some embodiments of the present
17 invention, a heat-map showing an exemplary visualization of results, indicating passive and
18 active water heater energy consumption.

19 [0031] Figure 19 illustrates, in accordance with some embodiments of the present
20 invention, a flow chart of an exemplary method of vacation detection.

21 [0032] Figure 20 illustrates, in accordance with some embodiments of the present
22 invention, a graph of exemplary energy usage over a month, indicating vacation.

1 [0033] Figure 21 illustrates, in accordance with some embodiments of the present
2 invention, a graph of exemplary energy usage over a day, indicating vacation.

3 [0034] Figure 22 illustrates, in accordance with some embodiments of the present
4 invention, a graph of exemplary vacation detection of a refrigerator.

5 [0035] Figure 23 illustrates, in accordance with some embodiments of the present
6 invention, a graph of exemplary vacation detection of a electric water heater and a refrigerator.

7 [0036] Figure 24 depicts, in accordance with some embodiments of the present invention,
8 an exemplary process flow combining algorithms and modules for at least some disaggregation
9 based itemization.

10 [0037] Figure 25 illustrates, in accordance with some embodiments of the present
11 invention, an exemplary process flow combining modules for at least some disaggregation
12 based itemization with rule based itemization.

13 [0038] Before any embodiment of the invention is explained in detail, it is to be understood
14 that the present invention is not limited in its application to the details of construction and the
15 arrangements of components set forth in the following description or illustrated in the
16 drawings. The present invention is capable of other embodiments and of being practiced or
17 being carried out in various ways. Also, it is to be understood that the phraseology and
18 terminology used herein is for the purpose of description and should not be regarded as
19 limiting.

20 **DETAILED DESCRIPTION**

21 [0039] The matters exemplified in this description are provided to assist in a
22 comprehensive understanding of various exemplary embodiments disclosed with reference to

1 the accompanying figures. Accordingly, those of ordinary skill in the art will recognize that
2 various changes and modifications of the exemplary embodiments described herein can be
3 made without departing from the spirit and scope of the claimed invention. Descriptions of
4 well-known functions and constructions are omitted for clarity and conciseness. Moreover, as
5 used herein, the singular may be interpreted in the plural, and alternately, any term in the plural
6 may be interpreted to be in the singular.

7 [0040] In general, the present invention is directed to identifying a number of different
8 appliances by their energy signature. The energy consumption data may be captured by a smart
9 meter or other advanced metering infrastructure (AMI) device. Such consumption data may
10 be obtained from an energy utility, or may be directly accessed from a smart meter, home area
11 network (HAN) device, or other local device. Generally speaking, such determinations may
12 be based on (i) energy consumption data; and/or (ii) weather data, which may include
13 temperature, sunrise, and/or sunset information. At least three (3) metrics may be measured
14 for use in such disaggregation: (a) home level detection; (b) consumption estimation; and (c)
15 home disaggregation coverage.

16 [0041] With reference to Figure 1, an exemplary flow 100 is presented. Inputs 110 may
17 be provided to one or more disaggregation algorithms 120, which in turn may output appliance
18 identification and/or usage 130. More specifically, inputs 110 may comprise data received
19 from an AMI device 111, weather data 112 (which may include, but is not limited to,
20 temperature, time of sunrise, time of sunset), and/or optional user input 113. Categories of
21 appliances that may be identified may include, but are not limited to, always-on appliances

1 131, space heating appliances 132, cooling appliances 133, pool pump(s) 134, lighting 135,
2 refrigerator(s) 136, water heating appliances 137, and or vacation detection 138 of appliances.

3 [0042] Home level detection may be a binary value that states that if an appliance has been
4 used within the evaluation time period (for example, a completed billing cycle with an energy
5 utility). In order to invoke customer engagement, accurate detection may be critical — as even
6 occasional improper detections may cause customers to lose confidence in such a system and
7 its recommendations. Note that improper detections may be false positives or repeated false
8 negatives.

9 [0043] Consumption estimation is the delta between actual consumption and disaggregated
10 consumption. Note that customer visibility of estimation errors is minimal at best, since
11 customers generally are not aware of exactly how much energy an appliance consumes over a
12 given period of time, and consumption estimation may be presented as a percentage of whole
13 home consumption.

14 [0044] Home disaggregation coverage is the percentage of whole home energy
15 consumption that may be attributed to identified disaggregated appliance categories. Higher
16 home disaggregation coverage may enable a disaggregating party to provide a larger number
17 of insights and/or recommendations, which may benefit the end-user experience.

18 [0045] Note that appliance disaggregation accuracy metrics may only be presented in the
19 context of ground truth, that is, based on direct observation. However, capturing ground truth
20 across a large number of homes may be challenging, as it may require plug-level appliance
21 monitoring and/or direct communication with the end-user. To counter such challenges, high

1 resolution smart meter data may be used as the baseline for accuracy measurements. This
2 baseline may be established using ten (10) second interval data collected from energy monitors
3 across a wide variety of homes. Such homes may span multiple seasons, climate zones, and
4 may include a broad spectrum of electric appliances. The baseline from these homes utilizing
5 in disaggregation accuracy metrics is greater than 95% accurate, as compared to whole-home
6 measurements. Accordingly, disaggregation of AMI data of a specific home may be compared
7 against the baseline to characterize variances in readings and form changes in AMI
8 disaggregation algorithms.

9 [0046] Expected accuracy certain detection and estimation of systems and methods in
10 accordance with some embodiments of the present invention are set forth in Table 1. Note that
11 the detection and estimation expected accuracies presented in Table 1 are assuming that there
12 is no pre-existing appliance profile for a user. If an appliance profile is available, such accuracy
13 metrics for both detection and estimation will increase.

14

Appliance	Home-Level Detection	Consumption Estimation
Always On	at or approximately 100%	at or approximately 92%
Heating	at or approximately 86%	at or approximately 70% (Electric heating only)
Cooling	at or approximately 89%	at or approximately 71%
Pool Pump	at or approximately 81%	at or approximately 78%

1

2

3

4

5

6

7

8

9

10

[0047] The present invention may be applicable to electric consumers regardless of international location. Accordingly, machine learning processes in accordance with some embodiments of the present invention may benefit from access to a dynamic and increasing database of appliance signatures. Such access may cause continual improvements in algorithms resulting in greater detection and estimation accuracy for production appliances, as well as providing continual exposure to new appliances, which may then be added to a disaggregation roadmap, or approach. Table 2 indicates coverage results of the present invention in different global areas. Note that such coverage may include always on appliances, heating appliances, cooling appliances, pool pumps, lighting, and/or refrigeration.

Market	Low HVAC	High HVAC
Europe	at or approximately 55%	at or approximately 65%
North America	at or approximately 60%	at or approximately 70%
Asia – Pacific	at or approximately 60%	at or approximately 70%

11

[0048] While disaggregation based on AMI data alone is continually improving, certain limitations may not allow for 100% disaggregation coverage of a home. To address this limitation and better engage customers, in accordance with some embodiments of the present invention a hybrid approach may be utilized. Such a hybrid approach may combine AMI disaggregation algorithms with a localized rule-based model, which may result in 100% (or near 100%) itemization of energy consumption for each user.

[0049] Figure 2 indicates a chart 200 of an exemplary 100% disaggregated home. Some of the appliances are identified by disaggregation 210, while others are identified through rule-based models 220. More specifically, with reference to Figure 2, always on appliances 211, heating appliances 212, cooling appliances 213, lighting 214, and refrigeration 215 may be identified by disaggregation of AMI data. Cooking appliances 221, laundry appliances 222, entertainment devices 223, and/or other appliances 224 may be identified by a rule-based model. More information on this hybrid approach may be found in technical white paper entitled “100% Appliance Itemization” available at <http://www.bidgely.com/white-papers>.

[0050] As noted above, disaggregation based on AMI data may be used to identify energy usage for (i) always on appliances; (ii) heating appliances (including, but not limited to, space heaters); (iii) cooling appliances; (iv) pool pumps; (v) lighting; (vi) refrigeration appliances; (vii) water heating appliances; (viii) and vacation detection. Each will be discussed in turn below.

[0051] Always On Appliances. Always on appliances may comprise appliances that are always plugged in, and drawing electricity. Such always on appliances may be identified by

capturing the smallest consumption interval during the day and extrapolating that usage across a twenty-four (24) hour period. With reference to Figure 3, whole house data indicating always one appliances 300 is discussed. The graph in Figure 3 shows electrical demand 310 across time 320. It can be seen that the smallest consumption during the day may be identified in the window between approximately 2:00 AM to approximately 9:00 AM. In Figure 3, this is indicated by the dashed line 330, which may correspond to the lowest measured consumption interval for the day at approximately 20 kW. Extrapolating this across the day provide the daily always on consumption. Note that in order to accurately identify always on appliances, data spanning at least one (1) week is desirable, and such data may be of relatively low resolution, at fifteen (15) minutes, thirty (30) minutes, or sixty (60) minute intervals.

[0052] Heating Appliances. Space heaters may also be identified using disaggregation of AMI data. In order to accurately identify heating appliances, data spanning all seasons (*i.e.* at least one (1) years' worth of data) may be desirable. Such data may be relatively low resolution at fifteen (15) minutes, thirty (30) minutes, or sixty (60) minute intervals. In general, such disaggregation may be temperature-based, wherein temperature data may be correlated with energy consumption, noting that heating appliance usage corresponds to low temperature/high usage days. During colder months (generally October through March in the northern hemisphere), the use of heating appliances generally results in an increase whole-home energy consumption.

[0053] With reference to Figure 4, graph 400 illustrates an exemplary whole home energy consumption over a year, indicating heating appliance usage. The graph 400 indicates energy demand 410 by month 420. It can be seen that the energy usage for January 421 includes

1 energy attributable to heating appliances 421A. Similarly, February 422 / 422A, March 423 /
2 423A, April 424 / 424A, October 430 / 430A, November 431 / 431A, and December 432 /
3 432A each include energy usage attributable to heating appliances. Note that May 425, June
4 426, July 427, August 428, and September 429 do not include any energy usage attributable to
5 heating appliances.

6 [0054] Cooling Appliances. Similar to heating appliances, cooling appliances may also be
7 identified using disaggregation of AMI data. In order to accurately identify cooling appliances,
8 data spanning all seasons (*i.e.* at least one (1) years' worth of data) may again be desirable.
9 Such data may be relatively low resolution at fifteen (15) minutes, thirty (30) minutes, or sixty
10 (60) minute intervals. In general, such disaggregation may be temperature-based, wherein
11 temperature data may be correlated with energy consumption, noting that cooling appliance
12 usage corresponds to high temperature/high usage days. During warmer months (generally
13 May through September in the northern hemisphere), the use of cooling appliances generally
14 results in an increase whole-home energy consumption.

15 [0055] With reference to Figure 5, graph 500 illustrates an exemplary whole home energy
16 consumption over a year, indicating cooling appliance usage. Note that the whole house
17 energy usage is the same as presented in Figure 4. The graph 500 indicates energy demand
18 510 by month 520. It can be seen that the energy usage for May 525 includes energy
19 attributable to heating appliances 525A. Similarly, June 526 / 526A, July 527 / 527A, August
20 528 / 528A, and September 529 / 529A each include energy usage attributable to cooling
21 appliances. Note that January 521, February 522, March 523, April 524, October 530,

1 November 531, and December 532 do not include any energy usage attributable to cooling
2 appliances.

3 [0056] Pool Pumps. Pool pumps may also be identified from disaggregated AMI data. In
4 general, data spanning approximately one (1) month is desirable for identifying a pool pump.
5 Again, such data may be relatively low resolution at fifteen (15) minutes, thirty (30) minutes,
6 or sixty (60) minute intervals. In general, identifying a pool pump may be based on timing.
7 Homes with a pool often run the pool pump for the filtration system on a timer. Therefore,
8 multiple days of data may be examined to identify consistent start/stop times of high activity
9 to detect a pool pump schedule.

10 [0057] With reference to Figure 6, a heat map of energy usage 600 is shown. The heat
11 map shows the approximately a years' worth of data by month 610, showing usage in thirty
12 (30) minute time slots 620. It can be seen that the pool pump runs during the portion indicated
13 at 631, turns off for the portion indicated at 632, turns on for the portion indicated at 633, and
14 turns off for the portion indicated at 634. The pool pump here consistently turns on at time
15 slot 30 (approximately 3:00 PM), as well as at time slot 46 (approximately 11:00 PM). Note
16 that the pool pump runs for a longer time in November – April, and runs a shorter time in May
17 – October. This is indicative of a southern hemisphere pool, where the warmer months are
18 November – April.

19 [0058] Lighting. Lighting may also be identified from disaggregated AMI data. Lighting
20 is typically one of the most consistent electrical consumptions in most households across the
21 world. Statistically speaking, lighting generally makes up approximately 10% of the electrical

1 consumption of an average home. Adoption of efficient lighting practices can lead to clear
2 decreases in power consumption of a house.

3 [0059] In general, data spanning at least approximately one (1) month is desirable,
4 although data spanning one (1) year is considerably more desirable, and such data may be
5 relatively low resolution at fifteen (15) minute, or thirty (30) minute intervals. Note that data
6 in sixty (60) minute intervals may be too rough, or too low resolution to adequately and
7 confidently identify lighting. In general, lighting may be determined based on timing, and is
8 generally characterized by a consistent “arc” in energy usage during the mornings and evening.
9 Such usage is generally consistent with usage during waking-morning activity-leaving for
10 work, as well as arriving home-evening activity-going to bed. With reference to Figure 7, a
11 graph 700 of energy demand 710 over time 720 is presented. Increases in energy demand
12 around 6:00 AM and starting around 3:00 PM may be seen. These formulate the lighting
13 “ares,” denoted at 731 and 732.

14 [0060] The input data may be in the form of a time series consumption signal at the
15 periodicity of the order of minutes. The methodology in accordance with some embodiments
16 of the present invention may work on signals with periodicity of the order of seconds by down-
17 sampling the signal. External data such as geographic location, sky cover, daylight hours,
18 house information such as size and number of occupants can be used to further improve and
19 derive inferences from the estimate.

20 [0061] In general, lighting presents itself in the data often as a downward facing curve as
21 shown in Figure 7. Often this is because in the number of lights in operation increases and
22 then decreases, also with time the power consumption of light sources usually increases.

1 Mostly due to routine based behavior, there are often patterns during morning and evening
2 times. In generally, disaggregation approaches based on AMI data may look to capture the
3 same pattern in the input data and estimate the lighting usage through the steps discussed
4 below.

5 [0062] First, the consistent nature of lighting is captured. Unsuitable data points may be
6 removed and the data may be cleaned using techniques such as percentile filtering, minimum
7 value removal and/or smoothing noise removal. Seasonal loads may then be detected and
8 removed by selecting time points showing seasonal characteristics, such as contiguous days of
9 absence and/or presence in times when typically occurring lighting is absent. A lighting band
10 may then be extracted. The lighting band may be a collection of times in a day at which lighting
11 is present in the data. This collection of time point may include basic sanity checks placed on
12 its size. Using seasonal detection, power capacities of lighting during various timing zones in
13 the day may the be computed.

14 [0063] Lighting may be estimated at each time point based on the time in its day,
15 seasonality, the typicality of lighting at that time, lighting capacity, and/or other factors.
16 Interpolation techniques may be used to estimate values at points where the exact value cannot
17 be confidently determined. New incoming data in cases where lighting equipment has been
18 modified at the end user location may be detected using the seasonality, percentile calculations
19 on the new data, and comparison with parameters computed on previous data.

20 [0064] This technique may provide information about the usage of lighting which often is
21 responsible for roughly 10% of the electricity consumption in a house. The output of the
22 algorithm may be lighting energy consumption at each data point along with capacity

1 parameters, timings of lighting and seasonality. Based on this information a utility (or other
2 party) may be able to engage with customer, armed with specifics, to discuss items such as (i)
3 informing users of their lighting consumption behavior and suggestions of power saving
4 solutions; (ii) determine if lighting in a house is efficient and suggest changes to homes with
5 inefficient lighting; (iii) analyze lighting usage trends based on regions, home characteristics,
6 etc., to provide insights into the consumption demographic that may be used by utilities for
7 targeted initiatives; and/or (v) provide alerts to users if lighting has been left switched on and
8 other indicators suggest that the house should be empty.

9 [0065] Figure 8 depicts a graph 800 showing energy usage data 830 based on energy
10 demand 810 over time 820. Again, arcs due to increased lighting using can be seen at 840 and
11 841.

12 [0066] Supplementary ideas from image analysis maybe borrowed to increase lighting
13 estimation robustness and accuracy. For example, each daily consumption pattern may be
14 matched to another, allowing for certain affine transformations, such as translation and scaling
15 of the lighting arcs. These may serve as estimation methods on their own, or may be treated as
16 the pairwise distance metric in a clustering algorithm. Such clustering models may be able to
17 find cluster centers, or distinct modes of lighting behavior, for each home.

18 [0067] Additionally, techniques that directly make use of external factors such as house
19 attributes, number of occupants and sunrise/sunset times may help improve robustness and
20 interpretability of the lighting estimates. Load prediction may include these factors and
21 generate a typical lighting load from them.

1 [0068] Refrigeration Appliances. Refrigerators may also be identified from disaggregated
2 AMI data. Refrigerators are present in approximately 99% of homes in developed countries.
3 These appliances typically run continuously throughout the day. Refrigerators have
4 compressors that turn on and off depending on its temperature setting. Since they are usually
5 smaller in power consumption, it may be difficult to estimate consumption when other
6 appliances are running. However, note that it is also possible to detect refrigerators when few
7 other high energy appliances (e.g. dryers, AC, heater) are running.

8 [0069] In general, data indicating low activity periods is desirable for identifying a
9 refrigerator, such as early mornings, in which the regular pulses of the compressor motor are
10 detectable. Such data may be relatively low resolution at fifteen (15) minute or thirty (30)
11 minute intervals. Note that thirty (30) minute interval data is probable in most cases, but this
12 may depend on the size and shape of the refrigerator signature.

13 [0070] Figure 9 illustrates a graph 900 showing demand 910 over time 920. Energy
14 demand is shown, with a low usage period of time seen around 12:00 AM to 5:30 AM,
15 indicated at 930. It is these times of low usage where refrigerator compressor motor pulses
16 cycling on and off may be most easily identified. Note that the pulses of the refrigerator motor
17 may be quite consistent throughout the day.

18 [0071] Figure 10 again shows a graph 1000 illustrating demand 1010 over time 1020. In
19 Figure 10, low activity period 1030 is quickly apparent. The energy demand during low
20 activity period 1030 is likely comprised of pulses from the refrigerator motor.

21 [0072] With reference to Figure 11, an exemplary process for identifying refrigerator usage
22 is set forth. In general, the process involves searching through several months of signal data

1 for low activity periods. Subsequently, a model may be used to score each low activity period
2 for quality. All low activity periods that satisfy a quality threshold may then be considered for
3 refrigeration estimation. A machine learning model may be used to then predict refrigeration
4 energy consumption.

5 [0073] At 1110, systems and methods in accordance with some embodiments of the present
6 invention may detect or identify low activity periods. At 1120, such low activity periods may
7 be scored for quality. The quality metric for the low activity period intervals may utilize a scoring
8 mechanism based on a machine learning model. The model may be trained based on human training
9 and/or ground truth based at least in part on data collected from plug level devices. The quality
10 metric for low activity period may also utilize scoring based on consistency of several
11 attributes across multiple low activity periods for a home.

12 [0074] Low activity periods that meet a minimum quality threshold may then be used to
13 create a refrigeration estimation, and at 1130, predict refrigerator consumption. Prediction of
14 refrigeration consumption may be performed using, for example, a regression model based at
15 least in part on a training set. A training set may be produced using plug-level metering or
16 using disaggregation results based on higher sampling rates of less than 1 minute. The
17 refrigeration consumption may be calculated on a per month basis depending on availability
18 of good quality low activity periods for each month. If such data is not available, a single
19 refrigeration number may be produced across multiple months. Refrigeration estimation
20 across the year may be smoothed using local temperature to ensure refrigeration consumption
21 follows a trend where consumption increases with high temperatures. The degree to which
22 refrigeration consumption varies with temperature may be a region-specific configuration.

[0075] Detection of low activity periods may utilize a sliding window function and features, such as closeness to the daily minimum, autocorrelation, upper limits on values, consistent area under the curve (after subtracting the always-one consumption), etc. Figure 12 illustrates a graph 1200 showing demand 1210 over time 1220 (for a period of approximately seven (7) hours), and showing the area under the curve 1240. This area under the curve 1240 is visually close to the amortized refrigerator consumption.

[0076] Water Heating Appliances. Water heaters may also be identified from disaggregated AMI data. In general, data spanning approximately one (1) month is desirable for identifying a water heater. Again, such data may be relatively low resolution at fifteen (15) minute or thirty (30) minute intervals. An electric water heater may be an important appliance that, when present, accounts for a significant portion of the whole-house electricity consumption. In general, there are three (3) main types of water heaters: tank water heaters, tankless water heaters, and scheduled storage water heaters.

[0077] A tank water heater may generally comprise a large tank of water, which is heated and maintains the water temperature within a certain range. In general, a tank water heater has an energy consumption pattern that may include (i) a series of “passive” pulses, which may turn on and/or off without explicit user action; and (ii) occasional “active” or “fat” pulses, which may represent continuous, active usage of hot water (such as a shower, laundry, dishes, etc.).

[0078] Figure 13 illustrates a graph 1300 showing energy demand 1310 over time 1320 for a tank water heater and periodic pulses caused by maintaining the tank water at or near a certain

1 temperature. Pulses 1331, 1332, 1333, 1334, 1335, and 1336 may be seen to periodically
2 occur. Such pulses may indicate the use of a tank water heater.

3 [0079] Figure 14 illustrates a graph 1400 showing more detail of energy demand 1410 over
4 time 1420. Different pulses may be identified in the data. For example, at 1431, 1432, and
5 1434 pulses caused by temperature maintenance may be seen. At 1434, a series of “fat” pulses
6 may be seen. Such “fat” pulses may be caused by user initiated water use, such as a shower,
7 laundry, dishes, etc. Notably, such peak water heater use appears to occur between 6:30 PM
8 and 9:30 PM, when laundry, dishes, dishwashers, bathtubs, etc. are likely used.

9 [0080] A tankless water heat, otherwise known as an instant hot water heater or flow water
10 heater, does not have a tank. Instead, such systems provide a direct connection from the cold
11 water to the point of use. A tankless system may either heat the water as needed for the entire
12 house (where the system may be placed outside the home, or in a garage, basement, crawl-
13 space, etc.), or may comprise elements at the point of use that heat the water (such as a heating
14 system disposed at a sink to heat hot water for the sink). Such systems may present a relatively
15 high amplitude (3-5kW for kitchen use), or even a very high amplitude (greater than 10kW for
16 showers). For example, Figure 15 illustrates a graph 1500 showing energy demand 1510 over
17 time 1520 for a German instant water heater. Smaller use of the water heater may be seen at
18 1530 (around 5:50-6:15 AM), which may represent initial waking activities. However, at 1540
19 the demand jumps for the use of the water heater for a morning shower, occurring at about
20 6:30 AM. Similar high amplitude draws may be seen for other types of instant hot water
21 heaters, such as but not limited to the Quooker device used in kitchens for instant hot water.

1 [0081] A scheduled storage water heater may generally comprise a tank of water that is
2 scheduled to turn on during a time period when rates or tariffs are lower, typically during the
3 night due to time-of-use plans. A scheduled storage water heater may turn on for longer
4 periods off time, and/or at a higher power rating, depending on the temperature, and may also
5 include sporadic, thin, "passive" pulses near the end of the day to maintain a minimum desired
6 water temperature. Figure 16 illustrates a heat map 1600 showing the use of a scheduled
7 storage water heater. In general, the heat map shows the date 1610 on the Y axis, and the time
8 on the X axis, with the usage extending along the X axis. From the heat map, it can be seen
9 that the scheduled storage water heater may turn on anywhere from around 12:00 AM (noted
10 as hour 0) to 3:00 AM, and generally turns off at 6:00 AM. This usage is indicated at 1630.
11 Times when the water heater is not running is generally seen at 1631. Note that around 6:00
12 PM (noted as hour 18) at 1632, the water heater appears to briefly run, likely to either maintain
13 temperature or due to use during the evening hours.

14 [0082] With reference to Figure 17, a process 1700 of detecting and estimating water
15 heater usage will now be discussed. In general, such process may comprise home-level
16 detection 1710, passive estimation 1720, and active estimation 1730.

17 [0083] Home level detection 1710 may comprise examining or analyzing daily consistency
18 1711 and seasonal consistency 1712 over time. A significant attribute of an electric water
19 heater is its consistency, both in terms of day-to-day usage and at a high-level season-to-season
20 usage. As long as the home is occupied, the signature of water heater should be present.
21 Depending on the type of water heater, the algorithmic model may capture the presence of each
22 corresponding signature of passive thin pulses, high energy instant pulses during normal hours,

1 and timed high energy pulses — likely during low tariff hours. These signatures may be present
2 everyday (excluding vacation days), and should be present throughout the year and all seasons.
3 Extra care may be needed to avoid false positive, for example coming from HVAC,
4 cooking/laundry appliances and electric vehicle charging. Helpfully, homes which run heating
5 and cooling throughout the year will appear to have consistent passive thin pulses.

6 [0084] Passive estimation 1720 may comprise amplitude estimation 1721, frequency
7 estimation 1722, and temperature correlation 1723. Once home-level detection is established,
8 the amplitude of the thin pulses may be characterized. This may be a combination of the power
9 rating of the water heater, as well as the typical duration of the pulses (which itself is a function
10 of temperature setting of the water heater, its insulation and the outside temperature). If the
11 type of water heater exhibits passive behavior (*i.e.* thin heating pulses), the model may estimate
12 both the typical amplitude and the frequency of the pulses. Each of these attributes may be
13 heavily influenced by ambient weather temperature, which may be included as part of the
14 model.

15 [0085] Active estimation may comprise amplitude estimation 1731, behavior modeling
16 1732, and/or smoothings 1733 of the data. First, a model may capture the typical amplitude of
17 a water heater. Then, a user-specific usage pattern of hot water may be modeled. The
18 particular attributes may include time of day (e.g. morning vs evening showers), day of week,
19 weekend or weekday, temperature/season, number of occupants (e.g. number of showers per
20 day), specific appliance usage (laundry, dishwasher), and may even include demographic data
21 such as geographic region, age, gender, socioeconomic status, etc.

1 [0086] Sample visualization of results of such determinations in accordance with some
2 embodiments of the present invention may be seen at Figure 18. Figure 18 illustrates a heat
3 map 1800. Figure 18 is broken into three (3) columns 1810, 1820, 1830. Column 1810 shows
4 a heatmap of a raw signal received. Column 1820 illustrates the same signal after processing
5 and cleaning. Column 1830 is a heatmap of the detected water heater spikes. Figure 18 shows
6 how the system can take the raw data and return a heatmap of actual water heater use.

7 [0087] Vacation Detection. Vacation detection may also be determined based on AMI
8 disaggregated data. In general, data for at least a one (1) month duration is desirable, and may
9 be of a relatively low frequency at fifteen (15) minute, thirty (30) minute, or sixty (60) minute
10 intervals. In general, a vacation may be characterized by multiple consecutive days of static,
11 lower-than-average consumption. Its detection may be confirmed by examining intra-day
12 consumption patterns for the absence of human-driven energy usage.

13 [0088] With reference to Figure 19, a flow chart 1900 illustrates an exemplary process for
14 determining vacation detection, in accordance with some embodiments of the present
15 invention. At 1905 the past three weeks of data are reviewed. At 1910, a baseload is computed
16 using the past data, and a threshold is accordingly set. At 1915, day energy consumption is
17 computed, for example using a one (1) month data set with sampling rate at fifteen (15), thirty
18 (30) or sixty (60) minutes. At 1920, it is determined if the day energy consumption is within
19 the threshold. If it is not within the threshold ("NO" at 1921), then the day is rejected for
20 vacation detection at 1925. If it is within the threshold ("YES") at 1922, then the process
21 continues.

1 [0089] At 1930, in a sliding window fashion with a window size of approximately four (4)
2 hours and sliding by two (2) hours, calculate energy consumption and store it in a vector, break
3 the sliding window until two inconsistent consecutive windows are identified.

4 [0090] At 1935, determine if the size of the vector is greater or equal to one (1) day. If not
5 ("NO" at 1936), reject the day for vacation detection. If so ("YES" at 1937), continue the
6 process.

7 [0091] At 1940, find the standard deviation for the vector. At 1945, determine if the
8 standard deviation is within the threshold. If the standard deviation is not within the threshold
9 ("NO" at 1946), reject the day for vacation detection. If so ("YES" at 1947), continue the
10 process.

11 [0092] At 1950, identify the top three deviated values from the mean for the vector. At
12 1955, determine if these values are within the threshold. If not ("NO" at 1956), reject the
13 vector for vacation detection. If so ("YES" at 1957), continue the process.

14 [0093] At 1960, determine the mean of the vector. At 1965, determine if the mean of the
15 vector is within the bound of the threshold. If not ("NO" at 1966), reject the vector for vacation
16 detection. If so ("YES" at 1967), then at 1970 vacation is detected with start and end time as
17 the start and end time of the vector.

18 [0094] Figure 20 illustrates a monthly view 2000 of a vacation analysis, showing demand
19 2010 over time 2020. Note that time period 2030 indicates a daily consumption drop to a low,
20 static level of approximately 3 kW. This may be a typical indication of a vacation.

21 [0095] Figure 21 illustrates a daily view 2100 of a vacation analysis, again showing
22 demand 2110 over time 2120. Refrigerator pulses 2130 may be seen. However, the

1 refrigerator pulses 2130 are some of the only activity seen in the home. The fact that there is
2 no human-driven energy usage may confirm the vacation profile.

3 [0096] Figure 22 illustrates a more detailed view 2200 of a vacation analysis based on a
4 refrigerator, showing inputs from both a HAN (home area network) device at 2210 and Green
5 Button 2211. In each, demand 2210, 2211 is shown over time 2230, 2231. Typical energy
6 usage may be seen at 2240, 2241, which then tapers to a static low level of consumption at
7 2250, 2251. Subsequently, energy usage increases again 2260, 2261, indicating an end of the
8 vacation detection.

9 [0097] Figure 23 illustrates a detailed view 2300 of a vacation analysis based on an electric
10 water heater and refrigerator, showing inputs from both a HAN device 2301 and Green Button
11 2302. Each shows demand 2310, 2311 over time 2320, 2321. Static usage is seen at 2330,
12 2331, with an increased usage at 2340, 2341, again indicating an end of vacation detection.

13 [0098] In addition to the above model based on statistical analysis of sliding windows, a
14 day-to-day distance metric can be computed to identify the most similar groups of days. Since
15 vacation days are devoid of human activities, this metric helps the model zoom in on these
16 days.

17 [0099] All disaggregation modules described above may be capable of estimating per-
18 sample appliance loads, with confidence levels associated with each estimation. A post-
19 processing module may be employed to combine the multiple streams of appliance estimations,
20 akin to ensemble methods, and may produce a final disaggregation which is logical and
21 consistent (for example, no overestimation above the raw consumption load).

1 [00100] The final per-sample disaggregation may be further be used as input labels to large-
2 scale supervised techniques. For example, deep learning networks may be trained across a
3 large number of homes. Such models may provide an even smoother and possibly more
4 accurate output, and may be used as checks against the original disaggregation response.

5 [00101] Systems and methods in accordance with some embodiments of the present
6 invention may be combined into an over-arching process. For example, with reference to
7 Figure 24, an exemplary process flow 2400 will now be discussed. Consumption data is
8 received at 2405. Note that while other data may be used in both disaggregation and
9 itemization (such as but not limited to training data, weather data, sunrise/sunset data, home
10 data, neighborhood/area demographics, tax records, etc.), Figure 24 shows the treatment of
11 consumption data, as may be received from an AMI device or from a utility.

12 [00102] At 2410 the data is analyzed to determine times of active signal 2415, and times of
13 inactive signal 2420. From the active signal 2415, a lighting estimation module may be
14 applied, resulting in lighting estimation 2425. Similarly, an active water heater estimation
15 module may be applied. From the inactive signal 2420, a passive water heater estimation
16 module may be applied, which, when combined with results from the active water heater
17 estimation, may result in a total water heater estimation 2440. From the inactive signal 2420,
18 vacation detection modules may also be applied, resulting in vacation detection 2445, and
19 refrigeration detection modules may be applied, resulting in refrigeration estimation 2450.

20 [00103] With reference to Figure 25, an exemplary process 2500 that may utilize both
21 disaggregation and rule-based models may be seen to achieve approximately 100% appliance

1 itemization may be seen. In general, consumption data is received at 2501, and may be
2 provided to both disaggregation based models 2550 and rule based models 2560.

3 [00104] Disaggregation based models may receive the consumption data 2501 and perform
4 an inactivity detection at 2502, identifying both active signal 2504 and inactive signal 2505.
5 Active signal 2504 may be used (similar to as discussed above with reference to Figure 24) to
6 make a lighting estimation 2506. Active signal 2504 may be used make an estimation of
7 active use of a water heater at 2507.

8 [00105] Inactive signal 2505 may be used to make an estimation of passive use of a water
9 heater at 2508, which may be combined with active water heater estimation 2507 to arrive at a
10 total water heater estimation 2509. Inactive signal 2505 may also be used to make a vacation
11 detection 2510 and/or a refrigerator estimation 2511.

12 [00106] In accordance with some embodiments of the present invention, the inactive signal
13 2505 may also be used to provide an identification and estimation of a pool pump 2512, heating
14 appliances 2513, and/or cooling appliances 2514. Note that other data may be used in these
15 determinations, such as the use of temperature data 2515 in the heating and cooling estimations
16 2513, 2514. These itemizations and estimations may constitute an itemization by
17 disaggregation 2516.

18 [00107] Consumption data 2501 may also be used by rule-based models 2503 to perform
19 rule-based itemization and estimation. Note that while not shown on Figure 25, rule-based
20 models may also utilize additional information, such as but not limited to training data, weather
21 data, sunrise/sunset data, home data, home demographics, neighborhood/area demographics,
22 tax records, etc. Such information may be found in publicly available data stores (such as tax

1 records, weather data, etc.), or may be maintained by the utility or the party performing
2 disaggregation and itemization (such as training data).

3 [00108] Rule based models 2503 may be used to determine an itemization and estimation,
4 including but not limited to, a cooking estimation 2517, a laundry estimation 2518, an
5 entertainment estimation 2519, and an “other” or miscellaneous estimation 2520. Each of these
6 may constitute a rule based itemization 2521.

7 [00109] Combining itemization by disaggregation 2516 and rule based disaggregation may
8 result in approximately 100% itemization 2522. This substantially complete itemization may
9 provide customers with confidence sufficient that customers may be more persuaded to act on
10 various recommendations or proposals received that may suggest ways to reduce consumption
11 and/or cost.

1 **What is claimed is:**

2 1. A method of performing appliance itemization based on consumption data for a
3 whole house, comprising:

4 receiving at a processor the consumption data for a plurality of appliances;

5 determining by the processor if the consumption data includes active signals and
6 inactive signals;

7 upon detection of an active signal:

8 detecting by the processor, based at least in part on the active signal,
9 active water heating, and if active water heating is detected, estimating active water
10 heating consumption;

11 detecting by the processor, based at least in part on the active signal,
12 lighting, and if lighting is detected, estimating lighting consumption, wherein the processor
13 detects lighting based at least in part by identifying arcs of consumption in time periods
14 where lighting is expected to be used;

15 upon detection of an inactive signal:

16 detecting by the processor, based at least in part on the inactive signal,
17 passive water heating, and if passive water heating is detected, estimating passive water
18 heating consumption, wherein the processor estimates passive water heating
19 consumption by estimating typical amplitude and frequency of passive pulses;

20 detecting by the processor, based at least in part on the inactive signal,
21 refrigeration, and if refrigeration is detected, estimating refrigerator consumption, wherein
22 the processor detects refrigeration by analyzing data during low activity periods in which
23 regular pulses of a refrigeration compressor motor are detectable;

24 detecting by the processor, based at least in part on the inactive signal,
25 vacation mode, wherein the processor detects vacation mode by identifying multiple

consecutive days of static, lower-than-average consumption; and
outputting by the processor an itemization of detected appliances and estimated
consumption for each detected appliance.

2. The method of claim 1, wherein the consumption data is received from a utility.

3. The method of claim 1, wherein the consumption data is received from an
advanced metering infrastructure (AMI) device.

4. The method of claim 1, wherein the consumption data is of a low resolution
comprising data received at fifteen (15) minute, thirty (30) minute, or sixty (60) minute
intervals.

5. The method of claim 1, wherein the processor determines if the consumption data
includes active signals and inactive signals based at least in part on:

using a sliding window function and storing the energy consumption in a vector;
subsequently comparing the vector with lowest energy consumption windows to
determine inactivity.

6. The method of claim 5, wherein the processor estimates active water heater
consumption by estimating a typical amplitude of a water heater, behavior modeling, and
data smoothing.

7. The method of claim 6, wherein behavior modeling comprises user-specific
patterns are modeled, including attributes of time of day and day of week.

1
2 8. The method of claim 7, wherein attributes may further include characteristics
3 selected from the group consisting of temperature, season, number of occupants of the
4 house, specific appliance usage, and demographic data including geographic region, age
5 of occupants, gender of occupants, and socioeconomic status of occupants.

6
7 9. The method of claim 1, wherein identifying the arcs of consumption in time
8 periods where lighting is expected to be used comprises:

9 removing unsuitable data points from the consumption data;
10 cleaning the consumption data using percentile filtering, minimum value removal,
11 and smoothing noise removal;
12 detecting and removing seasonal loads by selecting time points showing
13 seasonal characteristics including contiguous days of absence or presence when typically
14 occurring lighting is absent;
15 extracting a lighting band, comprising a collection of times in a day at which
16 lighting is present.

17
18 10. The method of claim 9, wherein the processor estimates lighting consumption at
19 each data point along with lighting capacity parameters, timings of lighting, and
20 seasonality.

21
22 11. The method of claim 1, wherein the typical amplitude and frequency of passive
23 pulses are determined by a power rating of a detected water heater and the typical
24 duration of passive pulses, wherein the duration of passive pulses is a function of a
25 temperature setting of the water heater, insulation of the water heater, and the outside

1 temperature.

2

3 12. The method of claim 1, wherein the processor estimates refrigerator consumption
4 by:

5 analyzing several months of consumption data and identifying low activity
6 periods;

7 scoring each low activity period for quality;

8 compiling low activity periods that meet a quality threshold;

9 using a machine learning model to, based on the low activity periods that meet
10 the quality threshold, predict refrigeration consumption.

11

12 13. The method of claim 12, wherein the machine learning model is a regression
13 model based at least in part on training data.

14

15 14. The method of claim 1, wherein identifying multiple consecutive days of static,
16 lower-than-average consumption comprises:

17 reviewing consumption data spanning the previous three (3) weeks;

18 calculating a baseload based on previous consumption data and setting a
19 threshold;

20 calculating day energy consumption, and determining if day energy consumption
21 is within the threshold;

22 if the day energy is within the threshold, calculating energy consumption based
23 at least in part on the use of a sliding window function, with a window size of approximately
24 four (4) hours by two (2) hours, and storing the energy consumption in a vector;

25 determining if the size of the vector is greater than one day, and if so, determining

the standard deviation for the vector;

determining if the standard deviation for the vector is within the threshold, and if so, identifying the top three deviated values from the mean of the vector;

determining if the top three deviated values from the mean of the vector are within the threshold, and if so determining the mean of the vector;

determining if the mean of the vector is within the threshold;

if the mean of the vector is within the threshold, detecting a vacation with start and end time as the start and end time of the vector.

15. A method of performing appliance itemization based on consumption data for a whole house received from an advanced metering infrastructure (AMI) device, the consumption data being of a low resolution comprising data received at fifteen (15) minute, thirty (30) minute, or sixty (60) minute intervals, the method comprising:

receiving at a processor the consumption data for a plurality of appliances;

determining by the processor if the consumption data includes active signals and inactive signals;

upon detection of an active signal:

detecting by the processor, based at least in part on the active signal, active water heating, and if active water heating is detected, estimating active water heating consumption at least in part by estimating a typical amplitude of a water heater, behavior modeling, and data smoothing, wherein behavior modeling comprises user-specific patterns are modeled, including attributes of time of day and day of week;

detecting by the processor, based at least in part on the active signal, lighting based at least in part by identifying arcs of consumption in time periods where lighting is expected to be used, wherein identifying arcs of consumption comprises:

1 removing unsuitable data points from the consumption data;
2 cleaning the consumption data using percentile filtering,
3 minimum value removal, and smoothing noise removal;
4 detecting and removing seasonal loads by selecting time points
5 showing seasonal characteristics including contiguous days of absence or presence
6 when typically occurring lighting is absent;
7 extracting a lighting band, comprising a collection of times in a
8 day at which lighting is present;
9 if lighting is detected, estimating lighting consumption at each data point
10 along with lighting capacity parameters, timings of lighting, and seasonality;
11 upon detection of an inactive signal:
12 detecting by the processor, based at least in part on the inactive signal,
13 passive water heating based at least in part on amplitude estimation, frequency
14 estimation, and temperature correlation, and if passive water heating is detected,
15 estimating passive water heating consumption at least in part by estimating typical
16 amplitude and frequency of passive pulses, determined by a power rating of a detected
17 water heater and the typical duration of passive pulses, wherein the duration of passive
18 pulses is a function of a temperature setting of the water heater, insulation of the water
19 heater, and the outside temperature;
20 detecting by the processor, based at least in part on the inactive signal,
21 refrigeration at least in part by analyzing data during low activity periods in which regular
22 pulses of a refrigeration compressor motor are detectable, and if refrigeration is detected,
23 estimating refrigerator consumption at least in part by:
24 analyzing several months of consumption data and identifying
25 low activity periods;

1 scoring each low activity period for quality;
2 compiling low activity periods that meet a quality threshold;
3 using a regression machine learning model to, based on the low
4 activity periods that meet the quality threshold, predict refrigerator consumption; and
5 detecting by the processor, based at least in part on the inactive
6 signal, vacation mode by identifying multiple consecutive days of static, lower-than-
7 average consumption; and
8 providing to a customer by the processor an itemization of detected appliances
9 and estimated consumption for each detected appliance.

10

100

FIGURE 1

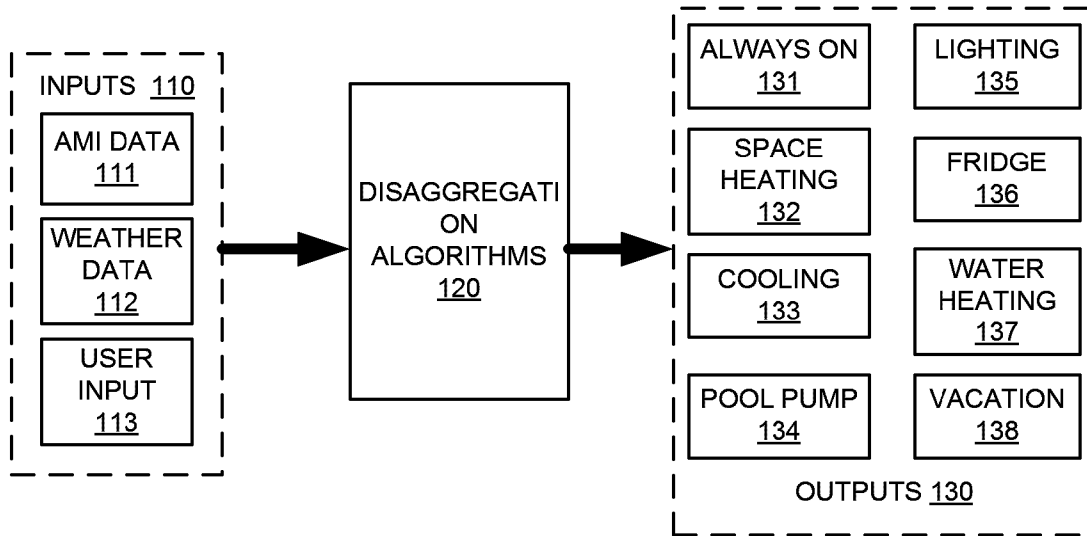


FIGURE 2

200


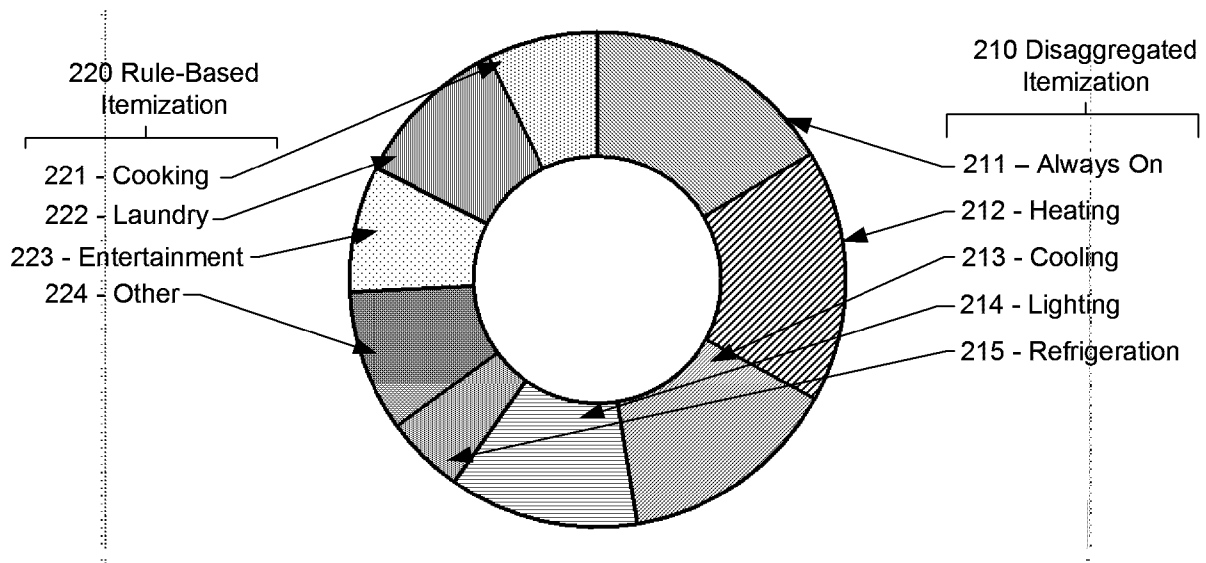


FIGURE 3

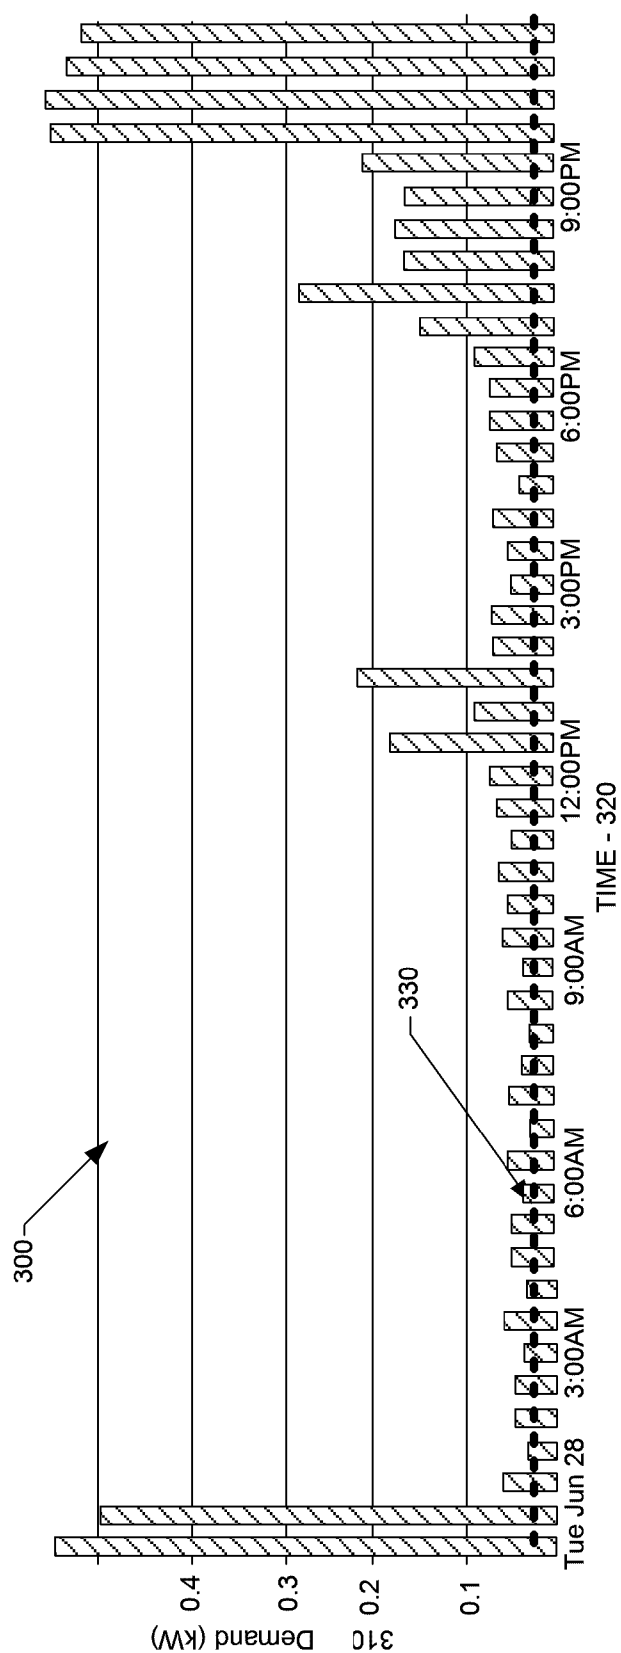

3 / 20
FIGURE 4

400 →


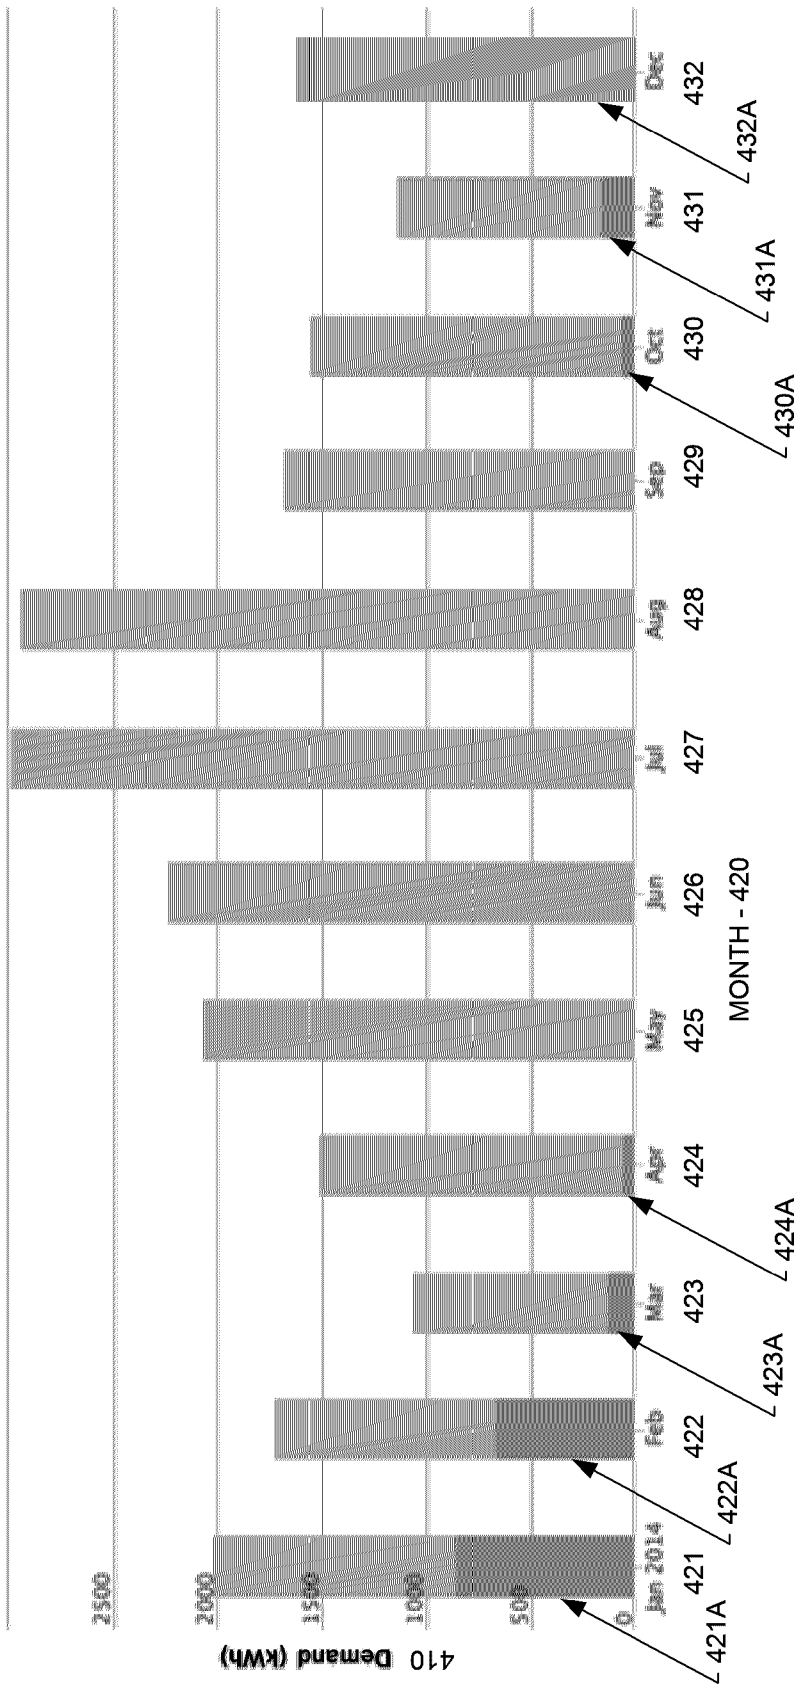


FIGURE 5

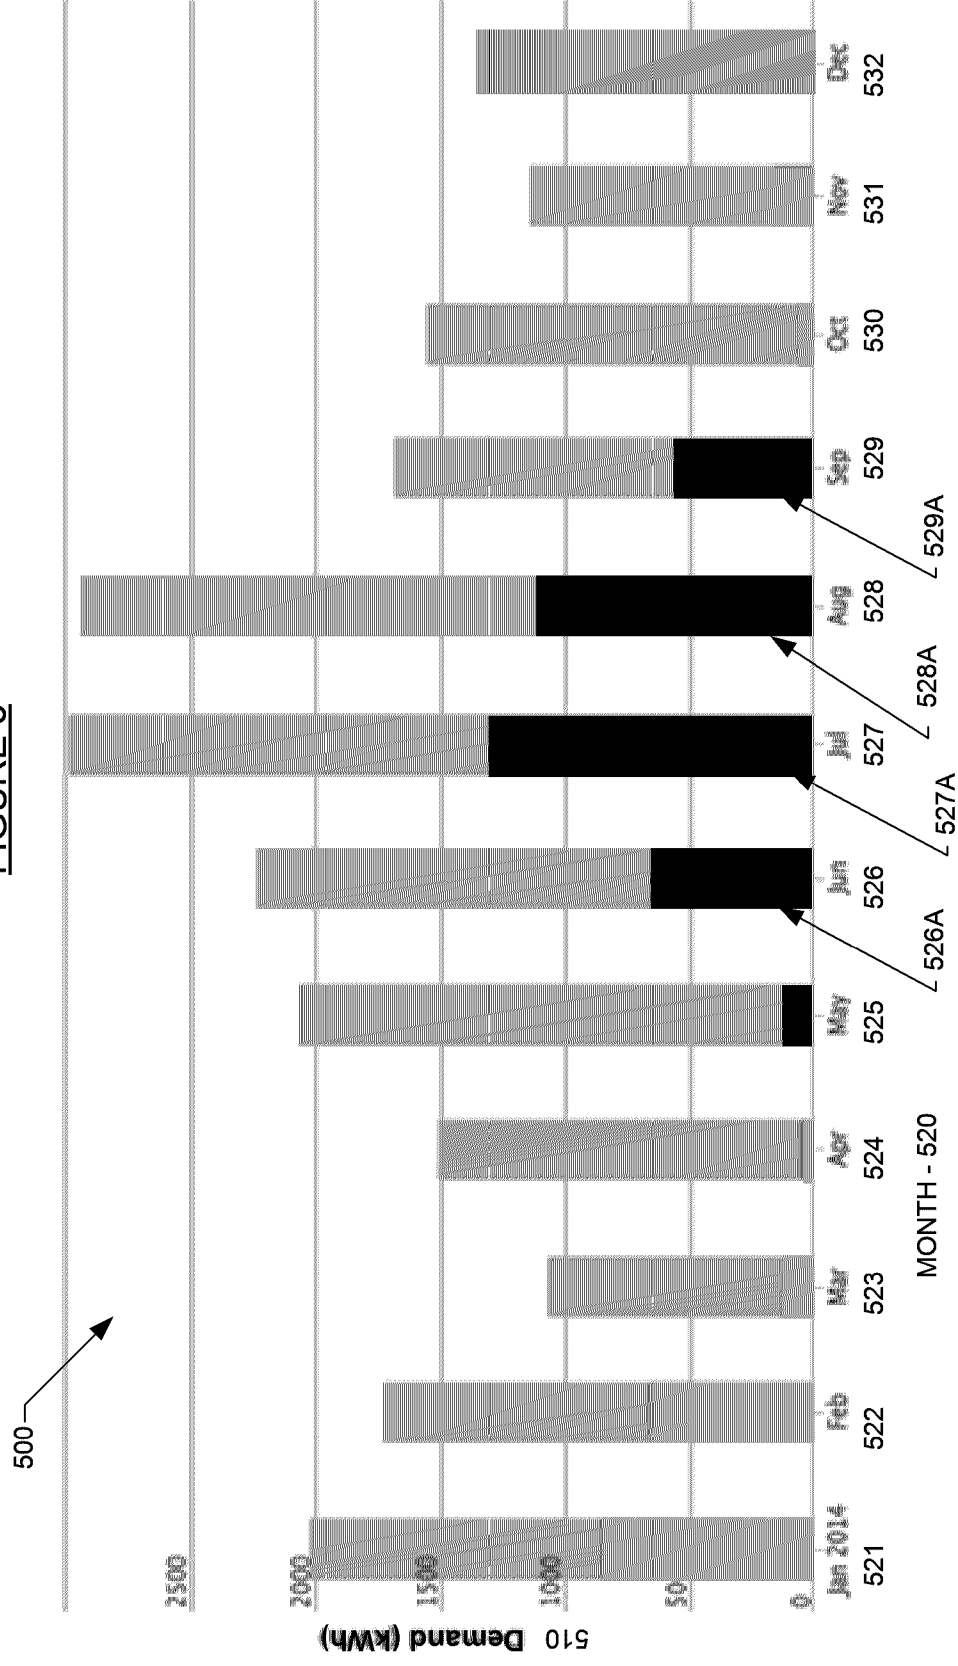

5 / 20
FIGURE 6

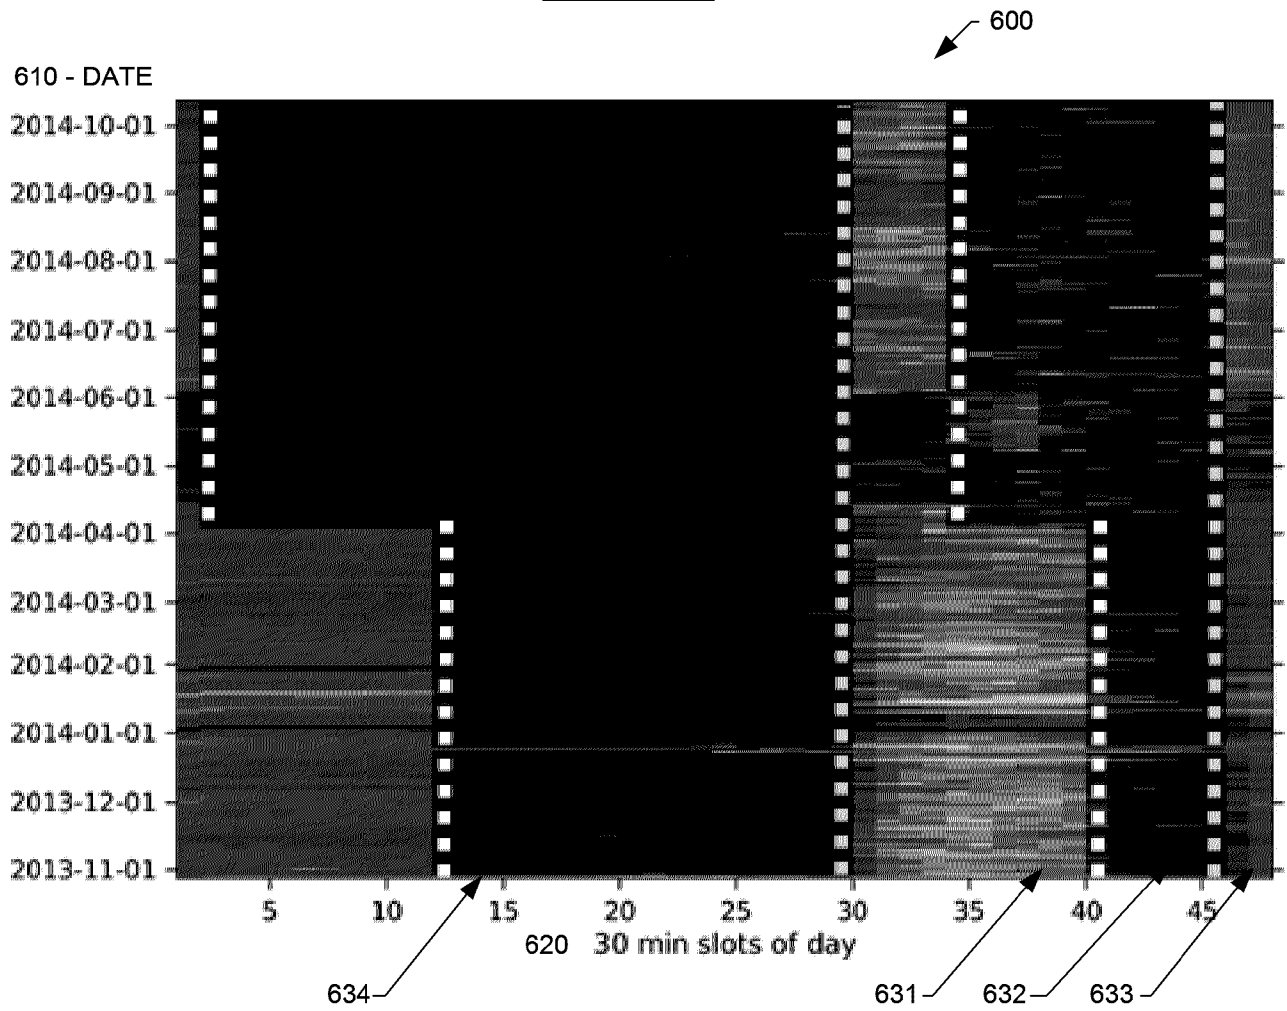


FIGURE 7


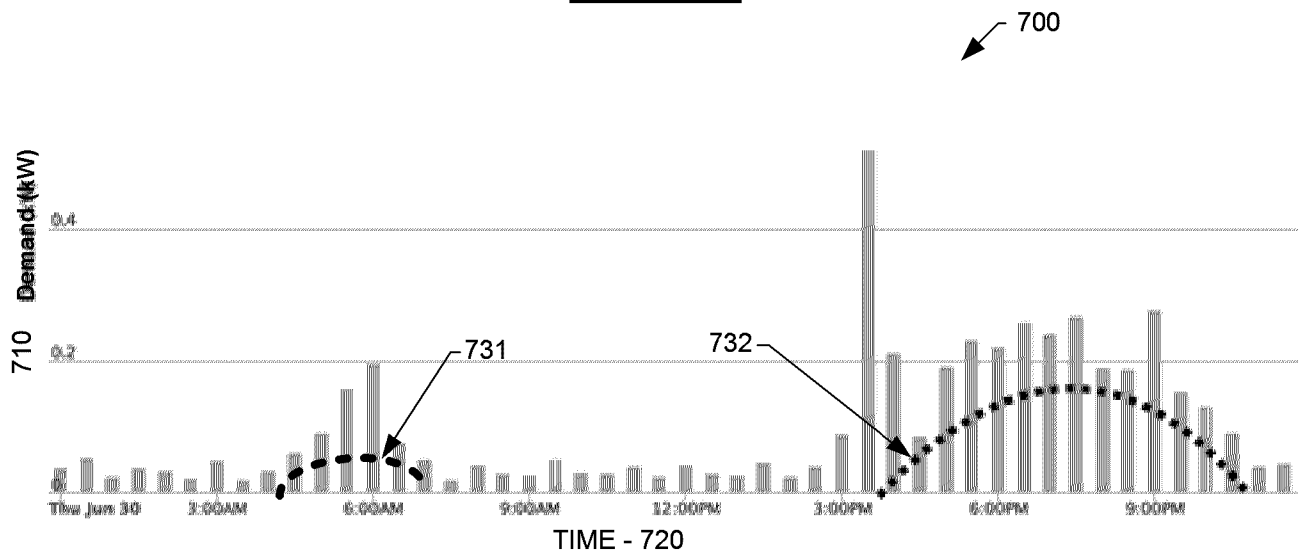


FIGURE 8

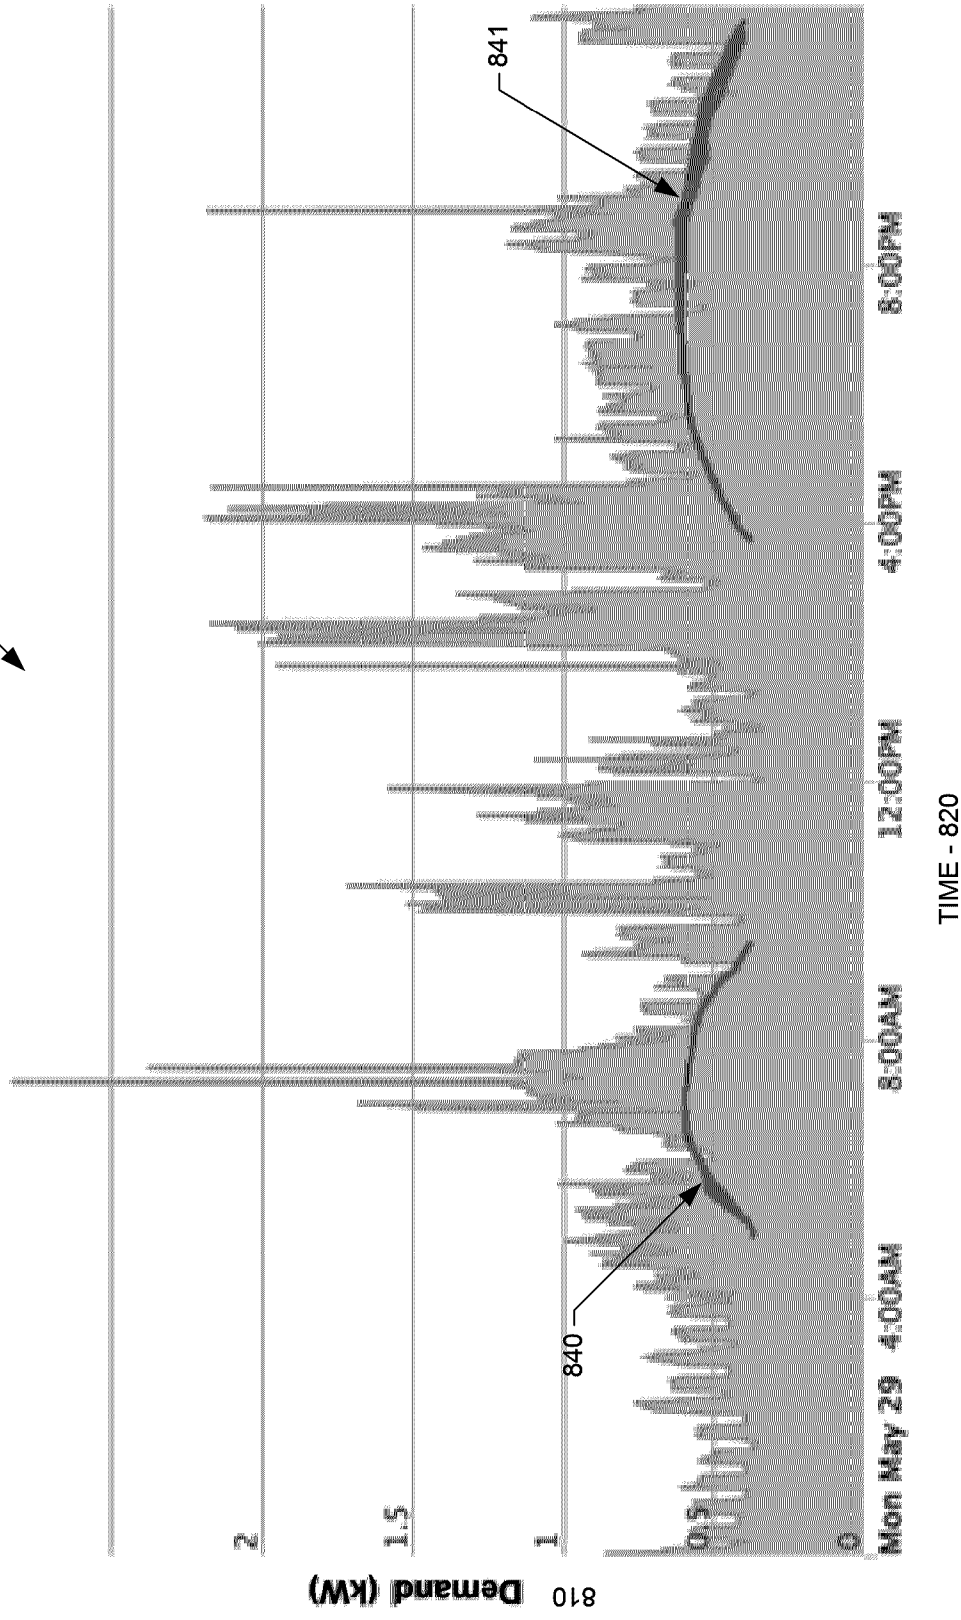800



900


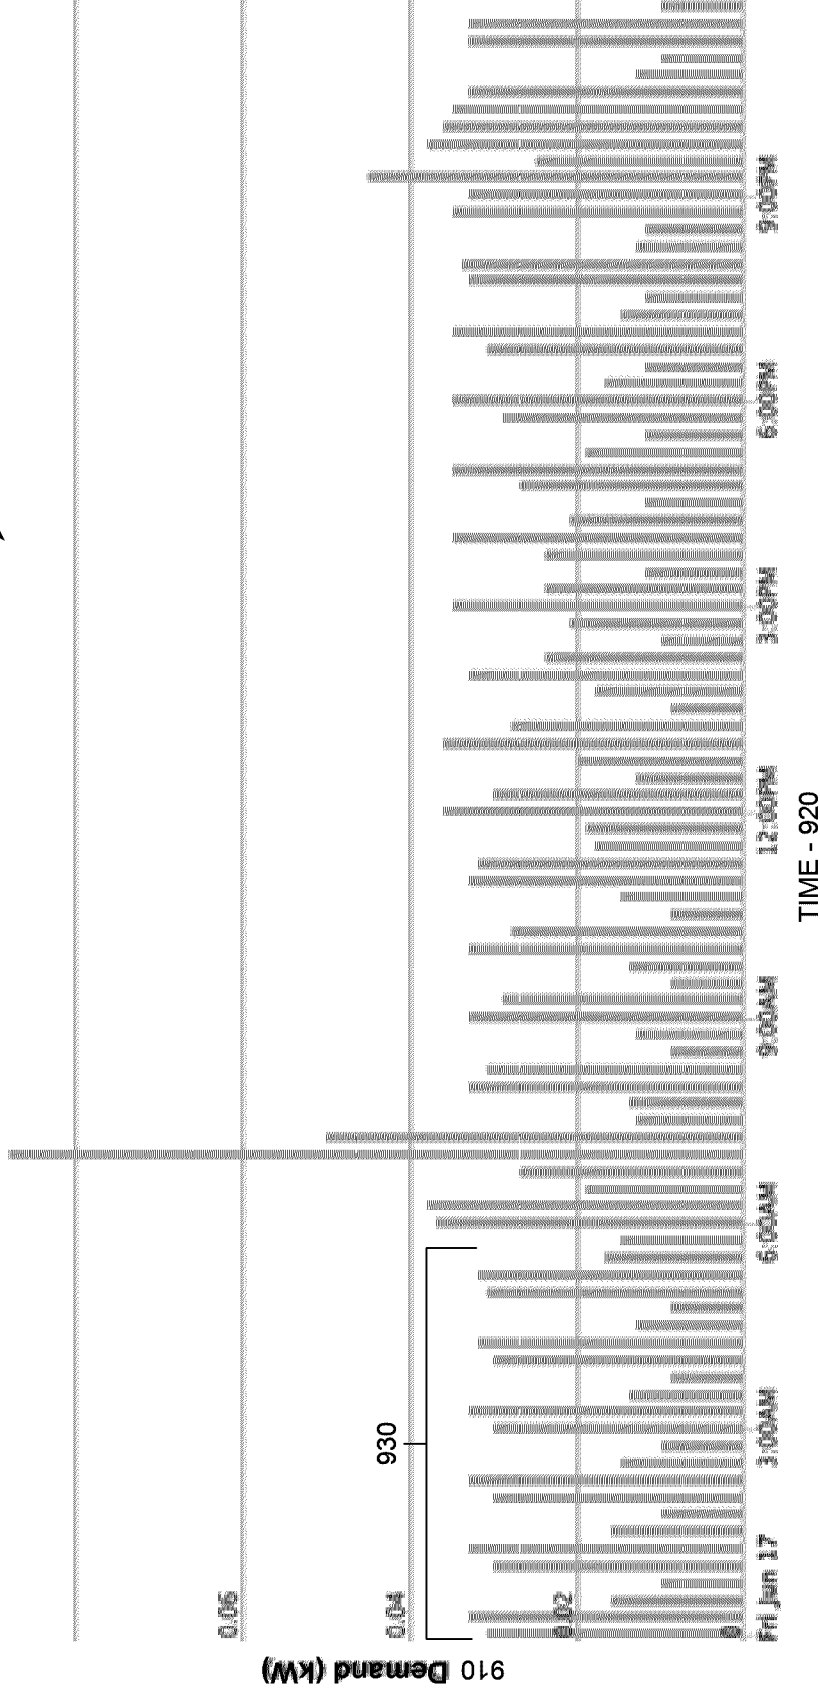


FIGURE 10

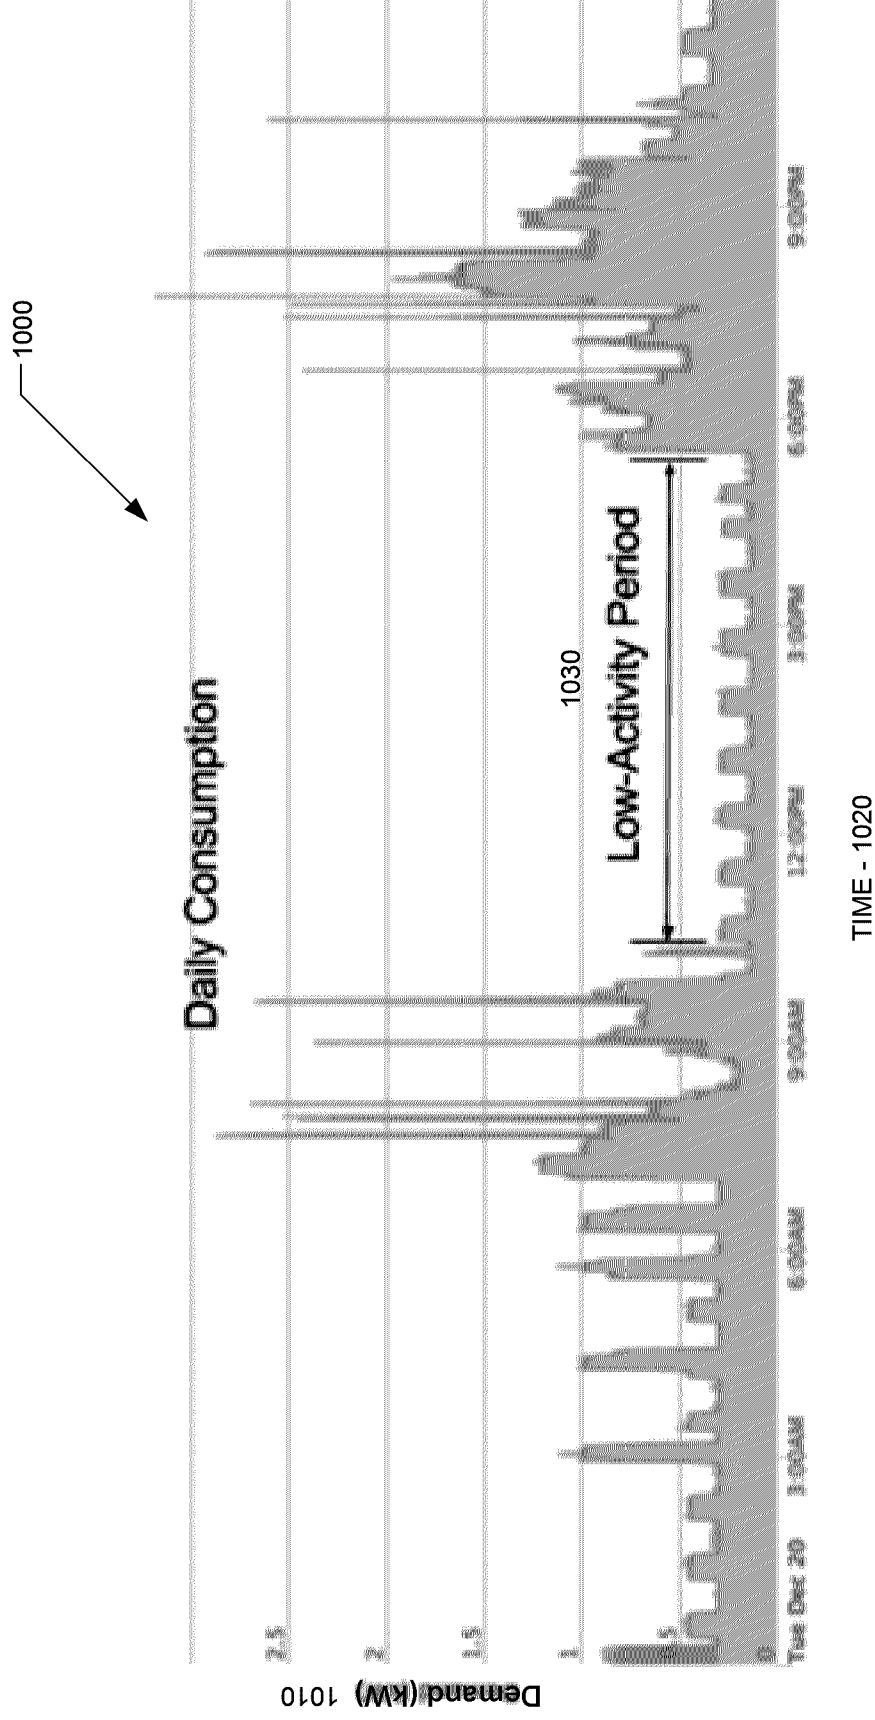

9 / 20
FIGURE 11

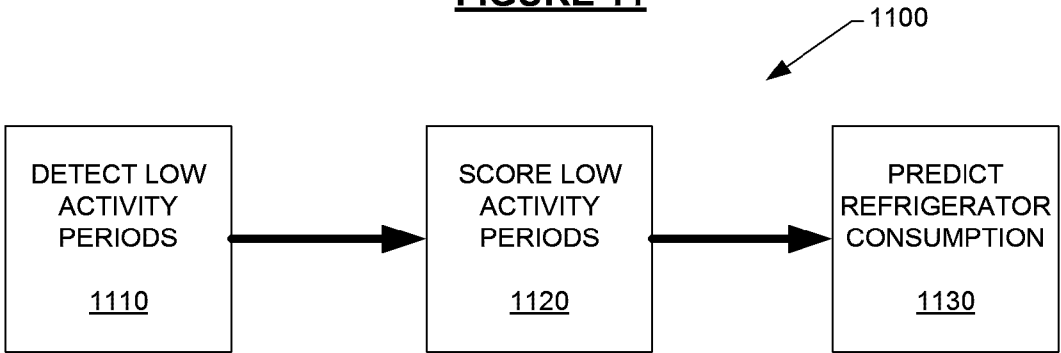


FIGURE 12

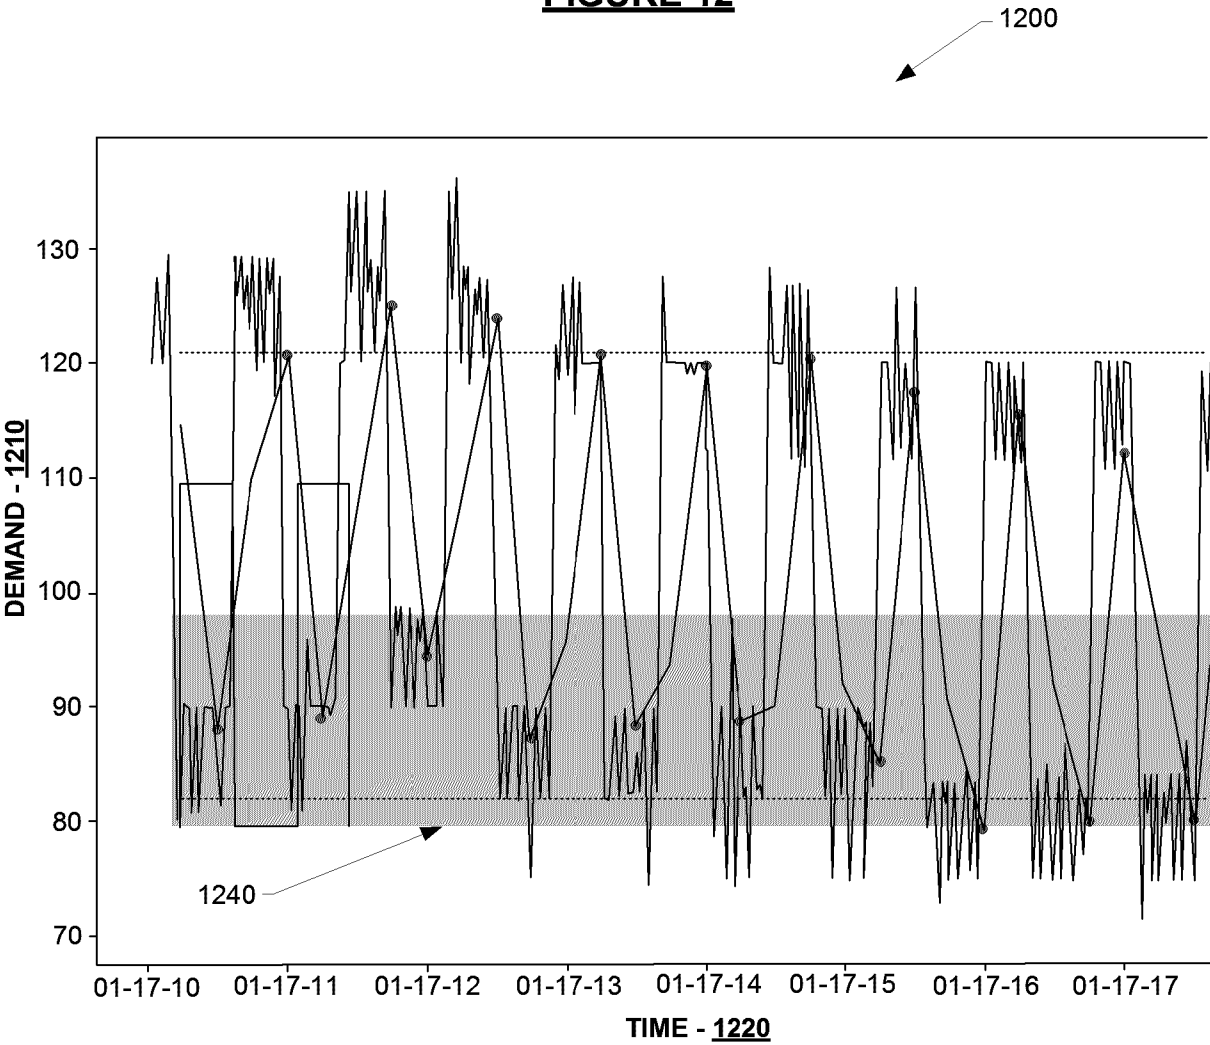


FIGURE 13

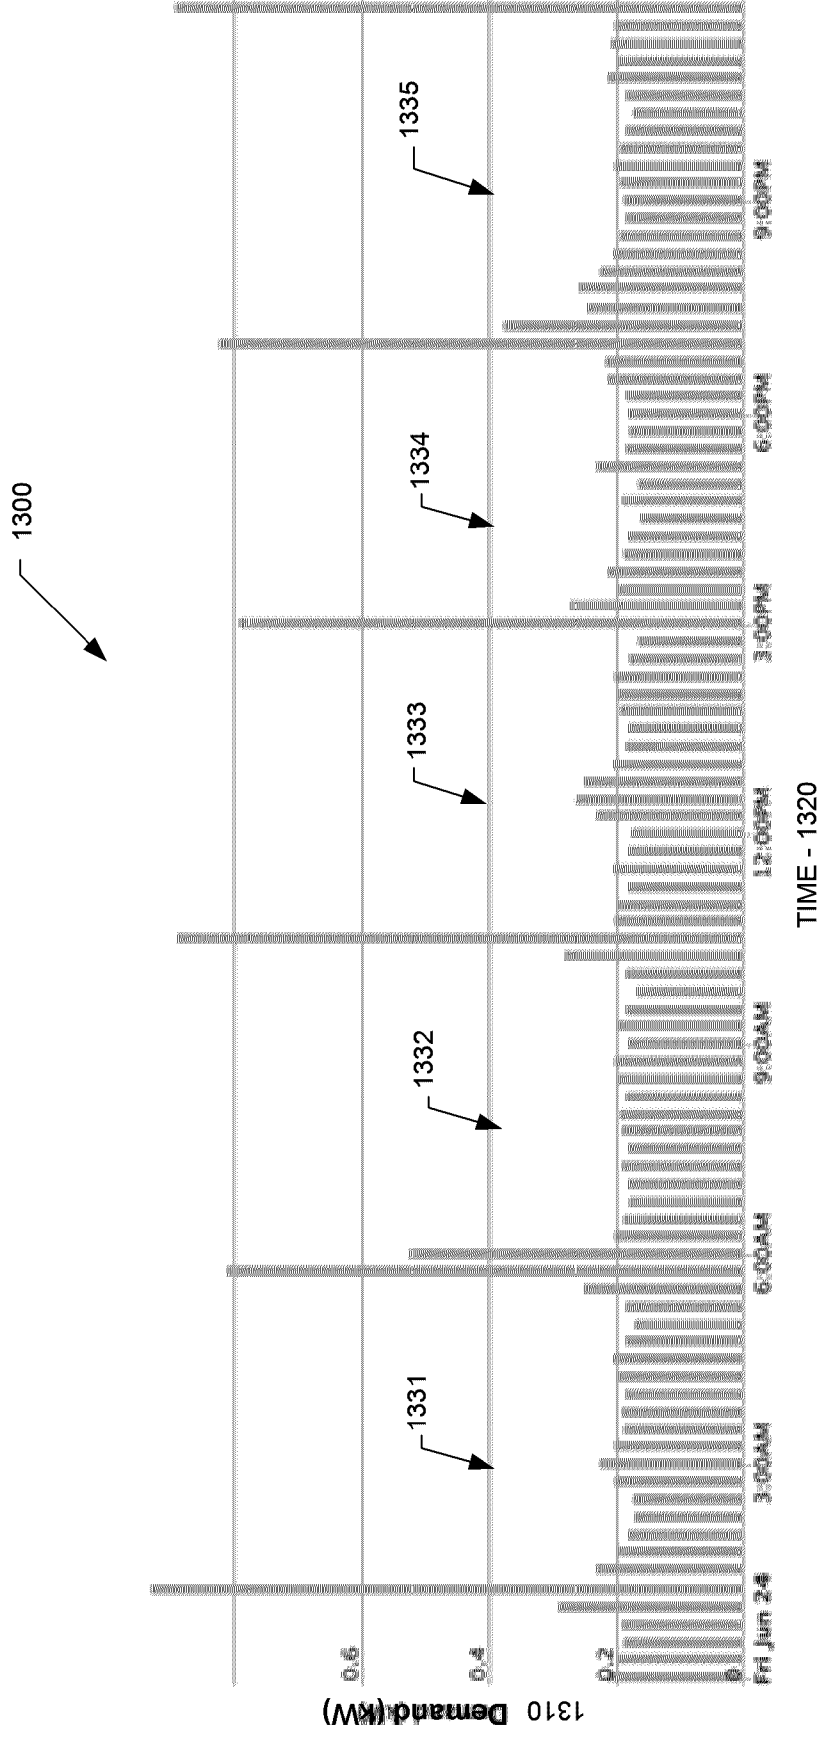


FIGURE 14

1400

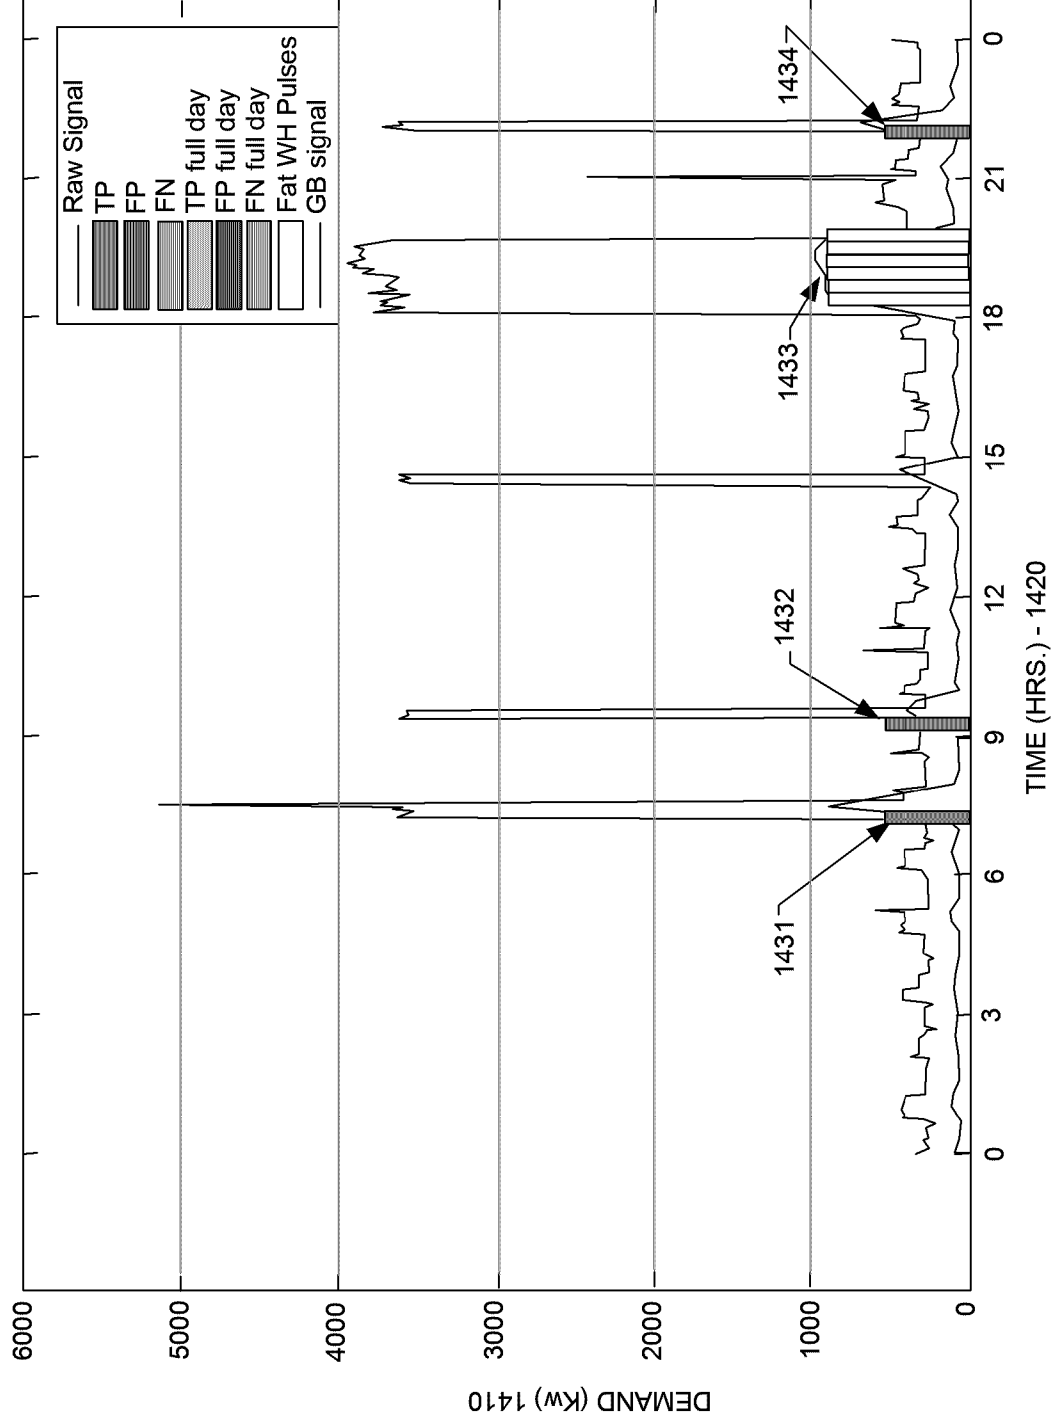


FIGURE 15

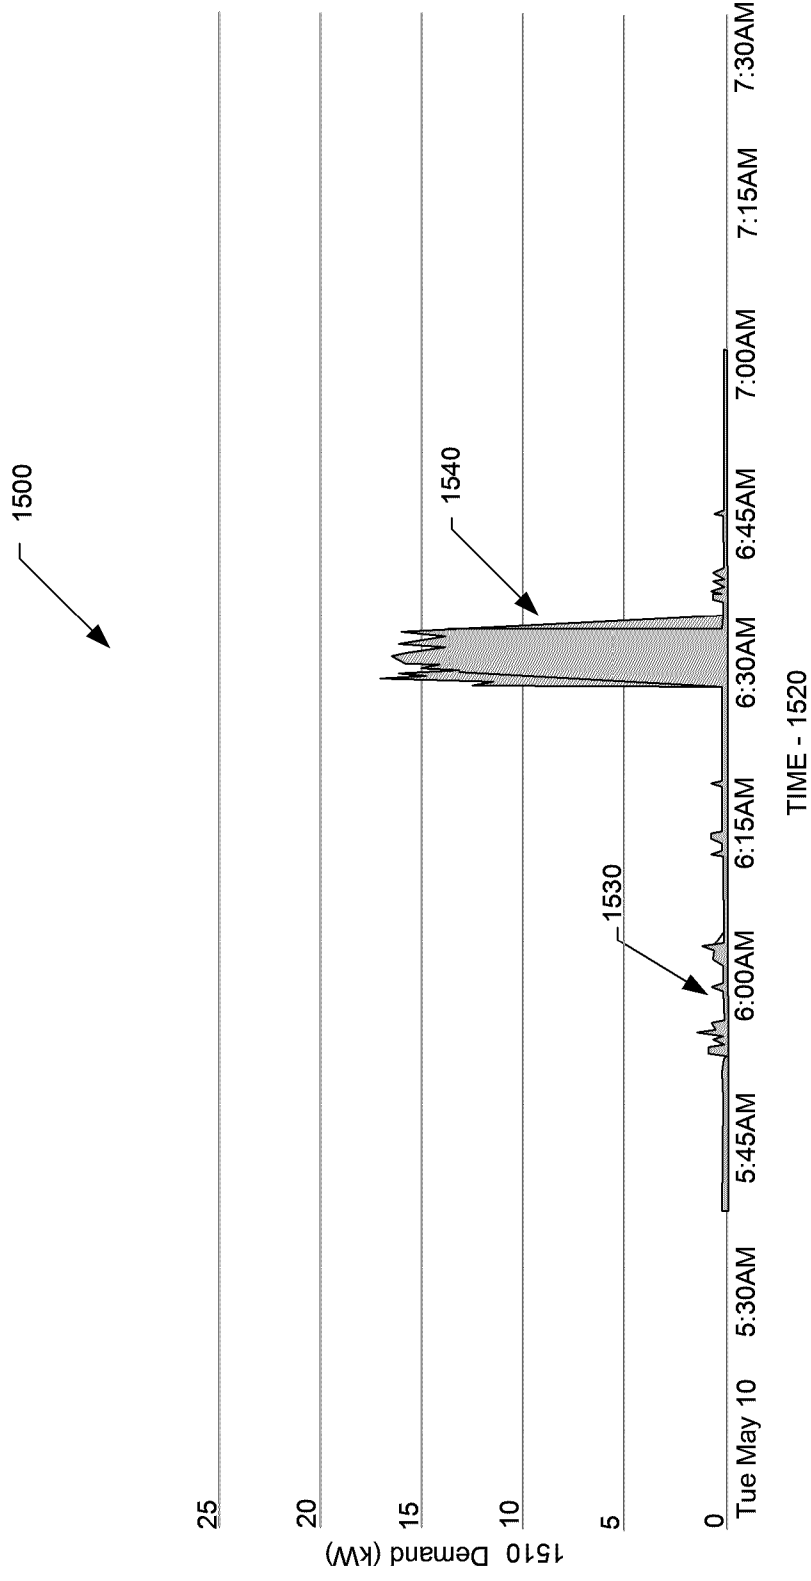


FIGURE 16

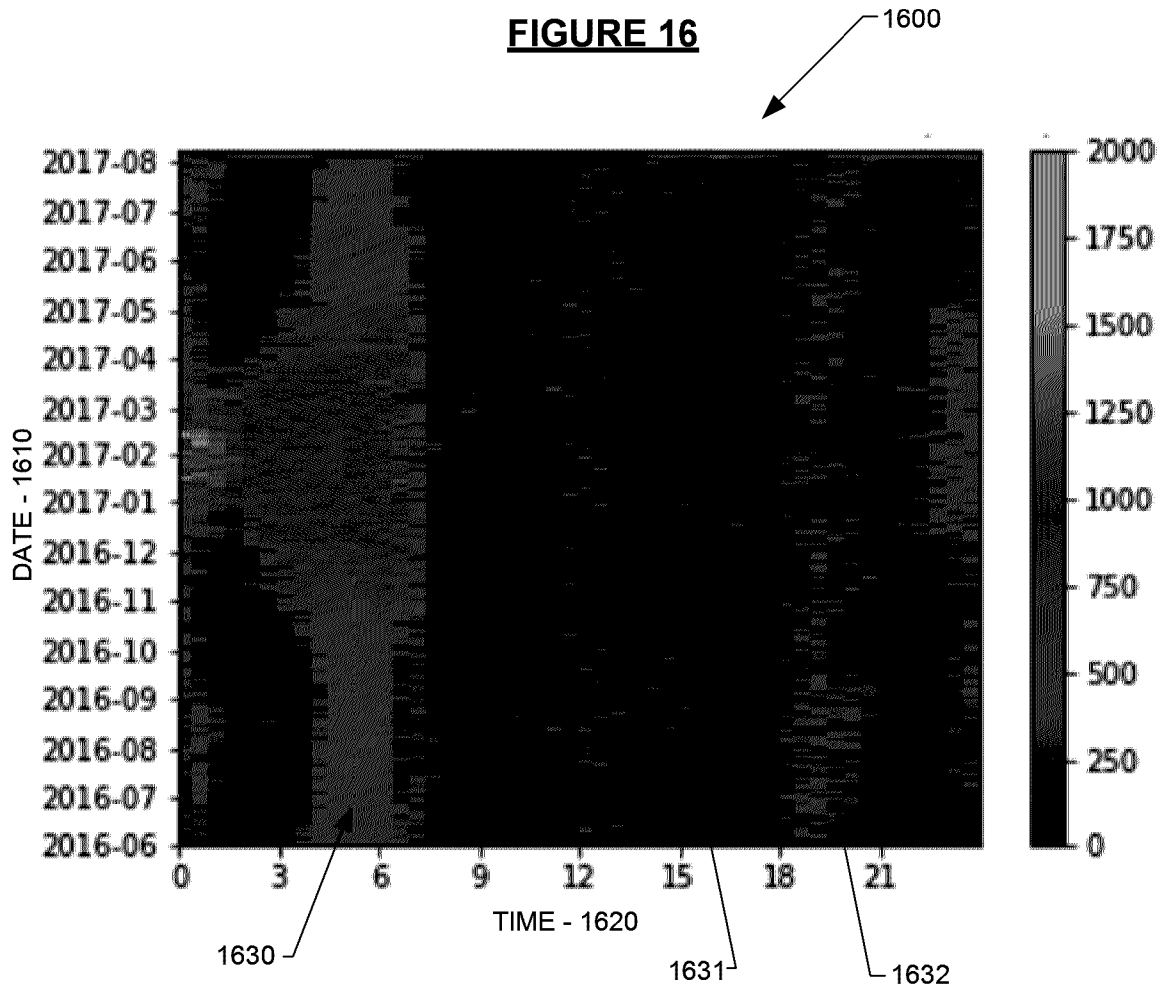


FIGURE 17

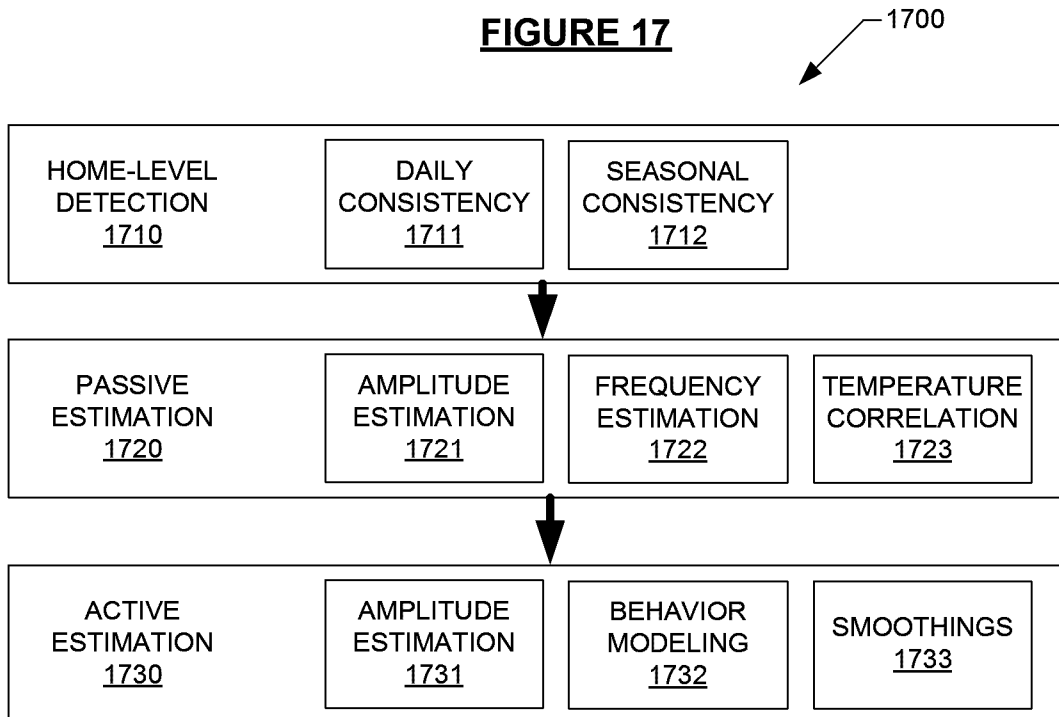


FIGURE 18

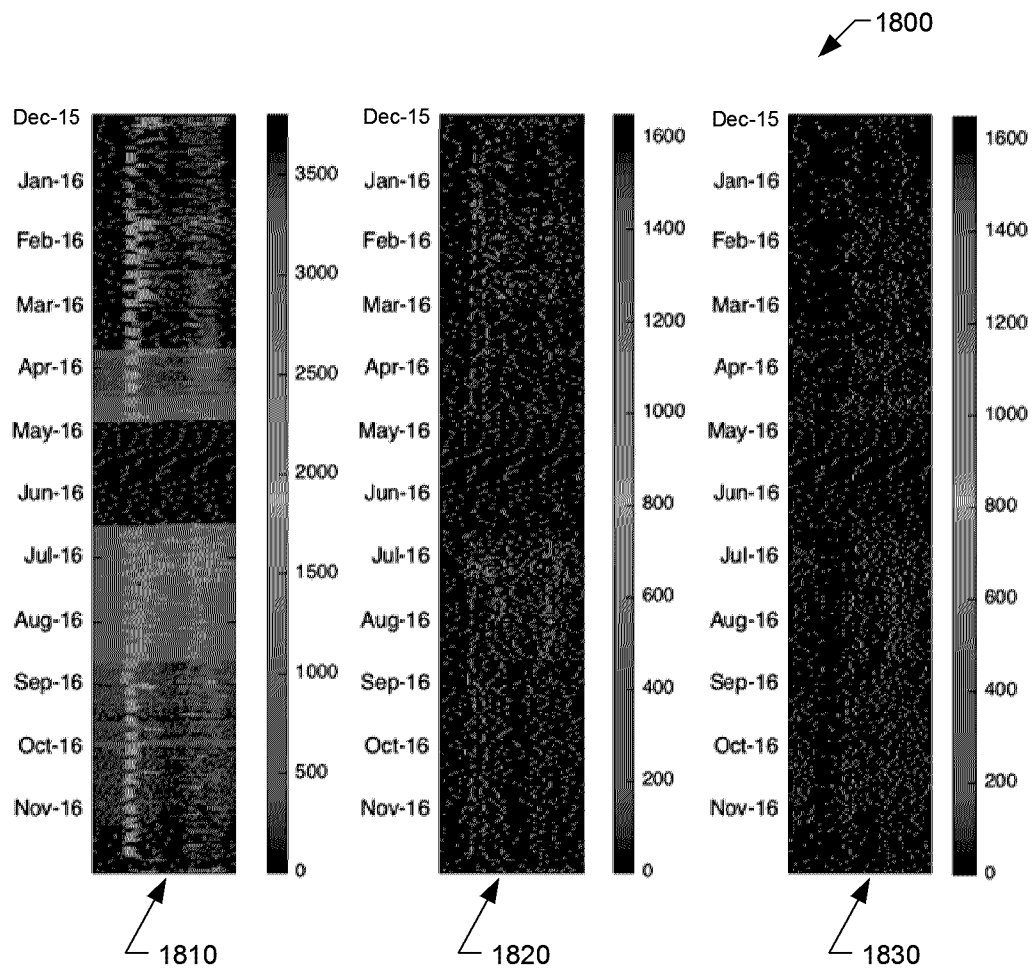



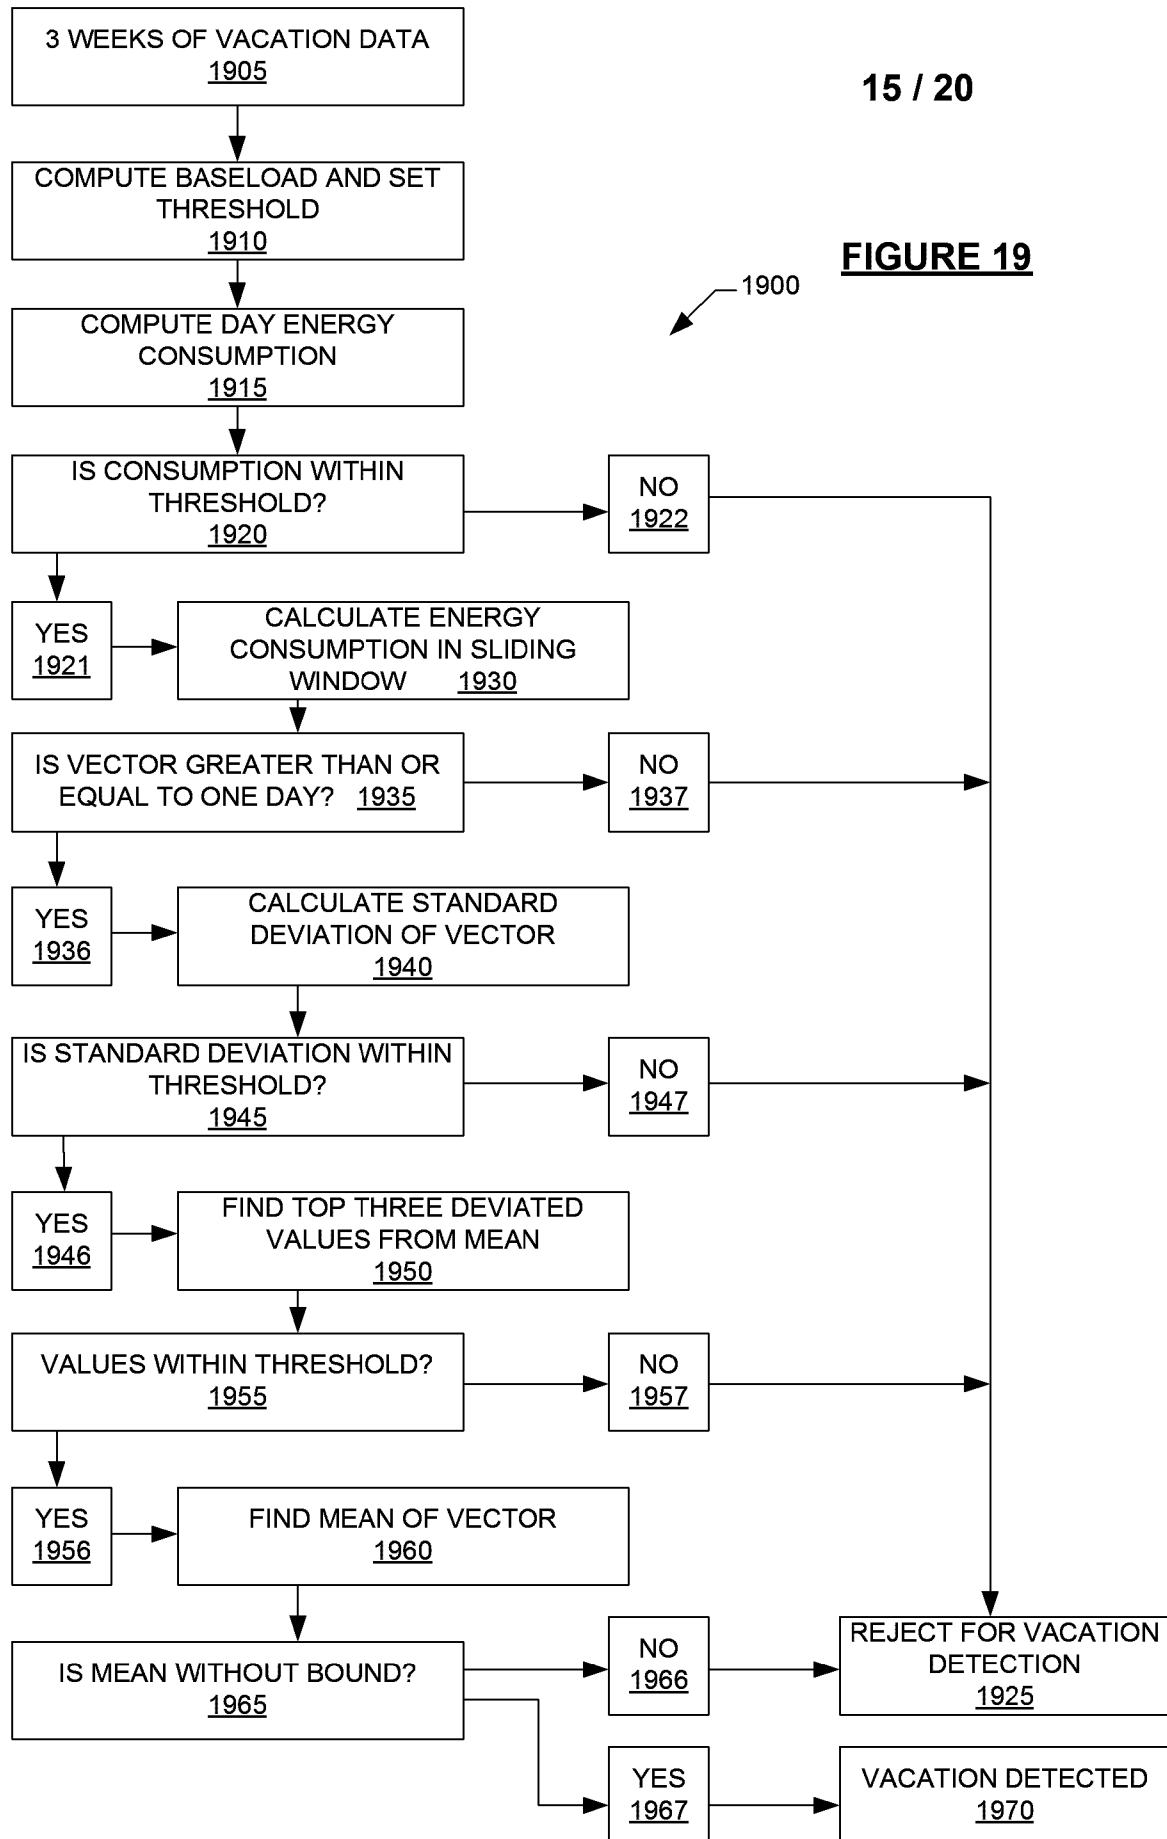
FIGURE 19

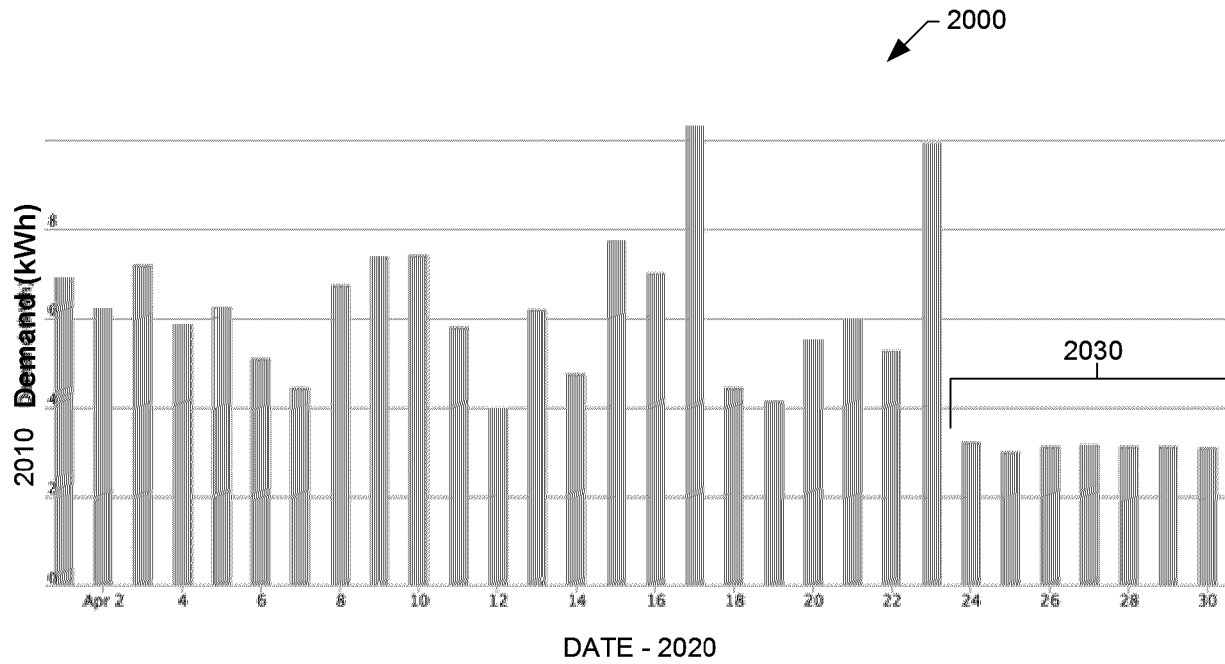FIGURE 20



16 / 20

FIGURE 21

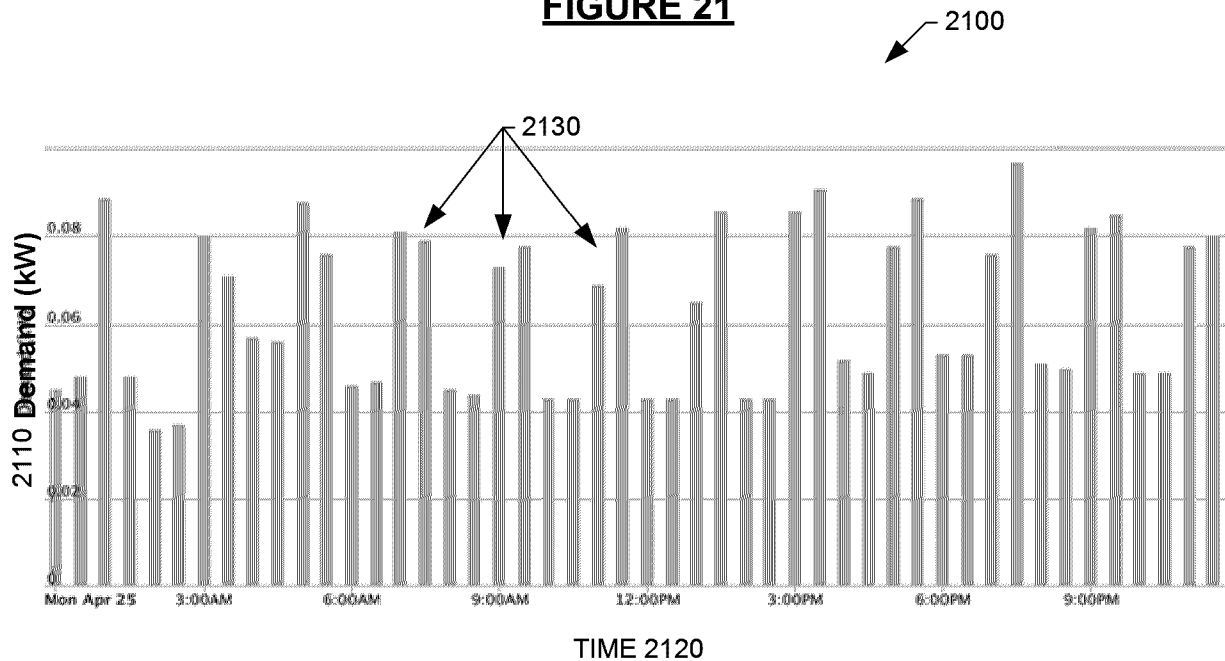


FIGURE 22


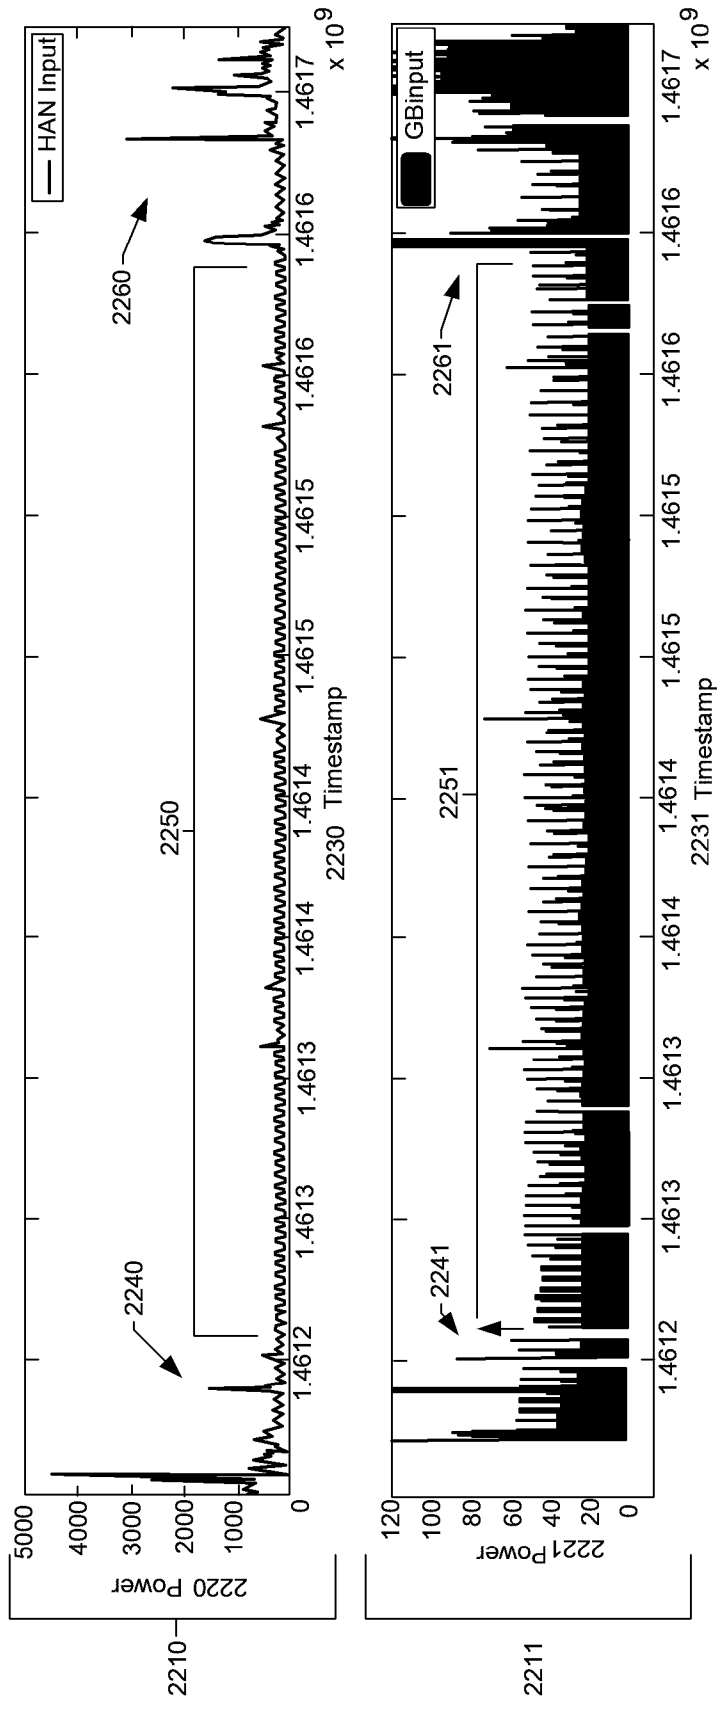


FIGURE 23 18 / 20

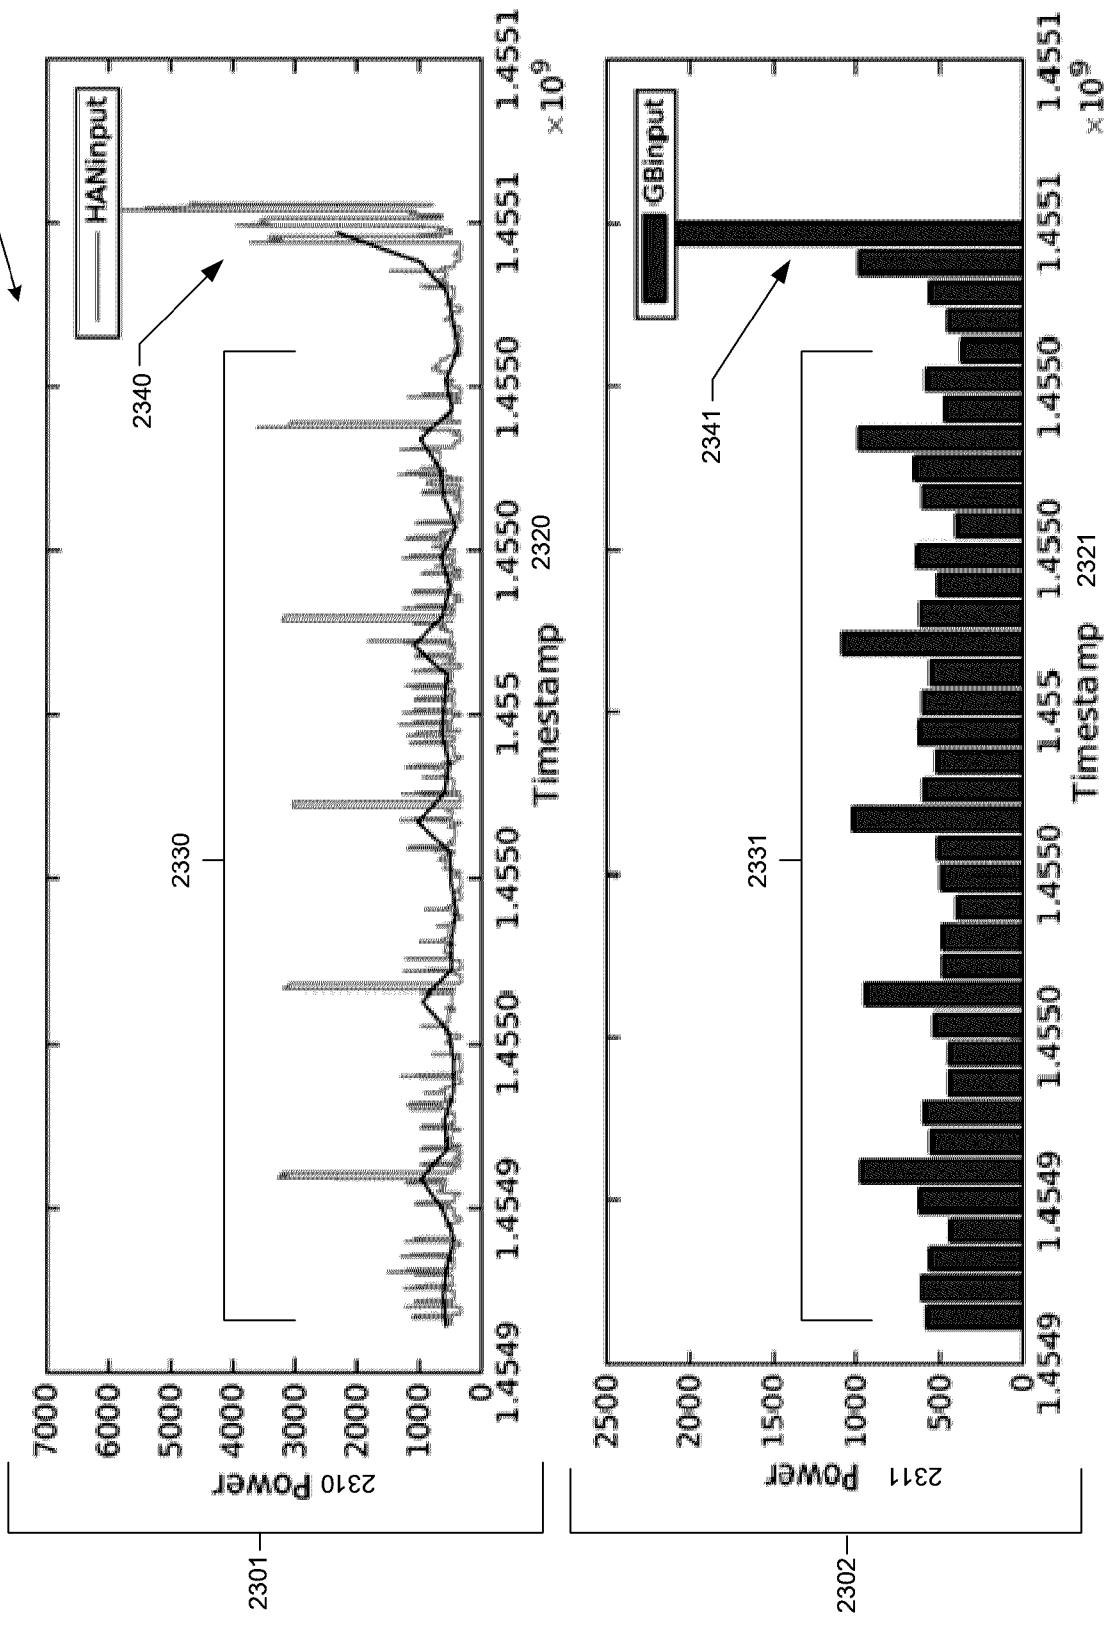

19 / 20
FIGURE 24


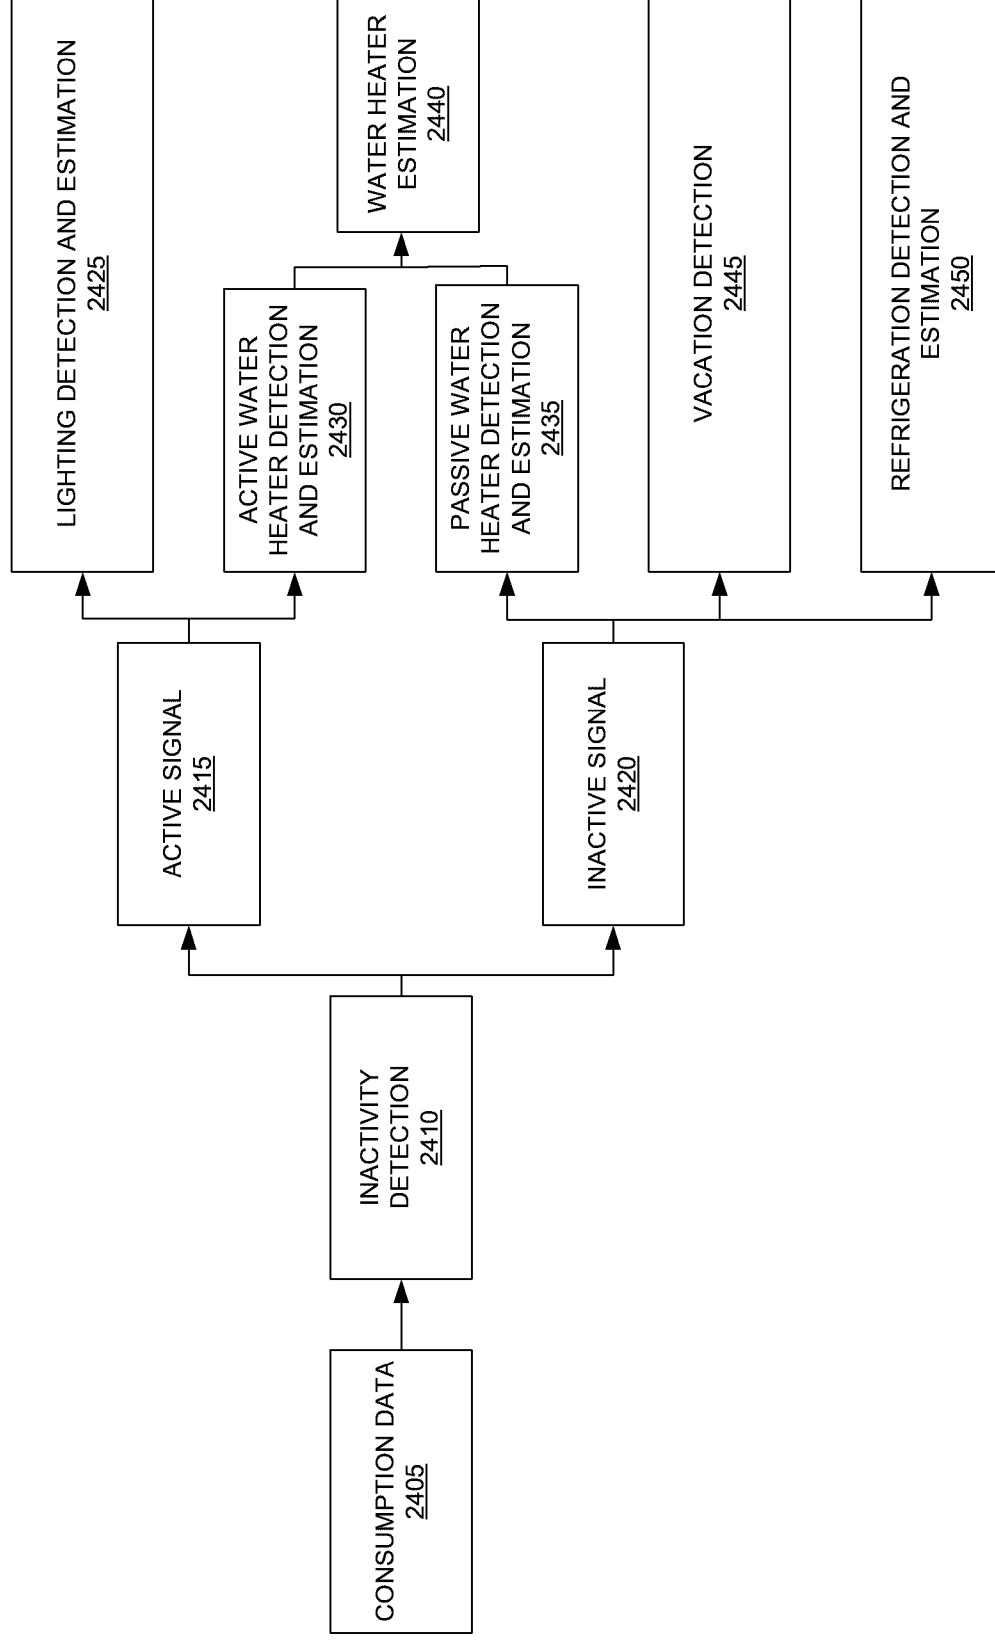


FIGURE 25

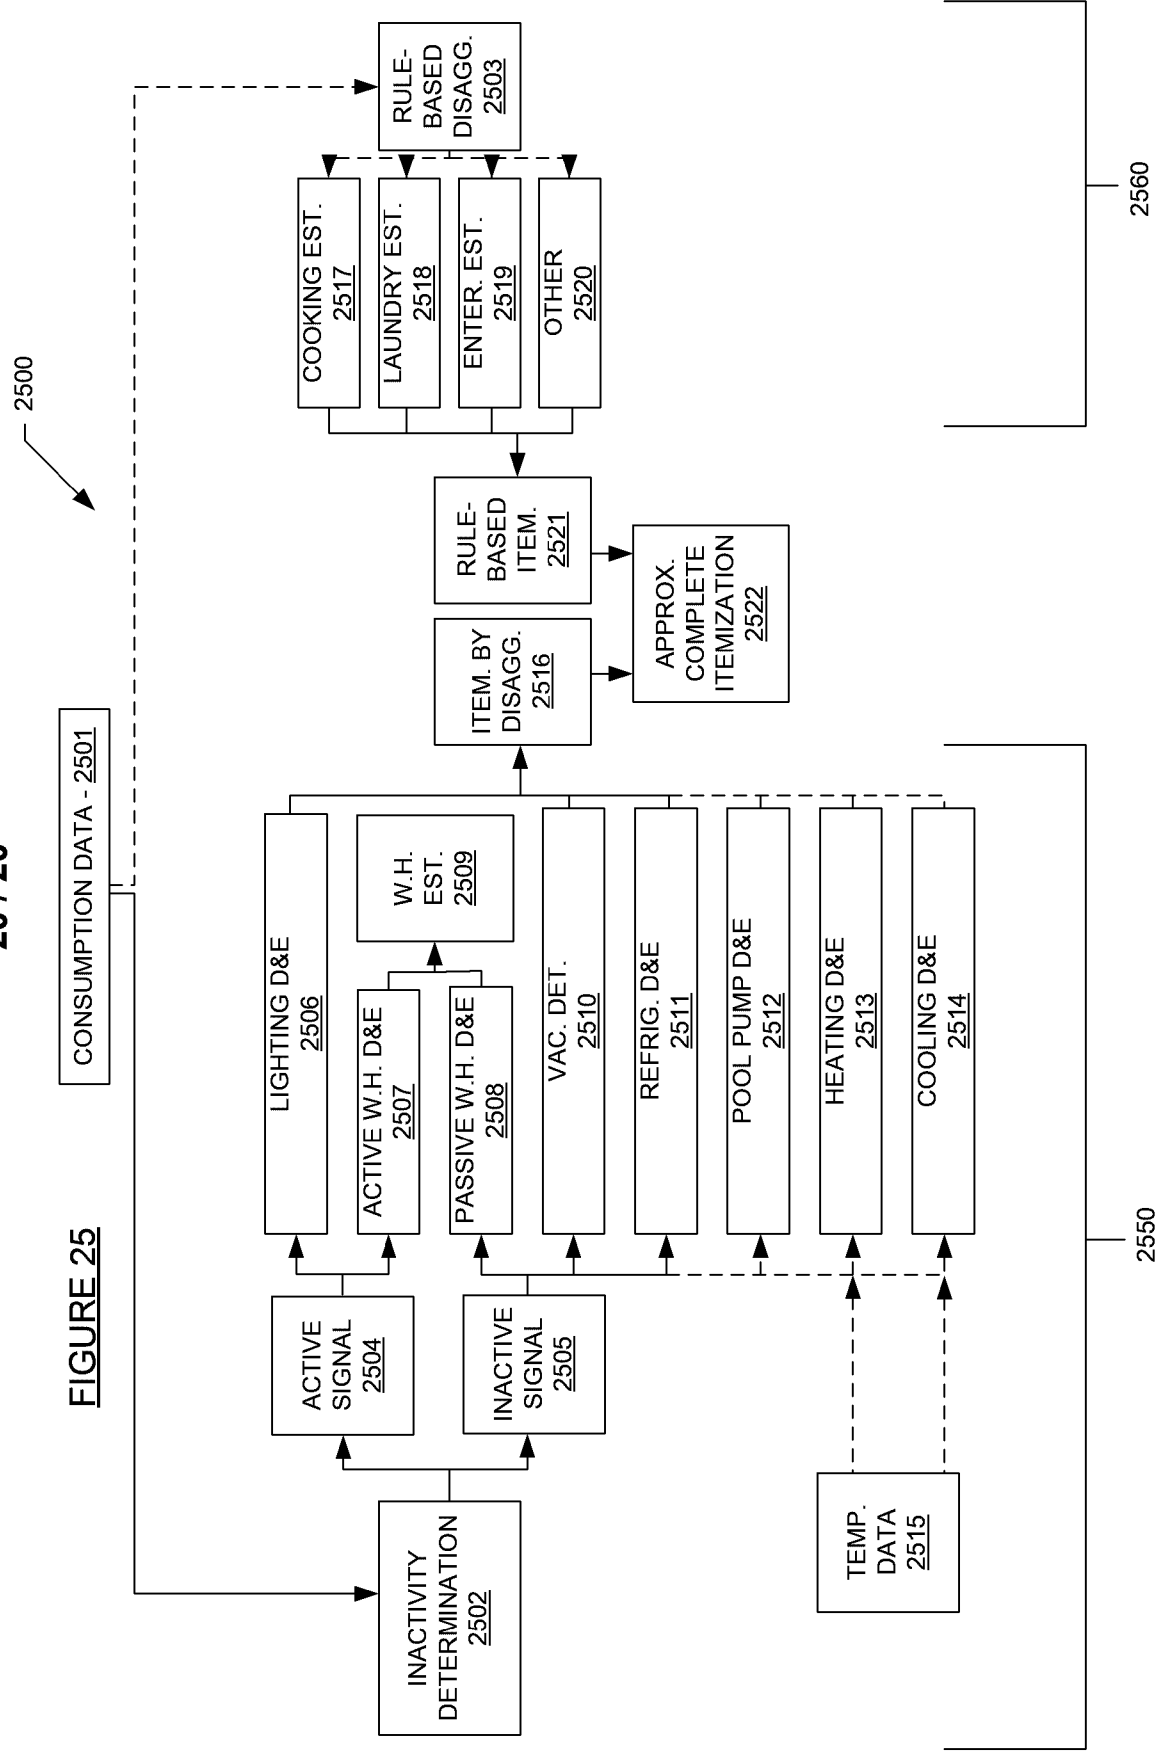

100

