



US 20110045254A1

(19) **United States**(12) **Patent Application Publication**
Kühnberger et al.(10) **Pub. No.: US 2011/0045254 A1**(43) **Pub. Date: Feb. 24, 2011**(54) **METHOD FOR PRODUCING A DECORATED
PROFILE BODY**


Feb. 23, 2008 (DE) 10 2008 010 738.7

(76) Inventors: **Sven Kühnberger**, Selbitz (DE);
Oliver Hagen, Kosseinestrasse
(DE); **Stefan Eyhorn**, Stuttgart
(DE)Correspondence Address:
MOETTELI & ASSOCIATES SARL
ST. LEONHARDSTRASSE 4
ST. GALLEN CH-9000 (CH)(21) Appl. No.: **12/808,373**(22) PCT Filed: **Nov. 14, 2008**(86) PCT No.: **PCT/EP2008/009666**§ 371 (c)(1),
(2), (4) Date: **Oct. 4, 2010**(30) **Foreign Application Priority Data**

Dec. 20, 2007 (DE) 10 2007 062 479.6

Publication Classification(51) **Int. Cl.**
B41M 5/00 (2006.01)
B41J 2/01 (2006.01)
(52) **U.S. Cl.** **428/195.1; 347/102**(57) **ABSTRACT**

The invention relates to a method for producing a decorated profile body, comprising the steps: preparing a substrate; applying a decoration base; and applying a decoration finish covering the decoration base at least in segments, wherein the decoration base and the decoration finish together form a decoration of the profile body. In order to prevent a metamer effect from occurring during appropriate use of the profile body, according to the invention, the decoration base comprises a color structure from an expanded color space relative to the decoration finish, wherein the color structure of the decoration base is selected such that substantially no metamer effect occurs between the decoration of the profile body and a reference decoration similar thereto, preferably identical thereto.

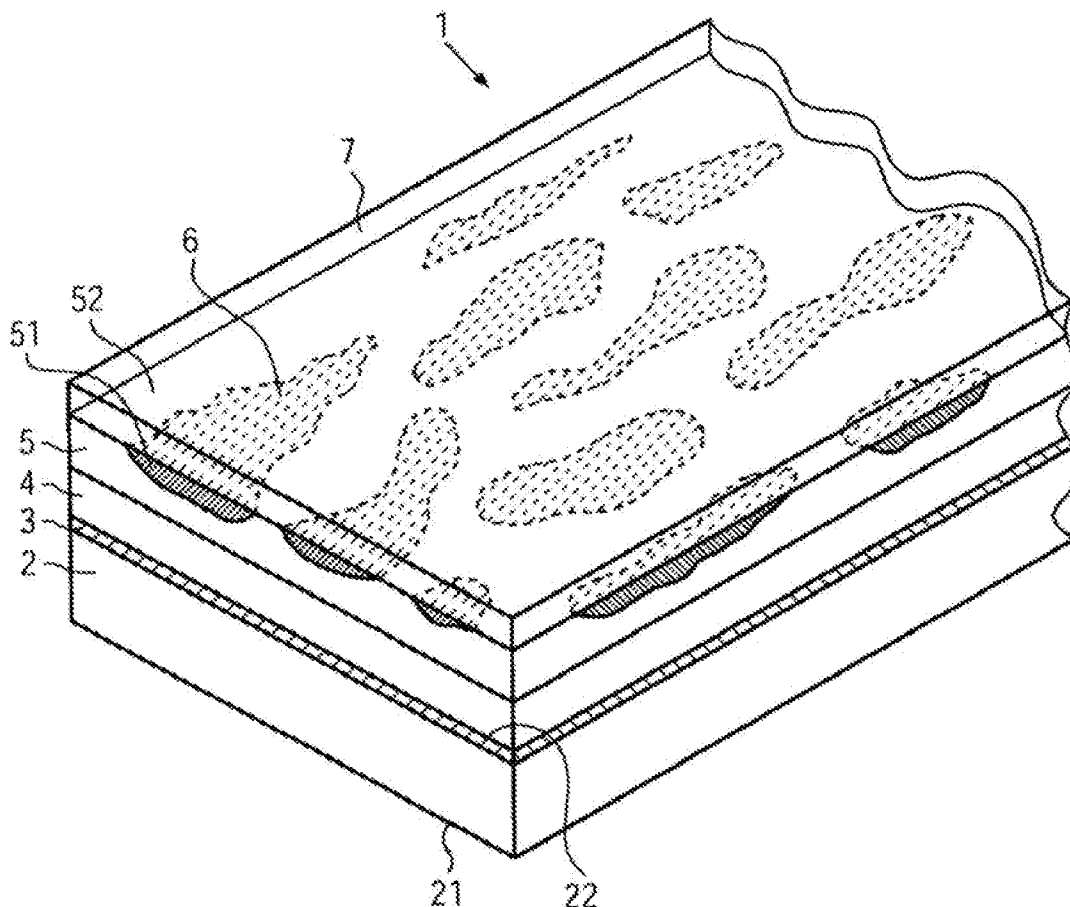

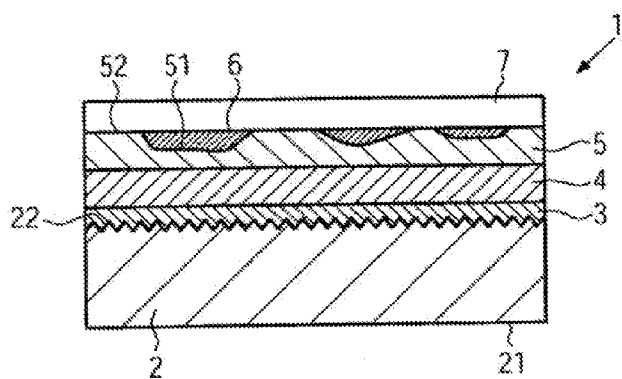


FIG. 1

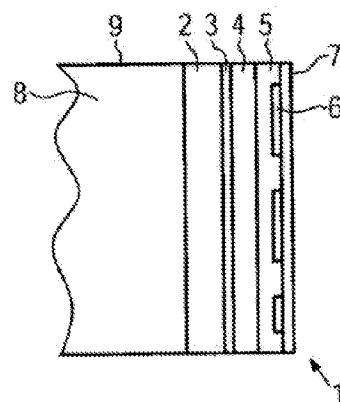


FIG. 3

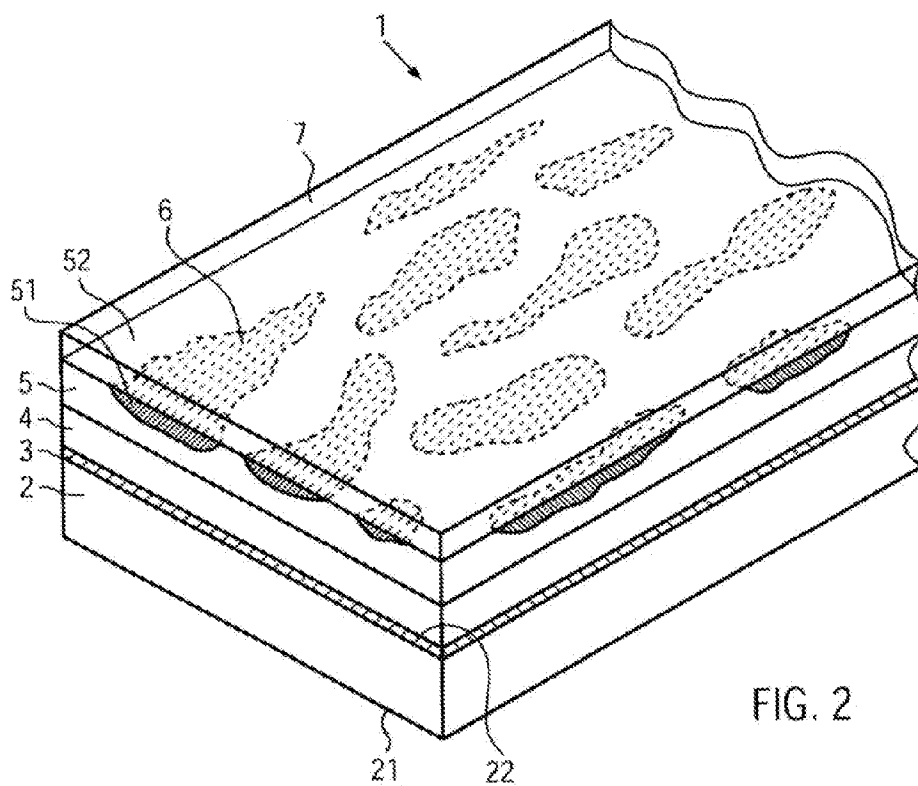


FIG. 2

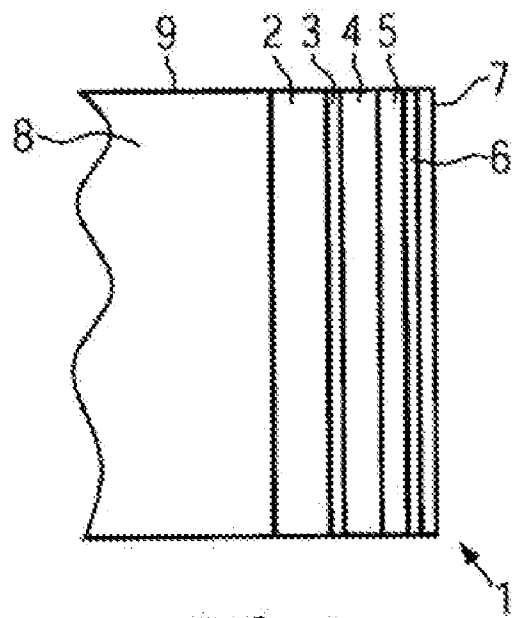


FIG. 4

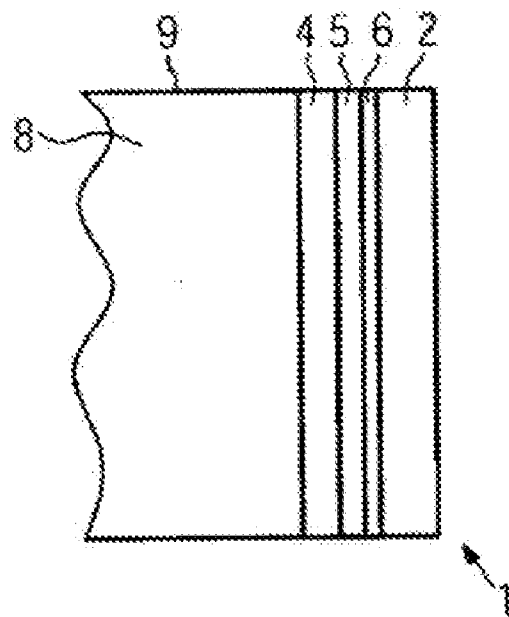


FIG. 5

METHOD FOR PRODUCING A DECORATED PROFILE BODY

[0001] The present invention relates to a method for producing a decorated profile body, comprising the steps: providing a substrate; applying a decoration background; and applying by means of the digital printing process a decoration finish which covers the decoration background at least in some sections, wherein the decoration background and the decoration finish together form a decoration of the profile body.

[0002] In the furniture industry, conventional printing processes, such as e.g. the gravure printing process, are used for decorating table tops and kitchen worktops. The characteristic appearance of this decoration (hereinafter: reference decoration) changes color when the type of light changes. The color impression of the decoration of a profile body (e.g. edgeband) attached to the panel must change in the same way as the reference decoration, since otherwise the so-called metamerism effect occurs. The term "metamerism" is defined in DIN 6172 and denotes an effect according to which two samples which look the same under one type of light exhibit a color difference under another type of light.

[0003] The decoration templates or template panels from the furniture industry exhibit a wide palette of color pigments and are usually printed using water-based inks, wherein a colored absorbent paper is used as the decoration carrier or substrate. The choice of pigment for these printing inks is limited not at all by the method. On the other hand, because of the method, the inkjet printing process allows only a limited choice of color pigments. However, in order to print the reference decoration also onto other substrates, in particular polymeric substrates, such as wall connection profiles and edgebands, the use of identical pigment types and sizes is primarily the basic prerequisite for a printed structure that exhibits no metamerism.

[0004] When printing substrates by means of the digital inkjet printing technique using the "drop on demand" and "continuous inkjet" methods, the color systems used are usually developed for the respective printing head and are specially adapted to the material to be printed. The color composition usually takes place according to the CMYK principle, i.e. by combining the colors cyan, magenta and yellow and black (Key). In the case of digital printing with a color composition according to the CMYK principle, therefore, only a limited color choice is available compared to conventional printing processes, such as e.g. the gravure printing process, and this color choice is not sufficient to avoid the metamerism effect.

[0005] The object of the invention is therefore to provide a decorated profile body and a method for the production thereof, according to which the entire color space of conventional printing processes, such as e.g. the gravure printing process, can be recorded also in the case of digital printing of the profile body, and thus a metamerism effect can be at least largely prevented.

[0006] In order to achieve this object, the present invention provides the method for producing a decorated profile body according to claim 1, comprising the steps: providing a substrate; applying a decoration background; and applying by means of the digital printing process a decoration finish which covers the decoration background at least in some sections; wherein the decoration background and the decora-

tion finish together form a decoration of the profile body; wherein the decoration background has a color composition consisting of an expanded color space compared to the decoration finish, wherein the color composition of the decoration background is selected in such a way that essentially no metamerism effect occurs between the decoration of the profile body and a reference decoration which is similar, preferably identical, thereto. Digital printing processes means digitally controlled printing processes, such as e.g. inkjet printing processes, toner processes (e.g. using a laser), electrophotography, ionography, magnetography, thermography or the like. The invention builds essentially on the fact that the decoration background and the decoration finish together form the visible decoration of the profile body. The decoration finish is applied e.g. according to the CYMK principle using the inkjet printing process and has the limited color space.

[0007] The decoration background expands the limited CYMK color space by a targeted choice of colorant so that, even when the profile body is printed digitally with a color composition according to the CMYK principle, the entire color space of conventional printing processes, such as e.g. the gravure printing process, can be recorded and displayed, and thus a metamerism effect can be substantially prevented. As a result, it is possible to simulate any reference decorations also by means of a digital printing process, without any significant metamerism effect occurring.

[0008] It is also within the scope of the invention in particular that the decoration finish is applied to the substrate before the decoration background. This allows the method according to the invention to be used also on clear, i.e. transparent or translucent, substrates which are printed on the rear side, as described e.g. in DE 1 964 911 U.

[0009] Preferred embodiments of the present invention are claimed in the dependent claims.

[0010] It may prove advantageous if the decoration background comprises two differently colored base layers. These differently colored base layers will be referred to below as the universal base layer and the individual base layer.

[0011] The so-called universal base layer is applied to the substrate in order to even out any irregularities (e.g. color nuances, etc.) of the substrate which are brought about by the manufacturing process or to neutralize the substrate from the color point of view, so that the decoration can be reproduced with high precision and color accuracy. In this state, the substrate is kept in stock for further processing.

[0012] The so-called individual base layer is preferably applied only once the specific intended use is known, and may already contain a basic shade of the decoration that is to be achieved. In addition, the individual base layer may already be colored in a shade corresponding to the basic shade of the reference decoration, wherein the decoration of the profile body is preferably matched to the reference decoration.

[0013] The individual base layer preferably contains an individually mixed special color, wherein the color composition of the individual base layer is selected from an expanded color space compared to the decoration finish. The decoration finish has e.g. a color composition selected from the CYMK color space.

[0014] By virtue of this combination of individual base and decoration finish, the color space of the decoration of the profile body can be expanded beyond the given color space of the pure scale colors. The fine-tuning of the shades of the individual base layer and of the decoration finish may take place by means of suitable software. The individual base layer

may be, but does not have to be, part of the visible decoration of the profile body. However, a part that is not openly visible nevertheless has a considerable influence on the appearance and the color effect of the decoration of the profile body, since the decoration finish usually does not provide complete coverage, due to non-covering pigments. By virtue of targeted pigment selection and mixing of color, this effect can be used to control the individual base layer in such a way that the change in color of the decoration of the profile body when the light changes takes place in the same way as the reference decoration, and thus metamerism effects can be avoided.

[0015] It may prove useful if a translucent or transparent substance is applied at least in some sections as the decoration finish, e.g. by using non-covering pigments. As a result, results which are particularly pleasing from the optical and esthetic point of view can be achieved. Moreover, the design scope is considerably expanded as a result, since the layers of the profile body which are located below the decoration finish can also be included in the visible decoration and can thus contribute to the optical and esthetic overall impression of the profile body.

[0016] It may be advantageous if the decoration finish is radiation-cured. The drying time of the decoration finish can be considerably shortened as a result.

[0017] It may prove practical if the substrate is made from a polymeric material, in particular plastic. With such substrates, the principle of the invention can be implemented with particular advantage. The application of colored decorations to such substrates is usually more challenging than to paper-containing substrates for example. Due to the decoration background, the adhesion of colored decorations to polymeric substrates is considerably improved and the color choice for the image on the decorated profile body is considerably expanded.

[0018] It may likewise prove advantageous if the substrate is an extruded profile, preferably an edgebanding profile, a wall connection profile, a window profile or a roller shutter profile, or else alternatively a film, e.g. a calendered film.

[0019] Such substrates or profile bodies are often used in conjunction with other decorated objects, such as e.g. kitchen worktops, table tops, cabinets, etc., where a high-quality optical and esthetic appearance of the product depends on the most accurate possible matching of the decorations, specifically against the background of the metamerism effects which occur when the light changes.

[0020] By virtue of the method according to the invention, a decorated profile body can be provided which satisfies, specifically against this background, the strictest optical and esthetic requirements. Due to the multilayer structure of the decoration background in conjunction with the decoration finish to be applied to the decoration background, color and decoration nuances can be displayed in much greater detail than was previously the case with conventional decorated profile bodies, and the decoration of the profile body can thus be better matched to a reference decoration.

[0021] It may also prove advantageous if at least one base layer is single-colored. This concerns in particular the universal base layer, which is applied in order to even out any irregularities of the substrate which are brought about by the manufacturing process and to provide an absolutely neutral base product for the subsequent image. This measure facilitates the processes of color mixing and coloring and makes it possible to reproduce the neutral base product with high precision.

[0022] It may prove useful if at least one base layer is colored in a dark shade. By coloring the decoration background, in particular the universal base layer, in a dark shade, there is a reduction in the coloring effort and in the amount of ink to be applied for the individual base layer and the decoration finish if the intention is to produce an image with a rather dark shade. An intermediate product with the decoration background, in particular the universal base layer, being colored in a dark shade is therefore provided for creating the image with a rather dark shade.

[0023] It may also prove useful if at least one base layer is colored in a light shade, preferably white. By coloring the decoration background, in particular the universal base layer, in a light shade, there is a reduction in the coloring effort and in the amount of ink to be applied for the individual base layer and the decoration finish if the intention is to produce an image with a rather light shade.

[0024] An intermediate product with the decoration background, in particular the universal base layer, being colored in a light shade is therefore provided for creating the image with a rather light shade.

[0025] It may be helpful if at least one base layer, preferably the base layer directly adjacent to the decoration finish, is colored in a shade corresponding to the basic shade of the decoration finish.

[0026] By coloring the decoration background, in particular the individual base layer, in a shade corresponding to the basic shade of the decoration finish, there is a reduction in the amount of ink to be applied for the decoration finish. Furthermore, color and decoration nuances can be displayed in a particularly detailed manner as a result and can be matched to the reference decoration.

[0027] It may also be helpful if at least one base layer is applied by means of the digital printing process, e.g. the inkjet printing process. As a result, the costs of carrying out the method according to the invention are considerably reduced.

[0028] It may also be practical if at least one base layer contains a solvent-based ink, a radiation-curable ink, preferably a UV-curable ink, and/or a water-based ink. Such inks can be used with particular advantage in the method according to the invention.

[0029] It may moreover be advantageous if at least one base layer is applied over the entire surface and/or in a covering manner. As a result, the construction of the profile body according to the invention is simplified. A color choice for a layer of the profile body arranged below the covering base layer need not be made on the basis of optical and esthetic aspects.

[0030] However, it may also be advantageous if at least one base layer is applied with an uneven thickness. As a result, spatial decorations can be displayed, which considerably increases the design scope compared to conventional profile bodies. In this case, use may be made in particular of the fact that the profile body according to the invention has two base layers. The thickness of the base layers is preferably in each case between 1 and 500 μm .

[0031] It may prove helpful if at least one base layer is applied in such a way as to form at least one depression and at least one raised area. As a result, three-dimensional decorations with a particularly spatial effect can be displayed, which further broadens the design scope compared to conventional profile bodies.

[0032] It may prove advantageous if the decoration finish is applied essentially in the region of at least one depression of

a base layer. There, the substrate applied as the decoration finish exhibits particularly good adhesion, and particularly pleasing images having a depth effect can be displayed.

[0033] It may prove practical if the decoration finish is applied in such a way as to substantially fill the depression. This considerably facilitates the application of the decoration finish and prevents any smudging, smearing or running of the substance applied as the decoration finish.

[0034] It may prove helpful if the thickness of the decoration finish is the complement of the thickness of the decoration background, so that the decoration background and the decoration finish are applied with a constant overall thickness. As a result, despite the depth effect of the image, a decorated profile body which has a smooth surface can be produced.

[0035] It may prove advantageous if a clearcoat layer which covers the decoration finish at least in some sections is applied. As a result, the image is sealed and is protected against soiling and physical impairment.

[0036] However, it may also prove advantageous if a transparent or translucent substrate is provided and the decoration finish is applied to the rear of the substrate before the decoration background. As a result, the profile strip can be attached by its rear to an object, with the decoration of the profile body still being visible through the transparent or translucent substrate. The decoration is not impaired during subsequent machining of the front visible edges of a profile body designed as an edgeband. Located behind the substrate, the decoration is also protected against any other mechanical effects. In particular, however, moving the decoration of the profile body to the rear side of the substrate makes it possible to achieve a spatial "3D" effect which optically and esthetically enhances the appearance of the profile body compared to decoration on the front side and considerably expands the freedom of design.

[0037] One preferred embodiment of the invention relates to an object comprising at least one decorated surface and a decorated profile body produced by the method according to one of the preceding embodiments, wherein the object comprises the reference decoration to which the decoration of the profile body is matched in such a way that essentially no metamerism effect occurs. To this end, preferably at least one base layer of the profile body is colored in a shade corresponding to the basic shade of the decorated surface. The object may be for example an, in particular, panel-shaped item of furniture, to the edge(s) of which the profile body is bonded, e.g. by means of an adhesion promoter.

[0038] The object according to the invention is of particularly high quality from the optical and esthetic point of view, since color differences and metamerism effects between the reference decoration and the decoration of the profile body are ruled out because the reference decoration and the decoration of the profile body change in similar color shades even when the light changes.

[0039] Another preferred embodiment of the invention relates to a decorated profile body, comprising: a substrate; a decoration background which covers the substrate at least in some sections; a decoration finish which covers the decoration background at least in some sections, wherein the decoration background and the decoration finish together form a decoration of the profile body, wherein the decoration background comprises two differently colored base layers. The two differently colored base layers, which are referred to as the universal base layer and the individual base layer, allow a

particularly precise color composition of the decoration of the profile strip. The profile body according to the invention is preferably produced by the method according to the invention and can accordingly have all the features of the profile body produced by the method according to the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0040] FIG. 1 shows a sectional view of the decorated profile body produced according to the invention, on a scale which has been distorted for the purpose of improved clarity.

[0041] FIG. 2 shows a perspective view of the decorated profile body produced according to the invention, on a scale which has been distorted for the purpose of improved clarity.

[0042] FIG. 3 shows the decorated profile body of FIGS. 1 and 2 produced according to the invention, in a state mounted on an object having a decorated surface.

[0043] FIG. 4 shows a decorated profile body produced according to the invention with a decoration background applied over the entire surface and a decoration finish applied over the entire surface, in a state mounted on an object having a decorated surface.

[0044] FIG. 5 shows a decorated profile body produced according to the invention with a decoration background applied over the entire surface and a decoration finish applied over the entire surface, in a state mounted on an object having a decorated surface, wherein the substrate is transparent and the decoration background and the decoration finish are arranged on the substrate underside.

DETAILED DESCRIPTION OF THE PREFERRED EXAMPLES OF EMBODIMENTS

[0045] The invention relates to a method for producing a decorated profile body 1, comprising the steps of: a) providing a substrate 2; b) applying a decoration background 4, 5; and c) applying by means of the digital printing process a decoration finish 6 which covers the decoration background 4, 5 at least in some sections, wherein the decoration background 4, 5 and the decoration finish 6 together form a decoration of the profile body 1. The decoration background 4, 5 has a color composition consisting of an expanded color space compared to the decoration finish 6, wherein the color composition of the decoration background 4, 5 is selected in such a way that essentially no metamerism effect occurs between the decoration of the profile body 1 and a reference decoration which is similar, preferably identical, thereto. The reference decoration is preferably the decoration of a decorated surface 9 of an object 8.

[0046] The decoration background 4, 5 contains two differently colored base layers 4, 5, which are referred to as the universal base layer 4 and the individual base layer 5. However, it is also within the scope of the invention that the decoration background consists only of the individual base layer 5.

[0047] The decorated profile body 1 produced according to the invention will be explained below with reference to the appended drawings:

[0048] FIG. 1 shows a sectional view of the decorated profile body 1 produced according to the invention, on a scale which has been distorted for the purpose of improved clarity.

[0049] The decorated profile body 1 comprises a substrate 2 with an underside 21 and an upper side 22, optionally a primer layer 3 to improve the adhesion of subsequent layers to the substrate 2, a universal base layer 4, an individual base

layer 5 with depressions 51 and raised areas 52, a decoration finish 6 which preferably fills the depressions 51 of the individual base layer 5, and a clearcoat layer 7 applied over the entire surface. In FIGS. 1 to 3, the decorated profile body 1 is an edgeband. The decorated profile body 1 is attached by the underside 21 to an object 8, e.g. a kitchen worktop or a table top. In order to improve the optical appearance of the decorated profile body 1, the thickness of the individual base layer 5 behaves inversely to the thickness of the decoration finish 6, so that the overall thickness (sum of the thicknesses) of the individual base layer 5 and of the decoration finish 6 in each case remains constant. The primer layer 3 and the universal base layer 4 may also be combined as one layer which covers both functions of the layers 3 and 4.

[0050] FIG. 2 shows a perspective view of the decorated profile body 1 produced according to the invention, on a scale which has been distorted for the purpose of better clarity. On the upper side of the profile body 1, the decoration of the profile body 1 is visible through the clearcoat layer 7. The decoration of the profile body 1 is e.g. a wood grain or marbling effect, but should not be considered limited thereto. As the clearcoat layer 7, a transparent or translucent lacquer is applied, which is preferably curable under the effect of UV radiation. If the clearcoat is colored, the clearcoat layer 7 can form part of the visible decoration of the profile body 1.

[0051] FIG. 3 shows the decorated profile body 1 of FIG. 1 produced according to the invention, in a state mounted on an object 8 having a decorated surface 9. The decorated surface 9 of the object 8 has a reference decoration. The decoration of the profile body 1 is matched to the reference decoration or is similar or identical to the reference decoration or has at least a similar or identical pattern. The individual base layer 5 is colored in a shade corresponding to the basic shade of the decorated surface 9 and matched to the decoration finish 6. The color matching of the individual base layer 5, the decoration finish 6 and the decorated surface 9 takes place by means of a software program, so that no metamerism effect or only a slight metamerism effect occurs between the decoration of the profile body 1 and the reference decoration.

[0052] FIG. 4 shows a decorated profile body 1 produced according to the invention with a decoration background 4, 5 applied over the entire surface and a decoration finish 6 applied over the entire surface, in a state mounted on the object 8 having a decorated surface 9 shown in FIG. 3. The layer structure of the profile body 1 shown in FIG. 4 corresponds essentially to the layer structure of the profile body 1 shown in FIG. 3, with the exception that the decoration background 4, 5 and the decoration finish 6 are applied over the entire surface.

[0053] FIG. 5 shows a decorated profile body 1 produced according to the invention with a decoration background 4, 5 applied over the entire surface and a decoration finish 6 applied over the entire surface, in a state mounted on the object 8 having a decorated surface 9 shown in FIG. 3, wherein the substrate 2 is transparent and the decoration background 4, 5 and the decoration finish 6 are applied to the rear side of the substrate 2. The decoration of the profile body 1 is matched to the reference decoration of the decorated surface 9 of the object 8.

[0054] The profile bodies 1 shown in FIGS. 1 to 5 can be attached to the object 8, e.g. a furniture panel, in a known manner by means of an adhesion promoter (not shown in detail). While in the embodiments shown in FIGS. 1 to 4, the adhesion promoter is arranged between the object 8 and the

substrate 2, in the example shown in FIG. 5, it is located between the decoration background 4 and the object 8. In this case, it may be advantageous to color the adhesion promoter in order e.g. to increase the color coverage of the overall structure.

[0055] The individual base layer 5 is colored in a shade corresponding to the main shade of the decorated surface 9 and matched to the decoration finish 6. The color matching of the individual base layer 5, the decoration finish 6 and the decorated surface 9 is performed by means of a software program, so that no metamerism effect or only a slight metamerism effect occurs between the decoration of the profile body 1 and the reference decoration.

[0056] As a result, the invention is characterized in that metamerism effects in digital printing can be avoided by means of the described method. One particular characteristic is that, if the decoration finish 6 contains translucent inks, the individual base layer has an influence on the appearance of the finished decorated profile body 1 even at the location where the decoration finish 6 is applied. The necessary “infinite number” of shades (special color space) for the individual base layer 5 can be achieved either by conventional printing or else by digital printing, e.g. by means of an inkjet process.

[0057] The steps of the method according to the invention will be explained in detail below:

Step a): Using an extrusion die, an extruded profile body is provided which is referred to as the substrate 2 in the context of the invention. Alternatively, a calendered profile body, e.g. a film, may also be used. The substrate 2 is preferably provided as an edgebanding profile, wall connection profile, window profile, roller shutter profile, film, e.g. in calendered form, or the like. The term or word stem “provide” is to be understood in this connection to mean that the substrate 2 is either produced immediately prior to further processing or is supplied already in a pre-manufactured state to the subsequent further processing steps. The substrate 2 is made from a polymeric material, in particular plastic, preferably polypropylene (PP), polyvinyl chloride (PVC), acrylonitrile butadiene styrene (ABS), polymethyl methacrylate (PMMA) or polyethylene terephthalate (PET). To this end, the material which exists in granular form is melted in the extrusion device and is transformed by the extrusion device into a particular cross-sectional shape, wherein the desired cross-sectional shape of the substrate 2 is calibrated in a downstream calibrating device and fixed.

[0058] In a subsequent step, the substrate upper side 22 located opposite the substrate underside 21 is subjected to a preferably—in particular in the case of polyolefin materials—physical treatment, for example by means of corona treatment, in order to increase the surface energy and to roughen the surface 22 so as to improve the adhesion of subsequent layers.

[0059] Optionally, in particular in the case of substrates 2 made from the material polypropylene, a primer layer 3 is applied to the preferably pre-treated surface 22 in order to further improve the adhesion of subsequent layers.

Step b): In a universal base layer application device, a universal base layer 4 is then applied. The universal base layer 4 is a neutral color layer to even out irregularities brought about by the manufacturing process, such as e.g. color nuances or unevennesses, etc. of the substrate 2, and is applied to the substrate 2 or to the primer layer 3 over the entire surface. The application takes place conventionally by means of printing rollers or in the digital printing process, preferably via a

special inkjet printing device. The ink systems used for the universal base layer **4** are solvent-based inks, UV-curing inks and water-based inks.

[0060] The universal base layer **4** is opaque, i.e. it covers preferably the entire surface of the layer located therebelow (the substrate **2** or the primer layer **3**). The universal base layer **4** is colored in a light or dark shade in order to be able to carry out a basic sorting for further processing. A substrate **2** with a universal base layer **4** in a light shade (e.g. white) is provided for creating an image with a light basic shade, and a substrate **2** with a universal base layer **4** in a dark shade is provided for creating an image with a dark basic shade. This precursor product manufactured in this way is then kept in stock and held ready for final processing. During final processing, the individual base layer **5** is applied to the universal base layer **4**. The universal base layer **4** is selected in such a way that as little additional coloring as possible by the individual base layer **5** is required. In general, it is possible for example in extreme cases to work only with a few universal base layer colors. The individual base layer **5** is opaque, i.e. it covers preferably the entire surface of the universal base layer **4** located therebelow and is colored in a shade which corresponds to the basic shade of a decoration template such as a decorated surface **9** of an object **8** (e.g. table top or kitchen worktop; FIG. **3**) and the basic shade of the decoration finish **6**.

[0061] The individual base layer **5** may be applied conventionally by means of printing rollers or likewise in the digital printing process, e.g. via a special inkjet printing device with an expanded color space (special color space). The possible ink systems which can be used for the individual base layer **5** are selected from solvent-based inks, UV-curing inks and water-based inks.

Step c): In a subsequent step, the decoration finish **6** is applied by an inkjet printing device in the inkjet printing process (inkjet process). The decoration finish **6** has a color composition consisting of the CMYK color space, i.e. a combination of the colors cyan, magenta and yellow and black (Key). The decoration finish **6** is usually applied as a glaze and does not cover the entire surface, and is therefore applied as a transparent or translucent substance.

[0062] Targeted pigment selection and mixing of the color of the individual base layer **5** helps the decoration of the profile body **1** to change color in the same way as the reference decoration when the light changes, so that essentially no metamerism effect occurs.

[0063] An individual base layer **5** over the entire surface moreover has the advantage that the printed dot formation and the adhesion of the decoration finish **6** are considerably improved. The decoration finish **6** is preferably applied to the individual base layer **5** only in some sections, preferably only in the regions of the depressions **51** in order to fill these depressions **51**. In this case, the thickness of the decoration finish **6** behaves inversely to the thickness of the individual base layer **5**, so that the overall thickness (sum of the thicknesses) of the individual base layer **5** and of the decoration finish **6** in each case remains constant. The substance applied as the decoration finish **6** is preferably radiation-curable, preferably UV-curable, and is cured as a result of exposure to a radiation source. Optionally, a clearcoat layer **7** is additionally applied in order to seal and protect the decoration of the profile body **1**.

[0064] By virtue of the individually mixed special color of the individual base layer **5** in combination with the color of

the decoration finish **6** selected from the CMYK color space, the color space of the decoration of the profile body **1** (consisting of the decoration background **4**, **5** or universal base layer **4** and individual base layer **5** and the decoration finish **6**) can be expanded by the given color space of the pure scale colors. The individual base layer **5** is integrated in the image or color composition of the decoration of the profile body **1** and is taken into account when defining the color.

[0065] The principle of the invention can be applied to any substrate **2** and is suitable in particular for polymeric substrates **2** such as extruded plastic profiles, in particular edge-banding profiles, wall connection profiles, window profiles and roller shutter profiles, but also for example films, e.g. calendered films, in particular films having a layer thickness 0.05 mm, preferably a layer thickness of 0.2 to 0.4 mm.

LIST OF REFERENCES

[0066]	1 profile body
[0067]	2 substrate
[0068]	3 primer layer
[0069]	4 universal base layer
[0070]	5 individual base layer
[0071]	6 decoration finish
[0072]	7 clearcoat layer
[0073]	8 object
[0074]	9 decorated surface
[0075]	21 substrate underside
[0076]	22 substrate upper side
[0077]	51 depressions
[0078]	52 raised areas

1. A method for producing a decorated profile body (**1**), comprising the steps of: providing a substrate (**2**); applying a decoration background (**4**, **5**); and applying by means of the digital printing process a decoration finish (**6**) which covers the decoration background (**4**, **5**) at least in some sections, wherein the decoration background (**4**, **5**) and the decoration finish (**6**) together form a decoration of the profile body (**1**), wherein the decoration background (**4**, **5**) has a color composition consisting of an expanded color space compared to the decoration finish (**6**), wherein the color composition of the decoration background (**4**, **5**) is selected in such a way that essentially no metamerism effect occurs between the decoration of the profile body (**1**) and a reference decoration which is similar, preferably identical, thereto.

2. The method according to claim **1**, wherein the decoration background (**4**, **5**) contains differently colored base layers (**4**, **5**).

3. The method according to claim **1**, wherein a translucent or transparent substance is applied at least in some sections as the decoration finish (**6**).

4. The method according to claim **1**, wherein the decoration finish (**6**) is radiation-cured.

5. The method according to claim **1**, wherein the decoration finish (**6**) has a color composition selected from the CMYK color space.

6. The method according to an claim **1**, wherein the substrate (**2**) is made from a polymeric material.

7. The method according to claim **1**, wherein the substrate (**2**) is an extruded or calendered profile, preferably an edge-banding profile, a wall connection profile, a window profile or a roller shutter profile, or a film.

8. The method according to claim **1**, wherein at least one base layer (**4**, **5**) is single-colored.

9. The method according to claim 1, wherein at least one base layer (4, 5) is colored in a dark shade.

10. The method according to claim 1, wherein at least one base layer (4, 5) is colored in a light shade, preferably white.

11. The method according to claim 1, wherein at least one base layer (4, 5), preferably the base layer (5) directly adjacent to the decoration finish (6), is colored in a shade corresponding to the basic shade of the reference decoration.

12. The method according to claim 1, wherein at least one base layer (4, 5) is applied by means of the digital printing process, preferably by means of inkjet printing process.

13. The method according to claim 1, wherein at least one base layer (4, 5) contains a solvent-based ink, a radiation-curable ink, preferably a UV-curable ink, and/or a water-based ink.

14. The method according to claim 1, wherein at least one base layer (4, 5) is applied over the entire surface and/or in a covering manner.

15. (canceled)

16. The method according to claim 1, wherein at least one base layer (4, 5) is applied in such a way that at least one depression (51) and at least one raised area (52) is formed.

17. The method according to claim 1, wherein the decoration finish (6) is applied essentially in the region of at least one depression (51) of a base layer (5).

18. The method according to claim 1, wherein the decoration finish (6) is applied in such a way as to substantially fill the depression (51).

19. The method according to claim 1, wherein the thickness of the decoration finish (6) behaves inversely to the thickness of the decoration background (4, 5), so that the decoration background (4, 5) and the decoration finish (6) are applied with a constant overall thickness.

20. (canceled)

21. (canceled)

22. An object (8) comprising a profile body (1) which is produced by the method according to claim 1, wherein the object (8) has the reference decoration.

23. The object according to claim 22, wherein at least one base layer (5) of the profile body (1) is colored in a shade corresponding to the basic shade of the reference decoration.

24. (canceled)

* * * * *