



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : D05B 51/00	A1	(11) International Publication Number: WO 93/06291 (43) International Publication Date: 1 April 1993 (01.04.93)
---	-----------	---

(21) International Application Number: PCT/US92/07684

(22) International Filing Date: 11 September 1992 (11.09.92)

(30) Priority data:
759,410 13 September 1991 (13.09.91) US

(71) Applicant: THE CHARLES STARK DRAPER LABORATORY, INC. [US/US]; 555 Technology Square, Cambridge, MA 02139 (US).

(72) Inventor: BELLIO, Stephen, L. ; 174 Glenellen Road, West Roxbury, MA 02132 (US).

(74) Agents: LAPPIN, Mark, G. et al.; Lahive & Cockfield, 60 State Street, Boston, MA 02109 (US).

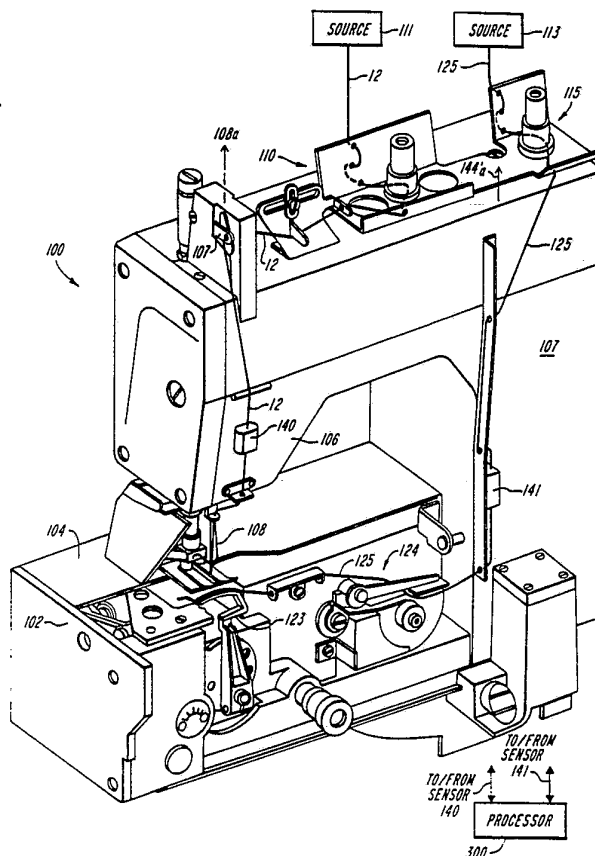
(81) Designated States: AU, CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE).

Published*With international search report.
With amended claims.*

(54) Title: METHOD AND APPARATUS FOR DETECTING SKIPPED STITCHES FOR A CHAINSTITCH SEWING MACHINE

(57) Abstract

Apparatus and method for detecting skipped stitches for chainstitch sewing machines (100) having a looper assembly (124) using a needle thread movement sensor (140) and/or a looper thread movement sensor (141) in combination with a shaft rotation sensor (130). Needle thread movement is correlated with needle shaft rotation per stitch cycle to detect instances when there is no needle thread movement during a stitch cycle (C). Similarly, looper thread movement may be correlated with needle shaft rotation per stitch cycle to detect instances when there is no looper thread movement during a stitch cycle (A). The invention includes methods for detecting needle loop (1B) and triangle skips (1C) by detecting instances of substantially no needle thread or looper thread movement during certain respective portions of the stitch cycle.



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MN	Mongolia
AU	Australia	FR	France	MR	Mauritania
BB	Barbados	GA	Gabon	MW	Malawi
BE	Belgium	GB	United Kingdom	NL	Netherlands
BF	Burkina Faso	GN	Guinea	NO	Norway
BG	Bulgaria	GR	Greece	NZ	New Zealand
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	PT	Portugal
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	RU	Russian Federation
CG	Congo	KP	Democratic People's Republic of Korea	SD	Sudan
CH	Switzerland	KR	Republic of Korea	SE	Sweden
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovak Republic
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CS	Czechoslovakia	LU	Luxembourg	SU	Soviet Union
CZ	Czech Republic	MC	Monaco	TD	Chad
DE	Germany	MG	Madagascar	TG	Togo
DK	Denmark	MI	Mali	UA	Ukraine
ES	Spain			US	United States of America

METHOD AND APPARATUS FOR DETECTING SKIPPED STITCHES
FOR A CHAINSTITCH SEWING MACHINE

5 Background of the Disclosure

This invention relates to an apparatus for
monitoring the stitching quality of sewing machines
and, in particular, to detecting skipped stitches for
10 chainstitch sewing machines.

With the clothing industry becoming
increasingly automated, there is a need for systems
that monitor and regulate the functions and output of
15 high speed sewing equipment. Certain of these
systems are utilized to monitor the stitching of
sewing machines to detect skipped stitches in apparel
manufactured by automated sewing machines.

20 In general, improper stitches may from
time to time be introduced in a workpiece
manufactured with the use of an automated sewing

-2-

machine. Generally, improper stitches may have the form of malformed stitches or skipped stitches. The incorporated reference U.S. Patent Application Serial No. 557,852 describes malformed stitches and skipped
5 stitches that arise in connection with lockstitch (class 301) sewing machines.

In the prior art, particularly for lockstitch sewing machines, skipped stitch detection
10 systems are based upon monitoring the tension of the needle thread. As an example of this system, in U.S. Patent No. 4,102,283 (Rockerath et al.) the loss of thread tension generally is said to correspond to a skipped stitch, and this reduction in normal thread
15 tension triggers a sensing device. The sensitivity of these systems ranges from complete loss of thread tension, for example due to the thread breaking, to sensing a momentary reduction in normal thread tension. This system would be unable to effectively
20 detect a triangle skip stitch in a chain stitch operation.

Other systems are based upon monitoring thread consumption, and may correlate thread
25 consumption with total number of stitches to detect a skipped stitch. As an example of this system, in U.S. Patent No. 3,843,883 (DeVita et al.) a monitor is used to measure thread consumption which is then compared to a predetermined standard of thread use,
30 deviation from which activates an output signal.

A system used for detecting skipped stitches in a lockstitch type 301 sewing machine is disclosed in UK Patent Application No. GB 2008631. That system

involves monitoring the length of a seam as compared with the upper thread consumption required to produce the seam. Actual thread consumption is then compared against a predetermined consumption value, any
5 difference of which corresponds to an improperly formed seam.

However, the difference in upper thread consumption between correct stitches and skipped
10 stitches is not always substantial enough to be a reliable indicator in fast-rate sewing machines. This is best demonstrated when two pieces of thin fabric are being sewn together. Generally, measurements of the difference in thread consumption
15 per stitch includes the thickness of two plies of fabric (assuming the stitch is set at center). For example, letting stitch length (SL) = 0.125 inches, and ply thickness (PT) = 0.01 inches, then the percentage decrease for a skipped stitch would be:
20 $100 * [(2 * PT)/SL] = 100 * [(2*0.01)/0.125] = 16\%$. If thread tensions are not adjusted properly, this percent decrease could go to zero.

A primary shortcoming of the prior art is
25 the unreliability of these systems at high sewing speeds, for example greater than 5,500 stitches per minute. DeVita states that the apparatus disclosed therein makes "mechanically possible the very high running speeds of about 2,000 stitches per minute
30 desirable for such [lockstitch] sewing machines" (emphasis added). These systems fail to detect a momentary reduction of thread tension when the sewing machine is operating at high sewing speeds. The reduction in tension for an improper stitch at high

sewing speeds tends to be less and in a range that the prior art fails to detect. As a result, these systems tend to be less reliable and thus fail to perform these functions with great accuracy.

5

The Class 400 chainstitch is employed in a wide range of areas within the apparel industry because it provides a fast, economical, resilient, and strong stitch chain. The Class 400 stitch tends
10 to be very elastic and is well suited for seaming operations, for example, inseaming pants and closing synthetic bags, on wovens and knits of many types and weights of materials. However, in Class 400 chainstitch, malformed or skipped stitching tends to
15 weaken the entire stitch chain and when included in the final product, may cause the defective product to fail prematurely, for example from unraveling.

The Class 400 "multi-thread chainstitch" is
20 formed by a sewing machine passing one or more needle thread loops through the material. Those needle thread loops are interlooped on the underside with a looper thread supported on a looper. As an exemplary Class 400 chainstitch, stitch type 401 is formed with
25 two threads, the needle thread and the looper thread. An angularly reciprocal looper, located underneath the material, engages the needle loop projected by an axially reciprocal needle underneath the material. The looper retains the needle loop
30 when the needle is retracted and, in addition, draws the looper thread from the previous stitch through the needle loop. The needle then penetrates the material again between the looper thread and the previous needle loop. As a result, when the looper

retracts, the needle thread, which forms the needle loop, tightens and thus completes a stitch. A more detailed description of the chainstitch type 401 is provided in Union "Special Stitch Formation Type 401" 5 brochure, published by Union Special Huntley, Illinois (1979).

Malformed stitches can develop from improper synchronization between the active elements within 10 the sewing machine and the needle and looper thread loops. In particular, the malformed stitches are formed when the needle thread loop around the blade of the looper is improperly positioned and as a result the needle on its downward travel can enter 15 this loop, forming a "101-type" stitch.

Collectively, these malformed and skipped stitches are referred to as "improper stitches" hereinbelow. There are many causes of improper stitches.

20 In general, skipped stitches also result from improper synchronization of the needle thread loop and the looper thread loop and may also occur from deflection of the needle. There are primarily two types of skipped stitches: the "needle loop" 25 skip and "triangle" skip. The needle loop skip develops when the looper fails to enter the needle loop and as a result the upward motion pulls the loop to the top of the fabric. The triangle skip is formed not by the looper failing to enter the needle 30 loop, but when the needle fails to enter the looper loop. Consequently, since the needle loop was picked up by the looper, the needle thread remains in the material or is loose on the top side of the fabric.

U.S. Patent Application Serial No. 332,227 (CSL-195) filed on March 31, 1989, entitled "Method and Apparatus For Detecting Improper Stitches For A Chainstitch Sewing Machines," describes a method and
5 apparatus for detecting improper stitches in a chainstitch sewing machine based upon thread consumption over the stitch formation cycle.

However, there continues to exist a need for
10 better methods and systems for detecting skipped stitches for a chainstitch sewing machine that are reliable at high sewing speeds. To accommodate the advances in the clothing automation, particularly the increase in sewing speeds, it is an object of the
15 invention to provide a simple, reliable system for detecting skipped stitches that would satisfy a substantial need in the field.

SUMMARY OF THE INVENTION

Briefly, the invention is an apparatus for detecting improper stitch formation for a Class 400 chainstitch sewing machine. Generally, that type of machine has an axially reciprocal needle, a drive motor with an output shaft for driving the needle through at least one reciprocal motion per stitch, and a looper assembly including a reciprocable looper adapted for incorporating a looper thread into the chainstitches. The apparatus of the invention includes: a sensor for detecting drive shaft rotation for the sewing machine; a sensor for detecting looper thread movement and/or a sensor for detecting needle thread motion; and a signal processing system for determining if a proper stitch is formed based on the input from selected combinations of the sensors at certain temporal points during the stitch cycle.

One sensor of the disclosed invention includes a guide block and pressure arm which act in concert to maintain the detected thread in a fixed pathway across the detecting beam. The pressure arm is pivotally mounted to apply a constant pressure against the thread, while remaining somewhat resilient to thread movement.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects of this invention, the various features thereof, as well as 5 the invention itself, may be more fully understood from the following description, when read together with the accompanying drawings in which:

FIGURE 1A shows in diagrammatic form an 10 exemplary series of proper Class 400 chainstitches (type 401);

FIGURES 1B(i) and 1B(ii), show in diagrammatic form, the bottom and top, respectively, 15 of an exemplary chainstitch type 401 having a needle loop skip improper stitch;

FIGURES 1C(i) and 1C(ii), show in diagrammatic form, the bottom and top, respectively, 20 of an exemplary chainstitch type 401 having a triangle skip (looper thread side) improper stitch;

FIGURES 1D(i) and 1D(ii), show in diagrammatic form, the bottom and top, respectively, 25 of an exemplary chainstitch type 401 having a triangle skip (needle loop side) improper stitch;

FIGURE 2 shows, partially in cutaway view, a chainstitch sewing machine embodying the inventive 30 apparatus;

FIGURE 3 shows (A) an output signal for a good stitch, generated by the sensor assembly of the looper thread movement sensor; (B) an output signal

generated by the signal processing system of the embodiment of FIGURE 2, indicating the time window (45 deg) during which the looper thread movement is monitored; (C) an output signal representative of
5 drive shaft rotation;

FIGURE 4 shows (A) an output signal for a good stitch, generated by the sensor assembly of the needle thread movement sensor; (B) an output signal
10 generated by the signal processing system of the embodiment of FIGURE 2, indicating the time window (37.5 deg) during which the needle thread movement is monitored; (C) an output signal representative of drive shaft rotation;

15

FIGURE 5 shows (A) an output signal for an improper stitch, generated by the sensor assembly of the looper thread movement sensor; (B) an output signal for a good stitch, generated by the sensor
20 assembly of the looper thread movement sensor; (C) an output signal for an improper stitch, generated by the sensor assembly of the needle thread movement sensor; (D) an output signal for a good stitch, generated by the sensor assembly of the needle thread
25 movement sensor.

FIGURE 6 shows a perspective view of the needle thread movement sensor apparatus of the sewing machine of FIGURE 2;

30

FIGURE 7 shows a perspective view of the looper thread movement sensor apparatus of the sewing machine of FIGURE 2;

FIGURE 8 shows in side elevation a view of a
alternative thread movement sensor; and

FIGURE 9 shows in section, the sensor of
5 FIGURE 8.

Like elements in each Figure have the same
number.

DESCRIPTION OF THE PREFERRED EMBODIMENT

A diagrammatic representation of Class 400 chainstitches type 401 is shown in FIGURE 1A. As
5 shown, a needle thread 12 generally runs along the top of an upper limp material segment 14a passing loops through the segments 14a and 14b at periodic intervals. A looper thread 125 generally runs along the bottom of segment 14b, cyclically passing from
10 one of the needle thread loops in each thread to the next and then returning to and passing around the first loop and continuing on to pass through the next needle thread loop of each thread. In the illustrated stitch configuration, the needle thread
15 loops are shown with exaggerated length for clarity. When the finished stitch is at proper tension, there are several times as much looper thread as needle thread (for each needle) on a per stitch basis. For the chainstitch type 401, the ratio of looper thread
20 to needle thread is approximately three.

The chainstitch type 401 is formed by passing the looper loop through the needle loop and then the needle loop through the looper loop or
25 triangle. There are two basic types of skip stitches than can occur: the "needle loop" skip and the "triangle" skip.

The needle loop skip (shown in FIGS. 1B, (i)
30 and (ii)), may be identified by the needle thread laying tightly on the top side of the fabric and the looper thread twisted around the needle loop of the next properly formed stitch. The looper missing the needle loop is the cause of the skip. The upward

-12-

motion of the needle, the needle thread controls, and feed motion pull the needle loop to the top of the fabric.

5 The triangle skip can occur on either the "looper thread side" (shown in FIGS. 1C, (i) of the triangle, or the "needle loop side" (shown in FIGS. 1D, (i)). Both triangle skips are usually identified by the needle thread loop remaining in the material
10 or lying loosely on the top of the fabric. However, the looper thread of a skip on the "looper thread side" is not twisted around the needle loop of the next properly formed stitch. The looper thread of a skip on the "needle loop side" will be twisted around
15 the needle loop. The needle missing the looper loop or triangle is the cause of this skip. Because the needle loop was picked up by the looper on the motion to the left, the needle thread remains in the material or is loose on the top side of the fabric.

20

 In the production of other Class 400 chainstitches, similar "improper stitches" may also be formed.

25 One characteristic of each of the needle skip and triangle skip improper stitches is that there is a significant decrease in needle and/or looper thread consumption, i.e. thread movement, during particular time periods (or windows) during
30 the stitch formation cycle, compared with the thread consumption during those time windows during formation of a proper stitch. Based upon this characteristic of such improper stitches, the present

invention provides a method and apparatus for monitoring the movement of needle and/or looper thread during appropriate time windows on a per stitch basis on a continuous basis, and identifying
5 times when this movement drops below a predetermined value indicative of the formation of needle and/or looper skip stitches. With the identification of such improper stitches, corrective action may subsequently be taken to ensure that high quality
10 assembled workpieces are being produced.

The following description of a preferred embodiment is directed to a system for detecting needle and/or looper skip improper stitches in a
15 chainstitch type 401, but similar devices and techniques may be used in accordance with the invention for detection of other improper stitches and in other Class 400 chainstitches.

20 FIGURE 2 shows a conventional chainstitch type 401 sewing machine 100 that has been modified to include an embodiment of the present invention. Referring now to FIGURE 2 generally, in the formation of normal or correct chainstitches, the looper
25 assembly 124 of chainstitch sewing machine 100 brings the looper thread 125 proximal to the needle thread 12 during stitch formation. A proper or improper stitch can be detected preferably in selected time windows during each stitch cycle. Proper stitches
30 are indicated by needle thread movement during a time window. Based upon the characteristics of such types of skipped stitches, the present invention provides an apparatus for monitoring, on a continuous basis, needle thread movement and looper thread movement

-14-

during selected time windows of the stitch formation on a chainstitch sewing machine as correlated with the rotation of the main drive shaft of the machine, as an indicator of a skipped stitch.

5

The illustrated chainstitch sewing machine 100 includes a base member 102 having a planar workpiece support surface 104, and a sewing head 106 with a reciprocating (along needle axis 108a) needle 108 extending along axis 108a. The needle 108 receives needle thread 12 from a needle thread source 111 by way of a tension assembly 110.

The sewing machine 100 further includes a 15 looper assembly 124 beneath support surface 104. The assembly 124 includes a reciprocating looper arm 123 distal to the looper thread feed assembly 122 that moves the looper thread 125 in position during stitch formation. The looper arm 123 receives looper thread 20 125 from a looper thread source 113 by way of a looper thread tension assembly 115.

As an important aspect of the invention, and as shown in FIGURE 2, a needle thread movement sensor 25 140 of the invention is positioned, or mounted, on the sewing head 106 between the take-up lever 107 and the needle 108. In this location, the needle thread 12 passes through the thread movement sensor 140 (along axis 108a) to enable detection of needle 30 thread movement during stitch formation. The exemplary sensor 140 is described in detail below in conjunction with FIGURE 6.

-15-

Another important aspect of the invention is the inclusion of a looper thread movement sensor 141. The sensor 141 is positioned, or mounted, on the sewing machine body 107 between the looper assembly 124 and the looper thread tension assembly 115. Preferably, the sensor 141 is positioned close to the looper assembly 124 for more precise monitoring. In this location, the looper thread 125 passes through the looper thread movement sensor 141 (along axis 144'a) to enable detection looper thread movement during stitch formation. The exemplary sensor 141 is described in detail below in conjunction with FIGURE 7.

Also shown in FIGURE 2 is a shaft monitor assembly 130 for detecting the rotation of the main shaft 20 of machine 100 during the formation of a stitch. The monitor assembly 130 may be any type of sensor assembly for detection of movement of the shaft 20.

In the preferred form of the shaft monitor assembly, a commercial sensor available from Sick Optic-Electronik, Inc., 2059 White Bear Avenue, St. Paul, MN, may be used. Other commercially available sensors may be used. Generally, the sensor 130 includes a detector which provides a shaft output signal characterized by a pulse corresponding to the times light reflects back from a target positioned on the shaft 20 as the shaft rotates during each stitch cycle.

FIGURE 6 shows a perspective view of one embodiment of the needle thread movement sensor 140

-16-

of the present invention. In the illustrated embodiment, the needle thread movement sensor 140 includes a housing 142 for mounting the sensor on the sewing head 106. At one side of the housing is an
5 emitter 146, which may include a light emitting diode (LED) for generating a light beam 150 which is directed through a beam channel 149 within housing 142. In the illustrated embodiment, the beam 150 cross-section substantially matches the channel 149
10 cross-section, however some variation between beam widths may be permitted without impairing the functioning of the invention.

At the other side of the housing, opposing
15 the emitter 146, is located a detector 148, such as a phototransistor and associated circuitry (not shown). A thread channel 144 extends along an axis 144a and intersects the channel 149. Needle thread 12 passes through channel 144 on its way to the
20 needle with the thread's longitudinal axis 12a substantially parallel to axis 144a. While the exact orientation of the beam 150 is not critical to the invention, it is essential that at least a portion of the needle thread 12 is constantly located at least
25 partially within the beam 150.

Thread movement is indicated by detected changes in reflection or absorption of the beam 150 as the thread 12 passes through the beam 150 where
30 such changes are due to variation in the thread characteristics (e.g., reflection or absorption) along its principal axis 12a. In an alternate form of the invention, thread movement is detected by

-17-

detected changes in beam intensity due to variations in surface texture of the thread 12 along its principal axis 12a.

5 An exemplary looper thread movement sensor 141 of the present invention is shown in FIGURE 7. That sensor 141 is similar in construction to the needle thread movement sensor 140 of FIGURE 5. Similar elements of that sensor are identified with
10 the same (but primed) reference designations as used in FIGURE 5. Specifically, the illustrated sensor 141 includes a housing 142' for mounting the sensor 141 on the sewing machine body 107. At one side of the housing 142' is an emitter 146', which may
15 include an LED for generating a light beam 150' that is directed through a beam channel 149' within the housing 142'. A detector 148' is disposed opposite to the emitter 146'. The looper thread 125 passes through the channel 144' (with the thread's
20 longitudinal axis 125a substantially parallel to axis 144'a) on its way to the looper assembly 124. The sensor 141 functions in substantially the same manner as the needle thread movement sensor 140 described above.

25

In an alternative embodiment, either or both of sensors 140 and 141 may have the form of the thread movement sensor 140A shown in FIGURES 8 and 9.

30 Sensor 140A includes a guide block 220, a beam generator 224, a beam detector 228, a pressure arm 230, and thread guide pins 232 and 234. Guide block 220 and pins 232 and 234 establish an elongated

-18-

region 250 along a zig-zag feed axis 240 adapted to receive and allow passage therethrough of a thread-to-be-monitored, where the region 250 for thread passage includes a point X on its lateral boundary. Preferably, feed axis 240 lies substantially in a plane.

The guide block 220 has a generally convex (about a block axis 220b perpendicular to the feed axis 240) lateral surface 220a that is substantially tangent to region 250 near point X.

In the illustrated embodiment, the lateral surface 220a has a slight concave groove (about an axis parallel to the feed axis) at points close to the point X, to provide a guide to control the transverse (to feed axis 240) position of a thread passing through region 250. The lateral surface 220a of block 220 and pins 232 and 234 (which extend in a direction perpendicular to the plane of feed axis 240) generally define the shape of region 250.

The pressure arm 230 is pivotally mounted about axis 231 (perpendicular to the plane of feed axis 240) and is spring loaded so that its lateral surface 230a opposite point X is biased toward block 220. The pressure arm 230 is optional, but when used, is adapted to affirmatively bias thread passing through region 250 toward point X, regardless of the diameter of the thread.

The guide block 220 includes an open-sided channel (or groove) 260 extending across surface 220

-19-

transversely along a channel axis 260a. The beam generator 224 and beam detector 228 face each other, with beam generator 224 being positioned at one end of channel 260 and the beam detector 228 being
5 positioned at the other end. The generator 224 generates an optical beam 265 and transmits that beam along channel axis 260a onto detector 228, where the beam cross-section includes a region within channel 260 (including point X) and the region adjacent
10 thereto within region 250.

With this configuration, as a thread passes through region 250 along feed axis 240, the lateral surface of the thread travels along surface 230a and
15 passes point X. As it does so, the edge portion of the thread interrupts a portion of the beam 265, where the interrupted portion varies as a function of the shape of the profile (shape) of the lateral surface of the thread as it passes the channel 260.
20 The detector 228 includes a photodetector circuit that generates a signal representative of the variation in detected beam intensity incident thereon. This signal varies directly with the variation in the profile of the thread passing
25 channel 260.

FIGURE 3 shows an output signal generated by the looper thread sensor assembly 141 for a proper chainstitch (Trace A) and an output signal generated
30 by processor 300 representative of time windows when looper thread movement is monitored (TRACE B), versus an output voltage signal generated by shaft rotation sensor 130 (Trace C) on a common time axis. Trace C

-20-

shows a single pulse representative of top dead center (TDC) of the shaft 20 of machine 100. Variations in the voltage level in Trace A are indicative of looper thread movement, as measured by 5 an embodiment of the present invention. Trace C defines successive stitch cycles 200 and 200', as indicated by shaft rotation, measured using the shaft sensor 130.

10 Time windows 202 and 202' are indicated in FIGURE 3, with windows 202, 202' being associated with a first predetermined portion of stitch cycles 200, 200', respectively, i.e. the first 45 degrees from top dead center (TDC) of the cycle. The windows 15 202 and 202' represent the times when looper thread movement is monitored by processor 300 during cycles 200 and 200', respectively. Looper thread movement during one of these windows is indicative of a proper stitch formed during the corresponding cycle, while 20 no looper thread movement is indicative of a triangle skip improper stitch. Trace A indicates that there is looper thread movement during both time windows 202 and 202'. This is indicative of no triangle skip improper stitches during cycles 200 and 200'.

25

FIGURE 4 shows an output signal generated by the needle thread sensor assembly 140 for a proper chainstitch (Trace A) and an output signal generated by processor 300 representative of time windows when 30 needle thread movement is monitored (Trace B), and versus an output voltage signal generated by shaft rotation sensor 130 (Trace C) on a common time axis. As in FIGURE 3, Trace C shows a single pulse

-21-

representative of top dead center (TDC) of the shaft 20 of machine 100. Variations in the voltage level in Trace A are indicative of needle thread movement, as measured by an embodiment of the present invention.

5

Two time windows 204 and 204' are indicated in FIGURE 4, with windows 204 and 204' being associated with a second predetermined portion of the stitch cycles 200, 200', respectively, i.e. the first 10 37.5 degree portion of the cycle occurring after the first 22.5 degrees after TDC of the cycle. The windows 204 and 204' represent the times when needle thread movement is monitored by processor 300 during cycles 200 and 200', respectively. Needle thread 15 movement during one of those windows 204, 204' is indicative of a proper stitch formed during the corresponding cycle, while no needle thread movement is indicative of a needle loop skip improper stitch. Trace A indicates that there is needle thread 20 movement during both time windows 204 and 204'. This is indicative of no needle loop skip improper stitches during cycles 200 and 200'.

FIGURE 5 shows signals from the sensor 141 25 (Traces A and B) and from the sensor 140 (Traces C and D) for segments of a stitch cycle. Trace A shows the window 202 for a triangle skip improper stitch showing substantially no looper thread movement. In contrast, Trace B shows the window 202 for a proper 30 stitch, showing looper thread movement substantially throughout the window 202.

-22-

Also in FIGURE 5, Trace C shows the window 204 for a needle loop improper stitch, showing substantially no needle thread movement. In contrast, Trace D shows the window 204 for a proper 5 stitch, showing needle thread movement substantially throughout the window 204.

The measurements shown in FIGURES 4 and 5 are for sewing speeds at 700 rpm (SPM, stitches per 10 minute) at 10 stitches per inch. Thus, one stitch cycle (TDC-to-TDC) occurs in approximately 86 milliseconds.

During operation of the sewing machine of 15 the illustrated embodiment of FIGURE 2, the needle thread movement sensor 140 and the looper thread movement sensor 141 each maintain a constant beam 150, 150' through which the respective threads move during stitch formation, and generate needle and 20 looper thread movement signals respectively. The shaft monitor 130 generates a stitch signal similar to those shown in Trace A of FIGURES 3 and 4 (and Traces A and C of FIGURE 5 for instances of improper stitches).

25

A signal processing system (or processor) 300 stores, processes, and correlates the information received from the shaft monitor 130, the looper thread movement sensor 141, and the thread movement 30 sensor 140 to determine whether an improper stitch was formed during each stitch cycle. If there is no movement, or substantially no movement, of thread during a predetermined segment of a stitch cycle

-23-

(i.e. window), a signal will be generated for notifying the sewing machine operator of a skipped or improper stitch. The sewing machine operator may either be a human operator or a computer/machine operator depending upon the technology available at the time.

The processor 300 may in some embodiments store values corresponding to appropriate thread movement rates for certain stitching operations, and may compare those values with actual (needle and/or looper) thread movement during selected portions of the stitch cycle.

Either thread movement sensor may be used without the correlation of the shaft monitor to merely detect the movement of the respective threads for the purpose of thread break detection. However, during high-speed operation of sewing machines, such as occurs in large-scale production of apparel, it is important to have real-time detection of skipped stitches detected during each stitch cycle. Prompt, accurate detection of skipped stitches is important in such applications.

25

In practicing the system of the present invention, the different sensors may be used to detect specific types of skipped stitches. For example, when using the needle thread movement sensor 140 and shaft rotation sensor 130 without a looper thread movement sensor 141, needle loop skip stitches may be detected, however triangle skip stitches may not be detected. Conversely, use of a looper thread

-24-

movement sensor 141 and shaft rotation sensor 130 without a needle thread movement sensor 140 will detect triangle skip stitches, but will not effectively detect needle loop skip stitches. Thus, 5 to detect both types of skipped stitches, i.e., needle loop skip and triangle skip, all three sensors 140, 141, 130 should be used.

While the invention is discussed above in 10 relation to chainstitch-forming sewing machines, the invention may be used in monitoring the formation of other stitches, such as those requiring the use of a bobbin.

15 The invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. The present embodiments are therefore to be considered in all respects as illustrative and not restrictive, the 20 scope of the invention being indicated by the appended claims rather than by the foregoing description, and all changes which come within the meaning and range of equivalency of the claims are therefore intended to be embraced therein.

25

What is claimed is:

-25-

1. Apparatus for detecting an improper stitch for a chainstitch sewing machine, said machine including:

an axially reciprocal needle adapted to
5 incorporate at least one needle thread into a succession of stitches, said needle being movable along a longitudinal needle axis;

a reciprocal needle thread take-up lever;
10

a drive motor having an output shaft and associated means for driving said needle through at least one reciprocal motion per stitch;

15 a looper thread assembly including looper means for incorporating a looper thread and said needle thread into said stitches during one stitch cycle, and a looper thread tension assembly for delivering said looper thread to said looper means,
20 said looper thread being disposed in part along a looper thread axis extending between said looper thread tension assembly and said looper means; the improvement comprising:

25 A. looper thread detection means for detecting looper thread movement along said looper thread axis between said looper thread tension assembly and said looper means during a predetermined portion of said
30 stitch cycle;

B. shaft rotation means for detecting each of said output shaft rotations; and

5 C. first signal means responsive to said looper thread detection means and said shaft rotation detector means for generating a first stitch signal corresponding to said predetermined portion of said stitch cycle wherein substantially no looper thread movement is detected, said first stitch signal being indicative of formation of an improper stitch.

10

2. Apparatus according to claim 1 wherein said looper thread detection means comprises:

15 A. a detector housing having a channel extending therethrough along a channel axis for receiving said looper thread between said looper thread tension assembly and said looper means, whereby in said channel said looper thread axis is substantially aligned with said channel axis;

20

B. beam generating means positioned on one side of said channel for generating an optical beam of predetermined width and transverse to said channel axis which intersects at least a portion of said
25 channel; and

C. means for controlling the position of said looper thread in said channel so that said thread passes through at least a portion of said
30 beam,

D. beam detection means positioned on the side of said channel opposite said beam generating means for detecting said optical beam;

35

-27-

whereby movement of said looper thread through said optical beam is detected due to differences in thread characteristics along the length of said thread.

- 5 3. Apparatus according to claim 2 wherein said channel is of sufficient size to substantially constrain movement of said looper thread within a predetermined region, said region being determined by boundaries of said beam.

10

4. Apparatus according to claim 3 further comprising means for storing predetermined values corresponding to thread movement per said predetermined portion of said stitch cycle.

15

5. Apparatus according to claim 4 further comprising means for comparing said stored values with actual thread movement per predetermined portion of said stitch cycle corresponding to said stitch
20 signals.

6. Apparatus according to claim 3 further comprising means for generating an output signal corresponding to said first stitch signal.

25

7. Apparatus according to claim 1 further comprising:

- A. needle thread detection means for
30 detecting needle thread movement along said needle thread axis between said take-up lever and said needle during a second predetermined portion of said stitch cycle;

-28-

B. second signal means responsive to said needle thread detection means for generating a second stitch signal corresponding to said second predetermined portion of said stitch cycle wherein
5 substantially no needle thread movement is detected, said second stitch signal being indicative of formation of an improper stitch.

8. Apparatus according to claim 7 wherein said
10 needle thread detection means further comprises:

A. a detector housing having a channel extending therethrough along a channel axis for receiving said needle thread between said take-up
15 lever and said needle, whereby in said channel said needle thread axis is substantially aligned with said channel axis;

B. beam generating means positioned on one
20 side of said channel for generating an optical beam of predetermined width and transverse to said channel axis which intersects at least a portion of said channel; and

25 C. means for controlling the position of said needle thread in said channel so that said thread passes through at least a portion of said beam;

D. beam detection means positioned on the
30 side of said channel opposite said beam generating means for detecting said optical beam; and

whereby movement of said needle thread through said optical beam is detected due to differences in thread
35 characteristics along the length of said thread.

-29-

9. Apparatus according to claim 8 wherein said channel is of sufficient size to substantially constrain movement of said looper thread within a predetermined region, said region being determined by boundaries of said beam.
10. Apparatus according to claim 9 further comprising means for storing predetermined values corresponding to thread movement per said predetermined portion of said stitch cycle.
11. Apparatus according to claim 10 further comprising means for comparing said stored values with actual thread movement per predetermined portion of said stitch cycle corresponding to said stitch signals.
12. Apparatus according to claim 9 further comprising means for generating an output signal corresponding to said second stitch signal.
13. Apparatus for detecting an improper stitch for a chainstitch sewing machine, said machine including:
- an axially reciprocal needle adapted to incorporate at least one needle thread into a succession of stitches, said needle being movable along a longitudinal needle axis;
- a reciprocal needle thread take-up lever;
- a drive motor having an output shaft and associated means for driving said needle through at least one reciprocal motion per stitch;

-30-

a looper thread assembly including looper means for incorporating a looper thread and said needle thread into said stitches during one stitch cycle, and a looper thread tension assembly for
5 delivering said looper thread to said looper means, said looper thread being disposed in part along a looper thread axis extending between said looper thread tension assembly and said looper means; the improvement comprising:

10

A. needle thread detection means for detecting needle thread movement along said needle thread axis between said take-up lever and said needle during a predetermined
15 portion of said stitch cycle;

B. shaft rotation means for detecting each of said output shaft rotations; and

20

C. signal means responsive to said needle thread detection means and said shaft rotation means for generating a stitch signal corresponding to said predetermined
25 portion of said stitch cycle wherein substantially no needle thread movement is detected, said stitch signal being indicative of formation of an improper stitch.

30 14. Apparatus according to claim 13 wherein said needle thread detection means further comprises:

A. a detector housing having a channel extending therethrough along a channel axis for

-31-

receiving said needle thread between said take-up lever and said needle, whereby in said channel said needle thread axis is substantially aligned with said channel axis;

5

B. beam generating means positioned on one side of said channel for generating an optical beam of predetermined width and transverse to said channel axis which intersects at least a portion of said
10 channel; and

C. means for controlling the position of said needle thread in said channel so that said thread passes through at least a portion of said beam;
15

D. beam detection means positioned on the side of said channel opposite said beam generating means for detecting said optical beam; and

20 whereby movement of said needle thread through said optical beam is detected due to differences in thread characteristics along the length of said thread.

15. Apparatus according to claim 14 wherein said
25 channel is of sufficient size to substantially constrain movement of said looper thread within a predetermined region, said region begin determined by boundaries of said beam.

30 16. Apparatus according to claim 15 further comprising means for storing predetermined values corresponding to thread movement per said predetermined portion of said stitch cycle.

17. Apparatus according to claim 16 further comprising means for comparing said stored values with actual thread movement per predetermined portion of said stitch cycle corresponding to said stitch
5 signals.

18. Apparatus according to claim 15 further comprising means for generating an output signal corresponding to said stitch signal.

10

19. A method for detecting a needle loop skip during chainstitch formation using a chainstitch sewing machine, said machine including:

15 an axially reciprocal needle adapted to incorporate at least one needle thread into a succession of stitches, said needle being movable along a longitudinal needle axis;

20 a reciprocal needle thread take-up lever;

 a drive motor having an output shaft and associated means for driving said needle through at least one reciprocal motion per stitch;

25

 a looper thread assembly including looper means for incorporating a looper thread and said needle thread into said stitches during one stitch cycle, and a looper thread tension assembly for
30 delivering said looper thread to said looper means, said looper thread being disposed in part along a looper thread axis extending between said looper thread tension assembly and said looper means;

-33-

said method comprising the steps of:

5. A. detecting needle thread movement
along a portion of a needle thread axis
extending between said needle and said
take-up lever during a predetermined portion
of each stitch cycle;
- 10 B. detecting each shaft rotation
during each said stitch cycle;
- 15 C. correlating said needle thread
movement and said shaft rotation during said
stitch cycle to identify instances of
substantially no needle thread movement; and
- 20 D. generating a signal representative
of said instances of substantially no needle
thread movement, said signal being
indicative of a needle loop skip.

20. The method of claim 19 wherein said step of
detecting said needle thread movement further
comprises the step of detecting differences in thread
25 surface characteristics as at least a portion of said
needle thread passes through an optical beam,

whereby said optical beam is generated by a
beam generator, passes through a beam channel that is
30 at least partially transverse to a thread channel
through which said needle thread passes, and is
detected by a beam detector means opposite said beam
generator.

-34-

21. A method for detecting a triangle loop skip during chainstitch formation using a chainstitch machine, said machine including

- 5 an axially reciprocal needle adapted to incorporate at least one needle thread into a succession of stitches, said needle being movable along a longitudinal needle axis;
- 10 a reciprocal needle thread take-up lever;
- a drive motor having an output shaft and associated means for driving said needle through at least one reciprocal motion per stitch;
- 15 a looper thread assembly including looper means for incorporating a looper thread and said needle thread into said stitches during one stitch cycle, and a looper thread tension assembly for
- 20 delivering said looper thread to said looper means, said looper thread being disposed in part along a looper thread axis extending between said looper thread tension assembly and said looper means;
- 25 said method comprising the steps of:
- A. detecting looper thread movement along a portion of a looper thread axis extending between said looper thread tension
- 30 assembly and said looper means during a predetermined portion of each stitch cycle;
- B. detecting each shaft rotation during each said stitch cycle;

35

-35-

C. correlating said looper thread movement and said shaft rotation during said stitch cycle to identify instances of substantially no looper thread movement; and

5

D. generating a signal representative of said instances of substantially no looper thread movement, said signal being indicative of a triangle loop skip.

10

22. The method of claim 21 wherein said step of detecting said looper thread movement further comprises the step of detecting differences in thread surface characteristics as at least a portion of said 15 looper thread passes through an optical beam,

whereby said optical beam is generated by a beam generator, passes through a beam channel that is at least partially transverse to a thread channel 20 through which said looper thread passes, and is detected by a beam detector means opposite said beam generator.

23. Apparatus according to claims 1 or 7 or 13 25 wherein said thread detection means comprises:

A. thread positioning means for establishing an elongated region extending along a feed axis and adapted to receive said thread with 30 its principal axis substantially parallel to said feed axis with the lateral surface of said thread adjacent to a lateral boundary of said region at a reference point on said lateral boundary,

-36-

B. a beam guide including a block member having a lateral surface substantially tangent to said lateral boundary of said region near said reference point, said block member including an
5 open-sided channel in said lateral surface and passing through said reference point, said channel extending along a linear channel axis, said channel axis being other than parallel to said feed axis,

10 C. a beam generator disposed at one end of said channel and including means for transmitting an optical beam in a direction parallel to said channel axis toward the other end of said channel, said beam having a cross-section, and

15

D. a beam detector disposed at the other end of said channel and including means for detecting portions of said beam incident thereon from said channel and regions adjacent thereto, and including
20 means responsive to said detection for generating a signal representation of the intensity of the optical beam incident on said detecting means, said signal being representative of the variation in the lateral surface of thread passing through said region in the
25 direction of said feed axis.

24. The apparatus of claim 23 wherein said lateral surface of said block member is convex about a block axis extending in a direction other than parallel to
30 said feed axis.

25. The apparatus of claim 24 wherein said block axis extends in a direction substantially perpendicular to said feed axis.

35

26. The apparatus of claim 25 wherein said thread positioning means includes means for controlling said feed axis to curve around said convex lateral surface of said block member.

5

27. The apparatus of claim 23 wherein said thread positioning means includes an arm having a pressure surface on the side of said region opposite said reference point, and includes means for biasing said
10 presser surface toward said reference point.

28. Apparatus for detecting motion of a thread in the direction of its principal axis, said thread having an irregular lateral surface, comprising:

15

A. thread positioning means for establishing an elongated region extending along a feed axis and adapted to receive said thread with its principal axis substantially parallel to said
20 feed axis with the lateral surface of said thread adjacent to a lateral boundary of said region at a reference point on said lateral boundary,

B. a beam guide including a block member
25 having a lateral surface substantially tangent to said lateral boundary of said region near said reference point, said block member including an open-sided channel in said lateral surface and passing through said reference point, said channel
30 extending along a linear channel axis, said channel axis being other than parallel to said feed axis,

C. beam generator disposed at one end of said channel and including means for transmitting an optical beam in a direction parallel to said channel axis toward the other end of said channel, said beam
5 having a cross-section including the portion of said region adjacent to said channel, and

D. beam detector disposed at the other end of said channel and including means for detecting
10 portions of said beam incident thereon from said channel and regions adjacent thereto, and including means responsive to said detection for generating a signal representation of the intensity of the optical beam incident on said detecting means, said signal
15 being representative of the variation in the lateral surface of thread passing through said region in the direction of said feed axis.

29. The apparatus of claim 28 wherein said lateral
20 surface of said block member is convex about a block axis extending in a direction other than parallel to said feed axis.

30. The apparatus of claim 29 wherein said block
25 axis extends in a direction substantially perpendicular to said feed axis.

31. The apparatus of claim 30 wherein said thread
positioning means includes means for controlling said
30 feed axis to curve around said convex lateral surface of said block member.

32. The apparatus of claim 28 wherein said thread positioning means includes an arm having a presser surface on the side of said region opposite said reference point, and includes means for biasing said
5 presser surface toward said reference point.

AMENDED CLAIMS

[received by the International Bureau on 28 January 1993 (28.01.93);
original claims 1-19, 21, 23-28, 31 and 32 amended;
remaining claims unchanged (15 pages)]

1. In an apparatus for detecting an improper stitch
used in conjunction with a chainstitch sewing
machine, said machine including:

5 an axially reciprocal needle adapted to
receive at least one needle thread and form a
succession of stitches, said needle being movable
along a longitudinal needle axis;

10 a reciprocal needle thread take-up lever;

a drive motor having an output shaft, and
means associated with said shaft for driving said
needle through at least one reciprocal motion per
15 stitch;

a looper thread assembly including looper
means for incorporating a looper thread to said
needle thread when forming said stitches during one
20 stitch cycle, and a looper thread tension assembly
and associated delivery means for delivering said
looper thread to said looper means, said looper
thread being disposed in part along a looper thread
axis extending between said looper thread tension
25 assembly and said looper means; the improvement in
the apparatus comprising:

a) looper thread detection means for
detecting looper thread movement along said
30 looper thread axis between said looper
thread tension assembly and said looper
means during a predetermined portion of said
stitch cycle;

35 b) shaft rotation detecting means for
detecting rotations of said output shaft; and

-41-

c) first signal generating means responsive to said looper thread detection means and said shaft rotation detector means for generating a first stitch signal
5 corresponding to detection of substantially no looper thread movement during said predetermined portion of said stitch cycle, said first stitch signal being indicative of formation of an improper stitch.

10

2. The improvement according to claim 1 wherein said looper thread detection means comprising:

i) a detector housing having a channel
15 extending therethrough along a channel axis for receiving said looper thread between said looper thread tension assembly and said looper means, wherein, in said channel, said looper thread axis is substantially aligned with said channel axis;

20

ii) beam generating means positioned on one side of said channel for generating an optical beam of predetermined width transverse to said channel axis and intersecting at least a portion of said
25 channel; and

iii) means for controlling a position of said looper thread in said channel so that said thread passes through at least a portion of said
30 beam,

iv) beam detection means positioned on a side of said channel opposite said beam generating means for detecting said optical beam;

35

whereby movement of said looper thread through said optical beam is detected due to differences in thread characteristics along a length of said thread.

- 5 3. The improvement according to claim 2 wherein said channel is of sufficient size to substantially constrain movement of said looper thread within a predetermined region, said region being determined by said predetermined width of said beam.

10

4. The improvement according to claim 3 further comprising means for storing predetermined values corresponding to thread movement during said predetermined portion of said stitch cycle.

15

5. The improvement according to claim 4 further comprising means for comparing said stored values with thread movement during said predetermined portion of said stitch cycle.

20

6. The improvement according to claim 3 further comprising means for generating an output signal representative of said first stitch signal.

- 25 7. The improvement according to claim 1 further comprising:

- d) needle thread detection means for detecting needle thread movement along said needle
30 thread axis between said take-up lever and said needle during a second predetermined portion of said stitch cycle;

e) second signal generating means responsive to said needle thread detection means for generating a second stitch signal corresponding to detection at substantially no needle thread movement
5 during said second predetermined portion of said stitch cycle, said second stitch signal being indicative of formation of an improper stitch.

8. The improvement according to claim 7 wherein
10 said needle thread detection means further comprising:

a) a detector housing having a channel extending therethrough along a channel axis for receiving said needle thread between said take-up
15 lever and said needle, wherein, in said channel, said needle thread axis is substantially aligned with said channel axis;

b) beam generating means positioned on one
20 side of said channel for generating an optical beam of predetermined width and transverse to said channel axis and intersecting at least a portion of said channel;

25 c) means for controlling a position of said needle thread in said channel so that said thread passes through at least a portion of said beam; and

d) beam detection means positioned on a
30 side of said channel opposite said beam generating means for detecting said optical beam;

whereby movement of said needle thread through said optical beam is detected due to differences in thread
35 characteristics along a length of said thread.

9. The improvement according to claim 8 wherein said channel is of sufficient size to substantially constrain movement of said looper thread within a predetermined region, said region being determined by
5 said predetermined width of said beam.

10. The improvement according to claim 9 further comprising means for storing predetermined values corresponding to thread movement during said
10 predetermined portion of said stitch cycle.

11. The improvement according to claim 10 further comprising means for comparing said stored values with actual thread movement during said predetermined
15 portion of said stitch cycle.

12. The improvement according to claim 9 further comprising means for generating an output signal representative of said second stitch signal.
20

13. In an apparatus for detecting an improper stitch used in conjunction with a chainstitch sewing machine, said machine including:

25 an axially reciprocal needle adapted to receive at least one needle thread and form a succession of stitches, said needle being movable along a longitudinal needle axis;

30 a reciprocal needle thread take-up lever;

 a drive motor having an output shaft, and means associated with said shaft for driving said needle through at least one reciprocal motion per
35 stitch;

a looper thread assembly including looper means for incorporating a looper thread to said needle thread when forming said stitches during one stitch cycle, and a looper thread tension assembly
5 and associated delivery means for delivering said looper thread to said looper means, said looper thread being disposed in part along a looper thread axis extending between said looper thread tension assembly and said looper means the improvement in the
10 apparatus comprising:

a) needle thread detection means for detecting needle thread movement along said needle thread axis between said take-up
15 lever and said needle during a predetermined portion of said stitch cycle;

b) shaft rotation detecting means for detecting rotations of said output shaft; and
20

c) signal generating means responsive to said needle thread detection means and said shaft rotation means for generating a stitch signal corresponding to detection of
25 substantially no needle thread movement during said predetermined portion of said stitch cycle, said stitch signal being indicative of formation of an improper stitch.
30

14. The improvement according to claim 13 wherein said needle thread detection means further comprising:

i) a detector housing having a channel
35 extending therethrough along a channel axis for

receiving said needle thread between said take-up lever and said needle, wherein, in said channel, said needle thread axis is substantially aligned with said channel axis;

5

ii) beam generating means positioned on one side of said channel for generating an optical beam of predetermined width transverse to said channel axis and intersecting at least a portion of said
10 channel;

iii) means for controlling a position of said needle thread in said channel so that said thread passes through at least a portion of said
15 beam; and

iv) beam detection means positioned on a side of said channel opposite said beam generating means for detecting said optical beam;

20

whereby movement of said needle thread through said optical beam is detected due to differences in thread characteristics along a length of said thread.

25 15. The improvement according to claim 14 wherein said channel is of sufficient size to substantially constrain movement of said looper thread within a predetermined region, said region begin determined by said predetermined width of said beam.

30

16. The improvement according to claim 15 further comprising means for storing predetermined values corresponding to thread movement during said predetermined portion of said stitch cycle.

35

17. The improvement according to claim 16 further comprising means for comparing said stored values with thread movement during said predetermined portion of said stitch cycle.

5

18. The improvement according to claim 15 further comprising means for generating an output signal representation of said stitch signal.

10 19. A method for detecting a needle loop skip during chainstitch formation using a chainstitch sewing machine, said machine including:

an axially reciprocal needle adapted to
15 receive at least one needle thread and form a succession of stitches where each stitch is formed during a stitch cycle, said needle being movable along a longitudinal needle axis;

20 a reciprocal needle thread take-up lever;

a drive motor having an output shaft, and means associated with said shaft for driving said needle through at least one reciprocal motion per
25 stitch;

a looper thread assembly including looper means for incorporating a looper thread to said needle thread when forming said stitches during one
30 stitch cycle, and a looper thread tension assembly and associated delivery means for delivering said looper thread to said looper means, said looper thread being disposed in part along a looper thread axis extending between said looper thread tension
35 assembly and said looper means;

said method comprising the steps of:

- 5 a) detecting needle thread movement
along a portion of a needle thread axis
extending between said needle and said
take-up lever during a predetermined portion
of each stitch cycle;
- 10 b) detecting each shaft rotation
during each said stitch cycle;
- 15 c) correlating said needle thread
movement and said shaft rotation during said
stitch cycle to identify instances of
substantially no needle thread movement; and
- 20 d) generating a signal representative
of said instances of substantially no needle
thread movement, said signal being
indicative of a needle loop skip.

20. The method of claim 19 wherein said step of
detecting said needle thread movement further
comprises the step of detecting differences in thread
25 surface characteristics as at least a portion of said
needle thread passes through an optical beam,

whereby said optical beam is generated by a
beam generator, passes through a beam channel that is
30 at least partially transverse to a thread channel
through which said needle thread passes, and is
detected by a beam detector means opposite said beam
generator.

21. A method for detecting a triangle loop skip during chainstitch formation using a chainstitch machine, said machine including:

5 an axially reciprocal needle adapted to receive at least one needle thread and form a succession of stitches where each stitch is formed during a stitch cycle, said needle being movable along a longitudinal needle axis;

10

 a reciprocal needle thread take-up lever;

 a drive motor having an output shaft, and means associated with said shaft for driving said
15 needle through at least one reciprocal motion per stitch;

 a looper thread assembly including looper means for incorporating a looper thread to said
20 needle thread when forming said stitches during one stitch cycle, and a looper thread tension assembly and associated delivery means for delivering said looper thread to said looper means, said looper thread being disposed in part along a looper thread
25 axis extending between said looper thread tension assembly and said looper means;

 said method comprising the steps of:

30

 a) detecting looper thread movement along a portion of a looper thread axis extending between said looper thread tension assembly and said looper means during a predetermined portion of each stitch cycle;

35

 b) detecting each shaft rotation during each said stitch cycle;

c) correlating said looper thread movement and said shaft rotation during said stitch cycle to identify instances of substantially no looper thread movement; and

5

d) generating a signal representative of said instances of substantially no looper thread movement, said signal being indicative of a triangle loop skip.

10

22. The method of claim 21 wherein said step of detecting said looper thread movement further comprises the step of detecting differences in thread surface characteristics as at least a portion of said
15 looper thread passes through an optical beam,

whereby said optical beam is generated by a beam generator, passes through a beam channel that is at least partially transverse to a thread channel
20 through which said looper thread passes, and is detected by a beam detector means opposite said beam generator.

23. The improvement according to claims 1 or 7 or 13
25 wherein said looper thread detection means comprising:

i) thread positioning means for establishing an elongated region extending along a thread feed axis and adapted to position said thread
30 with a thread principal axis substantially parallel to said feed axis with a lateral surface of said thread adjacent to a lateral boundary of said region at a reference point on said lateral boundary,

ii) a beam guide including a block member having a lateral surface substantially tangent to said lateral boundary of said region near said reference point, said block member including an
5 open-sided channel in said lateral surface and passing through said reference point, said channel extending along a linear channel axis, said channel axis being other than parallel to said feed axis,

10 iii) a beam generator disposed at one end of said channel and including means for transmitting an optical beam in a direction parallel to said channel axis toward another end of said channel, said beam having a cross-section, and

15

iv) a beam detector disposed at the other end of said channel and including means for detecting portions of said beam incident thereon from said channel and regions adjacent thereto, and including
20 means responsive to said detection for generating a signal representation of the intensity of the optical beam incident on said detecting means, said signal being representative of the variation in the lateral surface of thread passing through said region in the
25 direction of said feed axis.

24. The improvement of claim 23 wherein said lateral surface of said block member is convex about a block axis extending in a direction other than parallel to
30 said feed axis.

25. The improvement of claim 24 wherein said block axis extends in a direction substantially perpendicular to said feed axis.

35

26. The improvement of claim 25 wherein said thread positioning means includes means for defining said feed axis to curve around said convex lateral surface of said block member.

5

27. The improvement of claim 23 wherein said thread positioning means includes an arm having a pressure surface on a side of said region opposite said reference point, and includes means for biasing said
10 pressure surface toward said reference point.

28. Apparatus for detecting motion of a thread in a direction of a thread principal axis, said thread having an irregular lateral surface, comprising:

15

a) thread positioning means for establishing an elongated region extending along a thread feed axis and adapted to position said thread with a thread principal axis substantially parallel
20 to said feed axis with a lateral surface of said thread adjacent to a lateral boundary of said region at a reference point on said lateral boundary,

b) a beam guide including a block member
25 having a lateral surface substantially tangent to said lateral boundary of said region near said reference point, said block member including an open-sided channel in said lateral surface and passing through said reference point, said channel
30 extending along a linear channel axis, said channel axis being other than parallel to said feed axis,

c) beam generator disposed at one end of said channel and including means for transmitting an optical beam in a direction parallel to said channel axis toward another end of said channel, said beam
5 having a cross-section including the portion of said region adjacent to said channel, and

d) beam detector disposed at the other end of said channel and including means for detecting
10 portions of said beam incident thereon from said channel and regions adjacent thereto, and including means responsive to said detection for generating a signal representation of the intensity of the optical beam incident on said detecting means, said signal
15 being representative of the variation in the lateral surface of thread passing through said region in the direction of said feed axis.

29. The apparatus of claim 28 wherein said lateral
20 surface of said block member is convex about a block axis extending in a direction other than parallel to said feed axis.

30. The apparatus of claim 29 wherein said block
25 axis extends in a direction substantially perpendicular to said feed axis.

31. The apparatus of claim 30 wherein said thread
positioning means includes means for defining said
30 feed axis to curve around said convex lateral surface of said block member.

32. The apparatus of claim 28 wherein said thread positioning means includes an arm having a presser surface on a side of said region opposite said reference point, and includes means for biasing said
5 presser surface toward said reference point.

1/6

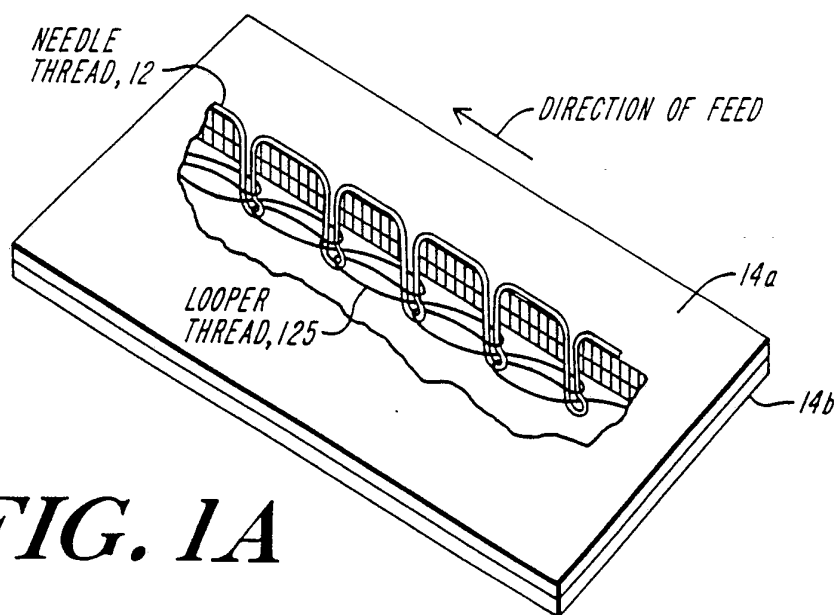
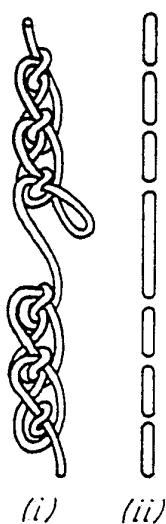
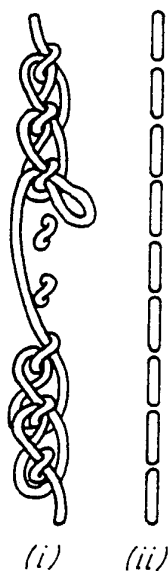


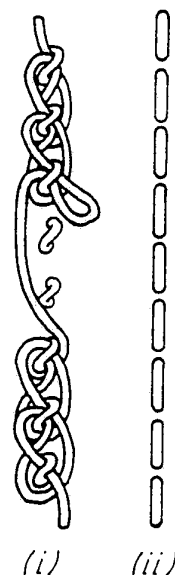
FIG. 1A



**FIG.
1B**

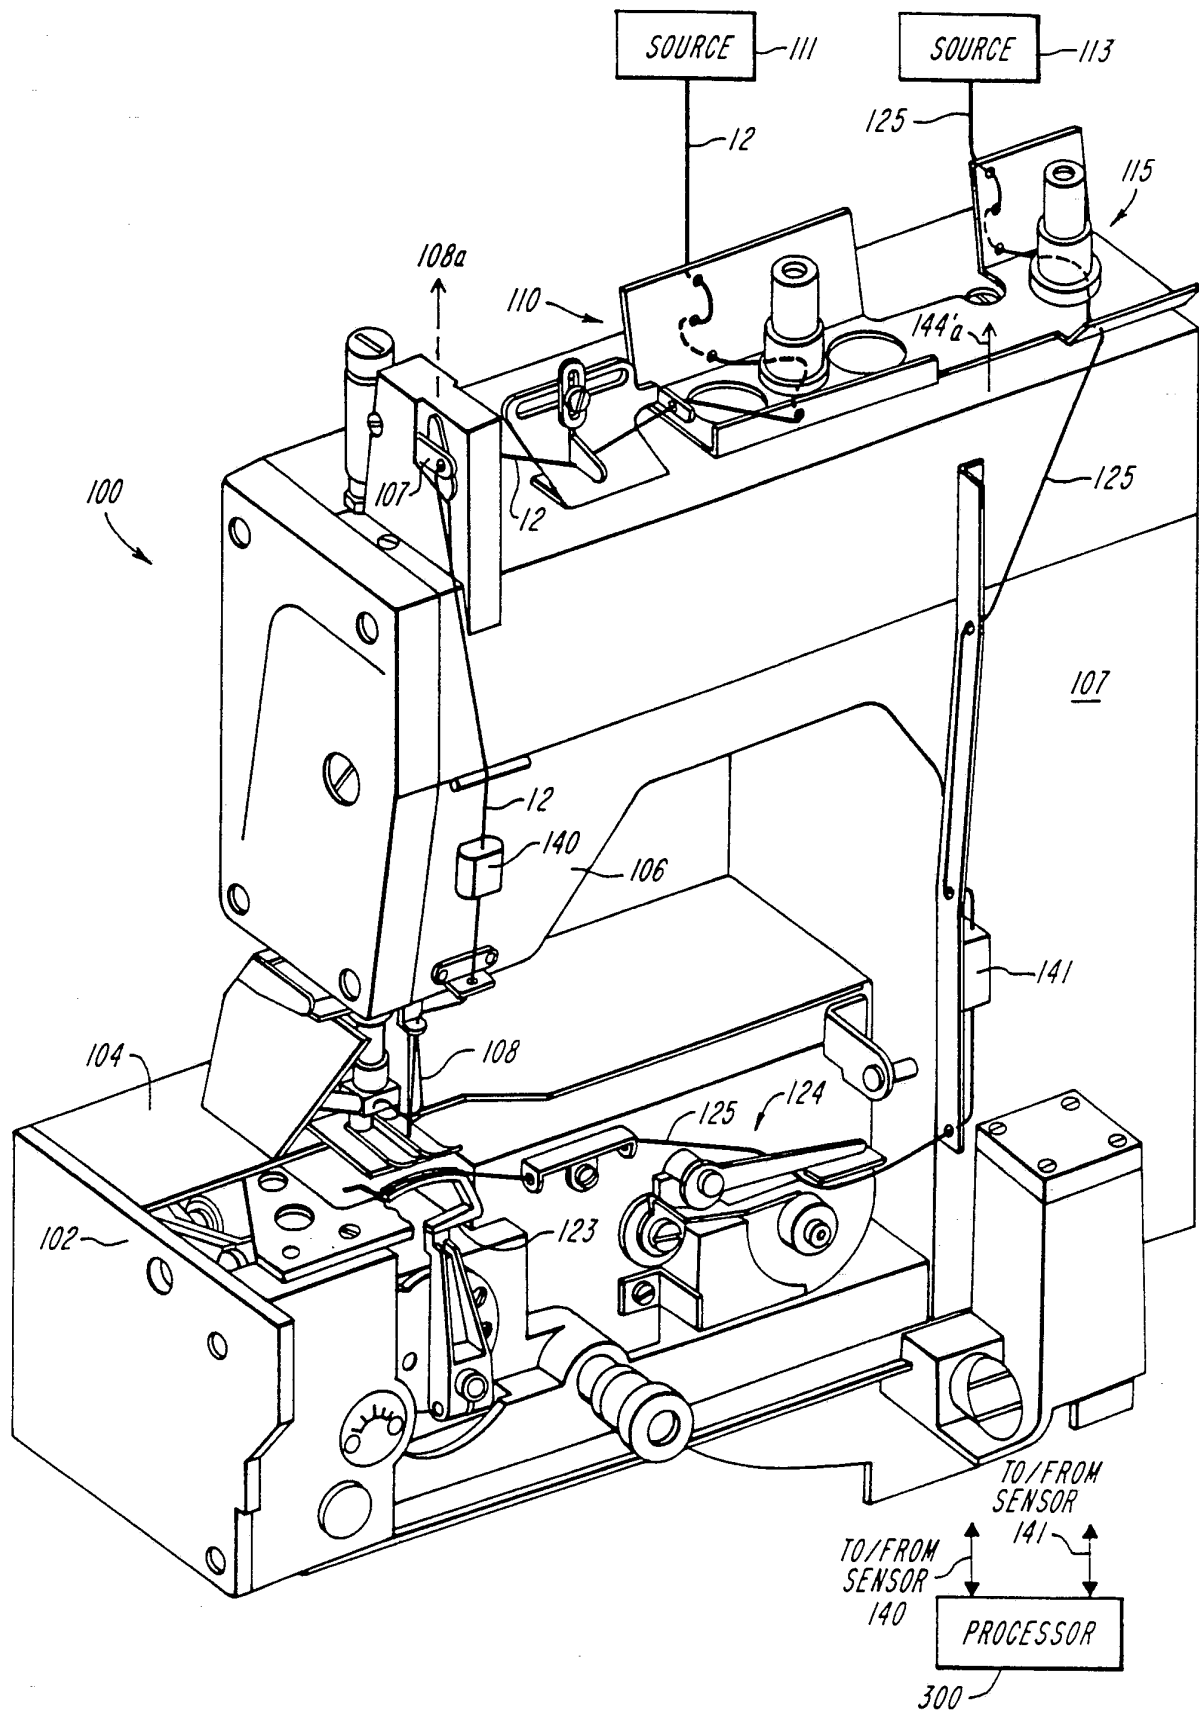


**FIG.
1C**

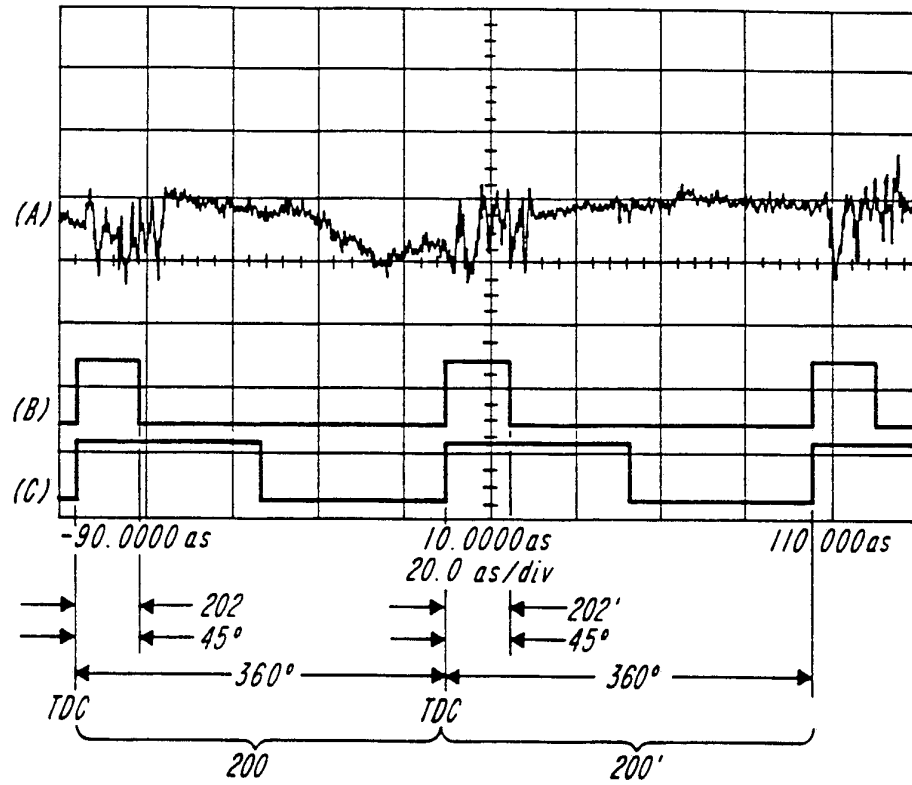
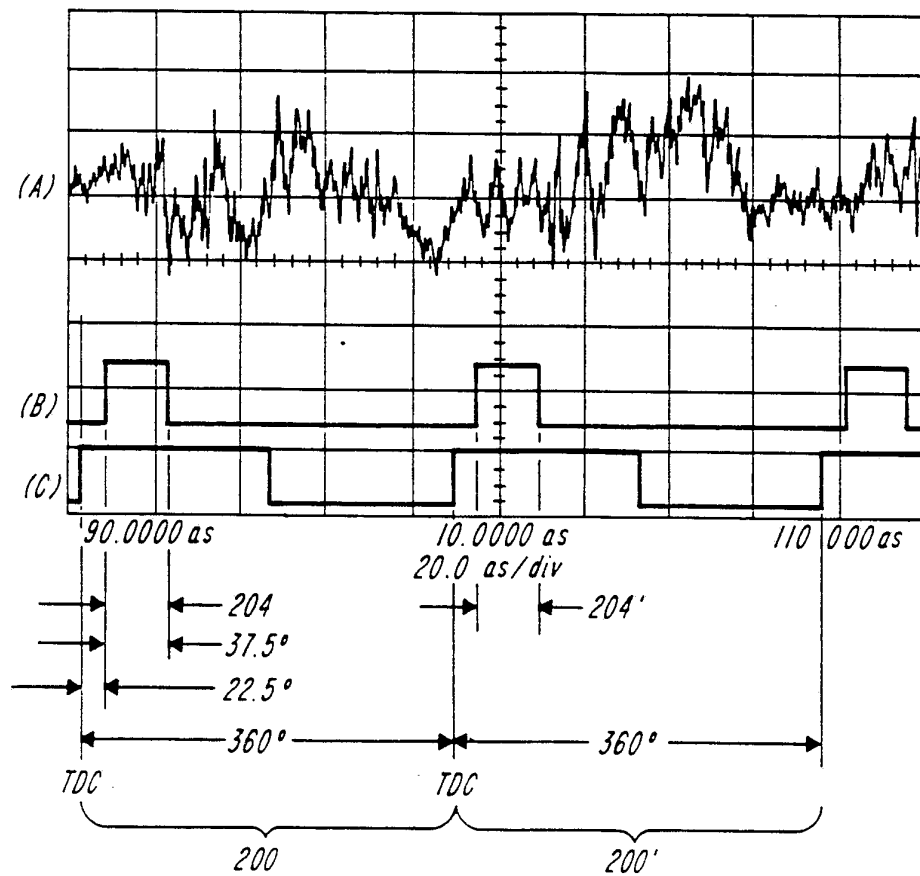


**FIG.
1D**

2/6

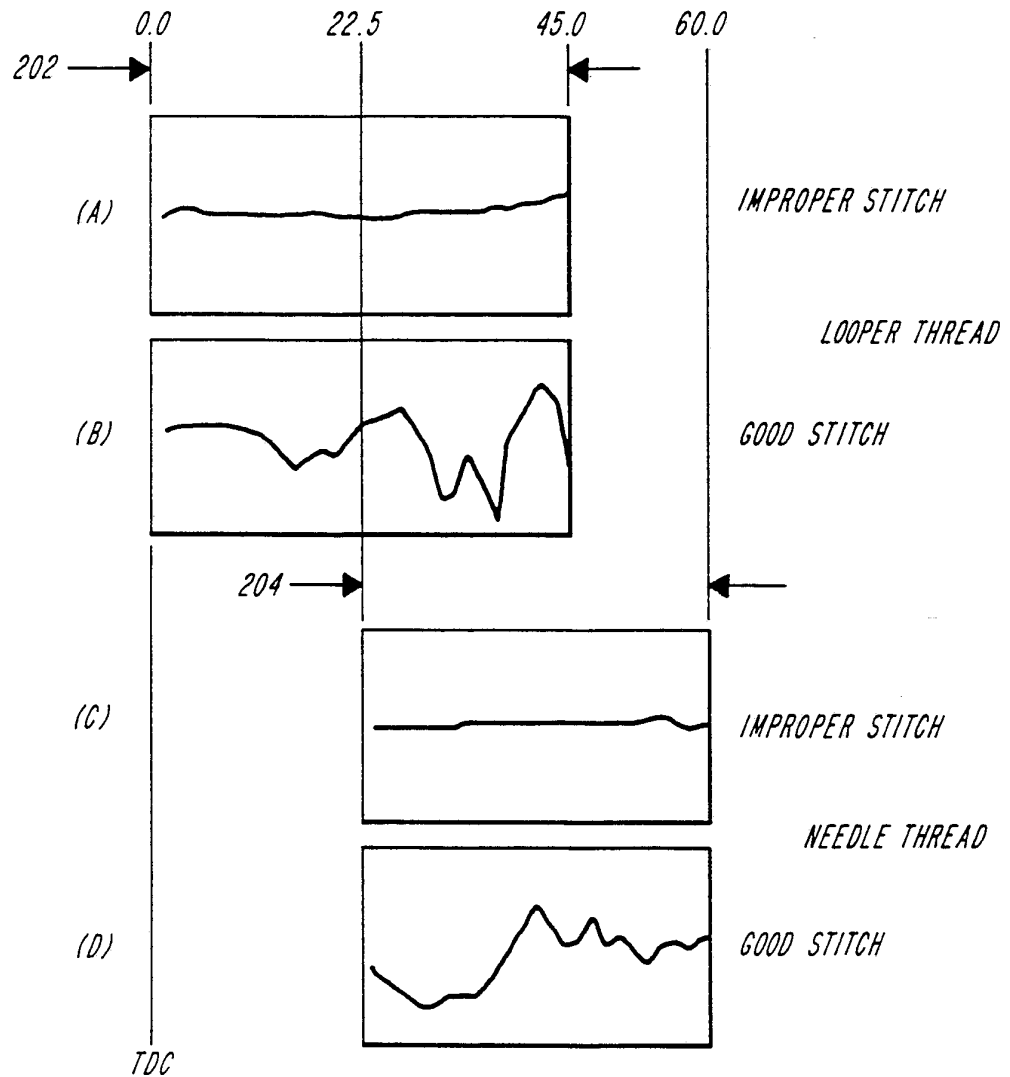
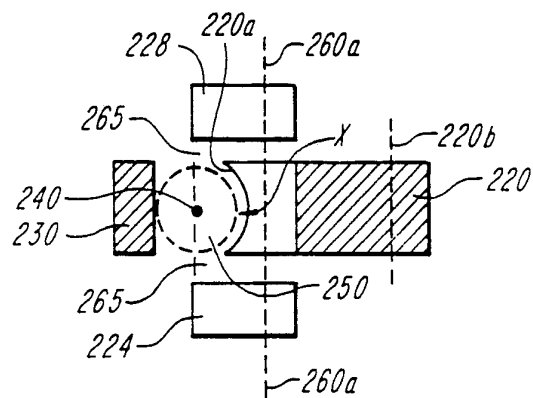
**FIG. 2****SUBSTITUTE SHEET**

3/6

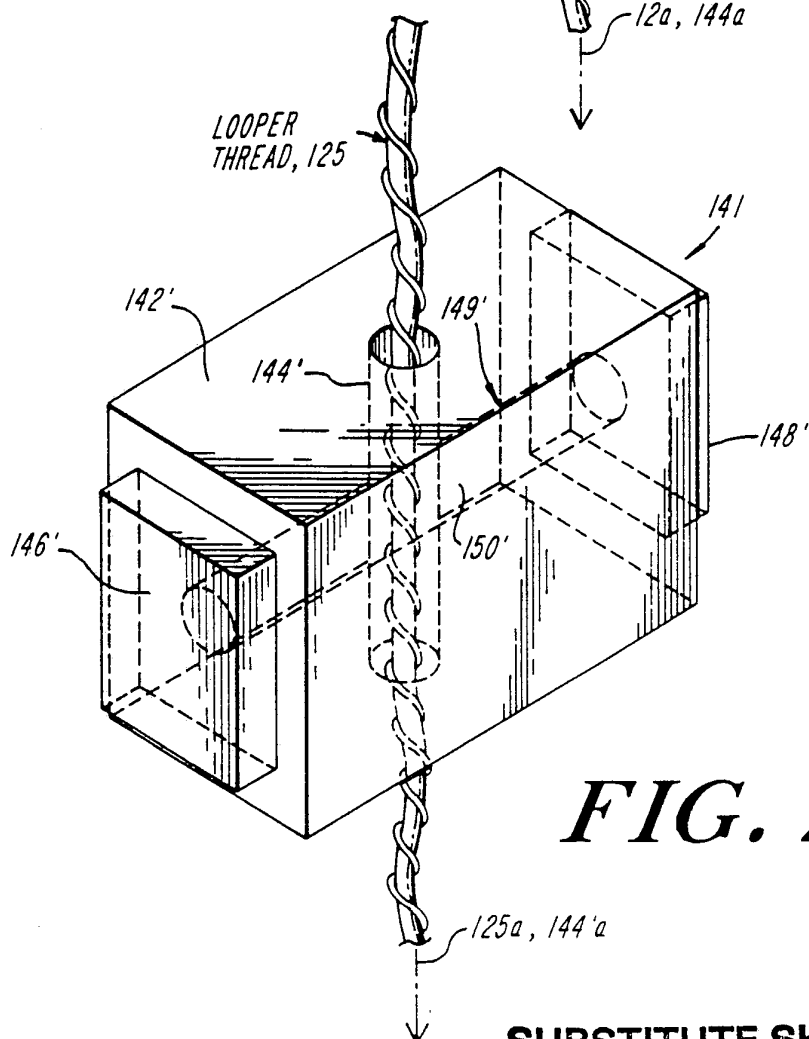
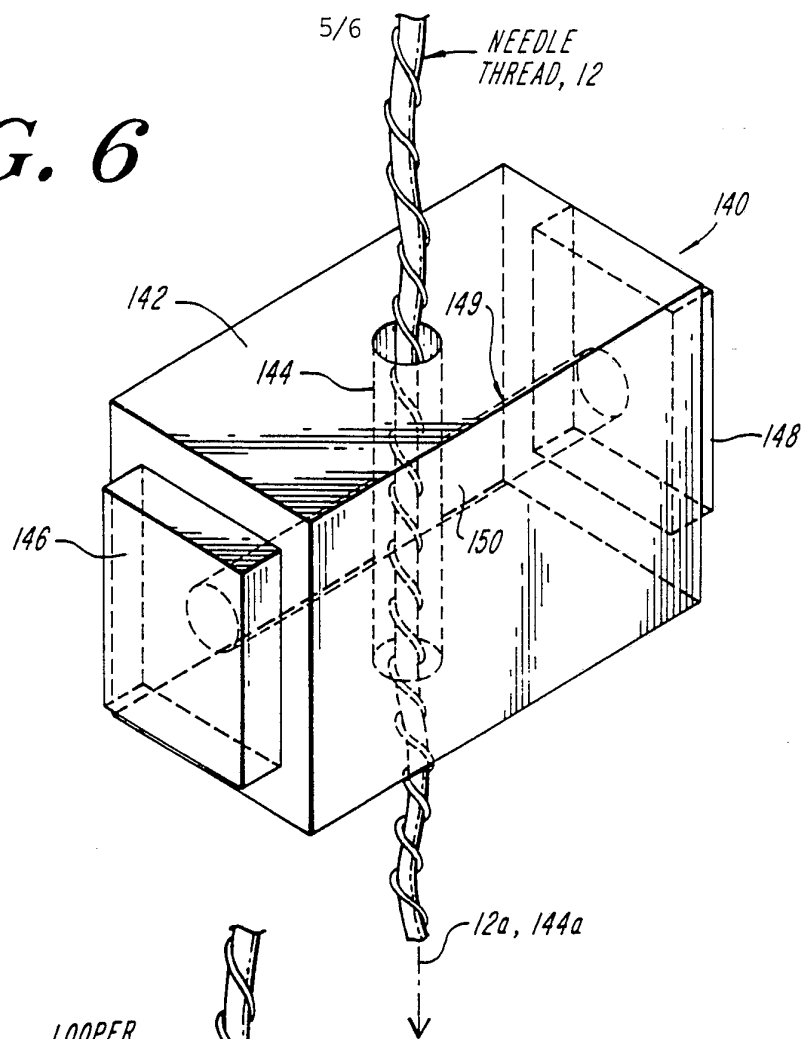
**FIG. 3****FIG. 4**

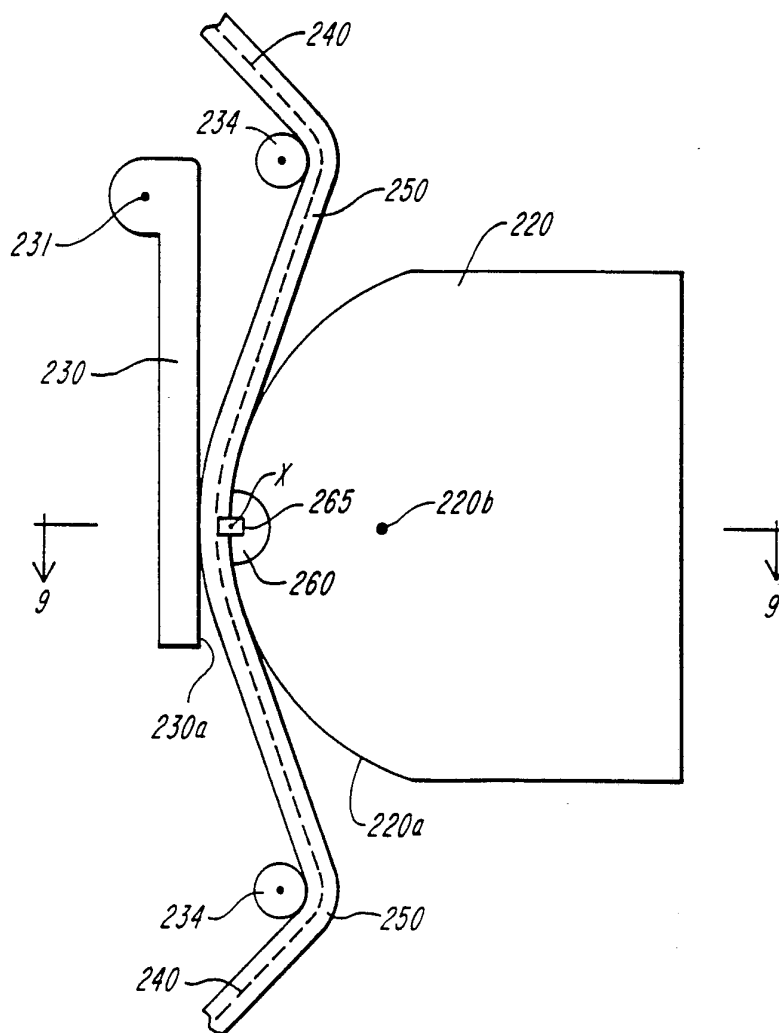
SUBSTITUTE SHEET

4/6

**FIG. 5****FIG. 9**

SUBSTITUTE SHEET

FIG. 6**FIG. 7**

**FIG. 8**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US92/07684

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :D05B 51/00

US CL :112/278; 250/561

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 112/199,112/202,112/234,112/271,112/273; 250/559,250/562,250/563; 66/163; 200/61.13,200/61.18

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Please See Extra Sheet.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
<u>X,P</u> Y,P	US, A, 5,140,920 (BELLIO ET AL.) 25 August 1992, See entire document.	<u>13-20,28-32</u> 1-12,21-32
<u>X,P</u> Y,P	US, A, 5,107,779 (ARNOLD ET AL.) 28 April 1992, See entire document.	<u>13,19</u> 14,20
Y,P	US, A, 5,069,151 (BELLIO) 03 December 1991, See entire document.	13-20
Y	US, A, 5,018,465 (HAGER ET AL.) 28 May 1991, See entire document.	1-12,21-27
Y	US, A, 4,991,528 (BELLIO) 12 February 1991, See entire document.	1-27



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

21 OCTOBER 1992

Date of mailing of the international search report

DEC

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

ISMAEL IZAGUIRRE

Telephone No. (703) 308-0892

Nguyen Ngoc Ho
NGUYEN NGOC-HO
INTERNATIONAL DIVISION

INTERNATIONAL SEARCH REPORT

 International application No.
 PCT/US92/07684

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,938,159 (SHIBATA) 03 July 1990, See entire document.	1-32
A	US, A, 4,935,999 (LINDEMANN) 26 June 1990, See entire document.	
Y	US, A, 4,841,890 (TANCS) 27 June 1989, See entire document.	13-20,28-32
Y	US, A, 4,805,544 (DOBNER ET AL.) 21 February 1989, See entire document.	1-12,21,22
Y	US, A, 4,693,196 (HAGER) 15 September 1987, See entire document.	1-12,21,22
Y	US, A, 4,602,582 (RAWSON) 29 July 1986, See entire document.	1-12,21-32
Y	US, A, 4,426,948 (OLASZ ET AL.) 24 January 1984, See entire document.	13-20
A	US, A, 4,325,314 (NIEM) 20 April 1982, See entire document.	
A	US, A, 4,192,243 (BLESSING ET AL.) 11 March 1980, See entire document.	
A	US, A, 4,186,672 (BURTON) 05 February 1980, See entire document.	13
Y	US, A, 4,170,951 (DOBRJANSKYJ) 16 October 1979, See entire document.	
A	US, A, 3,885,161 (TARBOX ET AL.) 20 May 1975, See entire document.	

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US92/07684

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 3,835,235 (ST. GERMAIN) 24 September 1974, See entire document.	
X	US, A, 3,785,308 (BRANDRIFF ET AL.) 15 January 1974, See entire document.	1,7,13,19,21
X	JP, A, 3,001,896 (JUKI CORP.) 08 January 1991, See entire document.	
Y	JP, A, 3,270,092 (BROTHER IND. KK) 08 November 1988, See entire document.	13-20
Y	DD, B, 0,252,625 (BIELERT ET AL.) 23 December 1987, See entire document.	28-32
Y	JP, B2, 5,005,316 (H.M.S.) 09 February 1985, See entire document.	28-32
A	GB, A, 2,008,631 (REINKE) 06 January 1979, See entire document.	

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US92/07684

B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

APS TEXT SEARCH AND RETRIEVAL SYSTEM

skip stitch, looper thread detector, chainstitch, needle thread detector, thread movement detector, thread breakage detector, looper thread and needle thread and breakage detector.