



(22) **Date de dépôt/Filing Date:** 2009/02/17

(41) **Mise à la disp. pub./Open to Public Insp.:** 2009/08/27

(45) **Date de délivrance/Issue Date:** 2016/07/19

(30) **Priorité/Priority:** 2008/02/27 (GB0803517.2)

(51) **Cl.Int./Int.Cl.** *E21B 33/10* (2006.01),
E21B 33/12 (2006.01)


(72) **Inventeurs/Inventors:**
NUTLEY, KIM, GB;
NUTLEY, BRIAN, GB;
ROBITAILLE, GLEN, GB

(73) **Propriétaire/Owner:**
SWELLTEC LIMITED, GB

(74) **Agent:** PARLEE MCLAWS LLP

(54) **Titre :** GARNITURE D'ETANCHEITE GONFLABLE, PROCEDES DE FABRICATION ET UTILISATION

(54) **Title:** SWELLABLE PACKER, METHODS OF MANUFACTURE AND USE

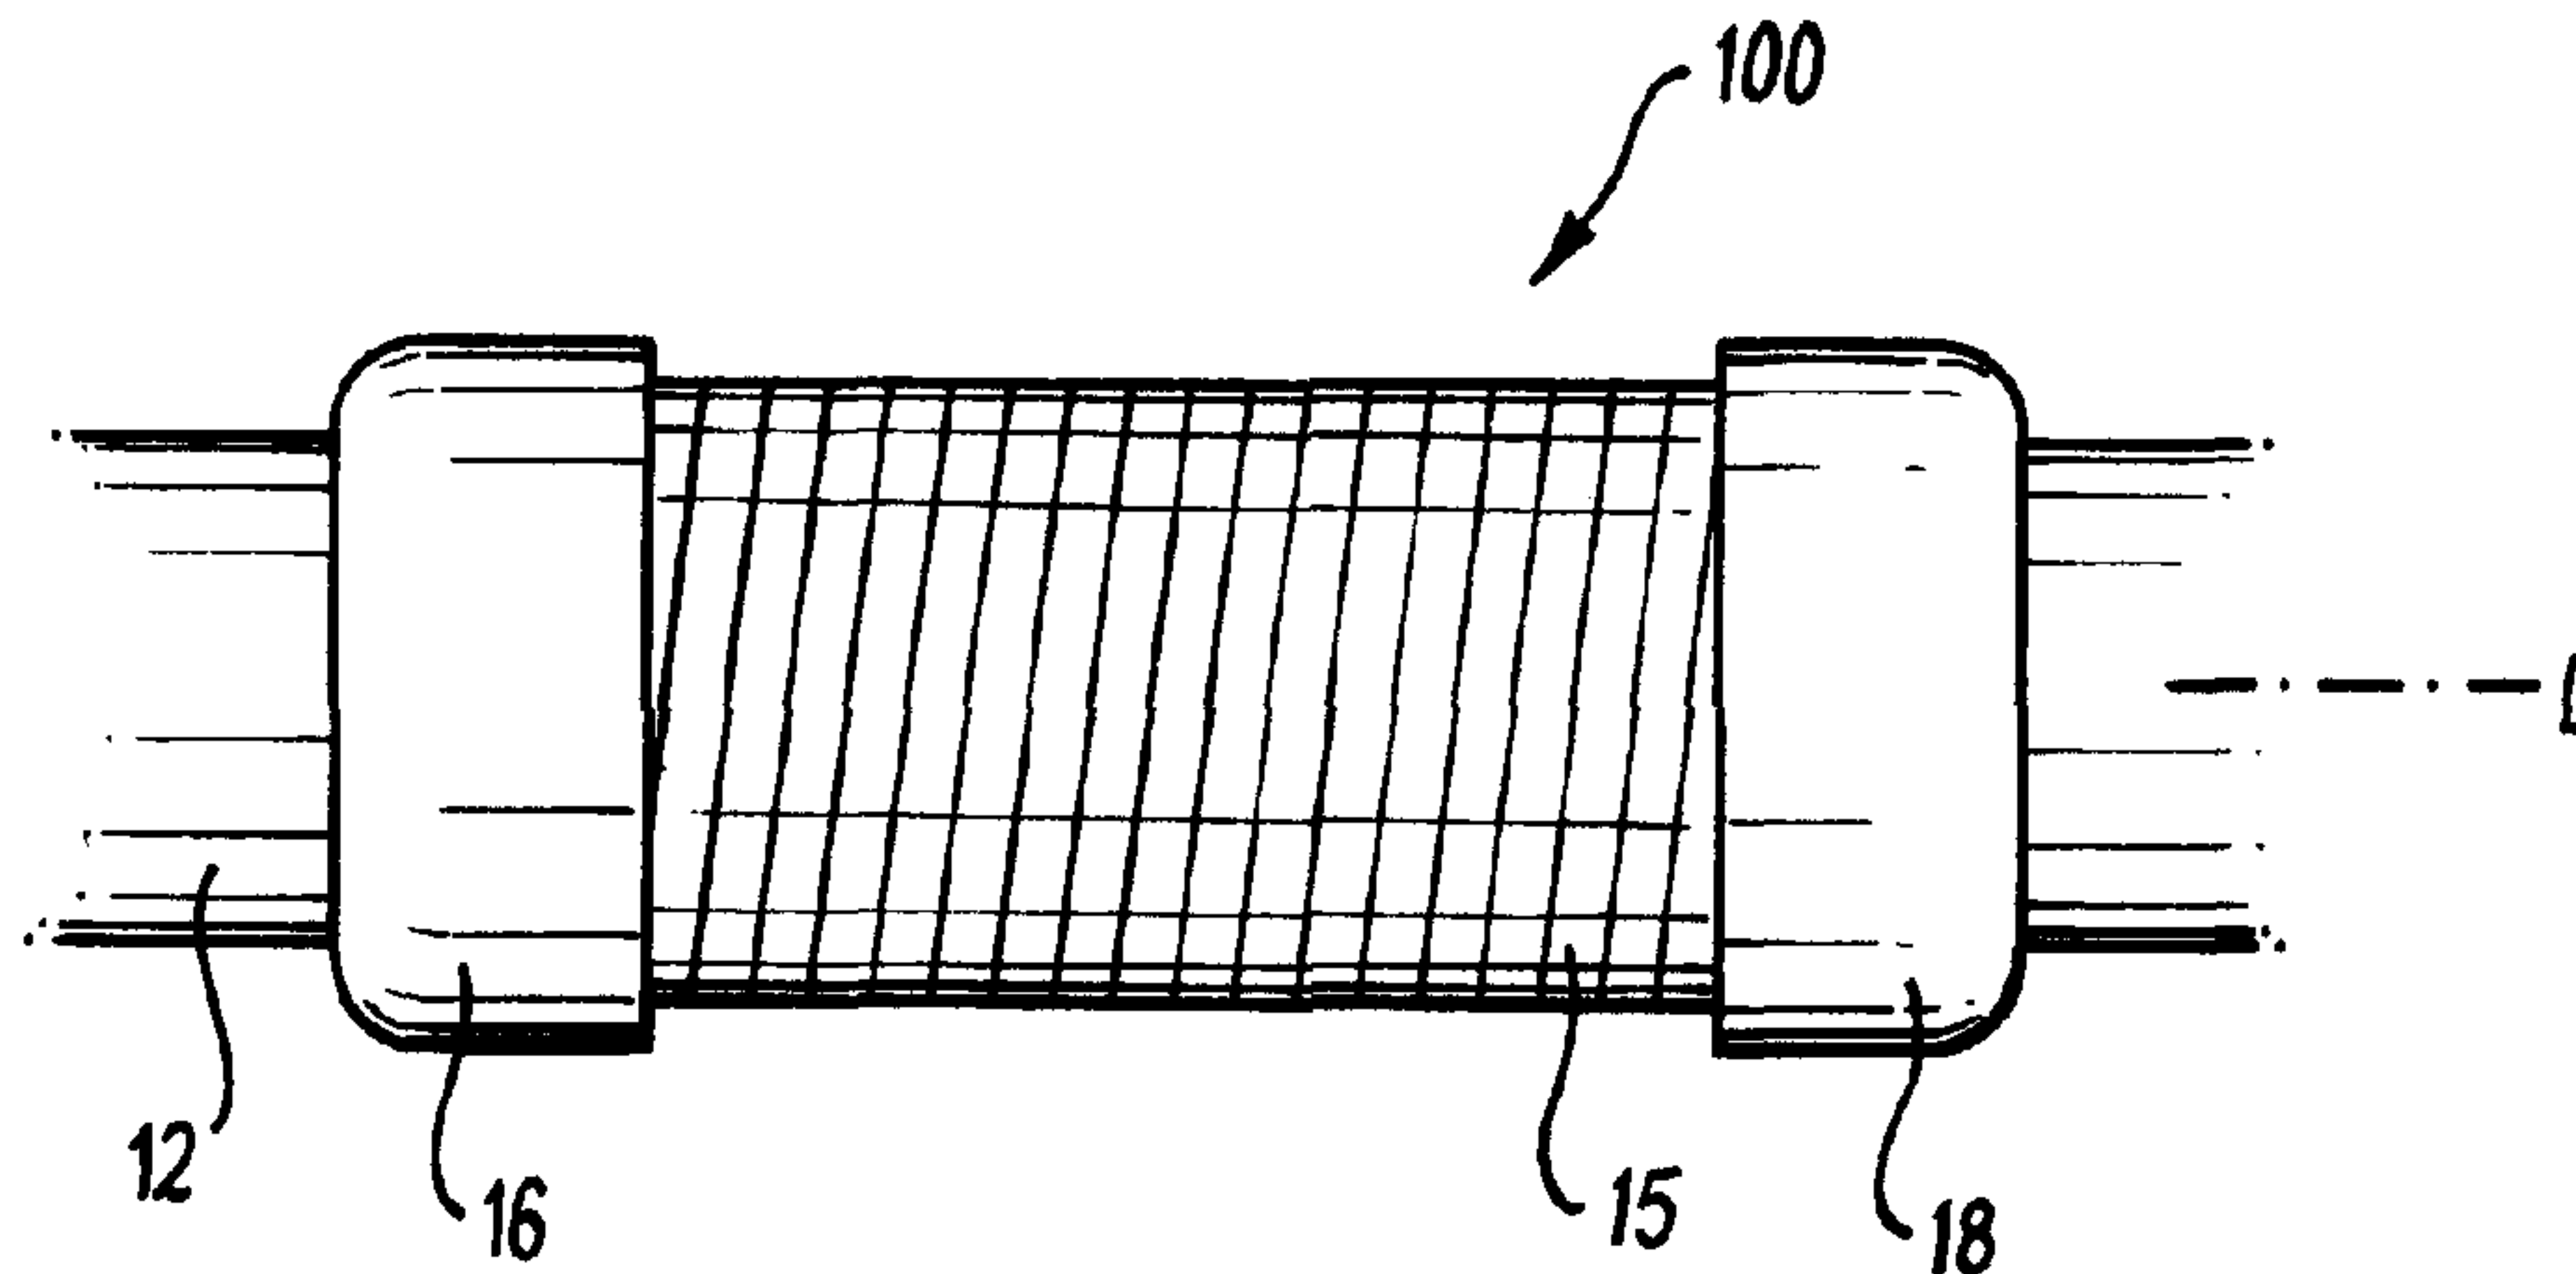

(57) **Abrégé/Abstract:**

A downhole apparatus is described comprising a body and a sealing arrangement located on the body. The body has a longitudinal axis and the sealing arrangement comprises at least one elongated sealing member with an axis of elongation extending around the longitudinal axis. The sealing member comprises a material selected to expand on exposure to at least one predetermined fluid, such as a hydrocarbon or aqueous fluid encountered in a wellbore. A method of forming the apparatus and methods of use are described. Embodiments of the invention relate to wellbore packers.



1

ABSTRACT

2

3

4

5

6

7

8

9

10

11

A downhole apparatus is described comprising a body and a sealing arrangement located on the body. The body has a longitudinal axis and the sealing arrangement comprises at least one elongated sealing member with an axis of elongation extending around the longitudinal axis. The sealing member comprises a material selected to expand on exposure to at least one predetermined fluid, such as a hydrocarbon or aqueous fluid encountered in a wellbore. A method of forming the apparatus and methods of use are described. Embodiments of the invention relate to wellbore packers.

SWELLABLE PACKER, METHODS OF MANUFACTURE AND USE**FIELD OF THE INVENTION**

The present invention relates to apparatus for use downhole or in pipelines, in particular in the field of oil and gas exploration and production. The invention also relates to components for and methods of forming downhole apparatus.

BACKGROUND OF THE INVENTION

In the field of oil and gas exploration and production, various tools are used to provide a fluid seal between two components in a wellbore. Isolation tools have been designed for sealing an annulus between two downhole components to prevent undesirable flow of wellbore fluids in the annulus. For example, a packer may be formed on the outer surface of a completion string which is run into an outer casing or an uncased hole. The packer is run with the string to a downhole location, and is inflated or expanded into contact with the inner surface of the outer casing or open hole to create a seal in the annulus. To provide an effective seal, fluid must be prevented from passing through the space or micro-annulus between the packer and the completion, as well as between the packer and the outer casing or openhole.

Isolation tools are not exclusively run on completion strings. For example, in some applications they form a seal between a mandrel which forms

1 part of a specialised tool and an outer surface. In other applications they may be
2 run on coiled tubing, wireline and slickline tools.

3

4 Conventional packers are actuated by mechanical or hydraulic
5 systems. More recently, packers have been developed which include a mantle of
6 swellable elastomeric material formed around a tubular body. The swellable
7 elastomer is selected to expand on exposure to at least one predetermined fluid,
8 which may be a hydrocarbon fluid or an aqueous fluid. The packer may be run to
9 a downhole location in its unexpanded state, where it is exposed to a wellbore
10 fluid and caused to expand. The design, dimensions, and swelling characteristics
11 are selected such that the swellable mantle expands to create a fluid seal in the
12 annulus, thereby isolating one wellbore section from another. Swellable packers
13 have several advantages over conventional packers, including passive actuation,
14 simplicity of construction, and robustness in long term isolation applications.
15 Examples of swellable packers are described in GB 2411918.

16

17 Swellable packers, according to the prior art, are formed on a
18 tubular body having expanding mantle of cylindrical form located around the
19 body. The expanding mantle is formed from a material selected to expand on
20 exposure to at least one predetermined fluid. Such materials are known in the
21 art, for example from GB 2411918. Dimensions of the packer and the
22 characteristics of the swellable material of the expanding portion are selected
23 such that the expanding portion forms a seal in use, which substantially prevents
24 the flow of fluids in an annulus past the body. On exposure to a wellbore fluid in

1 the annulus, in this case a hydrocarbon fluid, the expanding portion expands and
2 its outer diameter increases until it contacts the surface of the wellbore to create
3 a seal in the annulus. The seal prevents flow of fluid in the wellbore annulus
4 between a volume above the packer and a volume below the packer. Packers
5 can be used in an uncased hole. Packers can also be used in a cased hole, in
6 which case the mantle would form a seal against the interior surface of outer
7 casing.

8
9 Typically a packer will be constructed for a specific application and
10 incorporated into a casing string or other tool string by means of threaded
11 couplings. Swellable packers are typically constructed from multiple layers of
12 uncured elastomeric material, such as EPDM. Multiple layers are overlaid on a
13 mandrel or tubular in an uncured form to build up a mantle of the required
14 dimensions. The mantle is subsequently cured, e.g. by heat curing or air curing.
15 The outer surface of the swellable mantle is then machined using a lathe to
16 create a smooth cylindrical surface. This method produces a fully cured, unitary
17 swellable mantle capable of sealing large differential pressures. However, the
18 process is generally labour-intensive and time consuming, and the uncured
19 material can be difficult to handle. Moreover, the resulting expanding portion,
20 although robust and capable of withstanding high pressures, may be ill-suited to
21 some downhole applications.

22
23 In wellbore construction cement is used to seal an annulus between
24 a casing section and an openhole, or an annulus between two concentric

1 tubulars, to prevent undesirable fluid flow to surface. Large volumes of cement
2 are required to seal an annulus from a casing point back to surface, and when
3 the casing is cemented into place, the cement forms a structural component of
4 the wellbore.

5

6 There is generally a need to provide sealing mechanisms and
7 isolation tools and systems which may be manufactured and assembled more
8 efficiently than in the case of the prior art, and which are flexible in their
9 application to a variety of wellbore scenarios.

10

11 SUMMARY OF THE INVENTION

12 According to a first aspect of the invention there is provided a
13 downhole apparatus comprising: a body having a longitudinal axis and a sealing
14 arrangement located on the body. The sealing arrangement comprises at least
15 one elongated sealing member with an axis of elongation extending around the
16 longitudinal axis of the body, and further comprises a material selected to expand
17 on exposure to at least one predetermined fluid.

18

19 The axis of elongation is an axis along which the sealing member is
20 elongated, or lengthened, with respect to the dimensions in a perpendicular axis
21 or axes of the sealing member. In other words it is the longitudinal axis of the
22 member.

23

1 The sealing arrangement may have an expanded condition in which
2 an annular seal is formed. The annular seal may be formed between the body
3 and a surface external to the body, which may be substantially concentric with
4 the body. In this instance, the sealing arrangement may be formed on an outer
5 surface of the body, and the seal may be in an annulus formed between the body
6 and the surface external to the body. The surface may be the internal surface of
7 a casing or an uncased borehole. The downhole apparatus may therefore form
8 an annular seal, which may substantially prevent fluid flow past the body.

9
10 The downhole apparatus preferably forms a part of an isolation tool
11 or an isolation system for sealing one region of the annulus above the apparatus
12 from another region of the annulus below the apparatus.

13
14 The body may be a substantially cylindrical body, and may be a
15 tubular or a mandrel. The sealing member may extend circumferentially around
16 the body. The sealing member may extend around the outer surface of the body,
17 or may extend around an inner surface of the body.

18
19 The sealing member may form an expanding portion, which may be
20 substantially cylindrical in form and may extend over a length of the body. The
21 expanding portion may extend over a length of the body which is greater than the
22 width of the elongated sealing member.

23

1 By creating a sealing arrangement from an elongated sealing
2 member, it may be easier to assemble the apparatus when compared with
3 conventional slip-on apparatus. For example, the expanding portion could be
4 formed by securing a first end and a second end of the elongated member to the
5 body at a part of the body which is axially displaced from an end of the body. For
6 example, the apparatus could be formed on a central 2 metre portion of a 12
7 metre casing section.

8
9 An annular seal may be formed between the body and a surface
10 internal to the body, which may be substantially concentric with the body. In this
11 instance, the sealing arrangement may be formed on an inner surface of the
12 body, and the seal may be in an annulus formed between the body and the
13 surface internal to the body. The surface may be the outer surface of a second
14 body, which may be a casing.

15
16 The elongated sealing member may be a strip, band, ribbon, bead,
17 tape, rod, cable, conduit or another elongated form.

18
19 The sealing arrangement may consist of a single turn of the
20 elongated member, but preferably comprises a plurality of turns. Preferably, the
21 elongated member is coiled on the body.

22
23 The plurality of turns may be formed such that a lower edge of a
24 turn is adjacent to an upper edge of a successive turn. The lower edge of a turn

1 may abut an upper edge of a successive turn, and may create a seal with the
2 upper edge of the successive turn. Alternatively, successive turns may be
3 spaced from one another.

4

5 The elongated sealing member may comprise a material selected to
6 expand or increase in volume on exposure to a hydrocarbon fluid, and which may
7 be an EPDM rubber. Alternatively, or in addition, the elongated sealing member
8 may comprise a material selected to expand on exposure to an aqueous fluid,
9 which may comprise a super-absorbent polymer.

10

11 The sealing member may be formed by an extrusion process, which
12 may be a co-extrusion of two or more materials. The two materials may both be
13 selected to expand on exposure to at least one predetermined fluid, but may be
14 selected to differ in one or more of the following characteristics: fluid penetration,
15 fluid absorption, swelling coefficient, swelling rate, elongation coefficient,
16 hardness, resilience, elasticity, and density. At least one material may comprise
17 a foam. The material may be foamed through the addition of blowing agents. In
18 some applications this will aid fluid absorption leading to faster swell rates and
19 higher maximum swell volumes.

20

21 Alternatively, or in addition, the sealing member may be formed
22 from an extrusion around a substrate.

23

1 In an embodiment the sealing member comprises one or more
2 expanding components coupled to a core, a layer or another elongate
3 component, which may have different physical properties to the expanding
4 component. Advantageously the expanding component or components will at
5 least partially encapsulate the elongate component to facilitate the provision of a
6 seal.

7
8 The core may be a coated or uncoated cable or control line, and/or
9 may comprise an expanding material. This embodiment has the advantage that
10 a sealing member can be created with different properties by the combination of
11 sheaths and cores of different designs. For example, the sheath may be used to
12 encapsulate a core of expanding material having a different swelling
13 characteristic to create a hybrid sealing member. The core may function as the
14 substrate, or may be arranged to convey a fluid or a signal through the sealing
15 member.

16
17 Alternatively, or in addition, the sealing member may comprise a
18 substrate and means for attaching an expanding component to the substrate.
19 The expanding component may comprise formations configured for attachment to
20 a substrate and/or a recess for receiving a substrate. The expanding component
21 may comprise a formation configured to receive an elongate component. The
22 formation may be resilient and may retain the elongate component, for example
23 by partially or fully surrounding the elongate component. The expanding
24 component may comprise a substantially u-shaped or c-shaped profile which

1 defines a longitudinal groove. The expanding component may comprise a clip-on
2 member that clips around an elongate component, and may be bonded in
3 position through the use of an adhesive or other bonding agent.

4

5 The sealing member may comprise a substrate which extends
6 longitudinally to the member. The substrate may comprise a core, or may
7 comprise a strip, band, ribbon, bead, tape, rod, cable, conduit or another
8 elongated form. The substrate may comprise plastic, metal, fibrous, woven, or
9 composite material. The substrate may function to provide structural strength to
10 the sealing member, allow more tension to be imparted during application to a
11 body, bind to the swellable material, resist expansion of the sealing member in a
12 longitudinal direction, and/or resist swaging of the sealing member on the body.

13

14 The sealing member may comprise a conduit, which may be
15 longitudinally oriented. The conduit may be formed by the substrate, or may be
16 an open conduit. The conduit may be used to convey fluid, a cable, a control line,
17 or a signal internally of the sealing member. The conduit may allow fluid access
18 to the material of the sealing member from the interior of the conduit. In this way,
19 the expansion of the sealing member may be triggered, at least in part, by fluid
20 delivered through the sealing member.

21

22 The sealing member may couple control equipment on one side of
23 a seal created by the apparatus to an apparatus on an opposing side of the seal.
24 For example, the sealing member may comprise a power cable, a control line, a

1 hydraulic line, or a data cable which runs from surface to an apparatus located
2 below a seal created by the apparatus.

3

4 The elongated sealing member may comprise a substantially
5 rectangular cross-sectional profile. Alternatively, or in addition, the elongated
6 sealing member may comprise an interlocking profile, which may be configured
7 such that a first side of the sealing member has a shape corresponding to the
8 shape of the second, opposing side of the sealing member. The interlocking
9 profile may be configured such that a first side of a turn of the sealing member on
10 the body interlocks with a second, opposing side of an adjacent turn of a sealing
11 member on the body. The interlocking profile may resist lateral separation of
12 adjacent turns, and/or may resist relative slipping of adjacent turns. A bonding
13 agent may be used to secure a first side of the sealing member to the shape of
14 the second, opposing side of the sealing member. Where an interlocking profile
15 is provided, the sealing member may be further secured through the use of an
16 adhesive or other bonding agent.

17

18 The sealing member may have a profile configured for interlocking
19 multiple layers of a sealing member on the body. The sealing member may have
20 a stepped profile, a T-shaped profile or a triangular profile. The sealing member
21 according to one embodiment comprises a flat first surface and a longitudinal
22 spine protruding from an opposing surface. The sealing member may comprise
23 stepped side surfaces.

24

1 The apparatus may further comprise means for securing the sealing
2 member to the body, which may comprise a bonding agent. Alternatively, or in
3 addition, the apparatus may comprise a mechanical attachment means for
4 securing the sealing member to the body, which is preferably an end ring. The
5 mechanical attachment means may be clamped onto the body, and may
6 comprise a plurality of hinged clamping members. Alternatively, mechanical
7 attachment means is configured to be slipped onto the body.

8
9 The mechanical attachment means may comprise a formation for
10 receiving an end of the sealing arrangement, which may be an enlarged bore.
11 The mechanical attachment means may comprise an engaging formation for
12 engaging a part of the sealing member, which may be a longitudinal formation.
13 The engaging formation may comprise teeth for engaging the sealing member.
14 Alternatively or in addition, the engaging formation may comprise crimp portions.

15
16 In one embodiment, the engaging formation comprises threads
17 configured to cooperate with the sealing member.

18
19 In a further embodiment, the mechanical attachment means
20 comprises means for imparting tension into the elongated sealing member. The
21 mechanical attachment means may comprise a ratchet mechanism. The
22 mechanical attachment means may comprise an engaging portion, for engaging
23 the elongated member, and a retaining portion, for retaining the mechanical
24 attachment means with respect to the body. The engaging portion may be

1 rotatable with respect to the retaining portion, and a ratchet mechanism may be
2 disposed between the engaging and retaining portions.

3

4 The mechanical attachment means may comprise a release
5 mechanism, which may be actuable from surface and/or by a downhole
6 intervention. The release mechanism may be actuable to release tension in the
7 elongated member. In one embodiment, the release mechanism is actuable to
8 release a ratchet. The release mechanism may comprise at least one frangible
9 member, such as a shear pin.

10

11 In one embodiment, the mechanical attachment means is
12 configured to be disposed on a coupling of a tubular, and may be referred to as a
13 cross-coupling mechanical attachment means. Such a mechanical attachment
14 means comprises an internal profile configured to correspond to the outer profile
15 of the coupling, which may be raised with respect to the outer diameter of the
16 tubular. This embodiment may be particularly advantageous where an expanding
17 portion is required over the entire length of a tubular between couplings. The
18 cross-coupling mechanical attachment means may comprise hinged clamps,
19 swing bolt locking mechanisms, strap fasteners or other attachment means. The
20 cross-coupling mechanical attachment may be wholly or partially cast from a
21 metal (such as steel) or a plastic material.

22

23 The elongated member may comprise an attachment portion
24 configured to be secured to the body. The attachment portion may comprise a

1 formation configured to engage with mechanical attachment means of the
2 apparatus. The attachment portion preferably comprises a termination, which
3 may be a socket termination. The attachment portion may be crimped, bonded,
4 screwed, or otherwise attached to the elongated member. In embodiments
5 where the elongated member comprises a substrate, the attachment portion may
6 be attached direct to the substrate.

7

8 The apparatus may be configured as a packer, a liner hanger, or an
9 overshot tool.

10

11 The apparatus may be configured as a cable encapsulation
12 assembly, and may comprise a support element disposed between the body and
13 the sealing arrangement. The support element may be provided with a profile
14 configured to receive a cable, conduit or other line. The support element may
15 comprise a curved outer profile, and the assembly may define an elliptic outer
16 profile. Alternatively the support element may comprise a substantially circular
17 profile such that the assembly defines a circular outer profile.

18

19 According to a second aspect of the invention, there is provided a
20 sealing member for a downhole apparatus, the sealing member comprising a
21 material selected to expand on contact with at least one predetermined fluid,
22 wherein the sealing member is elongated and is configured to be located on a
23 body of a downhole apparatus such that its axis of elongation extends around the
24 longitudinal axis of the body.

1

2 The sealing member is preferably configured to form an annular
3 seal between a body and a surface external to the body, in use which may be
4 substantially concentric with the body. In this instance, the sealing member may
5 be configured for disposal on an outer surface of a body, and the seal may be in
6 an annulus formed between the body and the surface external to the body. The
7 surface may be the internal surface of a casing or an uncased borehole. The
8 sealing member is therefore configured to form an annular seal, which may
9 substantially prevent fluid flow past the body.

10

11 The sealing member may be configurable to form an expanding
12 portion, which may be substantially cylindrical in form and may extend over a
13 length of a body. The expanding portion may extend over a length of the body,
14 which may be greater than the width of the sealing member.

15

16 The sealing member may be configured for disposal between a
17 body and a surface internal to the body, which may be substantially concentric
18 with the body. In this instance, the sealing member may be configured for
19 disposal on an inner surface of the body, and the seal may be in an annulus
20 formed between the body and the surface external to the body. The surface may
21 be the outer surface of a second body, which may be a casing or an uncased
22 borehole.

23

1 The sealing member may be a strip, band, ribbon, bead, tape, rod,
2 cable, conduit or another elongated form.

3

4 The sealing member of the second aspect of the invention may
5 include one or more of the optional or preferred features of the sealing
6 member/elongated sealing member of the first aspect of the invention.

7

8 According to a third aspect of the invention there is provided a
9 method of forming a downhole apparatus, the method comprising the steps of
10 providing a body having a longitudinal axis, providing at least one elongated
11 sealing member comprising a material selected to expand on exposure to at least
12 one predetermined fluid, and forming a sealing arrangement on the body by
13 locating the at least one elongated sealing member on the body, with its axis of
14 elongation extending around the longitudinal axis of the body.

15

16 The method may comprise the step of forming multiple turns of the
17 elongated sealing member on the body.

18

19 The elongated sealing member may comprise a power cable for a
20 downhole apparatus.

21

22 According to a fourth aspect of the invention, there is provided a
23 method of forming a seal in a downhole environment, the method comprising the
24 steps of configuring a sealing apparatus from a body and at least one elongated

1 sealing member arranged on the body and comprising a material selected to
2 expand on exposure to at least one predetermined fluid, running the sealing
3 apparatus to a downhole location such that the sealing apparatus is disposed
4 adjacent a surface, and exposing the elongated sealing member to at least one
5 fluid to expand it to an expanded condition, in which a seal is created between
6 the body and the surface.

7

8 According to a fifth aspect of the invention, there is provided
9 method of constructing a wellbore, the method comprising the steps of
10 assembling a first casing string from a plurality of casing sections, forming at
11 least one sealing arrangement on the casing from at least one elongated sealing
12 member comprising a material selected to expand on exposure to at least one
13 predetermined fluid, running the first casing string to a downhole location, and
14 exposing the sealing arrangement to at least one wellbore fluid, thereby
15 expanding the sealing arrangement into contact with a downhole surface.

16

17 The method may comprise the step of forming sealing
18 arrangements over a majority of the length of the casing string. The downhole
19 surface may be the surface of an openhole, or may be the surface of a downhole
20 casing.

21

22 The method may further comprise the step of running a second
23 casing string inside the first casing string. The method may comprise the step of
24 forming at least one sealing arrangement on the second casing from at least one

1 elongated sealing member comprising a material selected to expand on exposure
2 to at least one predetermined fluid.

3

4 The method may also further comprise the step of exposing the
5 sealing arrangement of the second casing to at least one wellbore fluid, thereby
6 expanding the sealing arrangement into contact with the first casing string. The
7 method may be repeated with third, fourth and other casing strings.

8

9 Thus the invention provides a method of wellbore construction in
10 which a sealing arrangement formed from an elongated sealing member is
11 located between concentric casings. Such an arrangement may be used as an
12 alternative to cemented completions, or in conjunction with cement to provide an
13 enhanced sealing capability.

14

15 According to a sixth aspect of the invention, there is provided a
16 wellbore packer comprising an expanding portion formed from an elongated
17 sealing member coiled around a body, the elongated sealing member comprising
18 a material selected to expand on exposure to at least one predetermined fluid.

19

20 In one aspect of the invention, the sealing member is a power
21 cable, which may be a power cable for an Electrical Submersible Pump (ESP).

22

23 According to a seventh aspect of the invention, there is provided an
24 elongated member for forming a wellbore packer, the elongated member

1 comprising a material selected to expand on exposure to at least one
2 predetermined fluid.

3

4 According to an eighth aspect of the invention, there is provided a
5 storage reel comprising a length of elongated member in accordance with any of
6 the above aspects of the invention.

7

8 According to a ninth aspect of the invention, there is provide an
9 overshot tool comprising a tubular body and an opening configured to be
10 disposed over a body to be coupled in use, and a sealing arrangement arranged
11 on the inner surface of the tubular body, wherein the sealing arrangement
12 comprises at least one elongated sealing member with an axis of elongation
13 extending around the longitudinal axis of the body, and the sealing member
14 comprises a material selected to expand on exposure to at least one
15 predetermined fluid.

16

17 The overshot tool may be configured to form part of an expansion
18 joint. The body may be a mandrel, which may have a low friction surface.
19 Alternatively or in addition, the body may be an end of a tubular in a downhole or
20 subsea location.

21

22 The sixth to the ninth aspects of the invention may include one or
23 more of the optional or preferred features of the sealing member/elongated
24 sealing member of the first aspect of the invention.

1
2 The terms “upper”, “lower”, “above”, “below”, “up” and “down” are
3 used herein to indicate relative positions in the wellbore. The invention also has
4 applications in wells that are deviated or horizontal, and when these terms are
5 applied to such wells they may indicate “left”, “right” or other relative positions in
6 the context of the orientation of the well.

7
8 BRIEF DESCRIPTION OF THE DRAWINGS

9 Figure 1 is a side view of a prior art wellbore packer;
10

11 Figures 2A and 2B are schematic cross-sectional views of a prior
12 art wellbore packer in use in unexpanded and expanded conditions respectively;
13

14 Figure 3 is a side view of a packer in accordance with an
15 embodiment of the invention;
16

17 Figure 4 is a perspective view of a part of a sealing member in
18 accordance with the first embodiment of the invention;
19

20 Figures 5A to 5C are schematic views of the apparatus of Figure 3
21 in various stages of construction;
22

23 Figure 6 is a longitudinal section through the apparatus of Figure 3;
24

1 Figure 7A is a side view showing some internal details, and Figure
2 7B is a longitudinal sectional view through an apparatus in accordance with an
3 alternative embodiment of the invention;

4

5 Figure 8 is a longitudinal section through an apparatus in
6 accordance with a further alternative embodiment of the invention;

7

8 Figure 9 is a longitudinal section through an apparatus in
9 accordance with a further alternative embodiment of the invention;

10

11 Figure 10 is a longitudinal section through an apparatus in
12 accordance with a further alternative embodiment of the invention;

13

14 Figure 11 is a longitudinal section through an apparatus in
15 accordance with a further alternative embodiment of the invention;

16

17 Figures 12A and 12B are schematic longitudinal views showing a
18 construction method according to an embodiment of the invention;

19

20 Figures 13A and 13B are schematic longitudinal views showing a
21 construction method according to an alternative embodiment of the invention;

22

23 Figure 14 is a schematic longitudinal view of a terminated sealing
24 member according to an alternative embodiment of the invention;

1

2

3

Figure 15 is a schematic longitudinal view of a terminated sealing member according to a further alternative embodiment of the invention;

4

5

6

Figure 16 is a perspective view of a part of a sealing member in accordance with an embodiment of the invention;

7

8

9

Figures 17A and 17B are cross-sectional views of sealing members in accordance with alternative embodiments of the invention;

10

11

12

Figure 18 is a side view of the sealing member of Figure 17A and longitudinal section through a termination according to one embodiment;

13

14

15

Figure 19 is a side view of the sealing member of Figure 17B and longitudinal section through a termination according to another embodiment;

16

17

18

Figures 20 to 26 are cross-sectional views of sealing members in accordance with further alternative embodiments of the invention;

19

20

21

Figure 27 is a longitudinal section through a sealing member in accordance with one embodiment of the invention;

22

23

24

Figures 28A and 28B are cross-sectional views of a sealing member according to a further alternative embodiment of the invention;

1

2 Figures 29A and 29B are schematic longitudinal views of a packer
3 constructed from the sealing member of Figure 24;

4

5 Figures 30 to 32 are cross-sectional views of sealing members in
6 accordance with further alternative embodiments of the invention;

7

8 Figures 33A and 33B are alternative cross-sectional views of a
9 sealing member in accordance with a further embodiment of the invention;

10

11 Figures 34A and 34B schematically show the application of the
12 sealing member of Figure 32 to a body;

13

14 Figures 35A and 35B schematically show the application of the
15 sealing member of Figure 33 and another sealing member to a body according to
16 one embodiment;

17

18 Figures 36A to 36B schematically show the application of the
19 sealing member of Figure 33 and another sealing member to a body according to
20 an alternative embodiment;

21

22 Figures 37 and 38 schematically show expanding portions formed
23 from sealing members according to alternative embodiments of the invention;

24

1 Figures 39 and 40 are cross-sectional views of sealing members in
2 accordance with further alternative embodiments of the invention;

3

4 Figure 41 is a perspective view of a sealing member in accordance
5 with a further alternative embodiment of the invention;

6

7 Figure 42 is a cross-sectional view of a sealing member in
8 accordance with a further alternative embodiment of the invention;

9

10 Figure 43 is a cross-sectional view of a cable encapsulation
11 assembly in accordance with an embodiment of the invention;

12

13 Figure 44 is a perspective view of a support element used in the
14 assembly of Figure 43;

15

16 Figure 45 is a cross-sectional view of a cable encapsulation
17 assembly in accordance with a further embodiment of the invention;

18

19 Figure 46 is a schematic view of a part of an overshot tool in
20 accordance with an embodiment of the invention; and

21

22 Figures 47A and 47B schematically show an application of the tool
23 of Figure 46 in accordance with an embodiment of the invention.

24

1 DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

2 Prior Art

3 Figure 1 of the drawings shows a swellable packer according to the
4 prior art, generally depicted at 10, formed on a tubular body 12 having a
5 longitudinal axis L. The packer 10 comprises an expanding mantle 14 of
6 cylindrical form located around the body 12. The expanding mantle 14 is formed
7 from a material selected to expand on exposure to at least one predetermined
8 fluid. Such materials are known in the art, for example from GB 2411918.

9
10 As illustrated in Figures 2A and 2B, the dimensions of the prior art
11 packer 10 and the characteristics of the swellable material of the expanding
12 portion 14 are selected such that the expanding portion forms a seal in use,
13 which substantially prevents the flow of fluids past the body 12. Figure 2A is a
14 cross-section through the prior art packer 10 located in a wellbore 20 in a
15 formation 22. On exposure to a wellbore fluid in the annulus 24, in this case a
16 hydrocarbon fluid, the expanding portion 14 expands and its outer diameter
17 increases until it contacts the surface 26 of the wellbore to create a seal in the
18 annulus 24. The seal prevents flow of fluid in the wellbore annulus between a
19 volume above the packer 10 and a volume below the packer 10.

20

21 Present Invention

22 Referring to Figure 3 of the drawings, there is shown schematically
23 an aspect of the invention embodied as a wellbore packer, generally depicted at
24 100, formed on a tubular body 12 having a longitudinal axis L. The packer 100

1 comprises an expanding portion 15 of cylindrical form located around the body 12
2 and a pair of end rings 16, 18 located respectively at opposing ends of the
3 expanding portion 15. The expanding portion 15 is formed from a material
4 selected to expand on exposure to at least one predetermined fluid. In this
5 embodiment, the swellable material is EPDM, selected to expand on exposure to
6 a hydrocarbon fluid. The functions of the end rings 16, 18 include: providing
7 stand-off and protection to the packer 100 and the tubular 12, axially retaining the
8 expanding portion 15, and mitigating extrusion of the expanding portion 15 in use.
9 The operation of the packer 100 can be understood from Figures 2A and 2B and
10 the accompanying text.

11

12 Figure 4 of the drawings shows a sealing member 30 used to form
13 packer 100. The sealing member 30 consists of an elongated band of the
14 swellable material which is used to form the expanding portion 15. In this
15 example, the sealing member 30 is extruded EPDM with a substantially
16 rectangular cross-sectional profile, and is fully cured. The sealing member 30
17 comprises a first end 32, and top, bottom and side surfaces 34, 36, 38 and 40
18 respectively. Figure 4 shows a short sample of the sealing member 30, which will
19 typically be formed in a continuous length of several tens or hundreds of metres.

20

21 Figures 5A to 5C illustrate how the sealing member 30 is applied to
22 body 12 to form the expanding portion 15 of the packer 100. The sealing
23 member 30 is deployed from a storage reel 42, on which several tens or
24 hundreds of metres of the sealing member is stored. The bottom surface 36 at

1 first end 32 is located on and attached to the outer surface of the tubular body 12
2 by a bonding agent, and a length of the sealing member proximal the first end is
3 coiled around the longitudinal axis L of the body 12. In this embodiment, the
4 bonding agent used is a cyanoacrylate-based adhesive, but other bonding agents
5 are suitable, including polyurethane-based adhesives, acrylic-based adhesives,
6 epoxy-based adhesives or silicone-based adhesives or sealants. The sealing
7 member 30 is further deployed and is coiled around the tubular body 12 and
8 bonded to its outer surface, as shown in Figure 5B, and is applied such that the
9 side surfaces of successive turns abut one another. Tension is applied to the
10 sealing member 30 during winding. Tension allows a seal to be created between
11 the sealing member and the body even when the sealing member is in its
12 unexpanded condition. To facilitate the application of the sealing member 30 to
13 the body and maintaining tension, the sealing member may be temporarily
14 secured to the body at its first end by a clamp (not shown). The sealing member
15 30 is applied to the body 12 over a length corresponding to the desired length of
16 the packer 100, shown in Figure 5C, which is selected according to the
17 application and pressure conditions it is required to withstand. The sealing
18 member 30 is cut to define second end 44, and the bottom surface 36 near to the
19 second end is bonded to the body 12.

20

21 The sealing member is thus coiled around the body 12 to create an
22 expanding portion 15 which is substantially cylindrical in form and extends over a
23 length of the tool. First and second rings 16, 18 are subsequently located over
24 the first and second ends of the expanding portion and secured to the body 12 by

1 means of threaded bolts (not shown). The resulting tool is shown in section in
2 Figure 6. The end rings have an internal profile to accommodate the raised (with
3 respect to the tubular body 12) profile of the expanding portion 15 and the
4 discontinuities in the ends of the expanding portion due to the cut ends 32, 44 of
5 the sealing member. In this embodiment, the end rings 16 and 18 are formed in
6 two hinged parts (not shown), which are placed around the expanding portion 15
7 and the tubular 12 from a position adjacent to the apparatus, and fixed together
8 using locking bolts (not shown). In alternative embodiments, the end rings are
9 unitary structures slipped onto the tubular 12 from one end. In a further
10 embodiment, the end rings may clamp over a fixed upset profile on the body 12,
11 such as a tubing or casing coupling. Such an embodiment may be particularly
12 advantageous where an expanding portion is required over the entire length of a
13 tubular between couplings, and may provide an improved anchoring force for the
14 end ring and the sealing member. In a further alternative embodiment, end rings
15 may not be required.

16

17 The dimensions of the packer 100 and the characteristics of the
18 swellable material of the sealing member 30 are selected such that the
19 expanding portion forms a seal in use, which substantially prevents the flow of
20 fluids past the body 12. The packer operates in the manner described with
21 reference to Figures 2A and 2B.

22

23 The expanding portion 15 thus resembles a swellable mantle as
24 used in conventional swelling packers, but offers several advantages and

1 benefits when compared with conventional packer designs. For example, the
2 sealing member 30 is economical to manufacture, compact to store, and easy to
3 handle when compared with the materials used in conventional swellable
4 packers.

5

6 The process of forming the packer offers several advantages.
7 Firstly, the process does not require specialised equipment requiring large
8 amounts of space or capital expenditure. The process can be carried out from a
9 central portion of the tubular body, by attaching a first end of the sealing member
10 and coiling it around the tubular, reducing the difficulties associated with slipping
11 tool elements on at an end of the tubular and sliding them to the required
12 location. This facilitates application of the sealing member to significantly longer
13 tubulars, and opens up the possibility of constructed packer on strings of tubing
14 on the rig floor immediately prior to or during assembly. The construction
15 process allows for a high degree of flexibility in tool design. For example, a
16 packer of any desired length can be created from the same set of components,
17 simply by adjusting the length over which the sealing member is coiled on the
18 tubular body. Packers and seals can be created on bodies and tubulars of a
19 range of diameters. The principles of the invention also inherently allow for
20 engineering tolerances in the dimensions of bodies on which the seal is created.

21

22 The resulting packer has increased surface area with respect to an
23 equivalent packer with an annular mantle, by virtue of the increased penetration
24 of the fluids into the expanding portion via the small spaces between adjacent

1 turns. This allows for faster expansion to the sealing condition. The elongated
2 sealing member also lends itself well to post-processing, for example perforating,
3 coating or performing analysis on a sample.

4

5 Figures 7A and 7B show a packer 110 in accordance with an
6 alternative embodiment of the invention. Figure 7A is a side view of a first end
7 and corresponding end ring 46 with some internal details shown, whereas Figure
8 7B is a section of the of the same apparatus through line B-B'. The packer 110 is
9 similar to the packer 100, formed on a tubular 12, having an expanding portion 15
10 formed from an elongated sealing member 30. However, the end ring 46 is
11 provided with a machined, longitudinal formation 48 configured to receive the first
12 end 32 of the sealing member. In this example, the first end 32 is located on the
13 tubular 12, and the end ring 46 is clamped over the sealing member 30, with the
14 end 32 located in the formation 48. An upper surface 50 of the recess 48 is
15 provided with engaging teeth 51 which function to impress against the top surface
16 34 of the sealing member and assist in securing it against the body. A portion of
17 the sealing member which is clear of the formation 48 is redirected in a
18 circumferential direction and the sealing member is coiled around the tubular in
19 the manner described with reference to Figure 5A to 5C. The end ring 48 assists
20 in securing the sealing member and may allow greater tension to be imparted
21 during application. In this embodiment, the sealing member 30 is bonded to the
22 tubular, but alternative embodiments may rely on the end rings and the applied
23 tension to retain the expanding portion in place. An identical end ring (not
24 shown) is provided at the opposing end of the packer 110.

1

2 Figures 8 to 11 show further alternative embodiments of packer
3 including variant end rings. In Figure 8, the packer 120 includes an end ring 58
4 includes an enlarged bore portion 60 shaped to fit over a part of the expanding
5 portion 15. The inner surface 62 of the enlarged bore portion 60 is provided with
6 engaging means in the form of a reverse thread 64. The thread 64 is shaped to
7 correspond with the helix defined by the sealing member 30, and in this
8 embodiment is received in spaces between adjacent turns of the sealing
9 member. The packer 120 is constructed by locating the sealing member 30 on
10 the body 12, and wrapping the sealing member to a length greater than the depth
11 of the enlarged bore 60. The end 66 of the expanding portion is cut such that it
12 defines a flat annular surface on a plane perpendicular to the longitudinal axis L
13 of the body. In other words, the end 66 is squared-off. The end ring 58 is slipped
14 onto the body 12 and threaded over the end 66 of the expanding portion. An
15 identical end ring (not shown) is provided at the opposing end of the packer 120.

16

17 In Figure 9, a further alternative end ring 68 is shown on a packer
18 130. The end ring 68 is similar to end ring 58, but differs in that it is constructed
19 from inner ring 70 and outer ring 72. The inner ring 70 has an internal bore
20 shaped to fit over the tubular body 12, and has a low profile compared with the
21 radial extent of the expanding portion 15. The inner ring 70 and the outer ring 72
22 are threaded together by threaded section 74 and together define an annular
23 recess 75 for the sealing member. Surfaces of the recess 75 are provided with
24 reverse threads 76, 77, shaped to correspond with the helix defined by the

1 sealing member 30. During construction, the inner ring 70 is located on the body
2 12, and the sealing member is wrapped around the inner ring 70 and along the
3 length of the body 12. The outer ring 72 is later threaded into engagement with
4 the inner ring 70 and over the end of the expanding portion.

5

6 Figure 10 illustrates a further end ring design 78 as part of a packer
7 140. The end ring 78 has an enlarged bore 80 to receive the end of the
8 expanding portion 15. The end ring 78 is crimped into engagement with the end
9 of the expanding portion 15. To facilitate crimping, the end ring 78 has crimp
10 portions 82, which are relatively malleable with respect to the main body of the
11 ring, distributed around the outer circumferential surface of the ring. In this
12 embodiment, two axially separated groups of crimp portions 84 and 86 are
13 provided. The Figure shows the crimp portions in a depressed state into
14 engagement with the expanding portion.

15

16 Figure 11 shows a further alternative end ring 88 on a packer 150.
17 In this embodiment, the end ring 88 includes a ratchet mechanism 89, and is
18 formed from retaining ring 90 and an engaging ring 92. The engaging ring 92 is
19 axially keyed with the retaining ring 90, which in turn is secured to the body 12.
20 The engaging ring has an enlarged bore portion 94 for receiving the expanding
21 portion 15. The ratchet mechanism 89 is disposed between the engaging ring 92
22 and the retaining ring 90, and allows one-way relative rotation. Formations 96
23 are located in the outer surface of the engaging ring to assist with the
24 engagement of a tool to rotate the ring. In this embodiment, the end of the

1 sealing member 30 is secured to the engaging ring, and as the sealing member
2 30 is coiled the ratchet prevents rotation of the engaging ring. When the
3 expanding portion is formed and the second end is secured, the engaging ring
4 may be rotated to impart tension into the sealing member. The tension is
5 retained by virtue of the ratchet mechanism 89.

6

7 The second, opposing end of the packer 150 is provided with a
8 similar ratcheted end ring (not shown), configured to impart tension into the
9 sealing member from its other end. However, in some embodiments the
10 ratcheted end ring may only be used at one end, and may be sufficient to impart
11 tension through the length of the sealing member. In another embodiment (not
12 illustrated) a ratcheted ring is located between two expanding portions, and may
13 have an engaging ring which receives an end of a sealing portion from each
14 expanding portion. The engaging ring can be rotated to impart tension into both
15 sealing members, with the tension retained by the ratchet. In this embodiment,
16 the expanding portions would be formed from sealing members coiled on the
17 tubular in opposite senses.

18

19 Further alternative embodiments of the invention include an end
20 ring which is operable to be released, thereby releasing tension in the sealing
21 member and breaking the seal. For example, the ratcheted end ring of Figure 11
22 may be adapted to include a set of shear pins, such that an actuation from
23 surface, for example by the application of an axial force on the end ring, shears
24 the pins and allows the engaging ring to rotate with respect to the retaining ring.

1 This releases tension in the sealing member, and introduces a failure mode
2 between the body and the sealing member which ultimately breaks the seal and
3 allows the packer to be retrieved.

4

5 In an alternative construction technique (not illustrated) a length of
6 elongated sealing member is preformed around a formation mandrel into a helical
7 coil to a predetermined length. The sealing member is treated such that the
8 helical shape remains when it is removed from the mandrel. The helical coil is
9 then slipped onto a tubular body to a required location, and secured using end
10 rings as described above. Ratcheted end rings may be used to impart tension
11 into the sealing member.

12

13 Figures 12A and 12B show an alternative embodiment of packer
14 160 and construction method in schematic form. An expanding portion 15 is
15 formed on a tubular 12 by the method described with reference to Figure 5A to
16 5C. A tubular sheath 98 of flexible material is slipped onto the tubular 12, and
17 moved towards the expanding portion 15. The sheath 98 is resilient and elastic,
18 and stretched over the expanding portion 15 into the position shown in Figure
19 12B. The sheath 98 has a containing and protective function to the expanding
20 portion 15 in use, and is sufficiently elastic to accommodate the expansion of the
21 expanding portion 15. The sheath also allows control of the expansion rates of
22 the expanding portion, by providing a layer between wellbore fluids and the
23 swellable material, and effectively reducing the surface area by covering the
24 spaces between adjacent turns. The material of the sheath can be selected to

1 impervious to one or wellbore fluids, or can allow diffusion of wellbore fluids to the
2 surface of the expanding portion. The sheath may also be perforated to increase
3 access of wellbore fluids to the swellable material of the expanding portion. In
4 other embodiments, the sheath is dissolved or otherwise disintegrated on
5 exposure to wellbore fluids.

6

7 The curing state of an elastomer can be conveniently indicated
8 using a scale, where a T100 curing state represents fully cured and cross-linked
9 elastomer and has a corresponding curing time for a known temperature and
10 pressure. T100 represents 100 percent of the time required to reach a fully cured
11 state, T90 represents 90 percent of the T100 time and so on. An elastomer in its
12 T90 state or above may be referred to as substantially fully cured, whereas an
13 elastomer in its T30 to T90 state may be considered to be partially cured or in a
14 semi-cured state. A substantially cured elastomer is one that exhibits similar
15 mechanical properties and handling characteristics to a fully cured elastomer.

16

17 Figures 13A and 13B are schematic views of an alternative
18 construction method in accordance with the invention. In this embodiment, the
19 sealing member 31 is applied to a tubular 12 in a semi-cured state, which in this
20 example is a T50 state, but in other embodiments could be a P30 state or lower.
21 However, a semi-cured state in the range of T30 to T70 is preferred. Heat is then
22 applied to the apparatus by passing hot air through the tubular in the direction of
23 the arrows 101 in Figure 13A. Figure 13B is a detailed schematic view showing
24 heat conducted through the wall of the tubular 12, and the effect of completing

1 the curing to a substantially cured state (T90 or above) at the interfaces 102
2 between adjacent turns of the sealing member 31. This increases the integrity of
3 the expanding portion 15. In other embodiments, the heat may be applied using
4 alternative means.

5

6 Figure 14 shows an alternative embodiment of sealing member,
7 shown generally at 170. The sealing member 170 comprises a crimp-on terminal
8 104 on the end 106 of the sealing member. The terminal 104 has crimp portions
9 which are relatively malleable with respect to the main body of the terminal,
10 distributed around the outer circumferential surface. In this embodiment, two
11 axially separated groups of crimp portions 108 and 112 are provided. The Figure
12 shows the crimp portions in a depressed state in engagement with the sealing
13 member. The terminal also comprises an end flange 114 which defines a
14 shoulder 116. The flange 114 and shoulder 116 provide an engagement
15 mechanism for a corresponding surface secured to the body 12, for example the
16 ratcheted end ring of Figure 11, allowing improved retention of the sealing
17 member.

18

19 Figure 15 shows an alternative embodiment of sealing member,
20 shown generally at 180, comprising a socket termination 118 on the end of the
21 sealing member. The termination comprises a male portion 120 configured to be
22 received in a corresponding recess secured to the body 12, for example a recess
23 provided in an end ring. The termination 118 is secured to the sealing member in
24 this case by threaded screws 122.

1

2 Figure 16 shows in cross-section a sealing member 190 in
3 accordance with an alternative embodiment of the invention. Sealing member
4 190 is similar to the sealing member 30 of Figure 4, but differs in that it is co-
5 extruded from two different materials to create an elongated member having
6 different material components. The member 190 has an outer layer 124 of a first
7 material and a core 126 of a second material. Suitable manufacturing techniques
8 would be known to one skilled in the art of extrusion and co-extrusion of polymers
9 and elastomers.

10

11 The outer layer 124 is of an EPDM rubber selected to expand on
12 exposure to a hydrocarbon fluid, and having specified hardness, fluid penetration,
13 and swelling characteristics suitable for downhole applications. The core 126 is
14 an EPDM rubber which has a greater degree of cross-linking between molecules,
15 compared with the material of the outer layer, and correspondingly has greater
16 hardness, lower fluid penetration, and lower swelling characteristics than the
17 outer layer. The core 126 also has a greater mechanical strength, and functions
18 to increase the strength of the member as a whole when compared with sealing
19 member 30. This allows more tension to be applied and retained in the sealing
20 member during the construction process, and reduces any tendency of the
21 sealing member to swage.

22

23 In another embodiment, the density of the sealing member is
24 changed over its cross-section to create an increased porosity-permeability

1 structure which leads to more rapid swell rates and higher swell volumes. This
2 may be achieved by foaming the extruded member through the addition of
3 blowing agents. Foaming can be effected over a part of the cross-section of the
4 swellable member, to allow a greater porosity-permeability structure to be setup
5 inside the sealing member. Co-extrusions of a foamed core with an overlying
6 solid elastomer, or vice versa, can allow hybrid sealing members to be created
7 having, for example with a high water swelling core and an oil swelling outer
8 mantle.

9
10 Figure 17A shows in cross-section a sealing member 200 in
11 accordance with a further alternative embodiment of the invention. Sealing
12 member 200 is similar to the sealing member 30 of Figure 4, but differs in that it
13 is extruded with a substrate 128. The substrate is in this example a ribbon,
14 formed from a suitably malleable metal or metal alloy such as aluminium. In this
15 example, the substrate is co-extruded with the sealing member. In alternative
16 embodiments the substrate is selected from a plastic material, a fibrous material
17 or a composite material, and which may be formed using an appropriate
18 manufacturing technique, and may be extruded, moulded, cast or woven.

19
20 The substrate 128 extends along the entire length of the sealing
21 member 200, and across the majority of its width. The substrate is
22 asymmetrically placed with respect to the height of the sealing member 200; it is
23 located closer to the bottom surface 132 than the top surface 134 such that there
24 is a greater volume of swellable material located above the substrate 128

1 compared with the volume located between the substrate 128 and the tubular 12
2 in use. A thin layer 136 of the swellable material is located beneath the
3 substrate, and thin walls 138 of swellable material are located between the sides
4 of the substrate and the outer surface of the sealing member 200.

5

6 Figure 17B shows in cross-section a sealing member 201 in
7 accordance with a further alternative embodiment of the invention. Sealing
8 member 201 is similar to the sealing member 200, but differs in that it is extruded
9 with two reinforcing substrates 129. The substrates in this example are ribbons,
10 formed from a suitable plastic material. The substrates 129 are vertically oriented
11 and extend along the entire length of the sealing member 201, and along the
12 majority of the height of the side wall. Thin walls 139 of swellable material are
13 located between the substrate and the outer surface of the sealing member 201.
14 One advantage of this embodiment is that a greater proportion of the swelling of
15 the sealing member will be directed radially of the body in use; lateral swelling is
16 better restrained by the substrates.

17

18 Figure 18 is a side view of the sealing member 200 used with a
19 termination 142, shown in section. The termination 142 resembles the
20 termination of Figure 15, although in this embodiment of the termination is
21 attached to the substrate by means of threaded bolts 144. To facilitate this, the
22 sealing member 200 has been stripped back at an end of 146 to expose the
23 substrate 128. The termination 142 is configured to engage with a corresponding
24 mechanism which is attached to the tubular body 12. Tensile forces imparted

1 along the sealing member 200 will be directed through the substrate 128,
2 allowing more tension to be imparted during application to a tubular body, and
3 thus a more effective internal seal to be created. The substrate 128 also
4 functions to bind to the swellable material and resist expansion of the sealing
5 member in a longitudinal direction. Expansion of the sealing member instead
6 tends to be directed in a radial direction of the tubular. The substrate 128 also
7 resists swaging of the sealing member on the tubular body.

8
9 An alternative termination 148 is shown in Figure 19. In this
10 embodiment, the termination is similar to that of Figure 14, but is secured to the
11 substrate 128 of the sealing member 200 by threaded screws 152 which extend
12 from the outer surface of the termination 148.

13
14 Figures 20 and 21 are cross-sectional views of sealing members in
15 accordance with further alternative embodiments of the invention. Figure 20
16 shows a sealing member 210 which is similar to that of Figure 17, having a
17 ribbon-like substrate 154 extending through the sealing member. However, in
18 this embodiment, the substrate 154 comprises a "C-shaped" cross-sectional
19 profile, with side walls 156 extending downwardly from the main body 158 of the
20 substrate 154. The side walls 156 define edges 162 which are flush with the
21 bottom surface 164 of the sealing member. Between the side walls 156 is
22 defined a band 166 of swellable material. Fluid access to the band 166 is
23 provided by means of laser cut apertures 168 in the substrate. The side walls
24 156 provide additional vertical support to the sealing member.

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

Figure 21 shows a sealing member 220, similar to the sealing member 190 of Figure 16, but having an outer layer 172 of EPDM rubber and a central core 174 consisting of a suitably malleable metal.

Figures 22 to 26 show further alternative sealing members in cross-section, all of which have an outer layer of swellable material. In Figure 22, the sealing member 230 comprises an inner core 176 of a solid porous material. The material may be, for example, a three dimensional metallic mesh, a sintered material with the pores which permit the passage of fluid, or a braided wire, about which the sealing member is extruded. Like the substrate 128, the core provides structural strength to the sealing member, allows more tension to be imparted during application to a tubular body, binds to the swellable material, resists expansion of the sealing member in a longitudinal direction, and resists swaging of the sealing member on the tubular body. The core 176 allows fluid penetration across the core, and also in the longitudinal direction of the sealing member 230. This allows fluid to be directed through the core 176 by exposing an open end of the sealing member to a fluid.

Figure 23 shows a sealing member 240, similar to the sealing member 230, and with a core 178 comprising a woven fibrous wick which is capable of absorbing fluid across the core and in the longitudinal direction of the sealing member 240.

1 Figure 24 shows the sealing member 250, in which a conduit 182,
2 in this case is in the form of a hydraulic control line, forms the core of a sealing
3 member 250. The conduit comprises a metallic wall 183 which is capable of
4 resisting high impacts and large radial forces without collapse. Fluid may be
5 pumped through the conduit 182.

6
7 Figure 25 shows a sealing member 260, which is similar to the
8 sealing member 250, in that a conduit 184 forms the core of the sealing member.
9 In this case the conduit 184 contains a bundle of smaller conduits 186, 188,
10 which may for example be fibre optics or electrical control lines.

11
12 Figure 26 shows a sealing member 270, in which an outer layer 192
13 has a hollow core and therefore defines an open conduit 194. The conduit 194
14 can be used for the supply of fluids or to receive a core or conduit of another of
15 the embodiments of the invention.

16
17 Referring now to Figure 27, there is shown schematically in a
18 longitudinal section a sealing member 280 of a further alternative embodiment of
19 the invention in use. The sealing member 280 is similar to sealing member 250
20 of Figure 24. A conduit 196 forms the core of the sealing member 280, and
21 comprises a metallic tubular wall 197 which is capable of resisting high impacts
22 and large radial forces without collapse, and is similar in properties to a hydraulic
23 control line. The conduit 196 is provided with a distribution of apertures 198
24 longitudinally and circumferentially separated along the length of the conduit wall

1 197. The apertures 198 allow a fluid passing through the conduit to be exposed
2 to the swellable material that forms the outer layer 195 of the sealing member.
3 Thus a triggering fluid used to expand the expanding portion can be delivered to
4 the sealing member internally, via the conduit 196. This may be used to
5 supplement the exposure of the sealing member 280 to fluid from the exterior
6 surface. In some applications, all of the fluid required to expand the expanding
7 portion may be provided via the conduit 196.

8

9 Figures 28A and 28B show in cross-section a sealing member
10 according to a further alternative embodiment of the invention, shown generally at
11 291. The sealing member 291 is formed from a core in the form of an
12 encapsulated cable 293, and a sheath 295 formed from an expanding material
13 such as EPDM. Figures 28A and 28B show the components in unassembled and
14 assembled form respectively.

15

16 The encapsulated cable 293 comprises a pair of control lines 297
17 encapsulated in a plastic insulating body 299. The sheath 295 has a
18 substantially c-shaped profile which defines a formation 301 for receiving the
19 core. Base layer 303 of the sheath 295 is formed in two parts with a split 305 that
20 allows the base layer to be parted and the formation to be accessed. The core is
21 inserted into the sheath 295 and the resilient nature of the sheath tends to close
22 the two parts of the base layer and retain the core in the sheath. The core may
23 be adhered or bonded to the sheath using a suitable bonding agent if required.

24

1 The assembled sealing member 291 shown in Figure 28B may then
2 be used in the manner described above, for example to create a downhole
3 packer. This embodiment has the advantage that a sealing member can be
4 created with different properties by the combination of sheaths and cores of
5 different designs. For example, the sheath may be used to encapsulate a core of
6 expanding material having a different swelling characteristic to create a hybrid
7 sealing member. The core may function as the substrate, or may be arranged to
8 convey a fluid or a signal through the sealing member.

9
10 It will be appreciated that the although the sealing member 291 is
11 configured as a sheath and insert, it may instead be configured as one or more
12 expanding components coupled to a core, a layer or another elongate
13 component, which may have different physical properties to the expanding
14 component. Advantageously the expanding component or components will at
15 least partially encapsulate the core to facilitate the provision of a seal.

16
17 Figures 29A and 29B show schematically an alternative packer
18 configuration, generally depicted at 290, in-situ in a wellbore 202 in unexpanded
19 and expanded conditions. In this embodiment, the packer 290 is formed from a
20 sealing member 250 (as described with reference to Figure 24) applied to a
21 tubular 12. An end ring 204 is provided over the end of the expanding portion
22 206, and a similar end ring is provided at the opposing end of the expanding
23 portion (not shown). The end ring 204 is similar to the end ring described with
24 reference to Figures 6A and 6B, although in this case a longitudinal recess 203

1 extends through the end ring 204 to allow the sealing member 250 to pass
2 beneath it.

3
4 In this embodiment, the packer is constructed by a method similar
5 to that described with reference to Figures 5A to 5C. However, the method
6 differs in that the expanding portion 206 is not started at an end of the sealing
7 member 250. In contrast, the expanding portion 206 is formed by beginning to
8 wrap the sealing member at a location distal from its end. In fact, there may be
9 many tens or hundreds of metres of sealing member 250 provided above the
10 point to which the sealing member is wrapped around a tubular 12. At the
11 desired location for forming the packer, the sealing member is redirected from a
12 longitudinal direction to a circumferential direction and is wrapped around the
13 tubular 12. This redirection may be accomplished with the assistance of a
14 temporary clamp. The end ring 204, which in this case is in two-part, hinged
15 form, is clamped around the sealing member, with the longitudinal recess 203
16 located over the sealing member. The sealing member is wrapped around the
17 tubular to create the expanding portion 206. It may be necessary to adjust the
18 position of the end ring to ensure that it is tightly placed against the end of the
19 expanding portion 206. The portion 207 of the sealing member 250 located
20 above the packer may be secured to the tubular body 12, for example by cable
21 clamps, and may be coupled to control equipment, such as a source of hydraulic
22 fluid. The cable clamps may be configured to be clamped over an upset on the
23 tubular body 12 such as a tubing or casing coupling.

24

1 Figure 29B shows the packer in-situ and the wellbore after
2 expansion. The expanding portion has expanded against the formation to create
3 a seal in the annulus 205. In addition, the portion 207 of the sealing member
4 located above the packer 290 has expanded due to its exposure to wellbore fluid.
5 However, the portion 207 above the packer is substantially longitudinally
6 oriented, and therefore does not create a seal with the annulus 205. In addition,
7 this portion 207 of the sealing member is not restrained laterally. This means that
8 it is liable to expand proportionally less in the radial direction of the tubular 12,
9 when compared with the coiled portion of the sealing member, which is laterally
10 bound.

11

12 Although the packer creates a seal in the annulus, there is
13 continuous path from the region above the packer to a region below the packer,
14 via the conduit provided in the sealing member 250. In this example, the path is
15 a hydraulic line for the supply of hydraulic fluids. In other embodiments, this
16 conduit can be used for the deployment of fluids, cables, fibre optics, hydraulic
17 lines, or other control or data lines across the seal.

18

19 One specific exemplary application of the invention is to artificial lift
20 systems using electric submersible pumps (ESPs). In ESP systems it will
21 typically be necessary to deploy a power cable from surface to the ESP, through
22 a packer which creates an annular seal.

23

1 In the above-described embodiments, the sealing members have
2 substantially rectangular cross-sectional profiles. In the examples shown, the
3 sealing member has a width in the range of 5 mm to 100 mm, and a height in the
4 range of 5 mm to 80 mm, in its unexpanded condition. Other cross-sectional
5 profiles may also be used, and there will now be described a number of
6 alternative examples, with reference to Figures 30 to 42.

7
8 Figure 30 shows in cross-section a sealing member 300 having a
9 flat bottom surface 302 and a continuously curved upper surface 304 which
10 defines the sides and the top of the sealing member 300. Figure 31 shows a
11 sealing member 310, similar to a sealing member 300, parts comprising a core
12 306 of a high strength material, such as a metallic mesh, which allows fluid flow
13 through the sealing member.

14
15 Figure 32 shows in cross-sectional a sealing member 320 having a
16 triangular profile. The sealing member 320 defines a flat bottom surface 308, and
17 flat side surfaces 312.

18
19 Figure 33A shows in cross-section a sealing member 330, having a
20 "T-shaped" profile. The sealing member 330 defines a flat bottom surface 314
21 and stepped side surfaces 316 defining a protruding spine 315. The sealing
22 member is symmetrical about a central axis C. Figure 33B shows the same
23 sealing member 330 in an inverted position, in which the sealing member may
24 also be applied to a body.

1

2 Figures 34A and 34B schematically show the application of the
3 sealing member 320 to the surface of a tubular body 12. The sealing member
4 320 is wrapped onto the tubular body 12 according to the methods described
5 above. This creates a layer 317 with a ridged profile 318, shown in Figure 34A.
6 Subsequently, a second layer 319 of sealing member 320 is wrapped over the
7 first layer 317, with successive turns of the sealing member located in grooves
8 created by the first layer 317. The resulting structure is an expanding portion 322
9 with a cylindrical outer surface.

10

11 The second layer 319 of the sealing member could be wrapped in
12 the same direction as the first layer, or alternatively could be wrapped in the
13 opposite direction. In some embodiments, the second layer 319 of the sealing
14 member could be formed from the same length of sealing member, without
15 cutting between layers. In other embodiments, the second layer 319 may be
16 formed from a sealing member having a different profile, or indeed different
17 material characteristics. For example, the second layer 319 of sealing member
18 may be selected to swell in hydrocarbon fluid at a different rate from the first layer
19 317.

20

21 Figures 35A and 35B schematically show the application of the
22 sealing member 330 to a tubular body 12. The process is similar to that
23 described with reference to Figures 34A and 34B. A first layer 324 of the sealing
24 member is formed on the tubular body by the rapid process as described above.

1 The second layer 326 of a different sealing member 328 is wrapped into
2 formations defined by the profile of the sealing member 330. In this embodiment,
3 the sealing member 328 comprises an outer layer 332 surrounding an electrical
4 conducting core 334.

5
6 Figures 36A to 36C schematically show the application of the
7 sealing members 330 and 328 in an alternative configuration. Sealing member
8 328 is wrapped in a first layer 336 on the tubular 12. The sealing member is
9 wrapped adjacent a spacing member 338, which may be wrapped simultaneously
10 with the sealing member 328, or in a consecutive application step. When the
11 positioning and tension of the sealing member 328 is satisfactory, the spacing
12 member 338 is removed to leave a spaced layer 342 of the sealing member 328
13 on the tubular body, as shown in Figure 36B. In a subsequent step, a second
14 layer 344 of the sealing member 330 is applied to the space layer 342 in an
15 inverted configuration, such that the protrusion of the T shaped profile is received
16 in the spaces left by the spacing member.

17
18 Figure 37 schematically shows an expanding portion 345 formed
19 from a sealing member 346 in accordance with an alternative embodiment of the
20 invention. The sealing member has a stepped profile. One side of the sealing
21 member 346 has a recess 348, which corresponds to the shape of a protrusion
22 352 on the opposing side of the sealing member 346. Thus the opposing sides of
23 the sealing member 346 are shaped to fit together with one another in an

1 interlocking fashion, such that consecutive turns of the sealing member self
2 locate with one another.

3

4 Figure 38 schematically shows an expanding portion 354 formed
5 from a sealing member 356. The sealing member 356 is similar to the sealing
6 member 346, having a stepped profile such that the opposing sides are shaped
7 to fit together. However, in this embodiment, the sealing member 356 includes a
8 ridge 358 which corresponds with a groove 362 to create an interlocking profile
9 which self-locates and resists lateral separation.

10

11 Figure 39 shows a sealing member 340 in cross-sectional profile.
12 The sealing member 340 is substantially rectangular profile, but includes on one
13 side wall 364 a pair of longitudinally extending grooves 366 which corresponds
14 with a pair of longitudinally extending ridges 368 on the opposing side wall 365.
15 In use, the ridges 368 are located in the grooves 366 of an adjacent turn on a
16 tubular body 12.

17

18 Figure 40 shows a cross-section a further sealing member 350
19 comprising a triangular profile and pairs of corresponding ridges 372 and grooves
20 374, which function in a similar manner to the ridges and grooves of sealing
21 member 340, but in the layered configuration shown in Figure 33B.

22

23 Figure 41 shows a perspective view of a sealing member 360 in
24 accordance with a further alternative embodiment of the invention. The sealing

1 member 360 has a substantially rectangular cross-sectional profile, but one which
2 varies in dimensions over the length of the sealing member 360. The side walls
3 376 are formed into a series of angular ridges 375 and grooves 377 with
4 corresponding profiles on the opposing walls. In use, the grooves formed in the
5 side wall of one turn of the sealing member on the body receive ridges of the side
6 wall of an adjacent turn. This arrangement increases the surface area of the
7 interface between adjacent turns, and assists in the retention of tension in the
8 turns forming the expanding portion.

9

10 A further alternative embodiment of the invention shown in Figure
11 42, which is a cross-sectional view of a sealing member 370 comprising a
12 substantially rectangular profile and a supporting substrate 378. In this
13 embodiment, the supporting substrate provides interlocking formations 382, 384
14 such that adjacent turns of the sealing member 370 self-locate and resist lateral
15 separation in use.

16

17 The foregoing description relates primarily to the construction of
18 wellbore packers on tubulars. It will be appreciated by one skilled in the art that
19 the invention is equally applicable to packers formed on other apparatus, for
20 example mandrels or packing tools which are run on a wireline. In addition, the
21 present invention has application to which extends beyond conventional packers.
22 The invention may be particularly valuable when applied to couplings and joints
23 on tubulars and mandrels. The invention can also be applied to coiled tubing, for
24 use in coiled tubing drilling or intervention operations. Furthermore, the body

1 need not be cylindrical, and need not have a smooth surface. In some
2 embodiments, the body may be provided with upstanding formations or inward
3 recesses with which a sealing member cooperates on the body.

4

5 The sealing member could also be used on components such as
6 sliding sleeves, or components which are not longitudinally oriented in a pipeline
7 or wellbore.

8

9 The sealing member could be applied over many consecutive
10 lengths of coupled tubulars, continuously over pipe couplings, or in discrete
11 sections. The sealing member could be used to secure and seal casings during
12 wellbore construction. The present invention provides a system which is
13 sufficiently flexible and cost-effective over long seal lengths to replace the use of
14 cement in many applications.

15

16 The invention also has applications in the encapsulations of tools,
17 cables and downhole probes and sensors. Figure 43 schematically shows such
18 an application in cross-section. In this assembly, generally shown at 380,
19 comprises a sealing member 30 wrapped around a tubular 12 to form an
20 expanding portion 382. The assembly comprises a support element 390, also
21 shown in perspective view in Figure 44. The support element 390, which could
22 be made from swellable elastomer, plastic or metal, comprises a part-circular
23 inner profile 384, and a curved outer surface 386. A longitudinal groove 388 is
24 formed in the outer surface and accommodates a cable 392 when the support

1 element is located longitudinally on the tubular 12. The sealing member 30 is
2 wrapped around the tubular 12 and the support element 390, with the cable
3 extending through the groove 388.

4

5 In the arrangement of Figure 43, the expanding portion 382 is of
6 elliptical cross-section. This may be acceptable in some applications. For
7 example, where the radial extent of the support member is small in comparison to
8 the tubular outer diameter and/or outer diameter of the expanding portion in its
9 expanded condition such that the eccentricity is small, the expanding portion may
10 readily form a seal in the annulus. Figure 45 shows in cross-section an
11 alternative embodiment of the invention, generally depicted at 400, in which the
12 support member 394 as a circular outer profile which supports the sealing
13 member in use. The arrangements of Figures 43 to 45 could be used as an
14 alternative to cable clamps.

15

16 Although the foregoing description relates to the use of the
17 invention for creating a seal between the body and a surface exterior to the body,
18 the principles of the invention can equally be used to create an annular seal
19 between a body and a surface internal to the body. An example of such
20 application is illustrated with reference to Figures 46 to 48.

21

22 Figure 46 shows a lower part of an overshot tool 410, comprising a
23 tubular 412. An upper part (not shown) of the tool is configured for connection to
24 a toolstring. The tubular 412 has an open end 414, and an internal surface

1 having a recessed thread 416 dimensioned to accommodate a sealing member
2 330, shown in detail at Figure 33A. The protruding spine 315 of sealing member
3 330 is fed into the thread 416. The sealing member is selected to be resilient,
4 such that feeding it into the thread and coiling it internally to the tubular 412 tends
5 to cause a resultant straightening force which biases the sealing member against
6 the internal surface and retains it in the thread. The sealing member 330 is fed to
7 create multiple turns of the around the longitudinal axis of the tubular, with side
8 walls of successive turns in abutment. In this embodiment, the sealing member
9 creates a cylindrical protrusion to the inner surface of the tubular, but in
10 alternative embodiments the sealing member is flush with the inner surface or
11 recessed in the thread.

12

13 The open end of the tubular is sized to be placed over (or to
14 overshoot) a body 418 in a wellbore, which may be a cut casing, as shown in
15 Figure 47A. The overshot tool 410 comprises additional mechanisms (not
16 shown) for engaging the body 418. With the body surrounded, exposure of the
17 sealing member to wellbore fluid causes expansion of the sealing member to
18 form an annular seal between the tool and the body, as shown in Figure 47B.

19

20 The present invention also has application to expansion joints. The
21 sealing member may be used to create a seal between a polished mandrel and
22 an outer tubular of a telescopic overshot tool that can accommodate axial
23 expansion and contraction of the tubular or mandrel through changes in ambient
24 temperature. Typically travel for expansion joints can be up to 6m to 9m (20-30

1 feet), and the invention provides a suitable means for creating a seal over this
2 range of distances.

3

4 The present invention relates to sealing apparatus for use
5 downhole, a sealing member, a method of forming a downhole apparatus, and
6 methods of use. The sealing member of the invention may be conveniently used
7 in isolation tools and systems, in cased and uncased holes. The invention
8 provides sealing mechanisms and isolation tools and systems which may be
9 manufactured and assembled more efficiently than in the case of the prior art,
10 and which are flexible in their application to a variety of wellbore scenarios.

11

12 By creating a sealing arrangement from an elongated member, it
13 may be easier to assemble the apparatus when compared with conventional slip-
14 on apparatus. For example, the apparatus could be formed on a central 2 metre
15 portion of a 12 metre casing section. The sealing member is economical to
16 manufacture, compact to store, and easy to handle when compared with the
17 materials used in conventional swellable packers.

18

19 The process of forming the packer offers several advantages.
20 Firstly, the process does not require specialised equipment requiring large
21 amounts of space or capital expenditure. The process can be carried out from a
22 central portion of the tubular body, by attaching a first end of the sealing member
23 and coiling it around the tubular, reducing the difficulties associated with slipping
24 tool elements on at an end of the tubular and sliding them to the required

1 location. This facilitates application of the sealing member to significantly longer
2 tubulars, and opens up the possibility of constructed packer on strings of tubing
3 on the rig floor immediately prior to or during assembly. The construction
4 process allows for a high degree of flexibility in tool design. For example, a
5 packer of any desired length can be created from the same set of components,
6 simply by adjusting the length over which the sealing member is coiled on the
7 tubular body. Packers and seals can be created on bodies and tubulars of a
8 range of diameters. The principles of the invention also inherently allow for
9 engineering tolerances in the dimensions of bodies on which the seal is created.

10

11 The resulting packers may have increased surface area with
12 respect to an equivalent packer with an annular mantle, allowing for faster
13 expansion to the sealing condition. The elongated sealing member also lends
14 itself well to post-processing, for example perforating, coating or performing
15 analysis on a sample.

16

17 The use of a substrate or a material with different mechanical
18 characteristics in the sealing member allows more tension to be applied and
19 retained in the sealing member during the construction process, and reduces any
20 tendency of the sealing member to swage. It also binds to the swellable material,
21 and resists expansion of the sealing member in a longitudinal direction.

22

23 The invention can be used to create a seal in the annulus with a
24 continuous path from region to above the seal to a region below the seal, via the

1 conduit provided in the sealing member. For example, the path is a hydraulic line
2 for the supply of hydraulic fluids. In other embodiments, this conduit can be used
3 for the deployment of fluids, cables, fibre optics, hydraulic lines, or other control
4 or data lines across the seal. One specific application of the invention is to
5 artificial lift systems using electric submersible pumps (ESPs). A sealing member
6 in one aspect of the invention comprises a power cable for an ESP.

7

8 It will be appreciated by one skilled in the art that the invention is
9 applicable to packers formed tubulars, mandrels, or packing tools which are run
10 on a wireline. In addition, the present invention has application to which extends
11 beyond conventional packers. The invention may be particularly valuable when
12 applied to couplings and joints on tubulars and mandrels. The invention can also
13 be applied to coiled tubing, for use in coiled tubing drilling or intervention
14 operations.

15

16 The sealing member could be applied over many consecutive
17 lengths of coupled tubulars, continuously over pipe couplings, or in discrete
18 sections. The sealing member could be used to secure casings during wellbore
19 construction. The present invention provides a system which is sufficiently
20 flexible to replace the use of cement in many applications. The principles of the
21 invention can equally be used to create an annular seal between a body and a
22 surface internal to the body.

23

1 Variations to the above described embodiments are within the
2 scope of the invention, and combinations of features other than those expressly
3 claimed form part of the invention. Unless the context requires otherwise, the
4 physical dimensions, shapes, internal profiles, end rings, and principles of
5 construction described herein are interchangeable and may be combined within
6 the scope of the invention. For example, any of the described internal profiles of
7 sealing member may be used with the described external profiles. The principles
8 of construction described above may apply to any of the described profiles, for
9 example, the described bonding method or the heat curing method may be used
10 with any of the sealing members described. Additionally, although the invention
11 is particularly suited to downhole use it may also be used in topside and subsea
12 applications such as in pipeline systems. It may also be used in river crossing
13 applications.

1 Claims:

2

3 1. A downhole apparatus comprising:
4 a body having a longitudinal axis and a sealing arrangement
5 located on the body,
6 wherein the sealing arrangement comprises at least one elongated
7 sealing member with an axis of elongation extending around the longitudinal axis
8 of the body, and the sealing member comprises a material selected to expand on
9 exposure to at least one predetermined fluid.

10

11 2. The downhole apparatus of claim 1, wherein the sealing
12 arrangement forms an annular seal in use.

13

14 3. The downhole apparatus of claim 1 or 2, wherein the sealing
15 arrangement provides isolation between one region of a wellbore annulus above
16 the apparatus and another region of the wellbore annulus below the apparatus.

17

18 4. The downhole apparatus of any one of claims 1 to 3, wherein
19 the body is substantially cylindrical and the sealing member extends
20 circumferentially around the body.

21

22 5. The downhole apparatus of any one of claims 1 to 3, wherein
23 the sealing member extends around an outer surface of the body.

24

1 6. The downhole apparatus of any one of claims 1 to 5, wherein
2 the sealing member extends around an inner surface of the body.

3

4 7. The downhole apparatus of any one of claims 1 to 6, wherein
5 the sealing member forms an expanding portion, which is substantially cylindrical
6 in form and which extends over a length of the body.

7

8 8. The downhole apparatus of any one of claims 1 to 7, wherein
9 the sealing member is coiled on the body.

10

11 9. The downhole apparatus of claim 8, wherein the sealing
12 arrangement comprises a plurality of turns formed on the body such that a lower
13 edge of a turn abuts an upper edge of a successive turn and creates a seal with
14 the upper edge of the successive turn.

15

16 10. The downhole apparatus of any one of claims 1 to 8, wherein
17 the sealing arrangement comprises a plurality of turns formed on the body such
18 that a lower edge of a turn is spaced from an upper edge of a successive turn.

19

20 11. The downhole apparatus of any one of claims 1 to 10,
21 wherein the sealing member is formed by co-extrusion of two materials selected
22 to differ in one or more of the following characteristics: fluid penetration, fluid
23 absorption, swelling coefficient, swelling rate, elongation coefficient, hardness,
24 resilience, elasticity, and density.

1

2 12. The downhole apparatus of any one of claims 1 to 11,
3 wherein the sealing member comprises one or more expanding components
4 coupled to an elongate component.

5

6 13. The downhole apparatus of claim 12, wherein the expanding
7 component at least partially encapsulates the elongate component.

8

9 14. The downhole apparatus of claim 12 or 13, wherein the
10 expanding component comprises at least one formation configured to attach the
11 expanding component to an elongate component.

12

13 15. The downhole apparatus of claim 14, wherein the formation
14 is configured to receive a cable or control line.

15

16 16. The downhole apparatus of any one of claims 1 to 15,
17 wherein the sealing member comprises a substrate which extends longitudinally
18 to the sealing member.

19

20 17. The downhole apparatus of claim 16, wherein the sealing
21 member is formed from an extrusion around the substrate.

22

1 18. The downhole apparatus of any one of claims 1 to 17,
2 wherein the sealing member comprises a conduit, longitudinally oriented in the
3 sealing member.

4
5 19. The downhole apparatus of claim 18, wherein the conduit
6 allows fluid access to the material of the sealing member from the interior of the
7 conduit.

8
9 20. The downhole apparatus of any one of claims 1 to 19,
10 wherein the sealing member couples equipment on one side of a seal created by
11 the apparatus to equipment on an opposing side of the seal.

12
13 21. The downhole apparatus of any one of claims 1 to 20,
14 wherein the sealing member comprises an interlocking profile, configured such
15 that a first side of the sealing member has a shape corresponding to the shape of
16 the second, opposing side of the sealing member.

17
18 22. The downhole apparatus of any one of claims 1 to 21,
19 wherein the sealing member has a profile configured for interlocking multiple
20 layers of a sealing member on the body.

21
22 23. The downhole apparatus of any one of claims 1 to 22, further
23 comprising mechanical attachment means for securing the sealing member to the
24 body.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24

24. The downhole apparatus of claim 23, wherein the mechanical attachment means comprises a formation for receiving an end of the sealing arrangement.

25. The downhole apparatus of claim 23 or 24, wherein the mechanical attachment means comprises an engaging formation for engaging a part of the sealing member.

26. The downhole apparatus of any one of claims 23 to 25, wherein the mechanical attachment means comprises means for imparting tension into the elongated sealing member.

27. The downhole apparatus of any one of claims 23 to 26, wherein the mechanical attachment means comprises a ratchet mechanism.

28. The downhole apparatus of any one of claims 23 to 27, wherein the mechanical attachment means comprises a release mechanism, actuatable from surface and/or by a downhole intervention.

29. The downhole apparatus of any one of claims 23 to 28, wherein the mechanical attachment means is configured to be disposed on a coupling of a tubular.

1 30. The downhole apparatus of any one of claims 1 to 29,
2 wherein the elongated sealing member comprises an attachment portion
3 configured to be secured to the body.

4

5 31. The downhole apparatus of claim 30, wherein the attachment
6 portion comprises a formation configured to engage with mechanical attachment
7 means of the apparatus.

8

9 32. The downhole apparatus of any one of claims 1 to 31,
10 wherein the apparatus is configured as a packer, a liner hanger, or an overshot
11 tool.

12

13 33. The downhole apparatus as claimed any one of claims 1 to
14 32, wherein the apparatus is configured as a cable encapsulation assembly, and
15 comprises a support element disposed between the body and the sealing
16 arrangement.

17

18 34. The downhole apparatus of claim 33, wherein the support
19 element is provided with longitudinal groove configured to receive a cable,
20 conduit or other line.

21

22 35. A sealing member for a downhole apparatus, the sealing
23 member comprising a material selected to expand on contact with at least one
24 predetermined fluid, wherein the sealing member is elongated and is configured

1 to be located on a body of a downhole apparatus such that its axis of elongation
2 extends around the longitudinal axis of the body.

3

4 36. The sealing member of claim 35, configured to form an
5 annular seal between a body and a surface external to the body, in use.

6

7 37. The sealing member of claim 35 or 36, configurable to form a
8 substantially cylindrical expanding portion extending over a length of a body.

9

10 38. The sealing member of any one of claims 35 to 37, wherein
11 the sealing member is formed by co-extrusion of two materials selected to differ
12 in one or more of the following characteristics: fluid penetration, fluid absorption,
13 swelling coefficient, swelling rate, elongation coefficient, hardness, resilience,
14 elasticity, and density.

15

16 39. The sealing member of any one of claims 35 to 38,
17 comprising one or more expanding components configured to be coupled to an
18 elongate component.

19

20 40. The sealing member of claim 39, wherein the expanding
21 component is configured to at least partially encapsulate the elongate
22 component.

23

1 41. The sealing member of claim 39 or 40, wherein the
2 expanding component comprises at least one formation configured to attach the
3 expanding component to an elongate component.

4

5 42. The sealing member of claim 41, wherein the formation is
6 configured to receive a cable or control line.

7

8 43. The sealing member of any one of claims 35 to 42,
9 comprising a substrate which extends longitudinally to the sealing member.

10

11 44. The sealing member of any one of claims 35 to 43,
12 comprising a conduit, longitudinally oriented in the sealing member.

13

14 45. The sealing member of claim 44, wherein the conduit allows
15 fluid access to the material of the sealing member from the interior of the conduit.

16

17 46. The sealing member of any one of claims 35 to 45,
18 comprising an interlocking profile, configured such that a first side of the sealing
19 member has a shape corresponding to the shape of the second, opposing side of
20 the sealing member.

21

22 47. The sealing member of any one of claims 35 to 46,
23 comprising a profile configured for interlocking multiple layers of the sealing
24 member on a body.

1

2

3

48. A method of forming a downhole apparatus, the method comprising the steps of:

4

a) providing a body having a longitudinal axis;

5

b) providing at least one elongated sealing member comprising

6

a material selected to expand on exposure to at least one predetermined fluid;

7

and

8

c) forming a sealing arrangement on the body by locating the at

9

least one elongated sealing member on the body, with its axis of elongation

10

extending around the longitudinal axis of the body.

11

12

49. The method of claim 48, further comprising the step of

13

forming multiple turns of the elongated sealing member on the body.

14

15

50. The method of claim 48 or 49, wherein the elongated sealing

16

member comprises a power cable for a downhole apparatus.

17

18

51. A wellbore packer comprising an expanding portion formed

19

from an elongated sealing member coiled around a body, the elongated sealing

20

member comprising a material selected to expand on exposure to at least one

21

predetermined fluid.

22

23

52. An overshot tool comprising a tubular body and an opening

24

configured to be disposed over a body to be coupled in use, and a sealing

1 arrangement arranged on the inner surface of the tubular body, wherein the
2 sealing arrangement comprises at least one elongated sealing member with an
3 axis of elongation extending around the longitudinal axis of the body, and the
4 sealing member comprises a material selected to expand on exposure to at least
5 one predetermined fluid.

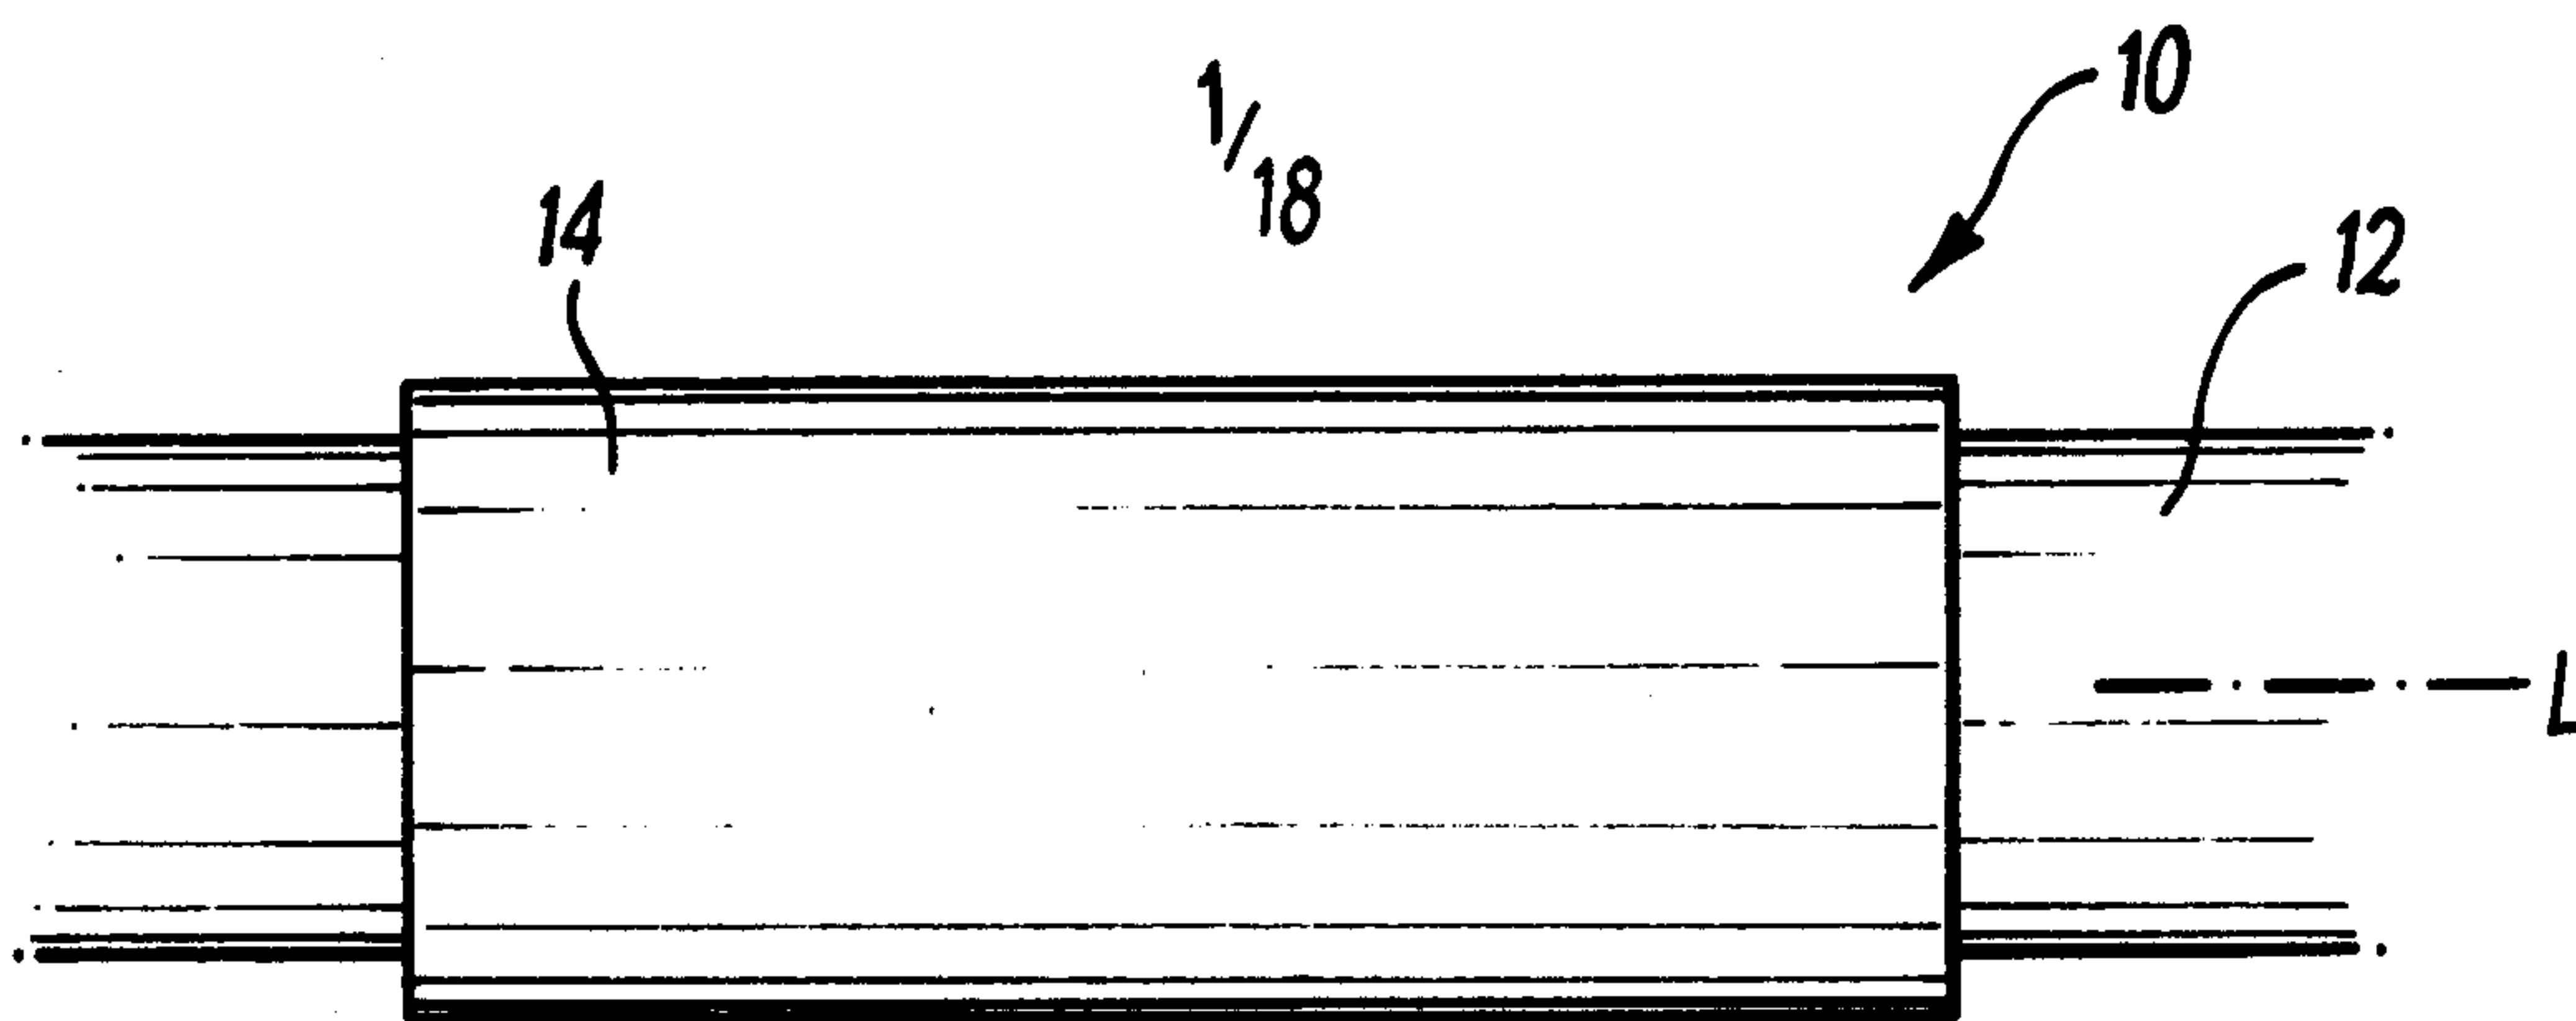


FIG. 1
(Prior Art)

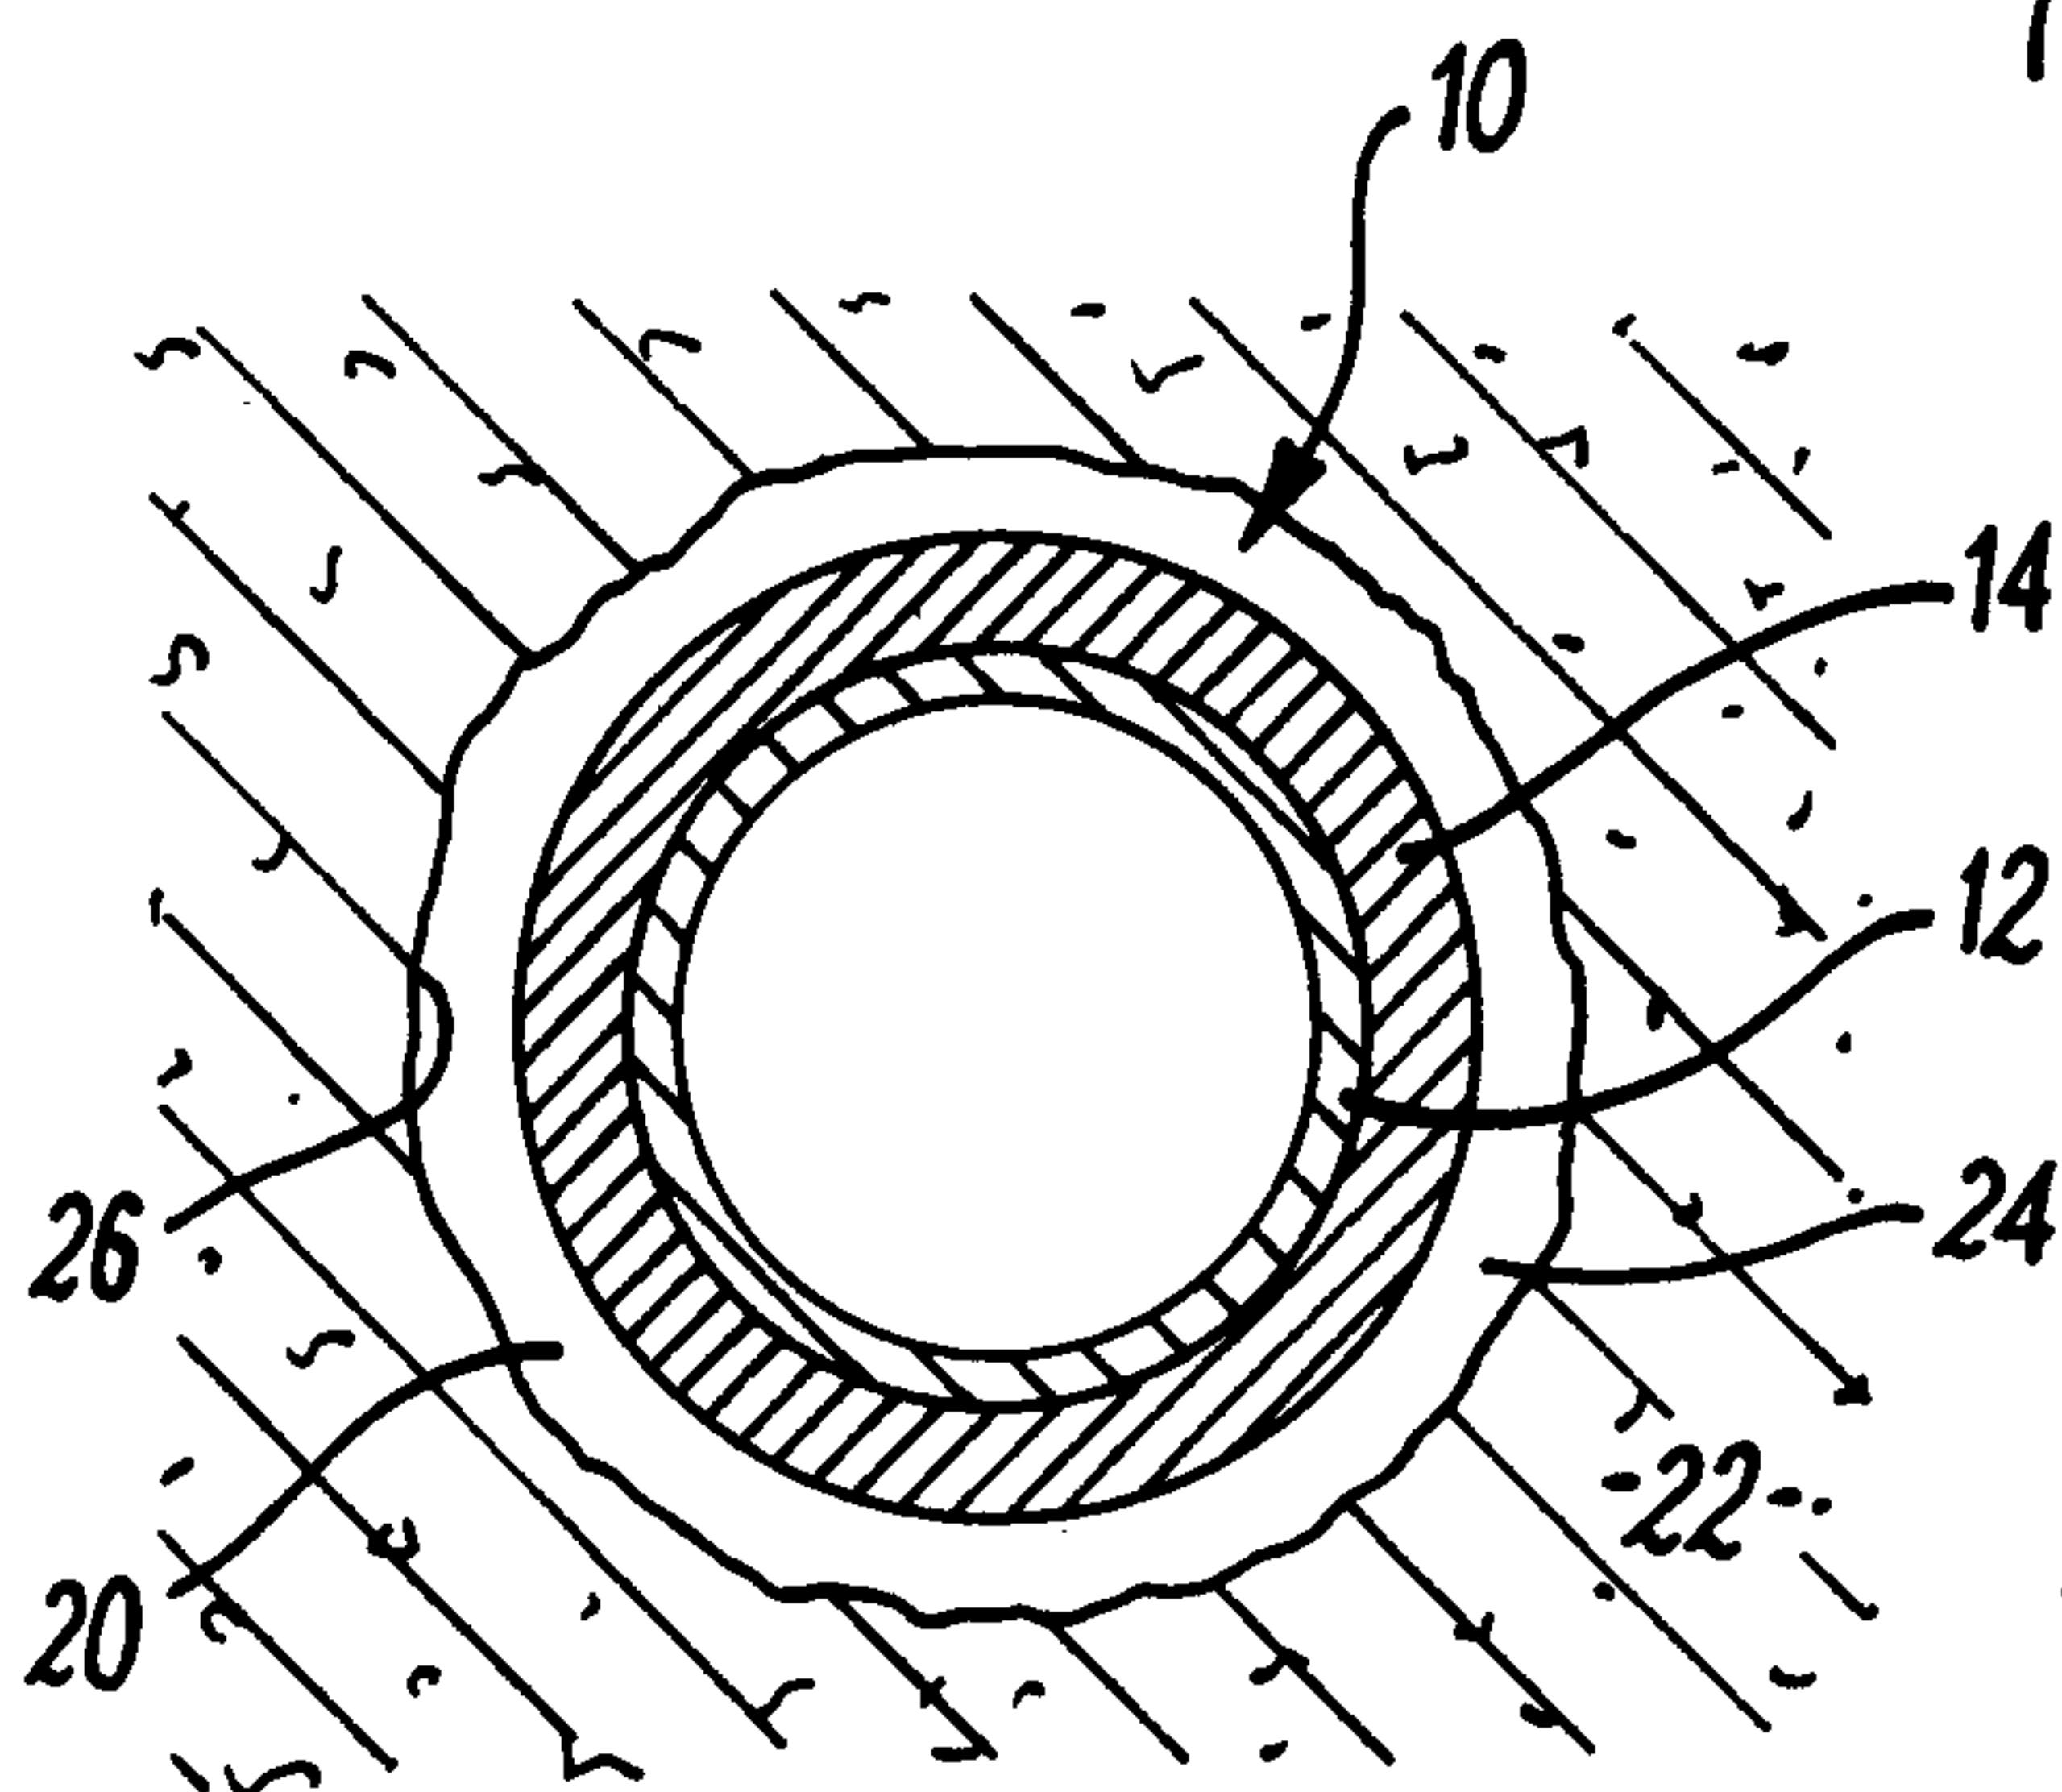


FIG. 2A
(Prior Art)

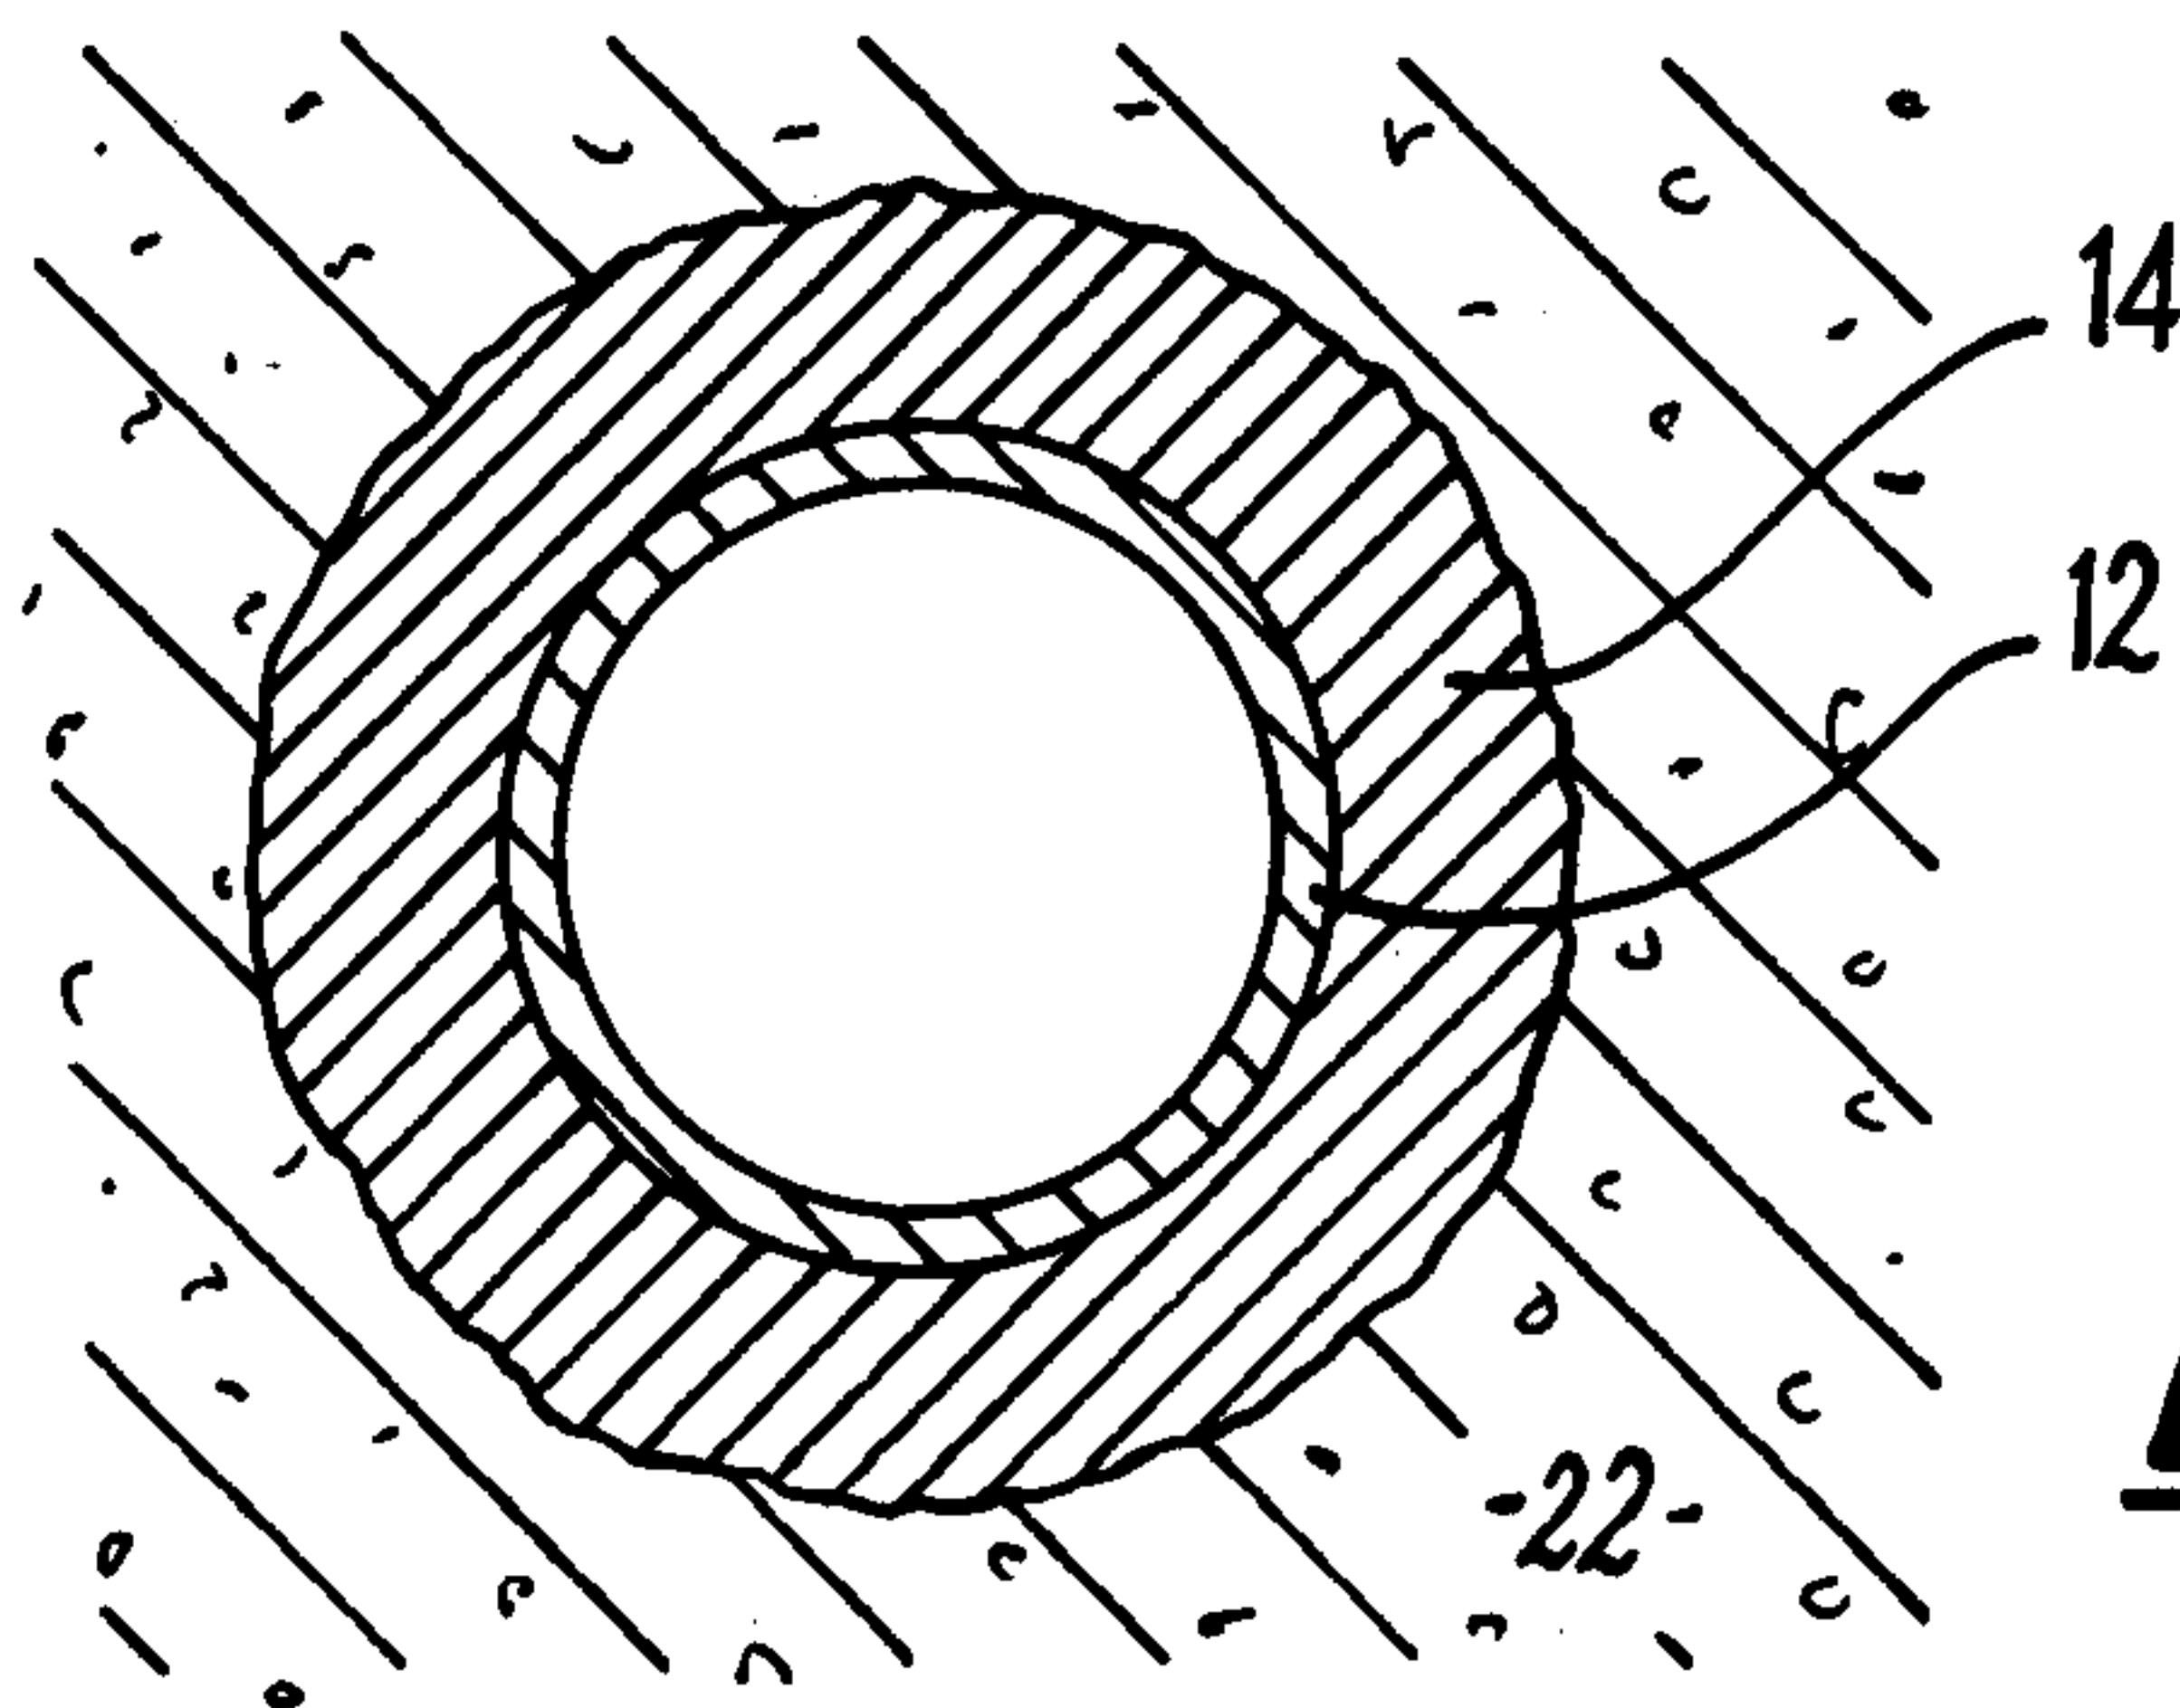
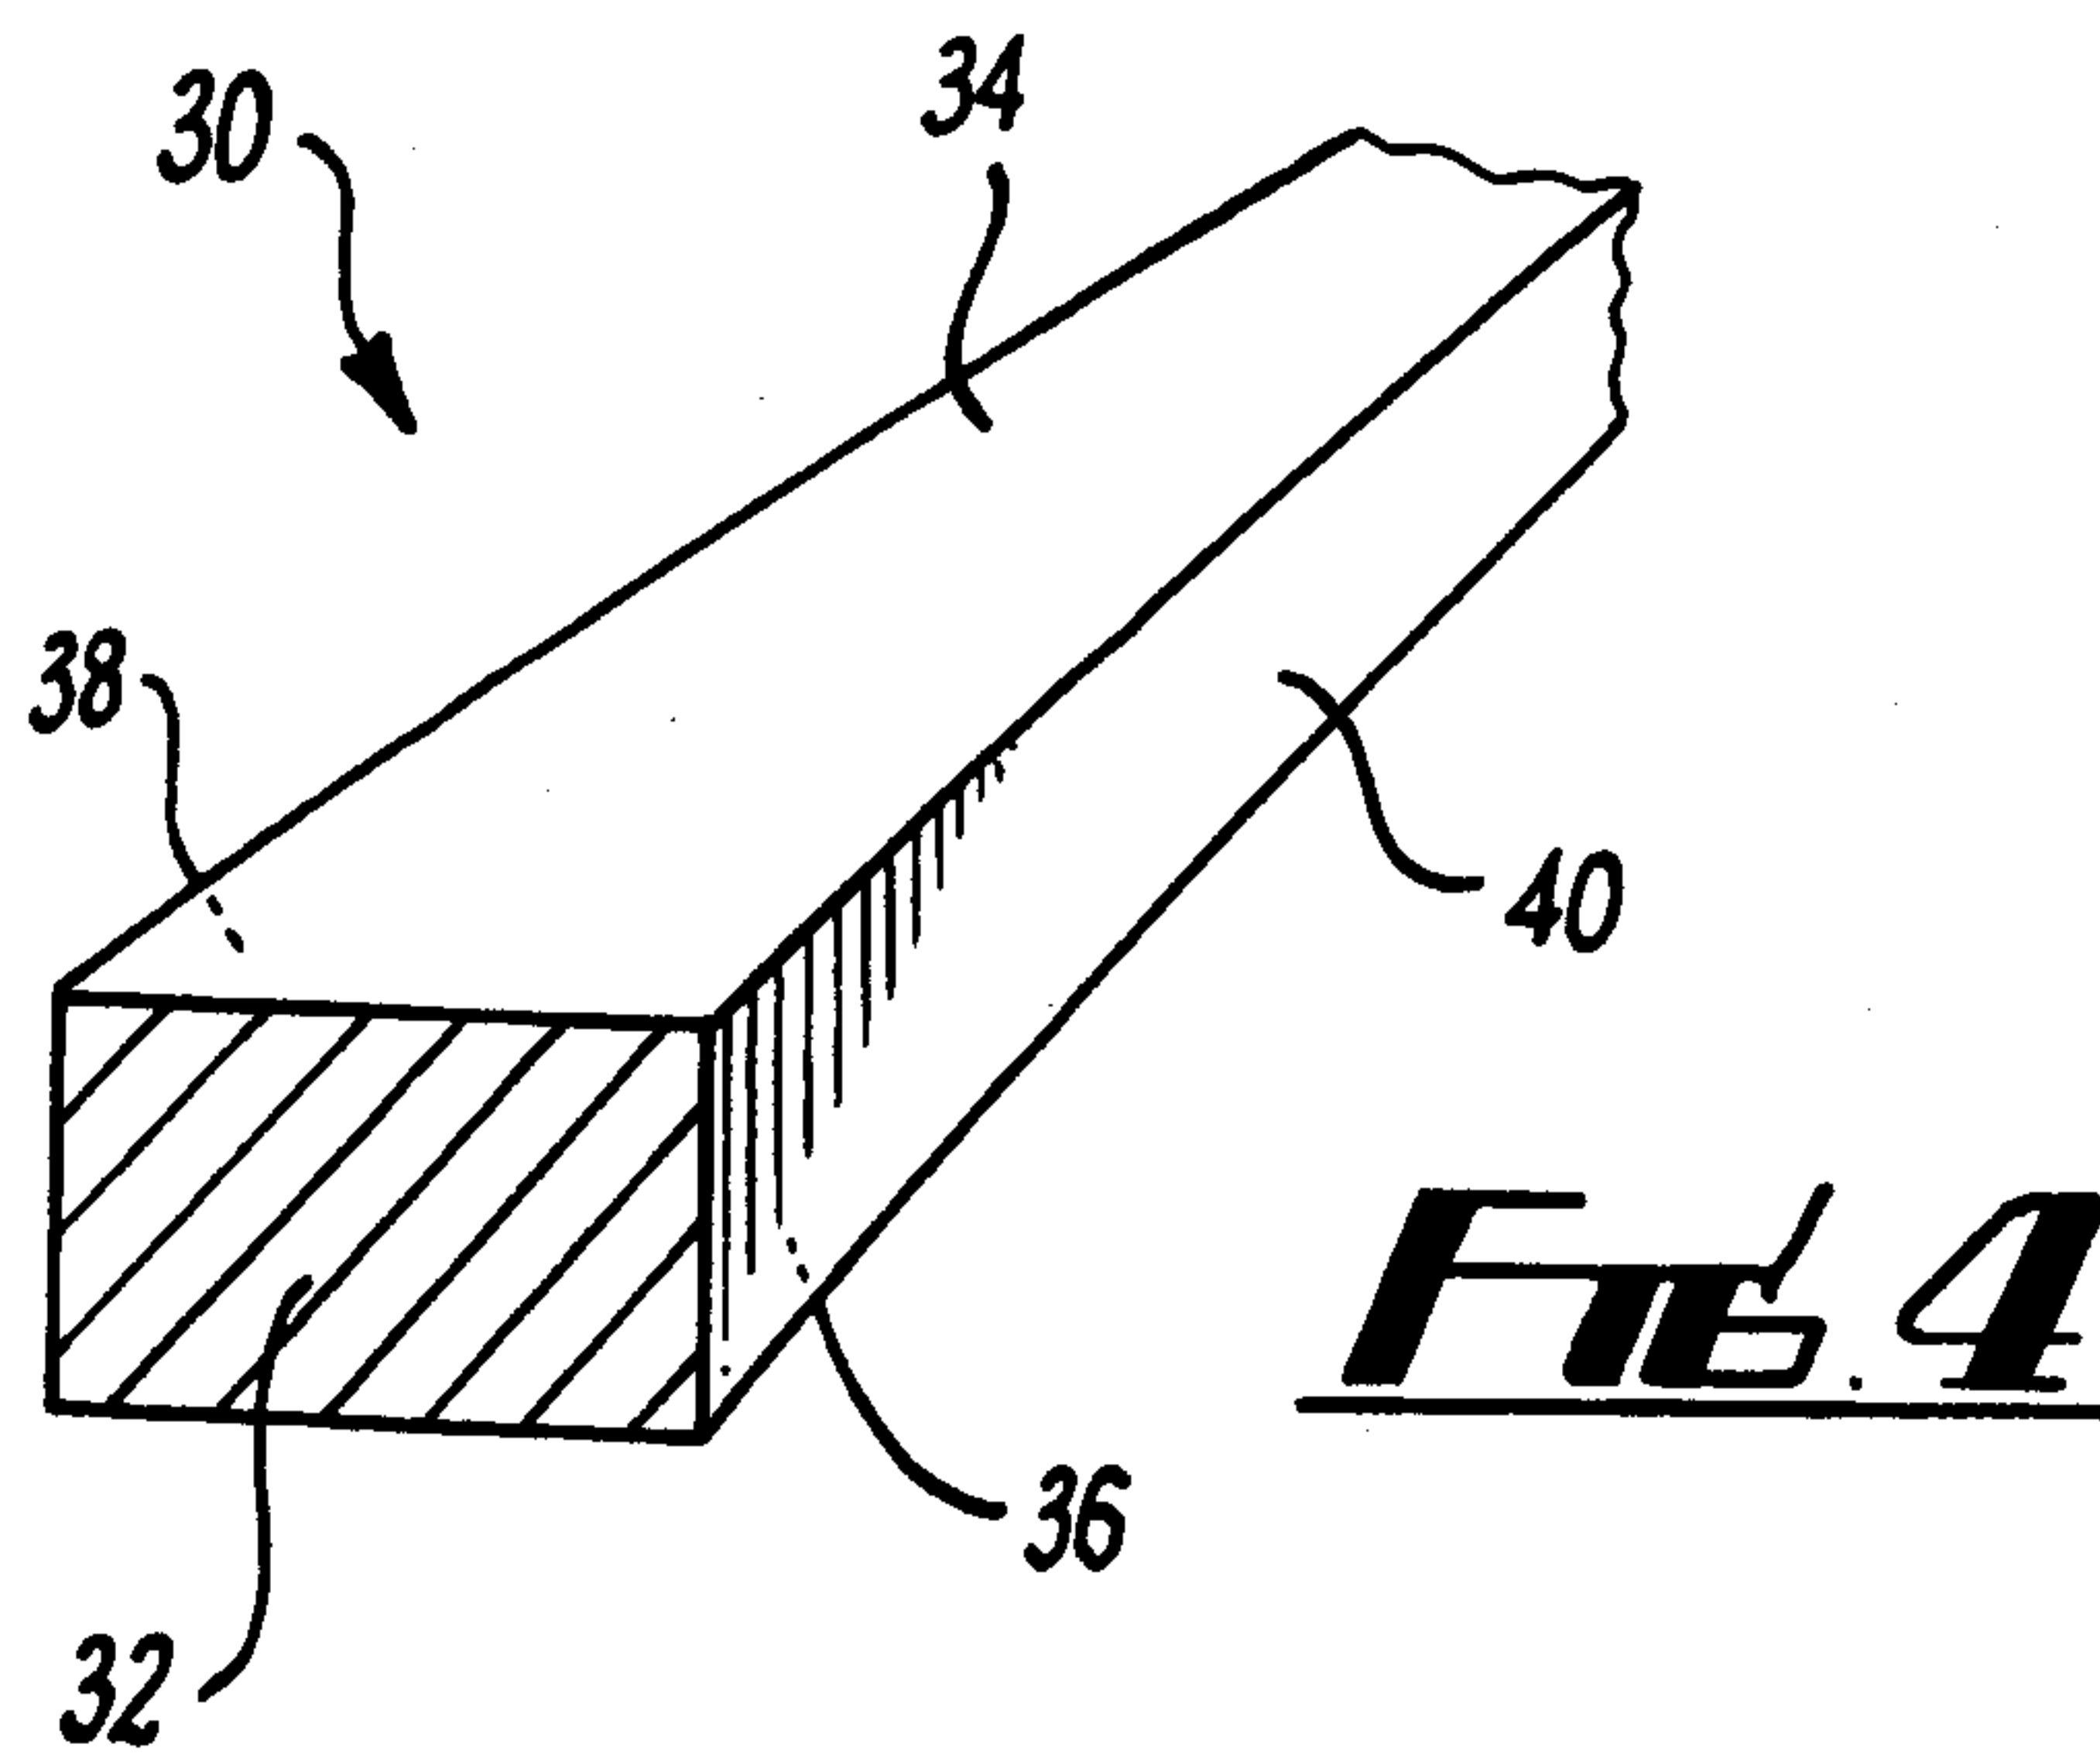
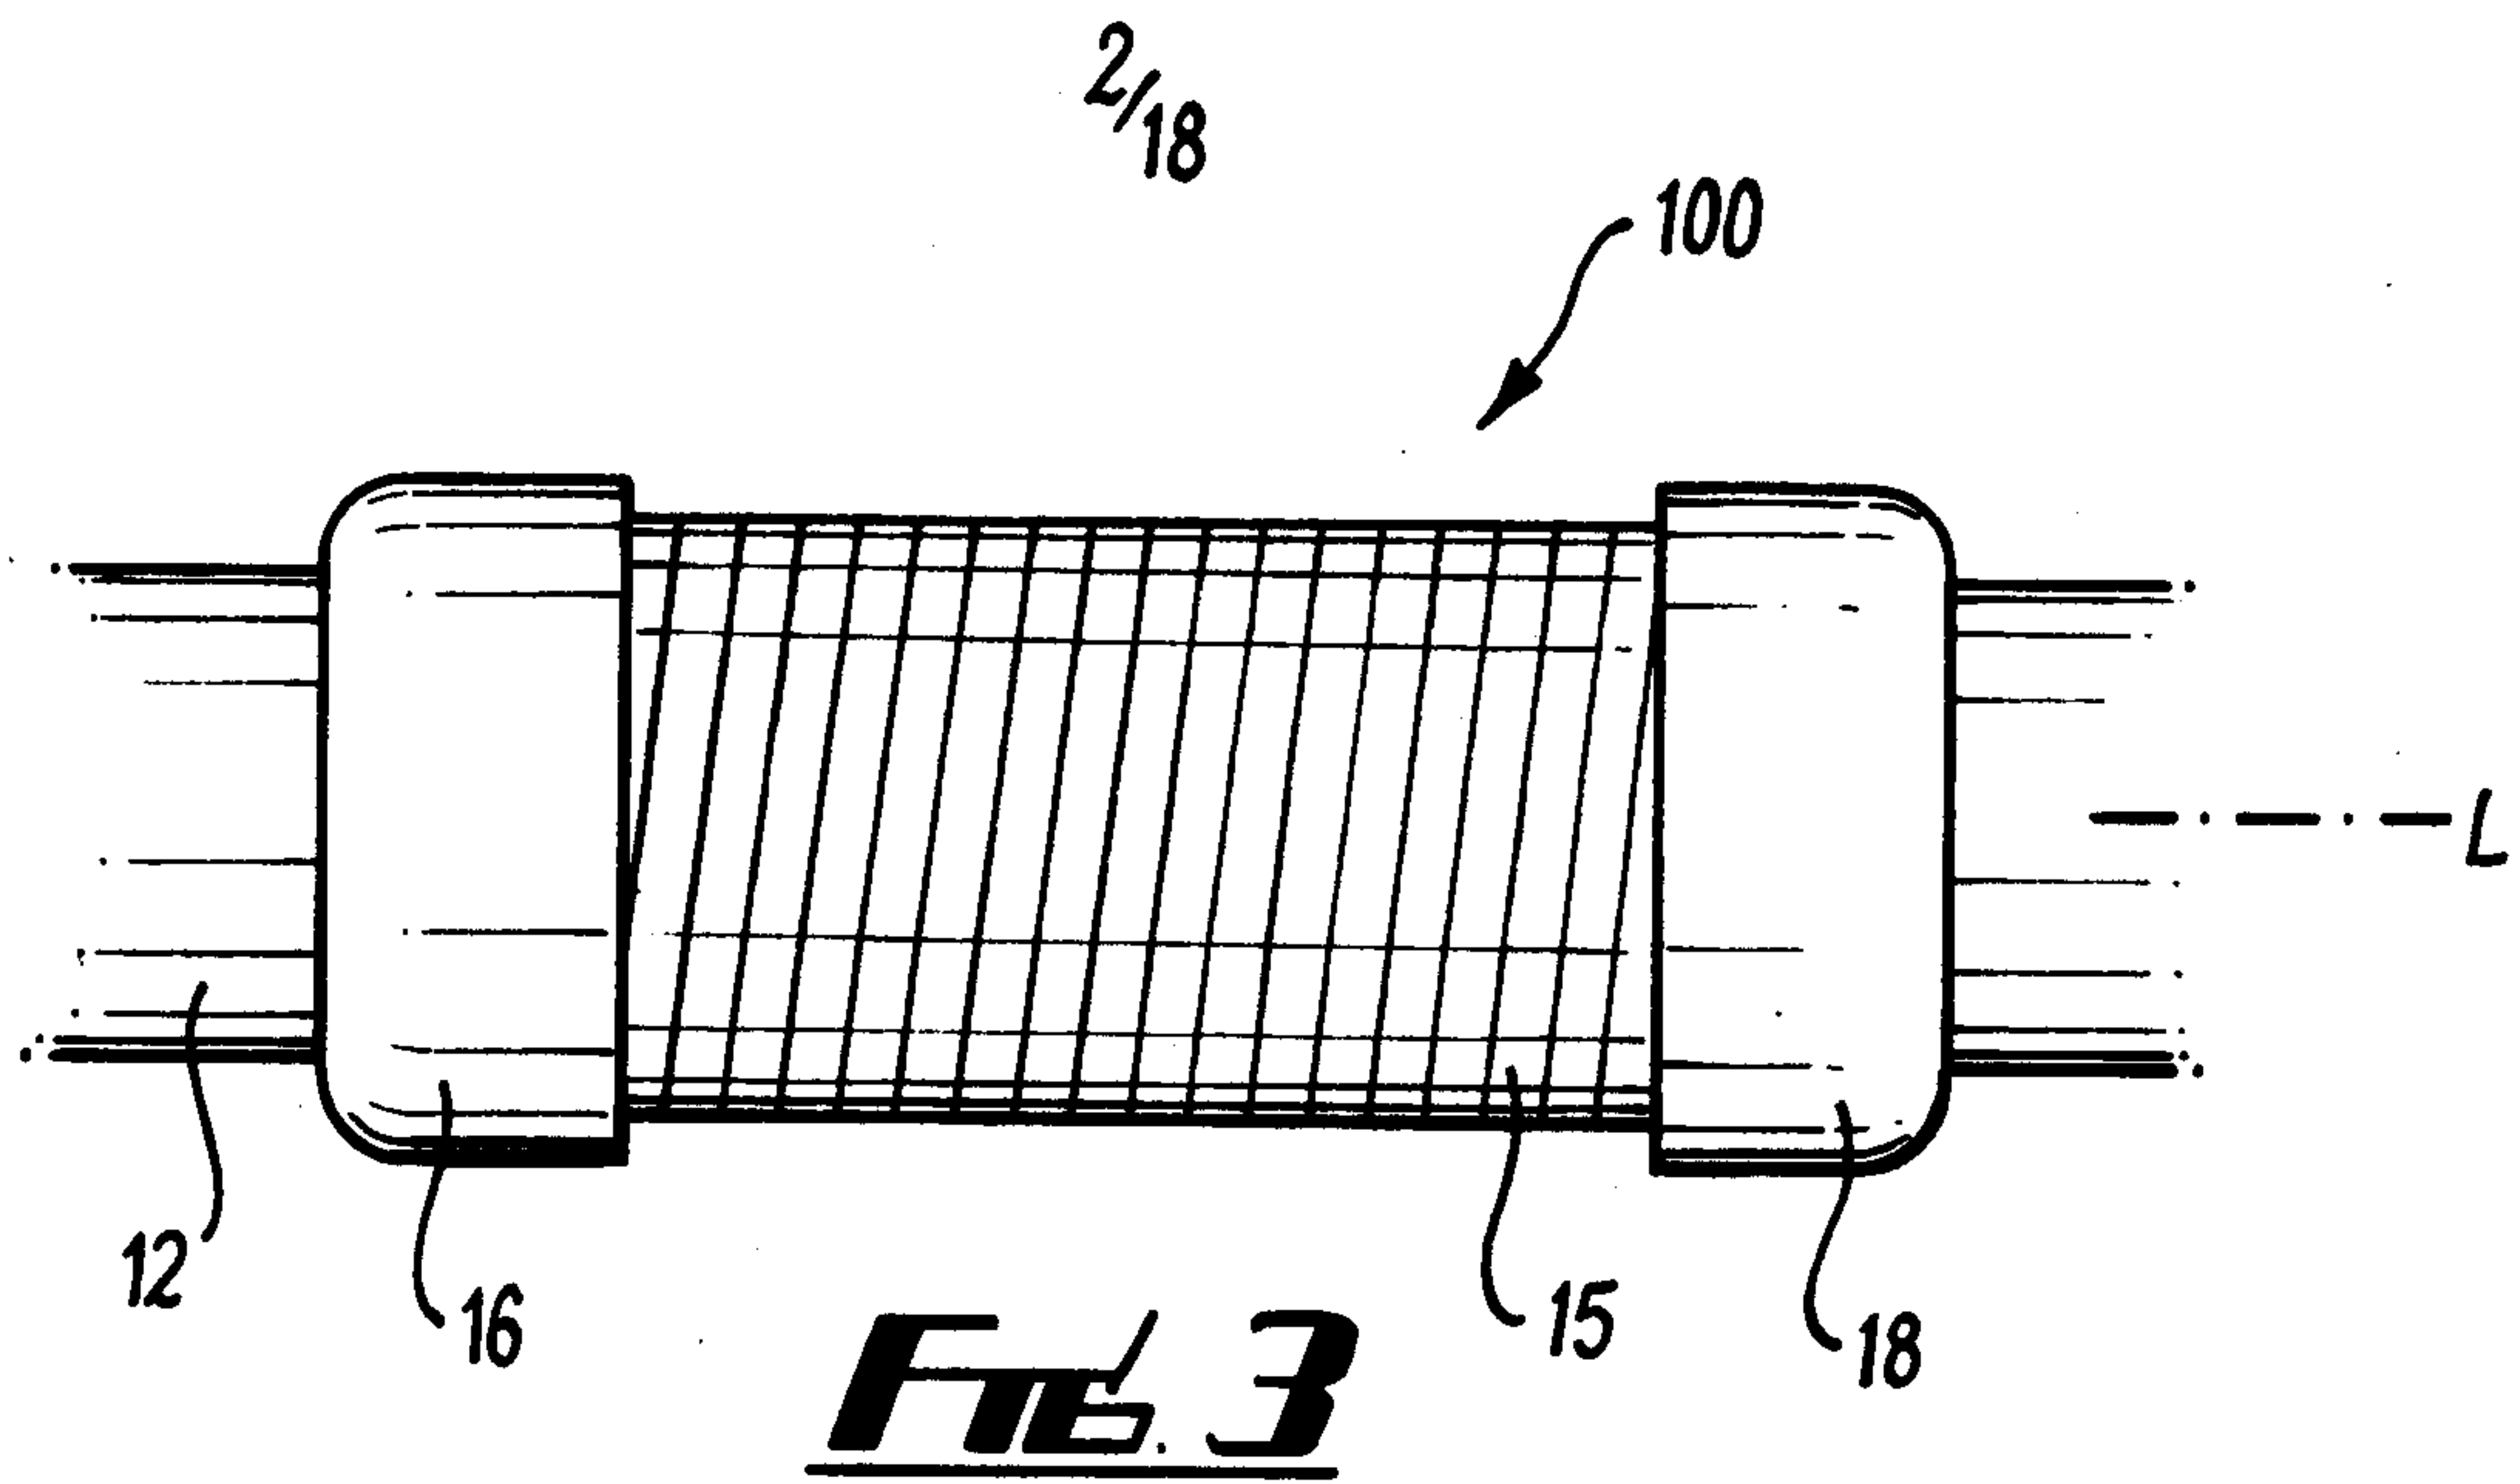
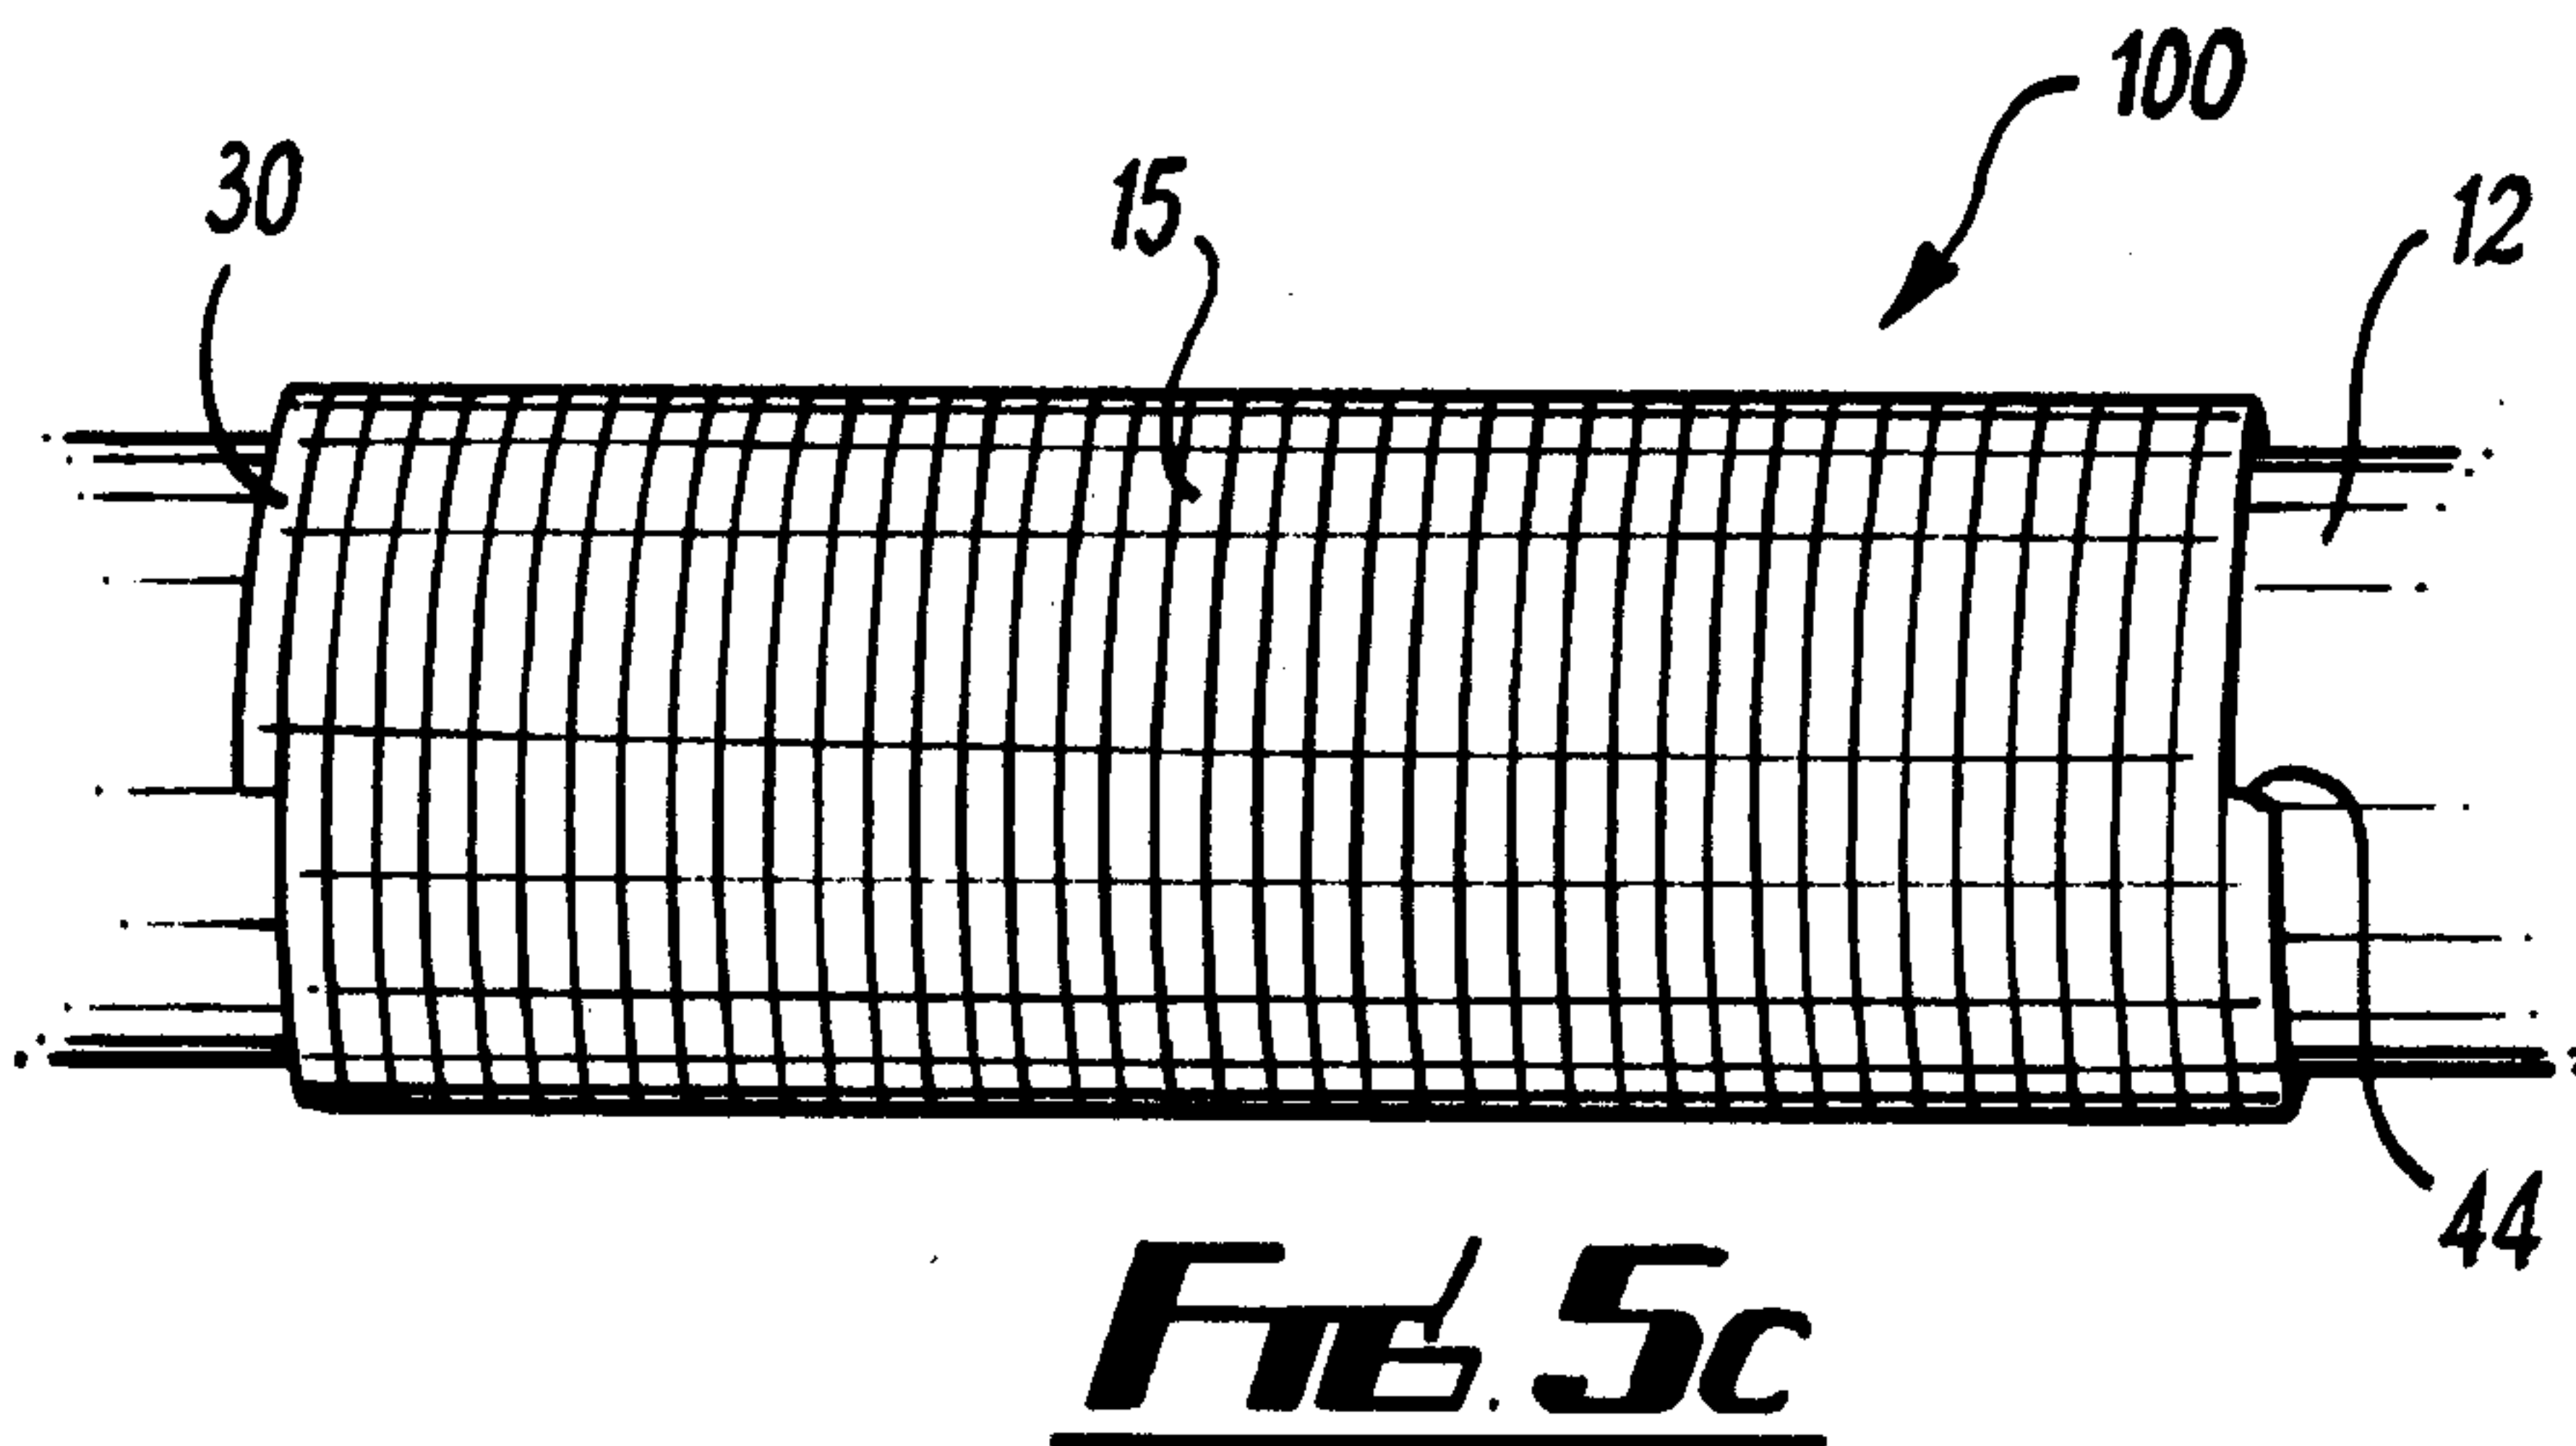
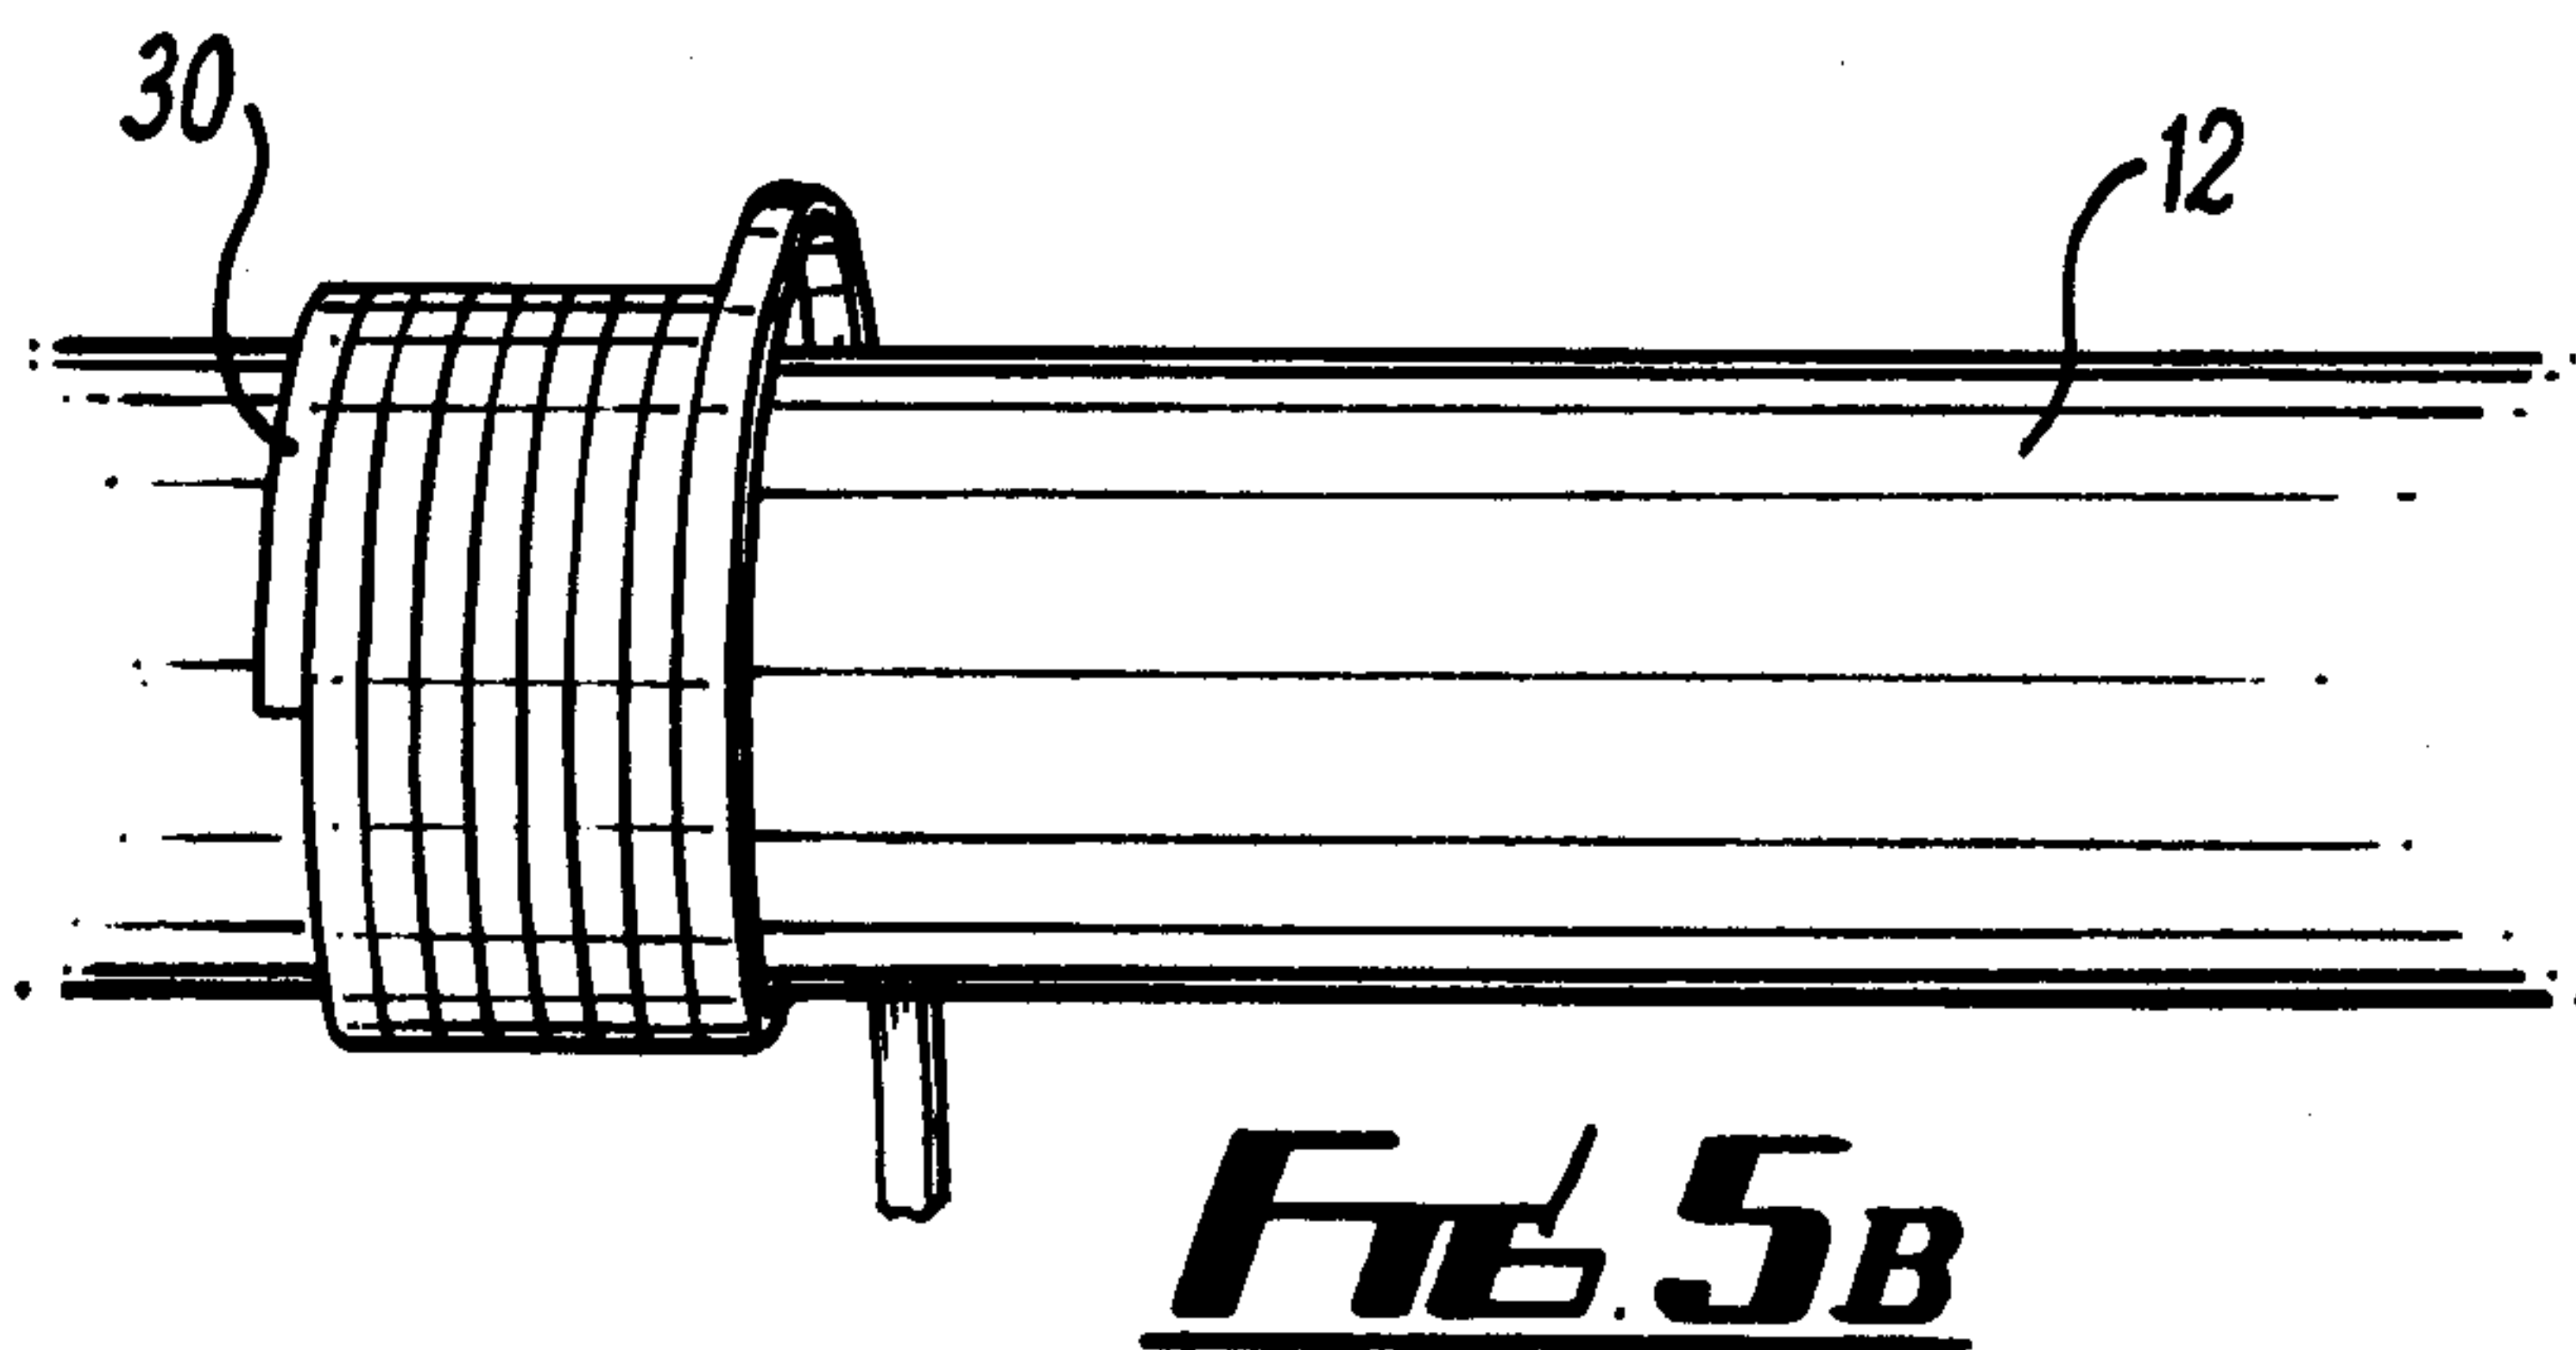
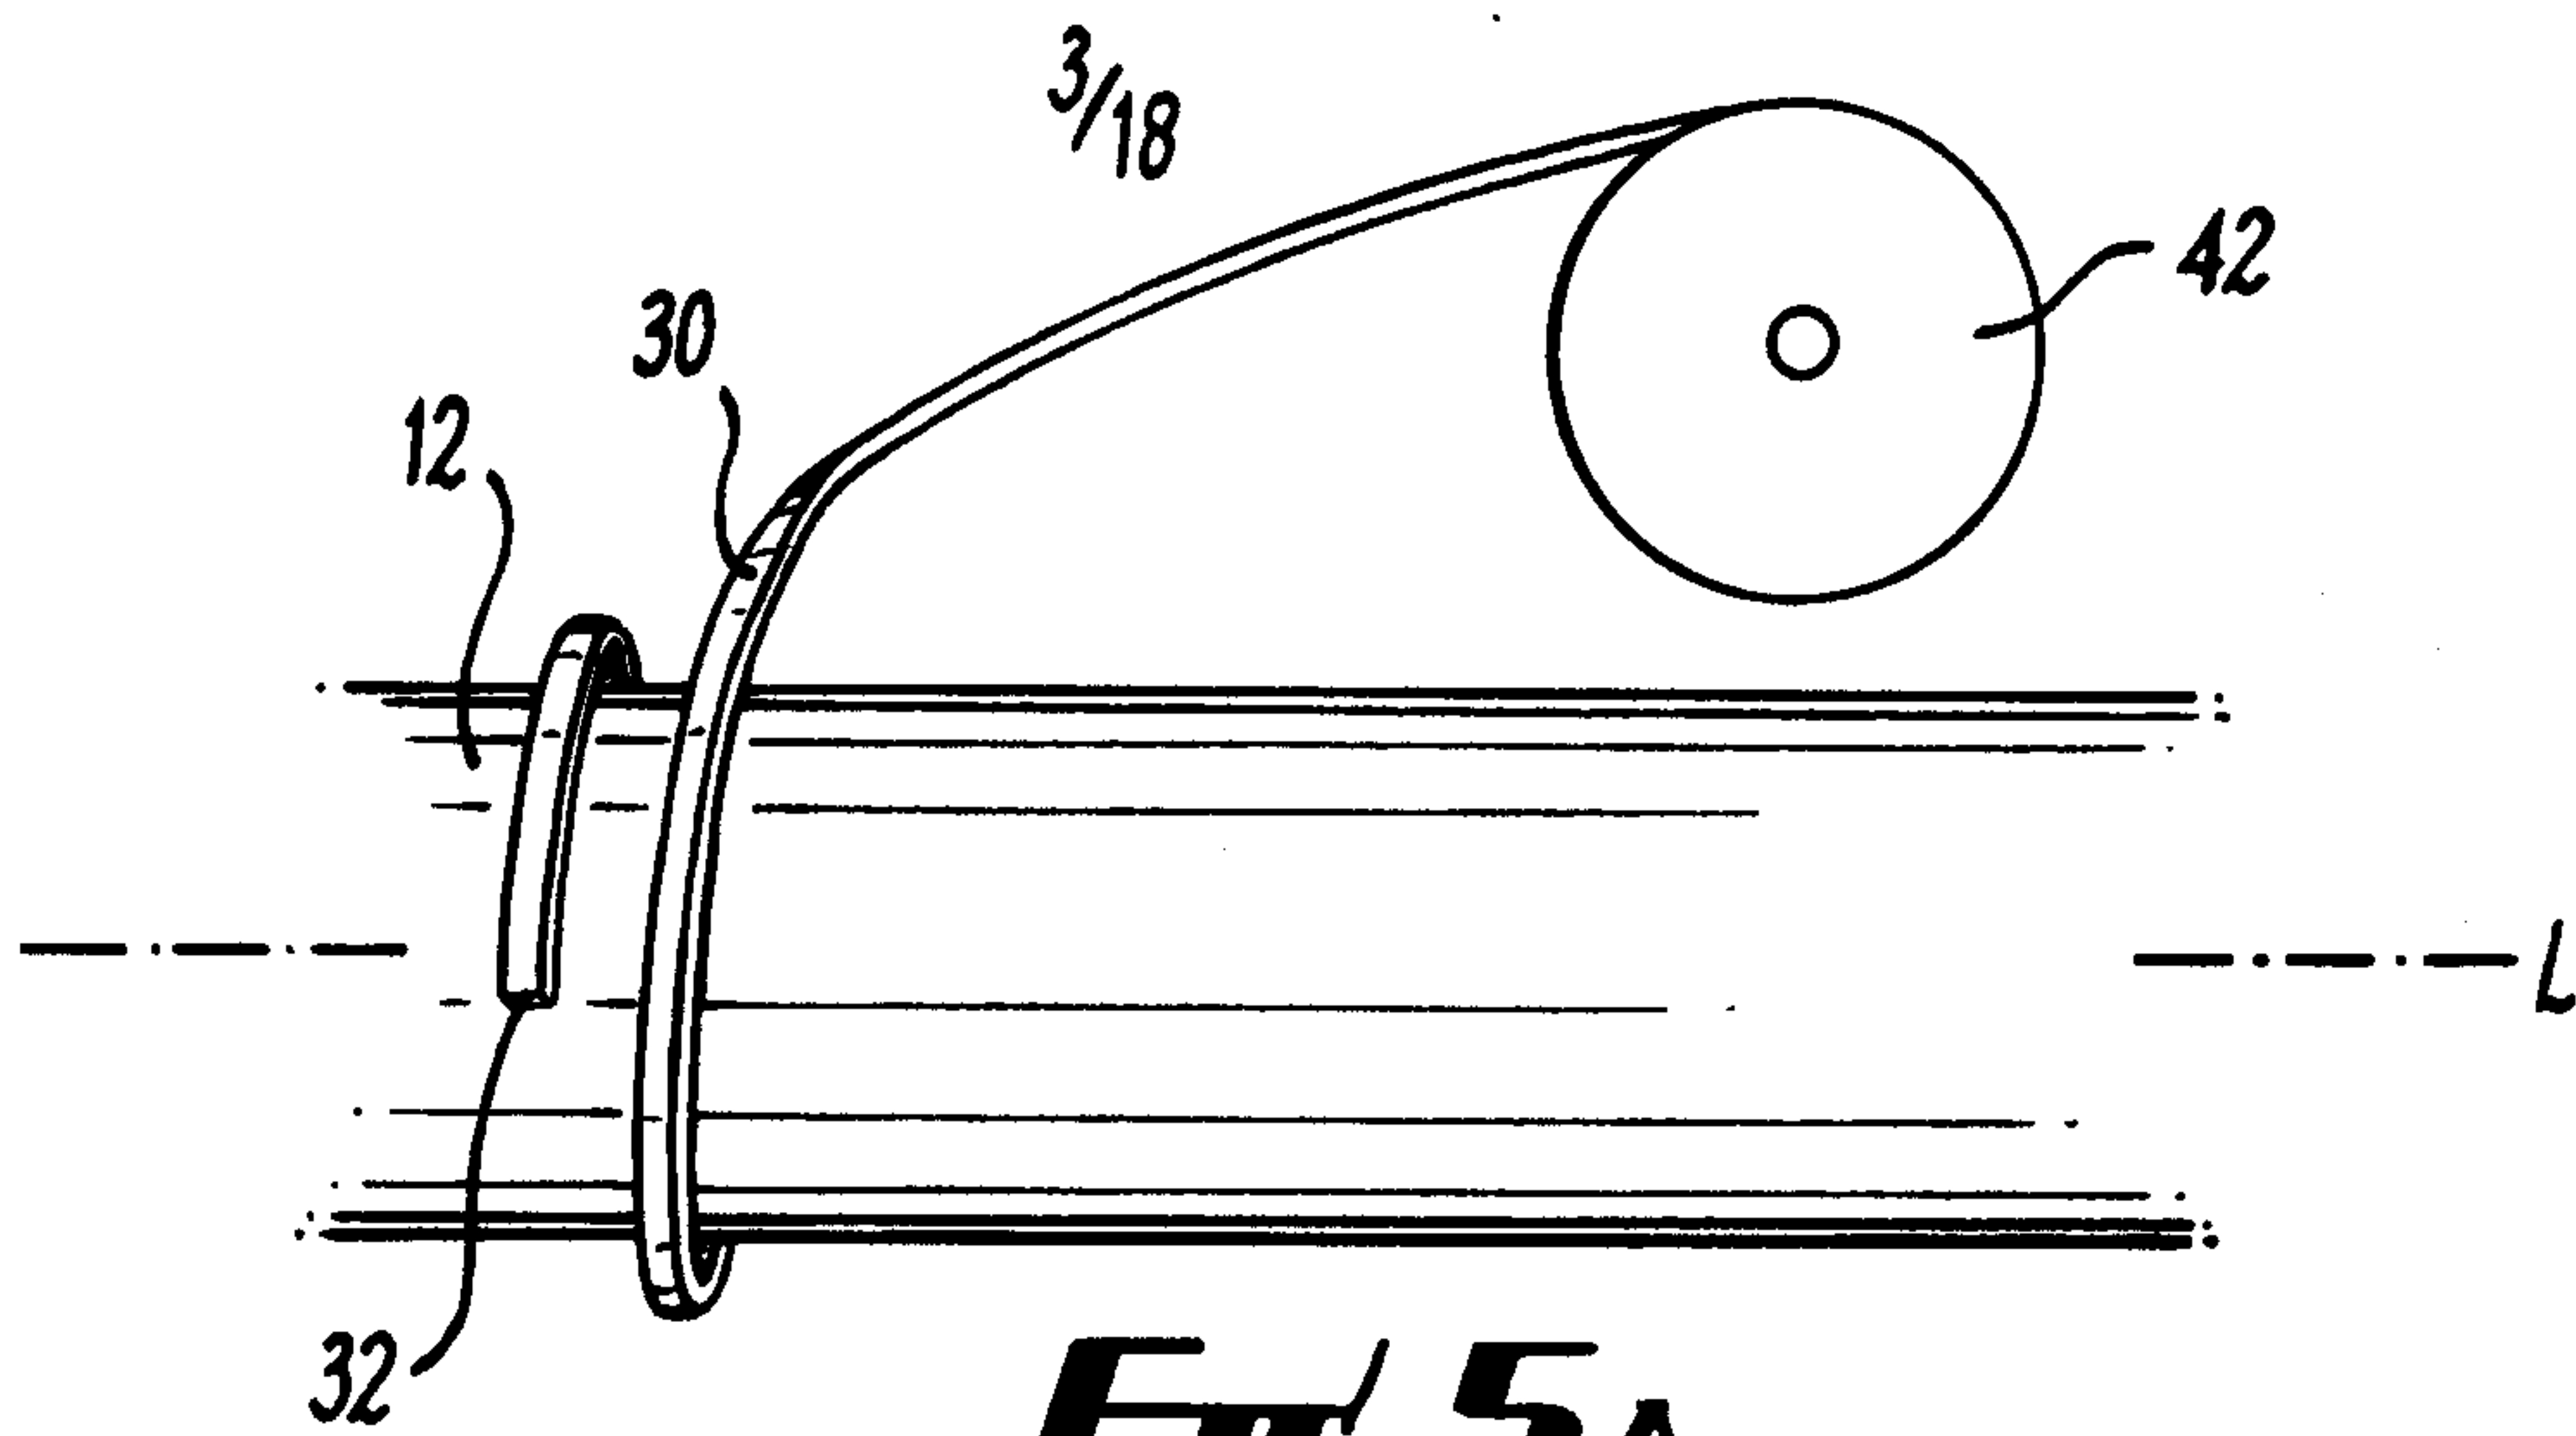
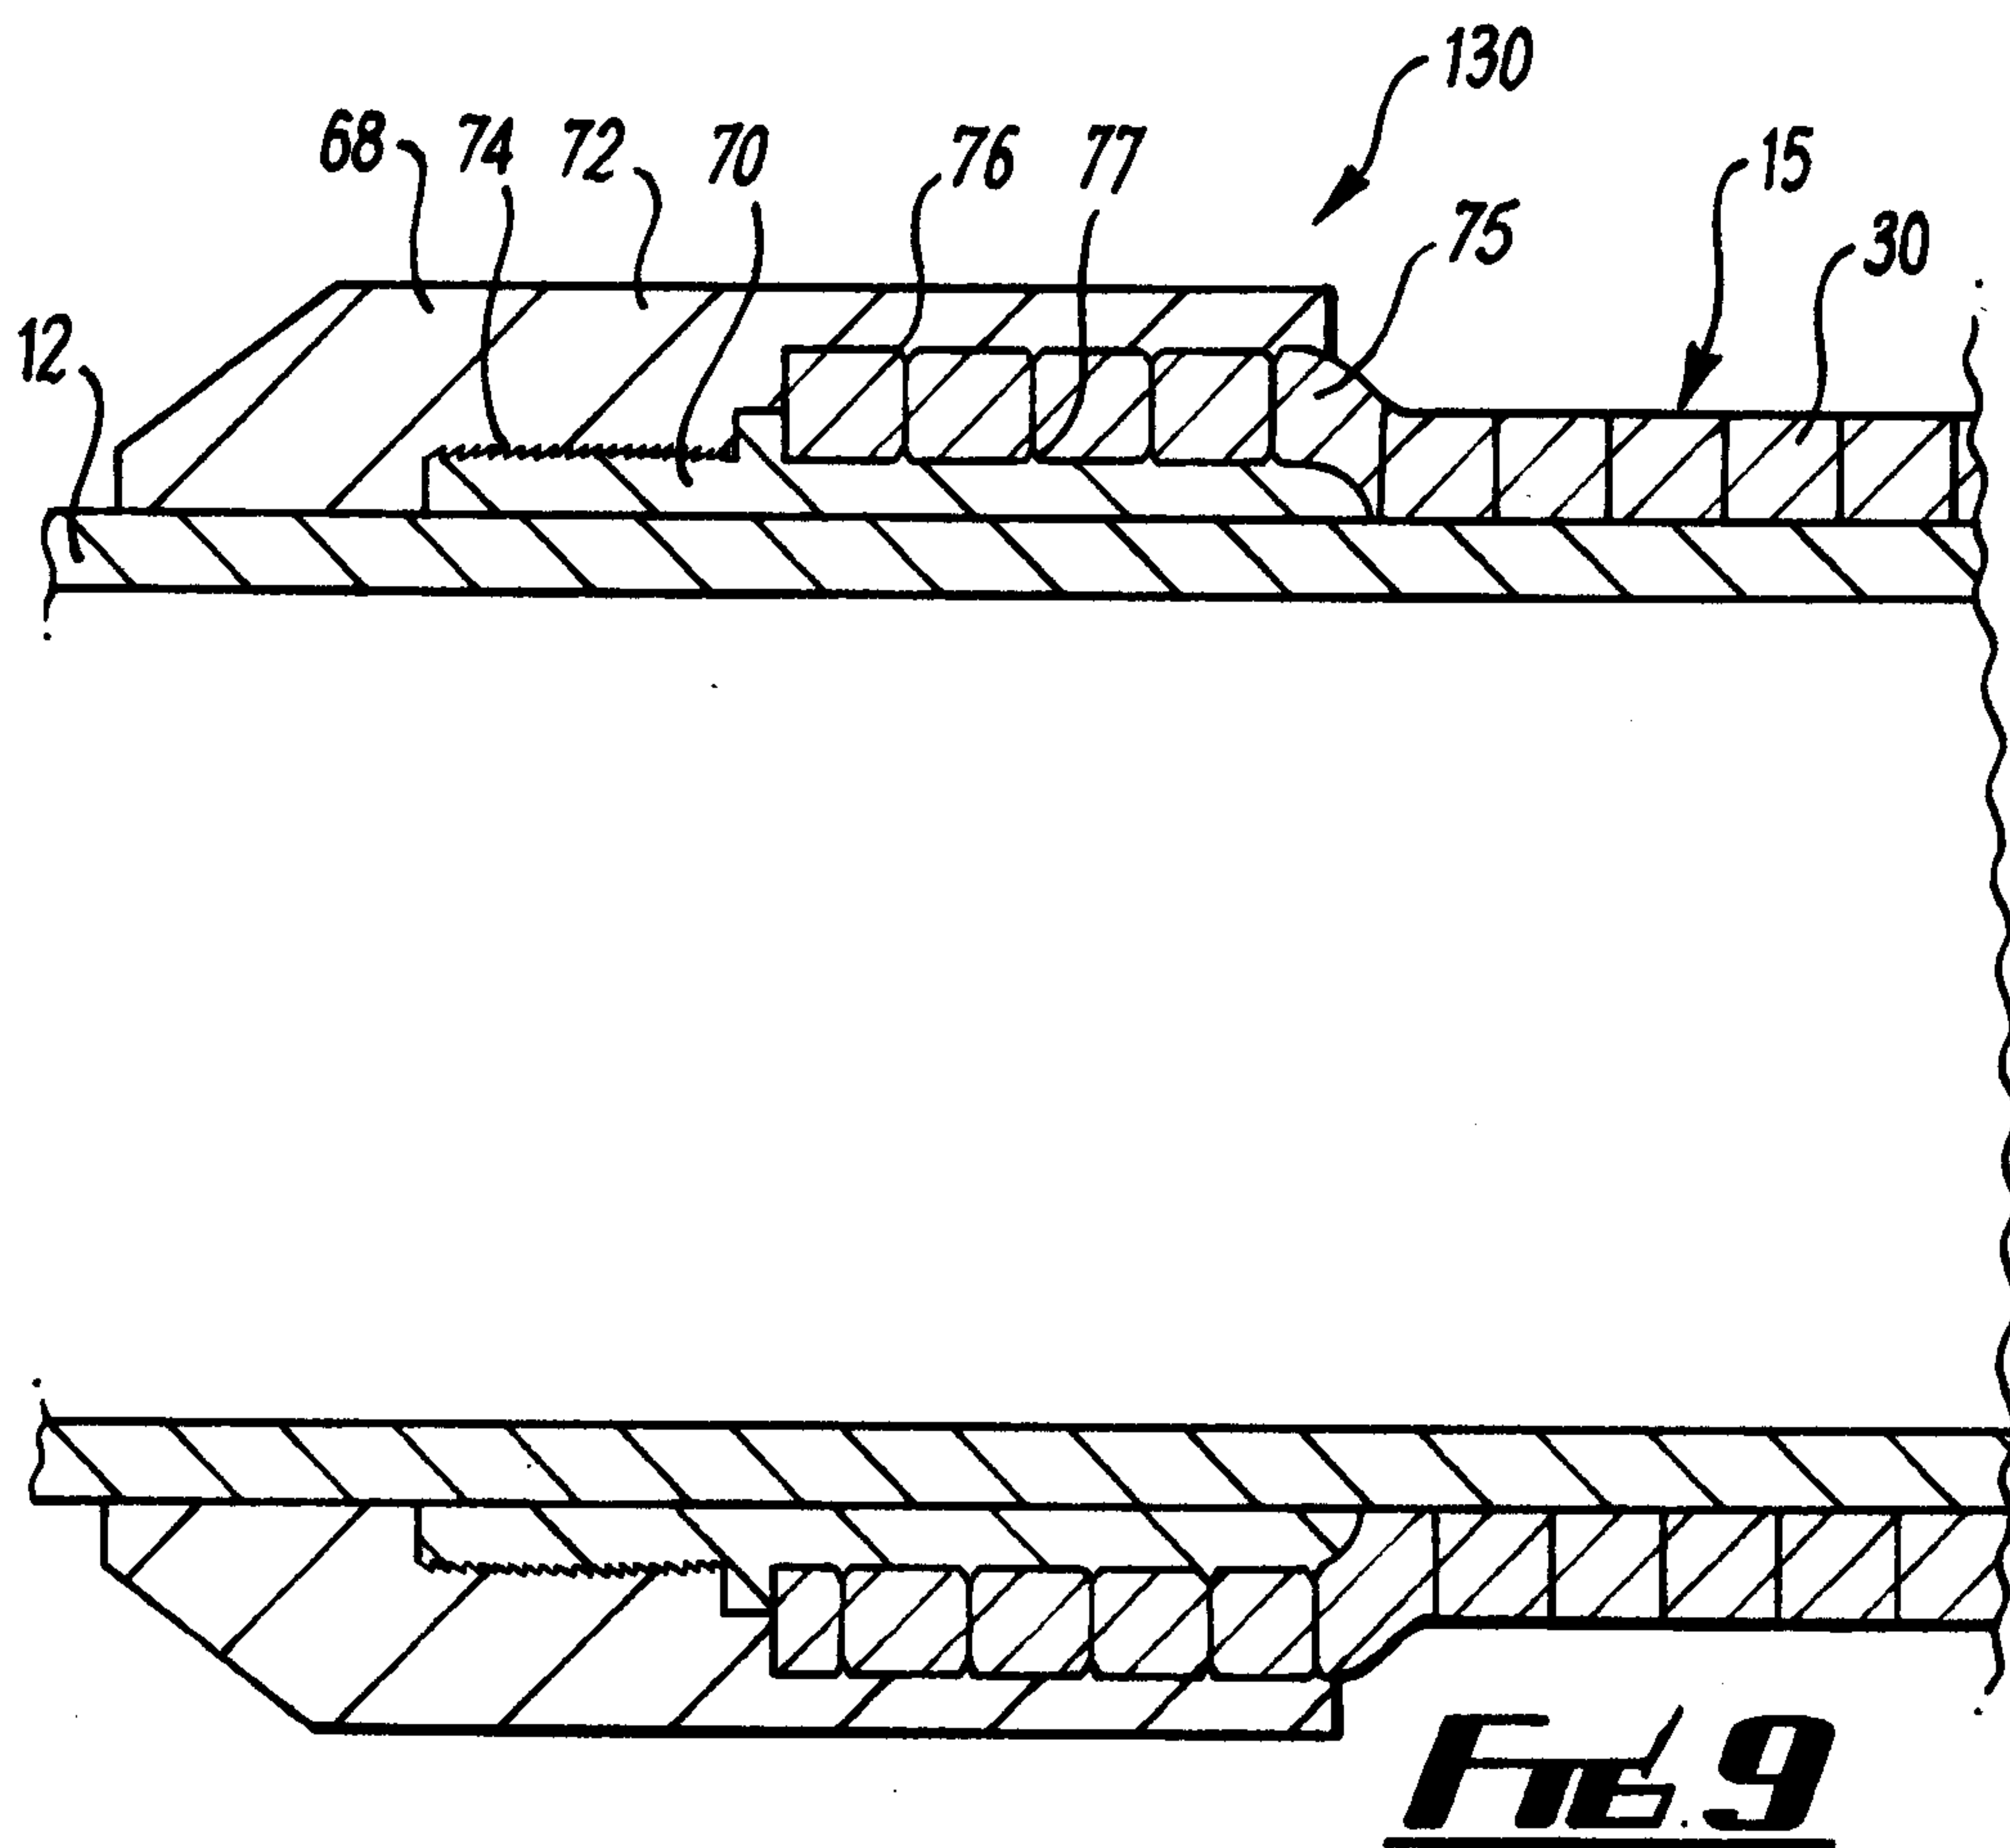
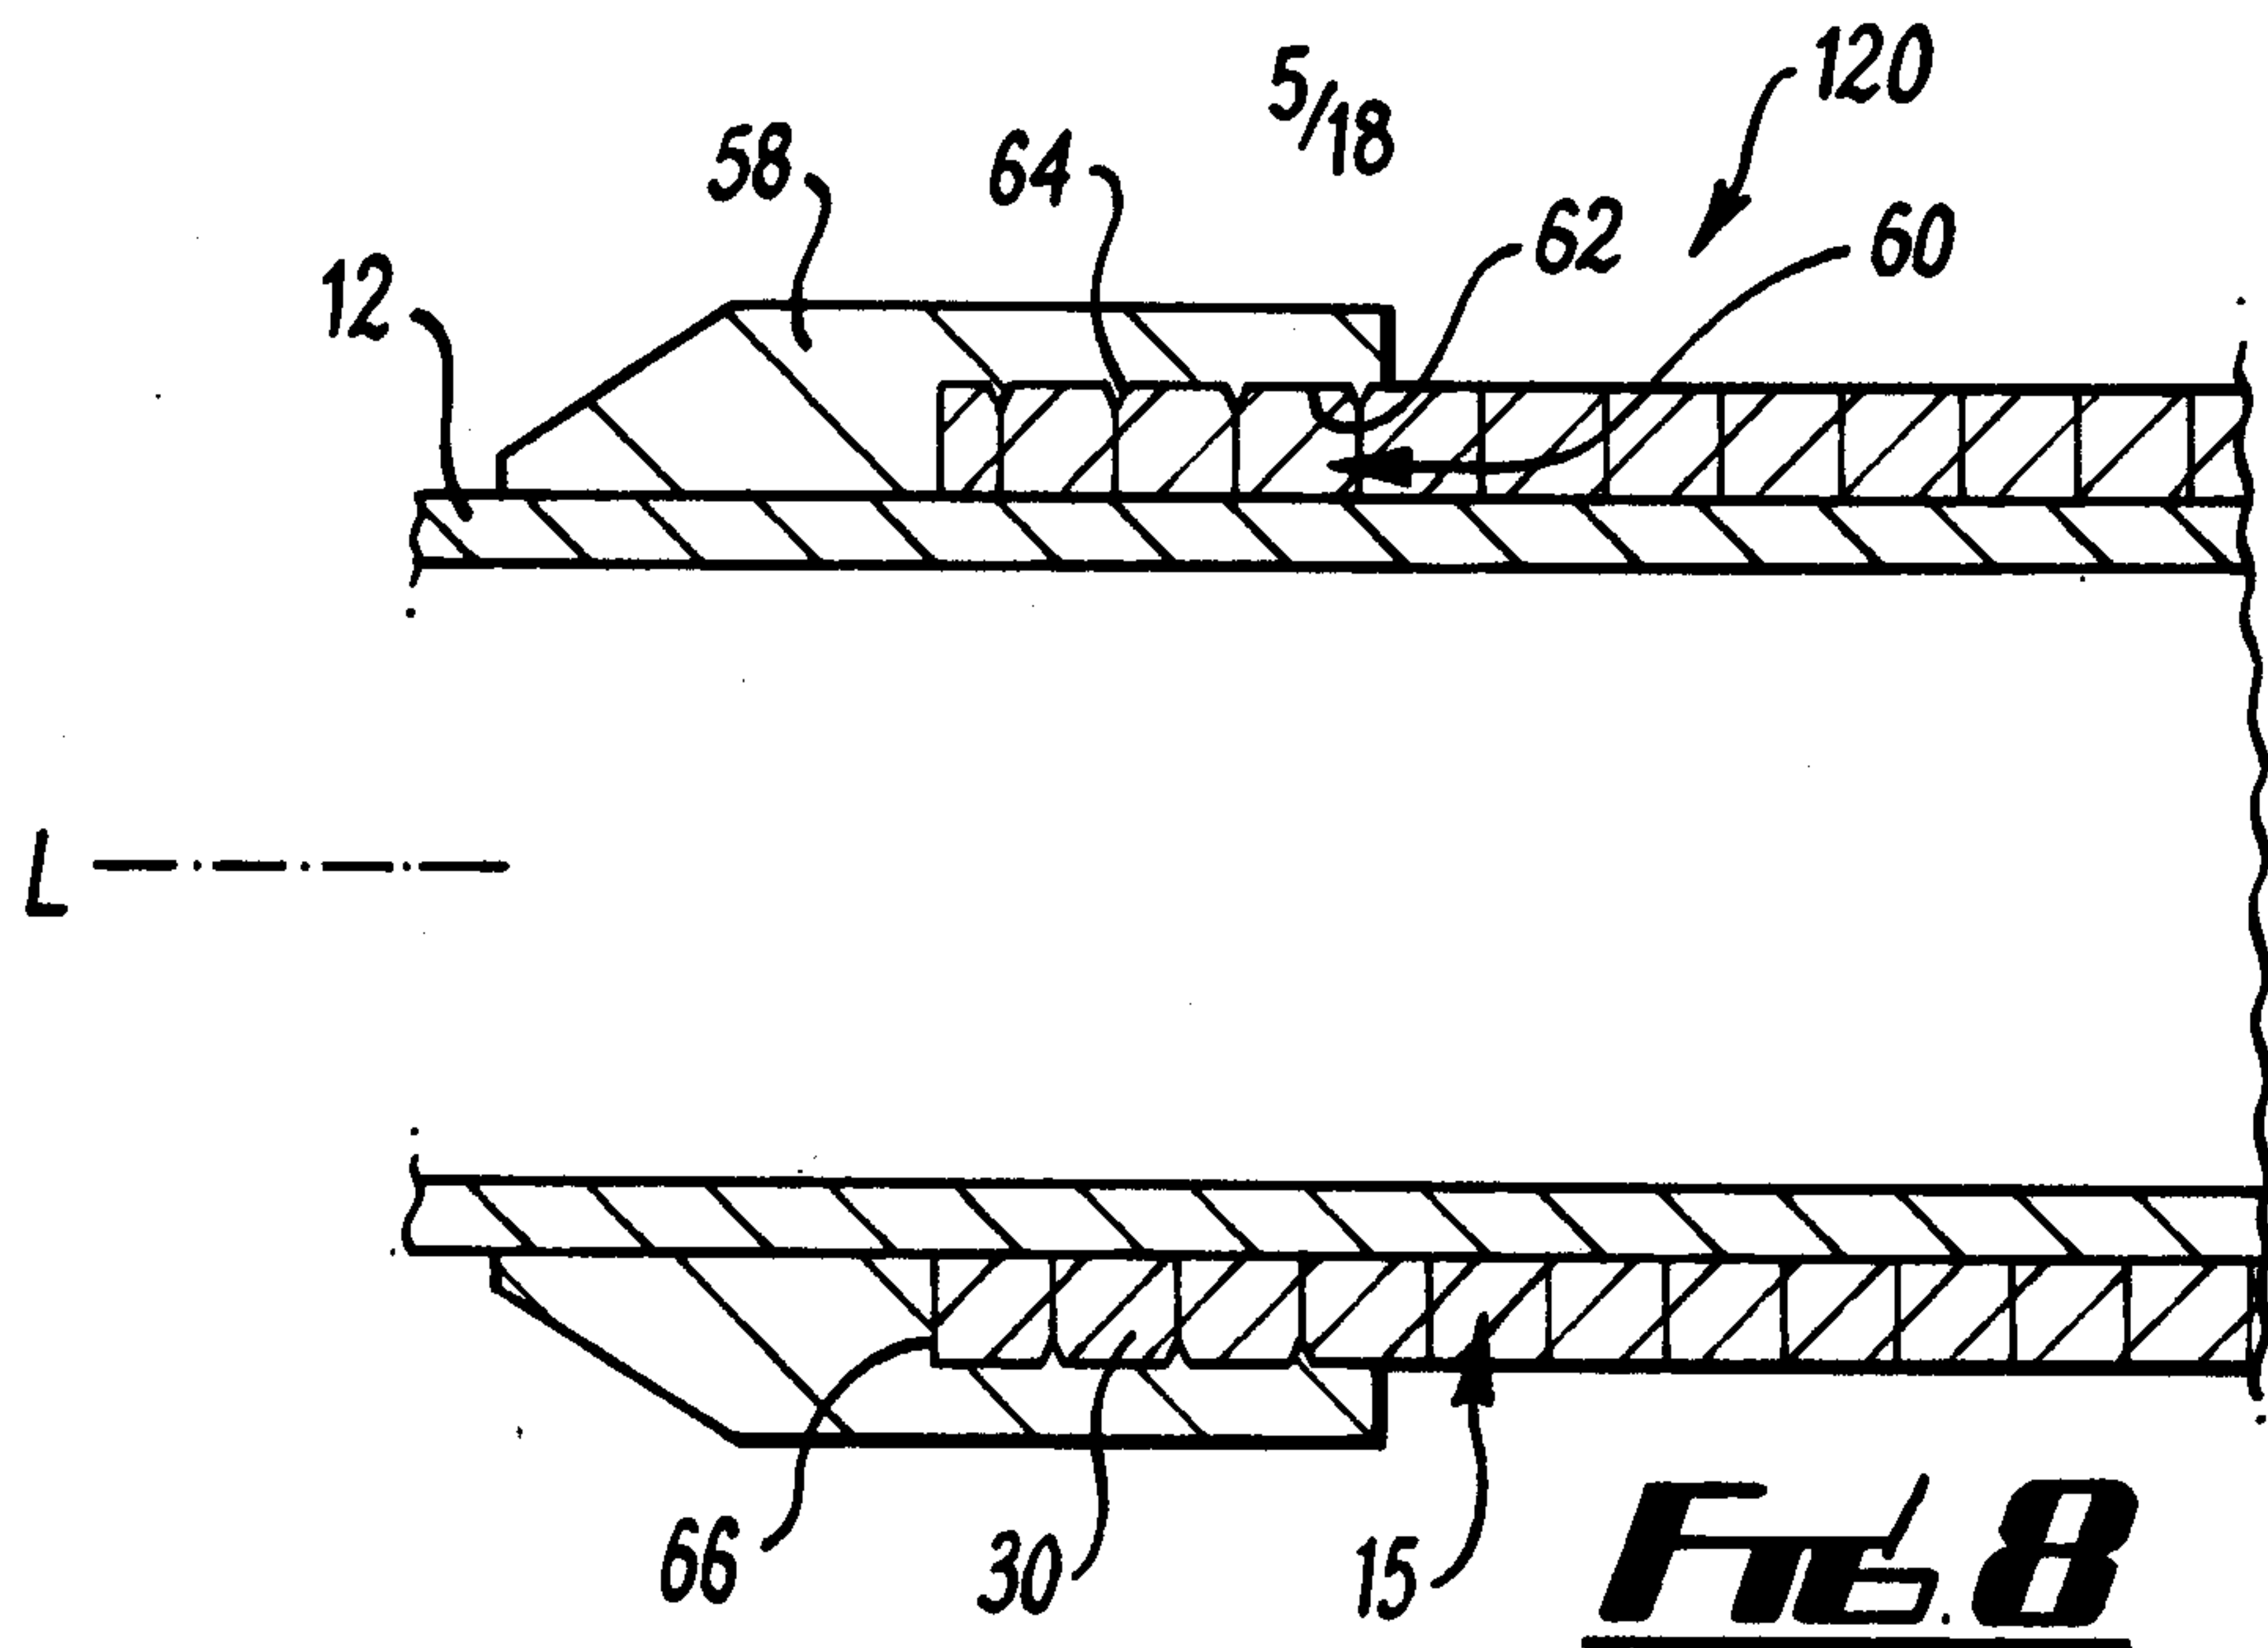


FIG. 2B
(Prior Art)







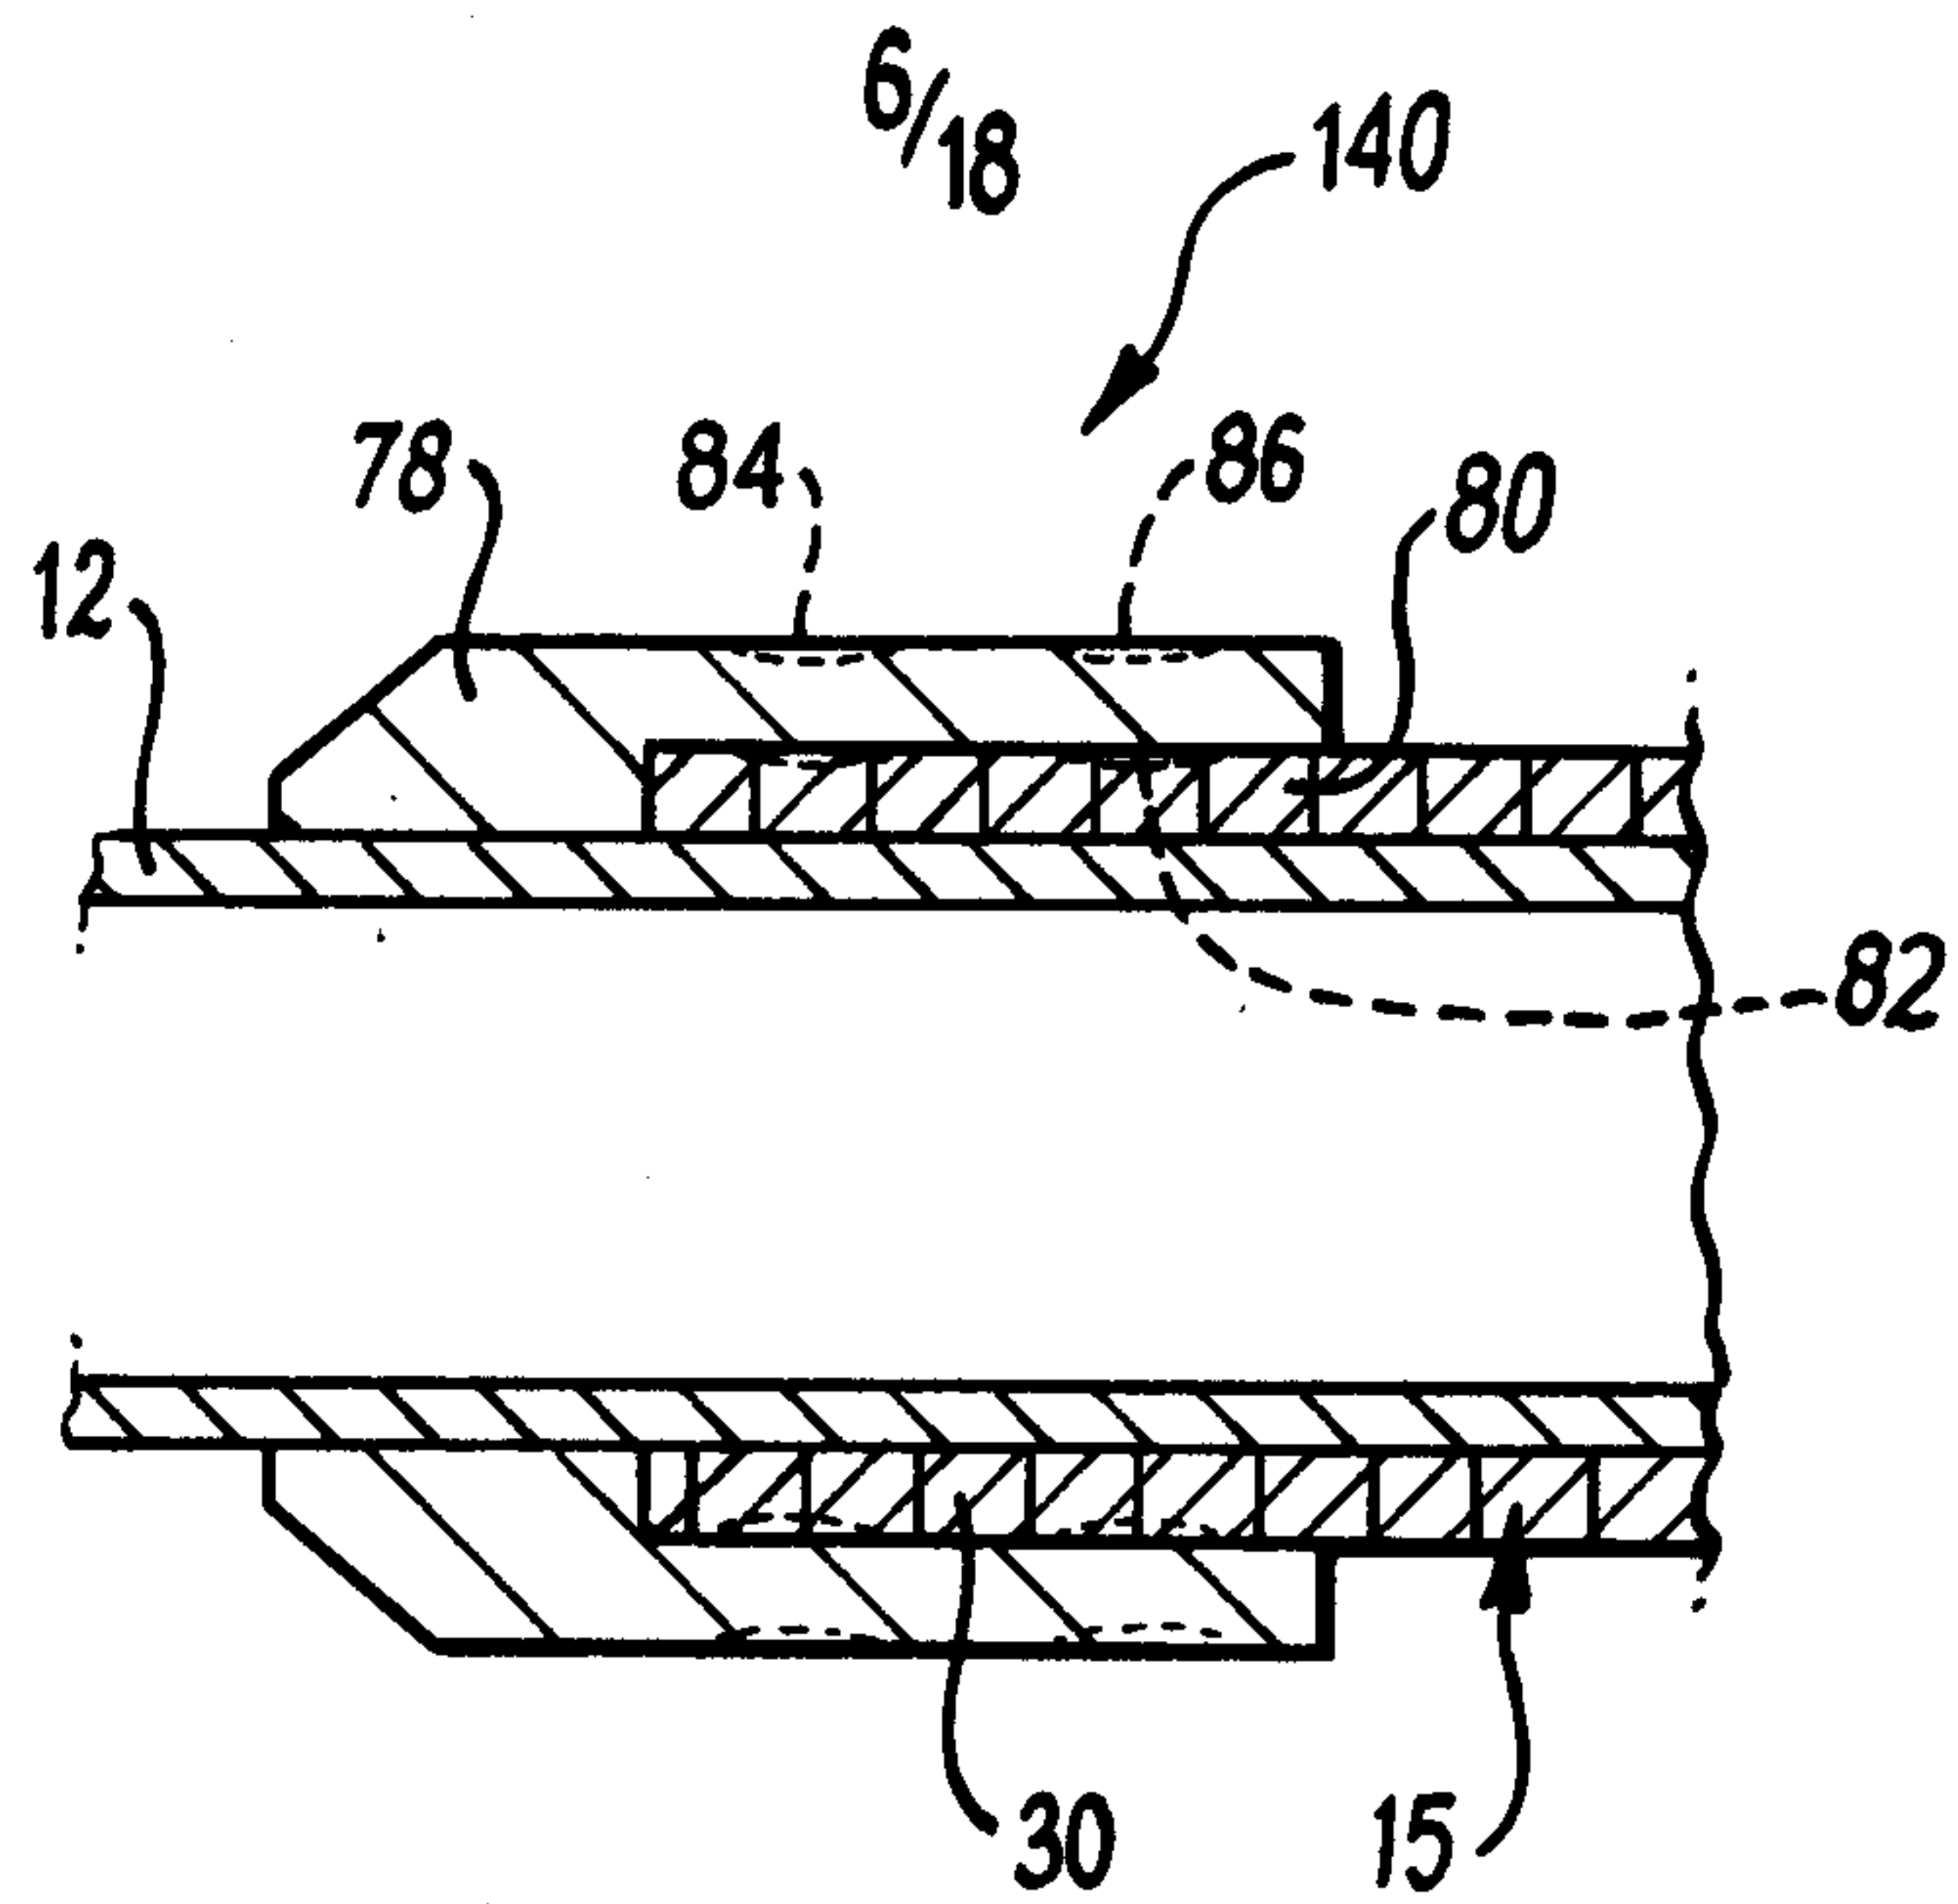


FIG. 10









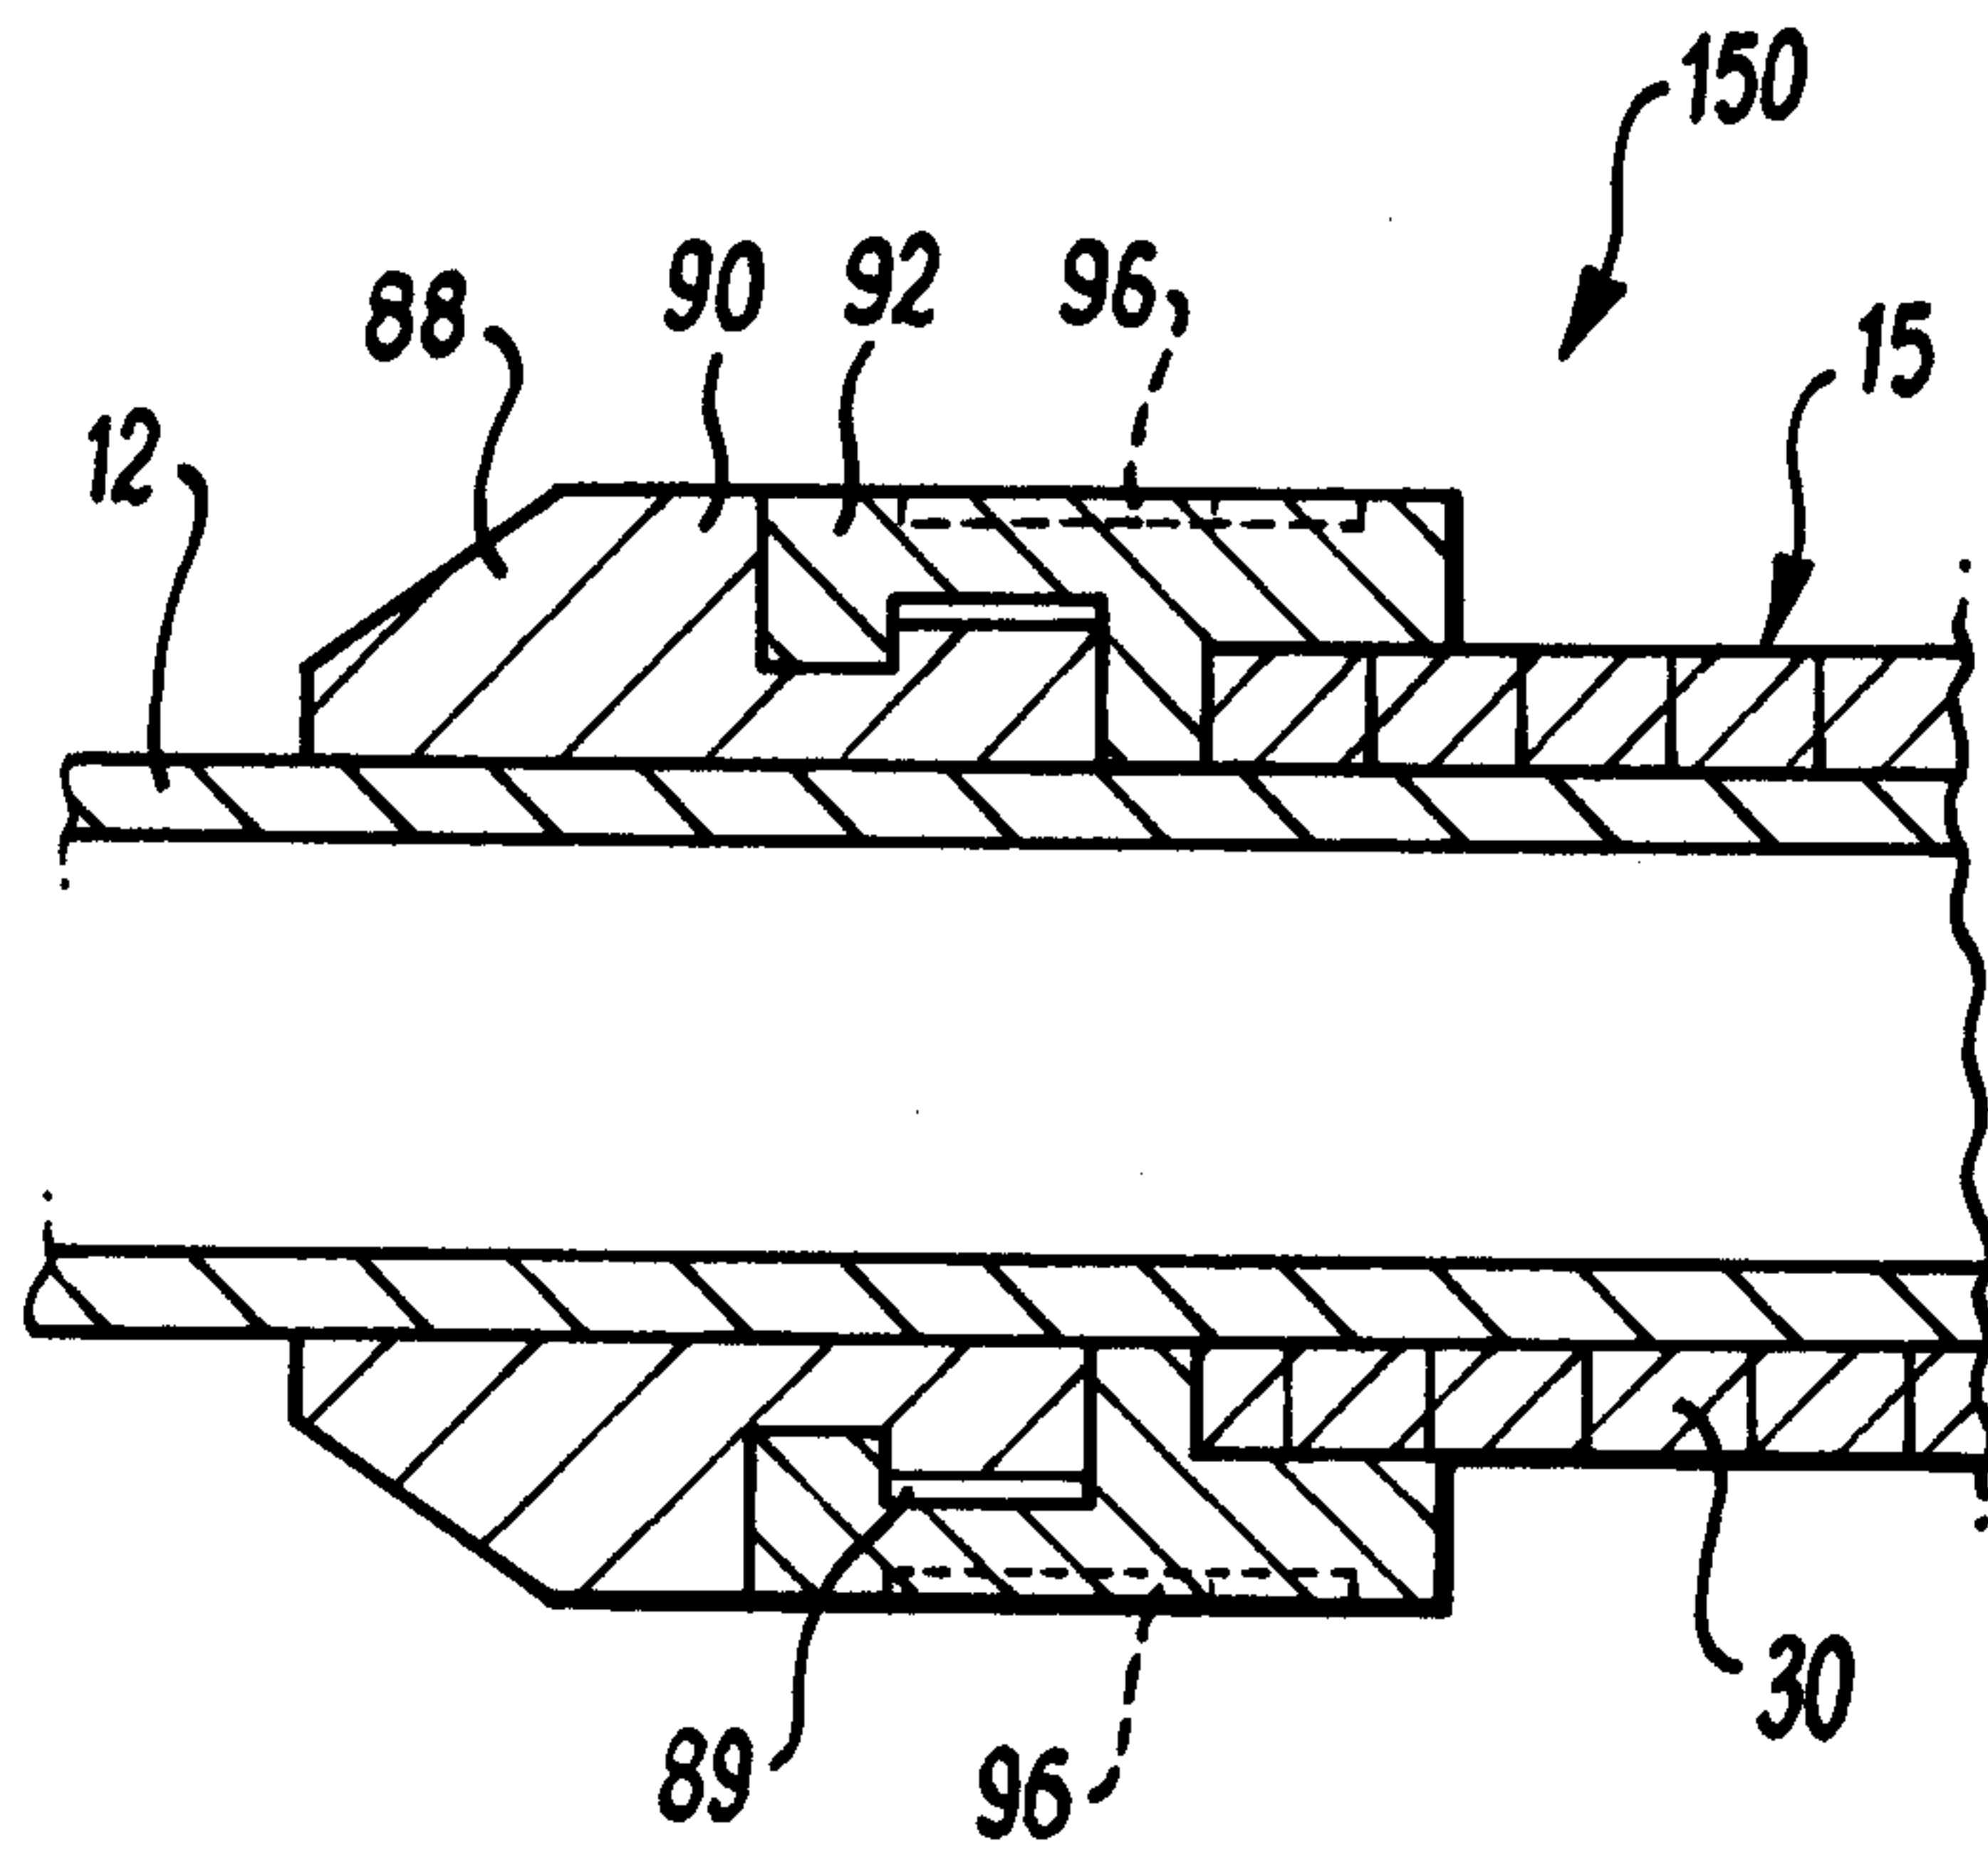







FIG. 11

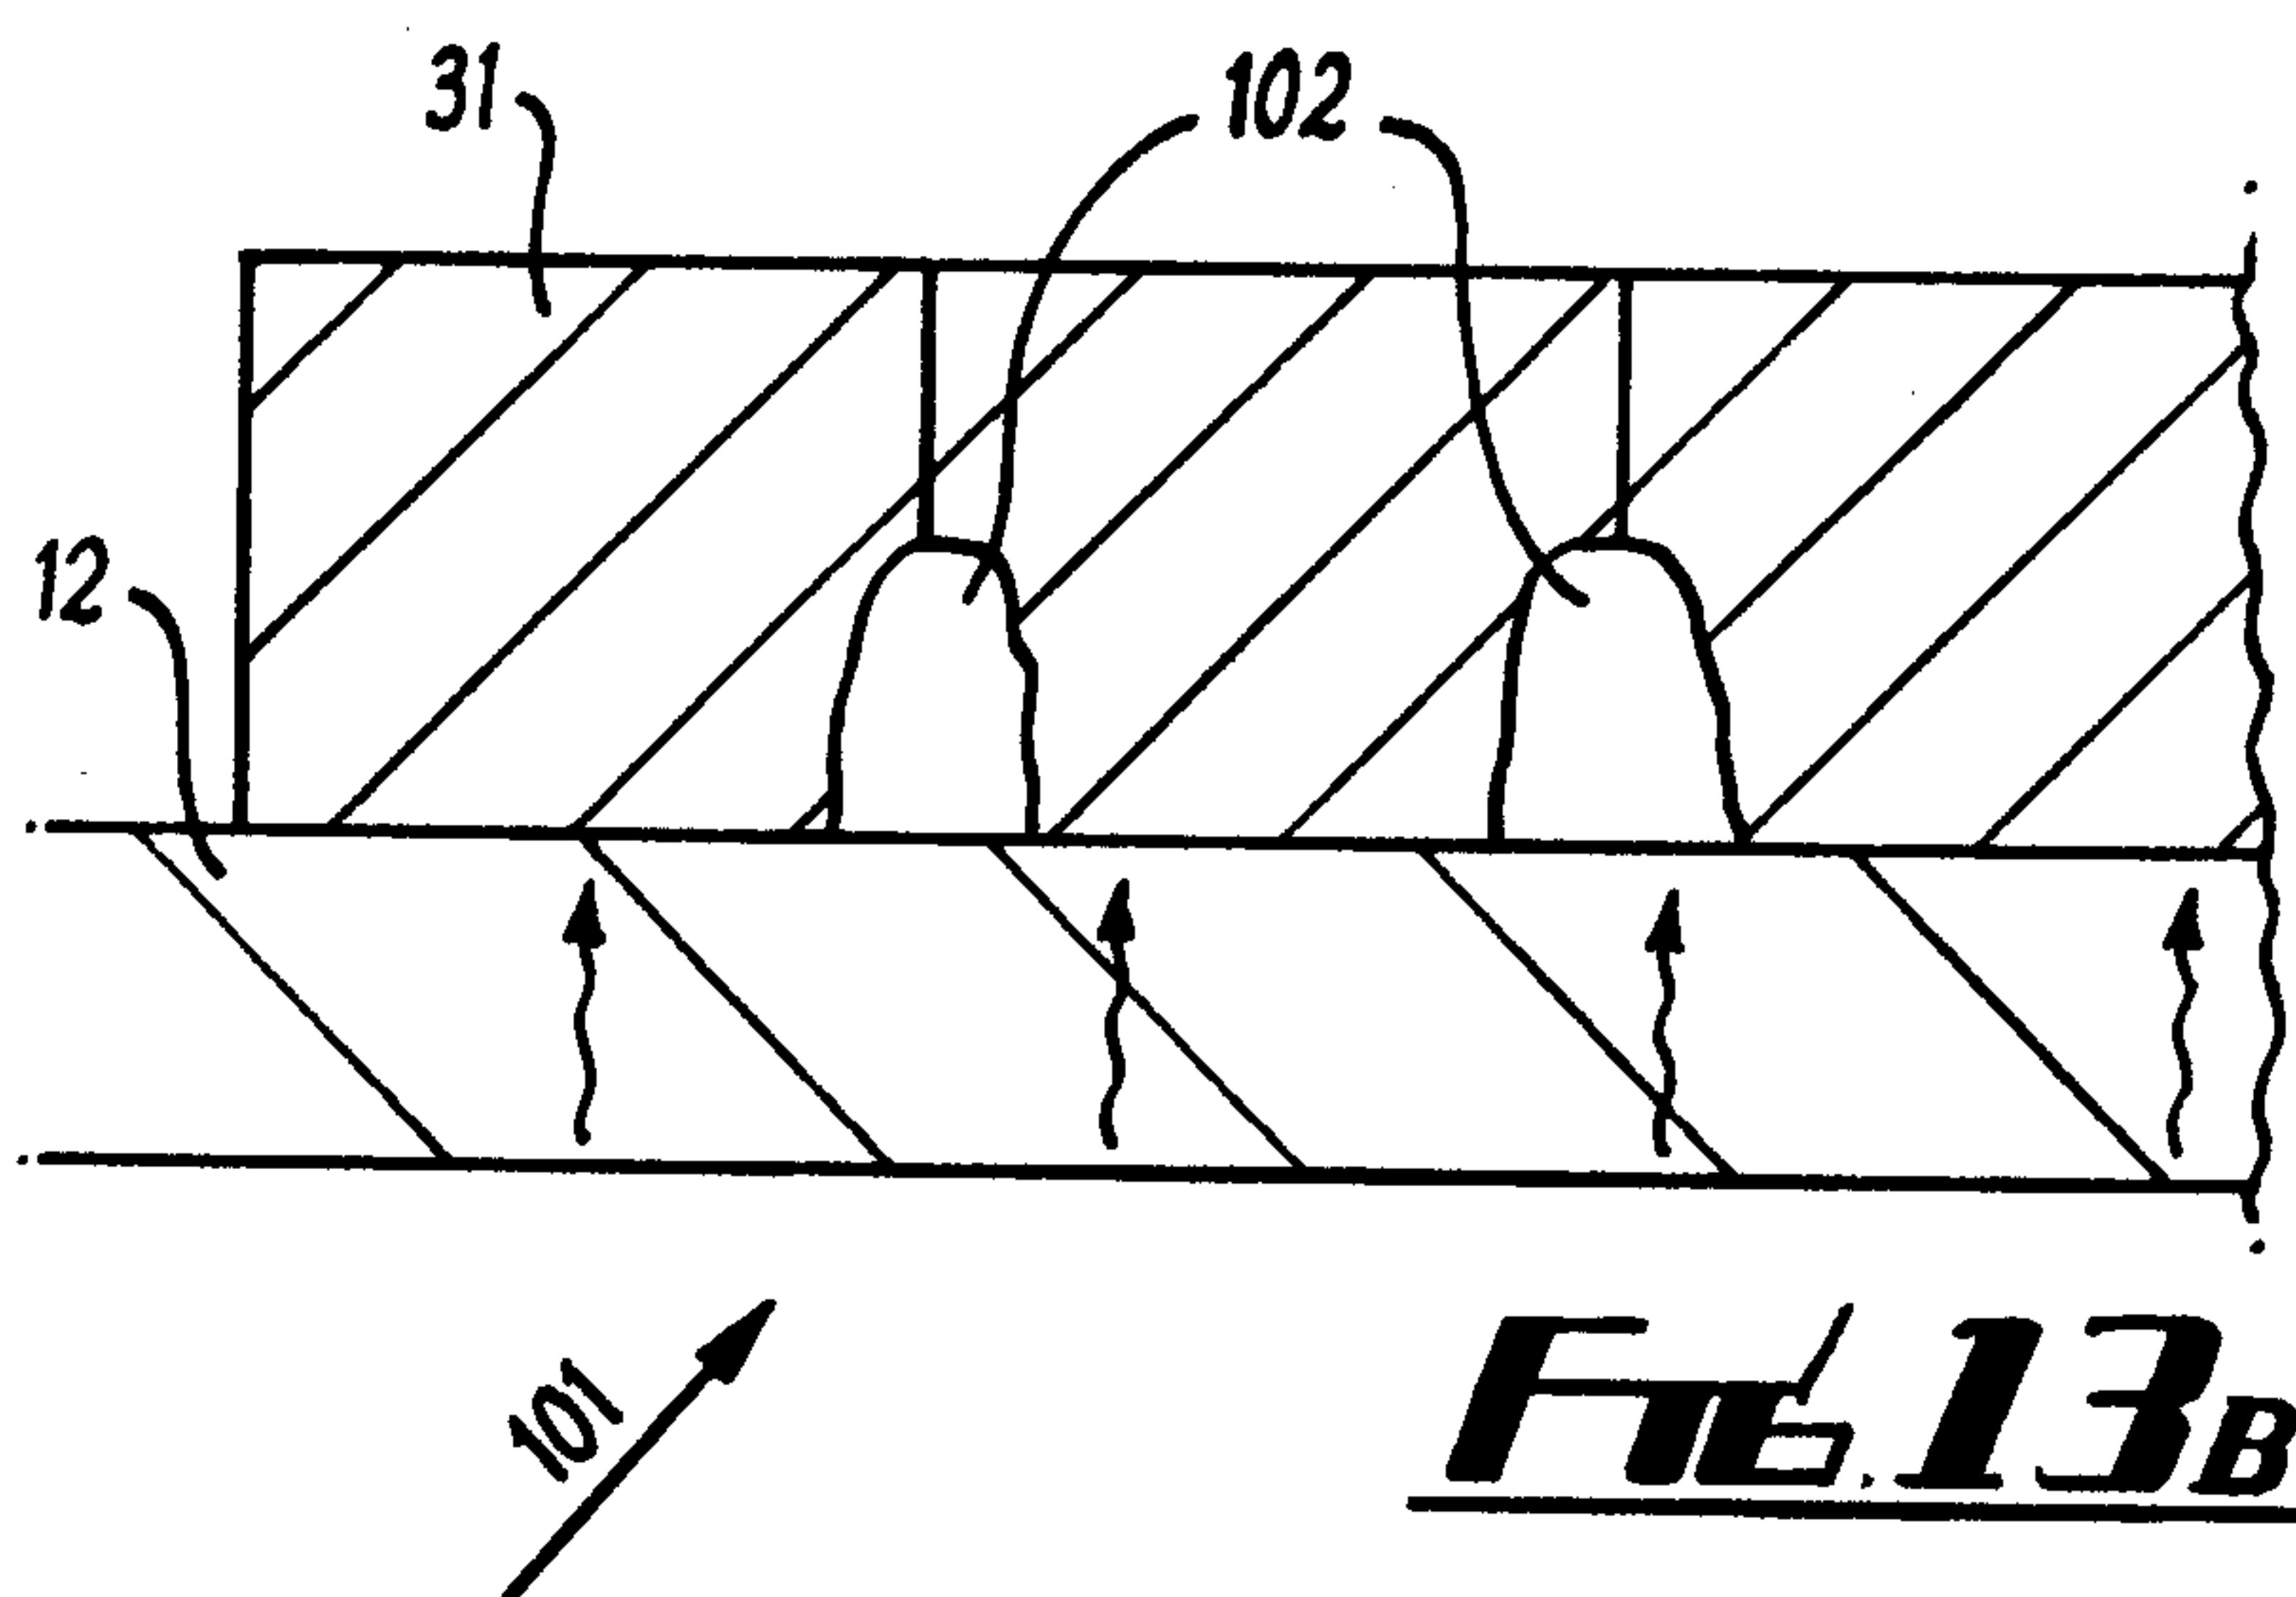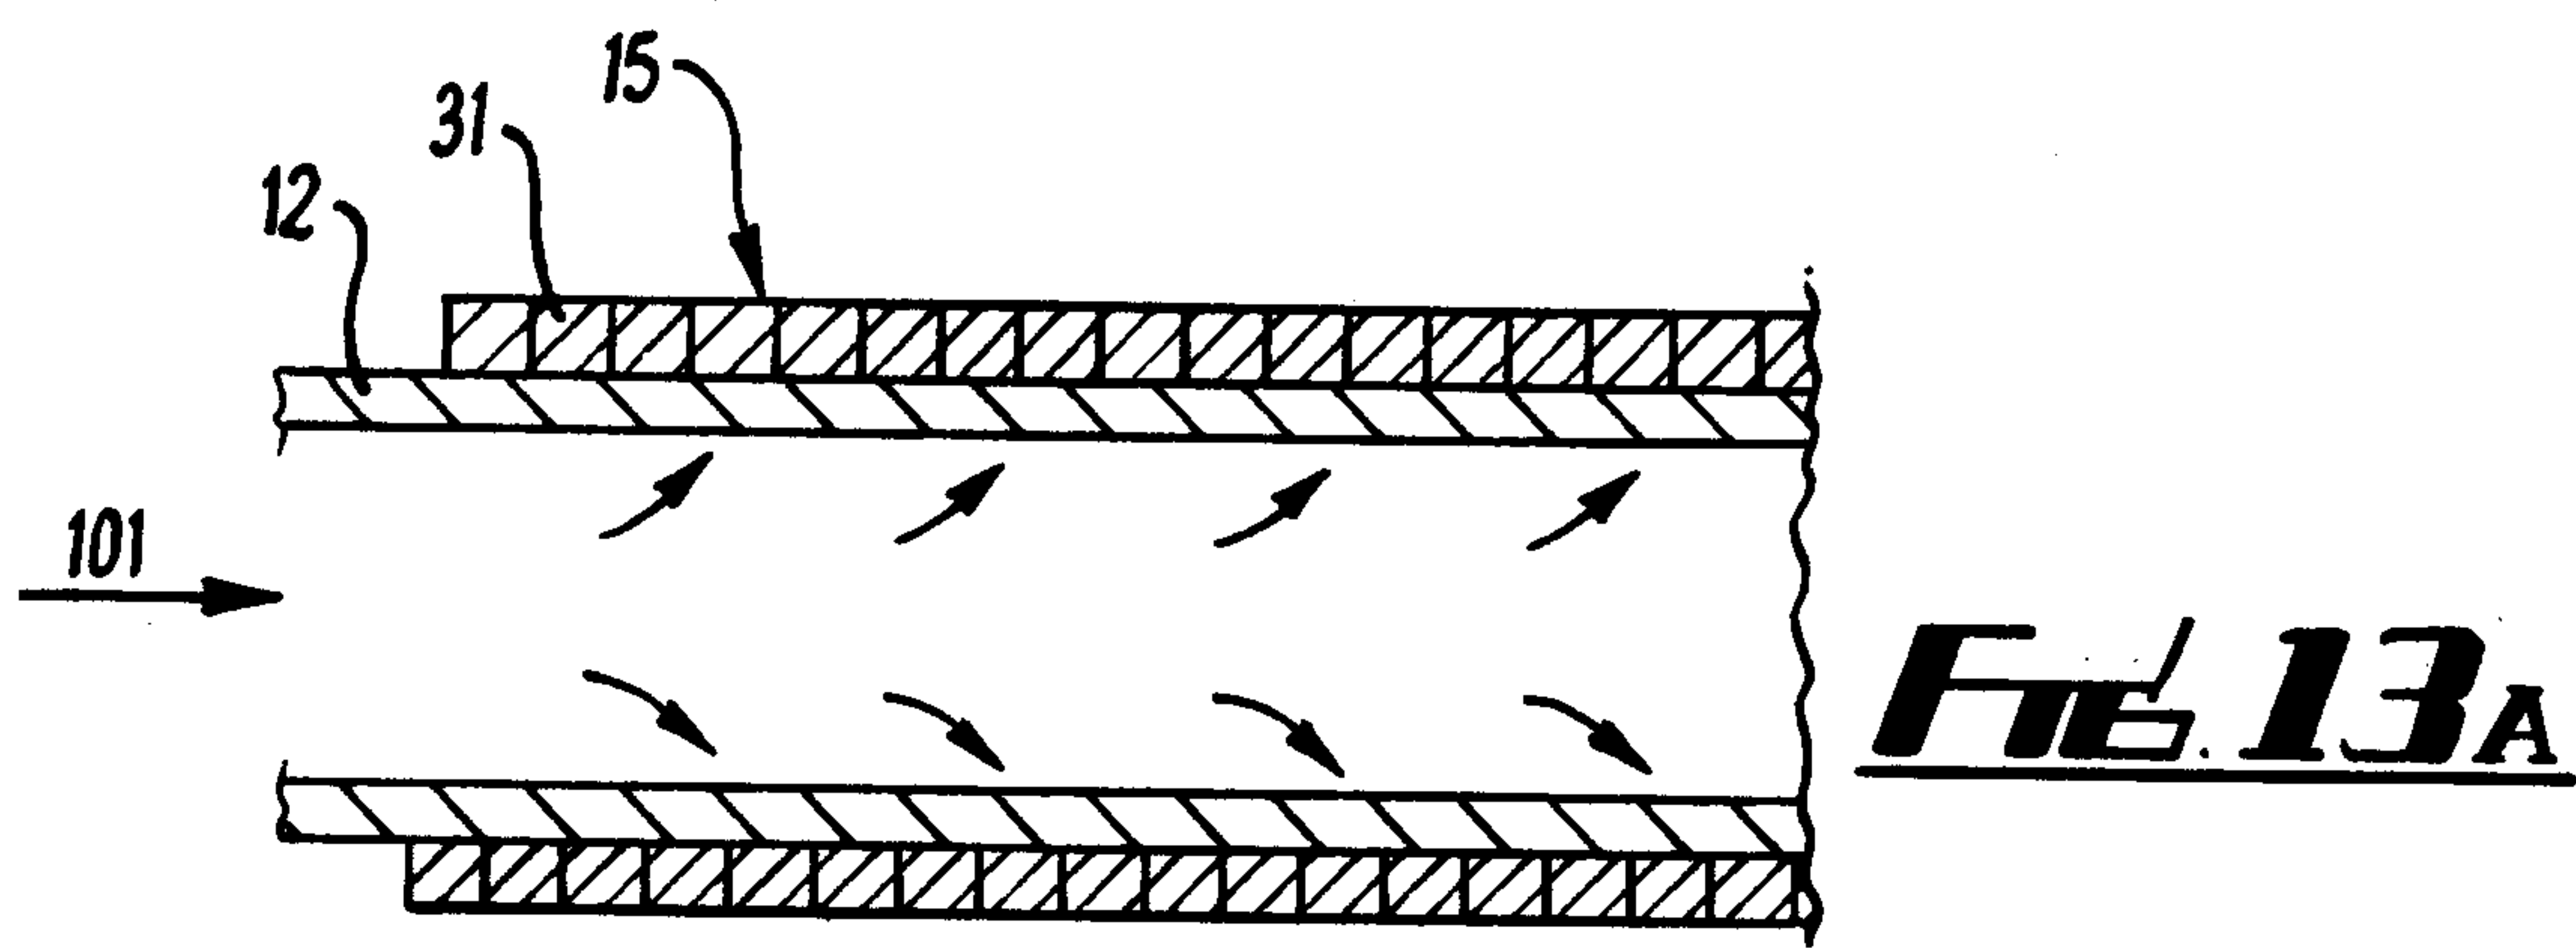
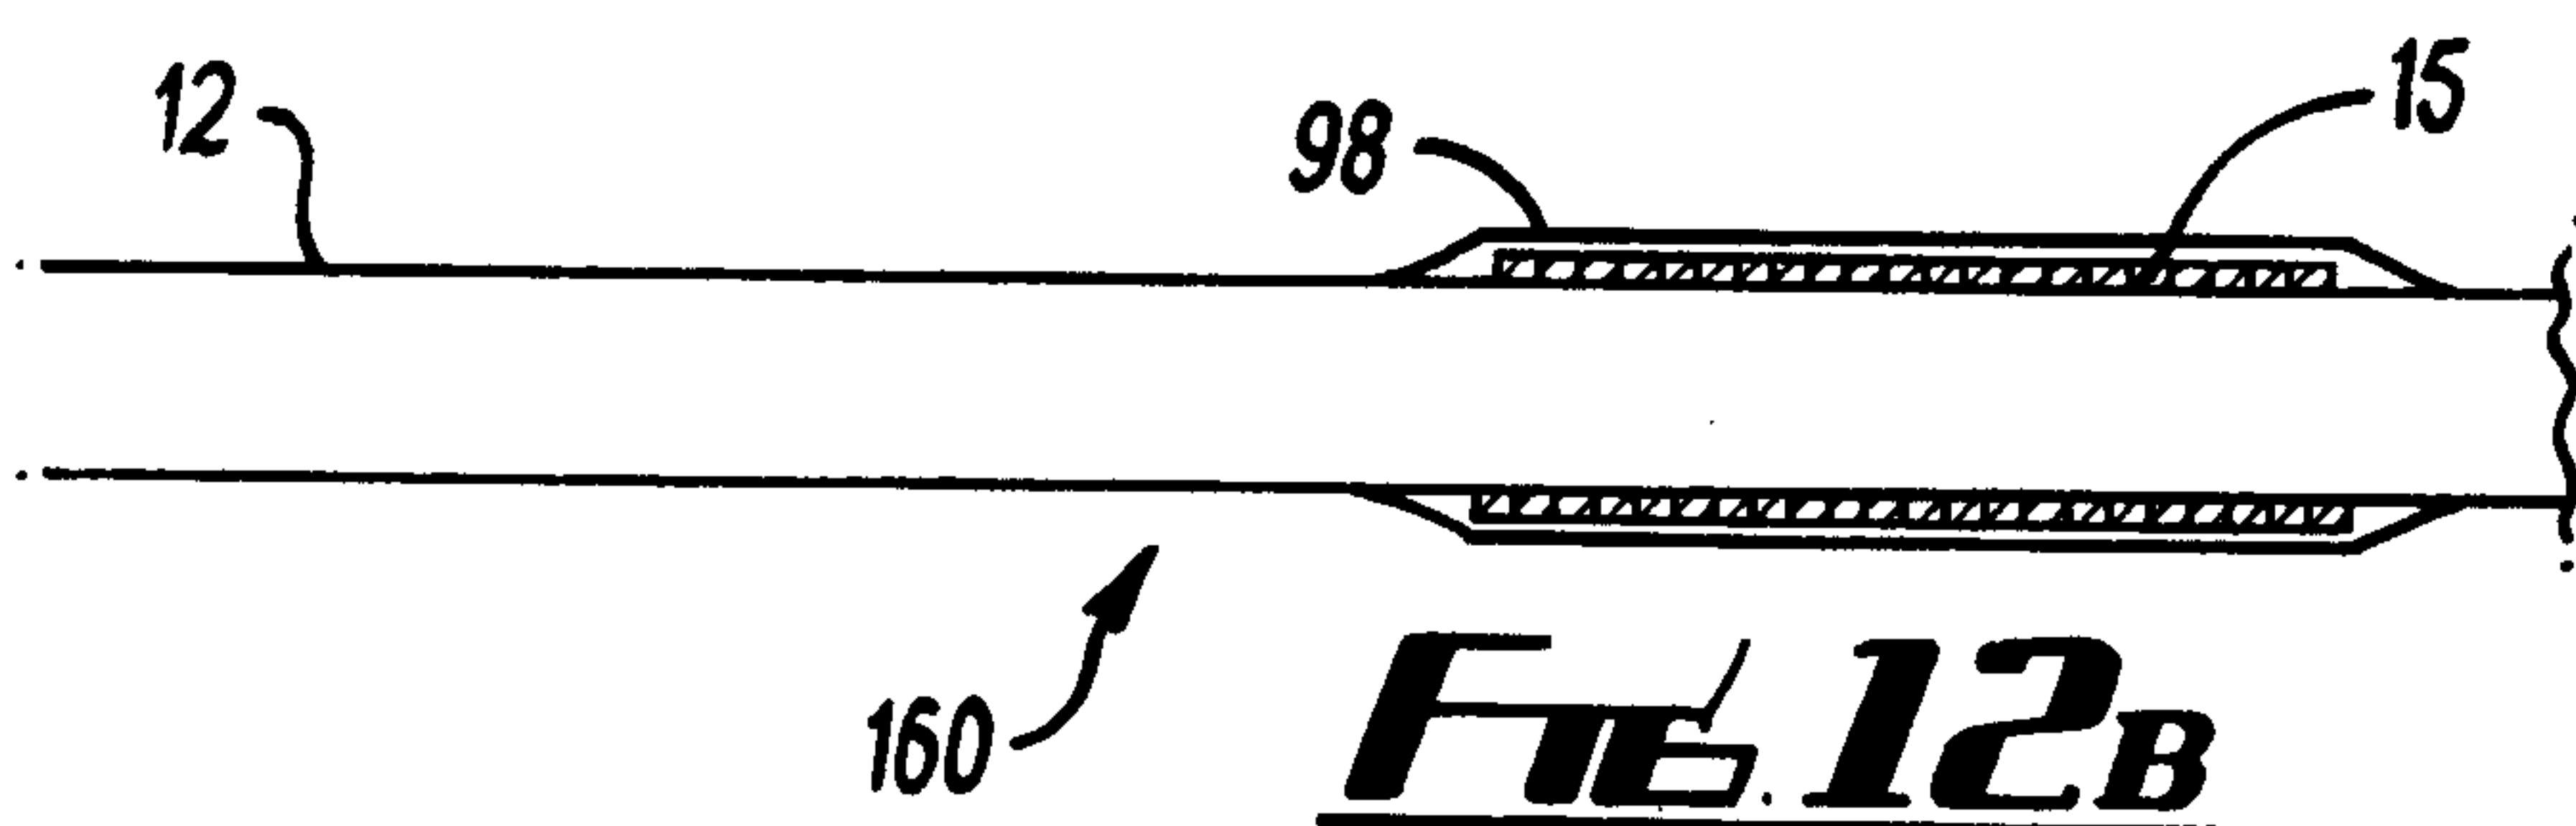
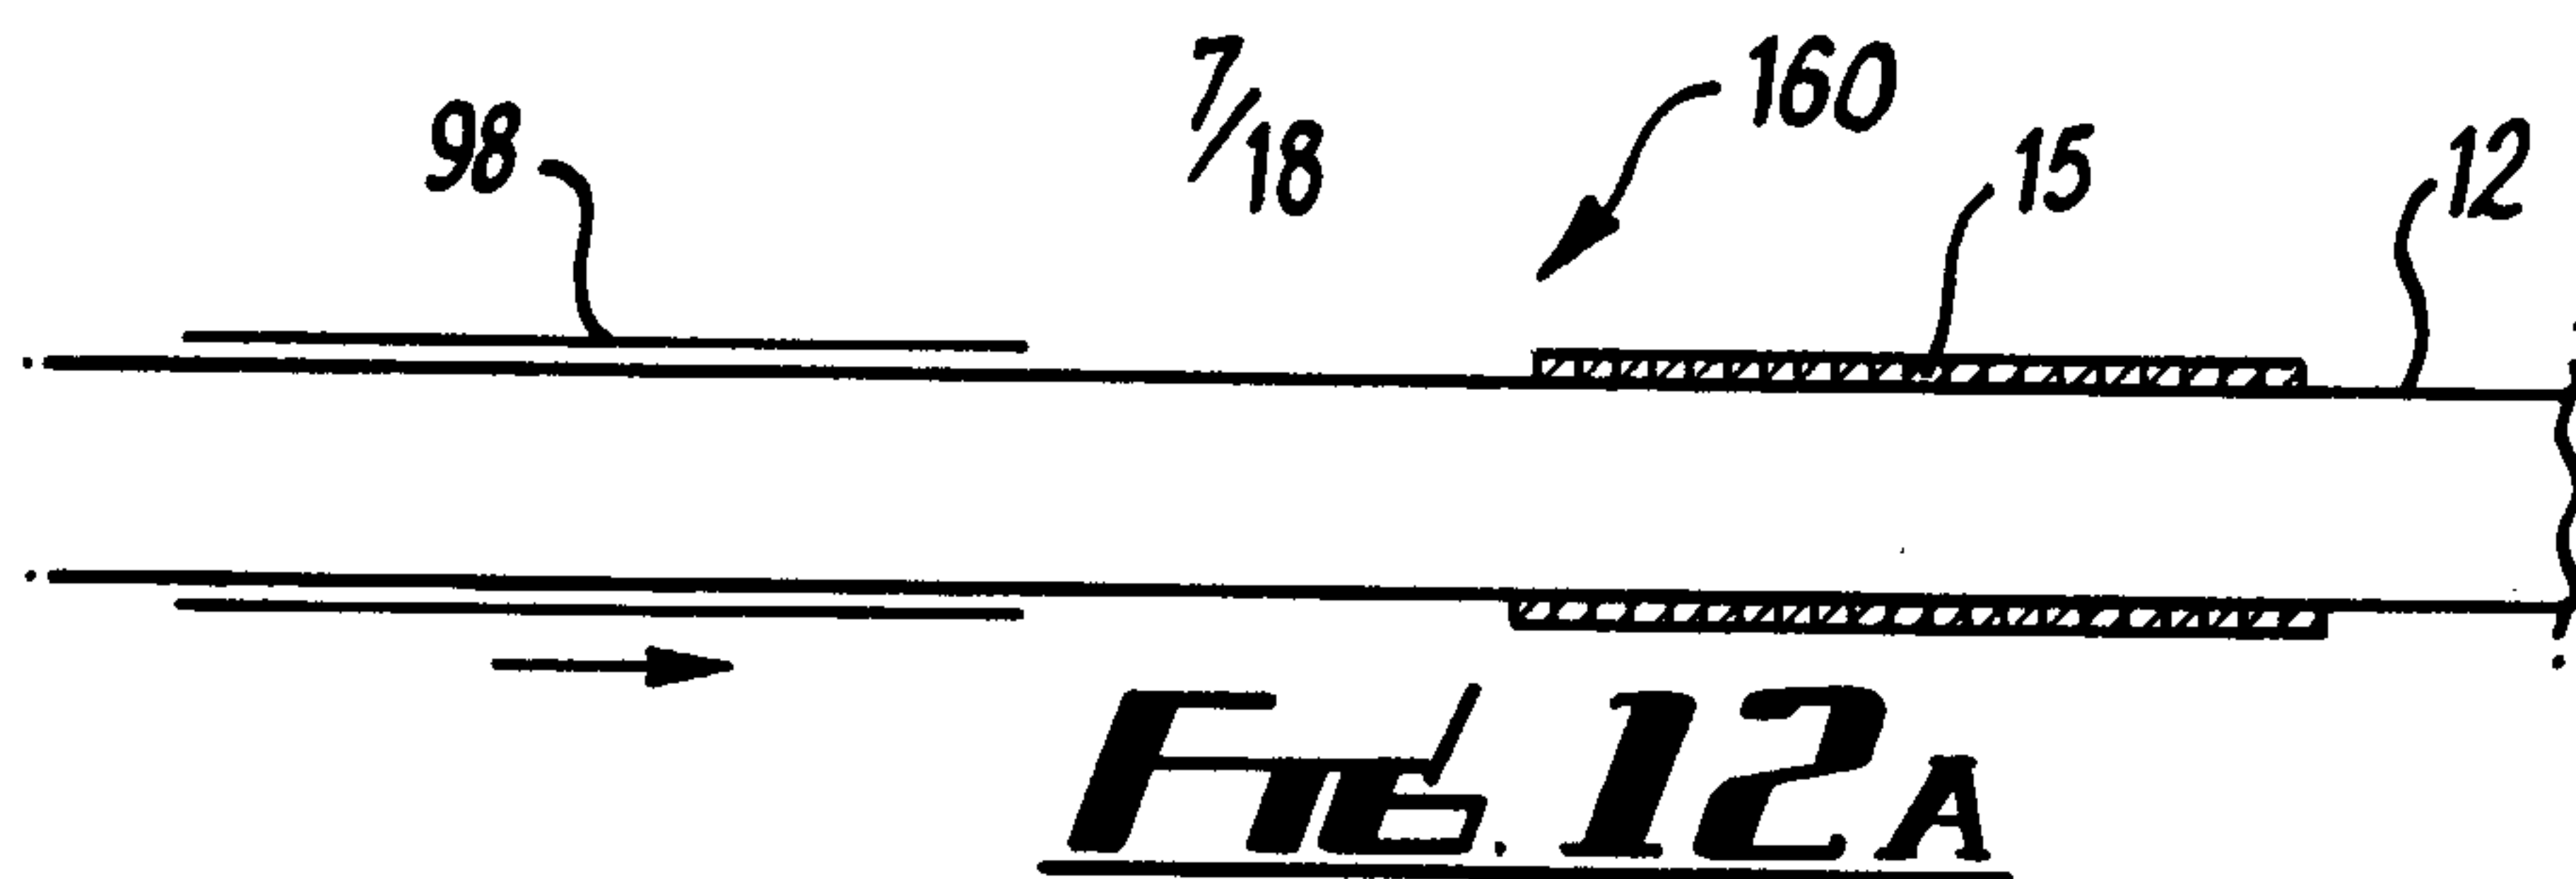
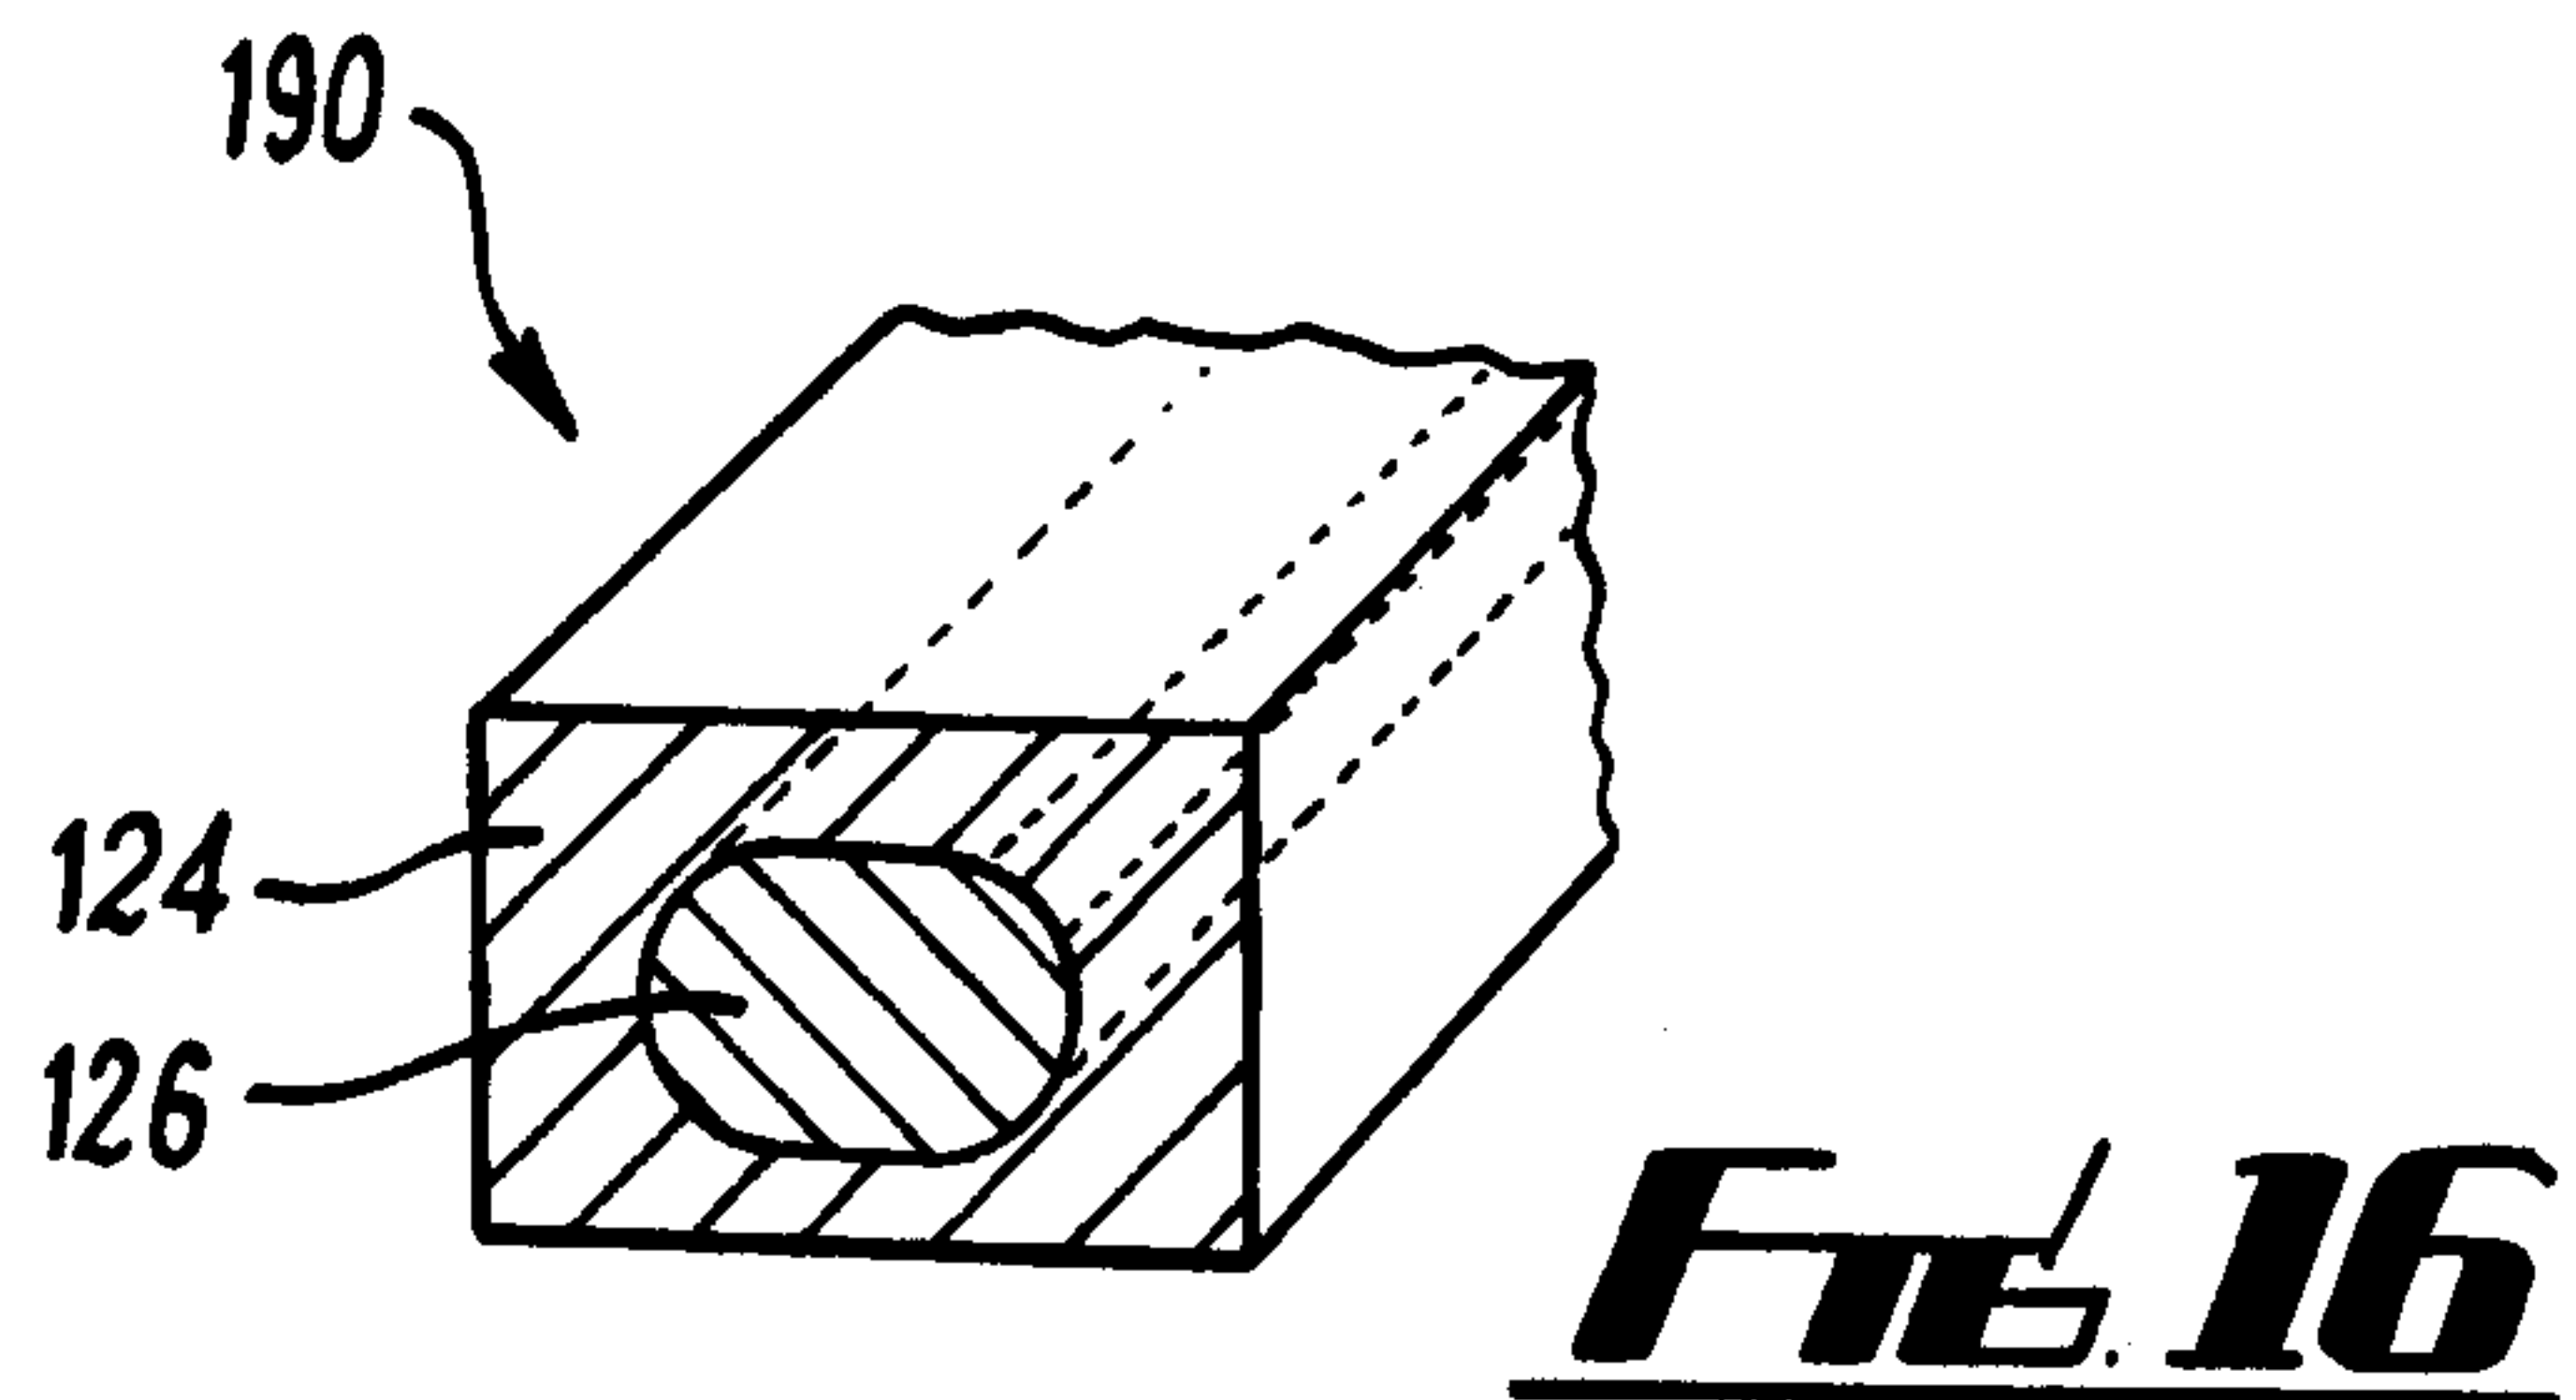
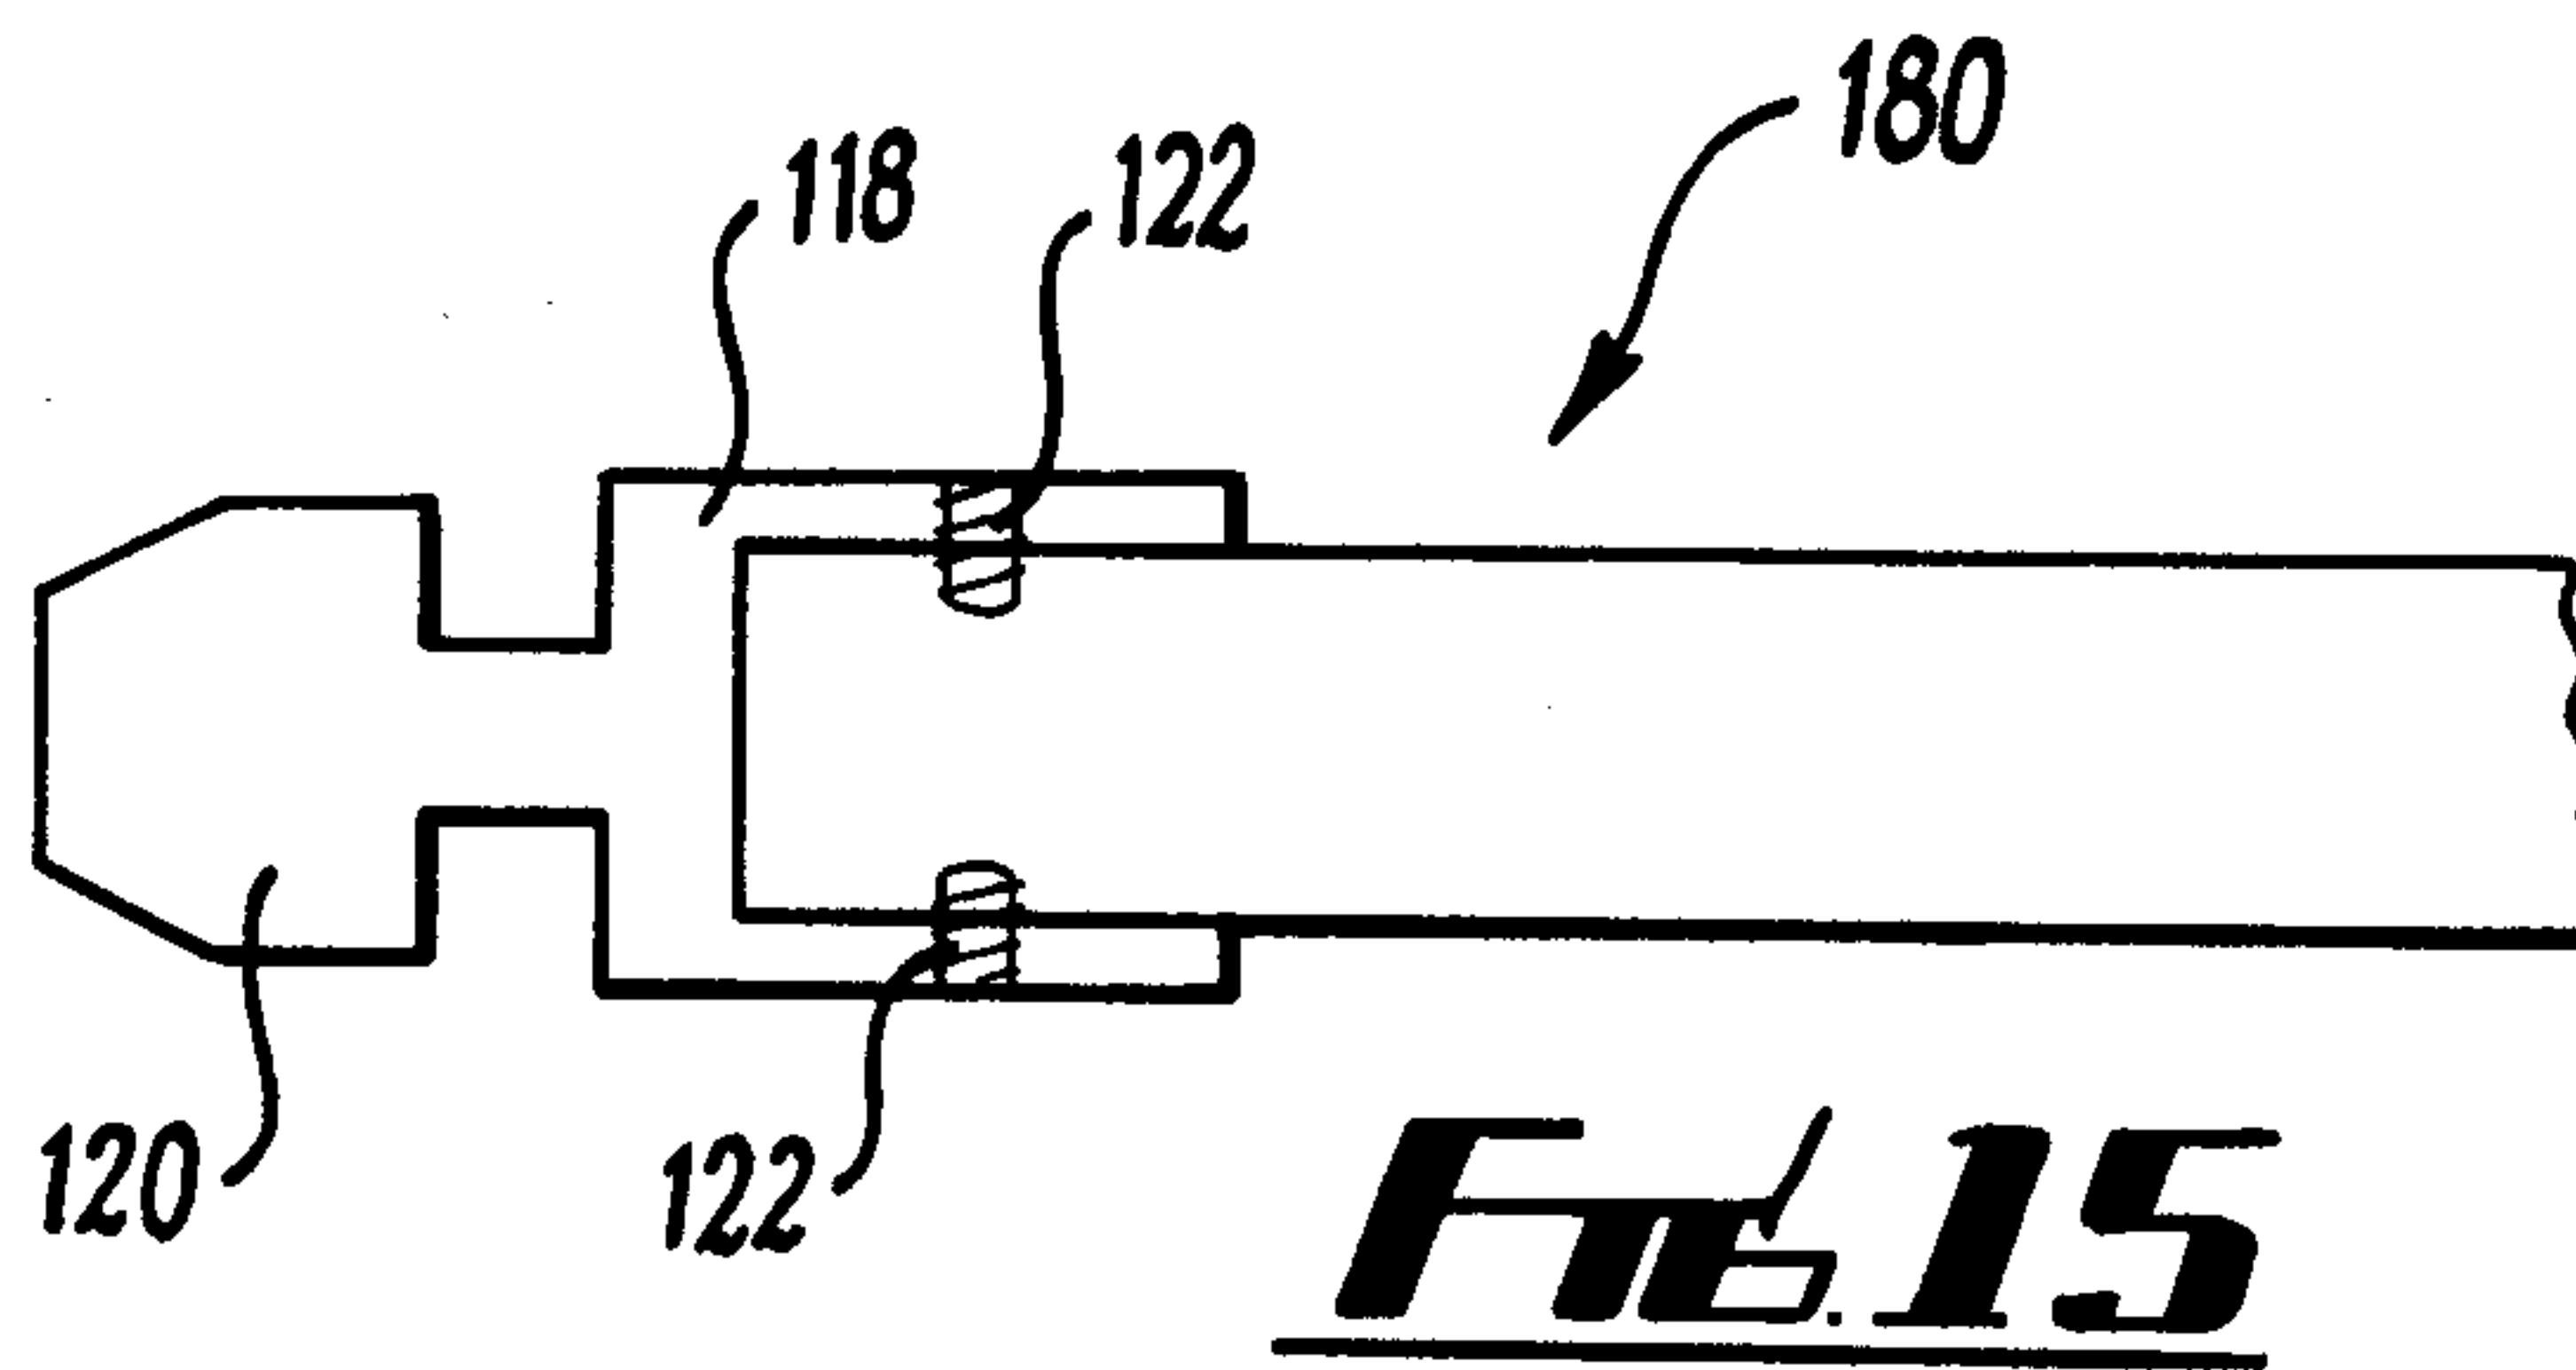




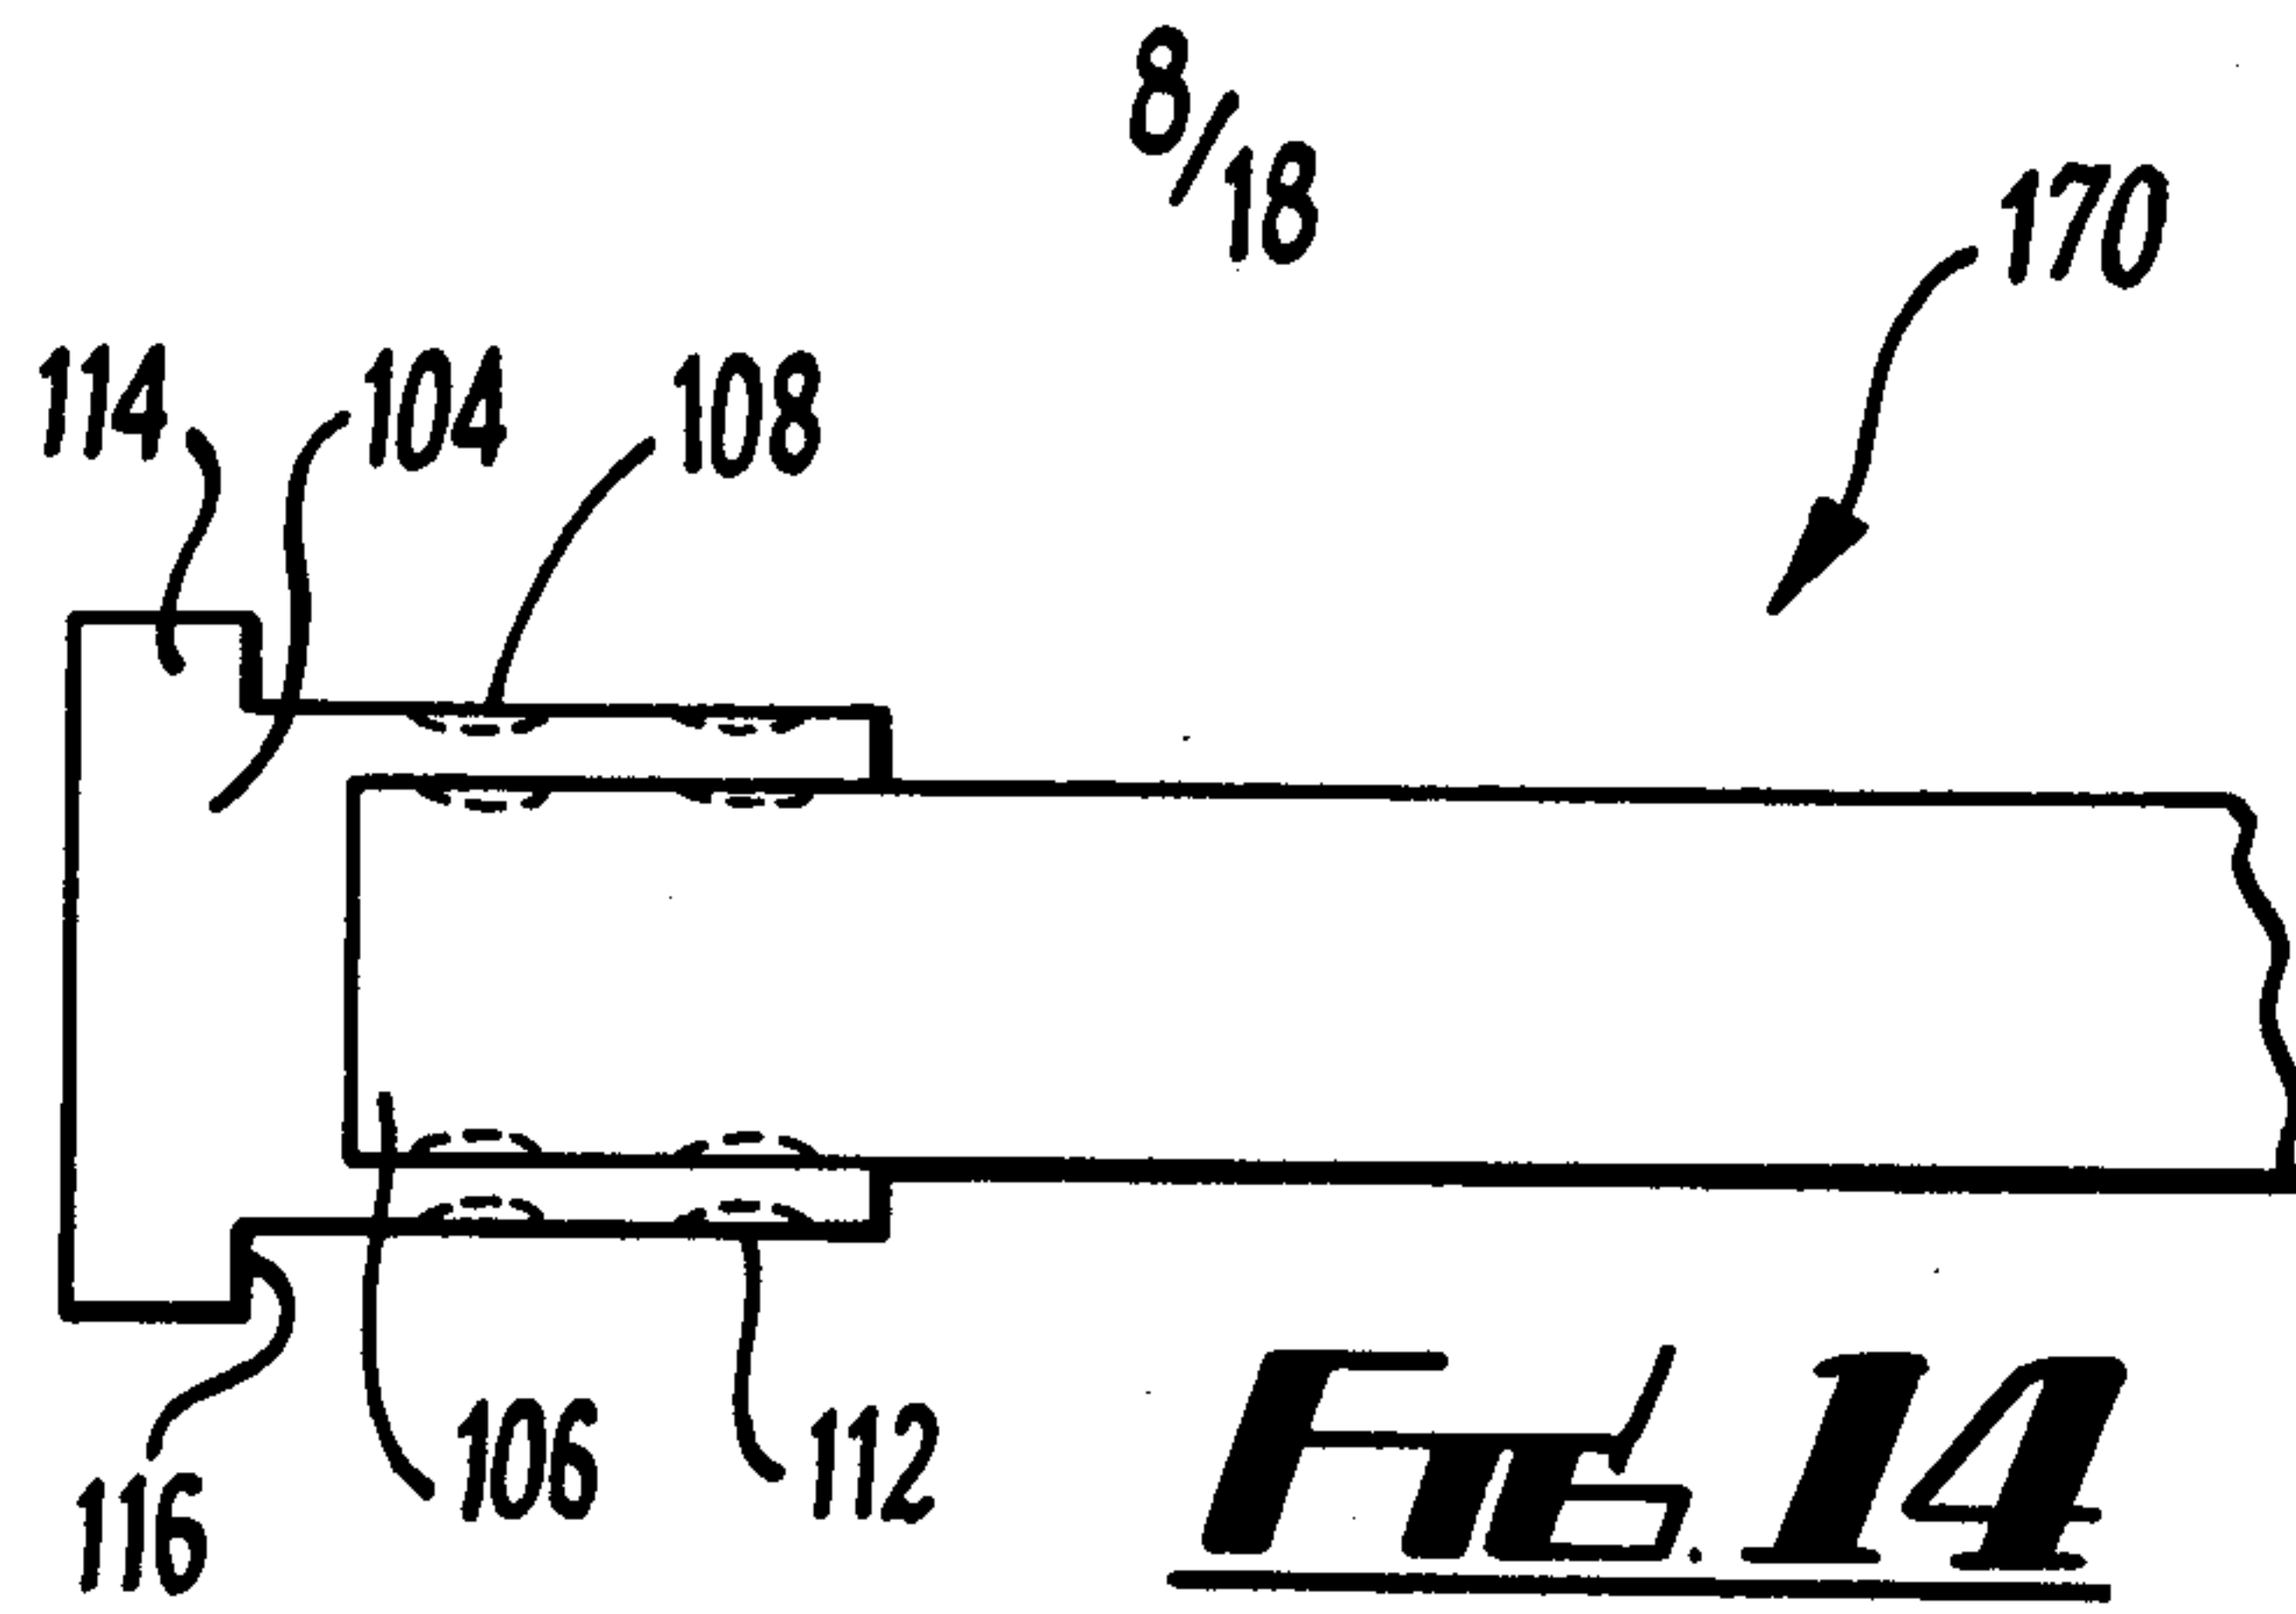




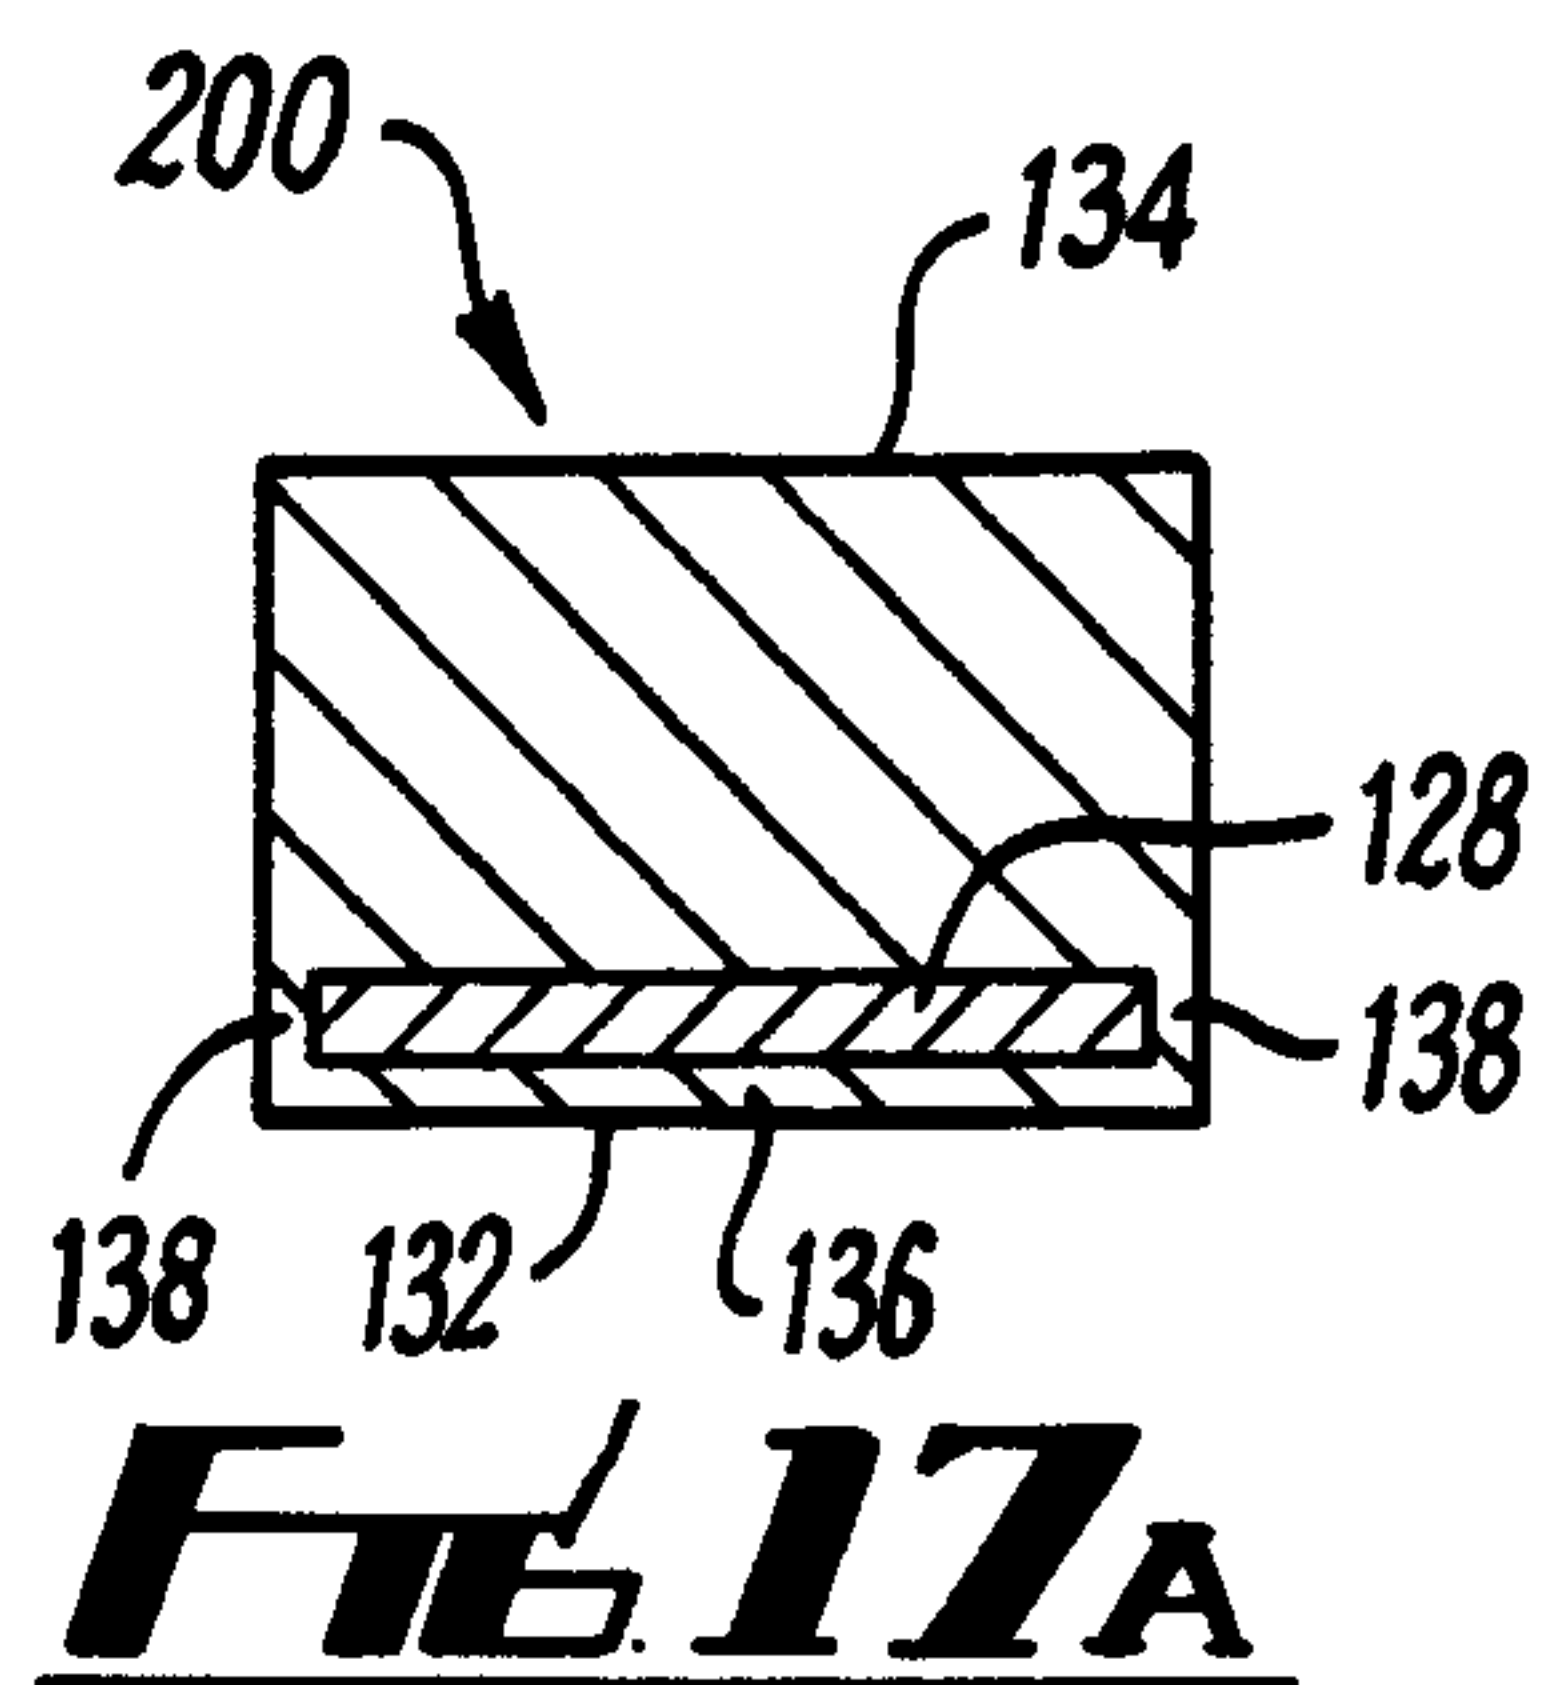


9/18

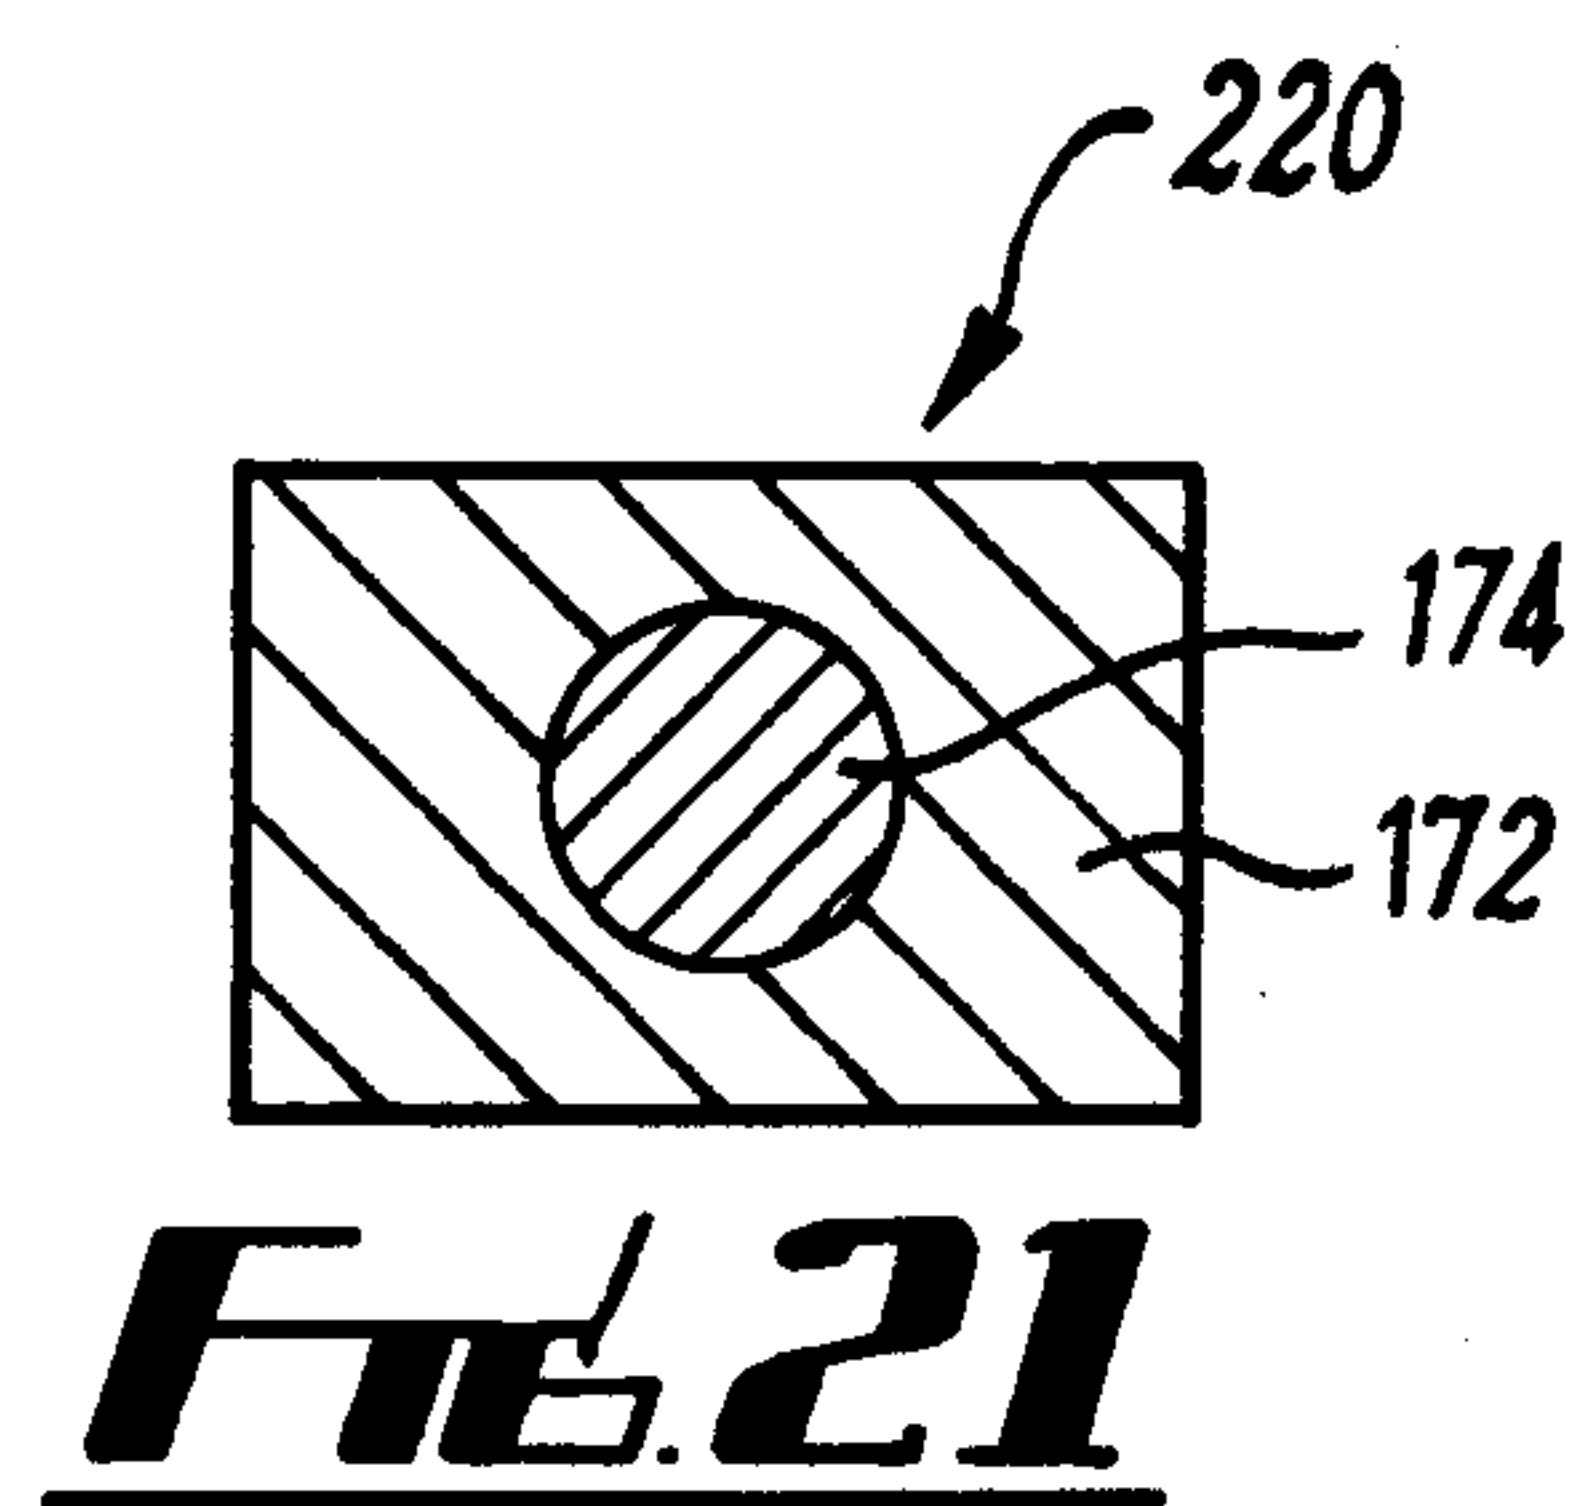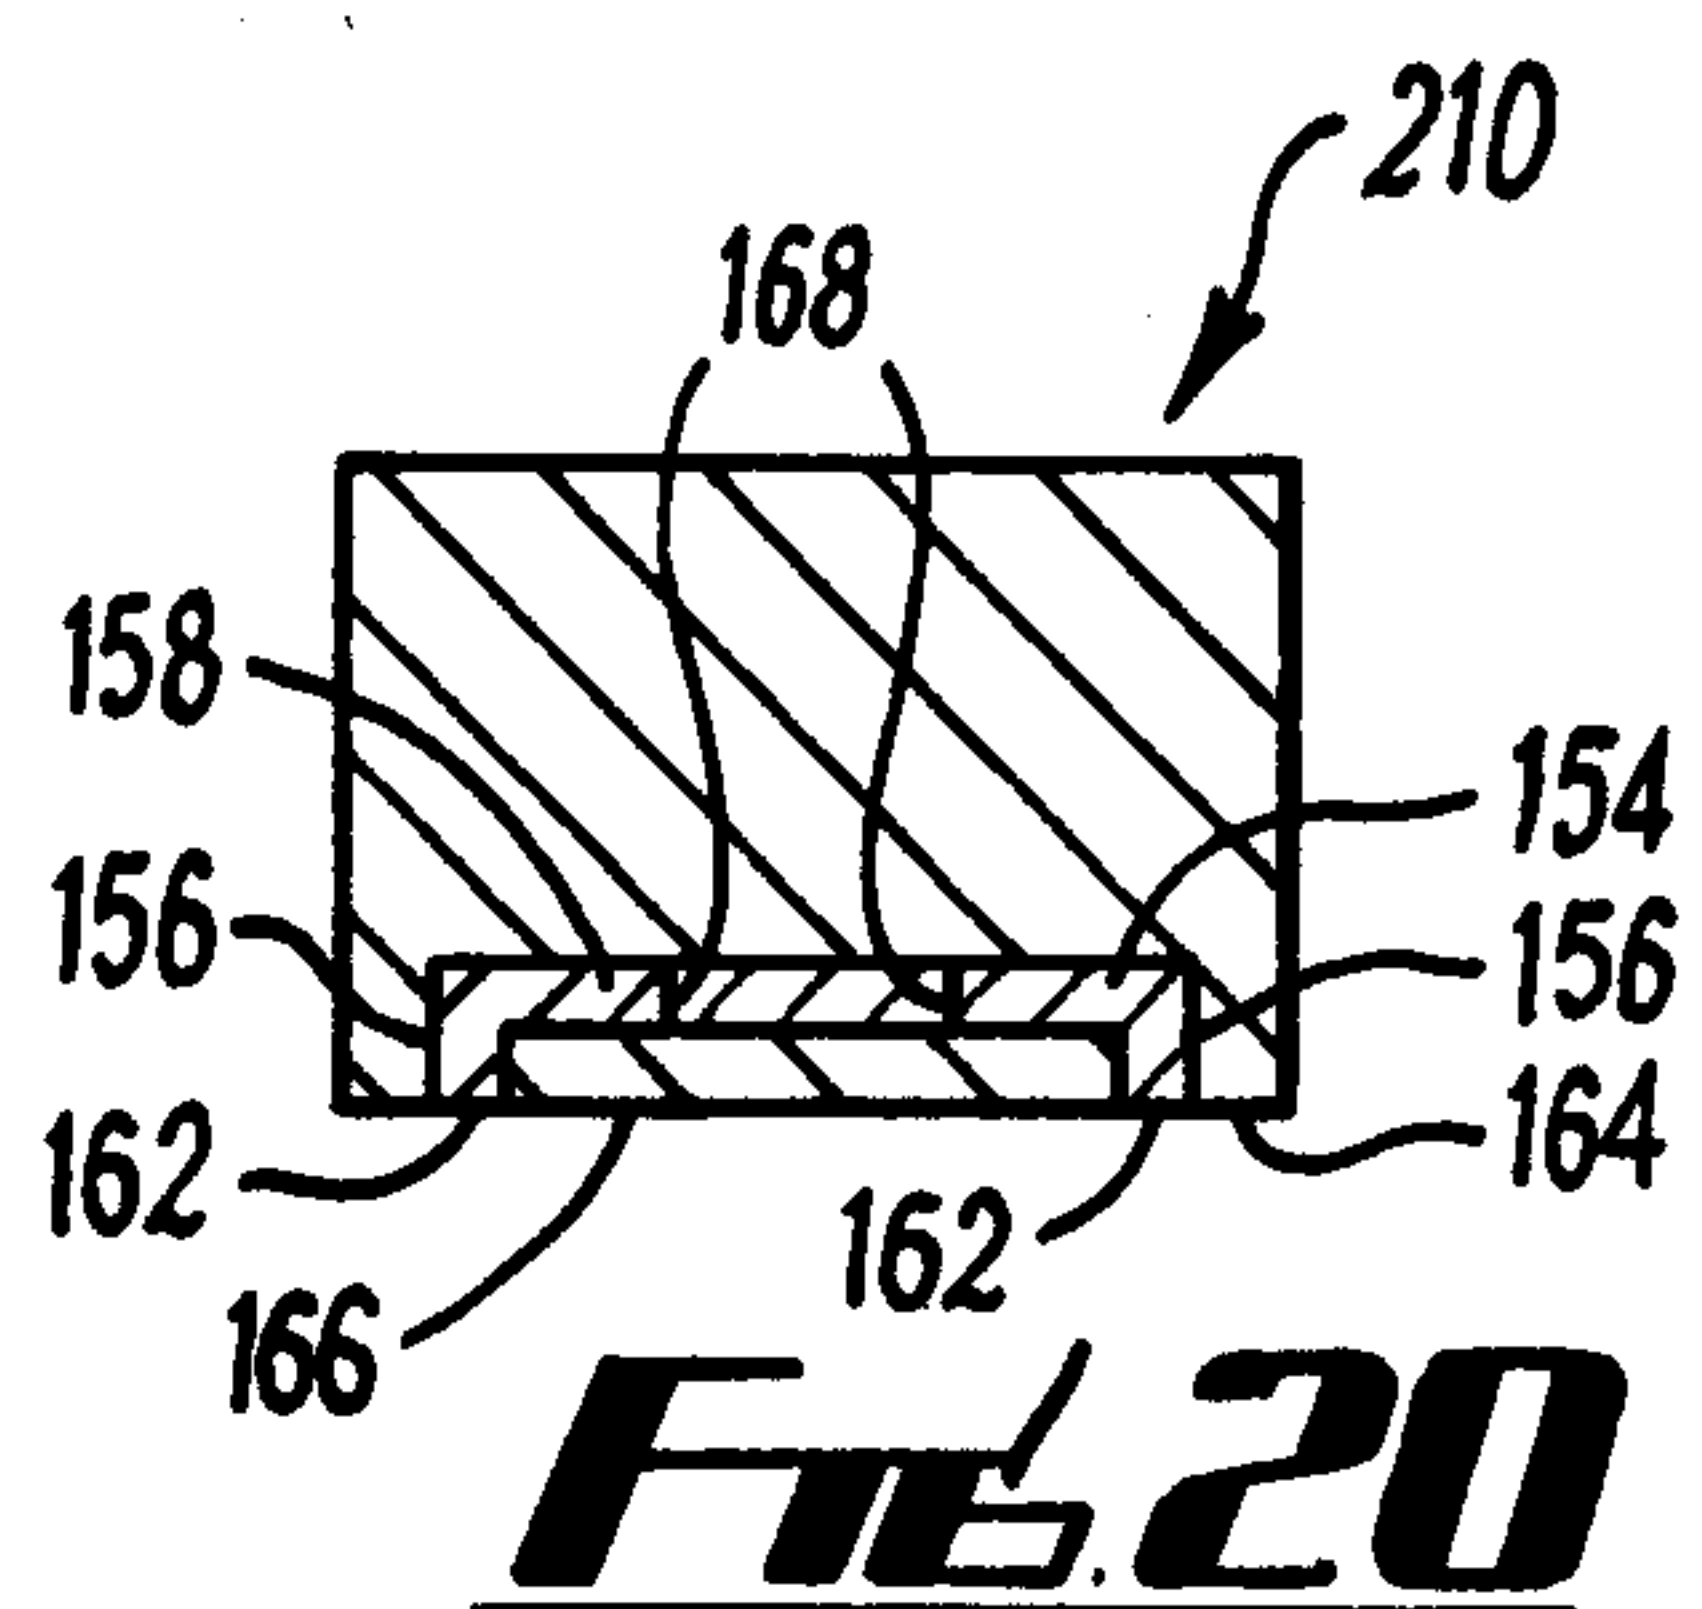
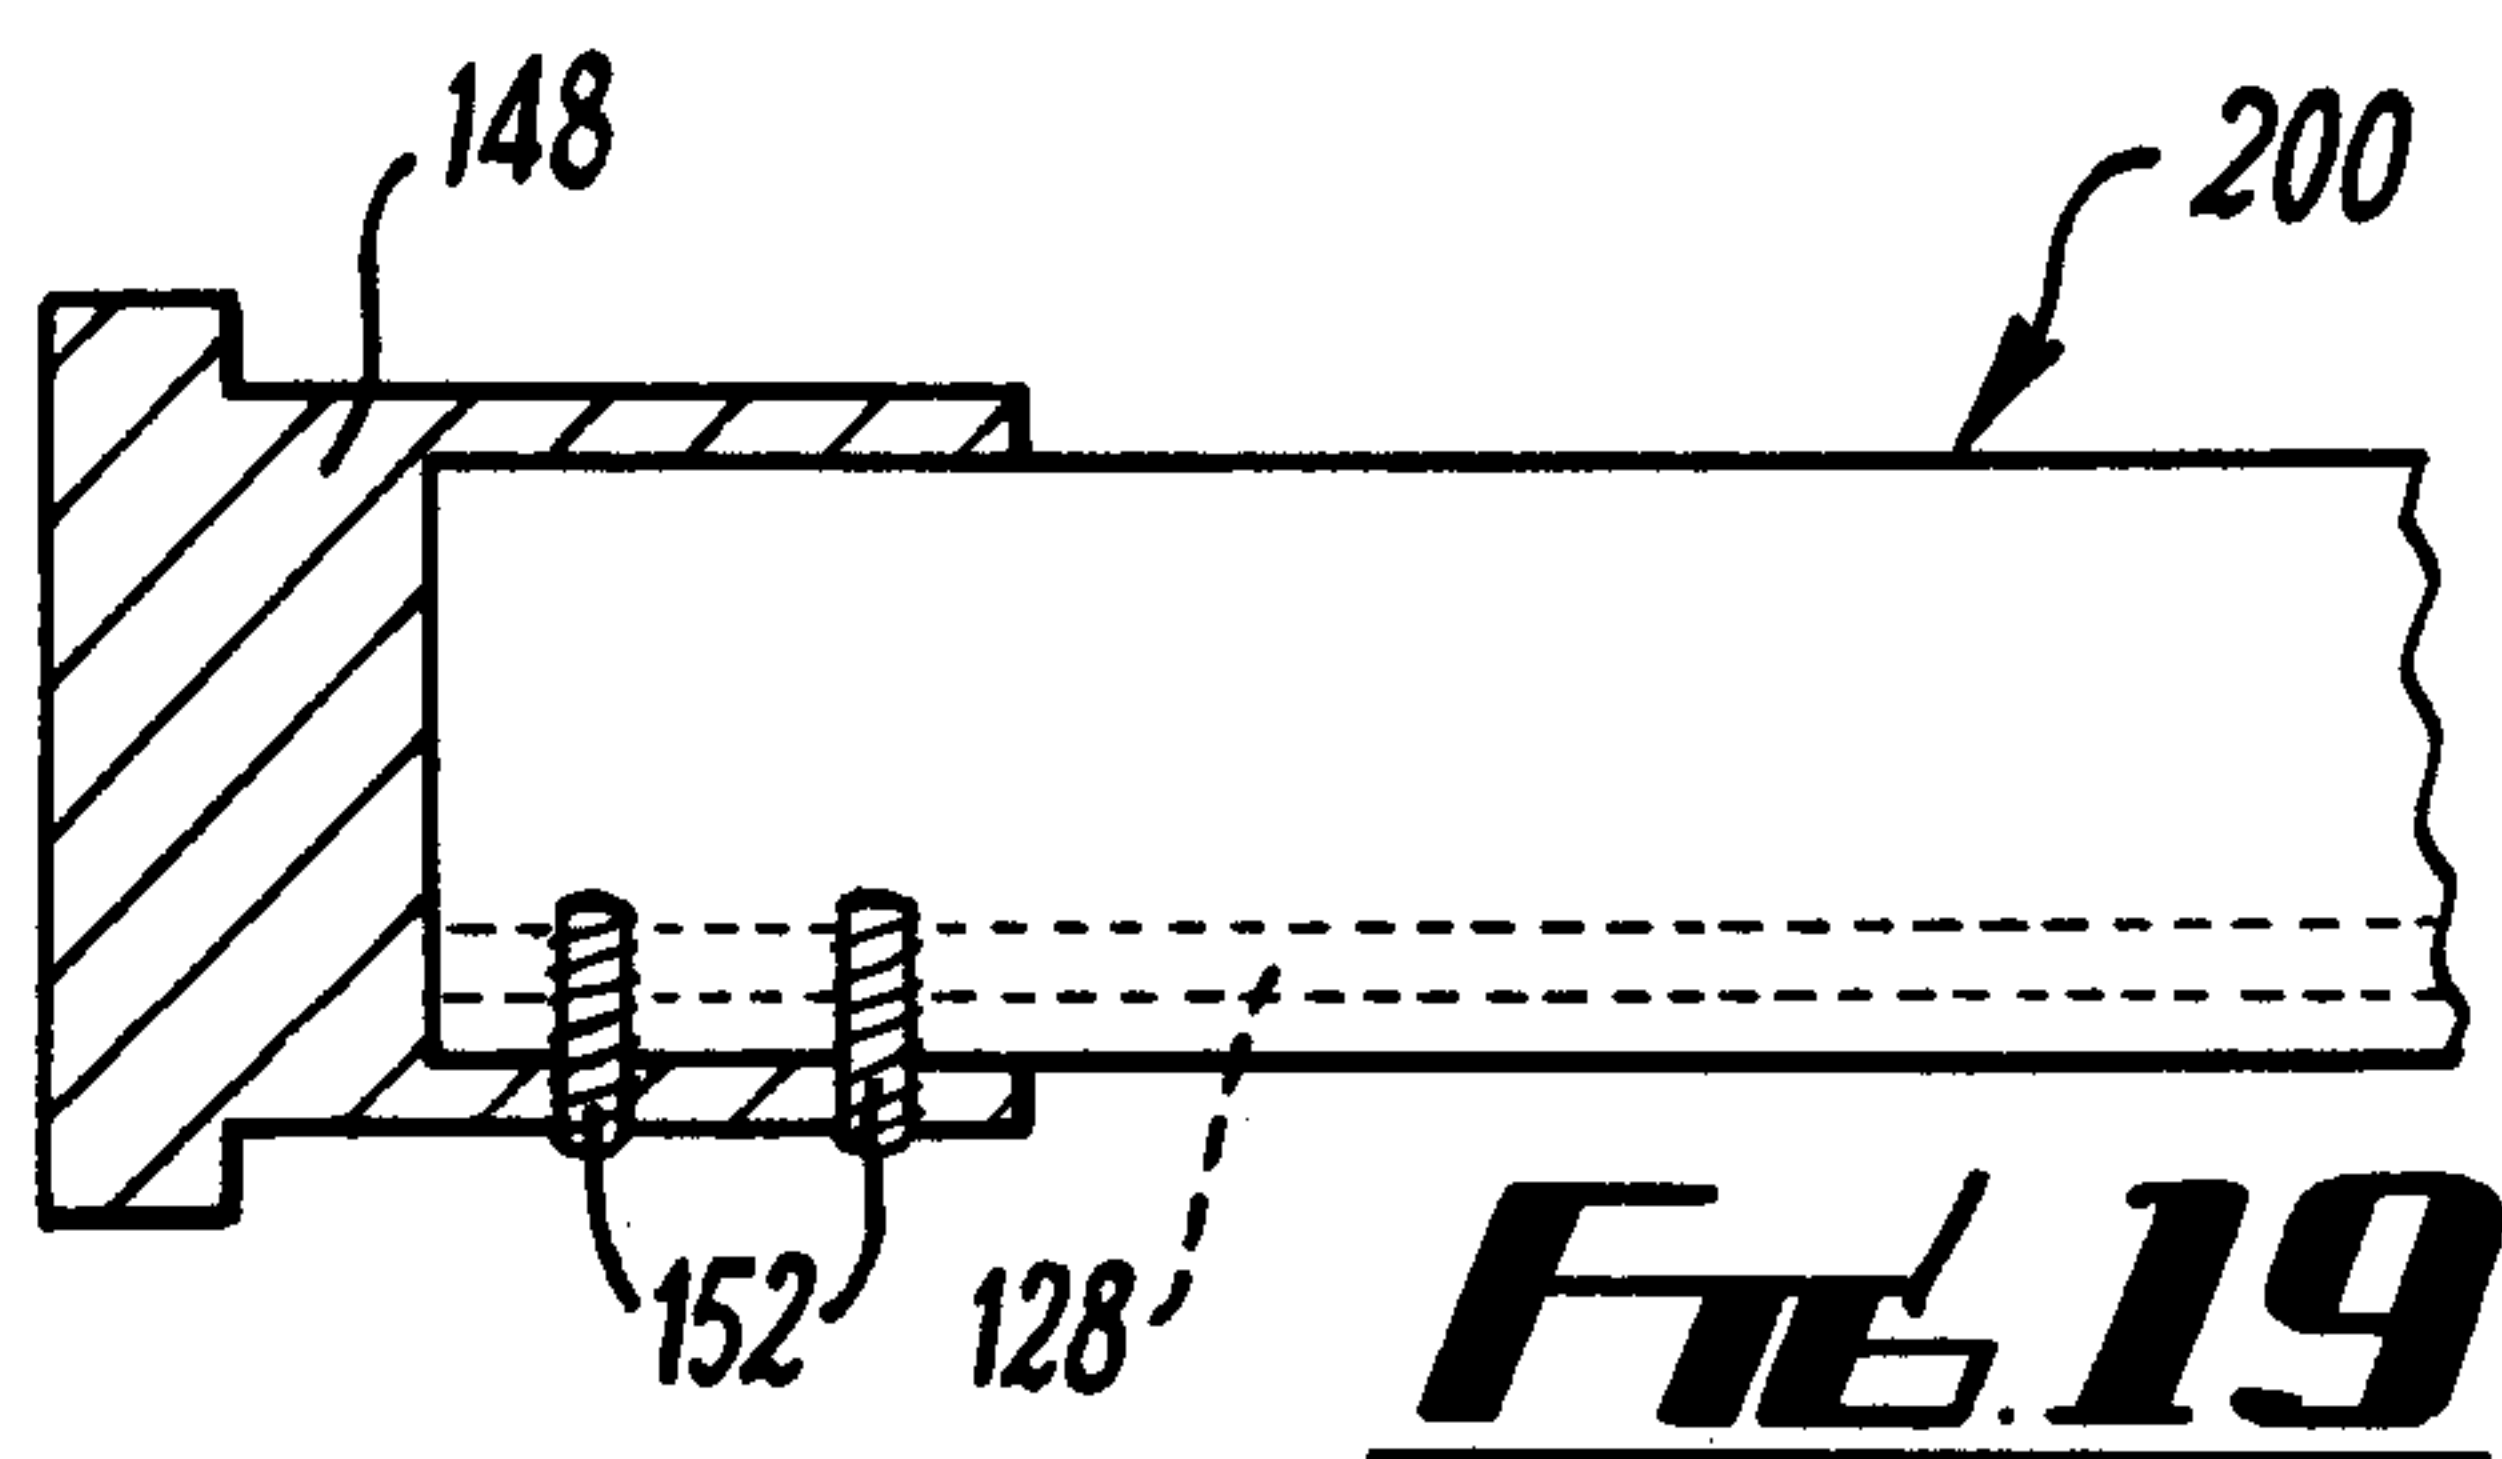
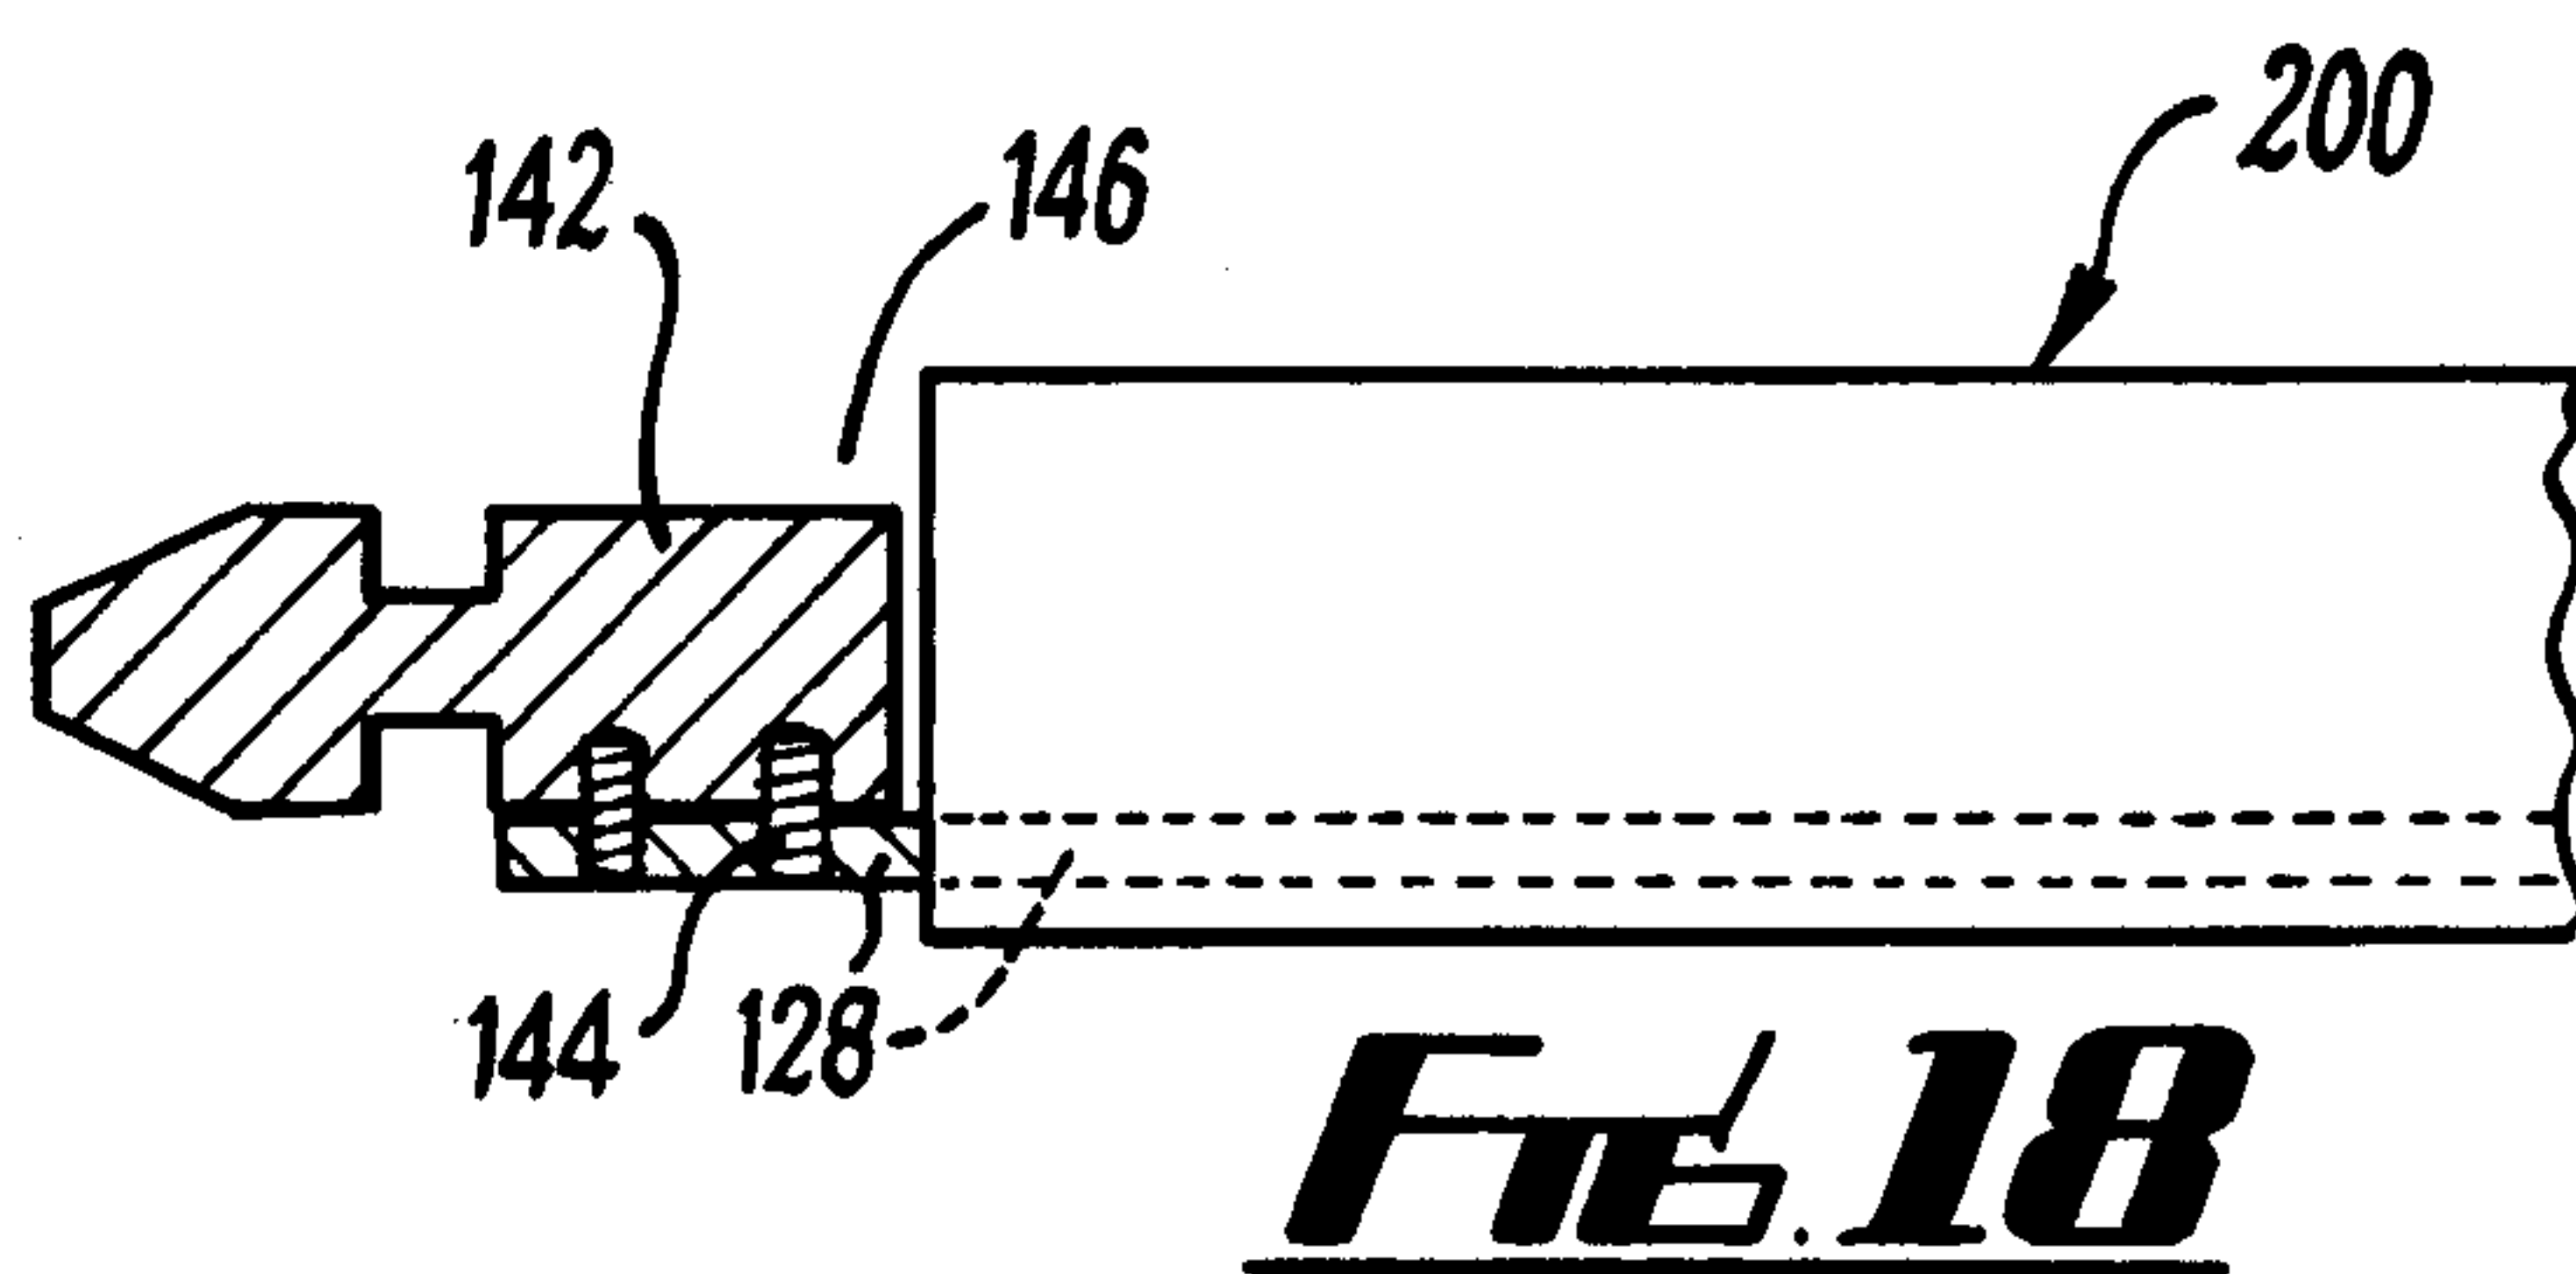
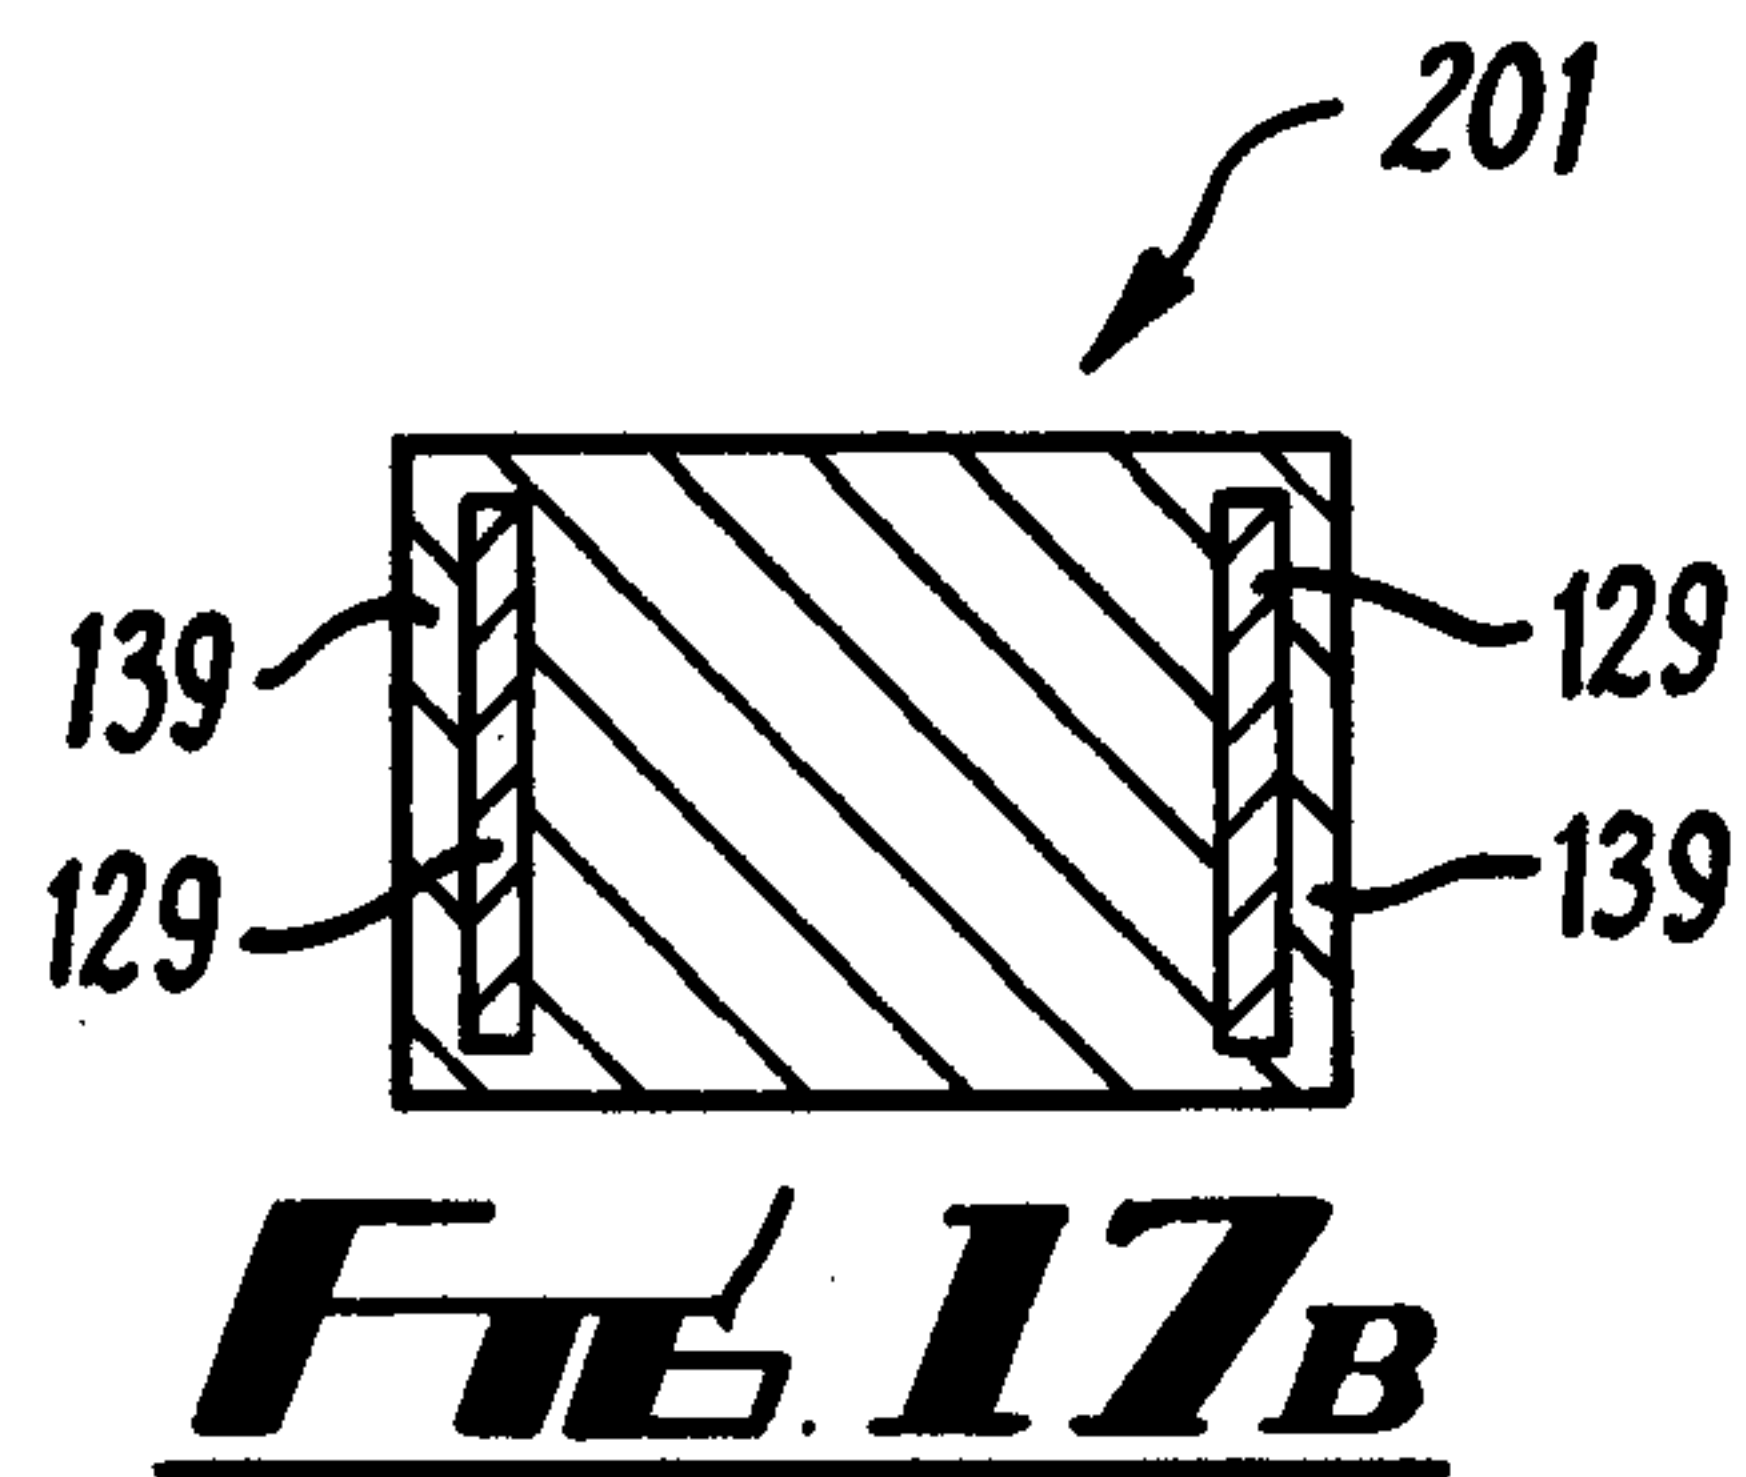


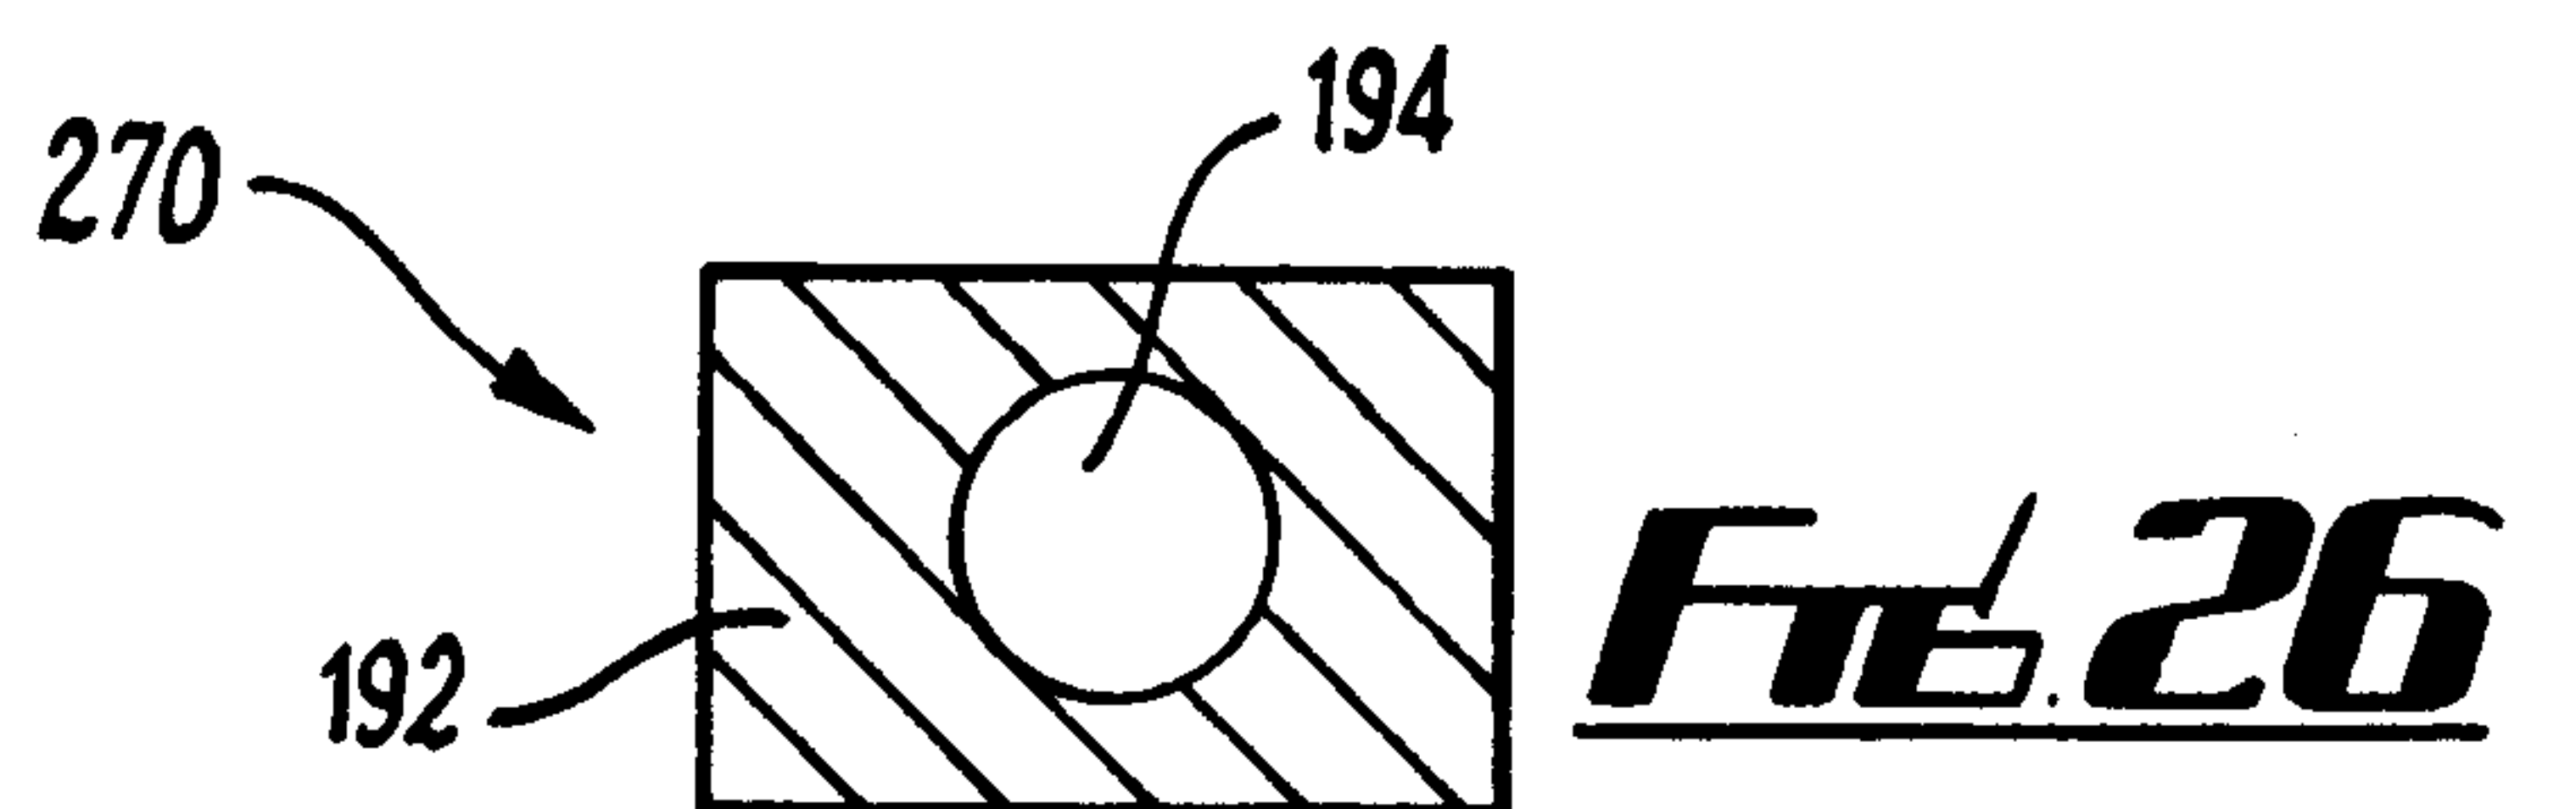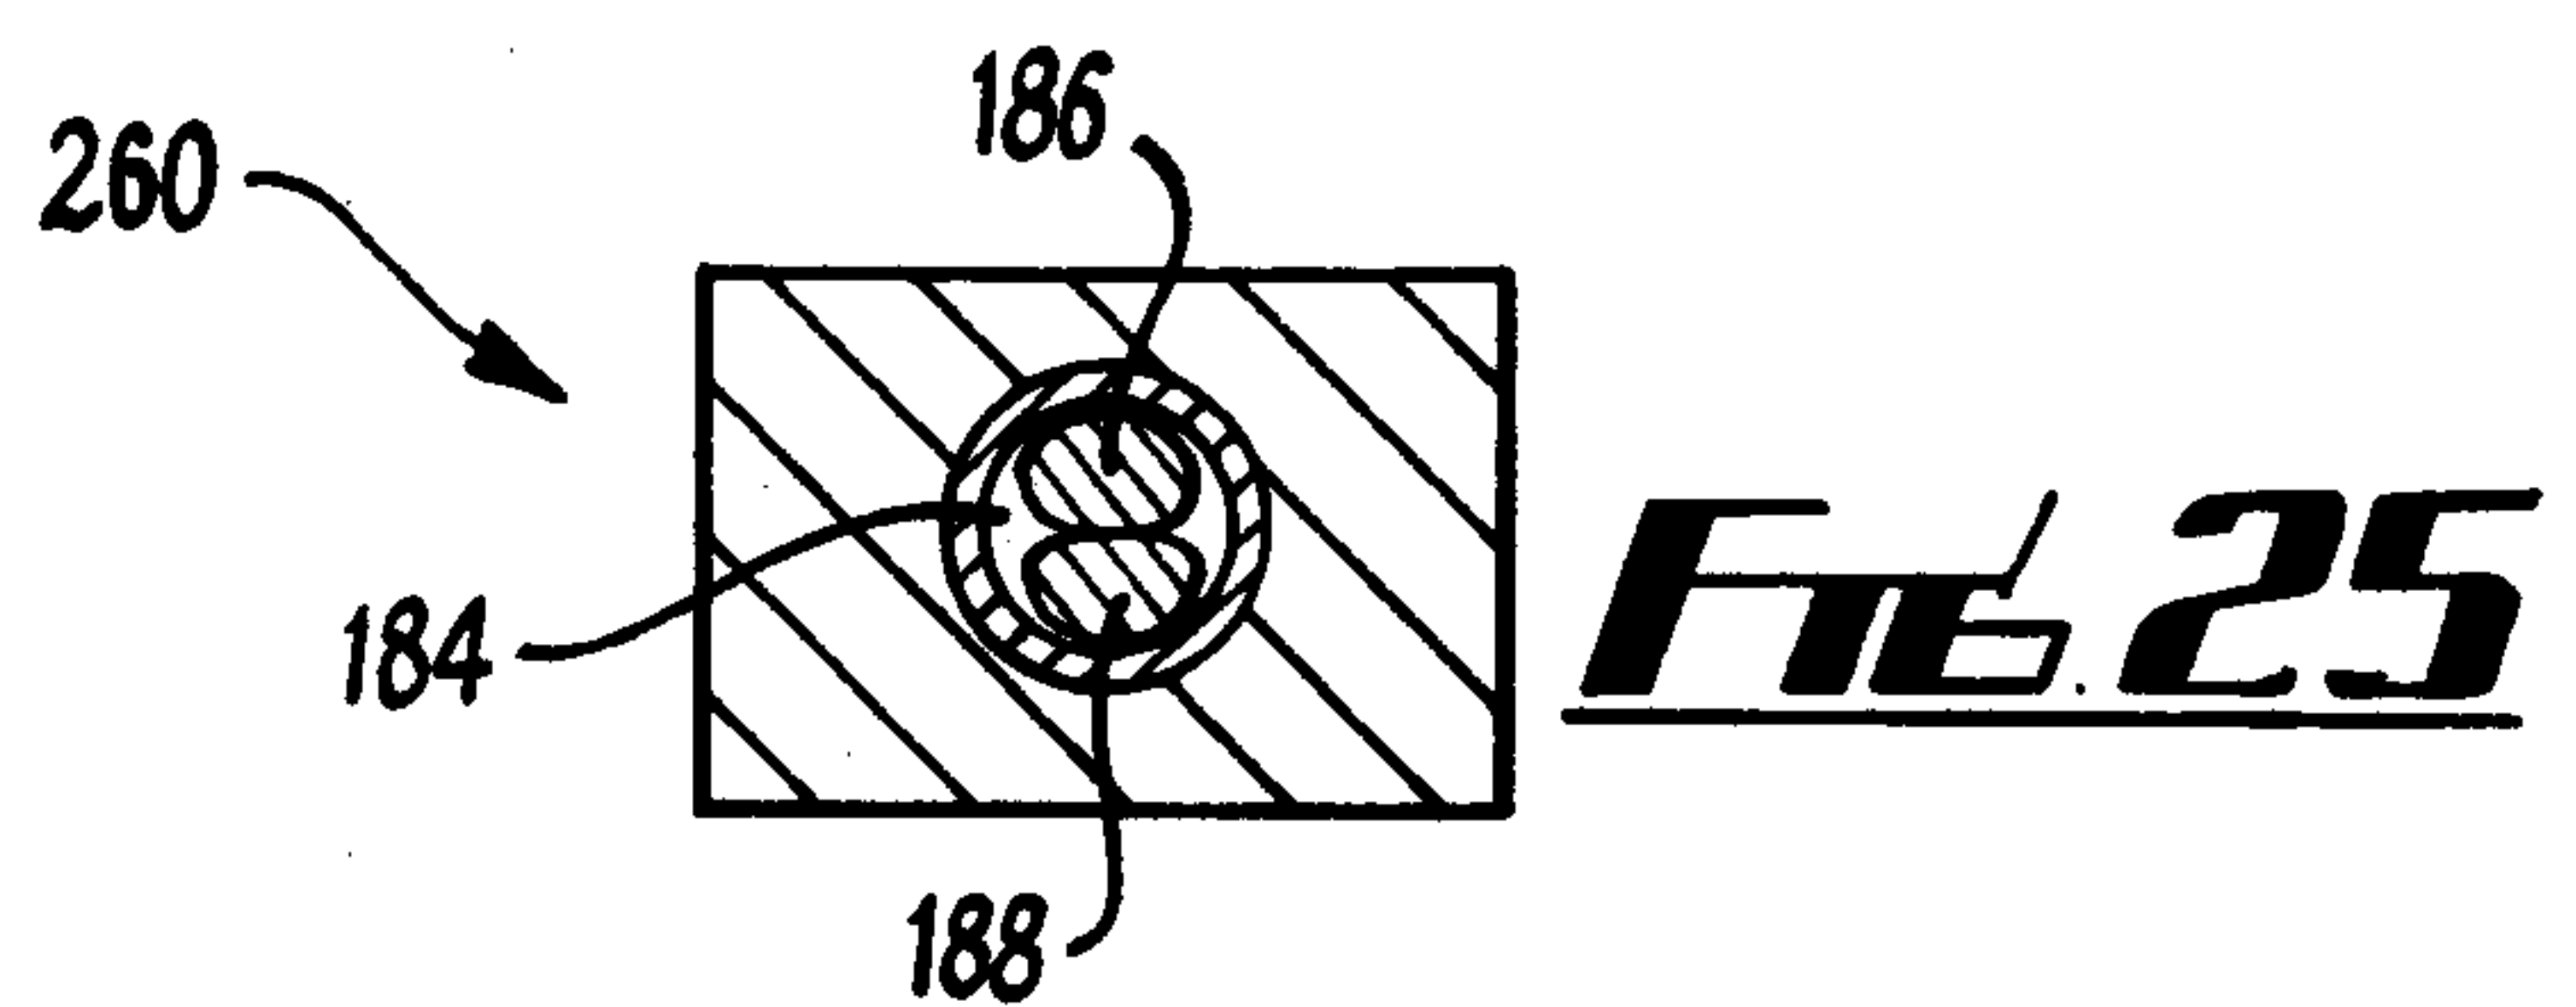
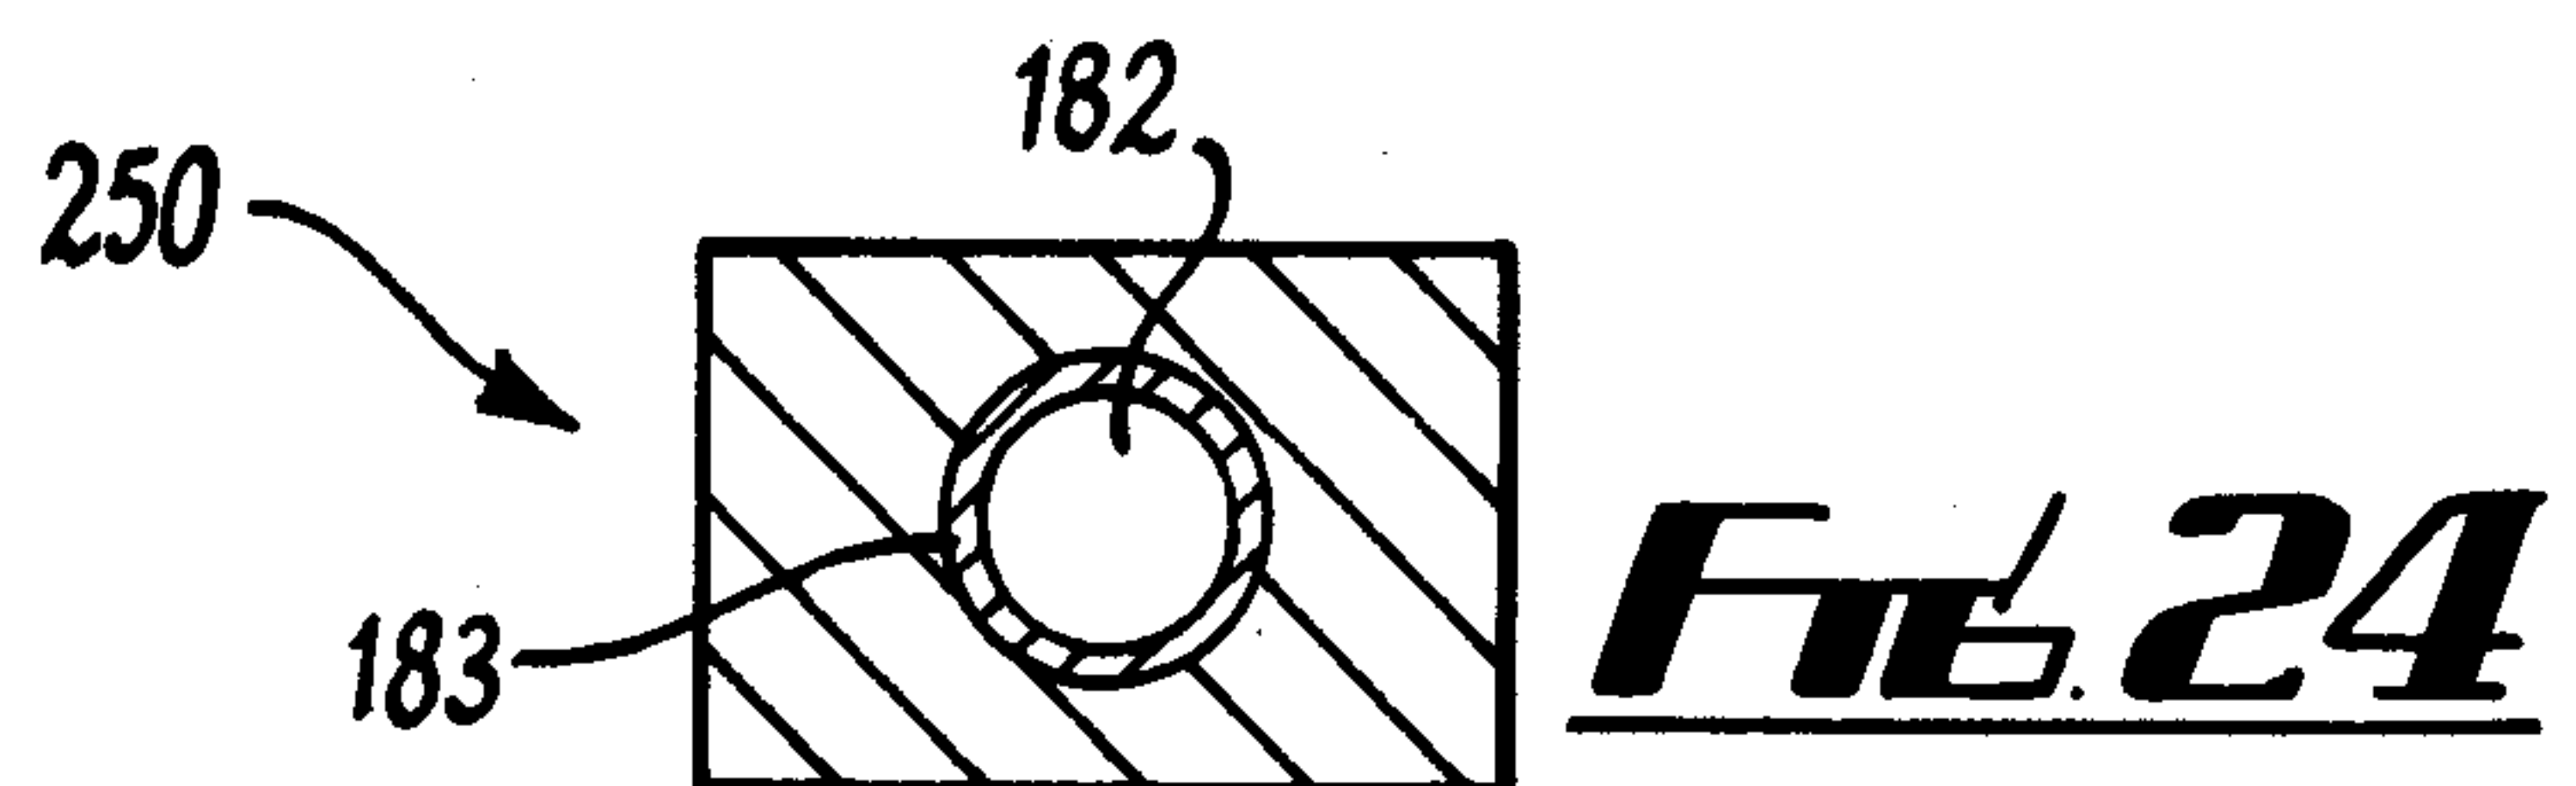
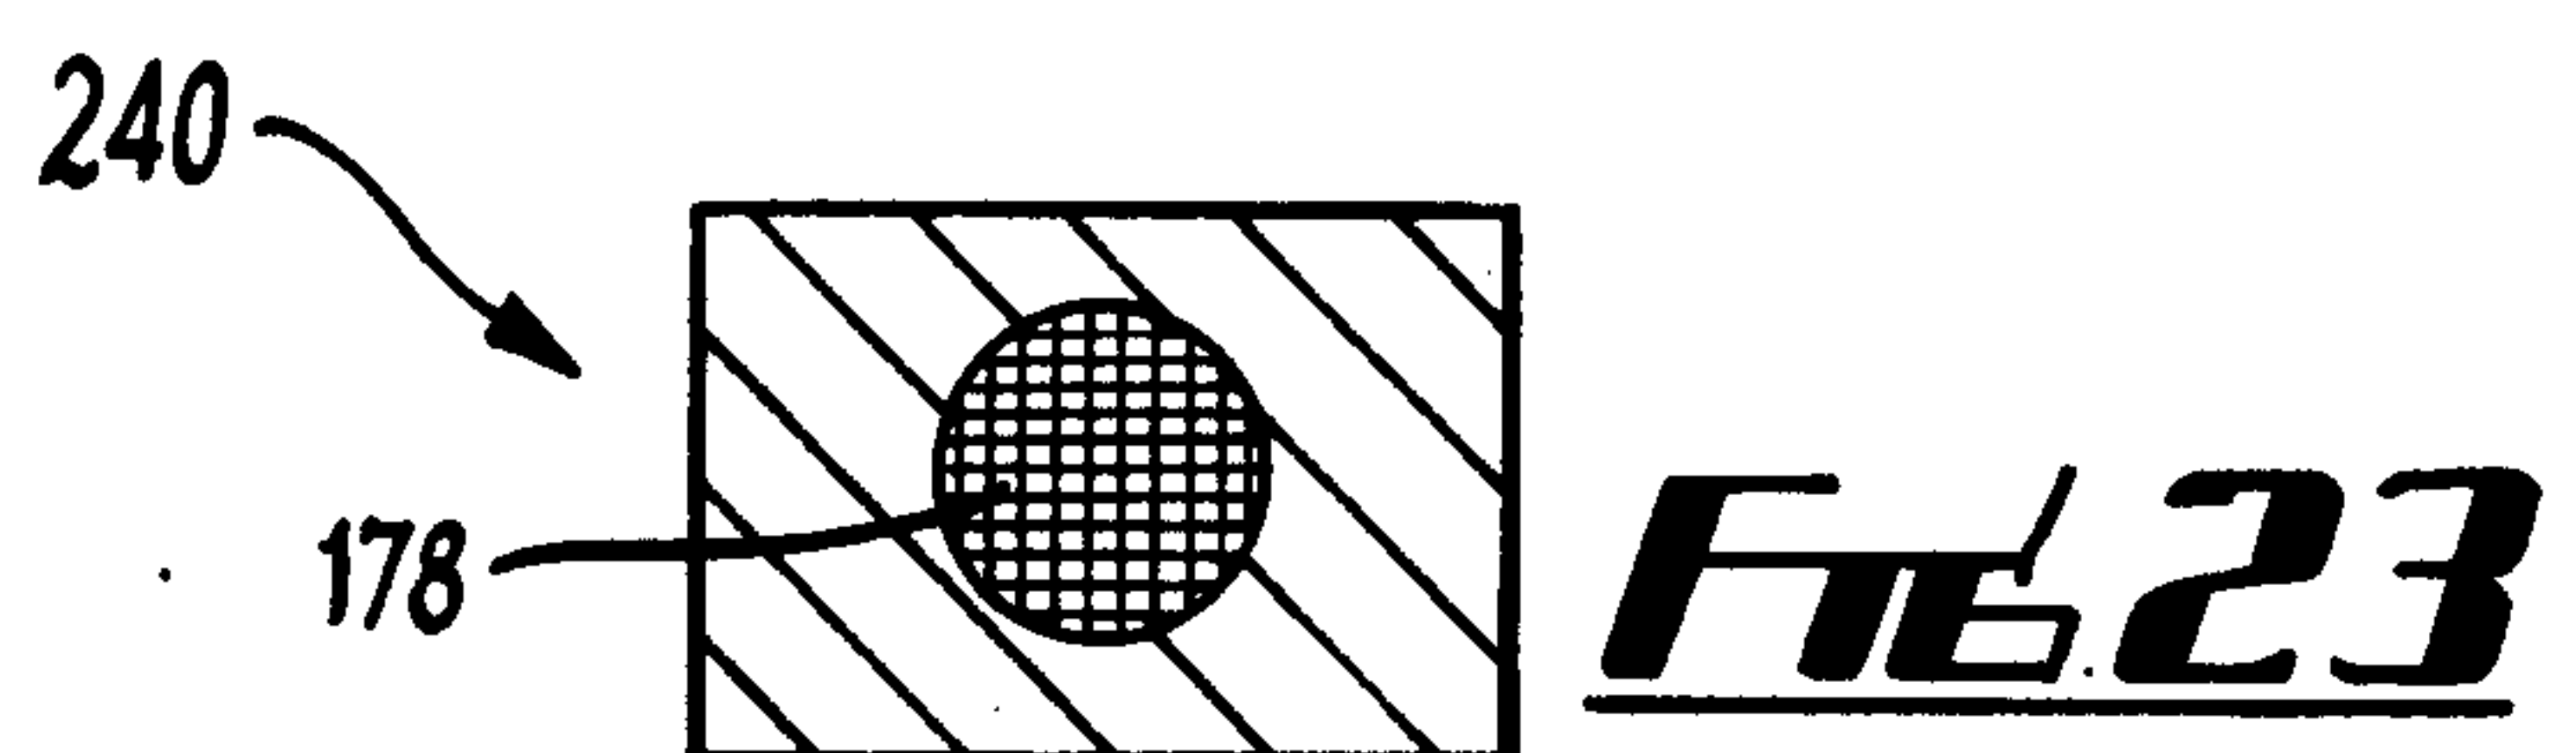
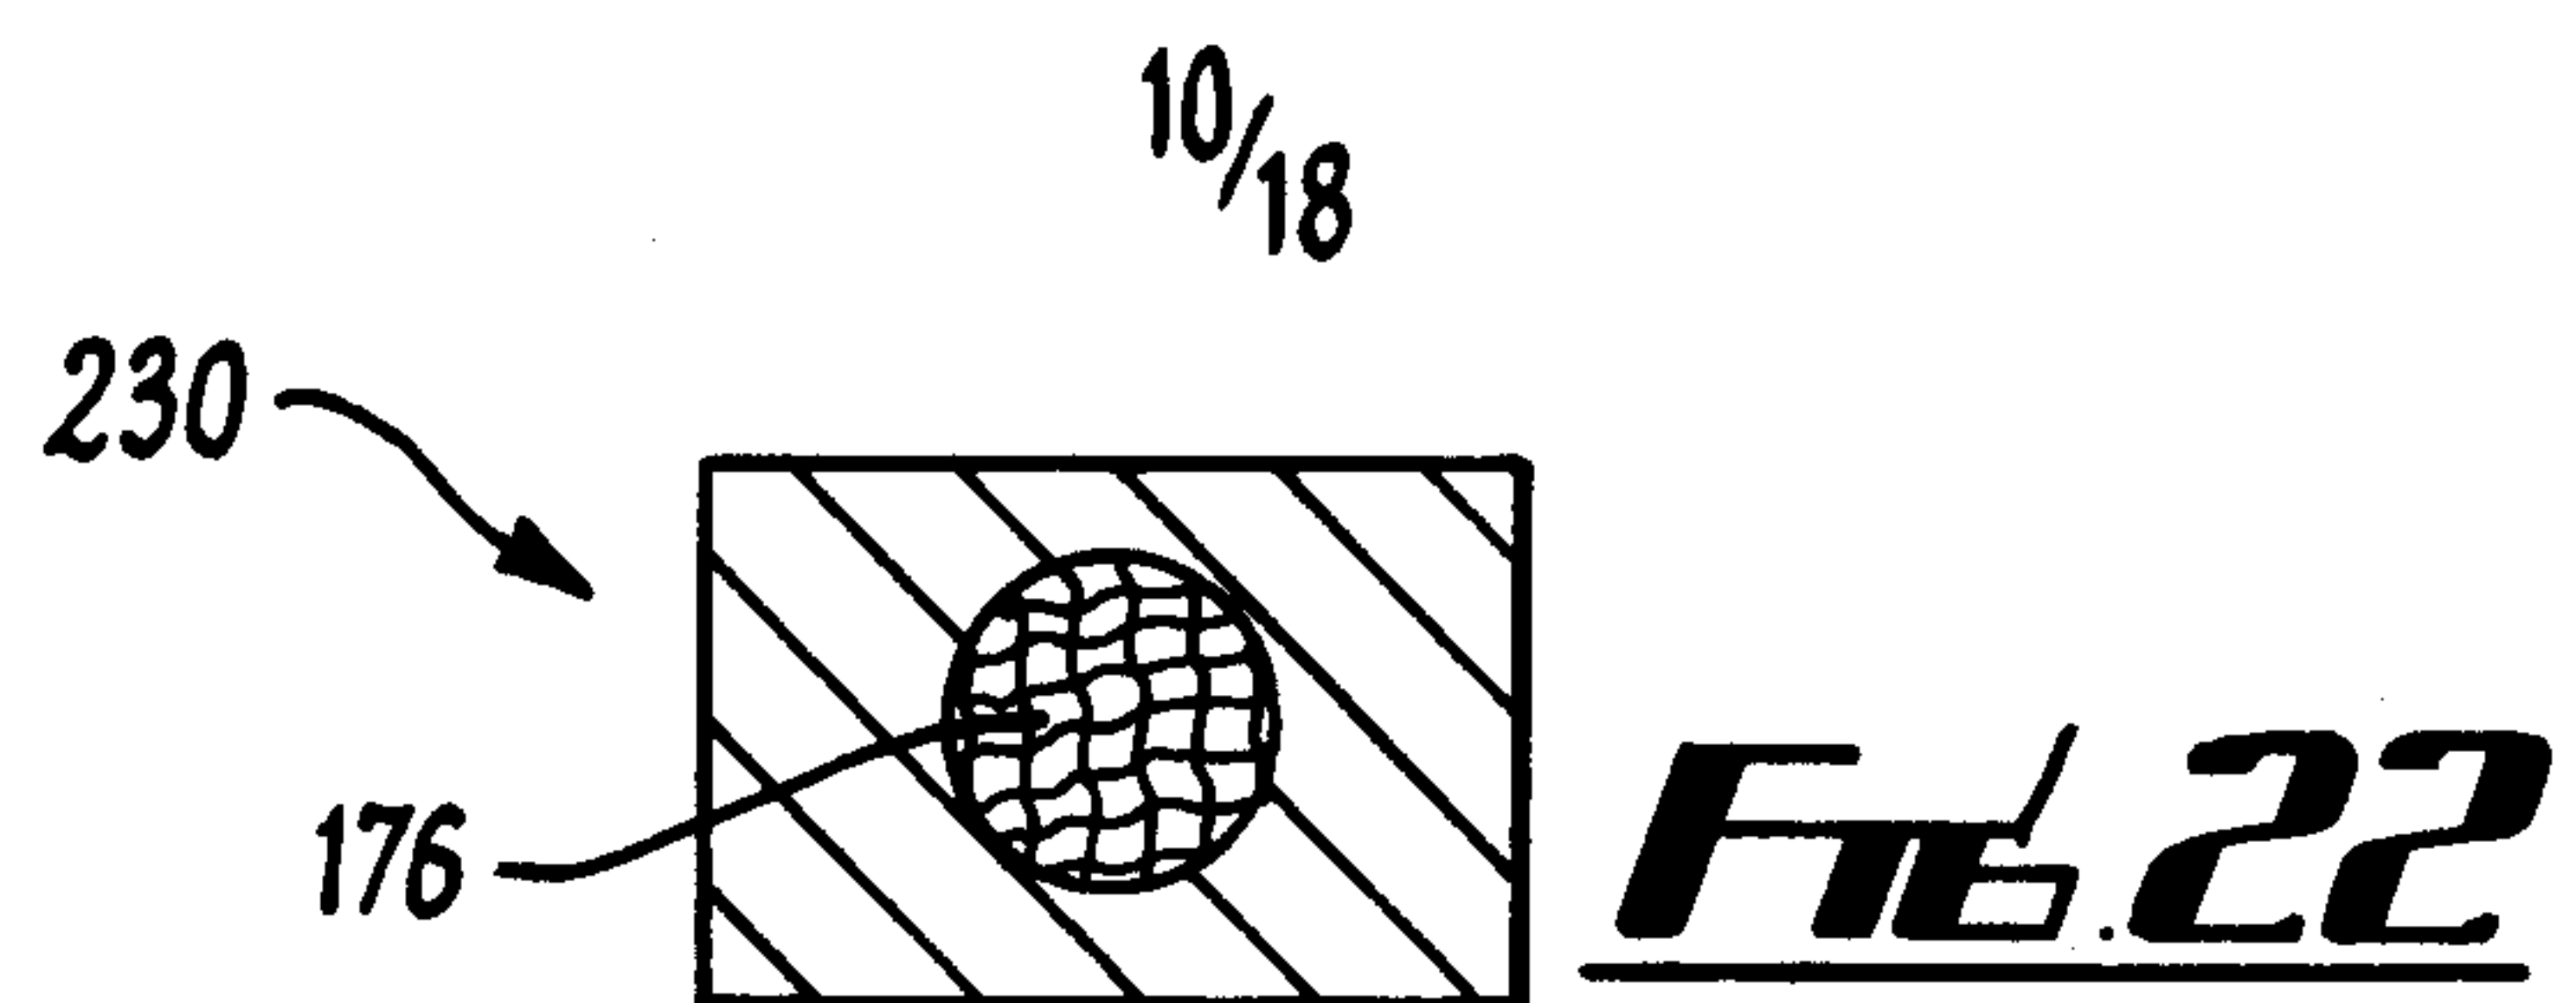




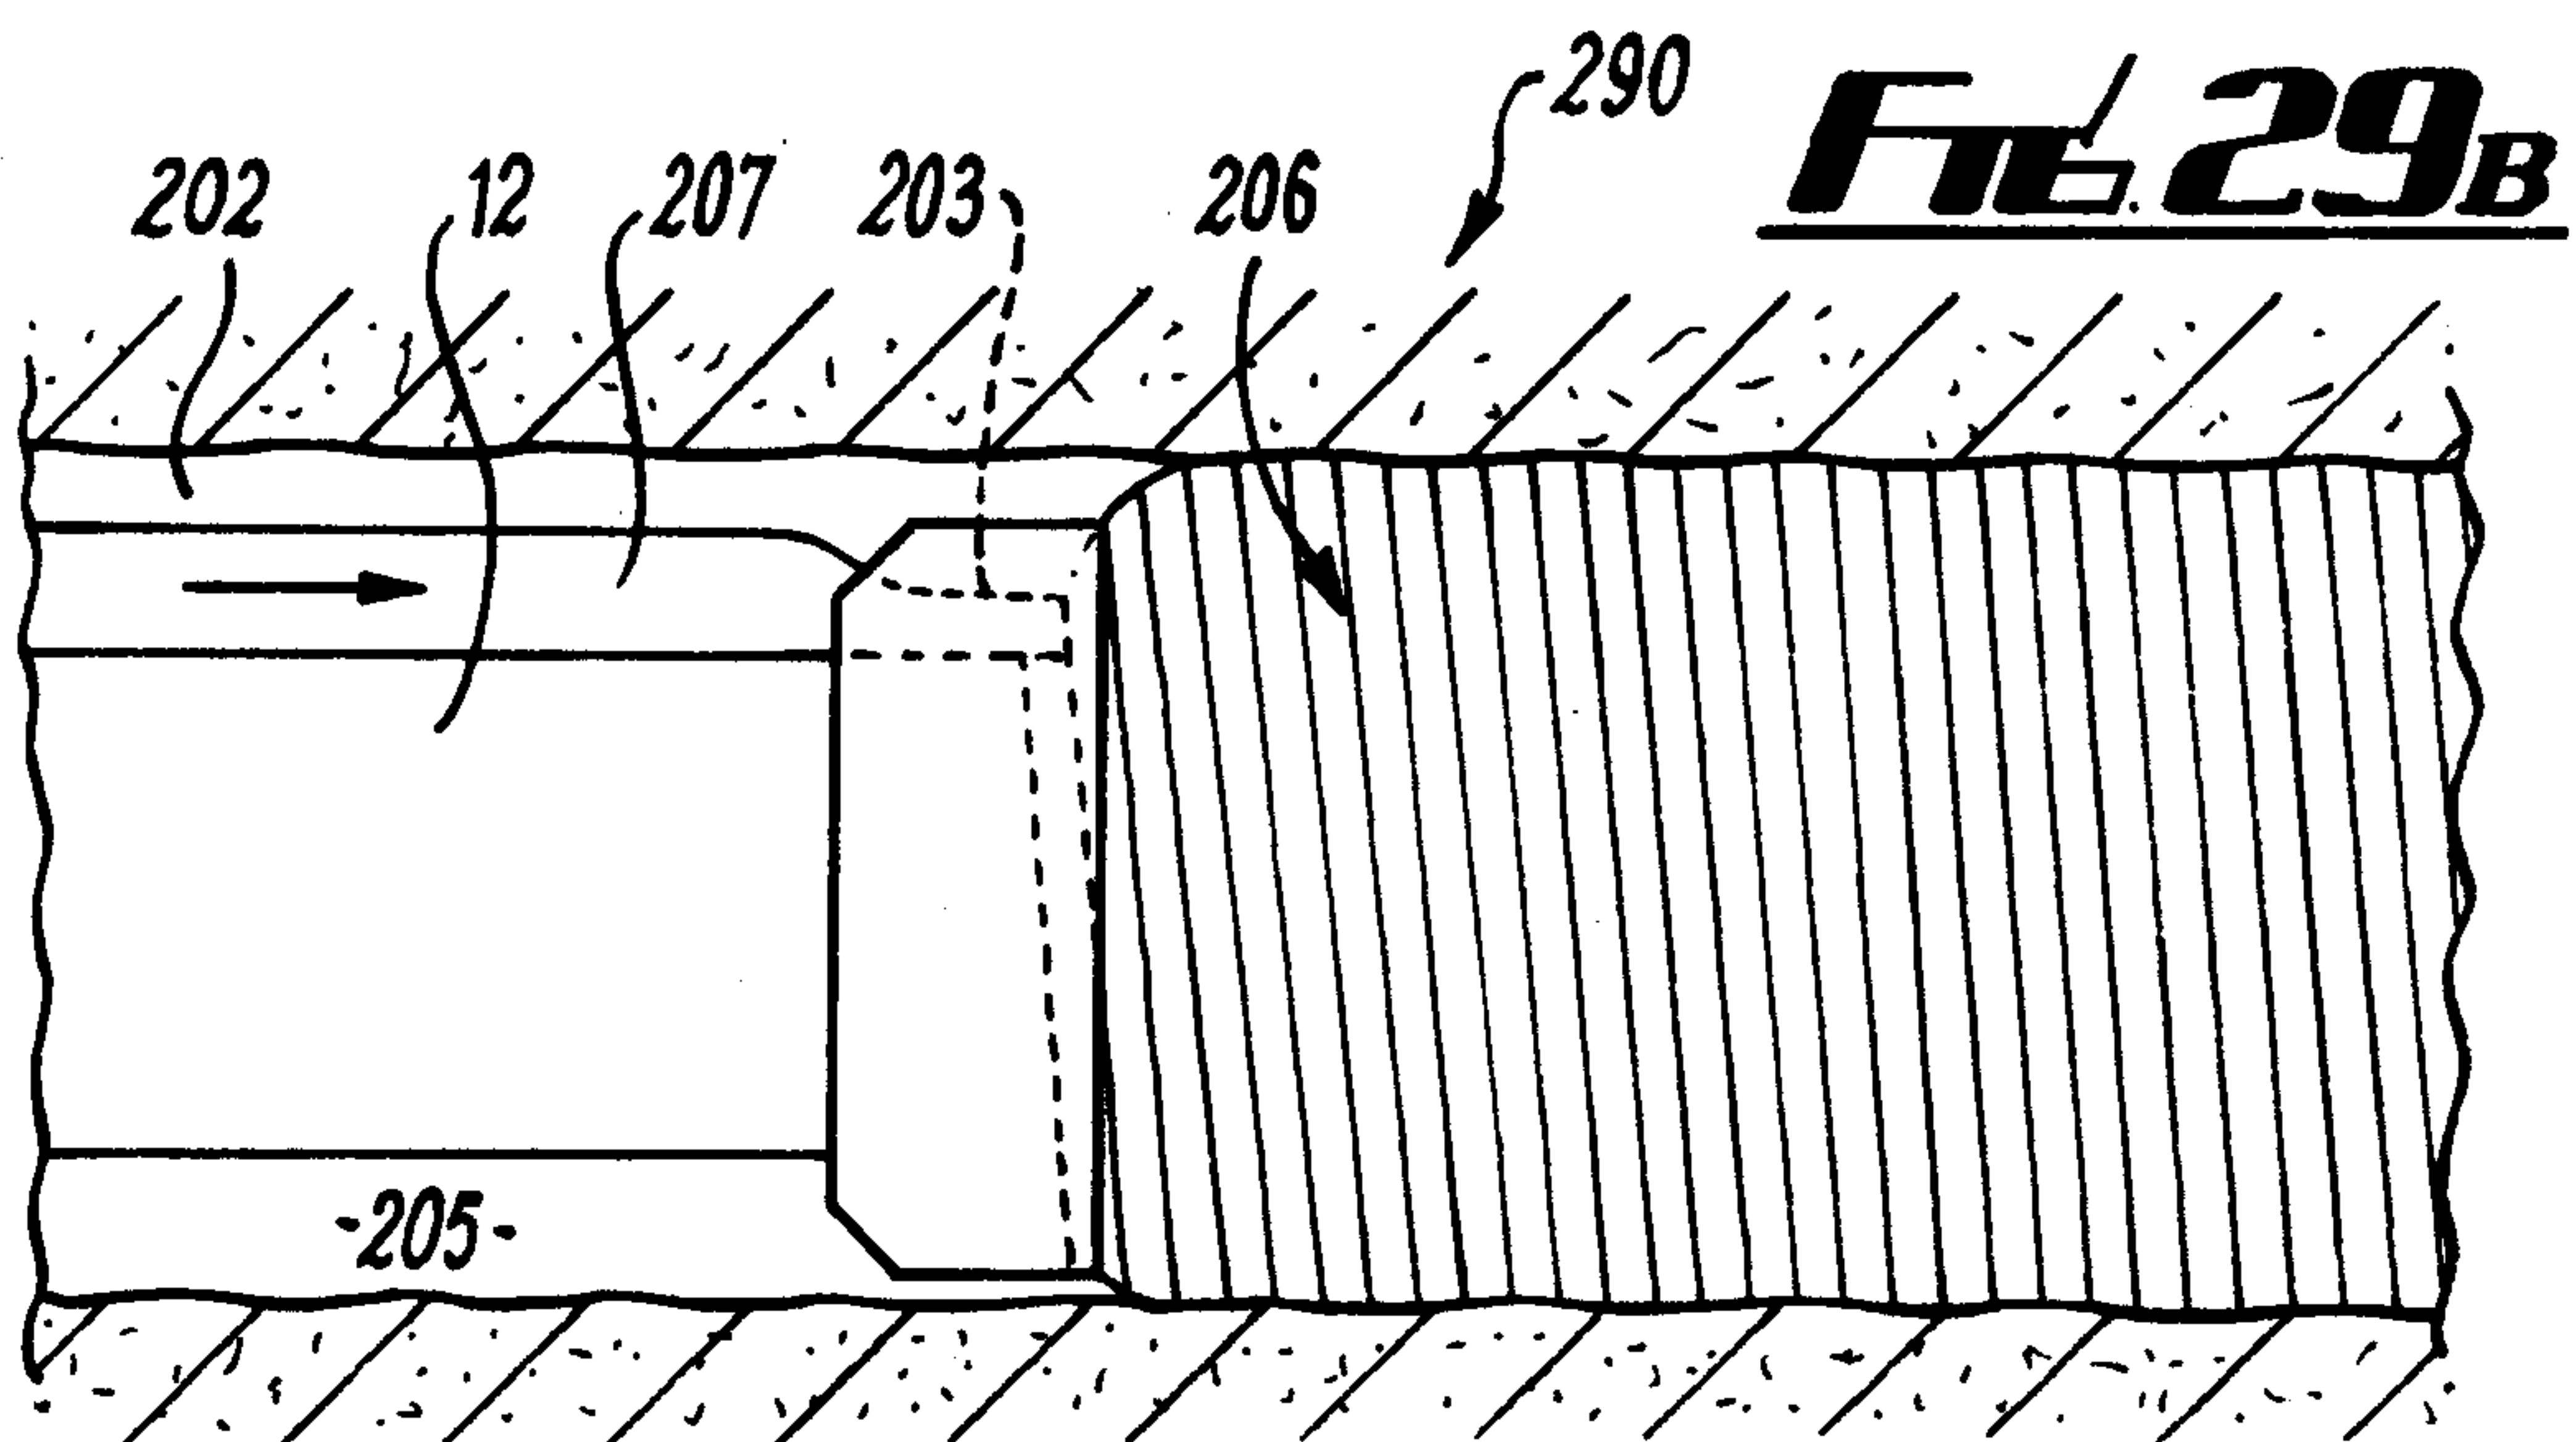
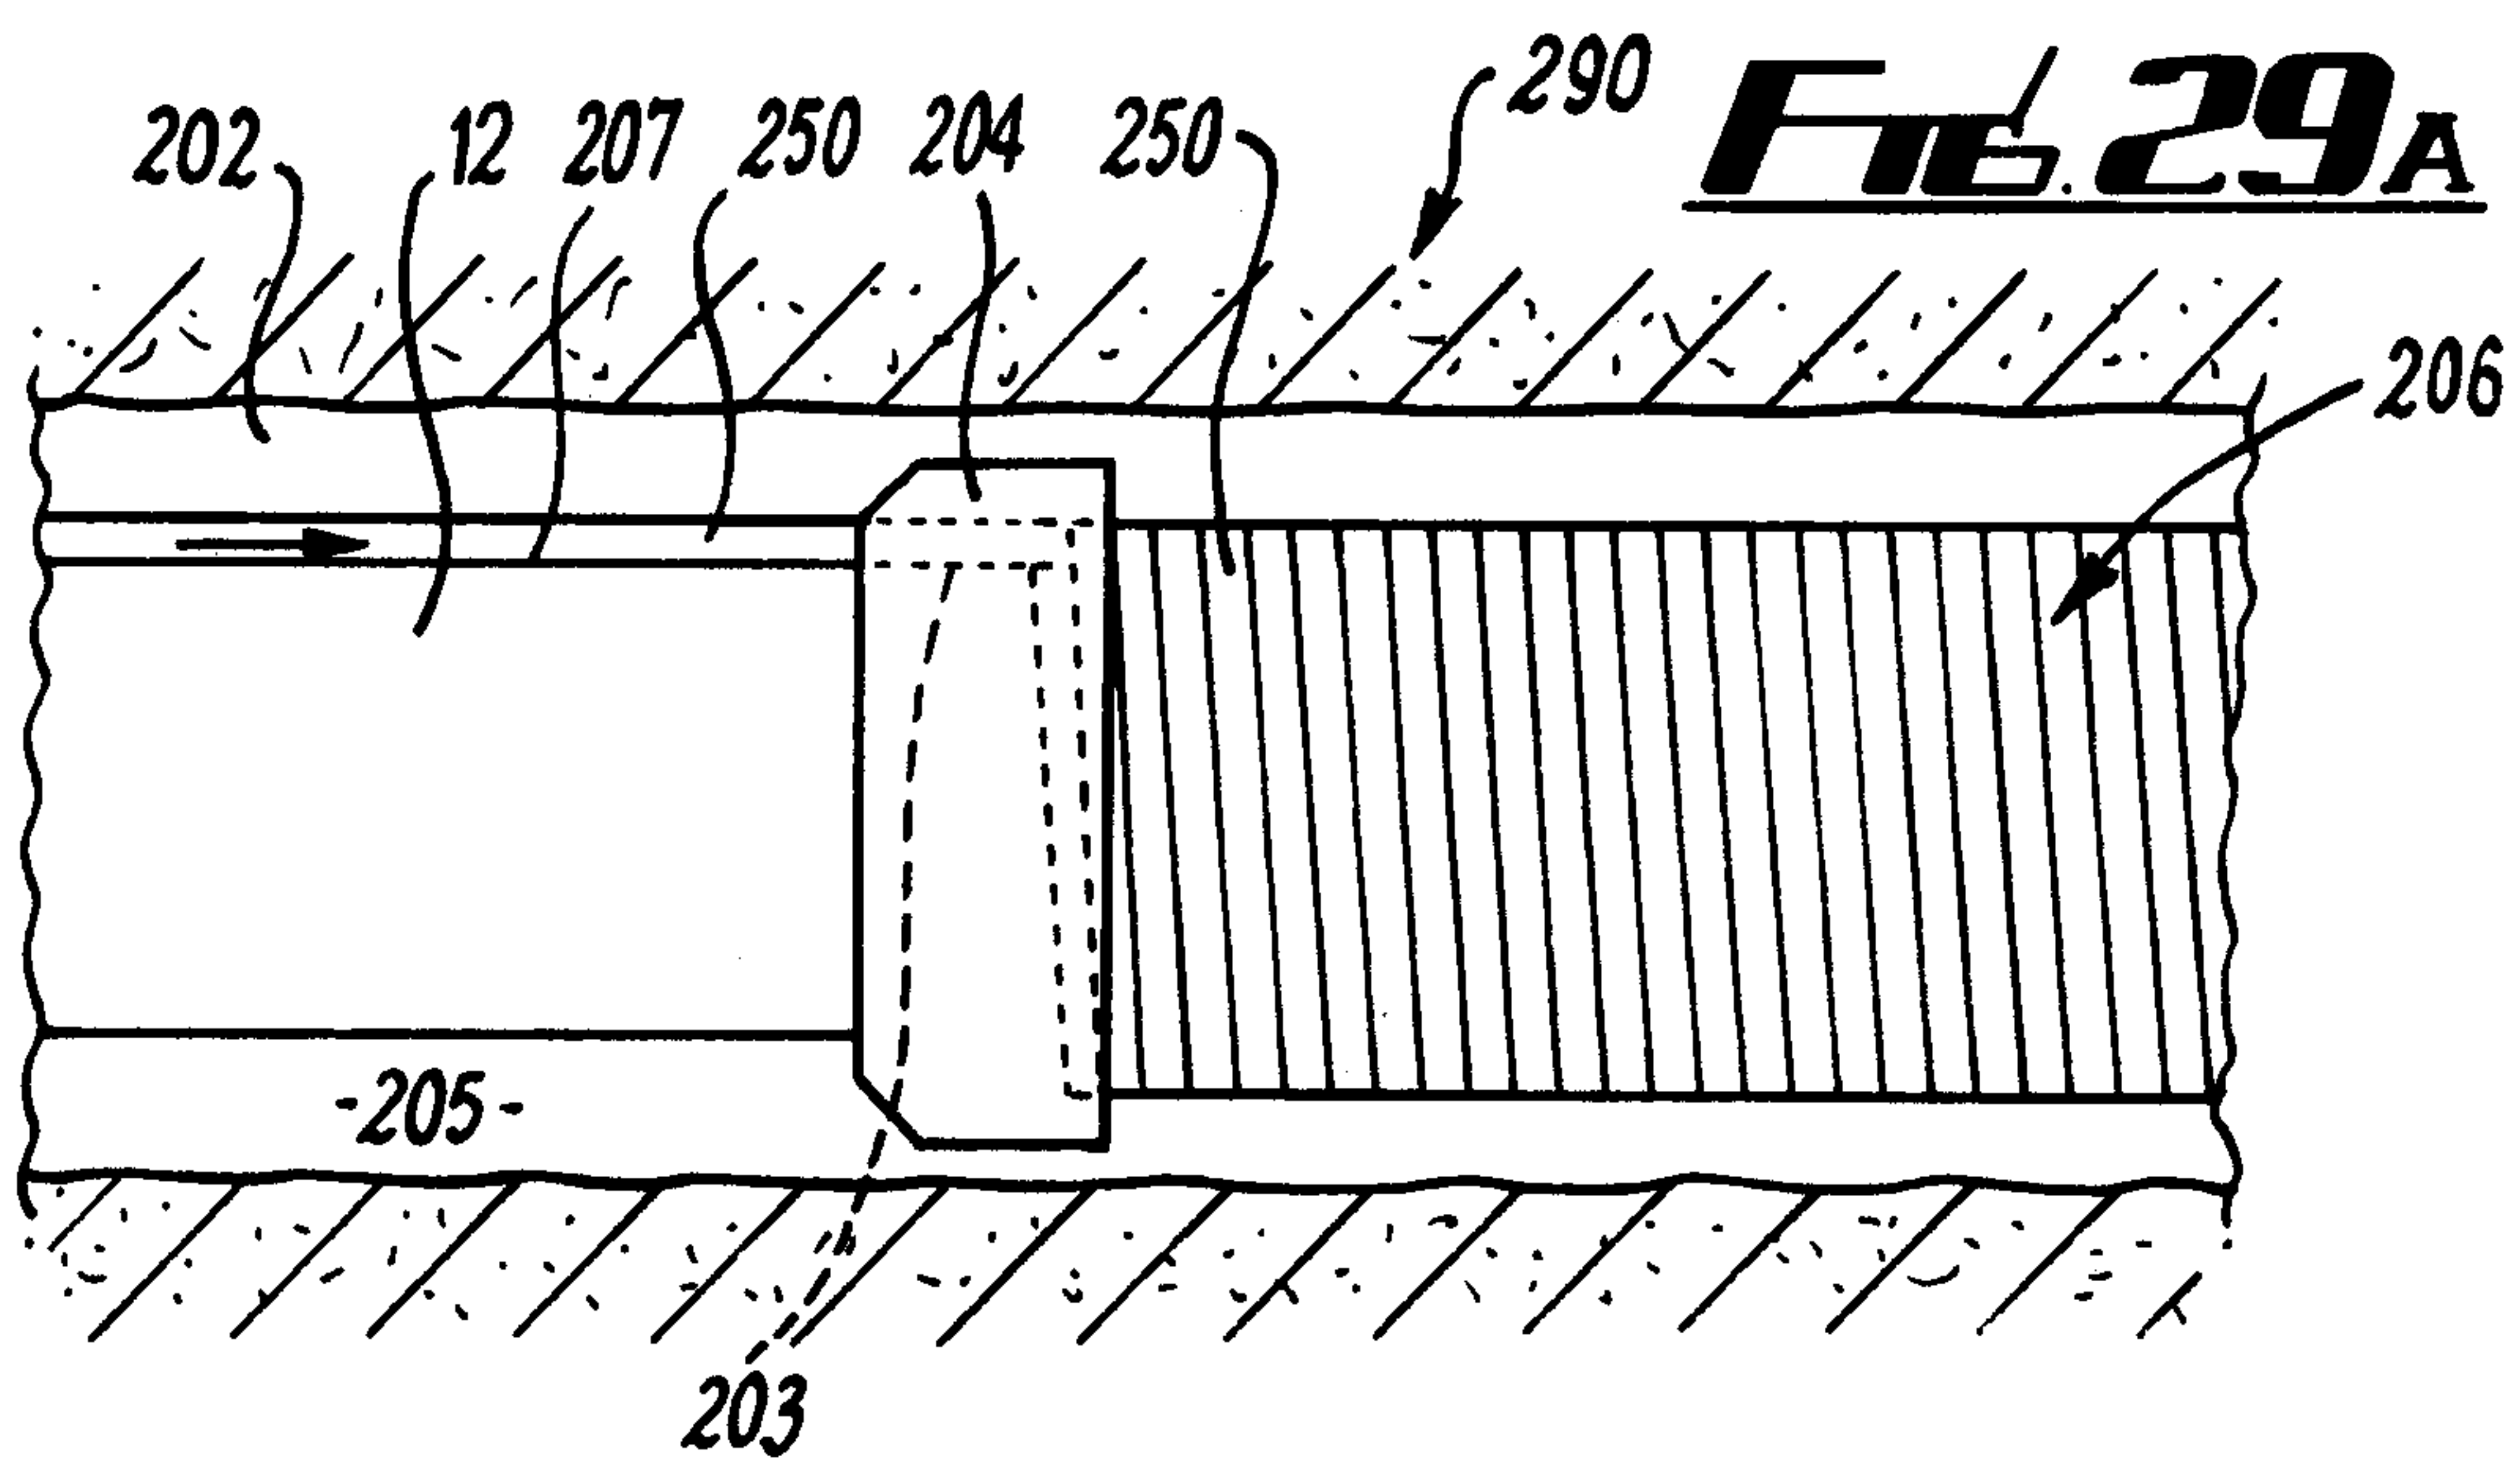
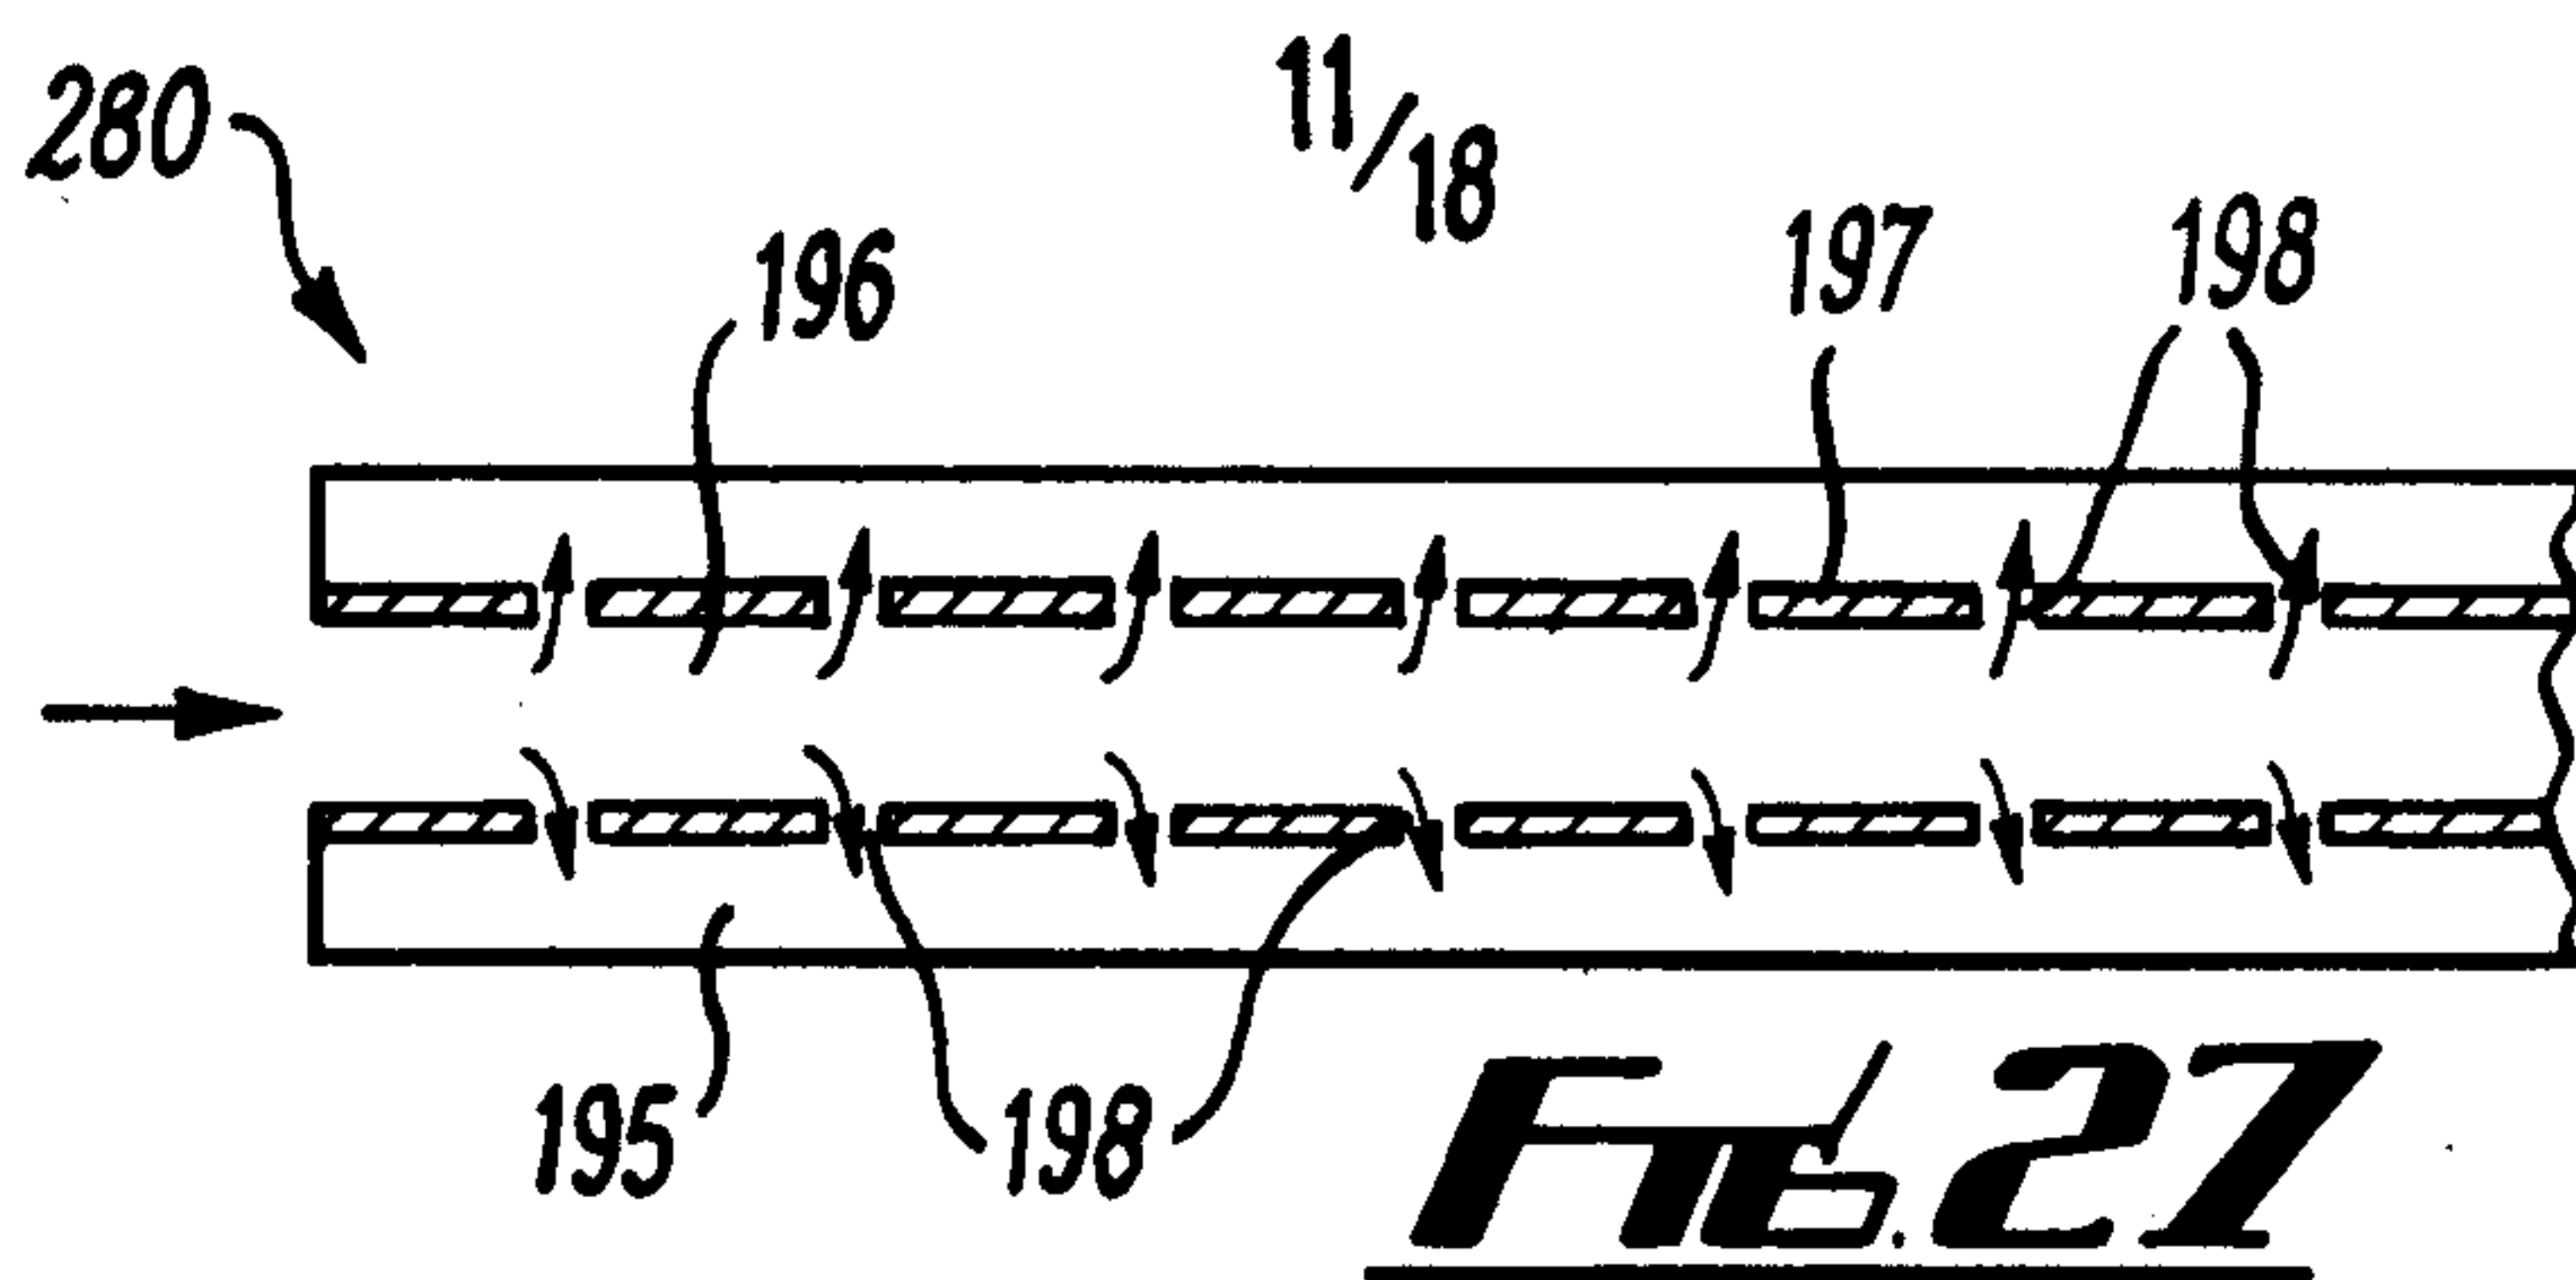


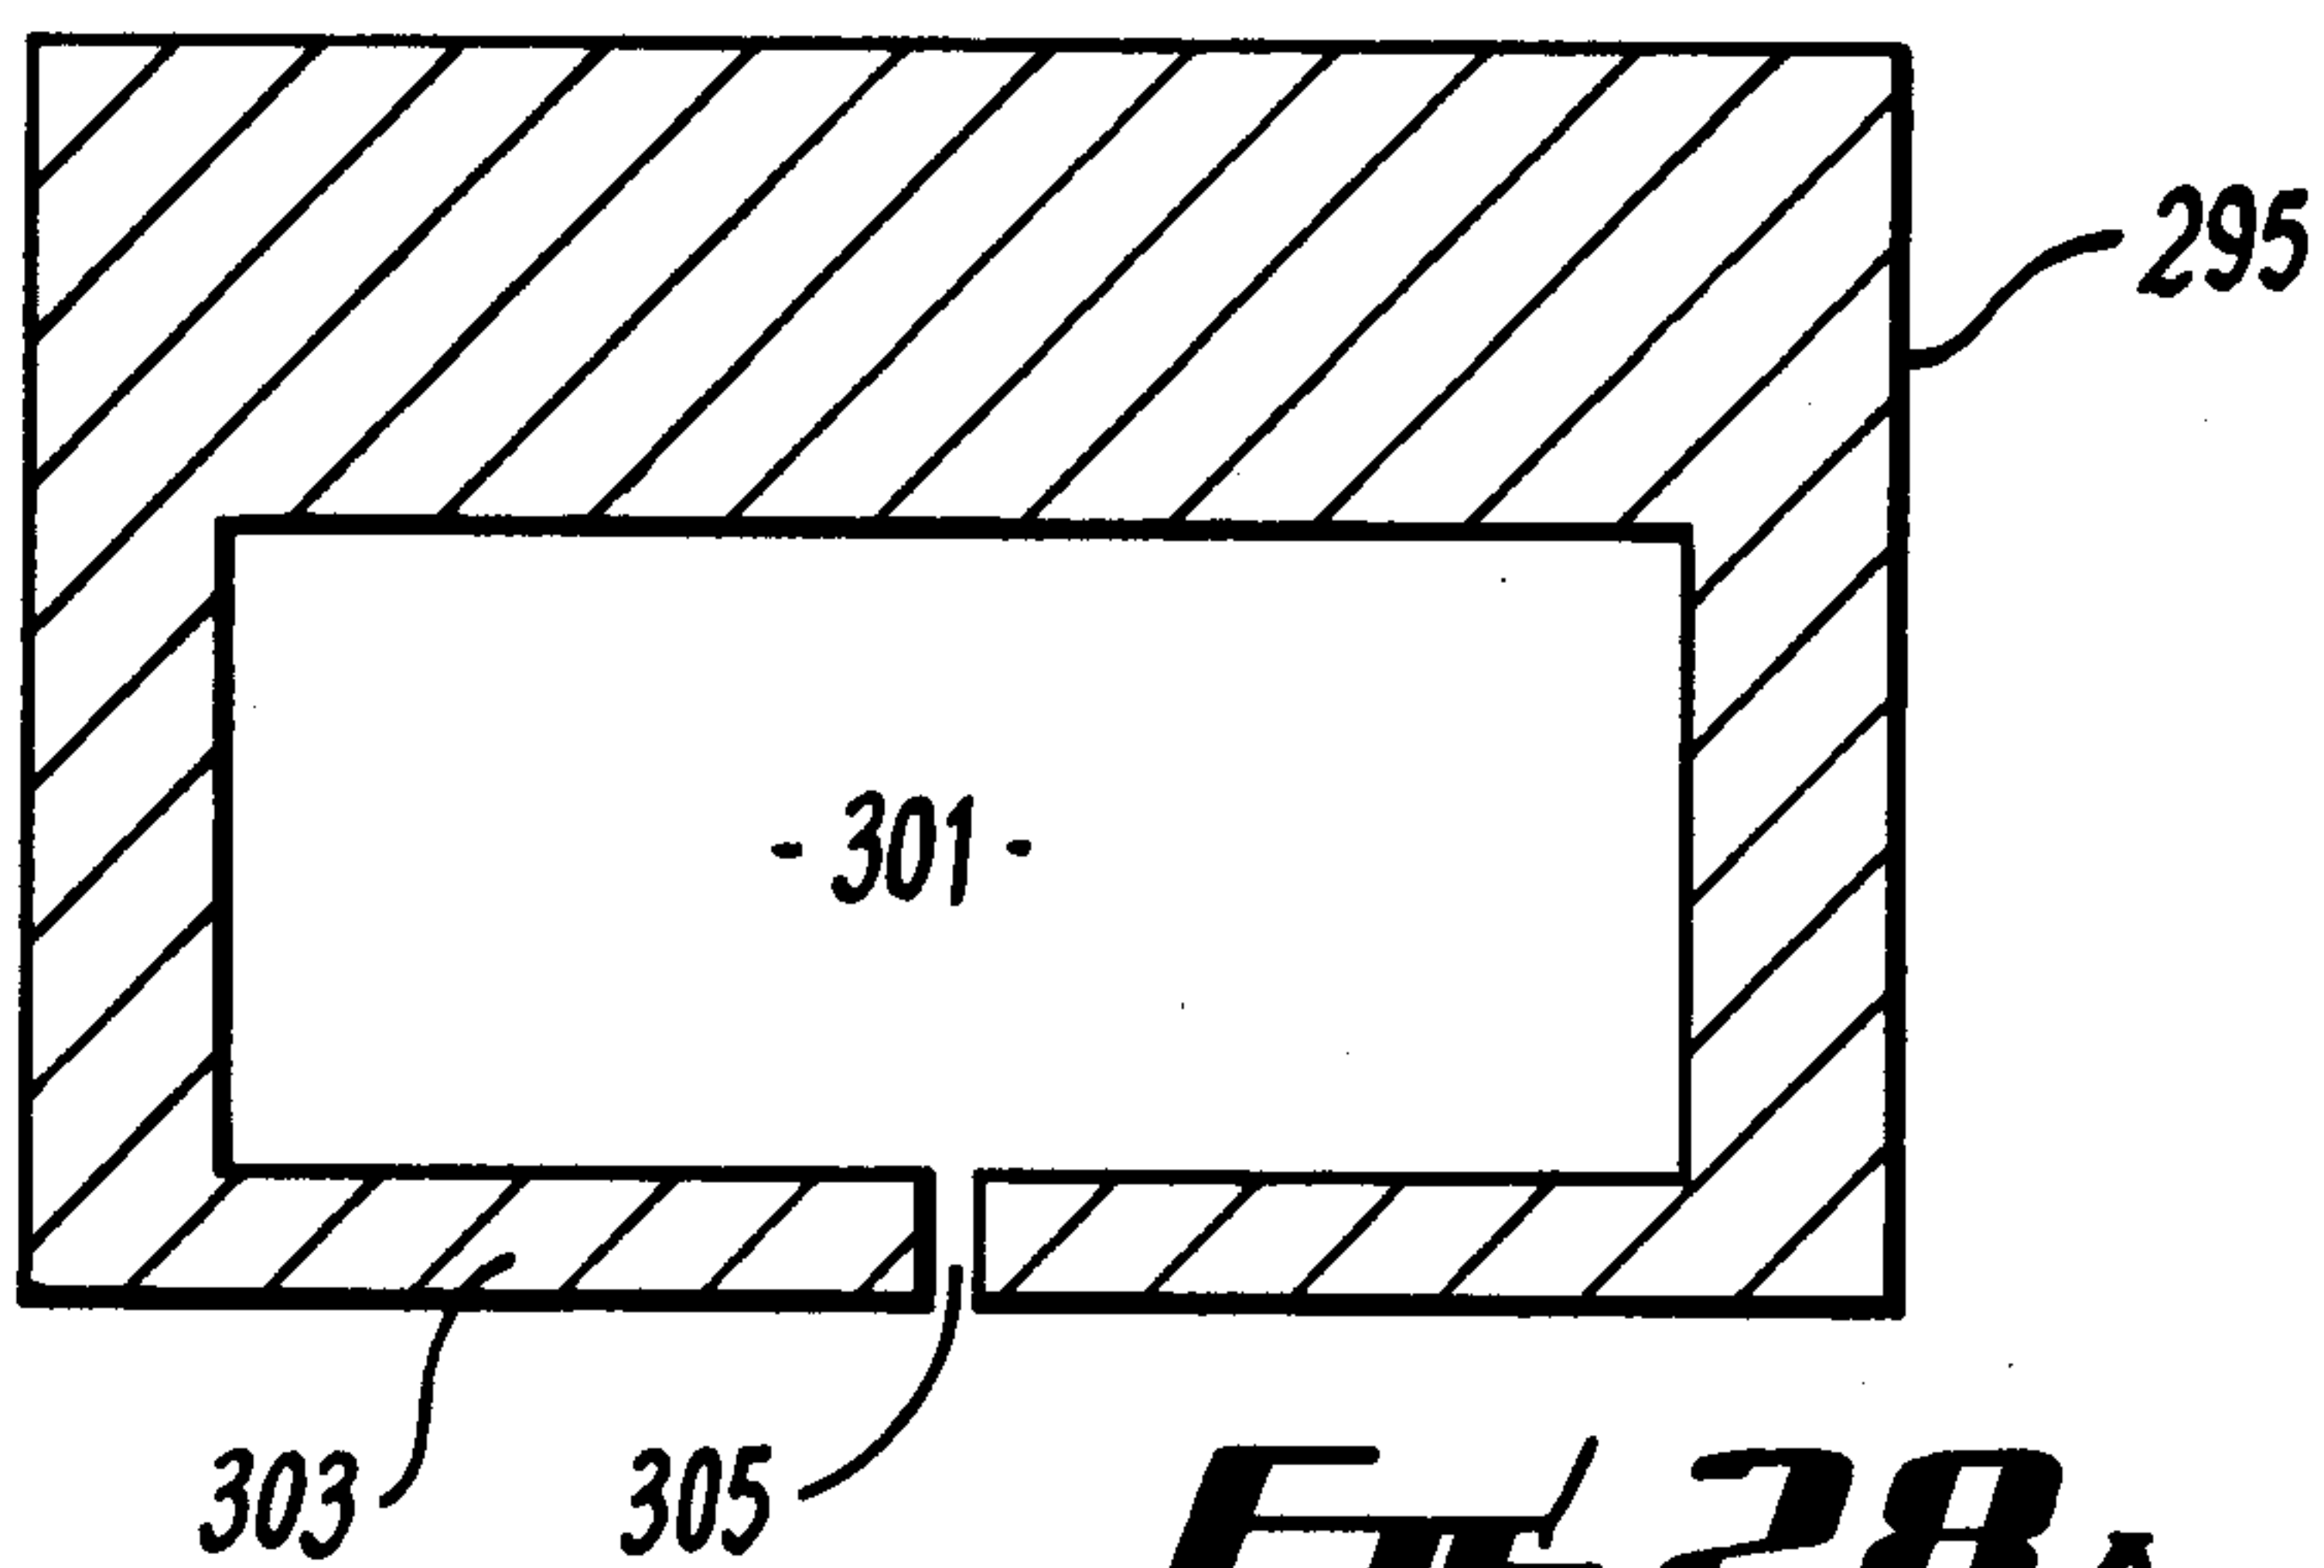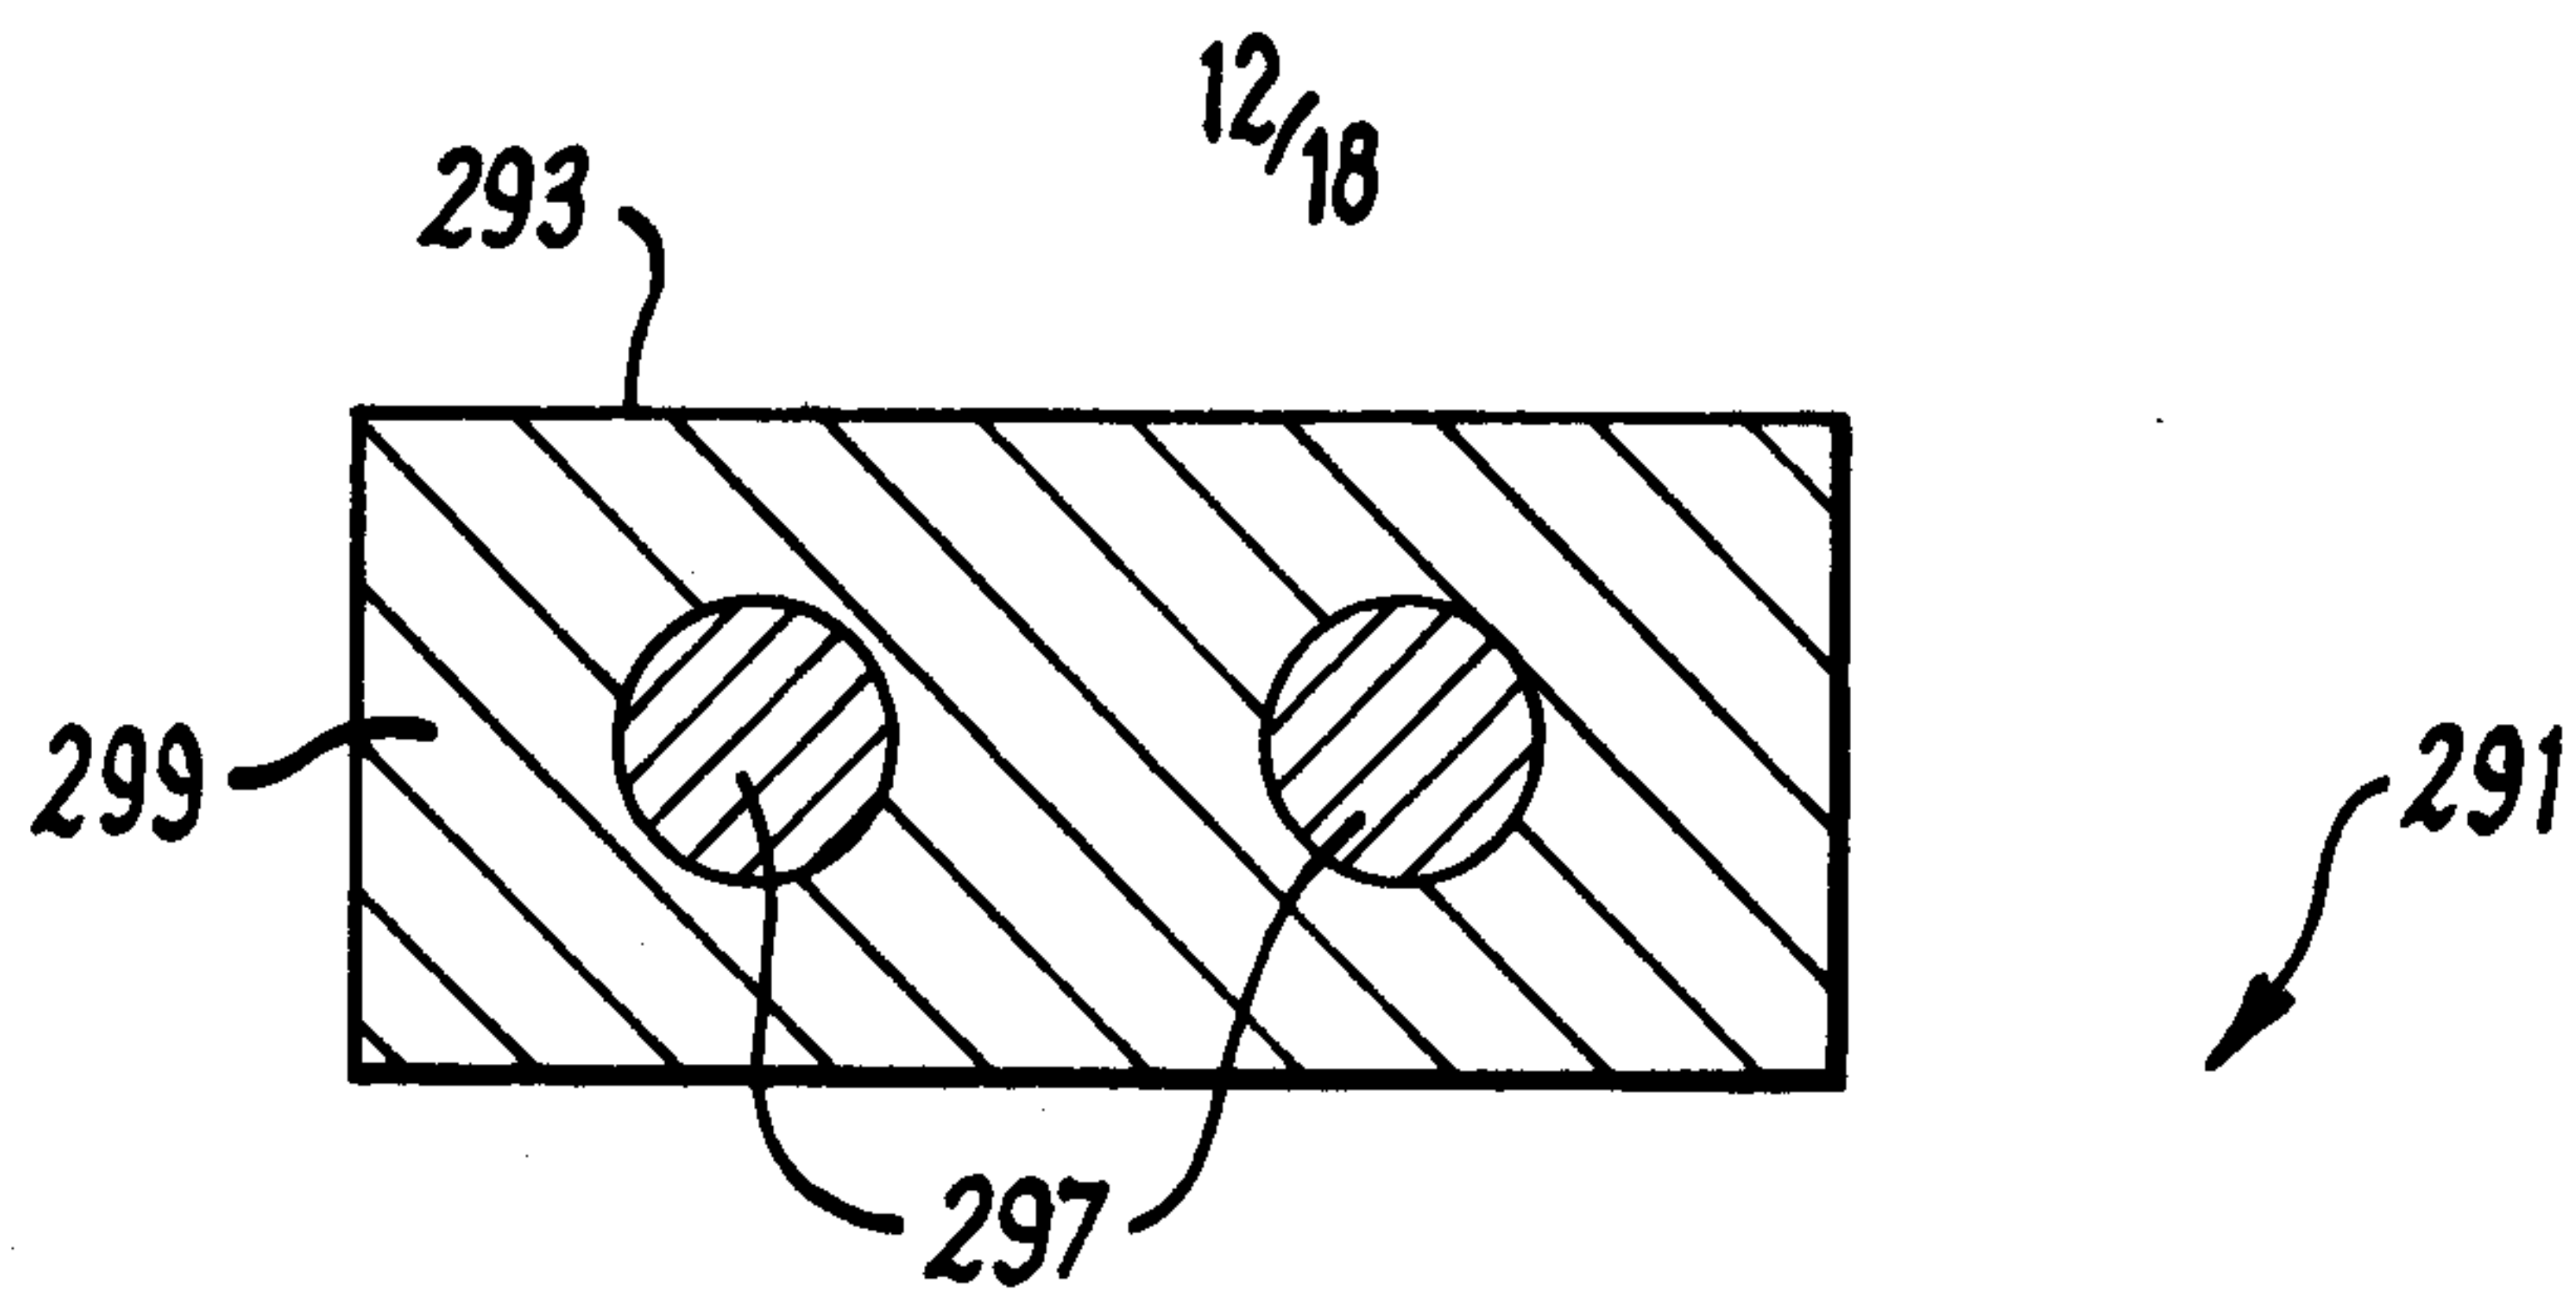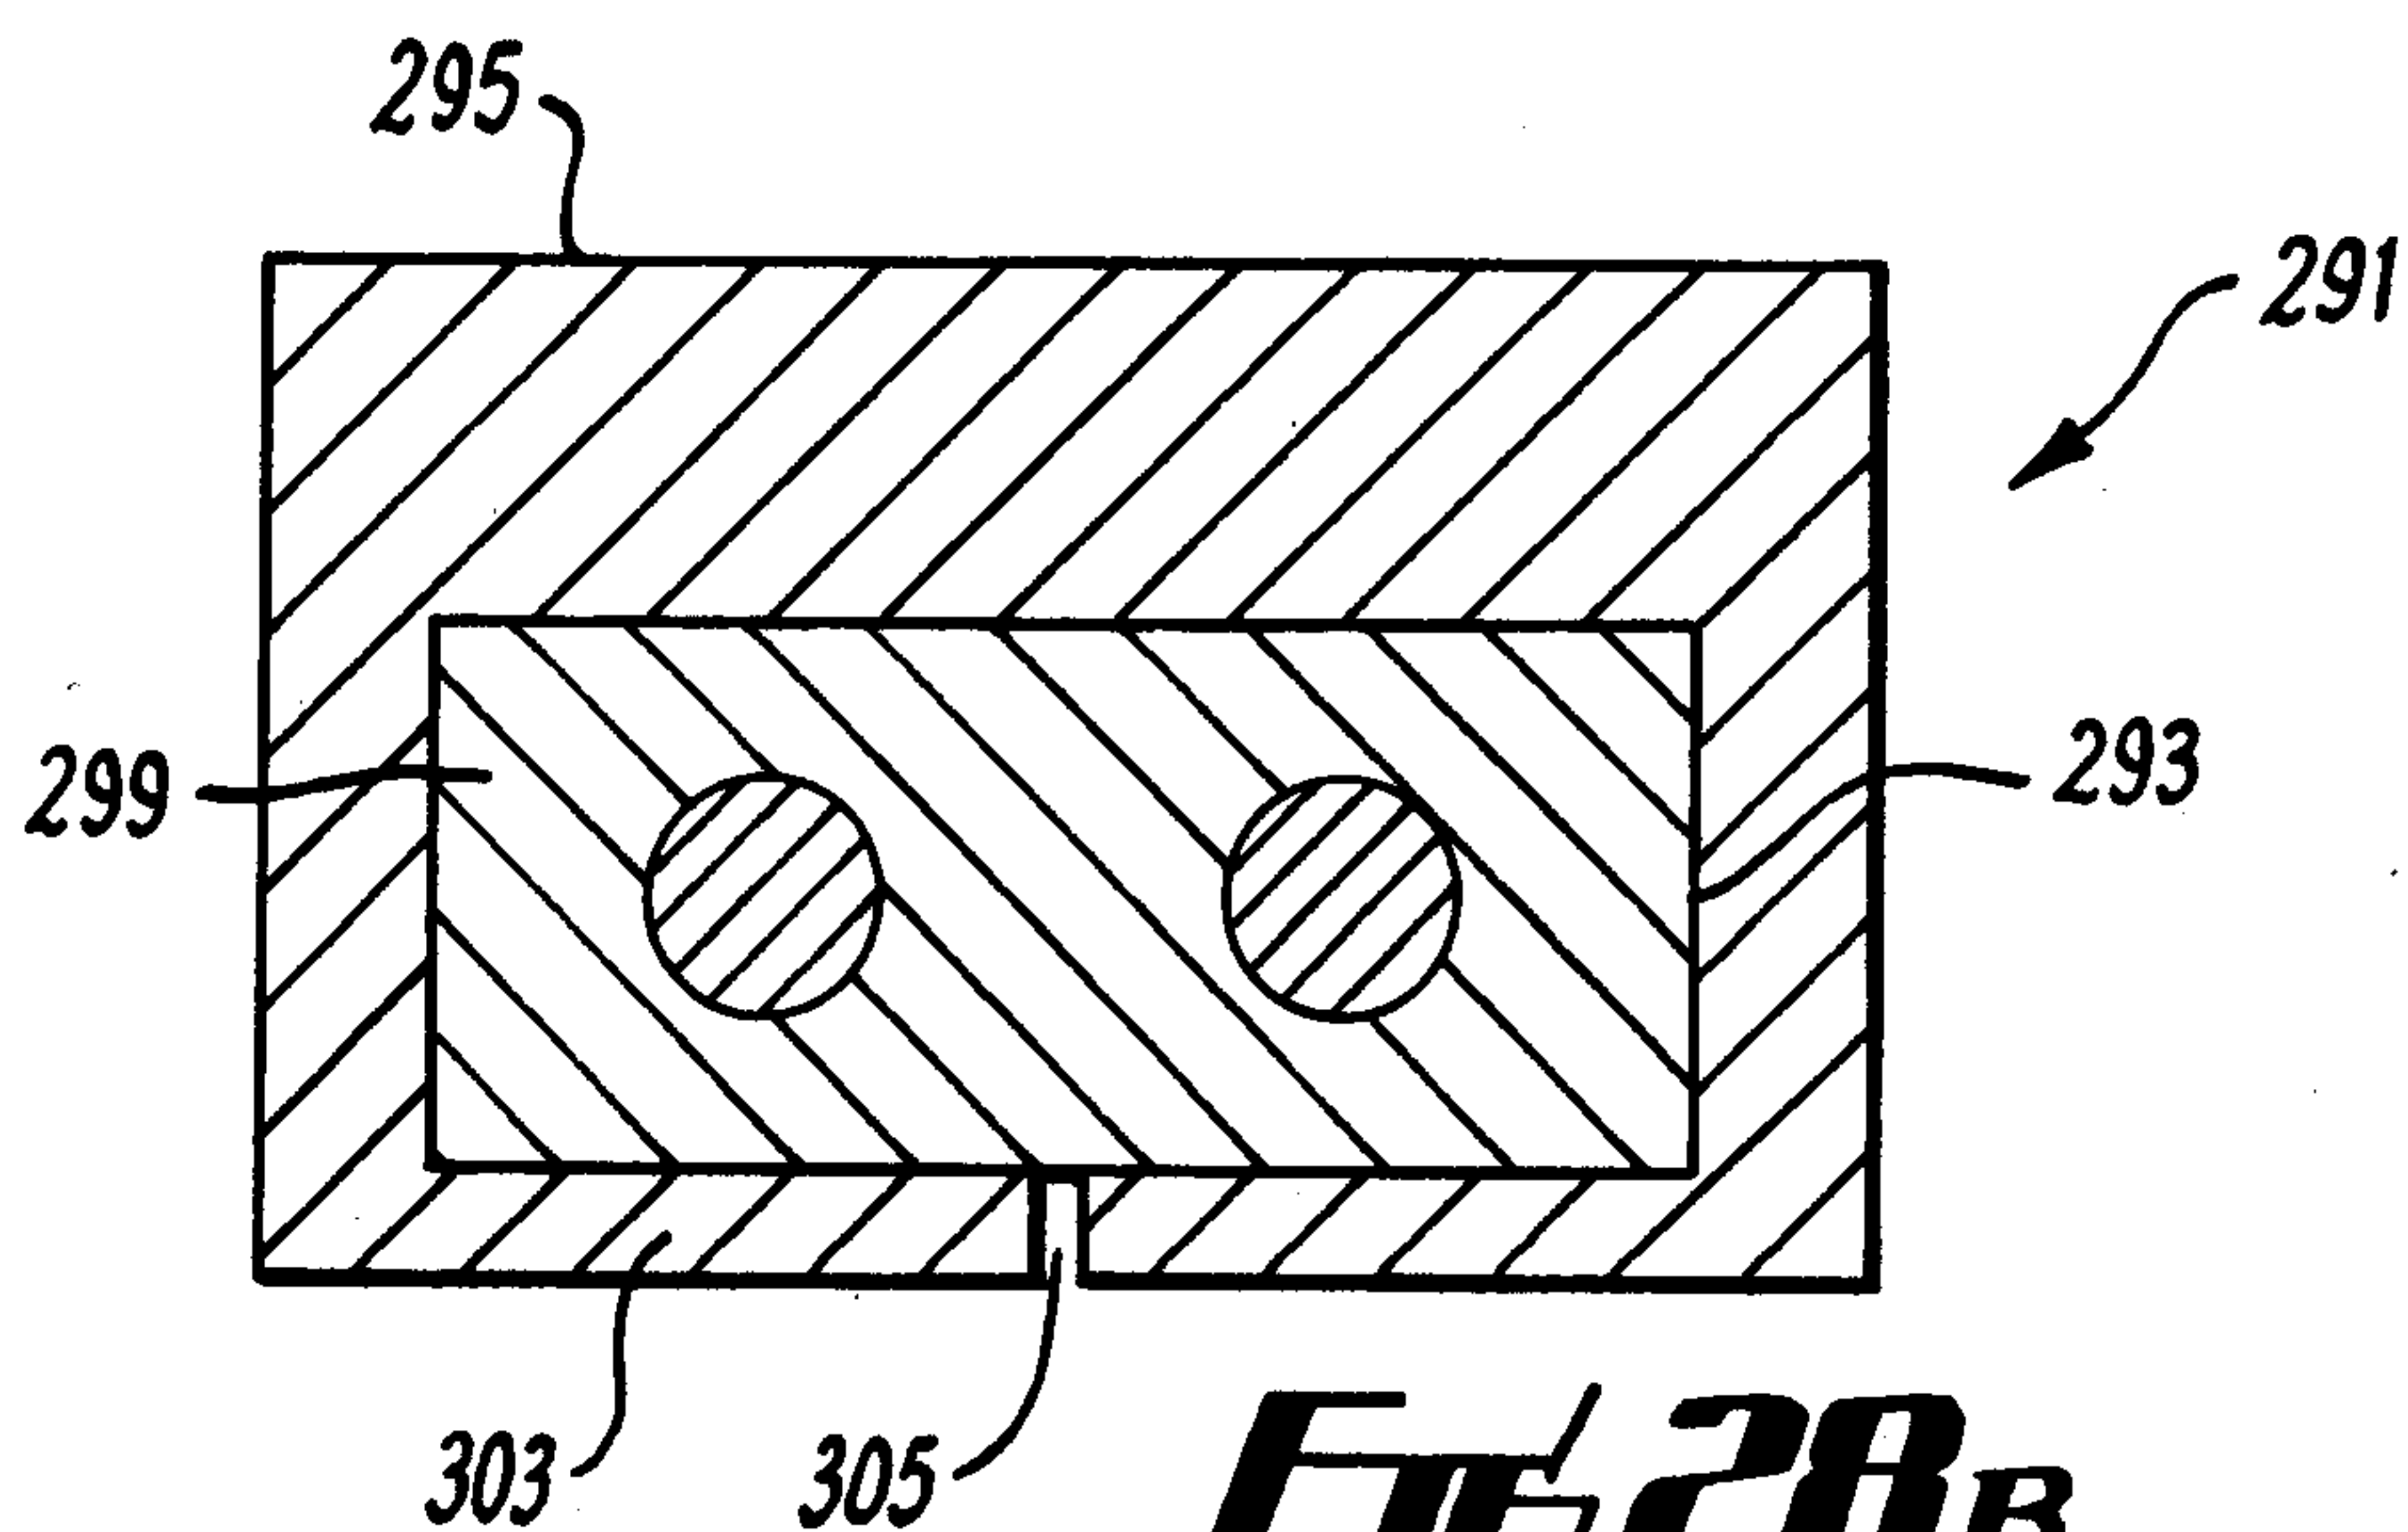**FIG. 28A****FIG. 28B**

13/18

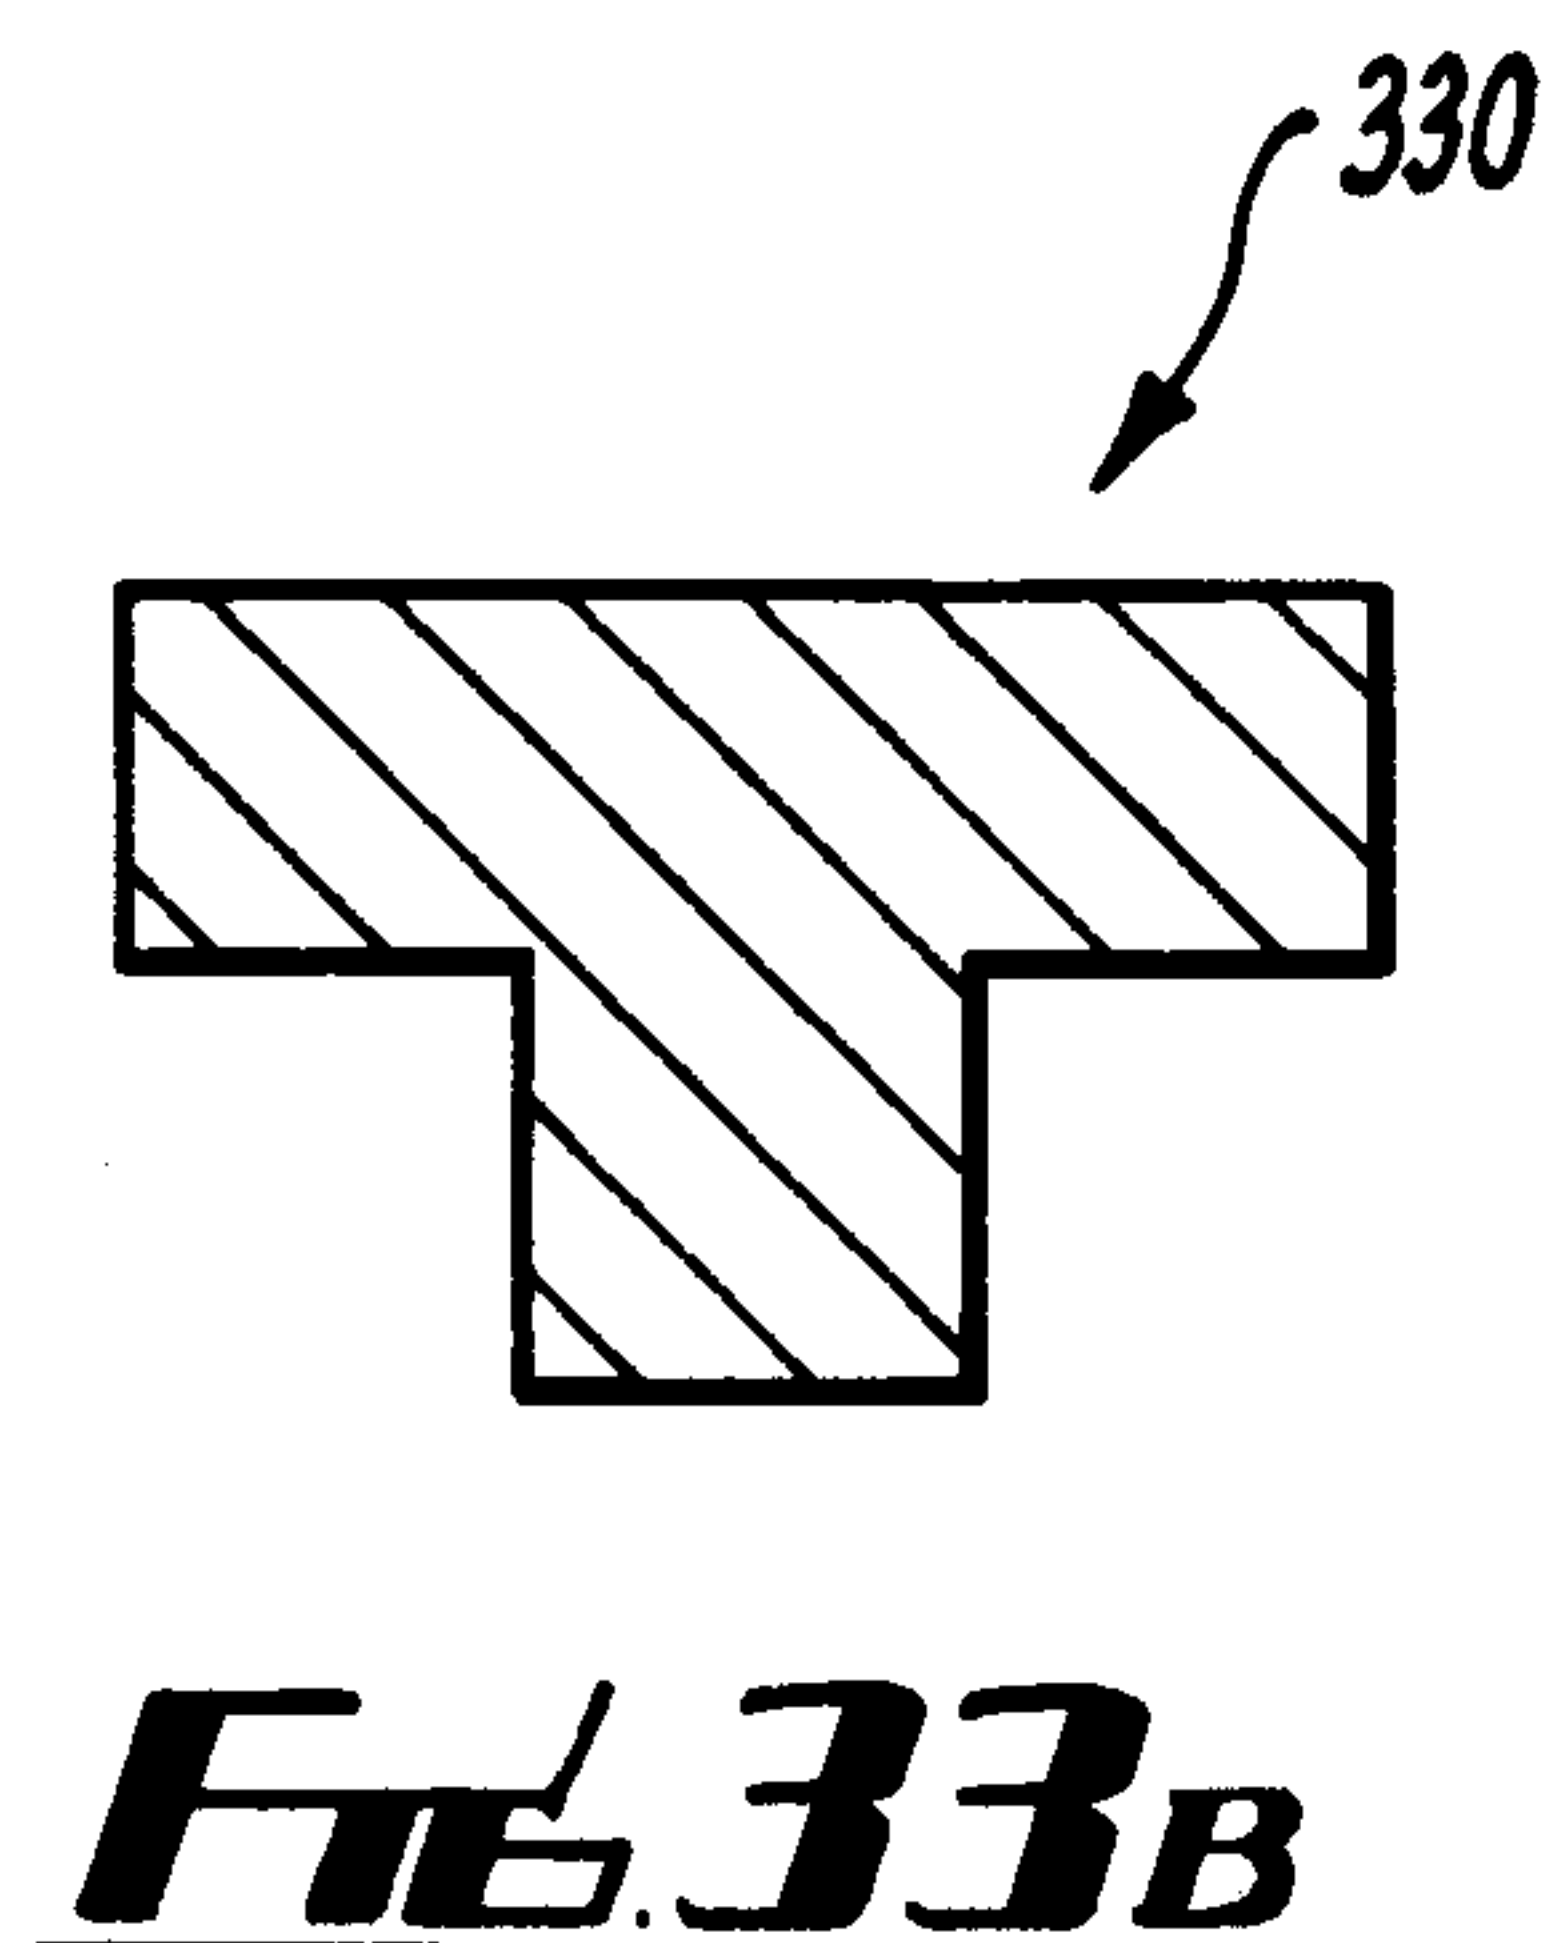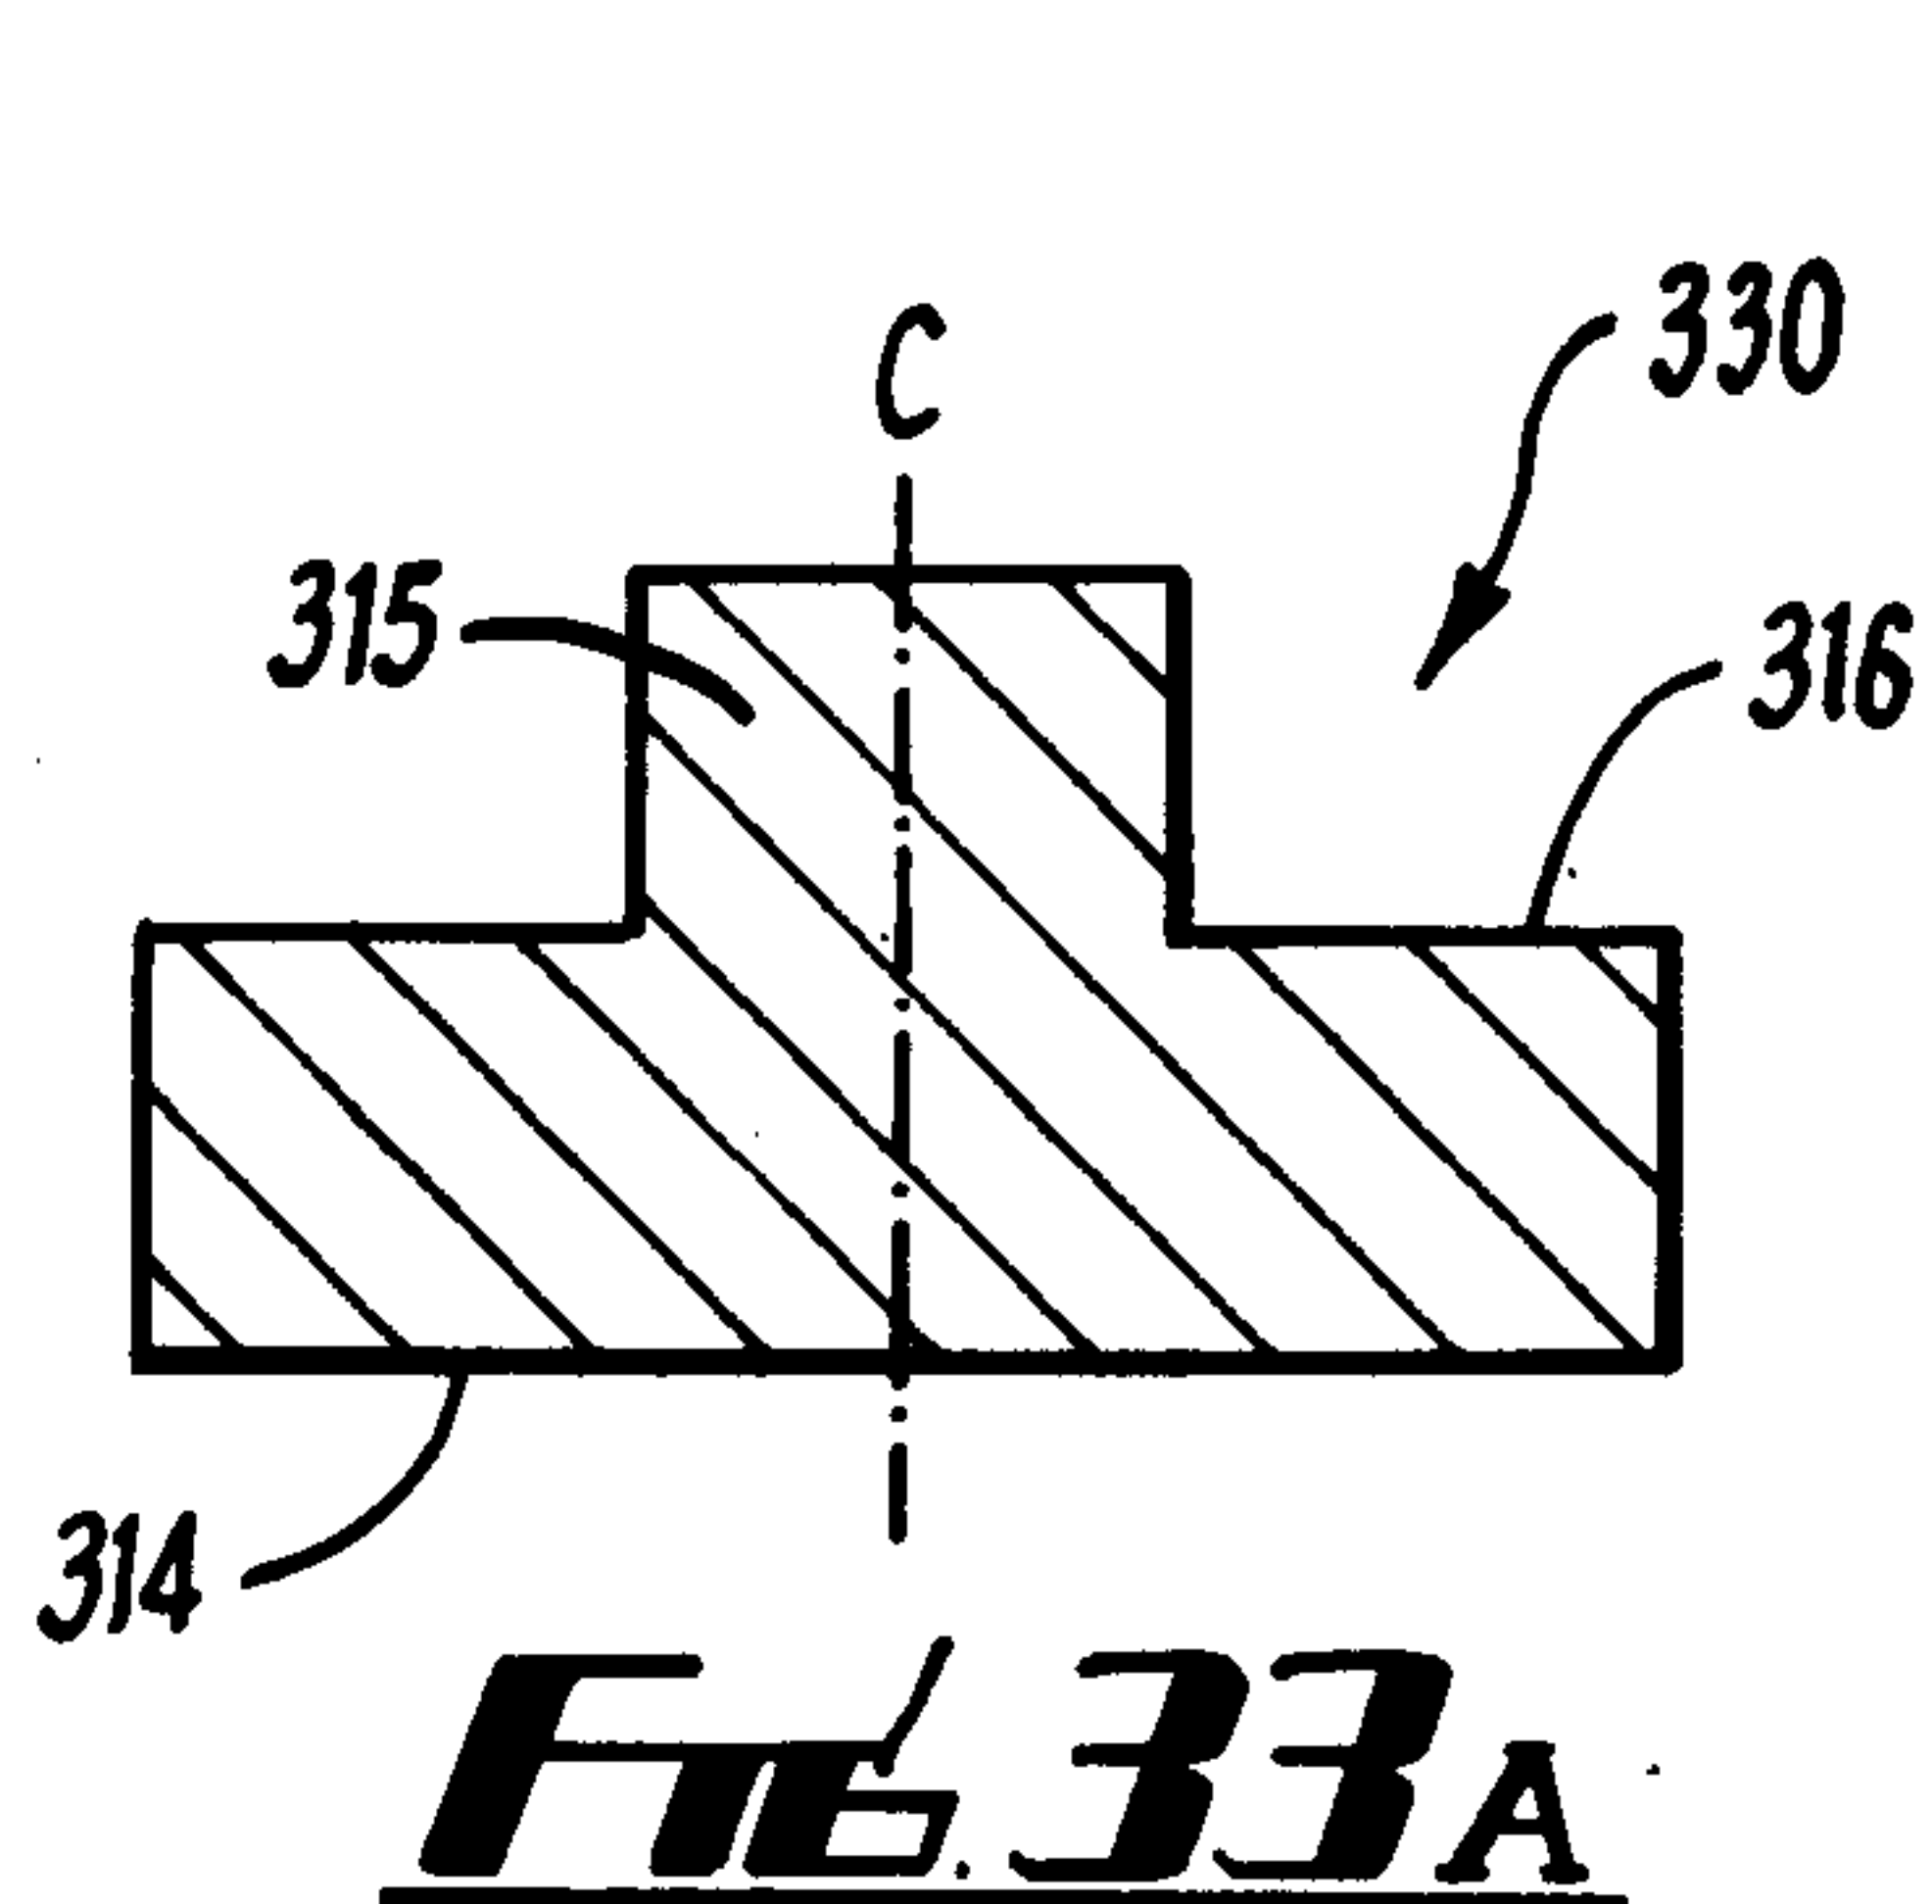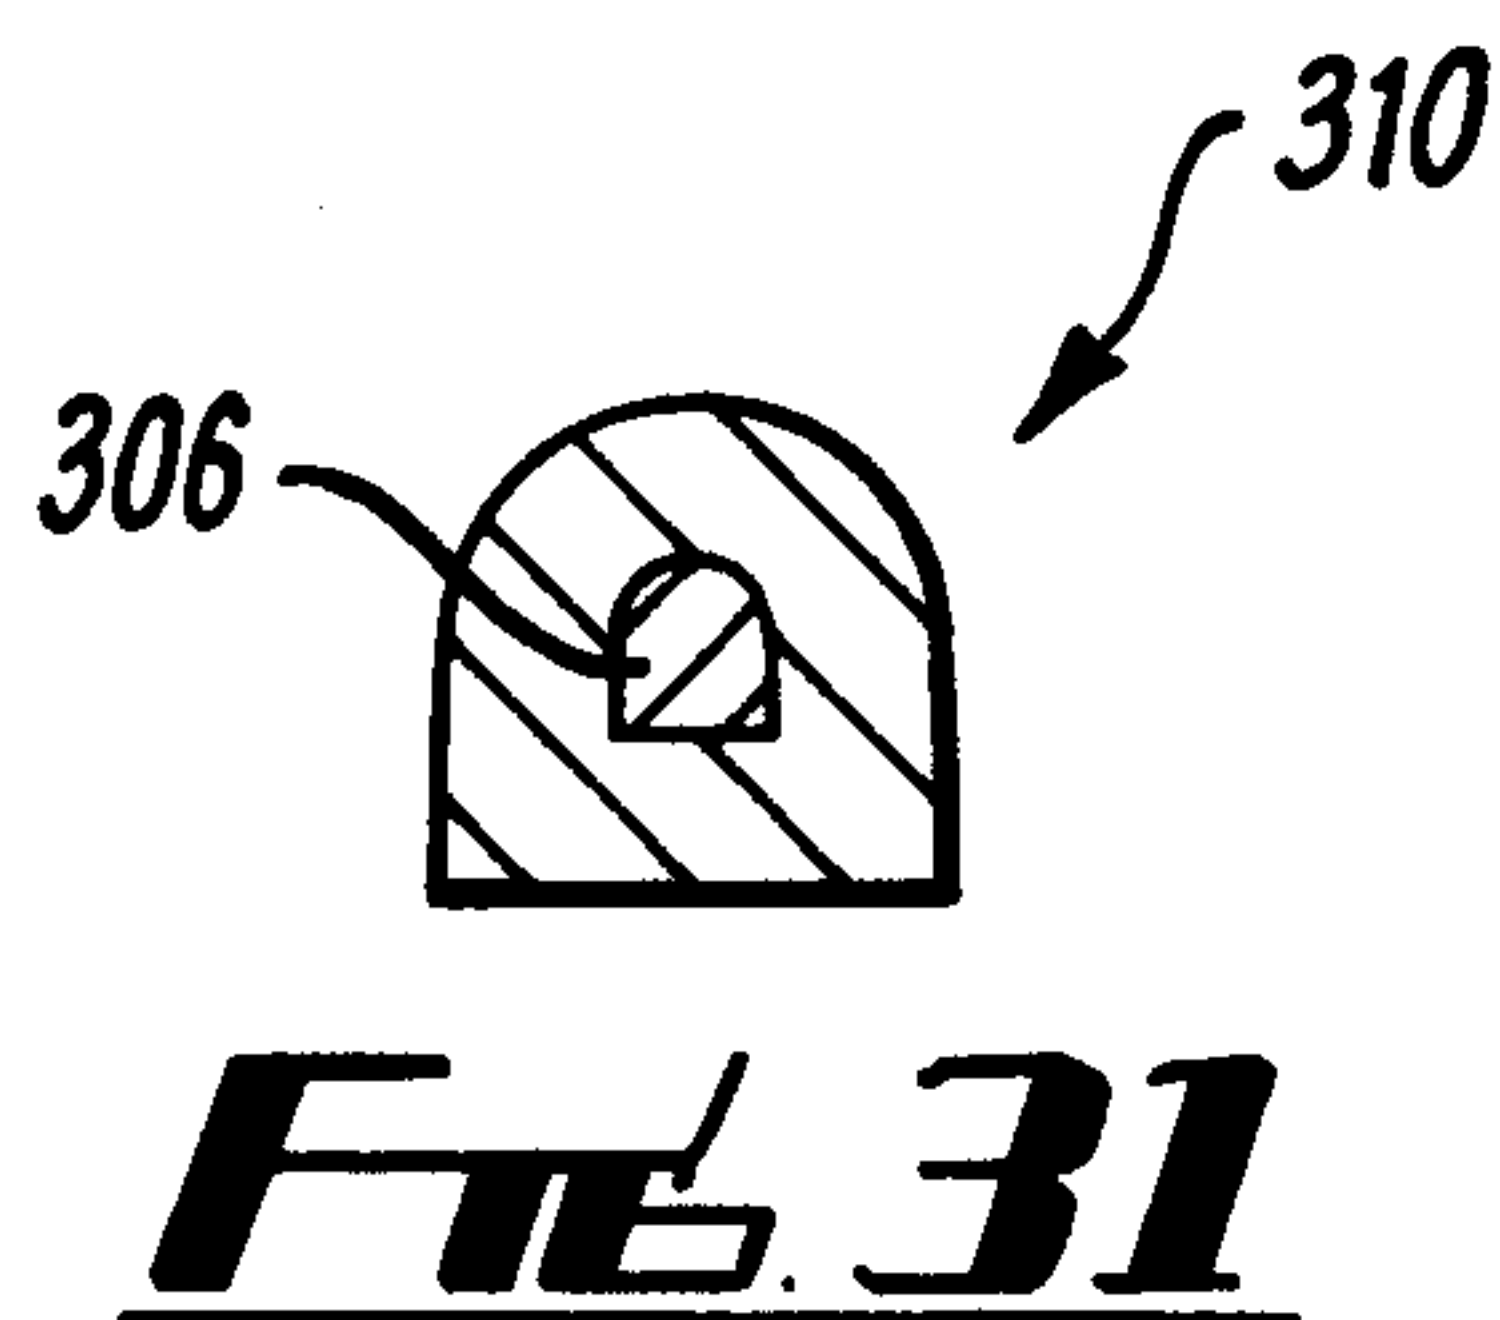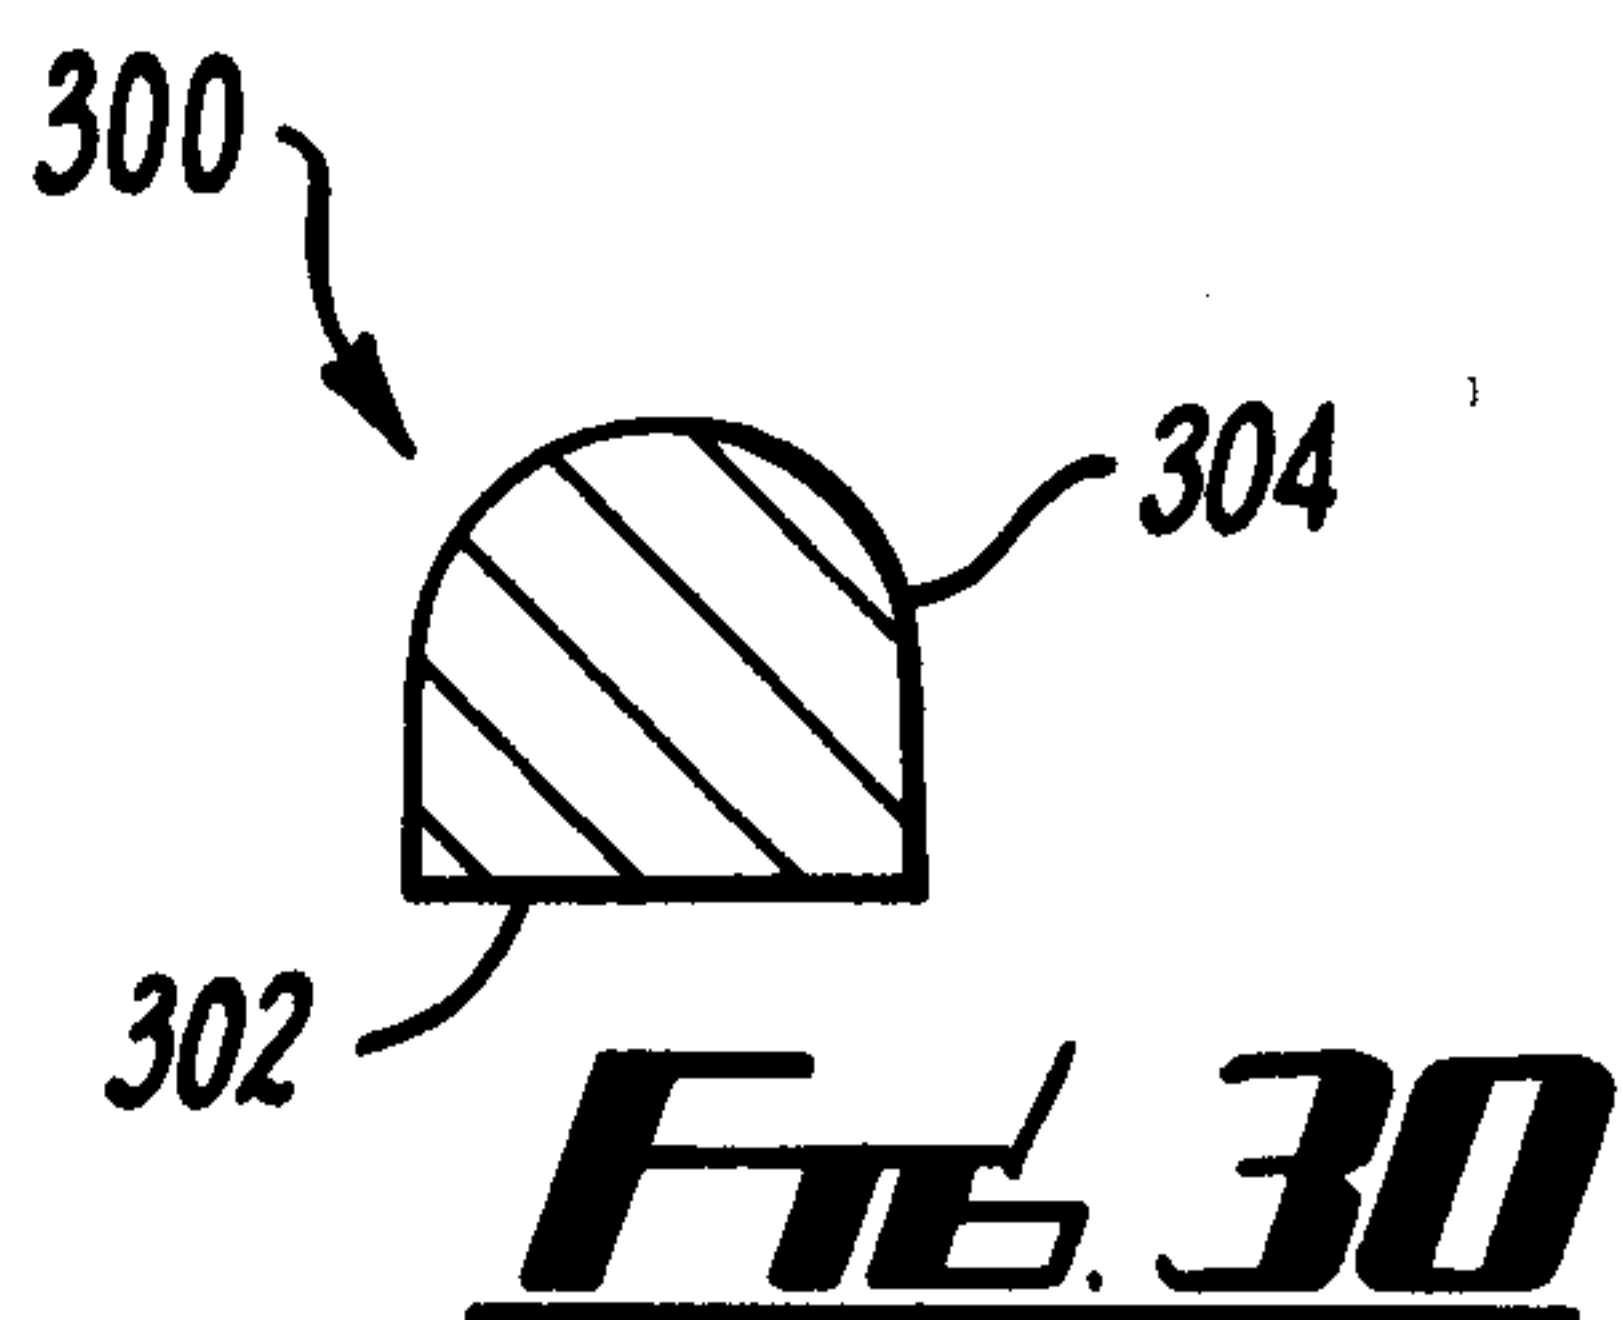

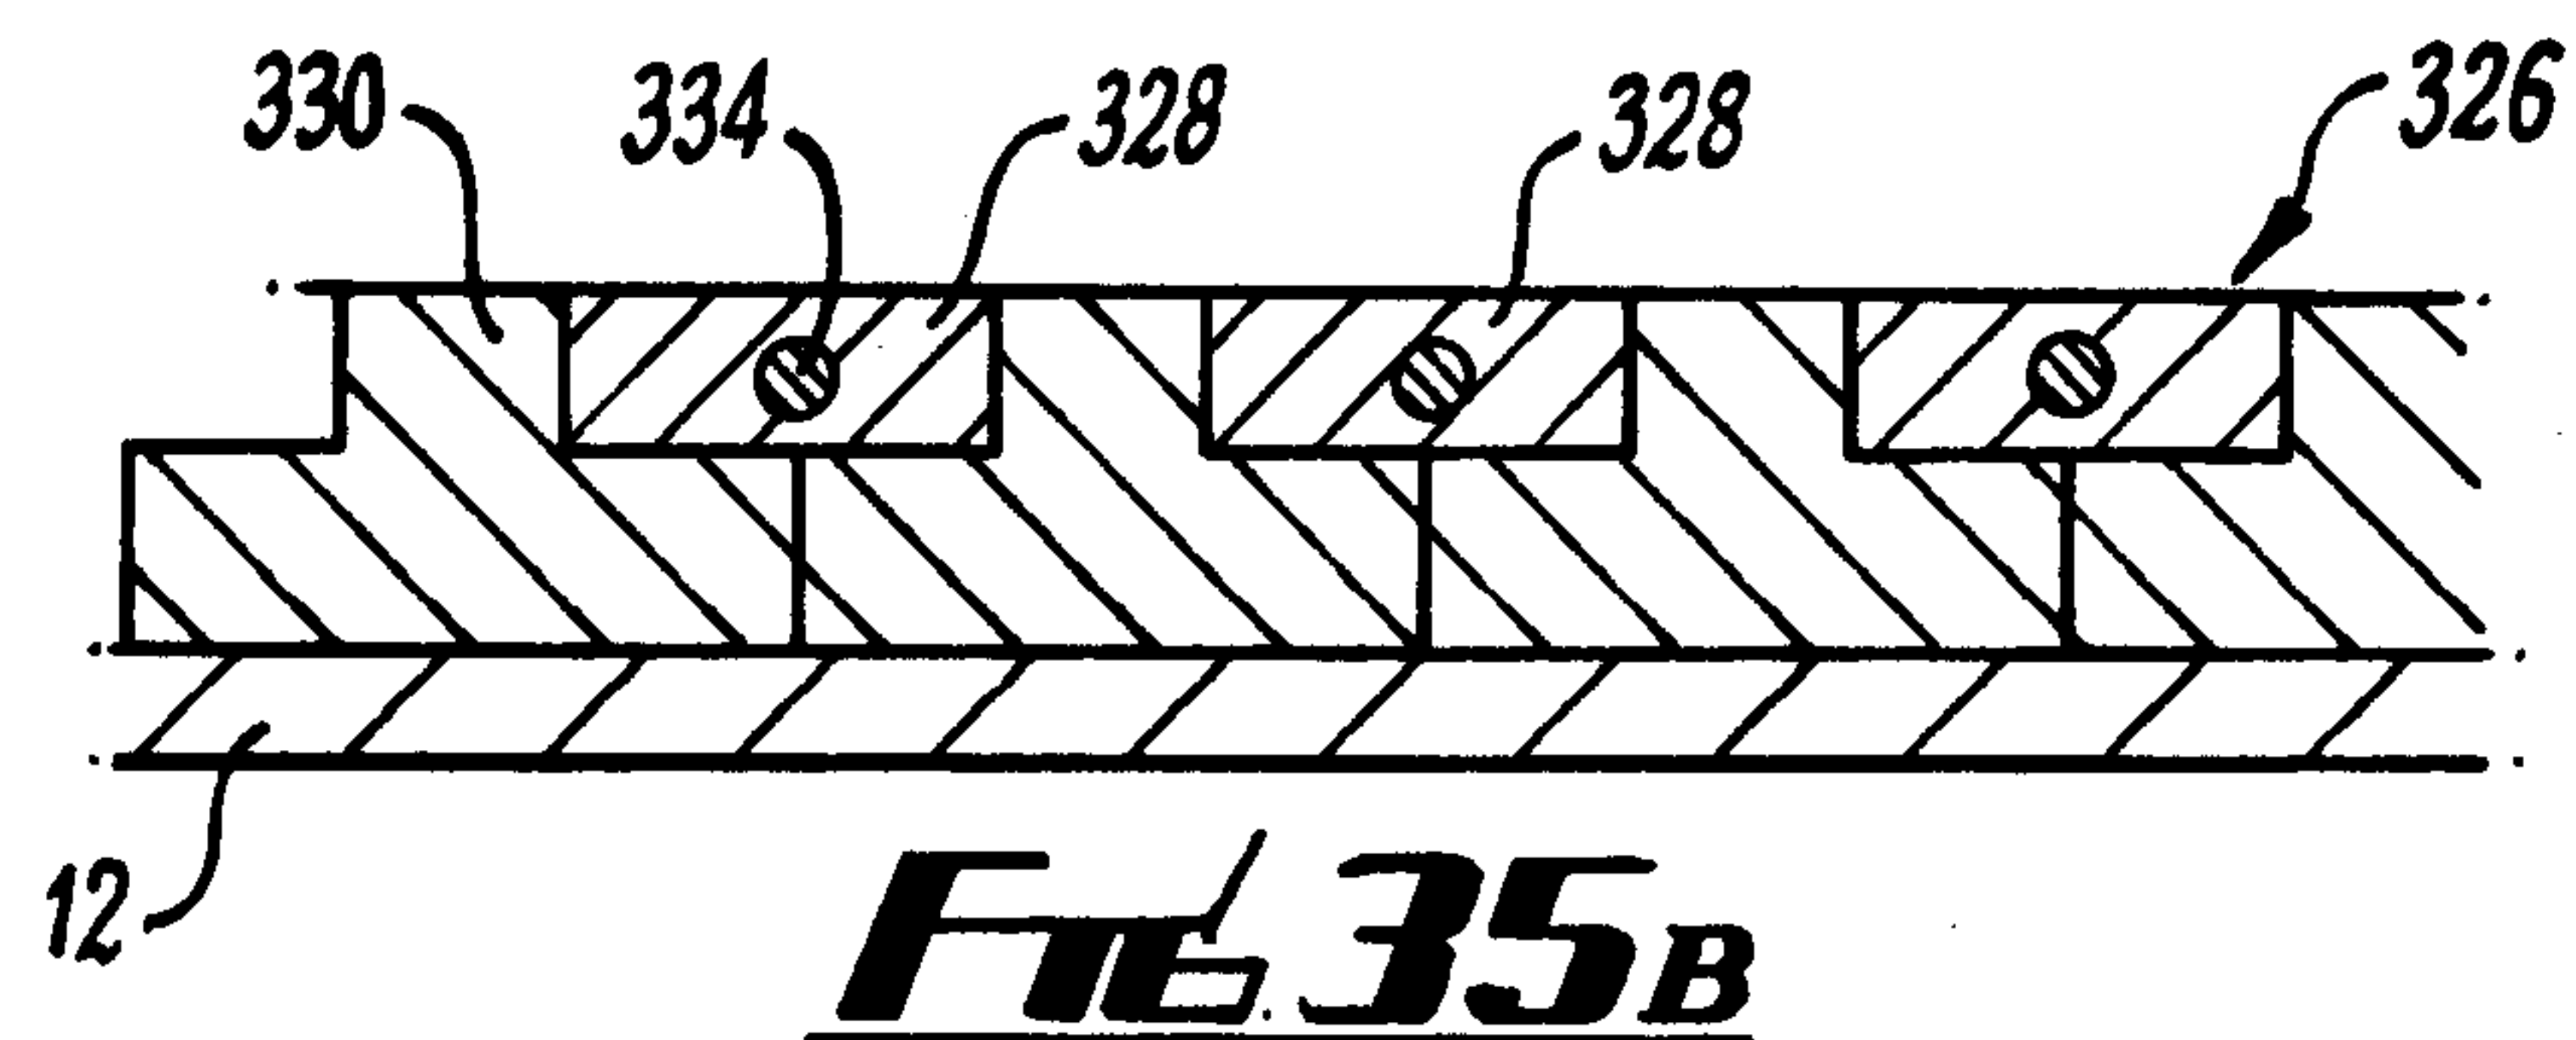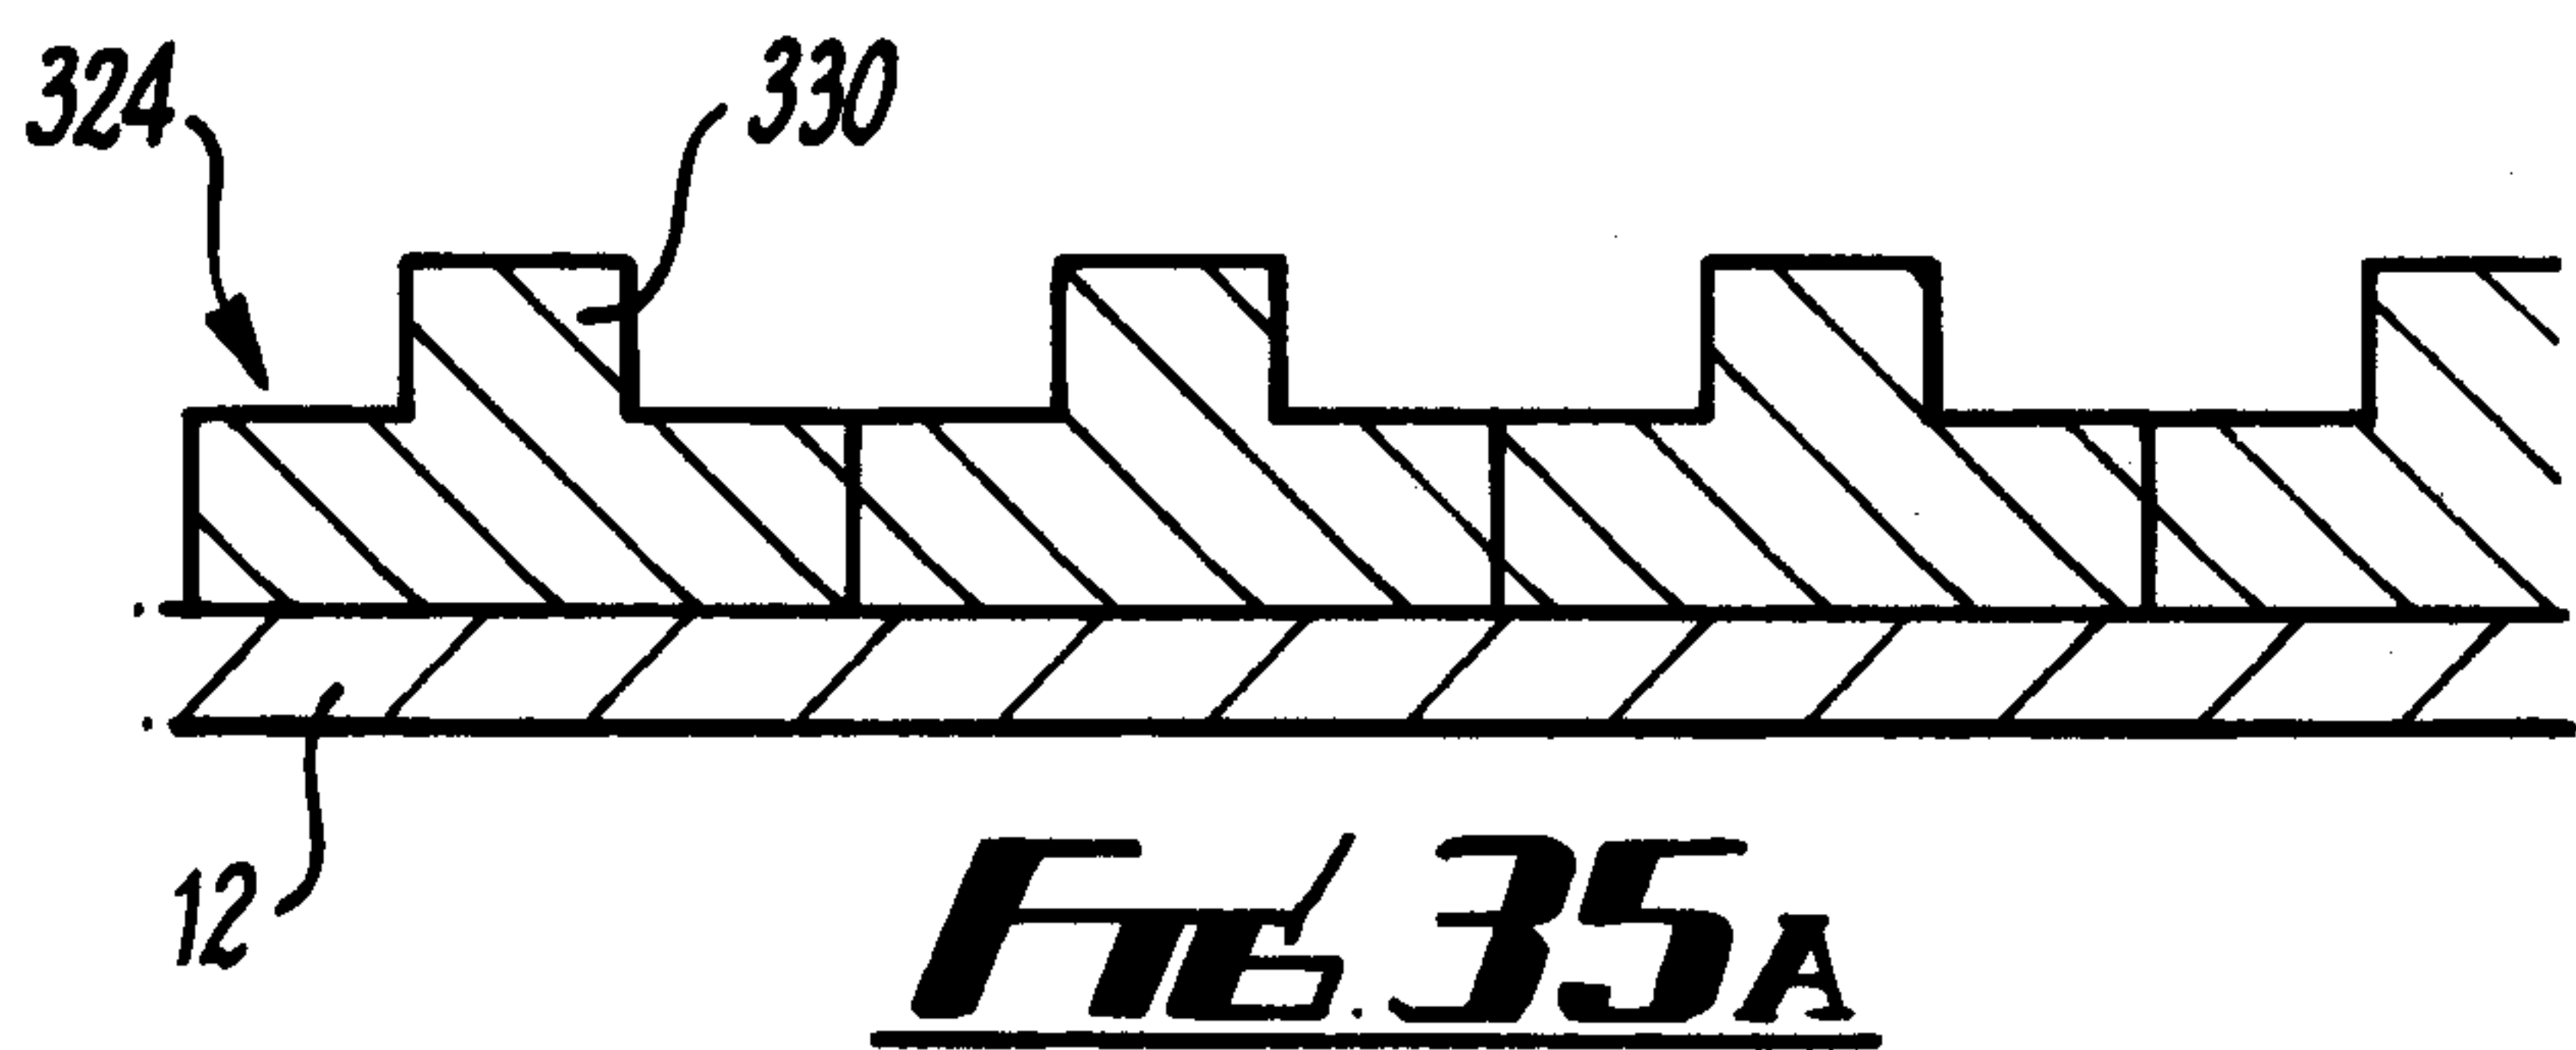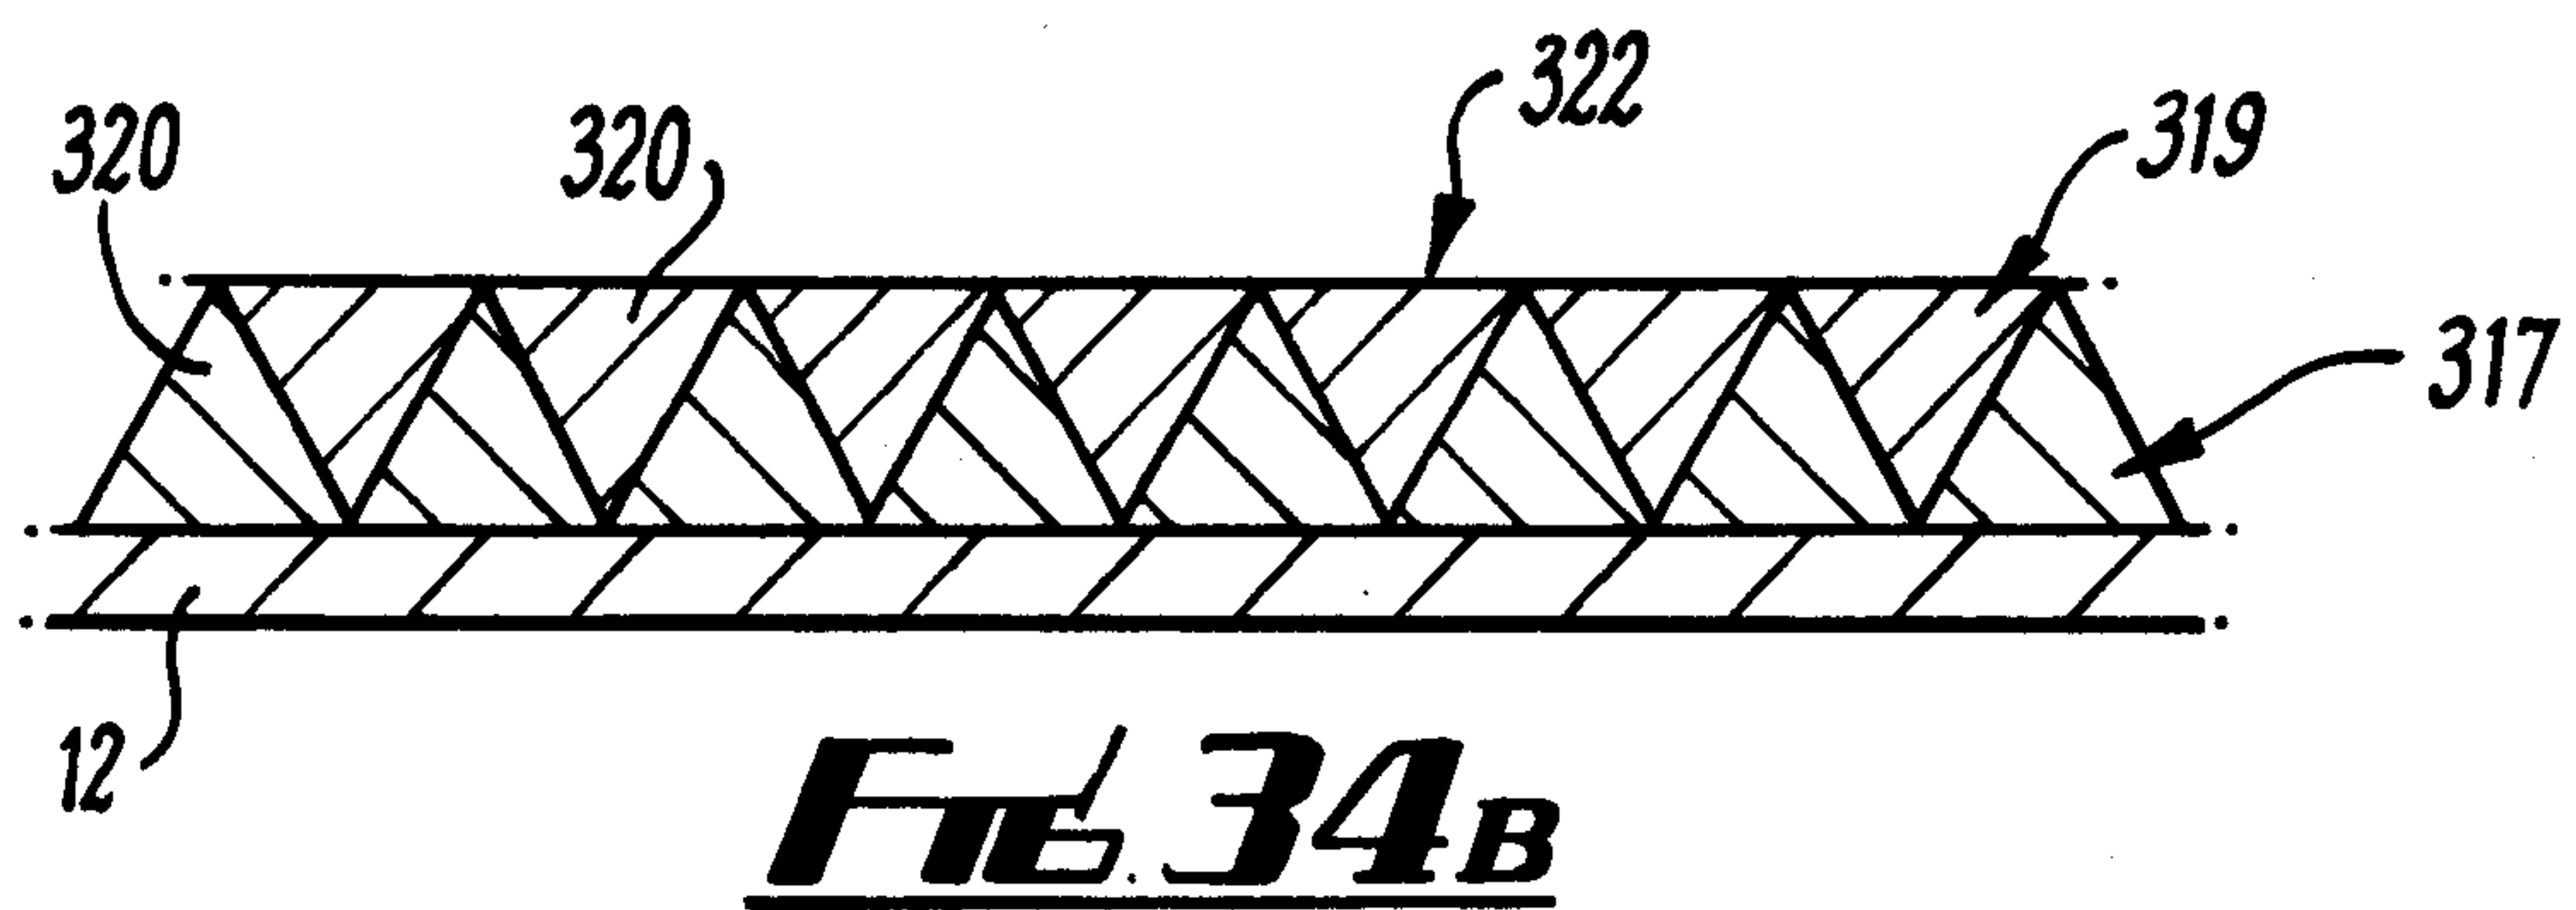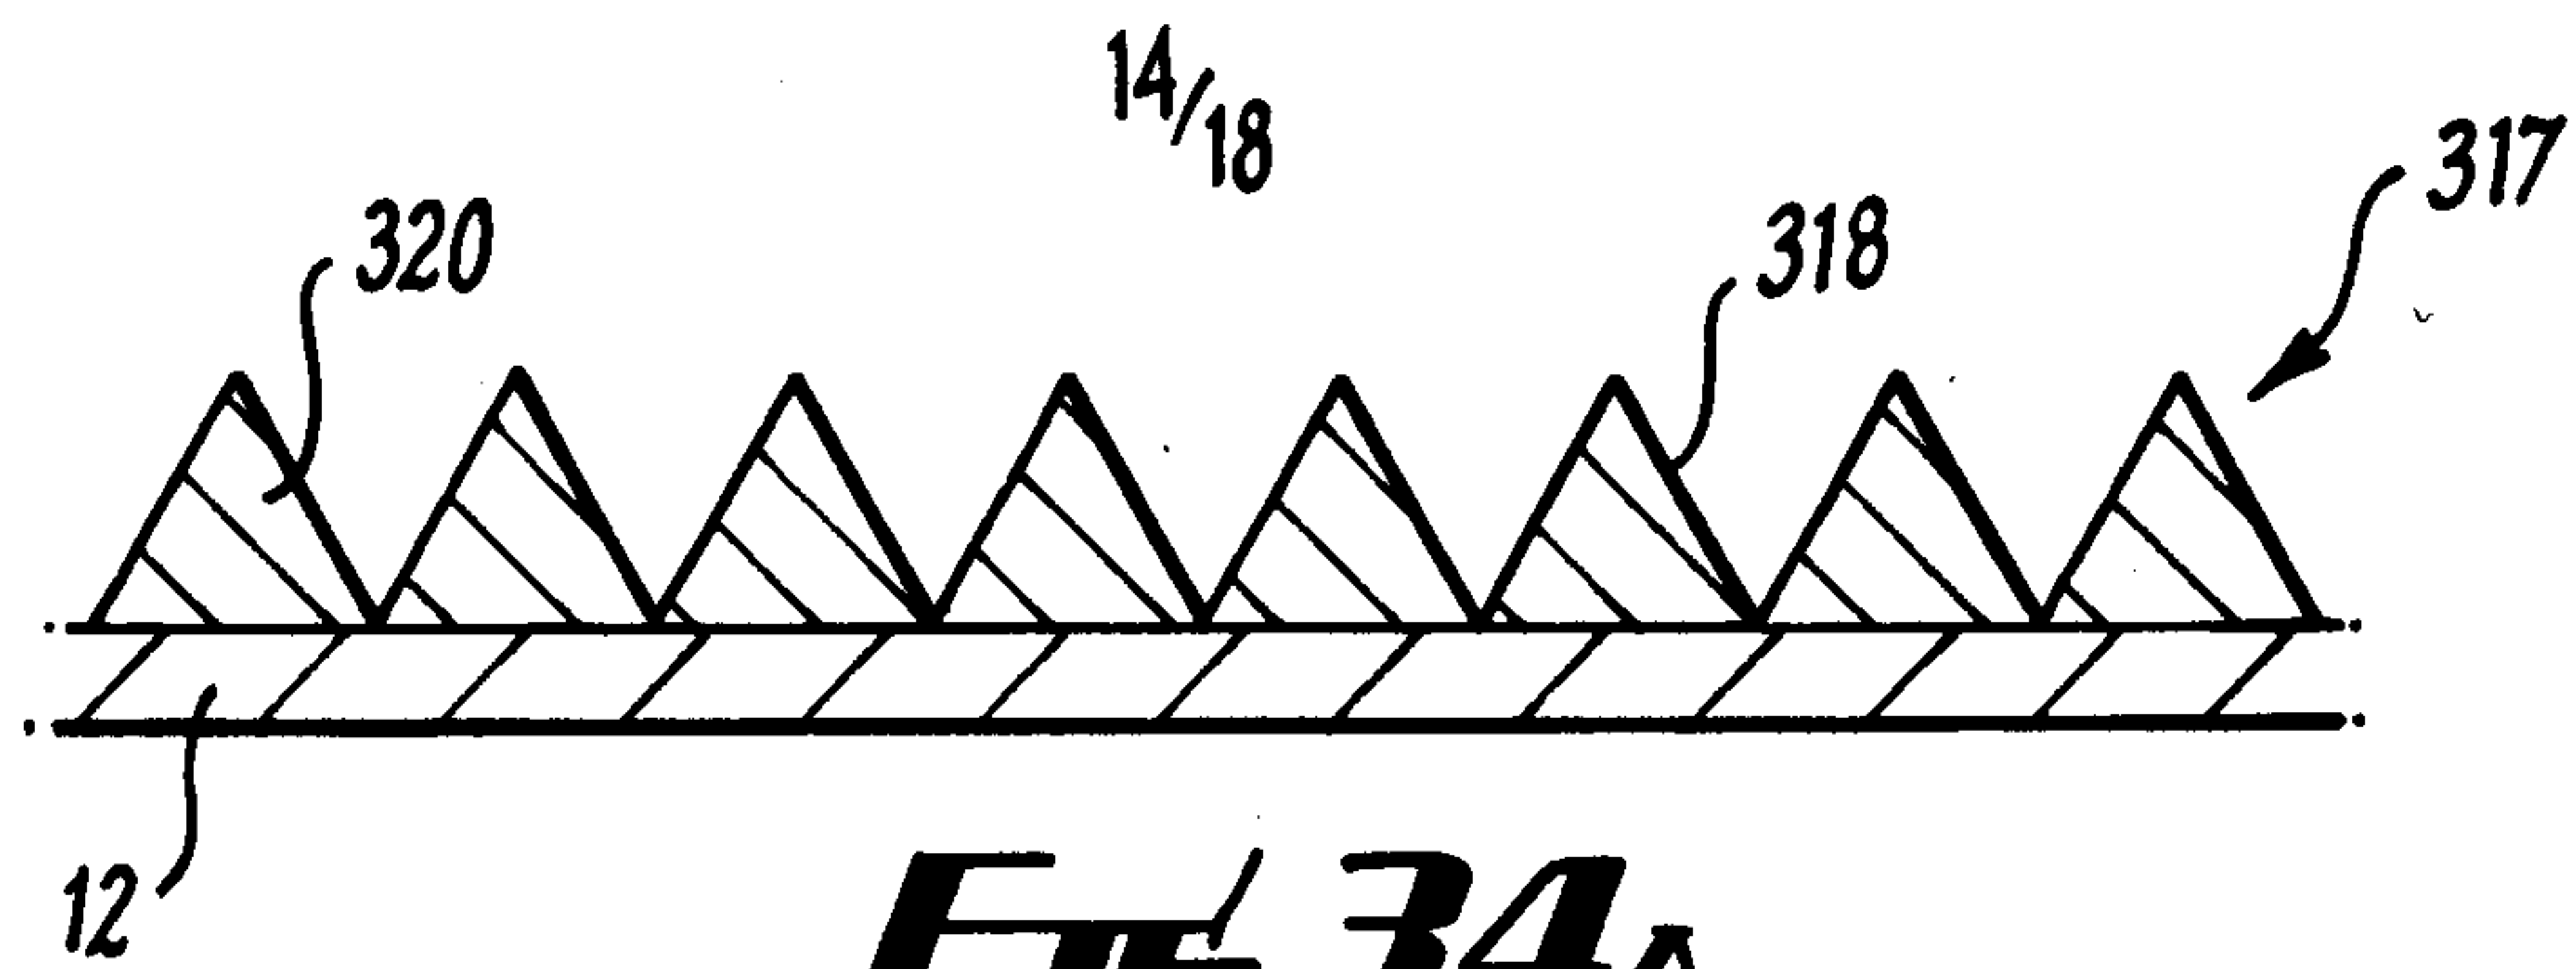

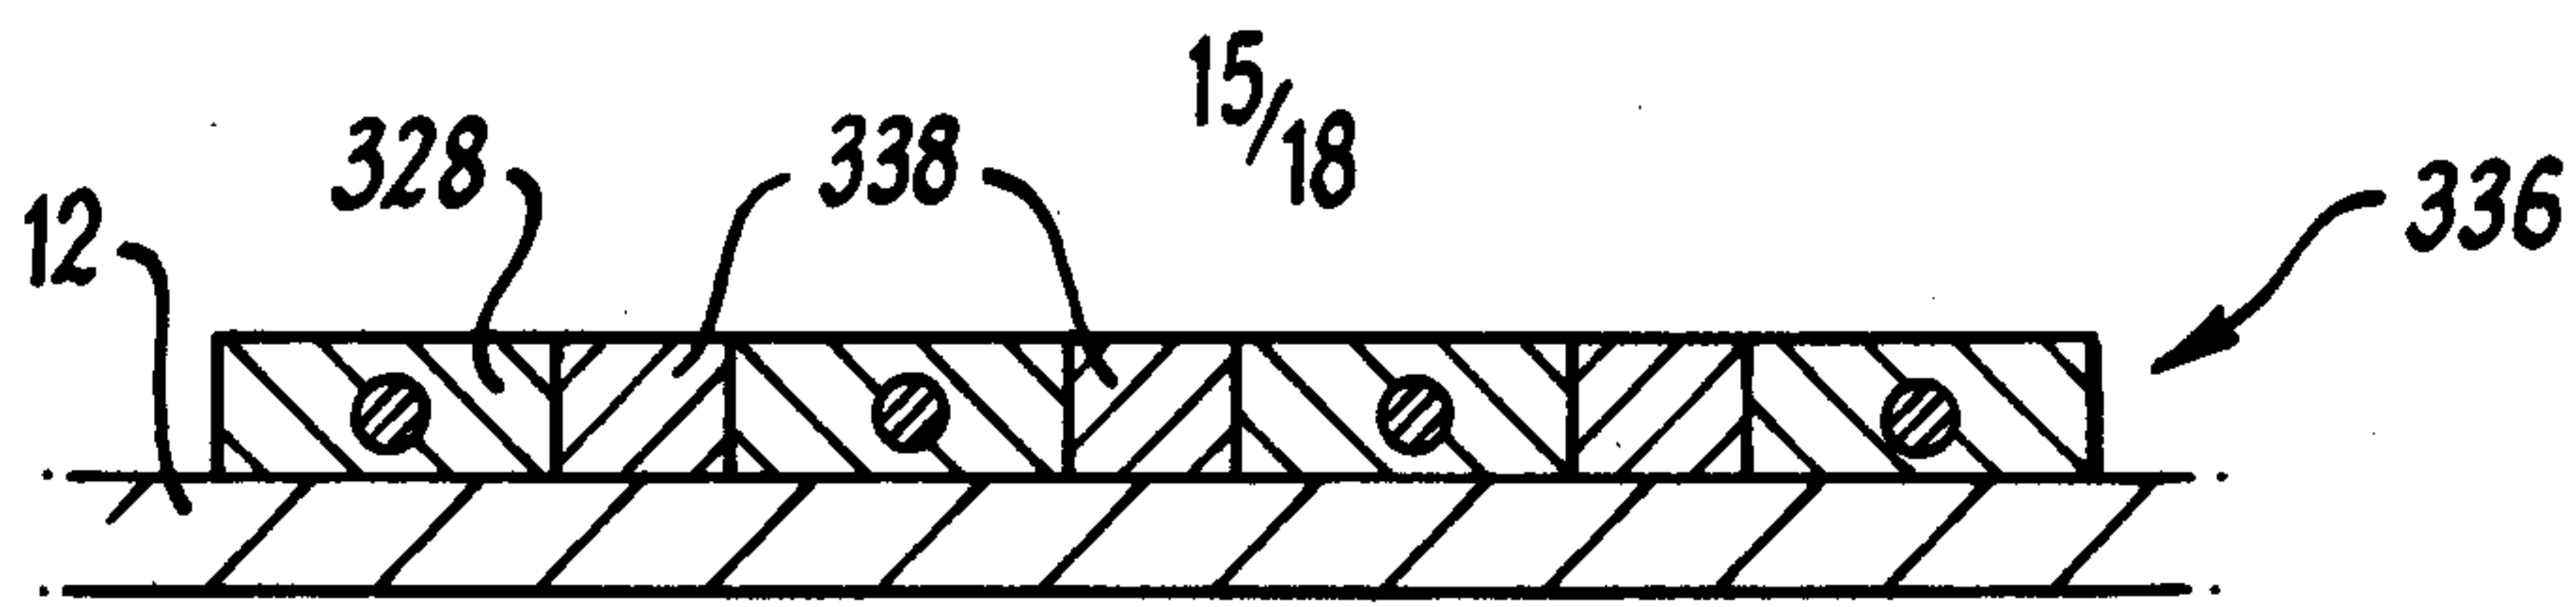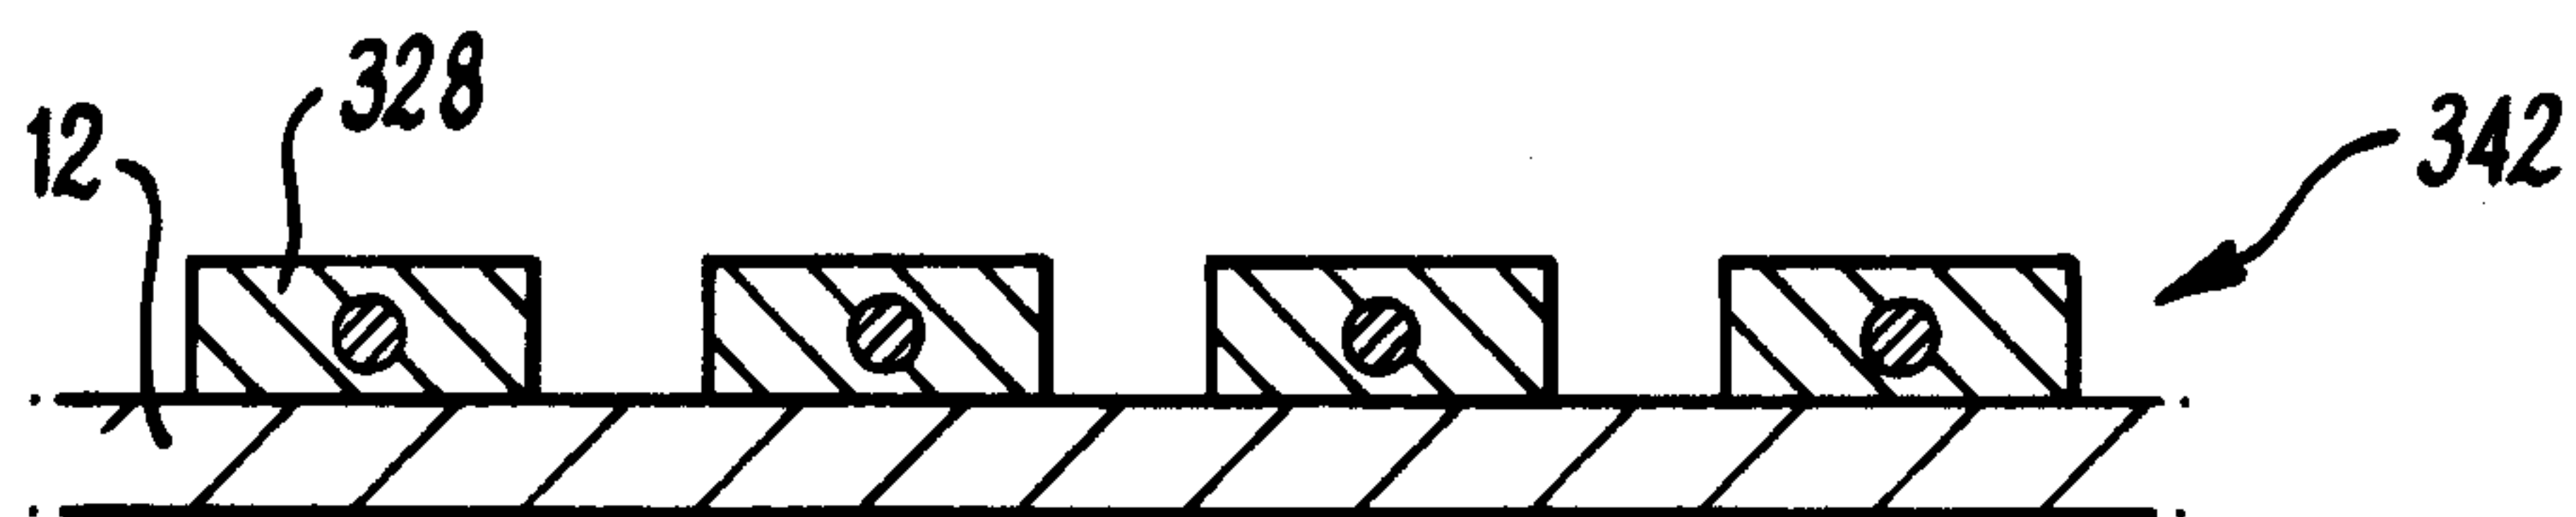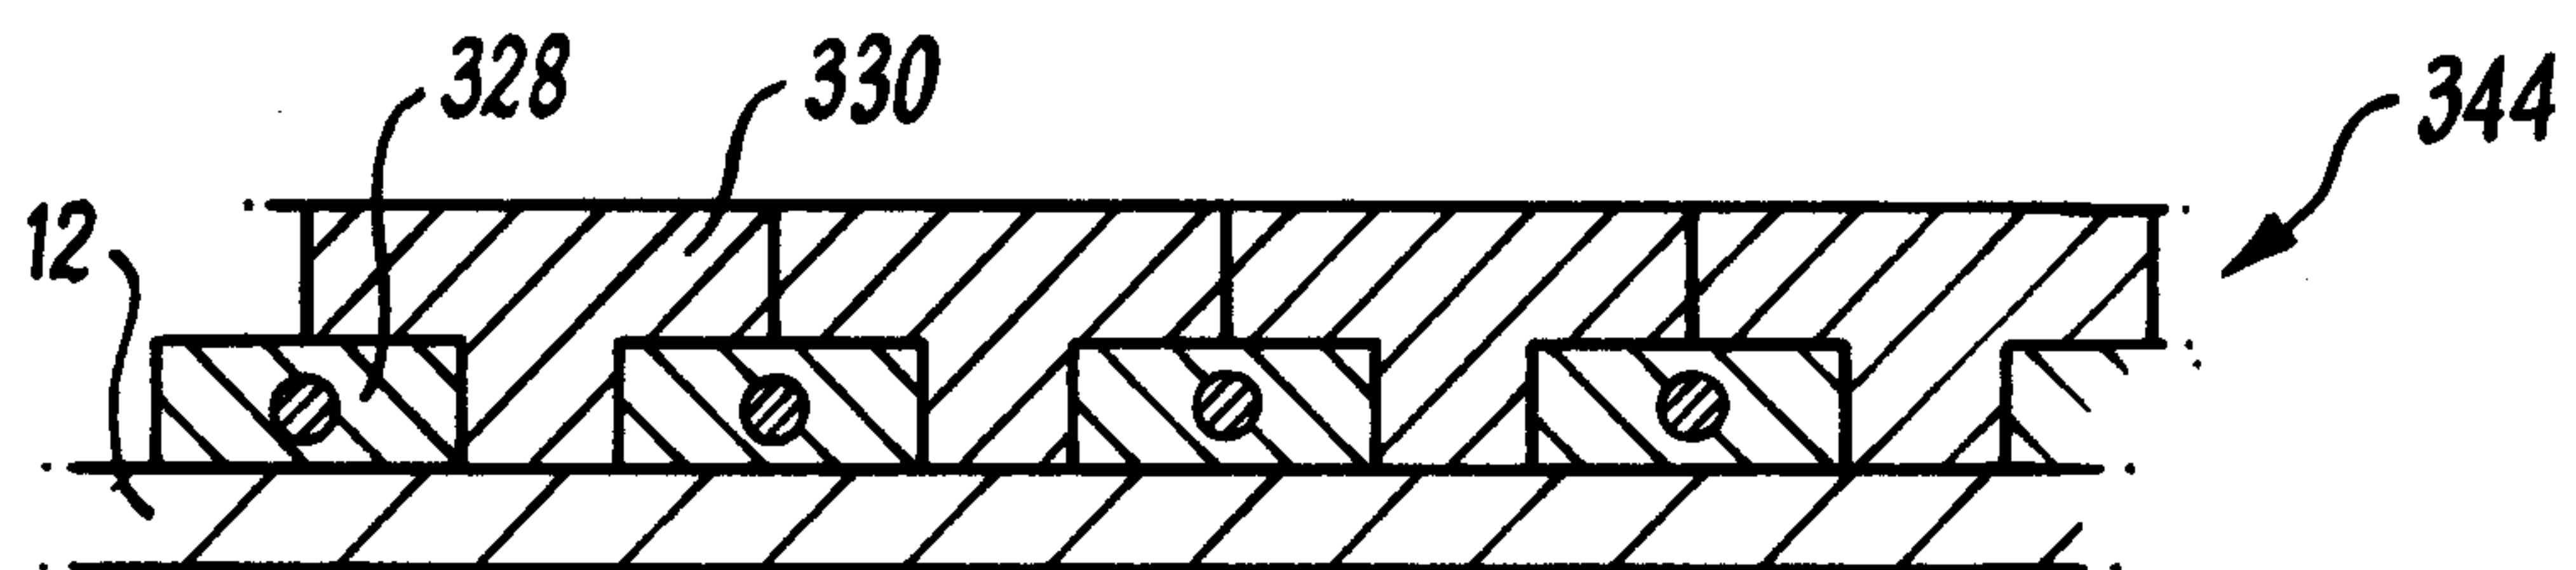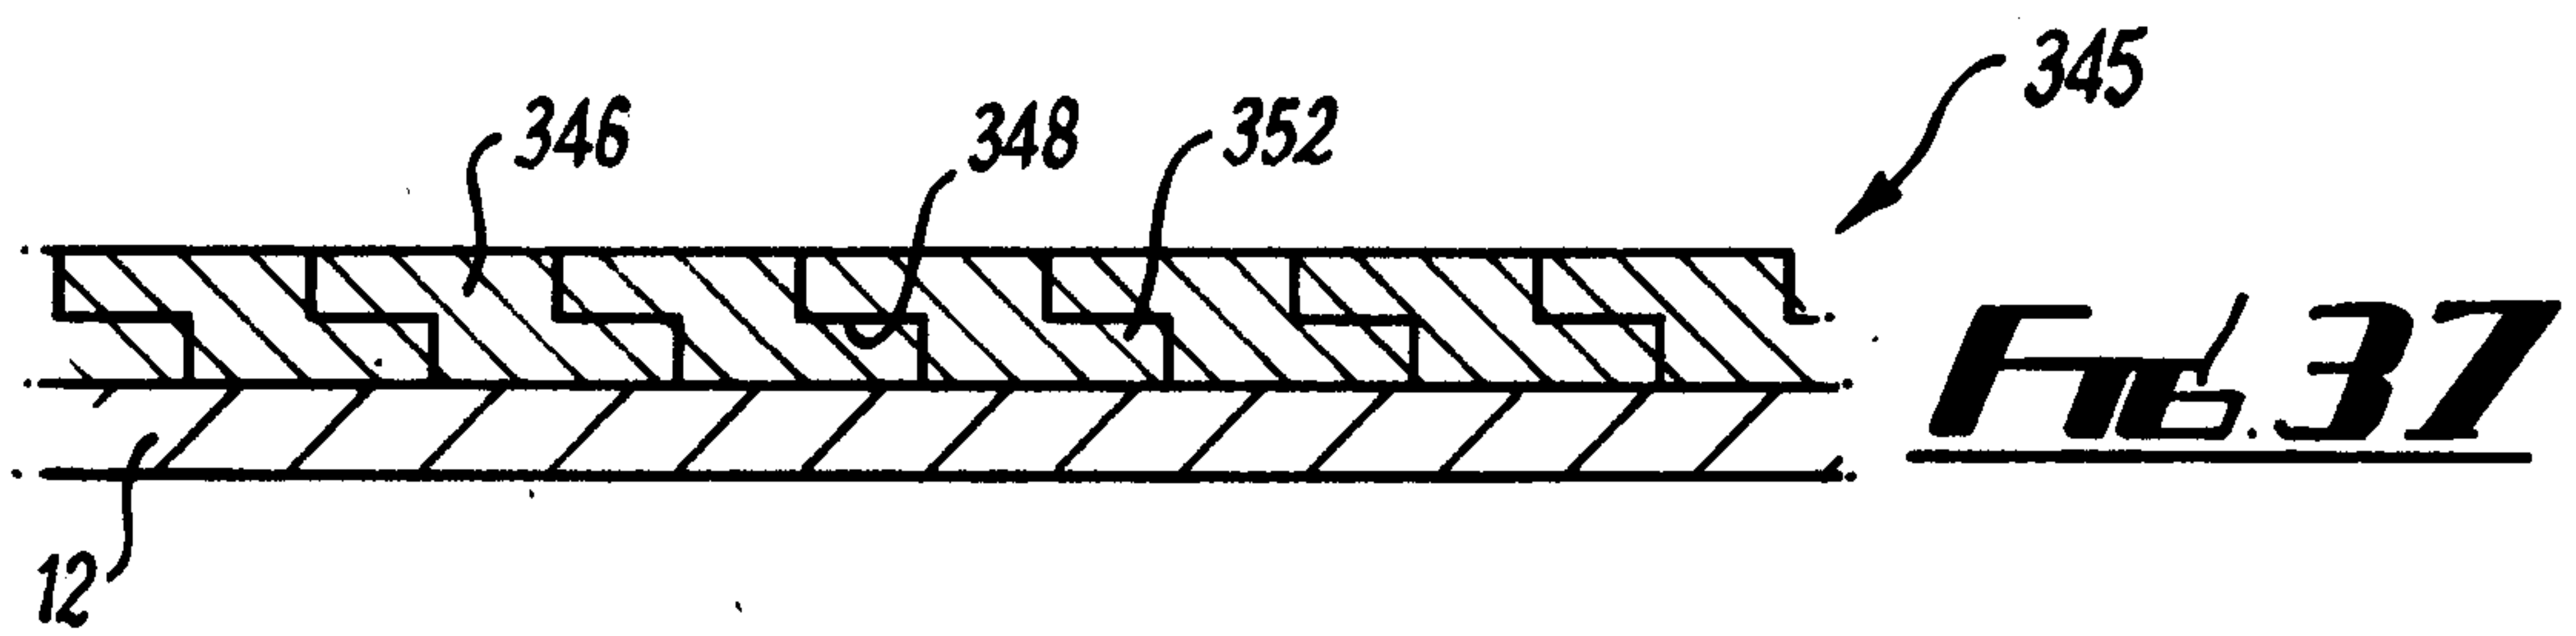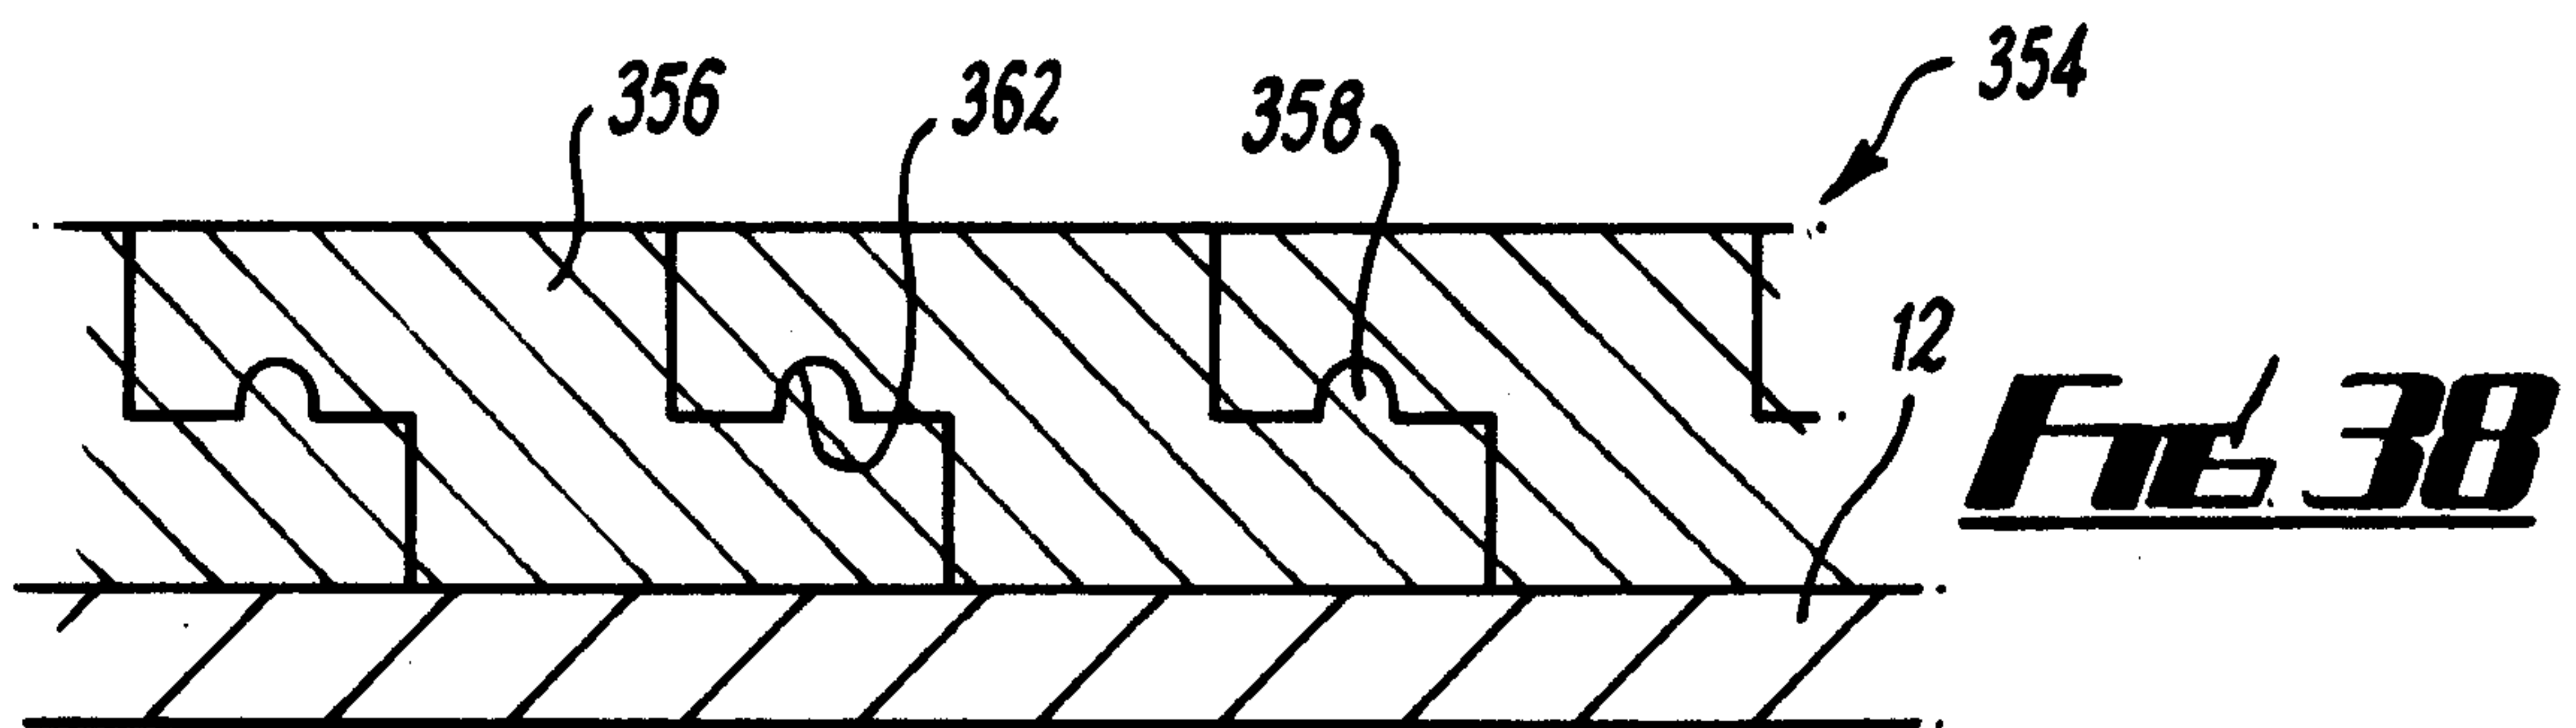**FIG. 36A****FIG. 36B****FIG. 36C****FIG. 37****FIG. 38**

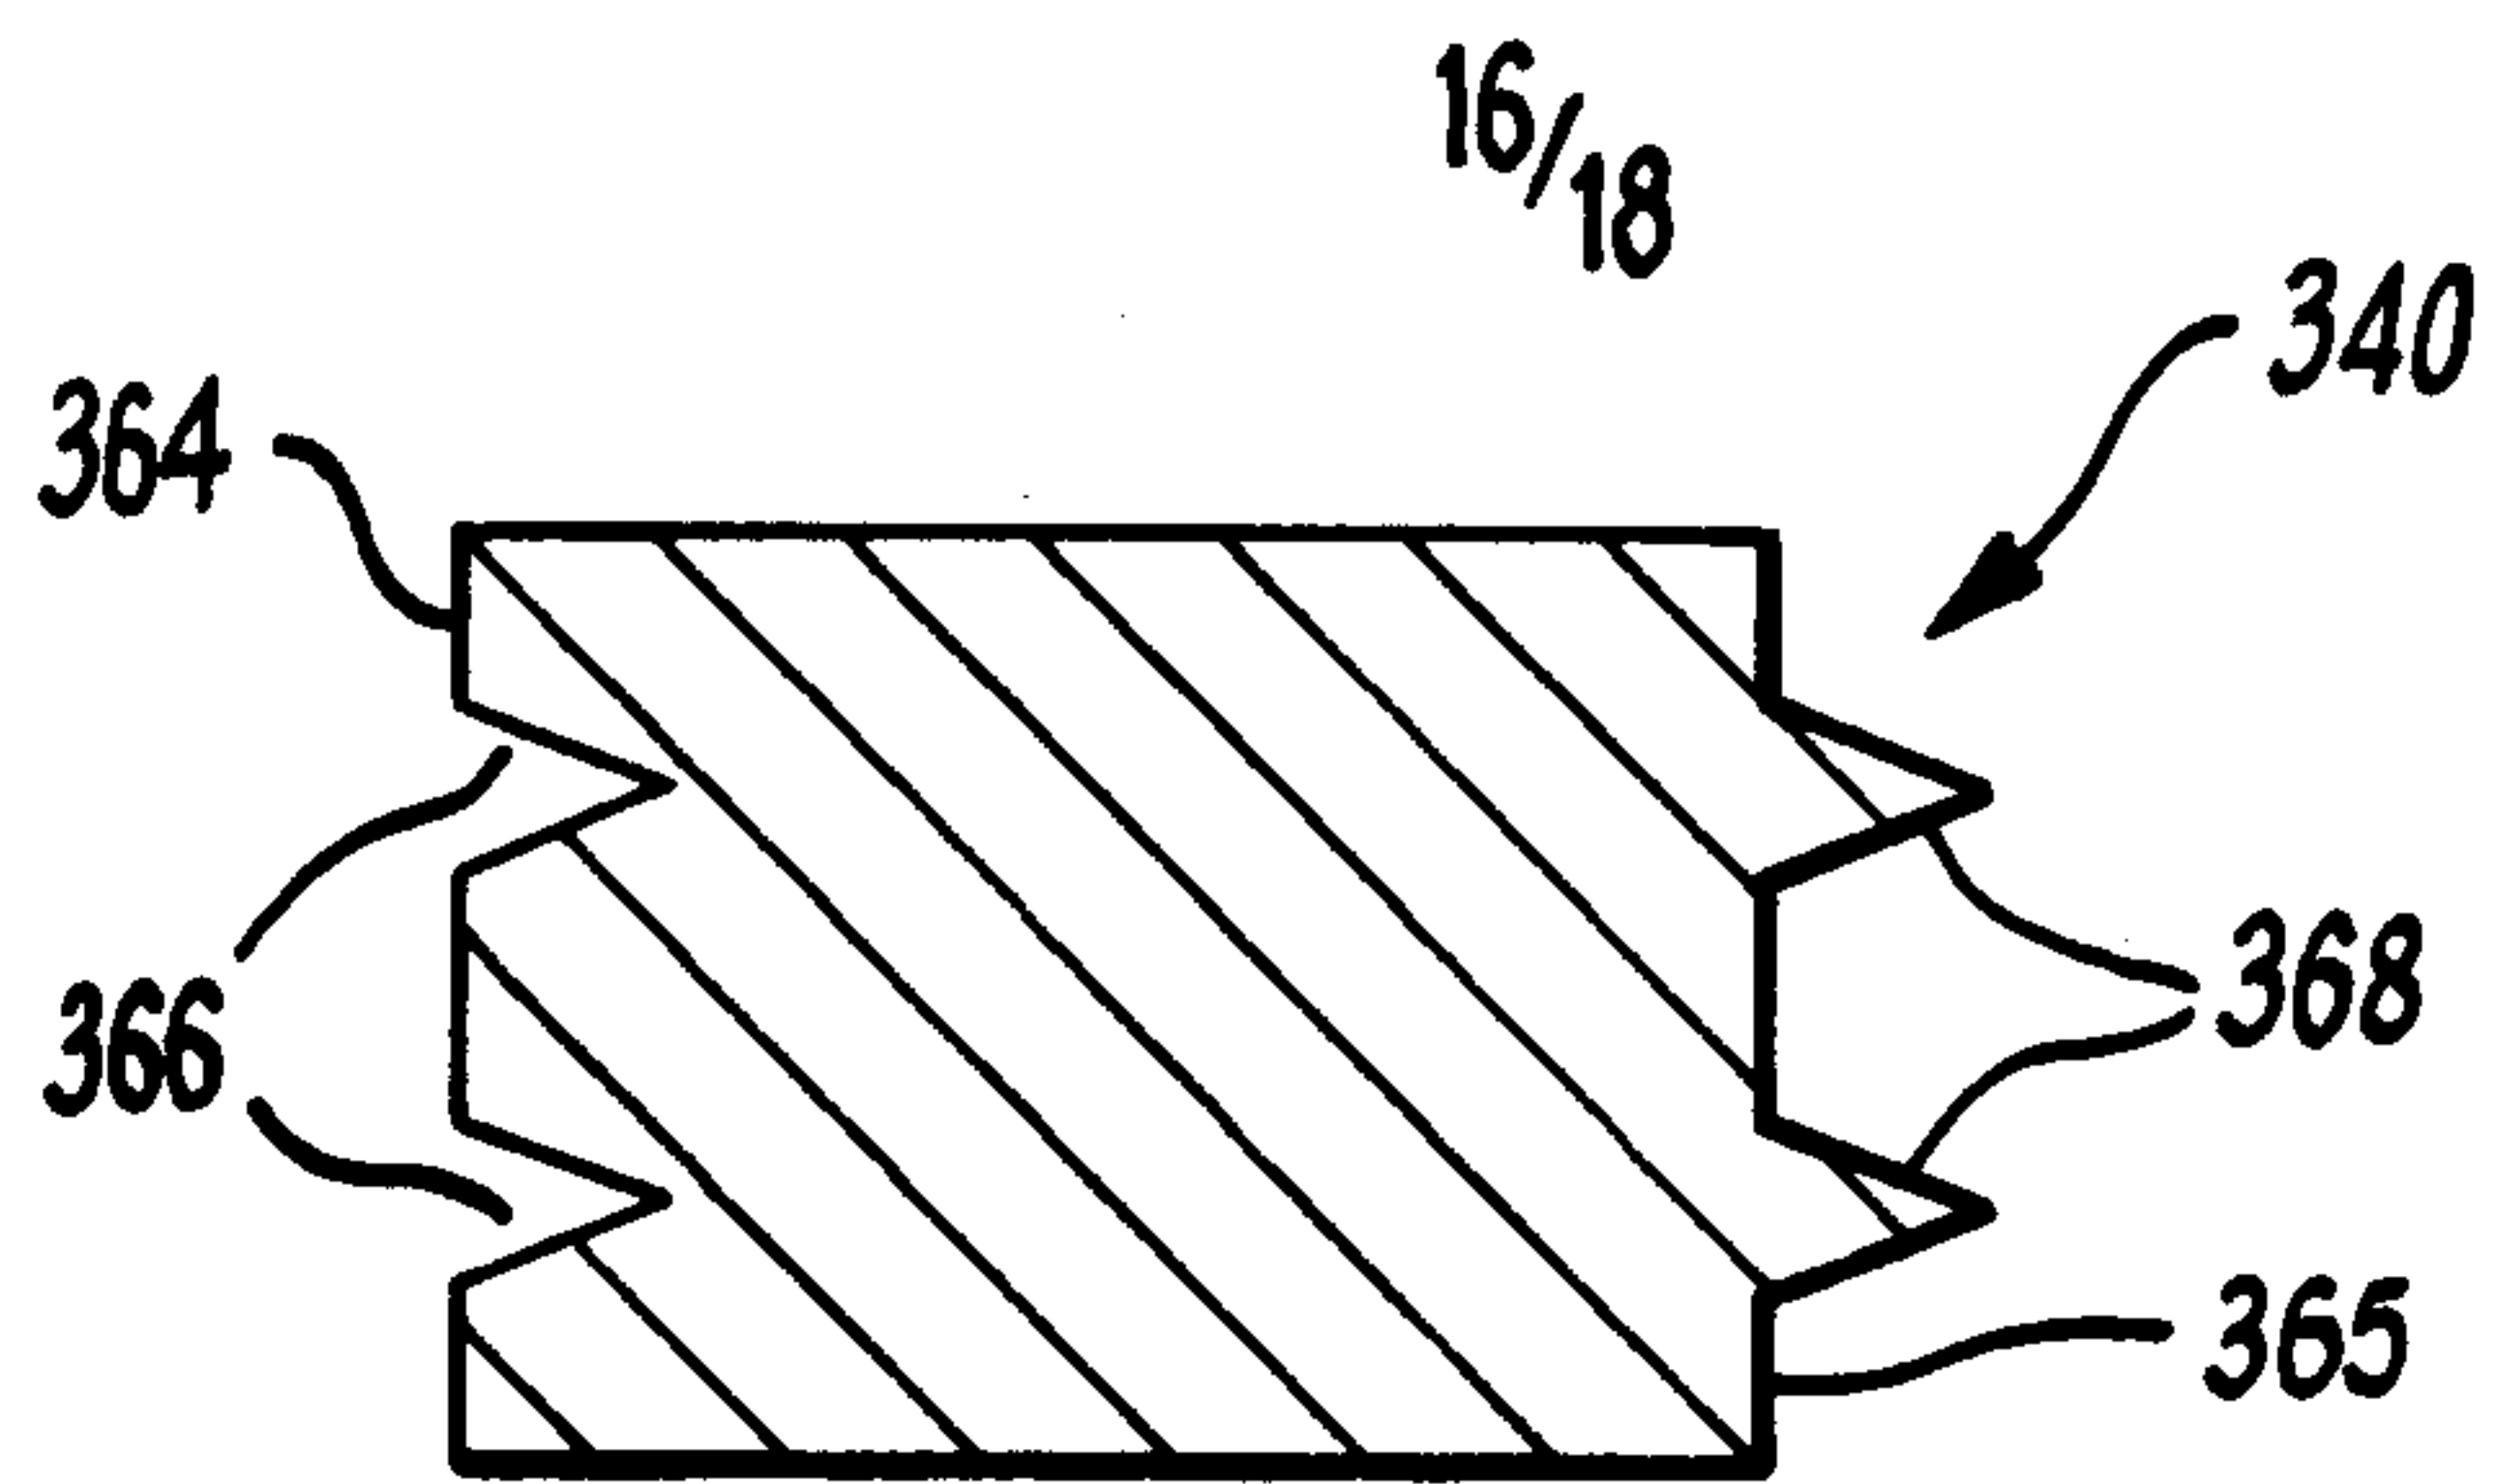


FIG. 39

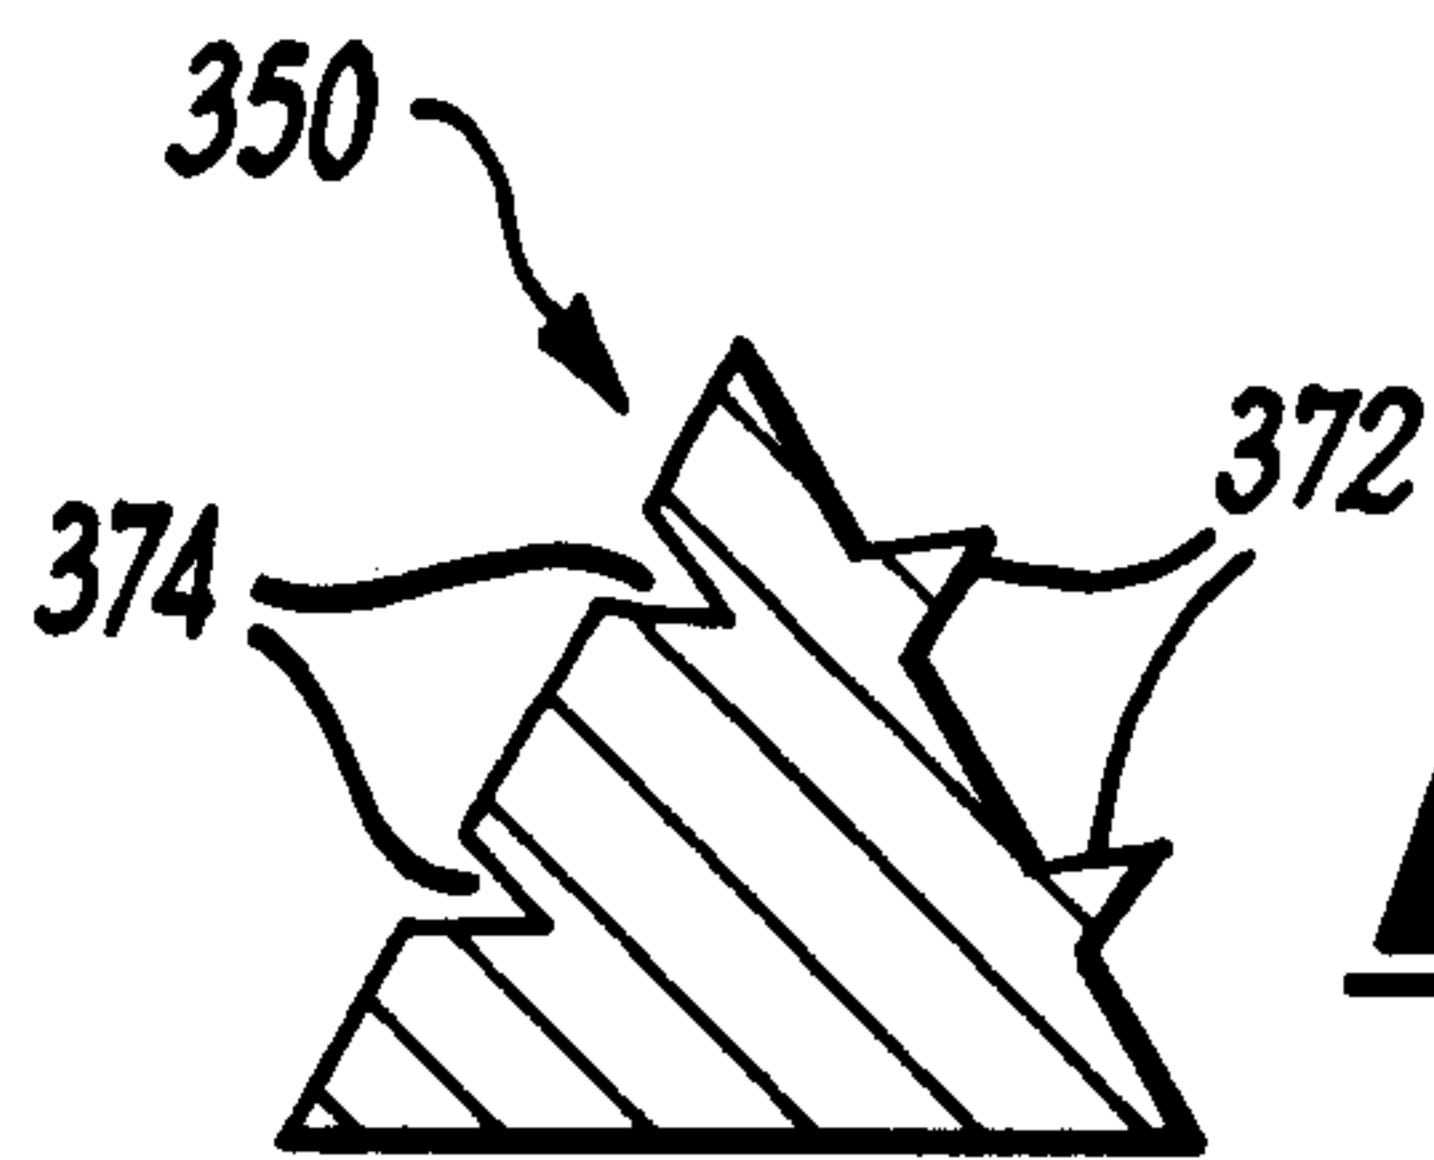


FIG. 40

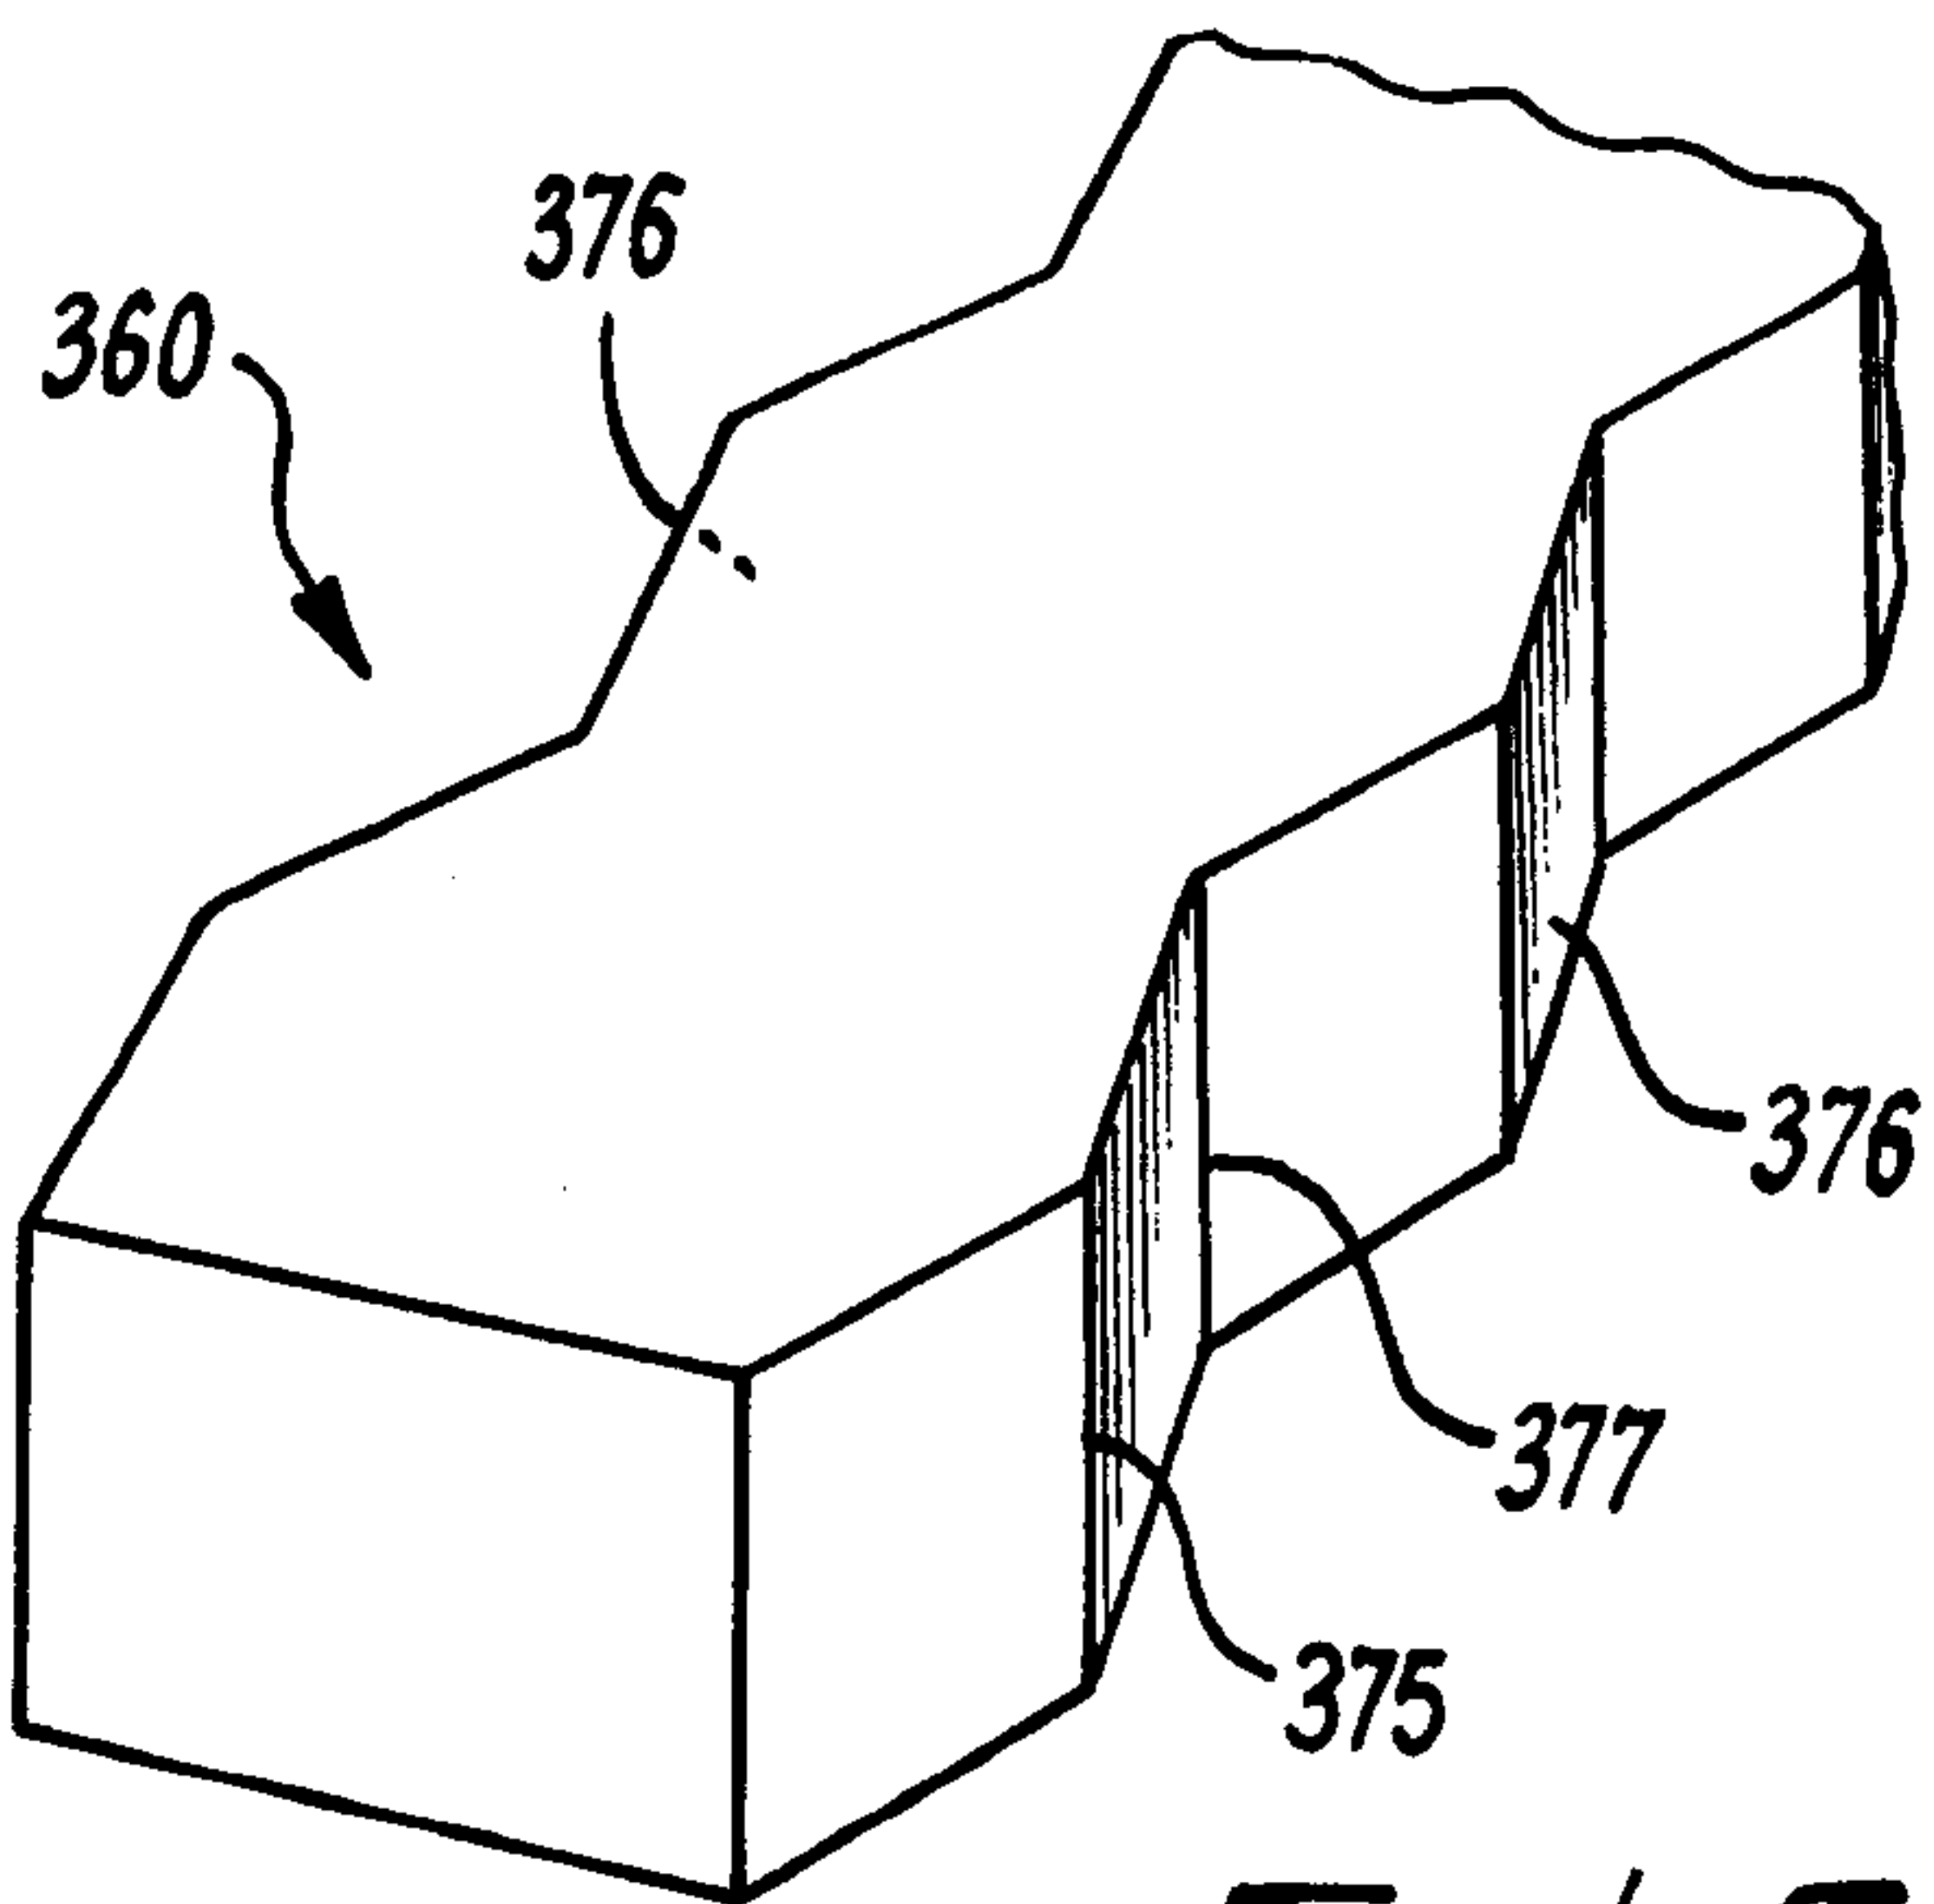


FIG. 41

