



- (51) International Patent Classification:  
*B66B 7/02* (2006.01) *B66B 9/00* (2006.01)
- (21) International Application Number:  
PCT/FI2016/050415
- (22) International Filing Date:  
10 June 2016 (10.06.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
15172524.9 17 June 2015 (17.06.2015) EP
- (71) Applicant: **KONE CORPORATION** [FI/FI]; Kartanontie 1, 00330 Helsinki (FI).
- (72) Inventor: **KOIVISTO, Ari**; c/o KONE Corporation, Kartanontie 1, 00330 Helsinki (FI).
- (74) Agent: **BERGGREN OY**; P.O. Box 16, (Eteläinen Rautatiekatu 10 A), 00101 Helsinki (FI).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report (Art. 21(3))

(54) Title: SOLUTION FOR DISPLACING AN ELEVATOR CAR

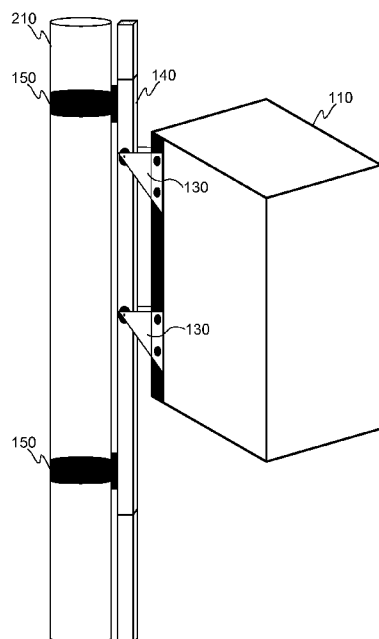


FIG. 2

(57) Abstract: The present invention relates to an apparatus (410) for displacing an elevator car (110) from its pathway. The apparatus (410) comprises a rotational vehicle (150) configured to rotate around an axis of rotation and at least one guide rail section (140; 140A, 140B, 140C, 140D) mounted with the rotational vehicle along which at least one guide rail section (140; 140A, 140B, 140C, 140D) the at least one elevator car (110) is arranged to travel, wherein the at least one guide rail section (140; 140A, 140B, 140C, 140D) is mounted substantially parallel to the axis of rotation of the rotational vehicle (150), and wherein the rotational vehicle (150) is configured to rotate 90 degrees. The invention relates also to an elevator system.

**Solution for displacing an elevator car**

## TECHNICAL FIELD

The invention concerns in general the technical field of elevator technology. Especially the invention concerns a solution for displacing an elevator car from  
5 its pathway.

## BACKGROUND

So called multicar solutions have been under interest in elevator solutions for a long time. The multicar solution refers to an implementation wherein multiple elevator cars are arranged to travel, at least temporarily, in the same pathway,  
10 such as in the same shaft. It is clear that a challenge in such an environment is that one elevator car may block a travel of another elevator car in the shaft causing delays in the service of passengers.

Some solutions are introduced to mitigate the mentioned challenge. First field of solutions is based on an idea to shape the shaft in such a manner that  
15 elevator cars may by-pass each other in at least some section of the shaft. For example, a specific by-passing area may be optimally arranged in the shaft.

Another field of solutions is based on an arrangement in which an elevator car may be horizontally displaced from the shaft. The horizontal displacement may e.g. happen between two shafts, i.e. one elevator car may be displaced from  
20 one shaft to another, or so that an elevator car is horizontally displaced from the shaft to a by-pass location in order to enable other cars to by-pass the displaced car. This kind of solution is typically based on an arrangement in which a horizontal guide rail is used for displacing the elevator car horizontally. The elevator car is brought in one way or another so that it is fastened to the  
25 horizontal guide rail and the elevator car is displaced away from the shaft along the horizontal shaft. In some recent implementation the horizontal movement of the elevator car is enabled so that a section of a vertical guide rail is arranged to rotate 90 degrees, as well as a linear motor of the elevator car providing the power for moving the car along the guide rail, in order to  
30 arrange a horizontal path for the displacement.

Even though the known solutions as described are operational as such the problem is still an efficiency of the described solutions. Especially, the

- solutions utilizing the horizontal guide rails has a drawback that arranging the elevator car to the horizontal path requires that the elevator car stands still and waits until the guide rail is rotated in a horizontal position and/or until the elevator car is fastened to the horizontal guide rail if the arrangement e.g.
- 5 comprises fixed horizontal rails. All in all, the mentioned drawbacks degrade the efficiency of the multicar solutions. Hence, there is need to mitigate the drawbacks.

## SUMMARY

- 10 An objective of the invention is to present an apparatus and an elevator system for displacing an elevator car from its pathway. Another objective of the invention is that the apparatus and the elevator system for displacing the elevator car from its pathway improve an efficiency of an elevator solution.

The objectives of the invention are reached by an apparatus and an elevator system as defined by the respective independent claims.

- 15 According to a first aspect, an apparatus for displacing an elevator car from its pathway is provided wherein the apparatus comprising: a rotational vehicle configured to rotate around an axis of rotation; and at least one guide rail section mounted with the rotational vehicle along which at least one guide rail section the at least one elevator car is arranged to travel, wherein the at least
- 20 one guide rail section is mounted substantially parallel to the axis of rotation of the rotational vehicle, and wherein the rotational vehicle is configured to rotate 90 degrees.

- The apparatus may comprise at least two guide rail sections, wherein each two guide rail sections are configured to be mounted substantially parallel to each other and in 90 degrees with respect to each other from the axis of rotation
- 25 point of view.

The rotational vehicle may comprise two ring-type elements arranged to rotate with respect to each other. An inner ring-type element may be fixedly mounted and the interface between the ring-type elements is a bearing solution.

- 30 According to a second aspect, an elevator system is provided wherein the elevator system comprising: at least one elevator car; and at least one apparatus which comprises a rotational vehicle configured to rotate around an

axis of rotation and at least one guide rail section mounted with the rotational vehicle along which at least one guide rail section the at least one elevator car is arranged to travel, wherein the at least one guide rail section is mounted substantially parallel to the axis of rotation of the rotational vehicle, and  
5 wherein the rotational vehicle is configured to rotate 90 degrees.

The at least one apparatus in the system may comprise at least two guide rail sections, wherein each two guide rail sections are configured to be mounted substantially parallel to each other and in 90 degrees with respect to each other from the axis of rotation point of view.

10 The at least one elevator car may be arranged to be movably mounted to the guide rail section from an edge of the elevator car being parallel to the guide rail section in order to enable the travel of the at least one elevator car along the guide rail section in question.

The elevator car may be mounted to the guide rail section by means of at least  
15 one roller guide.

The at least one elevator car may also comprise door openings on the sides connected by the edge from which the elevator car is arranged to be movably mounted to the guide rail section.

The elevator system may comprise at least two apparatuses being coupled to  
20 each other. The coupling of the at least two apparatuses may be arranged with one of the following: magnetic locking, mechanical locking. The apparatuses may be configured to rotate synchronously.

The exemplary embodiments of the invention presented in this patent application are not to be interpreted to pose limitations to the applicability of  
25 the appended claims. The verb "to comprise" is used in this patent application as an open limitation that does not exclude the existence of also un-recited features. The features recited in depending claims are mutually freely combinable unless otherwise explicitly stated.

The novel features which are considered as characteristic of the invention are  
30 set forth in particular in the appended claims. The invention itself, however, both as to its construction and its method of operation, together with additional objectives and advantages thereof, will be best understood from the following

description of specific embodiments when read in connection with the accompanying drawings.

#### BRIEF DESCRIPTION OF FIGURES

5 The embodiments of the invention are illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings.

Figure 1 illustrates schematically an example of the present invention from one perspective.

Figure 2 illustrates schematically an example of the present invention from another perspective.

10 Figures 3A-3D illustrate schematically examples of an apparatus according to the present invention.

Figure 4 illustrates an example of an apparatus according to the present invention.

15 Figure 5 illustrates an arrangement in which multiple apparatuses according to an example of the invention are applied to.

Figure 6 illustrates an example of a further implementation of the present invention.

Figures 7A and 7B illustrate schematically an example of a rotational vehicle according to the present invention.

#### 20 DESCRIPTION OF SOME EMBODIMENTS

The present invention is at least partially based on an idea that an elevator car may be displaced from its travel path, such as from a shaft, at least by means of a rotational movement. More specifically, the idea is that the elevator car is arranged to travel along at least one guide rail, which comprises at least one  
25 guide rail section which is rotatable around an axis of rotation parallel to the guide rail section.

Figure 1 illustrates schematically the principle of the invention from a travel path perspective. The Figure 1 depicts an elevator system in two positions wherein the first position is depicted with solid line and the second position is

depicted with dashed line. In the first position at least one elevator car 110 is arranged to travel along a first travel path. The elevator car 110 is movably mounted to a guide rail 140 which is fixed to a structure, such as to a wall of a shaft. The mounting of the elevator car 110 to the guide rail 140 may be implemented with one or more applicable roller guide 130 fixed to the elevator car 110, which roller guide(s) 130 are adjusted to travel along at least one guide rail 140 in order to keep the elevator car 110 properly aligned in its pathway. The guide rail 140 is, according to an example of the invention, mounted to a rotational vehicle 150 by means of which it is possible to provide rotational force through the guide rail 140 and one or more roller guide(s) to the elevator car 110 for displacing the elevator car 110 from its original pathway. The interface between the guide rail(s) 140 and the roller guide(s) is not in the focus of the present invention as such and any commonly known solution may be used. The elevator car 110 as depicted in the Figure 1 may comprise one or more elevator doors, or openings, 120A, 120B. The locations of the doors, or openings, 120A, 120B may be chosen so that passengers may enter and exit from the elevator car appropriately. In the example of Figure 1 the passengers enter and exit from the elevator on the same side, i.e. through a door, or opening, 120A in the first position and through a door, or opening, 120B' in the second position. The elements belonging to the solution according to an example of the present invention are provided with an apostrophe for improving the clarity in the Figure 1.

As may be concluded from the Figure 1 an angle of rotation of the rotational vehicle is advantageously 90 degrees. This is especially true in a situation where the passengers enter to and exit to from the elevator on the same side and wherein the elevator car may travel in two parallel pathways, such as shafts. With the 90 degree rotation the elevator car 110 may be displaced between the pathways with a minimum effort and efficiently. Additionally, the 90 degree rotation angle enables a use of existing traditional shafts in buildings, as there is no need to modify the shafts at all. It is also important to understand that the safety aspects may also be taken into account in a better way with 90 degree rotation angle solutions, because if one elevator car 110 misoperates, it is possible to drive another elevator car 110 beside the misoperating one and shift passengers from one car to another by opening the doors of the cars being opposite each other. Naturally this requires that elevator cars are equipped with such doors.

Figure 2 illustrates schematically an example of the present invention from another perspective i.e. essentially sideways. As said, the elevator car 110 is arranged to travel along a guide rail wherein at least one guide rail section 140 is arranged rotatable by means of a rotational vehicle 150. The elevator car 110 is movably mounted to the guide rail with one or more roller guides 130. The rotatable guide rail section 140 is arranged to be mounted with the rotational vehicle 150 thus being part of the rotational vehicle. The mounting method may be any such, which provides hard enough mounting strength in the application area. For example, the mounting may be implemented with, but is not limited to, welding or bolted joint as well as a combination of these. The rotational vehicle 150, and thus the guide rail section 140 and the elevator car 110, is arranged rotatable around an axis of rotation parallel to the guide rail section 140, wherein the angle of rotation is preferably 90 degrees.

The operation of the rotational vehicle 150 may be implemented in multiple ways so that the rotational vehicle 150 and finally the elevator car 110 may be displaced from the pathway in the manner as described. As said the elevator car 110 is brought to rotate around a rotational axis, which is substantially parallel to the guide rail section 140. In the example as depicted in Figure 2 the rotational vehicle is arranged around a central pillar 210. The power forcing the rotational movement of the elevator car 110 may be brought to the elevator system in multiple ways. According to an example of the invention the power may be brought to the system so that the central pillar 210 comprises one or more sections which are arranged to be rotatable. Advantageously, the rotational vehicle 150 is mounted to the mentioned one or more sections of the central pillar 210 so that when the one or more sections of the central pillar 210 is rotated the rotational vehicle also rotates.

As discussed, the present invention may be utilized and implemented in an elevator system where there are multiple elevator cars traveling in the same pathways, e.g. in two shafts, and wherein there is need to displace the elevator cars, or at least one of them, from one shaft to another. Since there is a plurality of elevator cars 110 traveling in the pathways, such as in the shafts, it is necessary to guarantee that the guide rails exist always in full length in all the pathways where the elevator cars travel. In other words, if a guide rail section 140 is rotated according to the example of the present invention from one position to another, it is advantageously arranged so that the rotated guide rail section 140 is replaced with another guide rail section. Preferably this is

implemented so that the replacing guide rail section is brought in the position of the rotated guide rail section concurrently when the guide rail section in question is rotated.

Figures 3A-3D illustrate schematically examples of an apparatus according to the present invention by means of which the displacement of an elevator car may be at least partly implemented. The apparatus comprises a rotational vehicle 150 and at least one guide rail section 140. In the simplest implementation, as depicted in Figure 3A, the apparatus comprises only one guide rail section mounted with the rotational vehicle 150. This kind of implementation enables displacement of the elevator car 110 from one pathway to another, but has a limitation that the guide rail becomes broken in the pathway from which the guide rail section 140 is rotated. Figure 3B depicts an apparatus according to an example of the invention by means of which the rotated guide rail section, e.g. 140A, may be replaced with another guide rail section, e.g. 140B in Figure 3B. The guide rail sections 140A, 140B are advantageously mounted in positions being 90 degrees with respect to each other. However, as one may conclude the implementation according to Figure 3B has a limitation in a case where there are two separate pathways, such as two shafts, for two or more elevator cars 110. Namely, even if in a starting position both guide rail sections 140A, 140B are positional along guide rails in the two pathways, the situation changes when one elevator car 110 is displaced from one pathway to another. Then, both guide rail sections 140A, 140B rotate simultaneously leaving a broken guide rail to the other pathway, which is not desirable. In order to solve the problem the apparatus preferably comprise three, as in Figure 3C, or four, as in Figure 3D, guide rail sections 140A, 140B, 140C, 140D mounted with the rotational vehicle 150. The implementation of the apparatus as illustrated in Figure 3D is especially advantageous since it enables displacement of the elevator car 110 from its pathway to any direction of 90 degrees, because a replacing guide rail section is always brought to replace the rotated one from the pathway. In such a manner the safety requirements may be met in the elevator system environment and as a result the efficiency of the elevator system may be optimized.

Figure 4 illustrates an apparatus 410 corresponding to Figure 3D from another perspective. The apparatus 410 comprises four guide rail sections 140A, 140B, 140C, 140D mounted with the rotational vehicle 150. The mounting of

the guide rail sections 140A, 140B, 140C, 140D is advantageously arranged so that the mounting positions are symmetrically around the rotational vehicle 150 in 90 degrees with respect to each other. Even if the rotational vehicle 150 is illustrated in a drum-like solution in the figures the shape of it may be any other than the illustrated one.

Figure 5 illustrates an arrangement in which multiple described apparatuses 410 are arranged to elevator car pathways, such as shafts. In the illustrated example three elevator cars 110 are arranged to travel in the same pathways. Any of the elevator cars 110 may be displaced from one pathway to another by means of the apparatus 410 according to the invention. This may happen when an elevator car 110 arrives in an operational area of an apparatus 410 i.e. the elevator car 110 in question travels along one of the guide rail sections 140A, 140B, 140C, 140D belonging to the apparatus 410. In case the elevator car 410, e.g. due to a destination address or for any other reason, shall be displaced to another pathway a rotation of the apparatus is initiated. This covers both that the elevator car 410 in question is stopped, i.e. there is no vertical motion, in the operational area of the apparatus 410, and that the elevator 410 continues the travel at least partly concurrently with the rotational operation of the apparatus 410. By combining the rotation movement with the vertical movement the efficiency of an elevator system may be improved which is a clear advantage compared to known solutions. Additionally, as the elevator car is always fastened to a guide rail section though applicable means the safety requirements may be fulfilled better than in at least some prior art solutions. Naturally, the lengths of guide rail sections 140A, 140B, 140C, 140D shall be optimally selected in an implementation in which both the rotational movement and the vertical movement happens at least partly concurrently. Moreover, the travel speed of the elevator car 110 may be adjusted accordingly. The positions of the apparatuses may also be selected optimally within the pathways so that the service speed of the elevators is optimal to the need. As said, the implementation illustrated in Figure 5 is only an example and the inventive idea of the present invention is not limited only to that. For example, the number of apparatuses within the pathways may vary according to the need. Moreover, the implementation utilizing the apparatuses according to the present invention may be arranged so that the apparatuses are different or the same within the limits of the present invention. In other words, it may e.g. be arranged so that one apparatus may be configured to displace only one

elevator car 110 at a time, i.e. comprising only one guide rail section, whereas another apparatus may be configured to displace multiple elevator cars 110 at the time i.e. comprising a plurality of guide rail sections.

According to one implementation of the present invention the apparatuses may  
5 be arranged successively in the pathway. This means at least that that the successive rail sections 140A, 140B, 140C, 140D in vertical direction, or in the pathway direction, are from different apparatuses. This extends the rotational section within the elevator implementation so that it improves the efficiency of the elevator system as there is possibility to displace the elevator cars in a  
10 longer pathway. Such an implementation may require that different apparatus are configured to operate synchronously with respect to each other. In order to maintain the synchronized rotation of the different apparatuses the apparatuses may be configured to couple the apparatuses together e.g. with magnetic and/or mechanical locking. The locking may be arranged between  
15 the successive rail sections, but also in such a manner that the rotational vehicles are arranged to be coupled together with locking mechanisms arranged in the rotational vehicles, which may be coupled e.g. with magnetic and/or mechanical way.

Further, in some implementation multiple apparatuses according to the  
20 examples of the invention may be arranged in the same pathway section in an overlapping manner. This means that two or more individual apparatuses may displace elevator cars from one pathway to another in the same section. Such an implementation may be preferred especially if there are arranged more than two pathways, e.g. three, around a rotational axis.

25 Typically buildings are designed so that elevator shafts are arranged beside each other so that the entrances of the adjacent elevators are arranged on the same side. It is also usually so that the elevator cars are cuboid in shape, or specifically a rectangular cuboid, in order to optimize an area and volume utilization factor in buildings. Also elevator cars having a bottom area quadrant  
30 in shape may be advantageous because the space needed for the rotation is optimized.

Taken these limits as granted the present invention is optimally configured so that the elevator cars 110 are mounted with the guide rails through any mounting means, such as roller guides, along an edge of the elevator car 110

being parallel to the guide rail. Advantageously the mounting angle is adjusted so that a diagonal of the bottom or roof rectangular continues along the mounting means towards the guide rail through the axis of rotation (the diagonals are illustrated in Figure 1 with dashed line in the elevator cars). Such an implementation enables choosing the rotational angle of 90 degrees in the described setup of buildings. However, the invention is not limited to 90 degree rotational angle only since the shape of the elevator car may have impact to the required rotational angle.

In the description above the inventive idea is described so that the apparatus according to the invention comprises only one guide rail section for mounting, or attaching, the elevator car 110 movably in the elevator system. The inventive idea covers also any such solution wherein there is a plurality of guide rail sections in the apparatus for mounting the elevator car in one pathway. Such an implementation is illustrated in Figure 6 wherein the two guide rail sections 140 are mounted with the rotational vehicle 150. The counter-part or counter-parts to the guide rails in the elevator car are to be chosen accordingly. It is clear the number of guide rails is an implementation based selection and advantageously, but not necessarily, all sets of guide rails and guide rail sections are similar in the apparatus and the elevator system according to the invention. As disclosed one set of guide rail sections in the apparatus may comprise one or more individual guide rail sections 140.

Figures 7A and 7B illustrate an example of an apparatus according to the invention. The apparatus 410 may comprise a rotational vehicle 150 having at least two concentric ring-type elements 710, 720. The ring-type elements 710, 720 are configured to rotate with respect to each other. The interface between the elements 710, 720 may e.g. be implemented with bearing arrangement, which is to be implemented in at least one of the elements 710, 720. The bearing, such as ball bearing, is advantageously selected so that the friction between the elements is minimized during the rotation. The inner ring-type element 720 is to be mounted to the central element forming the entity around which the rotational motion happens. The central element may e.g. be a central pillar 210, as depicted in the Figure 2. The outer ring-type element 710 is arranged to rotate around the element 720 causing the guide rail section(s) to rotate.

The rotational force may e.g. be brought to the apparatus 410 by means of one or more cogwheels 730 mounted in an appropriate way e.g. to the central element 210 and which may be arranged to interact with the rotating element 710 of the rotational vehicle 150. An example of such a solution is disclosed in

5 Figure 7B. The element 710 comprises advantageously such a surface that the cogwheel 730 may interact with it in an efficient way. For example, the element 710 may be provided with such a surface which is adjusted with the teeth number of the cogwheel(s) 730. The rotational vehicle may e.g. be arranged to rest on a plurality of stabilizing rollers 740. The rollers may be configured to

10 follow the rotational motion of the rotational vehicle 150. The force to the cogwheel(s) may be brought from an electrical motor, which may be controlled by a system managing an operation of the whole elevator system, for example. Additionally, any sensors may be arranged in the solution in order to monitor the operation of the rotational vehicle. For example, advantageously such

15 sensors are arranged in the pathway by means of which it is possible to detect that an elevator car to be displaced from the pathway arrives in a section, which is rotatable.

In the description of the present inventive idea there is not taken any standpoint to the type or shape of guide rails or guide rail sections as such.

20 This is because the present inventive idea is applicable as such with any guide rail type or shape as long as it may be mounted with the rotational vehicle 150 causing the effect as described and as long as the elevator car 110 may be guided along the guide rail type or shape in question together with any necessary counter-element mounted in the elevator car 110, such as

25 applicable roller guide(s) 130.

The dimensions in the implementation of the present invention may vary from those shown in the Figures. The Figures are drawn schematically for disclosing the inventive idea of the present invention in an appropriate way.

Features described in the preceding description may be used in combinations

30 other than the combinations explicitly described. Although functions have been described with reference to certain features, those functions may be performable by other features whether described or not. Although features have been described with reference to certain embodiments, those features may also be present in other embodiments whether described or not.

## CLAIMS

1. An apparatus (410) for displacing an elevator car (110) from its pathway, the apparatus (410) comprising:
  - a rotational vehicle (150) configured to rotate around an axis of rotation,
- 5 - at least one guide rail section (140; 140A, 140B, 140C, 140D) mounted with the rotational vehicle along which at least one guide rail section (140; 140A, 140B, 140C, 140D) the at least one elevator car (110) is arranged to travel, wherein the at least one guide rail section (140; 140A, 140B, 140C, 140D) is mounted substantially parallel to the axis of rotation of the rotational vehicle  
10 (150),  
wherein the rotational vehicle (150) is configured to rotate 90 degrees.
2. The apparatus (410) of claim 1, wherein the apparatus (410) comprises at least two guide rail sections (140; 140A, 140B, 140C, 140D), wherein each two guide rail sections (140; 140A, 140B, 140C, 140D) are configured to be  
15 mounted substantially parallel to each other and in 90 degrees with respect to each other from the axis of rotation point of view.
3. The apparatus of any of the preceding claims, wherein the rotational vehicle (150) comprises two ring-type elements (710; 720) arranged to rotate with respect to each other.
- 20 4. The apparatus of the claim 3, wherein an inner ring-type element (720) is fixedly mounted and the interface between the ring-type elements (710; 720) is a bearing solution.
5. An elevator system comprising:
  - at least one elevator car (110),
- 25 - at least one apparatus (410) comprising
  - a rotational vehicle (150) configured to rotate around an axis of rotation,
  - at least one guide rail section (140; 140A, 140B, 140C, 140D) mounted with the rotational vehicle along which at least one guide rail section (140; 140A, 140B, 140C, 140D) the at least one elevator car (110) is arranged

to travel, wherein the at least one guide rail section (140; 140A, 140B, 140C, 140D) is mounted substantially parallel to the axis of rotation of the rotational vehicle (150),

wherein the rotational vehicle (150) is configured to rotate 90 degrees.

- 5     6.     The elevator system of claim 5, wherein the at least one apparatus (410) comprises at least two guide rail sections (140; 140A, 140B, 140C, 140D), wherein each two guide rail sections (140; 140A, 140B, 140C, 140D) are configured to be mounted substantially parallel to each other and in 90 degrees with respect to each other from the axis of rotation point of view.
- 10    7.     The elevator system of any of the preceding claims 5-6, wherein the at least one elevator car (110) is arranged to be movably mounted to the guide rail section (140; 140A, 140B, 140C, 140D) from an edge of the elevator car (110) being parallel to the guide rail section (140; 140A, 140B, 140C, 140D) in order to enable the travel of the at least one elevator car (110) along the guide  
15    rail section (140; 140A, 140B, 140C, 140D) in question.
8.     The elevator system of any of the preceding claims 5-7, wherein the elevator car (110) is mounted to the guide rail section (140; 140A, 140B, 140C, 140D) by means of at least one roller guide (130).
9.     The elevator system of any of the preceding claims 5-8, wherein the at  
20    least one elevator car (110) comprises door openings (120A, 120B) on the sides connected by the edge from which the elevator car (110) is arranged to be movably mounted to the guide rail section (140; 140A, 140B, 140C, 140D).
10.    The elevator system of any of the preceding claims 5-9, wherein the elevator system comprises at least two apparatuses (410) being coupled to  
25    each other.
11.    The elevator system of claim 10, wherein the coupling of the at least two apparatuses (410) is arranged with one of the following: magnetic locking, mechanical locking.
12.    The elevator system of any of the claims 10 or 11, wherein the  
30    apparatuses (410) are configured to rotate synchronously.

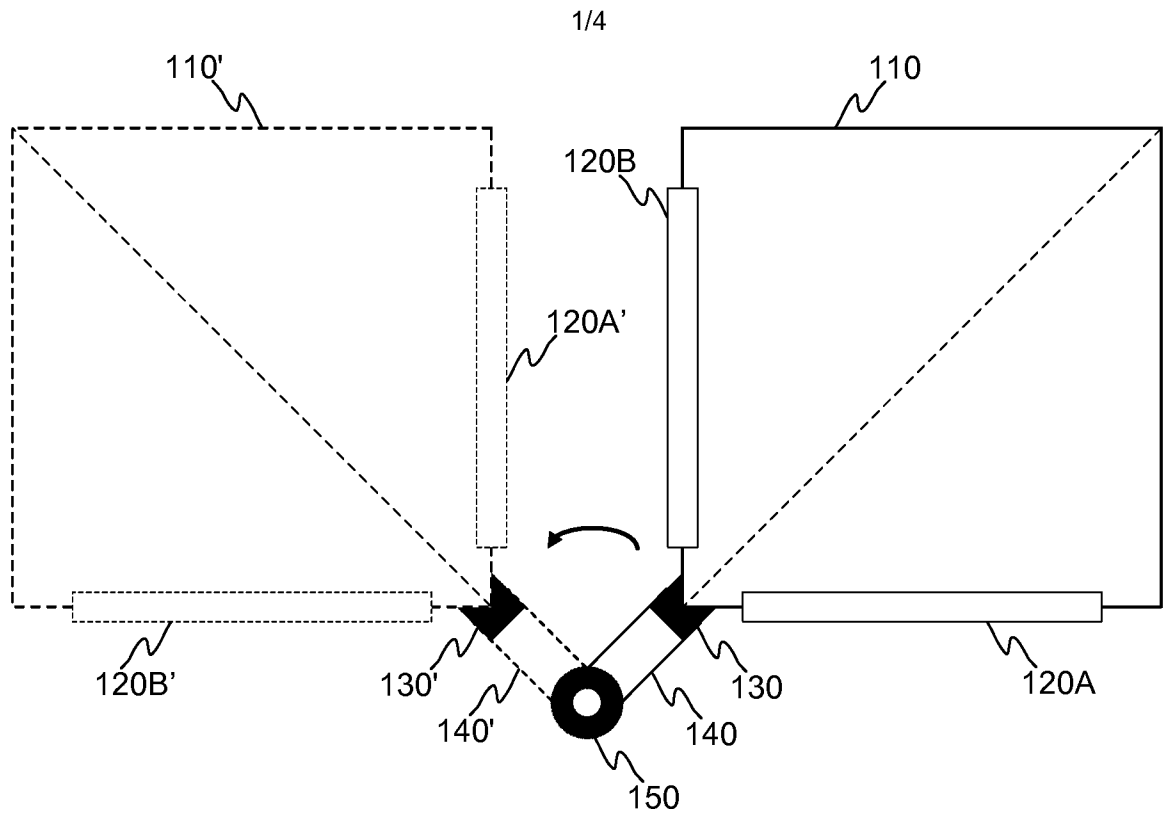


**FIG. 1**




**FIG. 3A**

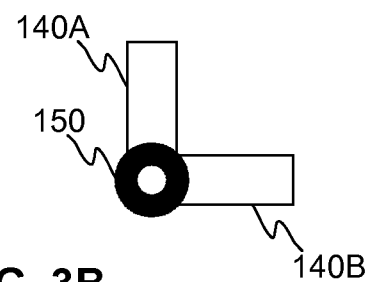


**FIG. 3B**

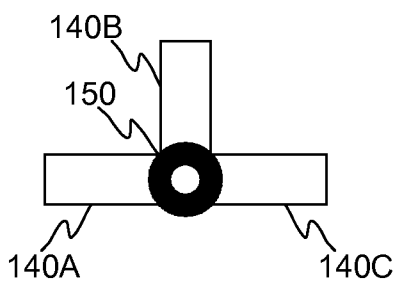


**FIG. 3C**

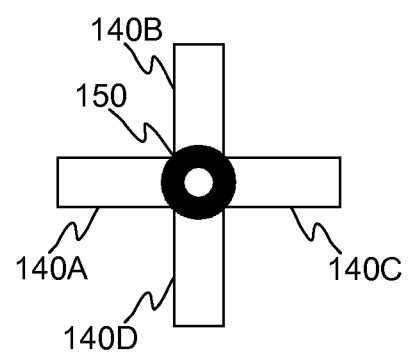


**FIG. 3D**

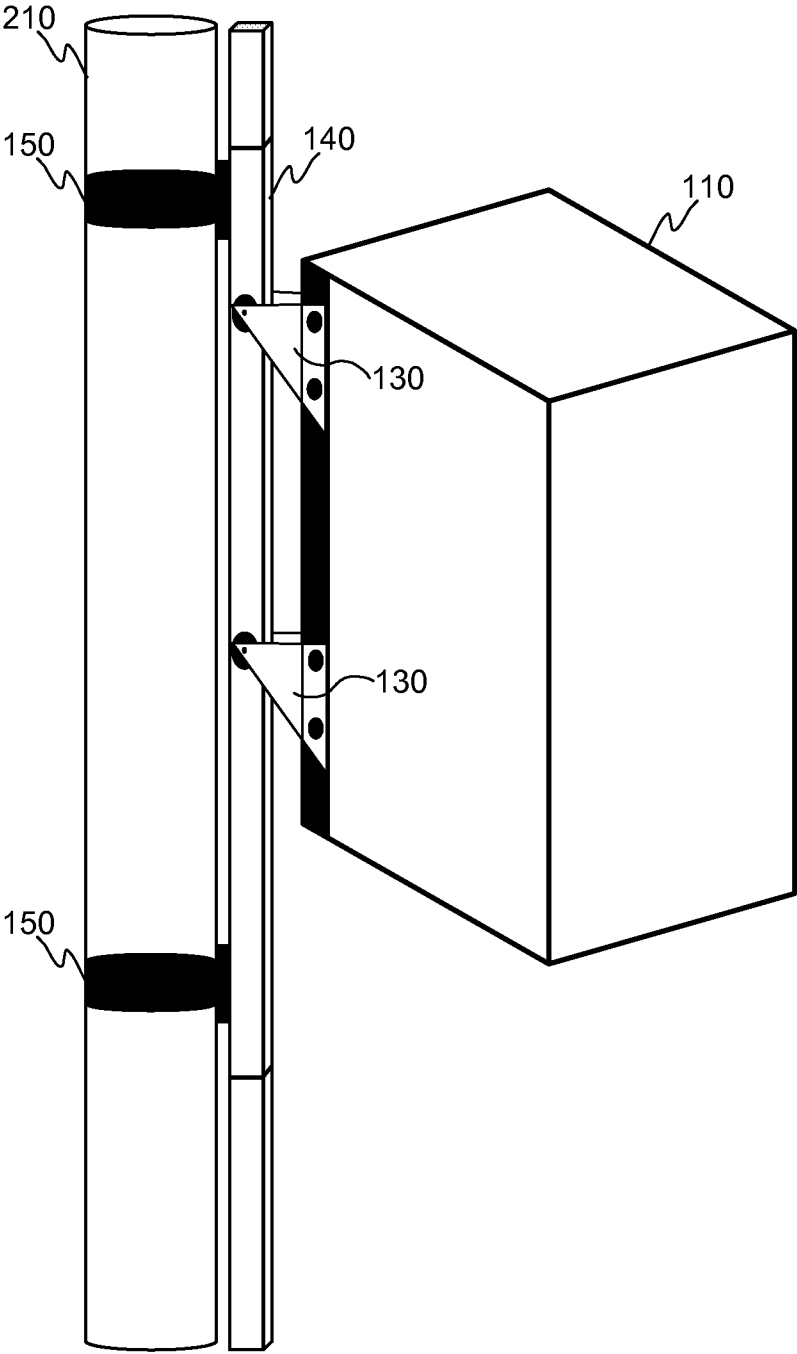


FIG. 2

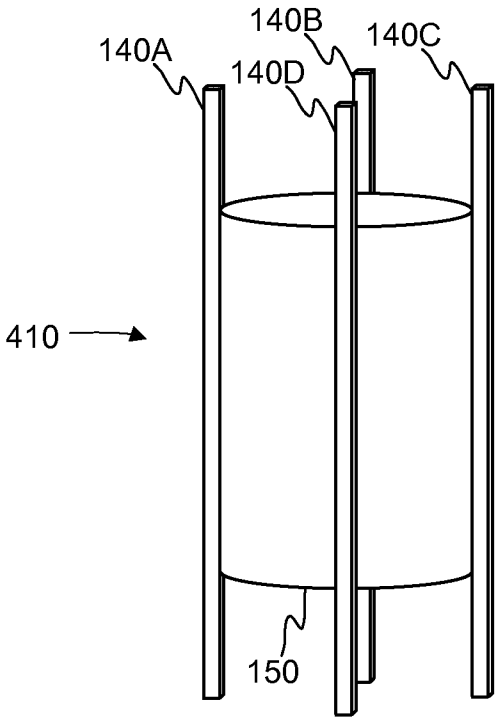


FIG. 4

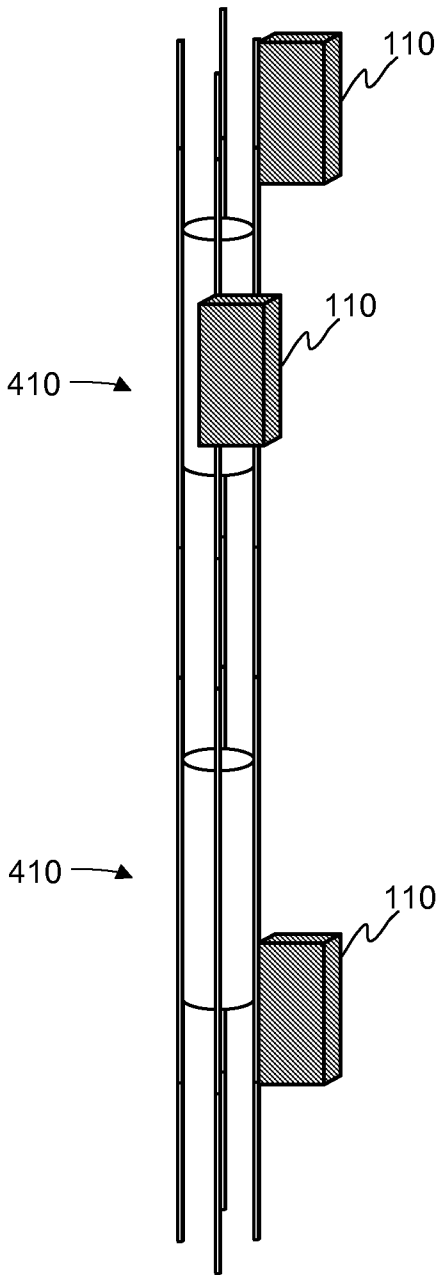


FIG. 5

4/4

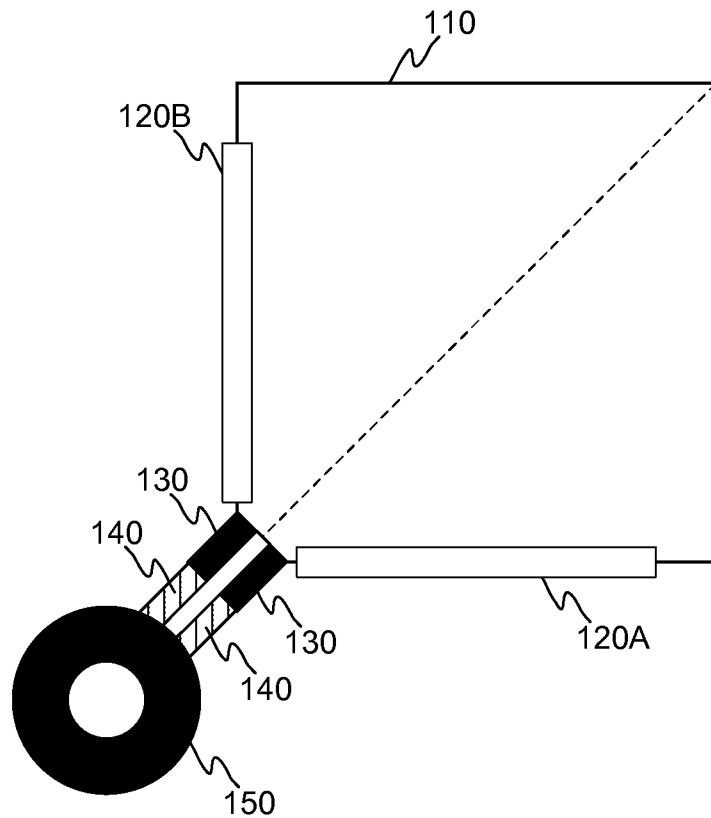


FIG. 6

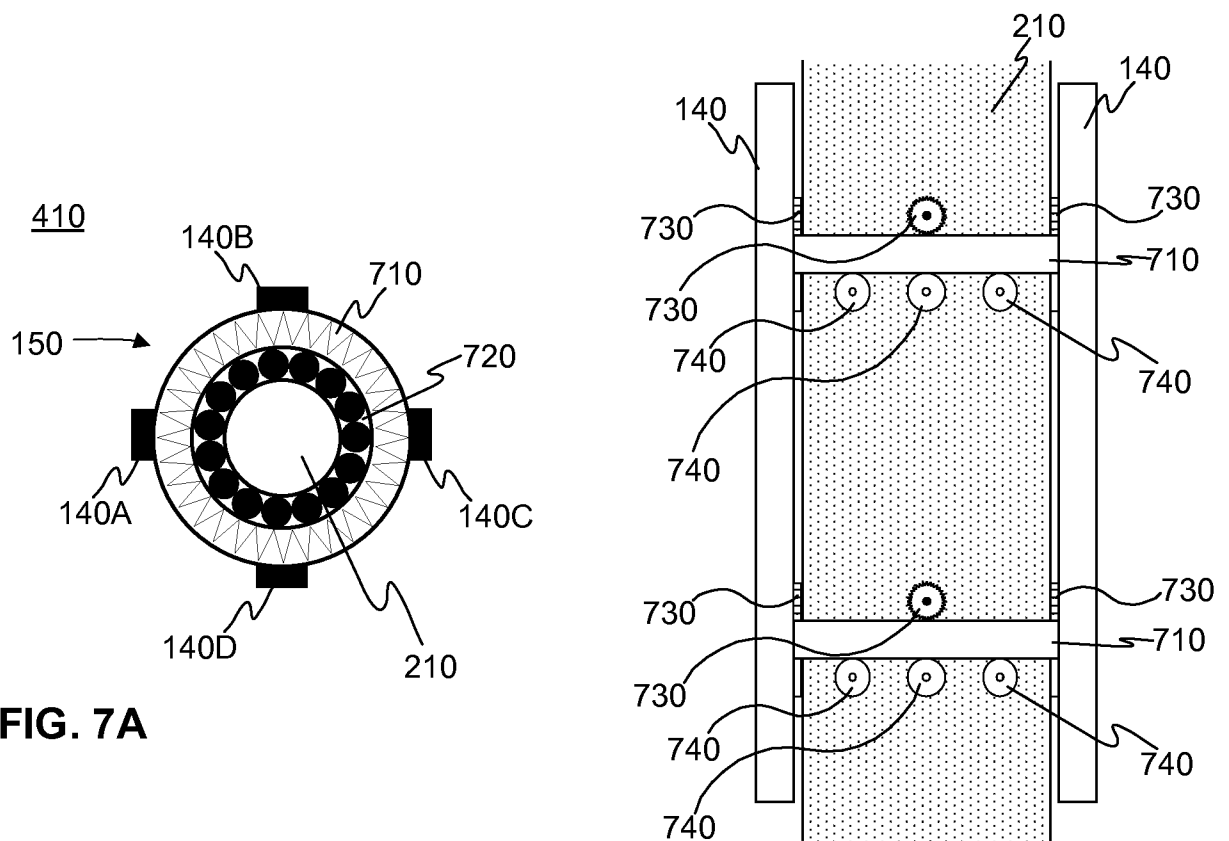


FIG. 7A

FIG. 7B

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2016/050415

**A. CLASSIFICATION OF SUBJECT MATTER**

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC: B66B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

FI, SE, NO, DK

Electronic data base consulted during the international search (name of data base, and, where practicable, search terms used)

EPO-Internal, WPIAP

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                                           | Relevant to claim No. |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| X         | WO 2012038760 A2 (GODWIN ADRIAN MICHAEL [GB])<br>29 March 2012 (29.03.2012)<br>the whole document, especially page 5, line 10 - page 6, line 12 and figure 3 | 1, 5, 7 - 9           |
| A         | WO 2015084364 A1 (OTIS ELEVATOR CO [US])<br>11 June 2015 (11.06.2015)<br>the whole document                                                                  | 1 - 12                |
| A         | DE 20206290 U1 (MÜLLER WOLFGANG T [DE])<br>22 August 2002 (22.08.2002)<br>the whole document; pages 3 and 4 and figure 2                                     | 1 - 12                |
| A         | US 5197570 A (MATSUI NOBUYUKI [JP]) 30 March 1993 (30.03.1993)<br>the whole document                                                                         | 1 - 12                |

☒ Further documents are listed in the continuation of Box C.
☒ See patent family annex.

|                                                                                                                                                                         |                                                                                                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| * Special categories of cited documents:                                                                                                                                | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention                                              |
| "A" document defining the general state of the art which is not considered to be of particular relevance                                                                | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone                                                                     |
| "E" earlier application or patent but published on or after the international filing date                                                                               | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "&" document member of the same patent family                                                                                                                                                                                                    |
| "O" document referring to an oral disclosure, use, exhibition or other means                                                                                            |                                                                                                                                                                                                                                                  |
| "P" document published prior to the international filing date but later than the priority date claimed                                                                  |                                                                                                                                                                                                                                                  |

Date of the actual completion of the international search

31 August 2016 (31.08.2016)

Date of mailing of the international search report

12 September 2016 (12.09.2016)

Name and mailing address of the ISA/FI  
Finnish Patent and Registration Office  
P.O. Box 1160, FI-00101 HELSINKI, Finland  
Facsimile No. +358 9 6939 5328

Authorized officer  
Jouni Pulli  
Telephone No. +358 9 6939 500

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2016/050415

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                    | Relevant to claim No. |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| A         | US 2007181374 A1 (MUELLER WOLFGANG T [DE])<br>09 August 2007 (09.08.2007)<br>the whole document; paragraph [0040] and figure 5        | 1 - 12                |
| A         | JP 2007131402 A (TOSHIBA ELEVATOR CO LTD)<br>31 May 2007 (31.05.2007)<br>figures 1 - 17<br>& abstract [online] EPOQUENET EPODOC & WPI | 1 - 12                |

**INTERNATIONAL SEARCH REPORT**  
**Information on Patent Family Members**

International application No.  
PCT/FI2016/050415

| Patent document<br>cited in search report | Publication<br>date | Patent family members(s)                                                                                                                                                             | Publication<br>date                                                                                                                      |
|-------------------------------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| WO 2012038760 A2                          | 29/03/2012          | CN 103228563 A<br>EP 2619122 A2<br>EP 2619122 B1<br>GB 201016023 D0<br>HK 1187323 A1                                                                                                 | 31/07/2013<br>31/07/2013<br>15/04/2015<br>10/11/2010<br>22/01/2016                                                                       |
| WO 2015084364 A1                          | 11/06/2015          | None                                                                                                                                                                                 |                                                                                                                                          |
| DE 20206290 U1                            | 22/08/2002          | None                                                                                                                                                                                 |                                                                                                                                          |
| US 5197570 A                              | 30/03/1993          | DE 69200488 D1<br>DE 69200488 T2<br>EP 0509647 A1<br>EP 0509647 B1<br>JP H04317981 A<br>JP H0815993 B2                                                                               | 10/11/1994<br>02/02/1995<br>21/10/1992<br>05/10/1994<br>09/11/1992<br>21/02/1996                                                         |
| US 2007181374 A1                          | 09/08/2007          | CN 101010252 A<br>CN 100569622 C<br>DE 202004009022 U1<br>EP 1758809 A1<br>EP 1758809 B1<br>ES 2396716 T3<br>JP 2008501596 A<br>RU 2006145436 A<br>RU 2388681 C2<br>WO 2005121010 A1 | 01/08/2007<br>16/12/2009<br>09/09/2004<br>07/03/2007<br>03/10/2012<br>25/02/2013<br>24/01/2008<br>27/07/2008<br>10/05/2010<br>22/12/2005 |
| JP 2007131402 A                           | 31/05/2007          | None                                                                                                                                                                                 |                                                                                                                                          |

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2016/050415

CLASSIFICATION OF SUBJECT MATTER

IPC

**B66B 7/02** (2006.01)

**B66B 9/00** (2006.01)