



- (51) International Patent Classification:  
F41G 3/06 (2006.01)
- (21) International Application Number:  
PCT/IB2012/051389
- (22) International Filing Date:  
22 March 2012 (22.03.2012)
- (25) Filing Language:  
English
- (26) Publication Language:  
English
- (30) Priority Data:  
211966 28 March 2011 (28.03.2011) IL
- (71) Applicant (for all designated States except US): SMART SHOOTER LTD. [IL/IL]; 19238 Kibbutz Ramat Hashofet (IL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): EHRLICH, Avshalom [IL/IL]; 19238 Kibbutz Ramat Hashofet (IL).
- (74) Agent: FRIEDMAN, Mark; Dr. Mark Friedman Ltd., Moshe Aviv Tower, 54 F, 7 Jabotinsky St., 52520 Ramat Gan (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

**Date of publication of the amended claims:** 22 November 2012

(54) Title: FIREARM, AIMING SYSTEM THEREFOR, METHOD OF OPERATING THE FIREARM AND METHOD OF REDUCING THE PROBABILITY OF MISSING A TARGET

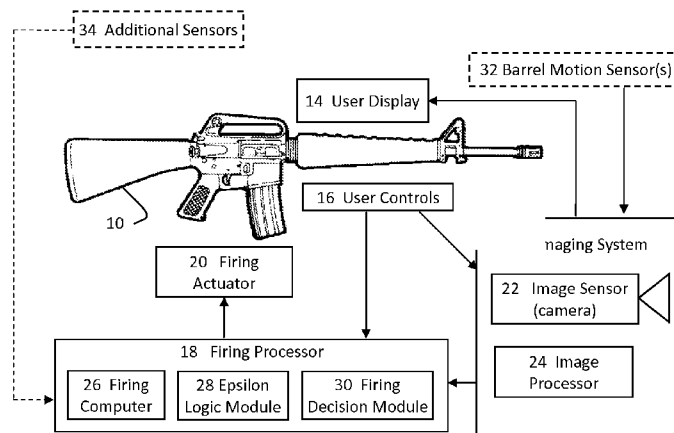


Fig. 1

(57) Abstract: A firearm aiming system comprising an imaging system comprising an imaging sensor and an image processor; and a user display, wherein the imaging system is adapted to detect a potential target on the user display based on target features. In some embodiments the system includes a firing processor with an epsilon logic module for calculating a target aim-point/area used by the firing processor to make a firing decision.

WO 2012/131548 A4

## AMENDED CLAIMS

received by the International Bureau on 13 September 2012 (13.09.2012).

1. A firearm aiming system comprising:  
an imaging system comprising an imaging sensor and an image processor; and  
a user display,  
wherein the imaging system is adapted to detect at least one potential target based on target features and to display, on the user display, an indicator of a direction in which the firearm is pointed; the system further comprising:  
user controls for locking on a detected potential target towards which the firearm is pointed according to the indicator.
2. The system according to claim 1, wherein the imaging system adapted to use at least one background feature for determining target movement and/or proper aim point.
3. The system according to claim 2, wherein the at least one background feature includes a static background feature.
4. The system according to claim 1, wherein the user controls are adapted to allow locking on the potential target automatically.
5. The system according to claim 1, wherein the user controls are adapted to allow locking on the potential target manually.
6. The system according to claim 1, wherein the user controls include a target lock-on mechanism consisting of one of the elements selected from the group comprising: a trigger, a button, a touch screen.
7. The system according to claim 1, adapted to allow locking onto a plurality of targets.
8. The system according to claim 1, wherein the imaging system detects the target on the basis of edge detection.

9. The system according to claim 1, wherein the detection is highlighted in the form of a contour at the edges of the target or a portion of the target or in the form of coloration.
10. The system according to claim 1, wherein imaging system is adapted so that the target features may include any of the features, including a combination thereof, chosen from the group consisting of: target movement, target shape, associated enemy muzzle flash, range/distance, IR signature, and "change detection".
11. The system according to claim 1, further comprising a firing processor for predicting/determining if a target will be hit.
12. The system according to claim 11, wherein the firing processor is adapted to calculate a lead required for proper aim point.
13. The system according to claim 11, further comprising an epsilon logic module for calculating a target aim-point/area used by the firing processor to make a firing decision.
14. The system according to claim 13, wherein the epsilon logic module is adapted for calculating dynamic epsilon area.
15. The system according to claim 14, wherein the epsilon logic module includes an algorithm to take into account target, firearm and environmental factors.
16. The system according to claim 11, further comprising a firing actuator adapted to enable firing only when the firing processor determines the target will be hit.
17. The system according to claim 11, wherein the firing actuator is an actuation mechanism for actuating a trigger or a hammer of the firearm.
18. The system according to claim 17, wherein the actuation mechanism is adapted to release the trigger or the hammer of the firearm.
19. The system according to claim 17, wherein the actuation mechanism is adapted to actively move the trigger or the hammer of the firearm.

20. The system according to claim 1, further comprising a target tracker processor for tracking potential targets.
21. The system according to claim 1, wherein the image processor includes a target recognition algorithm for identifying the target type.
22. The system according to claim 1, further having a non-lock on mode.
23. The system according to claim 1, further having a "suppressing fire" mode.
24. The system according to claim 1, adapted to be activated by a partial depress of the trigger.
25. The system according to claim 1, wherein the aiming system is adapted to allow operation as a "regular" firearm, able to shoot mechanically.
26. A method of operating a firearm having a display, the firearm comprising:  
pointing the firearm at a target;  
selecting a target area towards which the firearm is pointing by locking on a location of the target area resulting in the firearm locking onto a desired hit point and tracking the selected target; and  
aiming the firearm in a direction of the target until the firearm has determined the target will be hit.
27. The method according to claim 26, wherein aiming the firearm includes aiming within an epsilon tolerance of the selected range.
28. The method according to claim 26, wherein aiming the firearm includes using an aiming guide line/arrow.
29. The method according to claim 26, wherein locking onto the target comprises partially depressing a trigger of the firearm.
30. The method according to claim 26, wherein locking onto the desired hit point includes locking on a particular part of the selected target or the center of the selected target.

31. The method according to claim 26, wherein locking onto the desired hitpoint includes locking on a particular location of the target.

32. The method according to claim 26, wherein the selecting of the target area includes using object background segregation by the imaging system of the firearm, the method further comprising:

selecting the target automatically or based on a user command in order to track the target;

predicting movement of the target, if any; and thus the position, of the target with respect to background features of the field of view;

predicting the aiming of the firearm using background features of the field of view; and

enabling firing at the target when the predicted aim of the firearm coincides with the predicted position of the target.

33. The method according to claim 32, wherein using object background segregation includes using movement detection.

34. The method according to claim 32, further using target range estimation based on background features in the field of view.

35. The method according to claims 32, further using target range estimation based on comparison to objects of familiar size.

36. The method according to claim 32, further using target range estimation based on target size changing.

37. The method according to claim 36, wherein target range estimation includes using perspective analysis.

38. The method according to claim 36, wherein target range estimation includes using focus for estimating the range.