



US 20080302180A1

(19) **United States**(12) **Patent Application Publication**
Van Kann et al.(10) **Pub. No.: US 2008/0302180 A1**(43) **Pub. Date: Dec. 11, 2008**(54) **GRAVITY GRADIOMETER****Publication Classification**(75) Inventors: **Frank Joachim Van Kann,**
Western Australia (AU); **John**
Winterflood, Western Australia
(AU)(51) **Int. Cl.**
G01V 7/00 (2006.01)(52) **U.S. Cl.** **73/382 G**


Correspondence Address:

FISH & RICHARDSON P.C.**P.O. BOX 1022****MINNEAPOLIS, MN 55440-1022 (US)**(73) Assignee: **TECHNOLOGICAL**
RESOURCES PTY. LIMITED,
Melbourne Victoria (AU)(21) Appl. No.: **11/722,050**(22) PCT Filed: **Aug. 31, 2006**(86) PCT No.: **PCT/AU06/01271**§ 371 (c)(1),
(2), (4) Date:**Sep. 19, 2007**(30) **Foreign Application Priority Data**

Oct. 6, 2005	(AU)	2005905524
Nov. 29, 2005	(AU)	2005906669
Jan. 13, 2006	(AU)	2006900193

(57) **ABSTRACT**

A gravity gradiometer is disclosed which has a sensor in the form of bars (41 and 42) which are supported on a mounting (5) which has a first mount section (10) and a second mount section (20). A first flexure web (33) pivotally couples the first and second mount sections about a first axis. The second mount has a first part (25), a second part (26) and a third part (27). The parts (25 and 26) are connected by a second flexure web (37) and the parts (26 and 27) are connected by a third flexure web (35). The bars (41 and 42) are located in housings (45 and 47) and form a monolithic structure with the housings (45 and 47) respectively. The housings (45 and 47) are connected to opposite sides of the second mount section 20. The bars (41 and 42) are connected to their respective housings by flexure webs (59). Transducers (71) are located in proximity to the bars for detecting movement of the bars in turn enable the gravitational gradient tensor to be measured. The first mount section (10) has cut-outs (16) and the second mount section (20) has lugs (13) which pass through the cut-outs for connecting the first and second mount sections (10 and 20) in a Dewar (1).

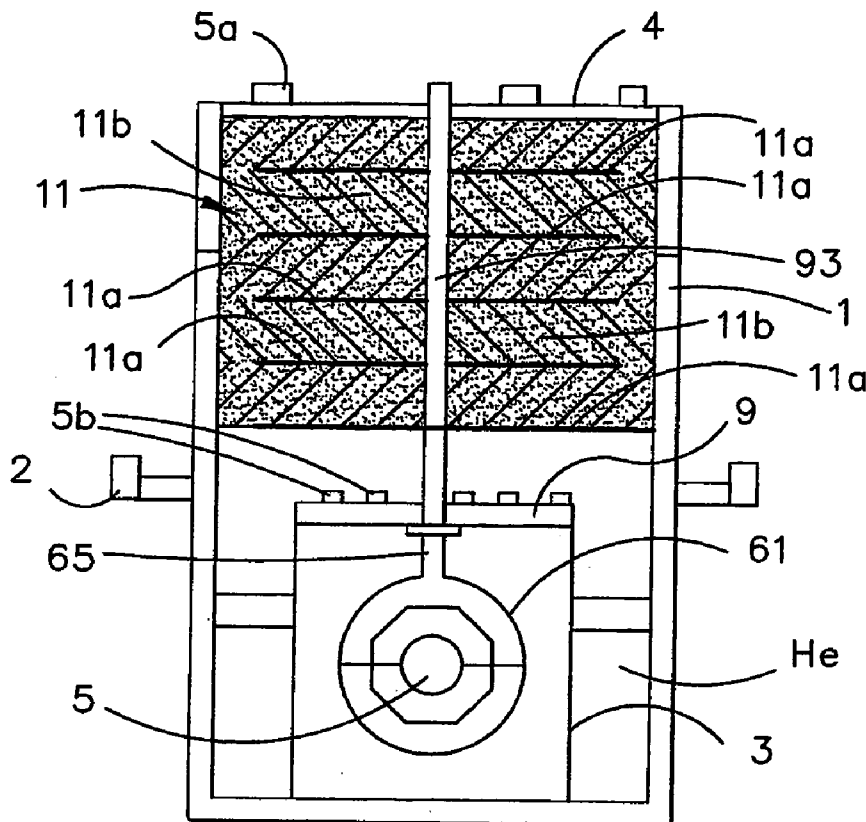

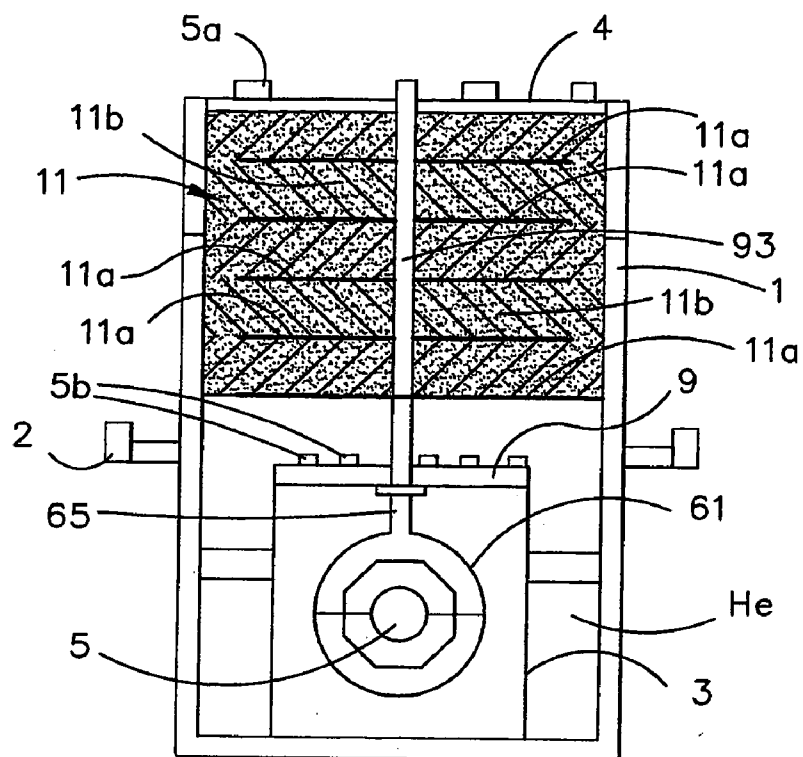


FIGURE 1

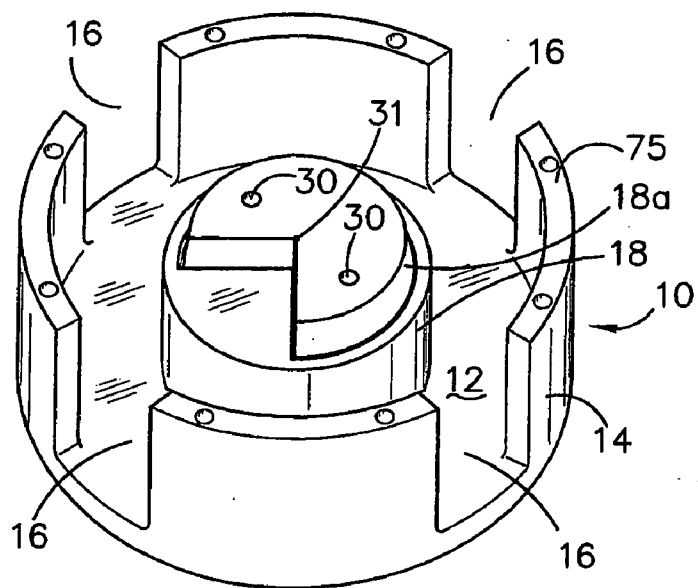
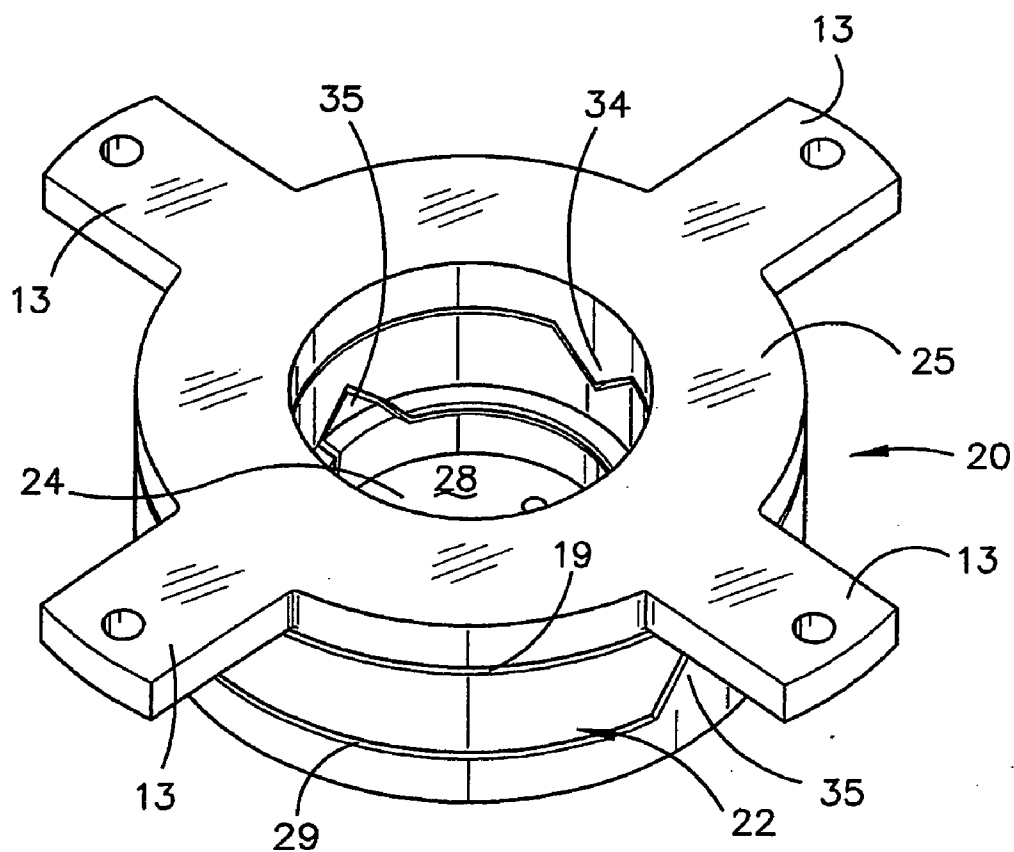
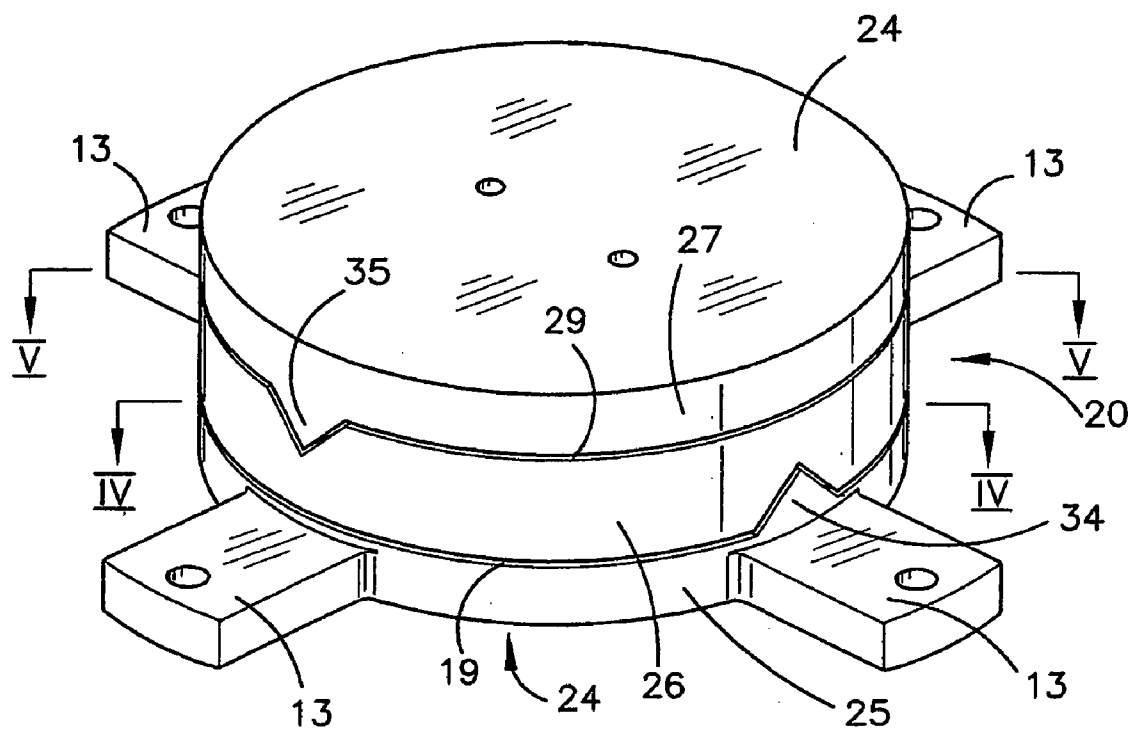


FIGURE 2



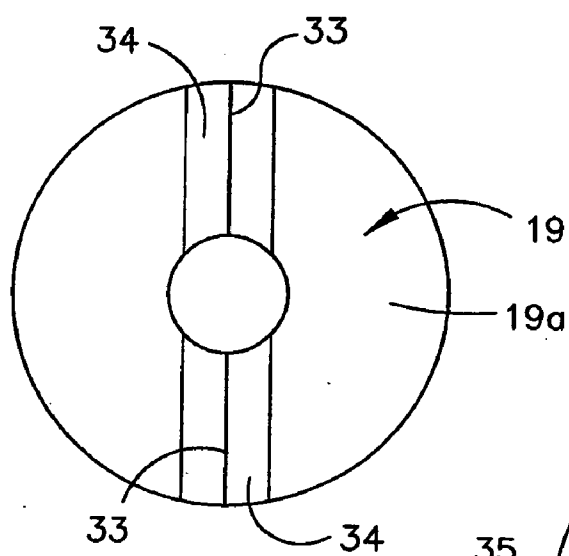


FIGURE 5

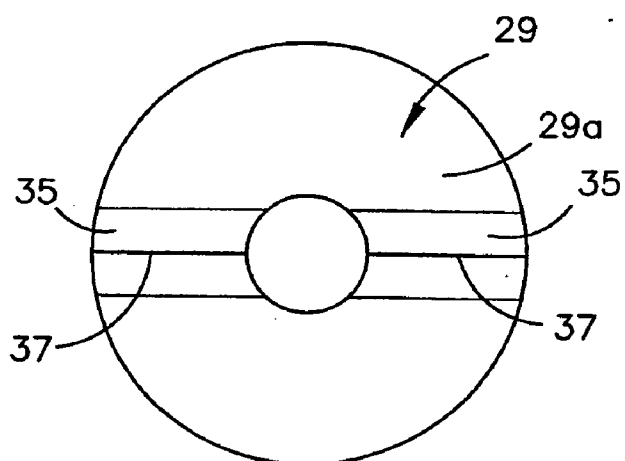


FIGURE 6

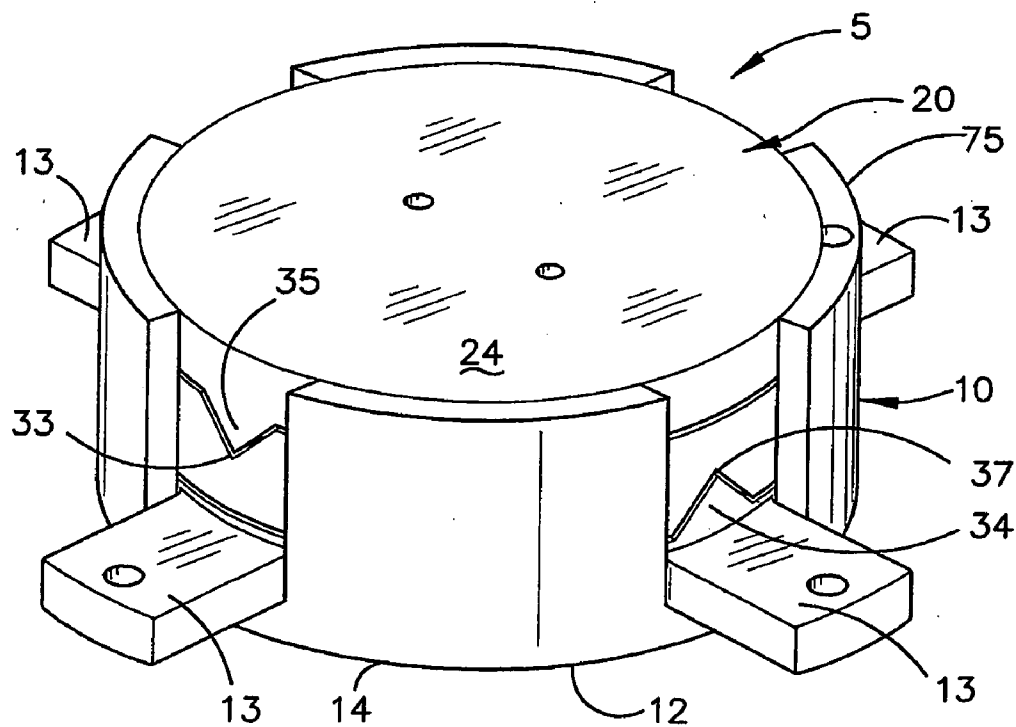


FIGURE 7

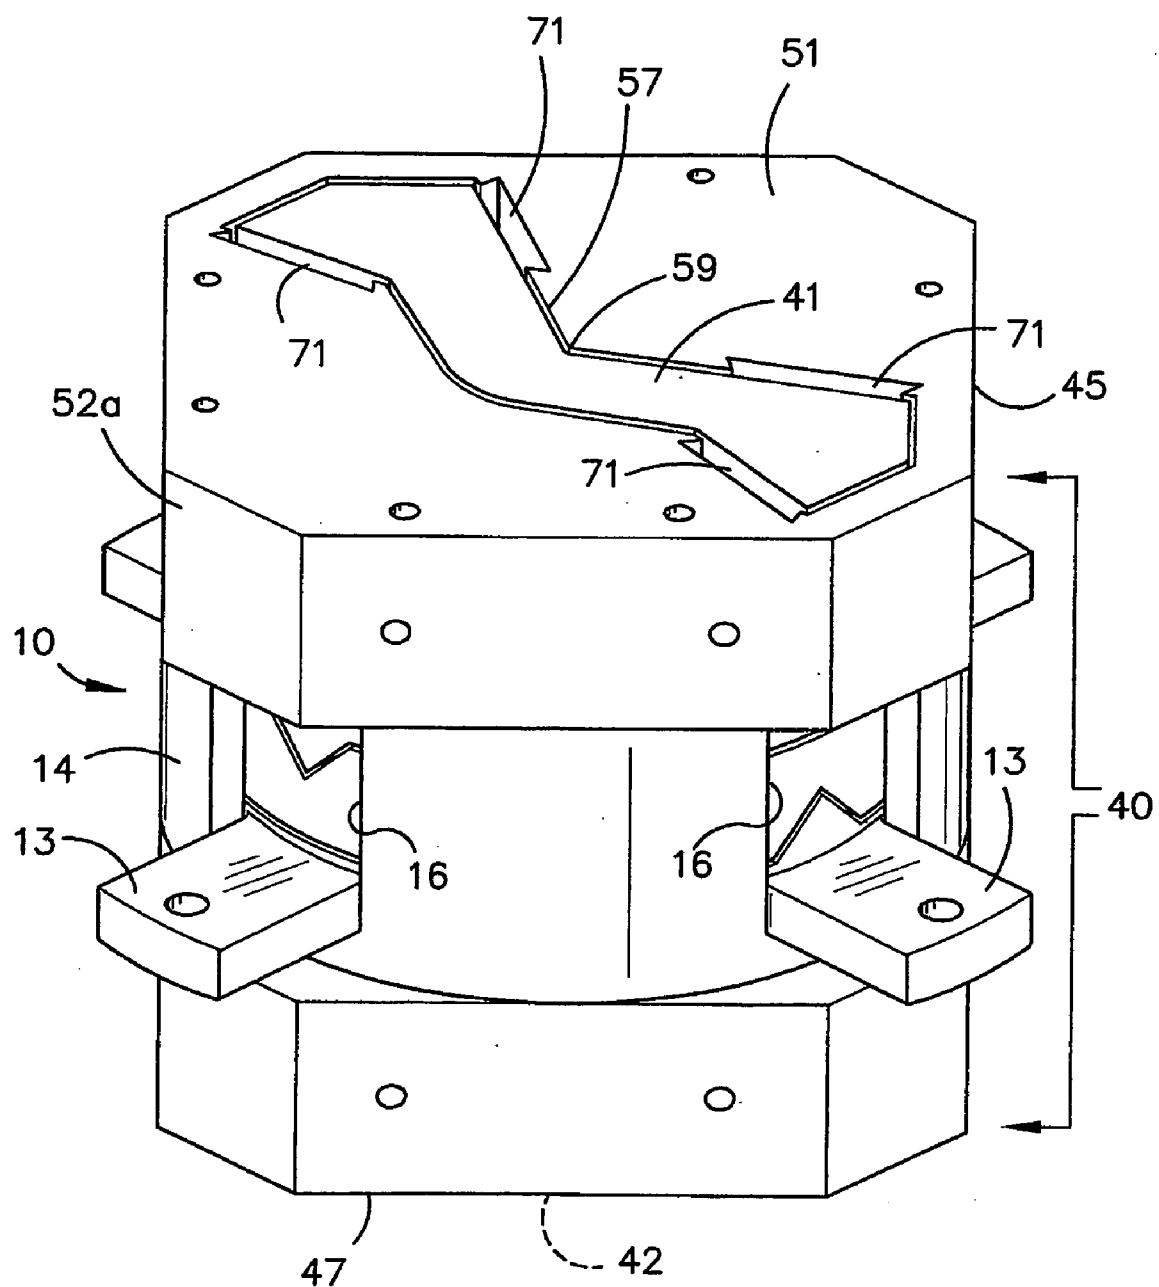


FIGURE 8

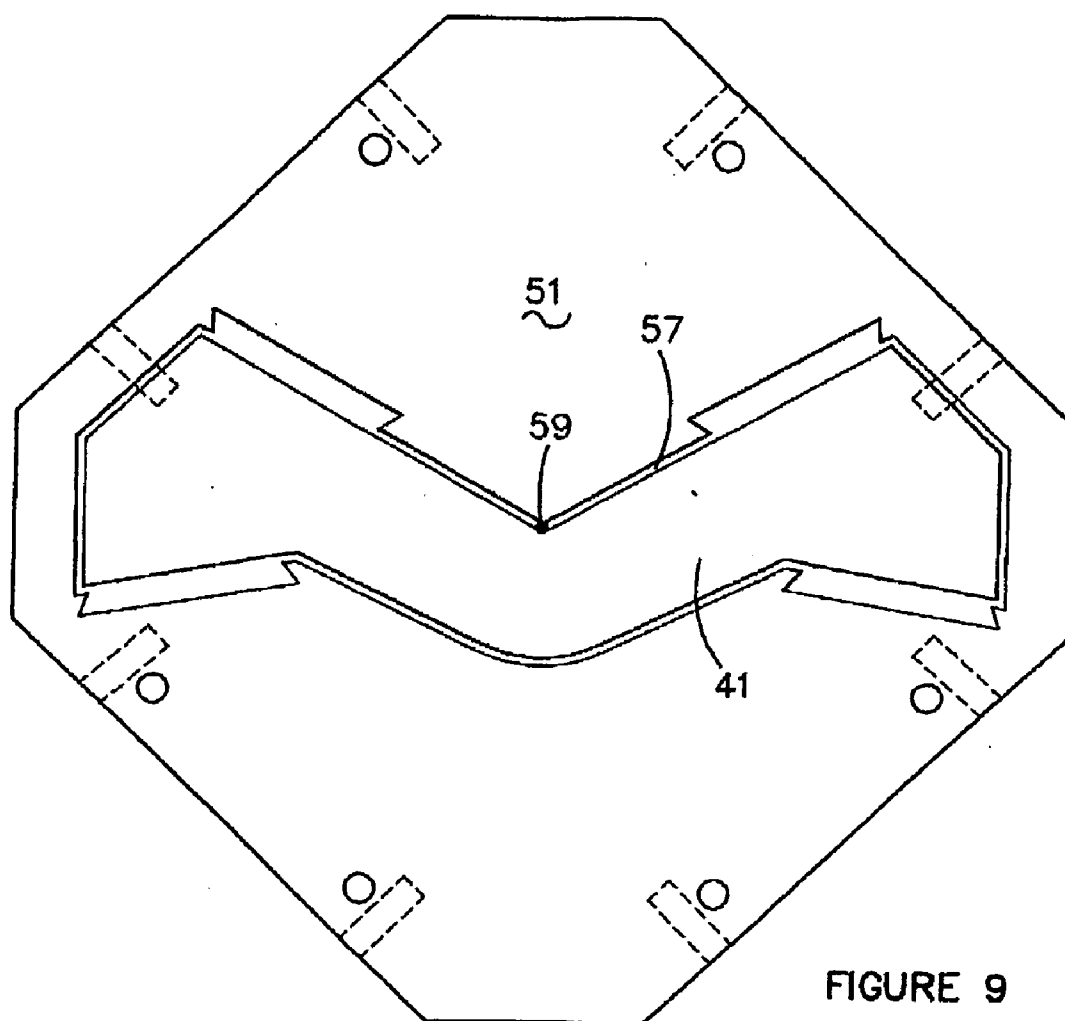


FIGURE 9

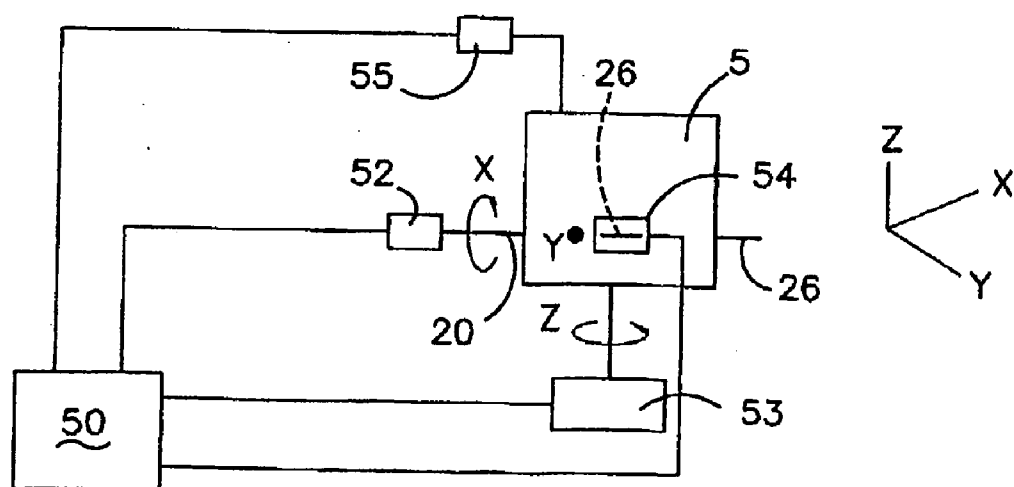


FIGURE 10

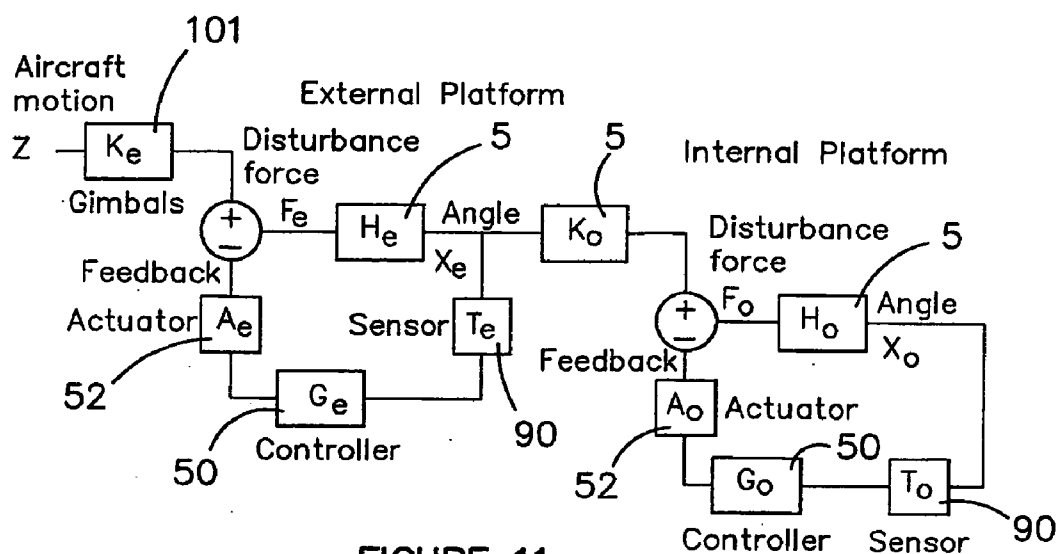


FIGURE 11

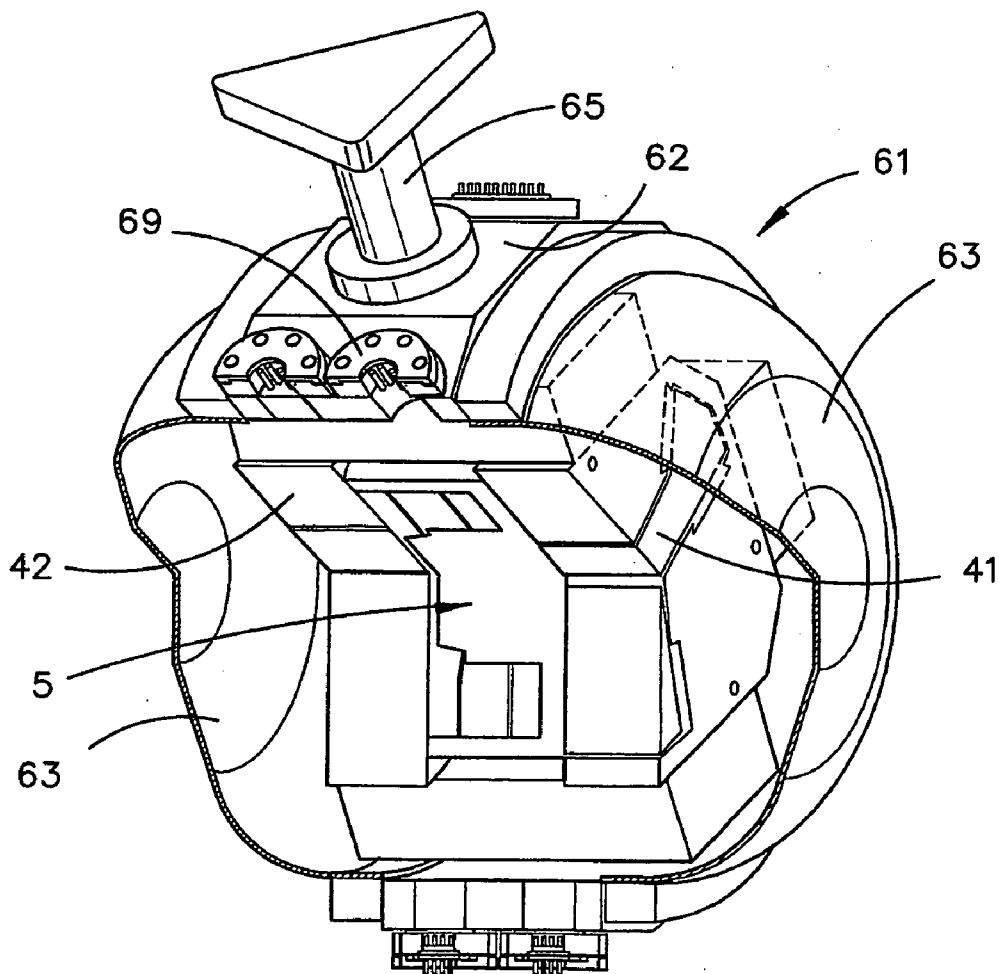


FIGURE 12

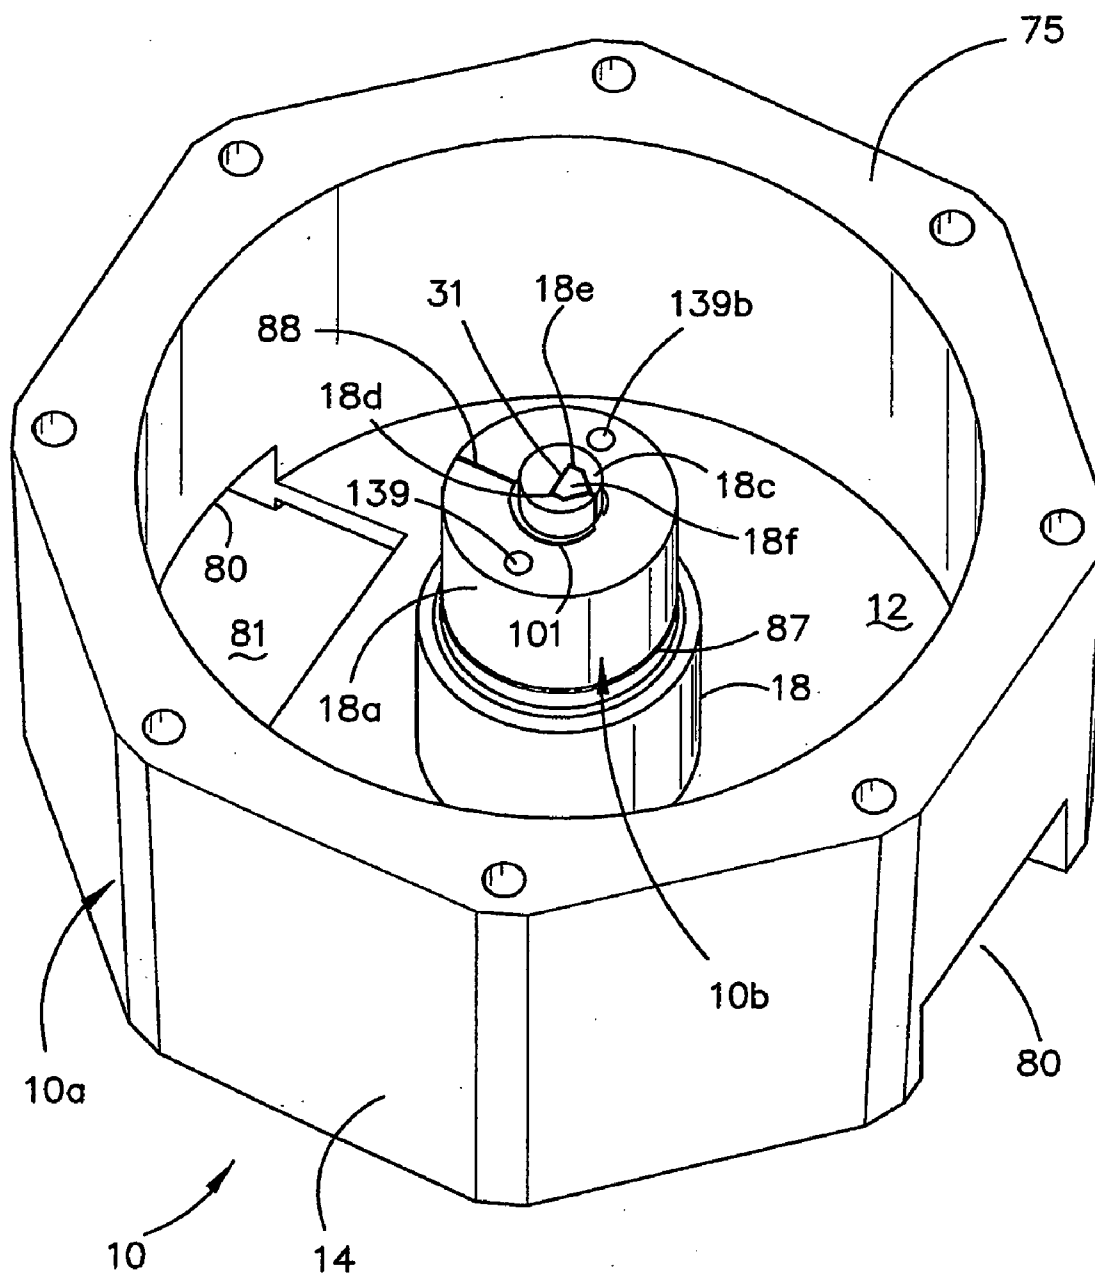


FIGURE 13

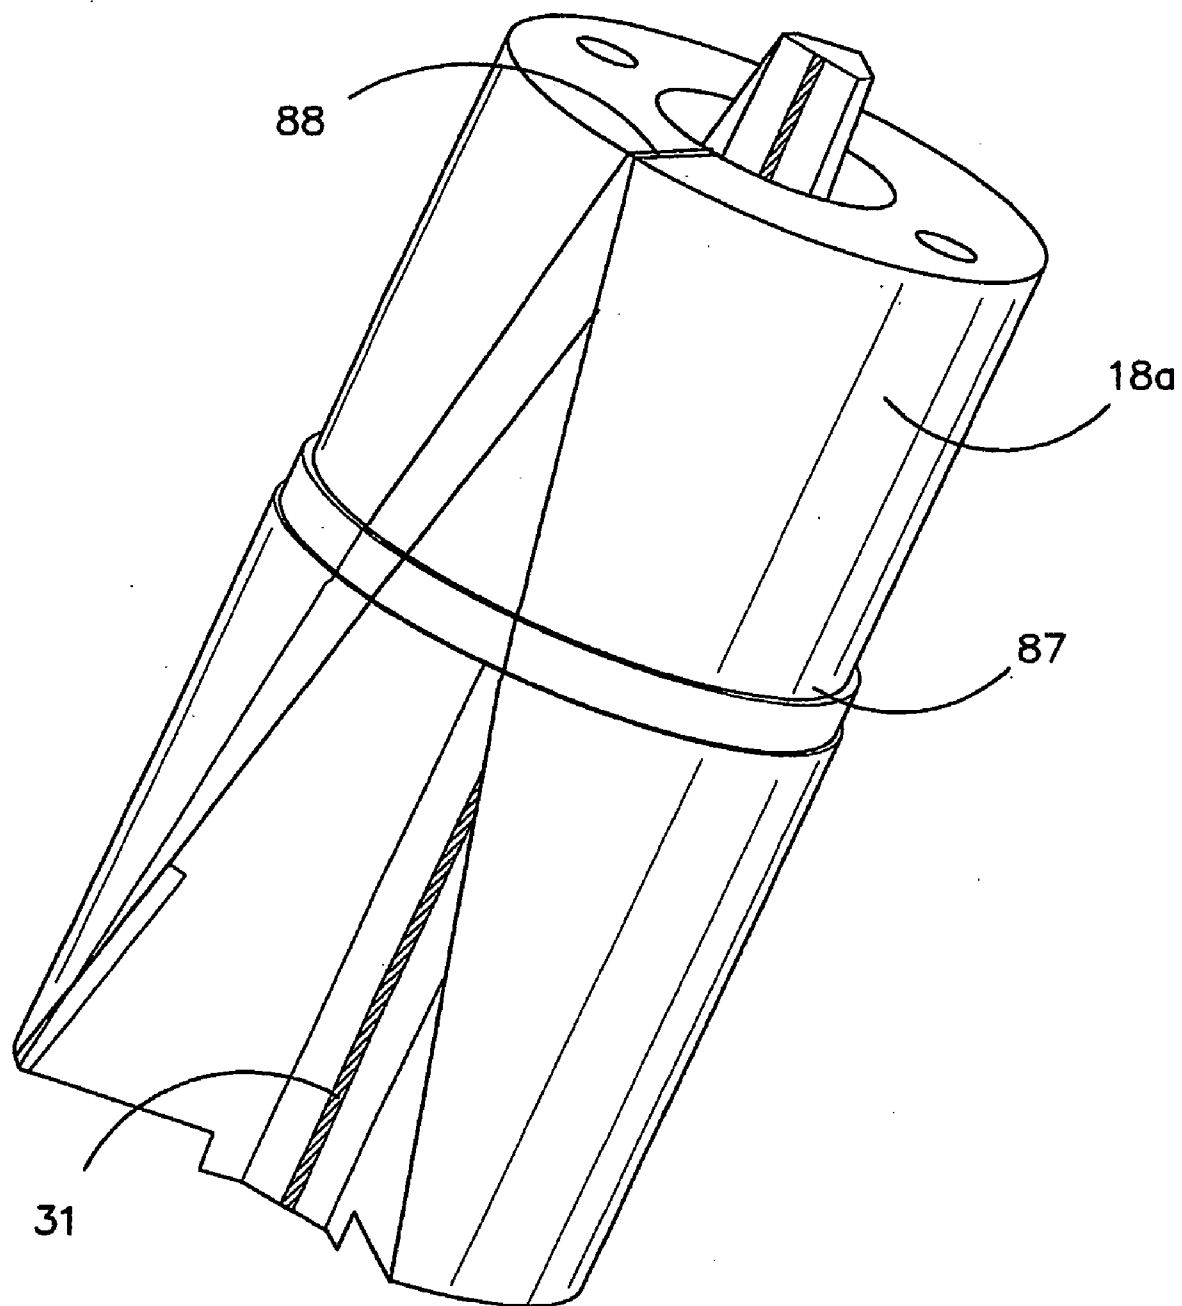


FIGURE 14

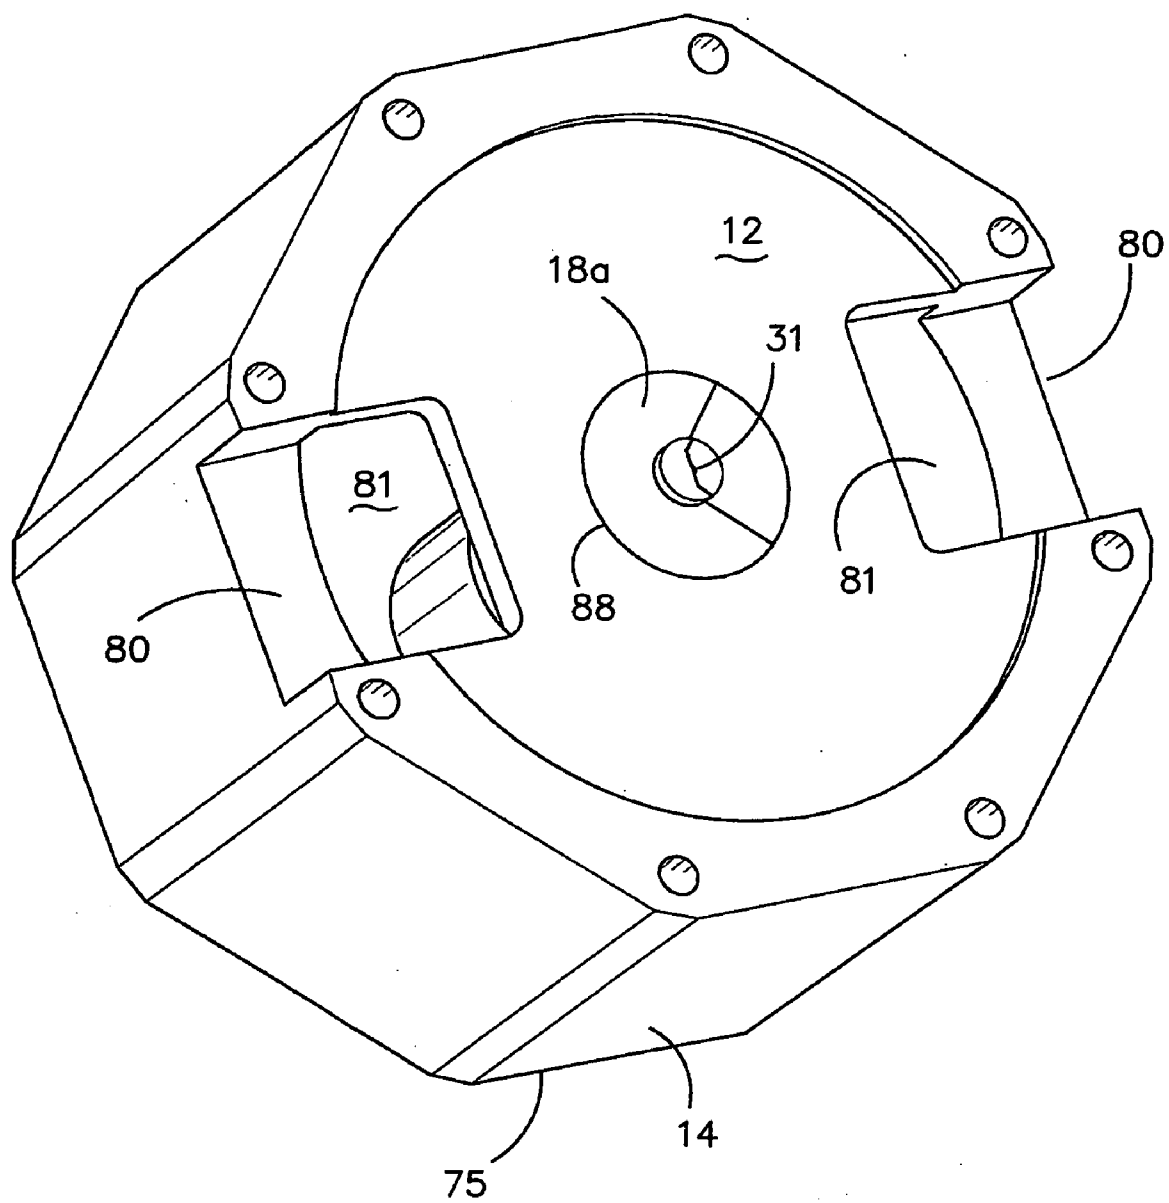


FIGURE 15

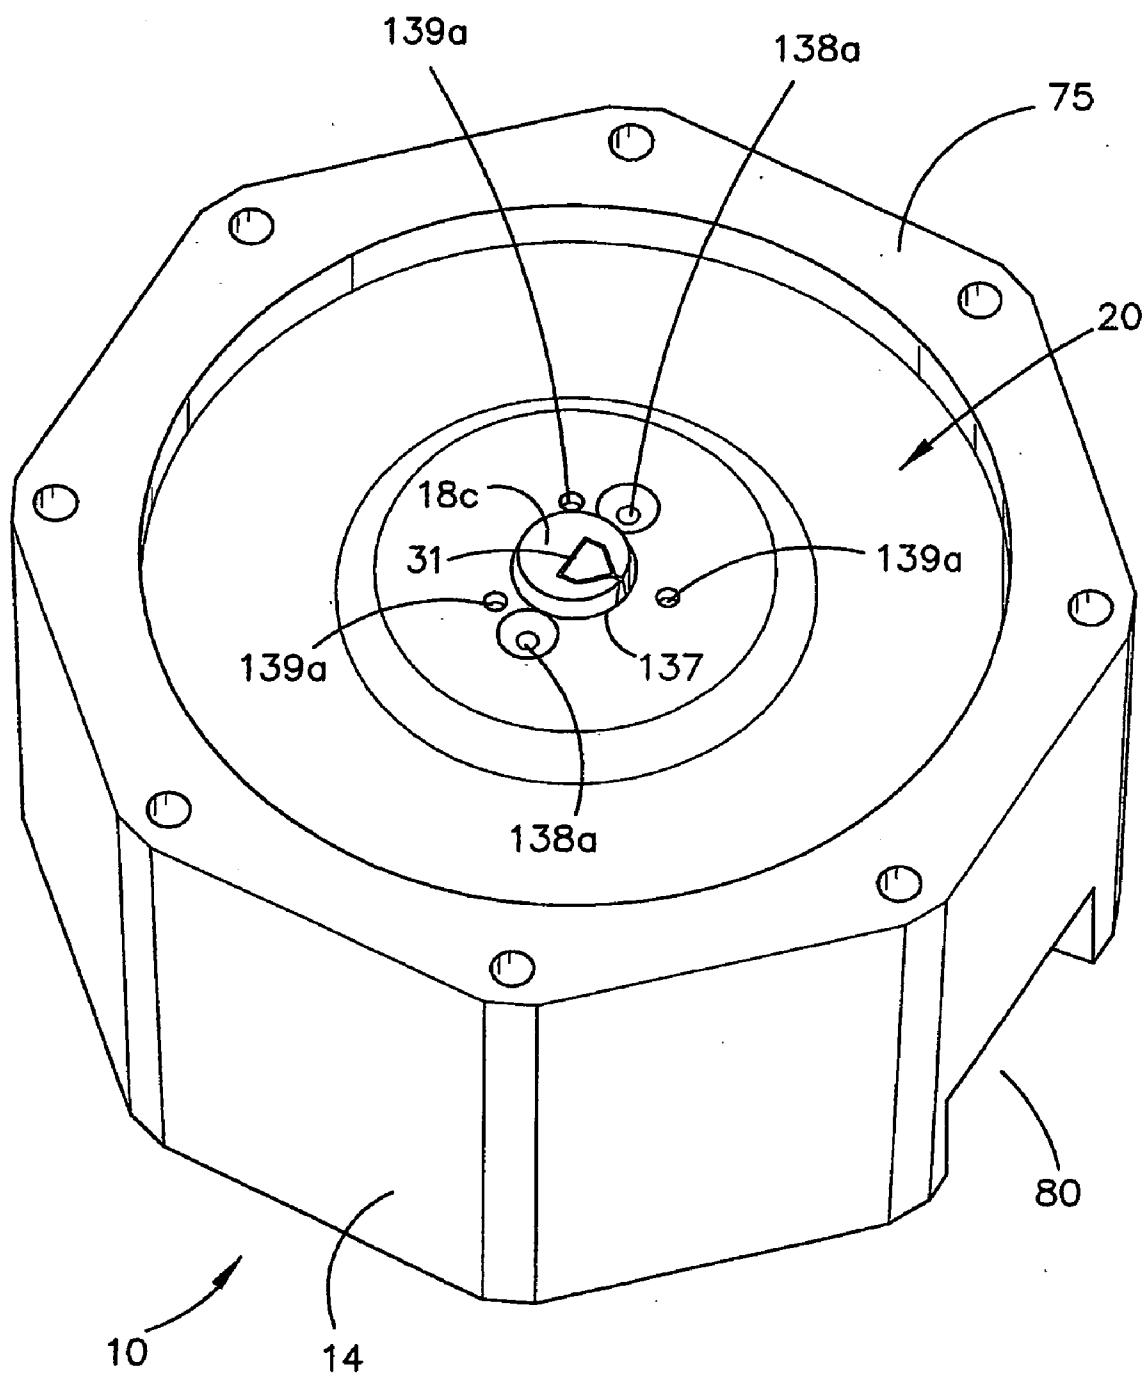
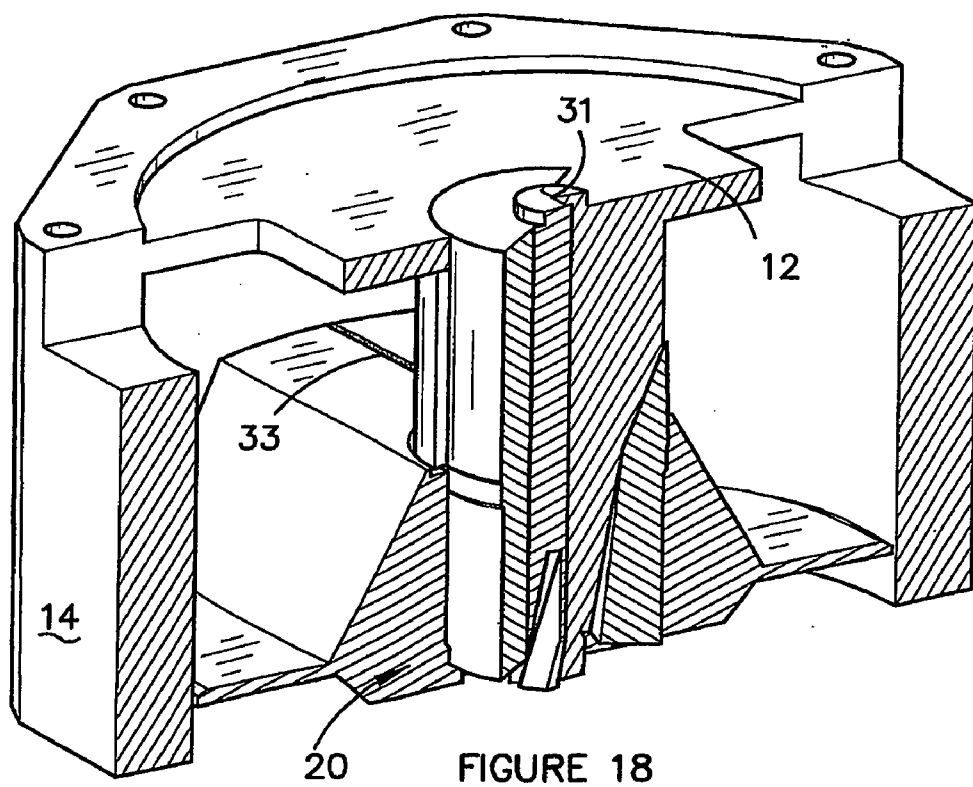
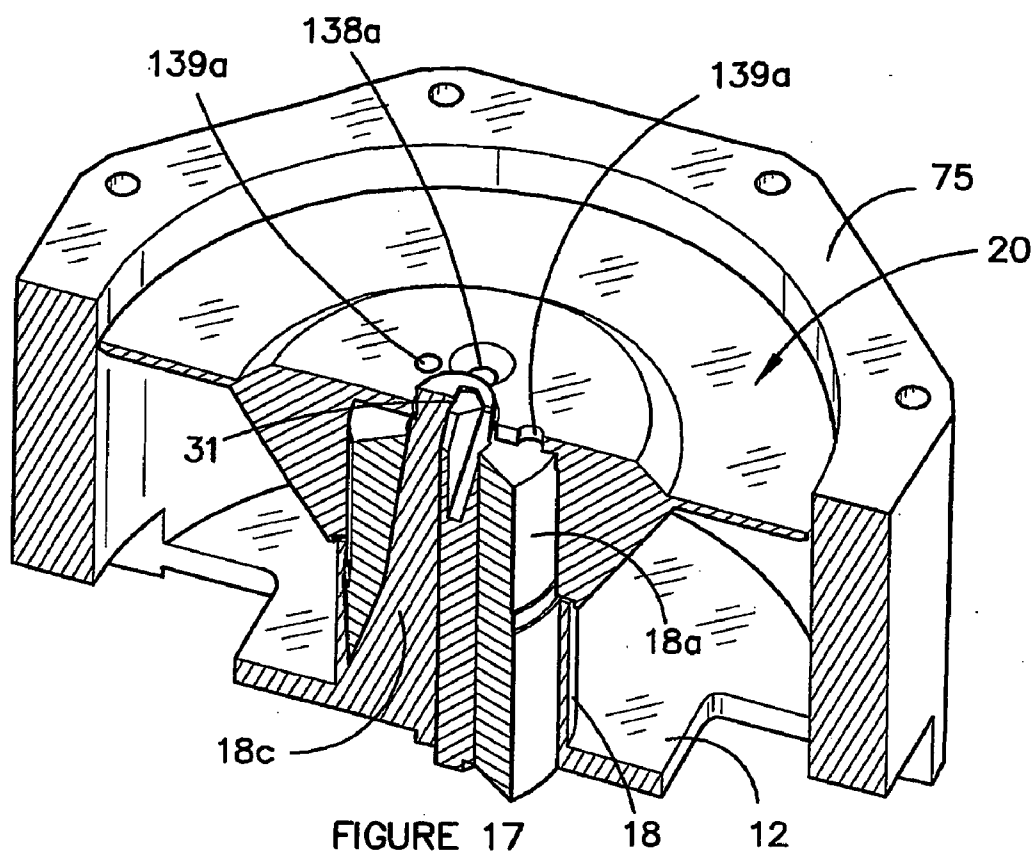


FIGURE 16



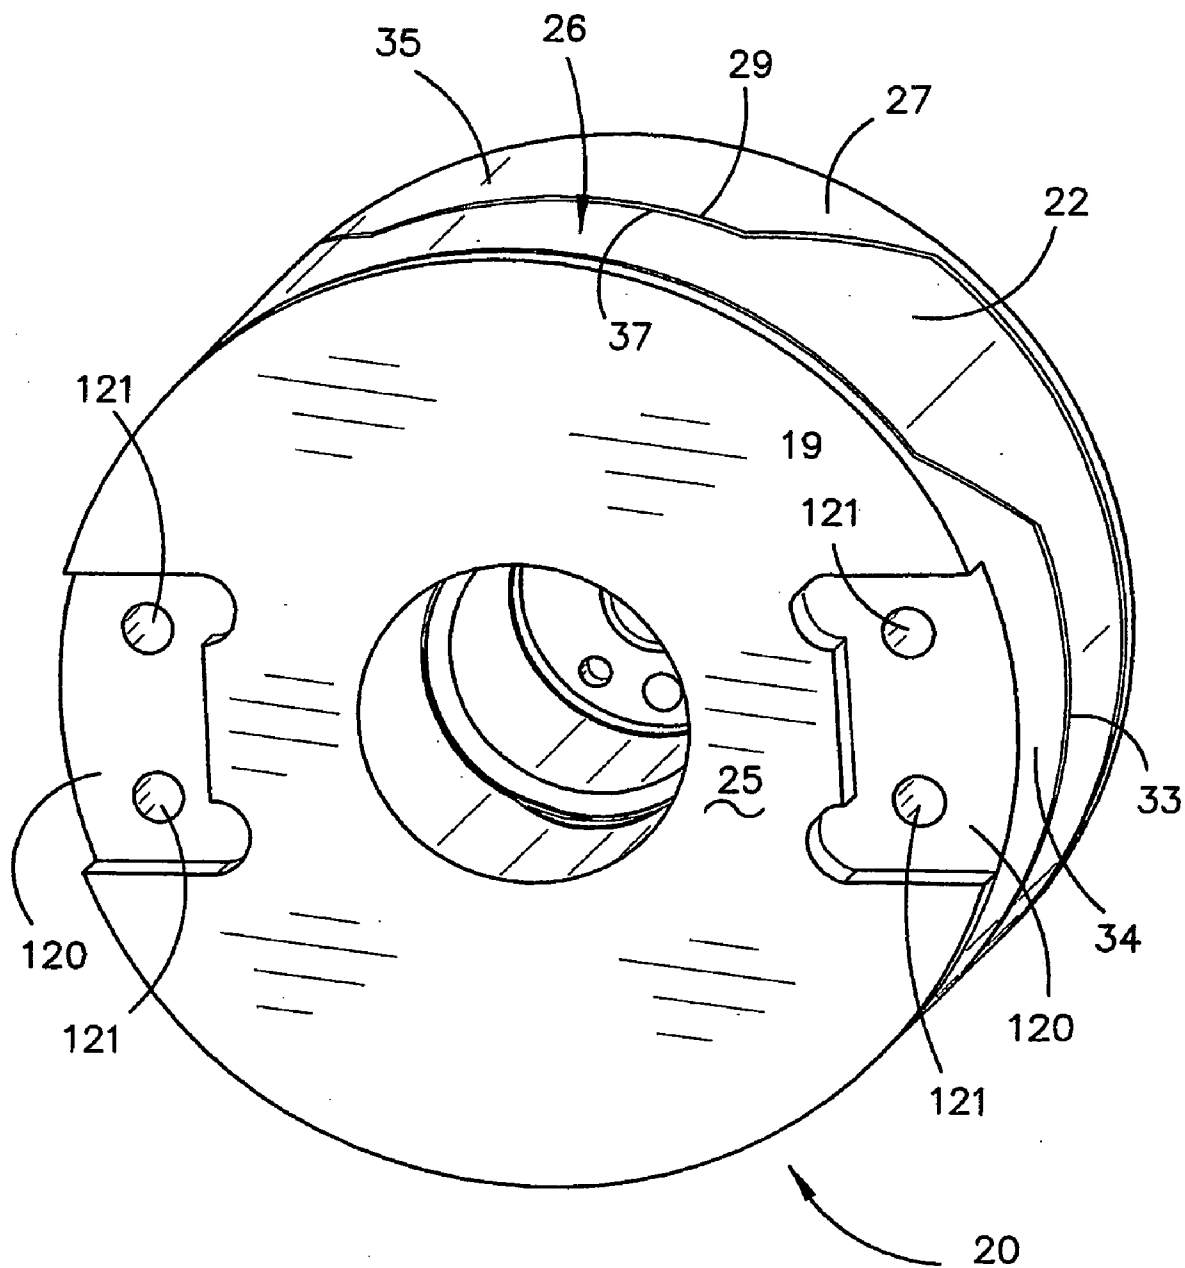


FIGURE 19

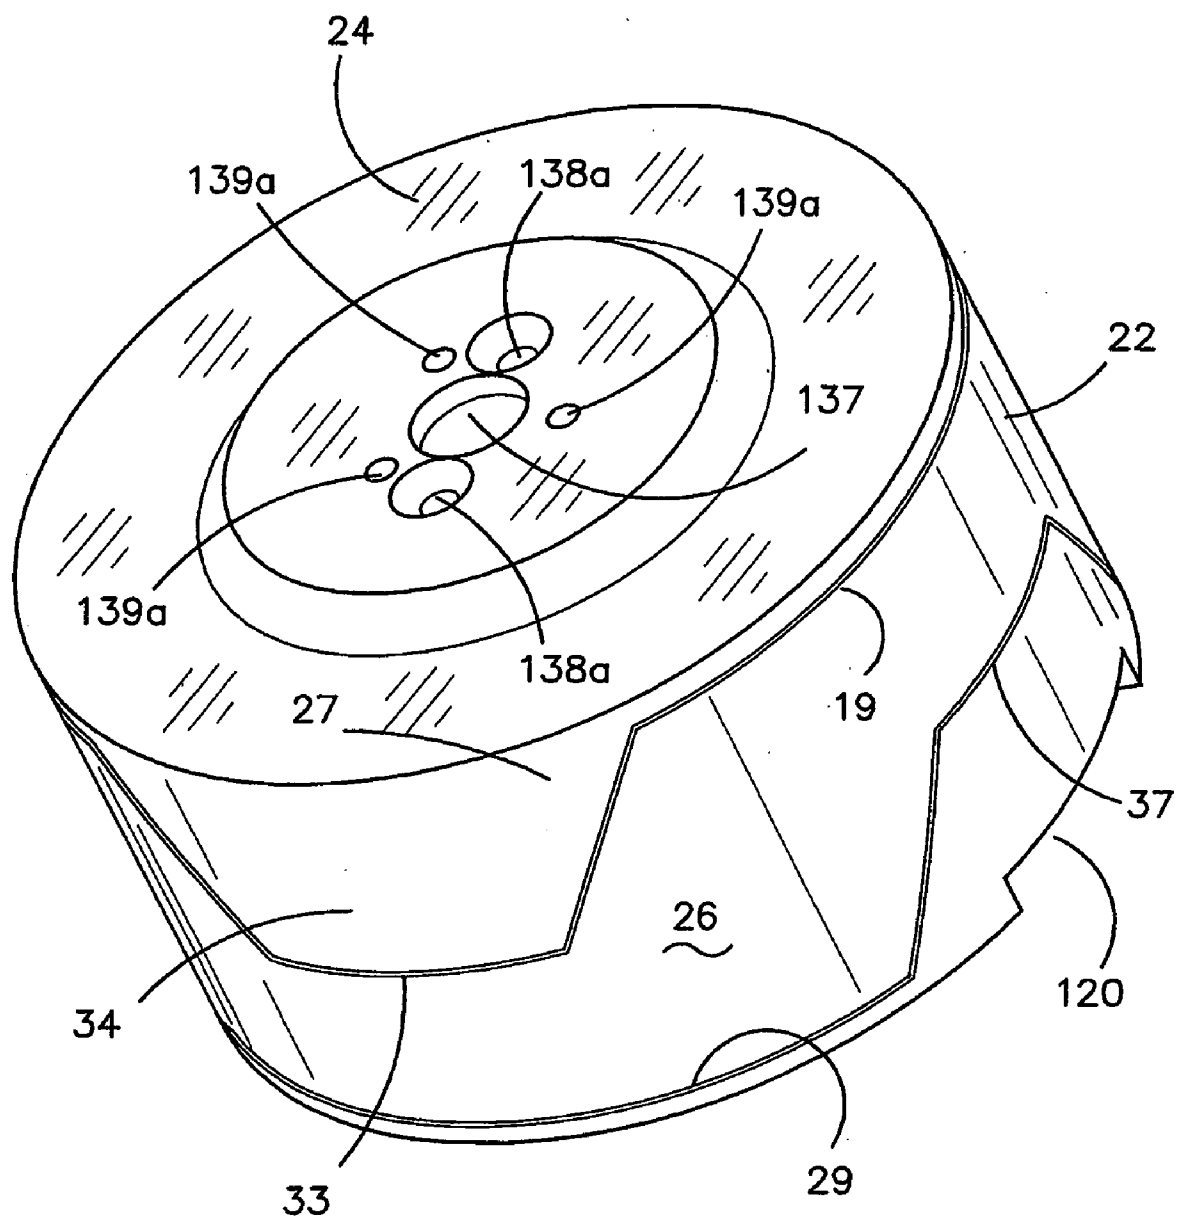


FIGURE 20

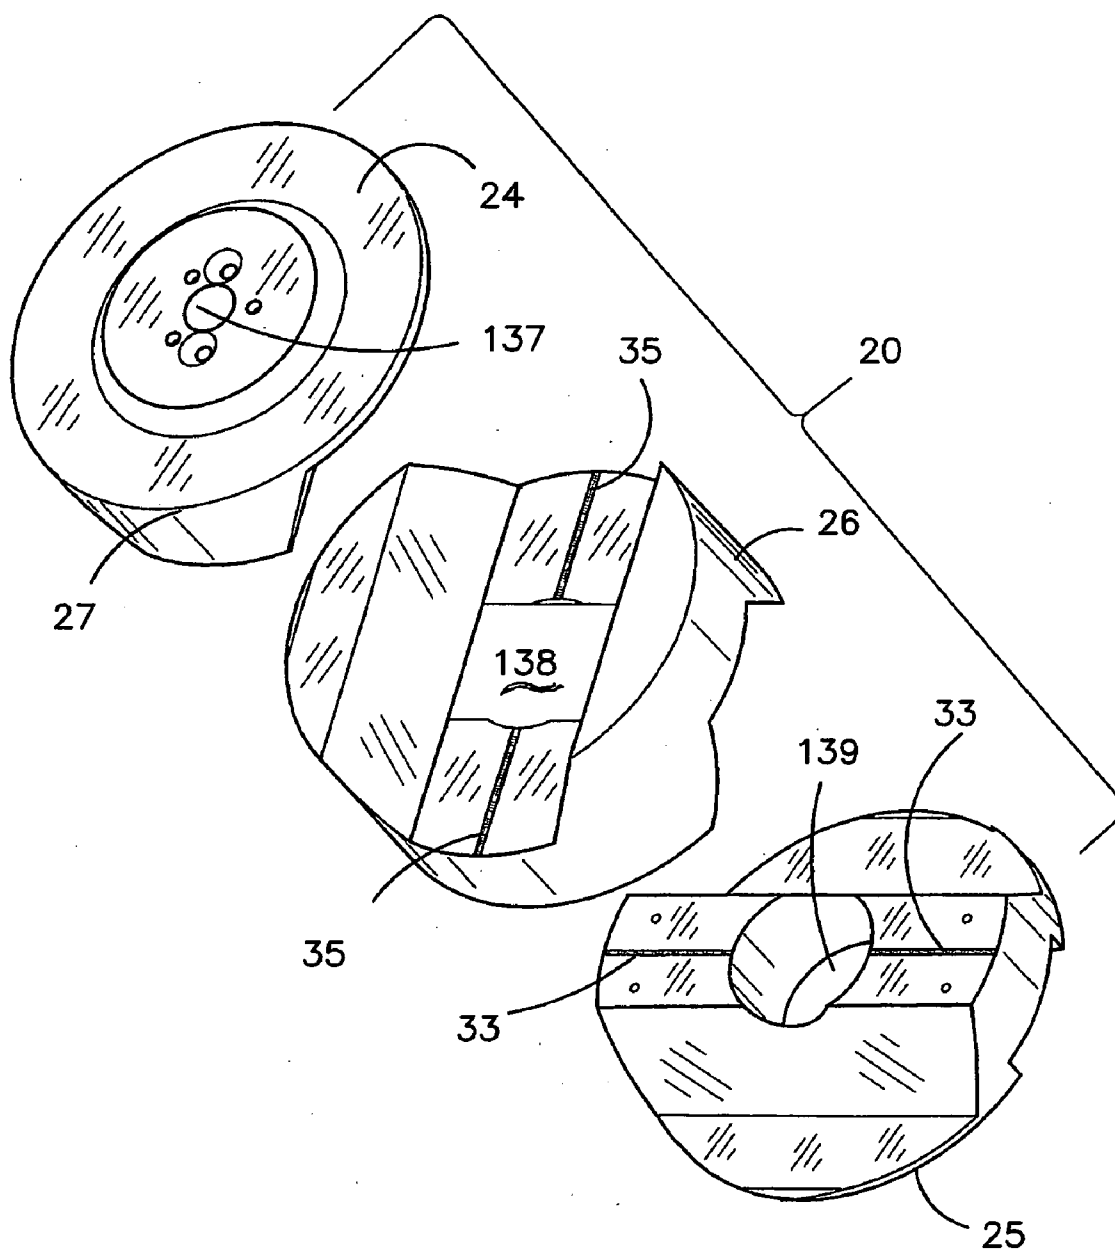


FIGURE 21

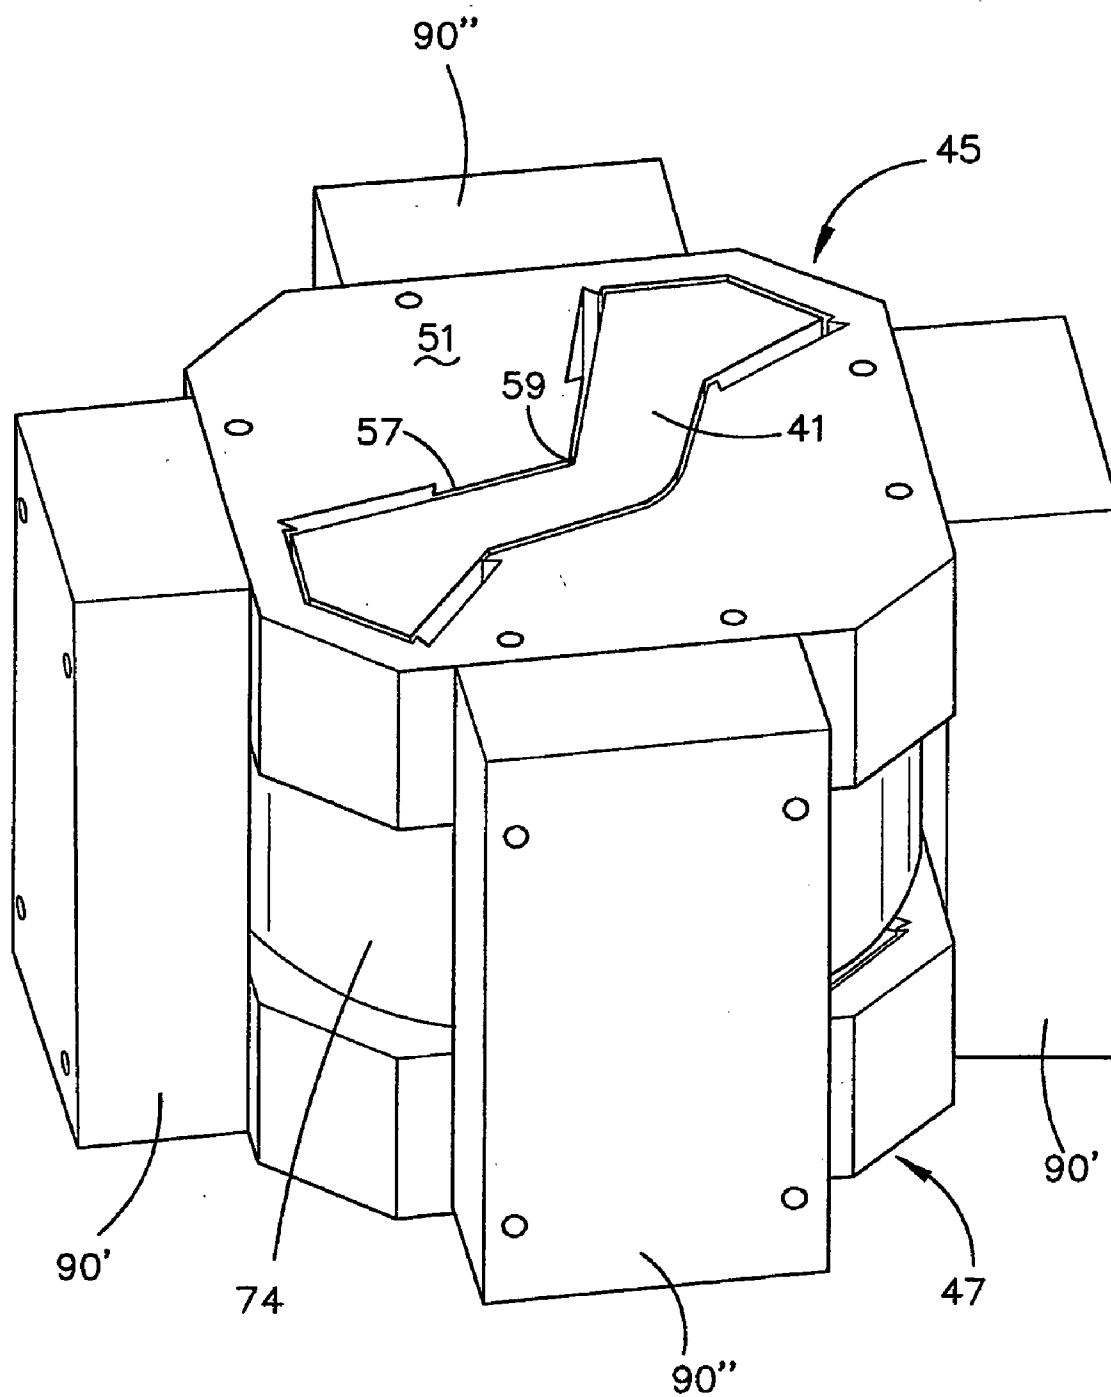


FIGURE 22

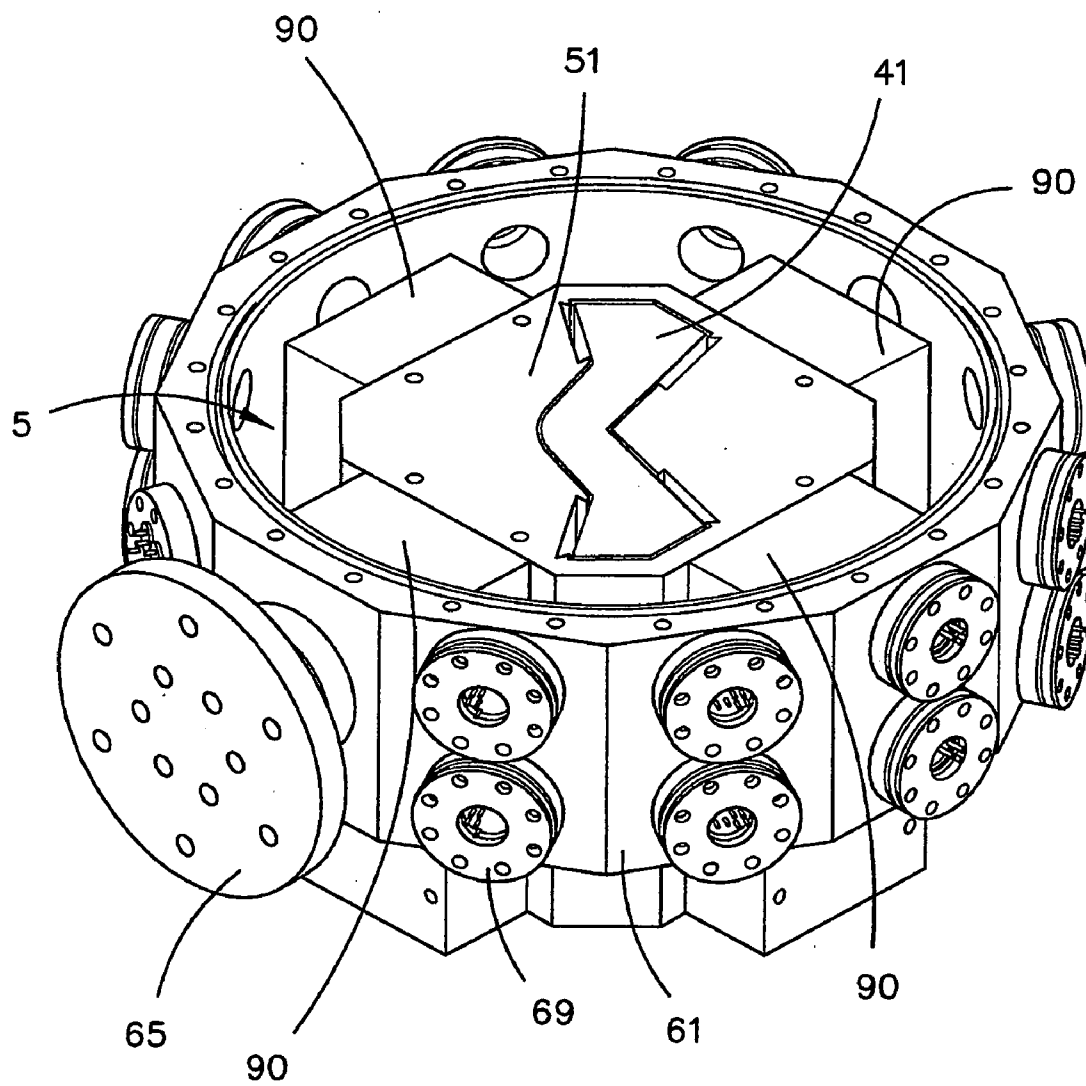


FIGURE 23

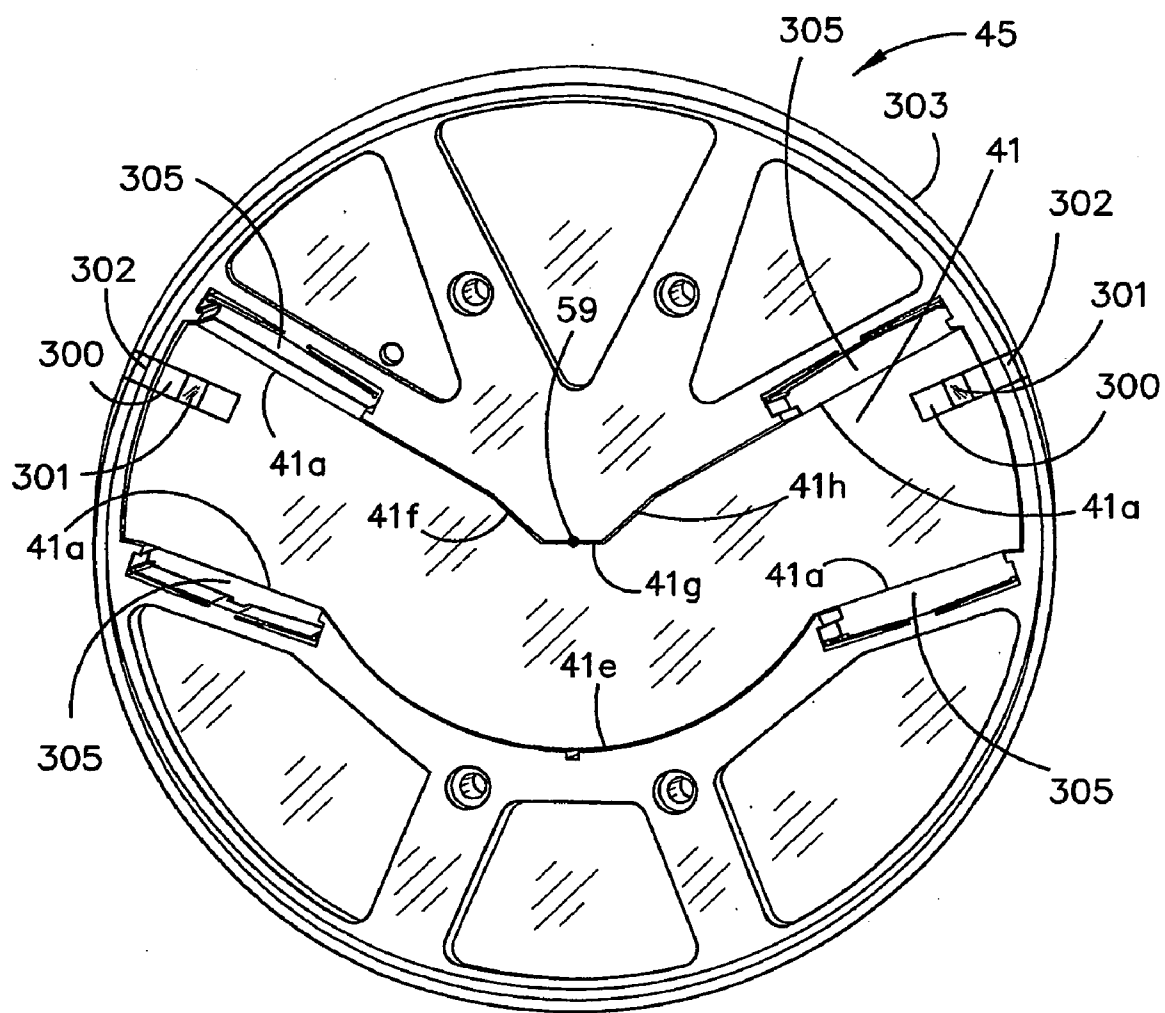


FIGURE 24

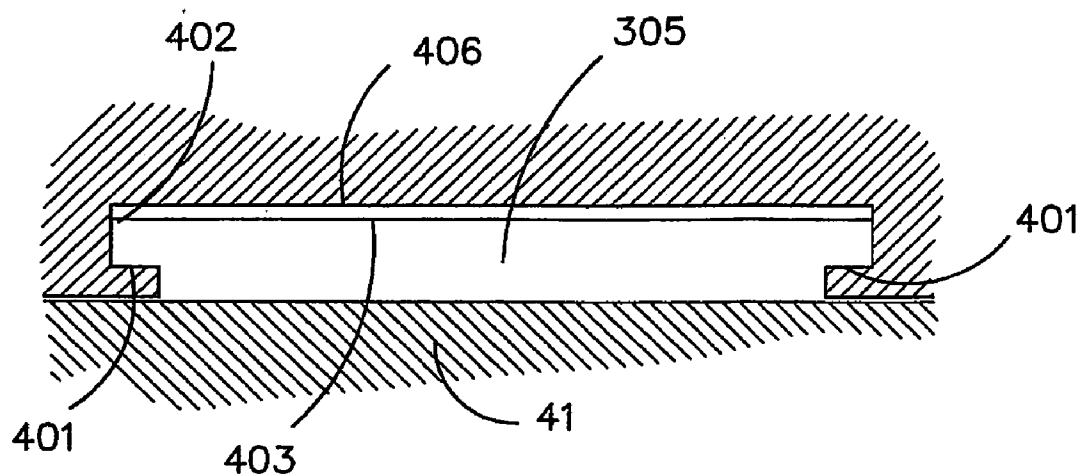


FIGURE 25

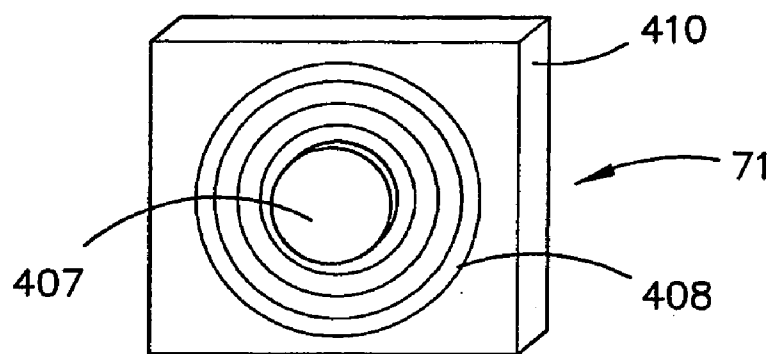


FIGURE 26

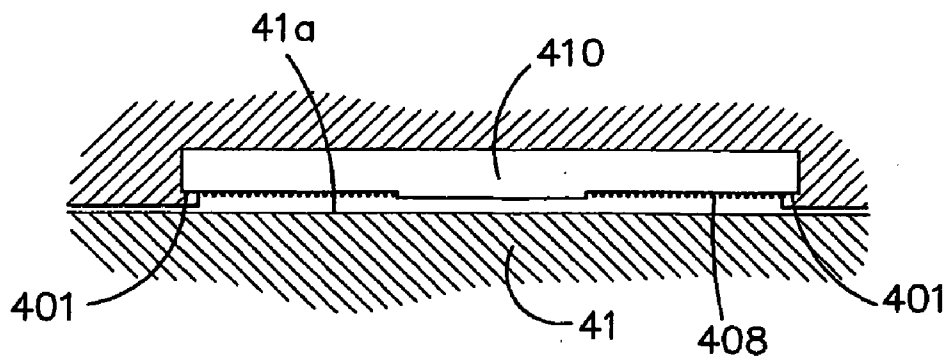


FIGURE 27

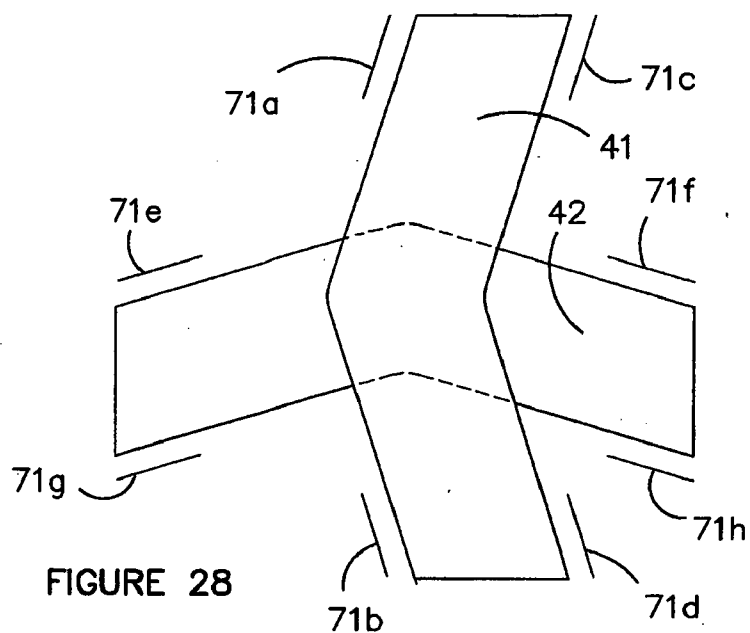


FIGURE 28

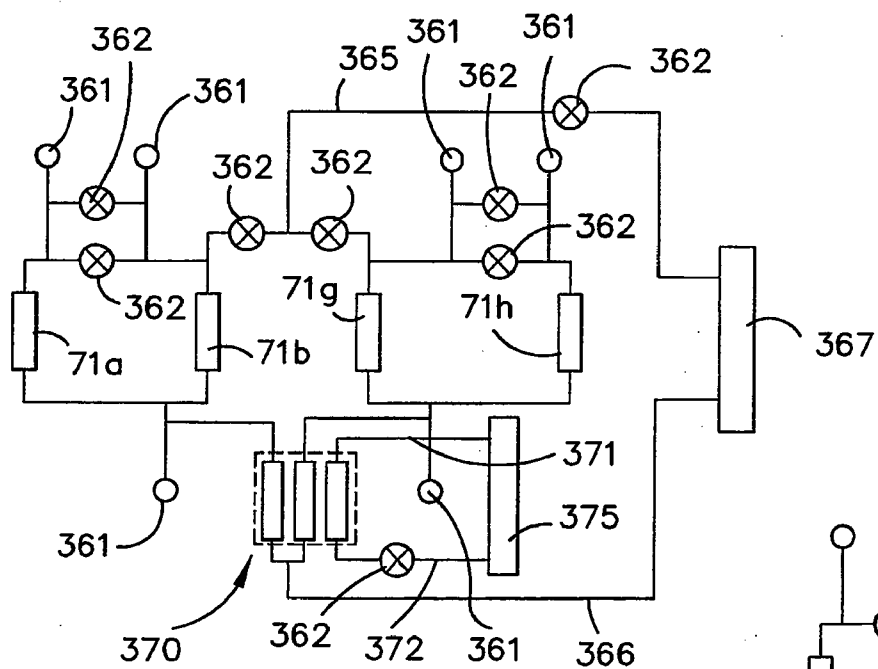


FIGURE 29


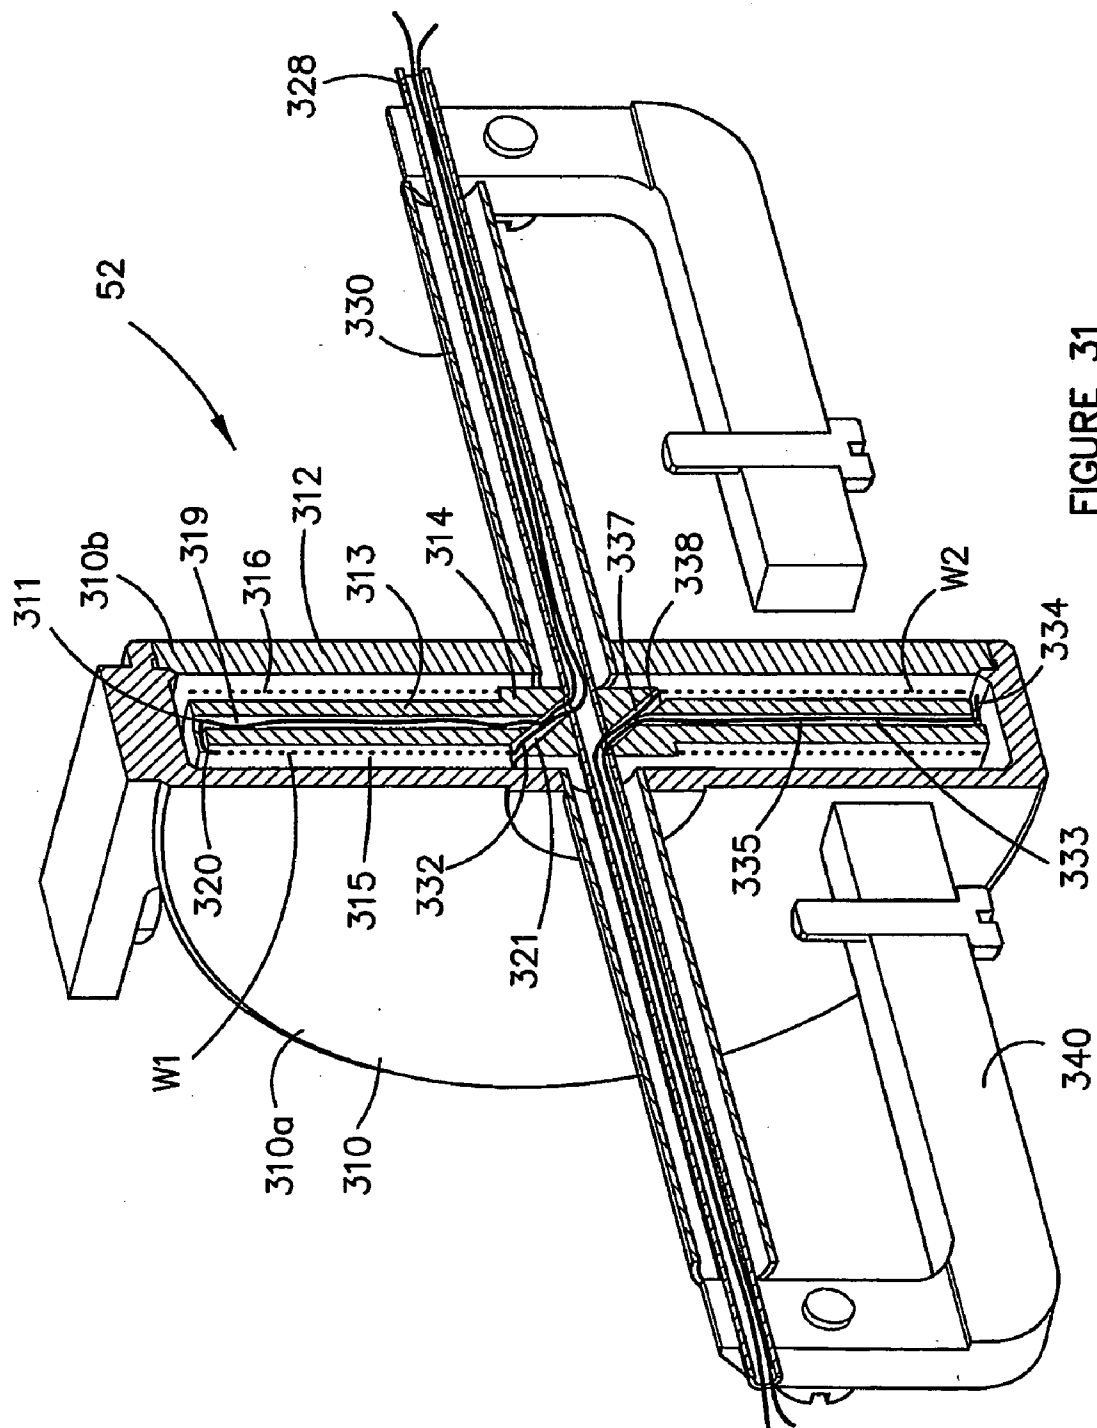


FIGURE 30



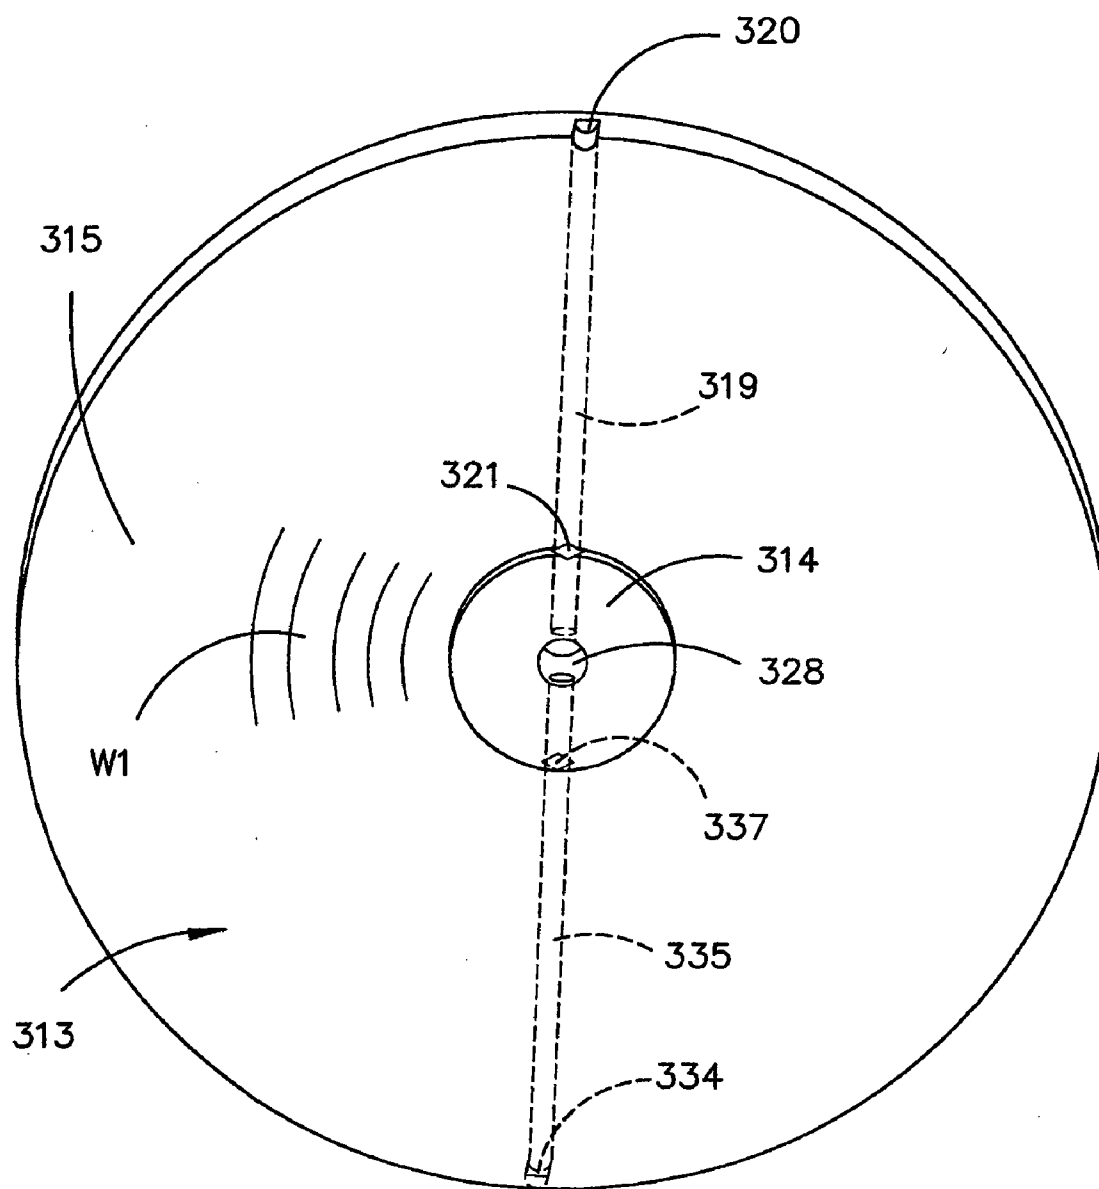


FIGURE 32

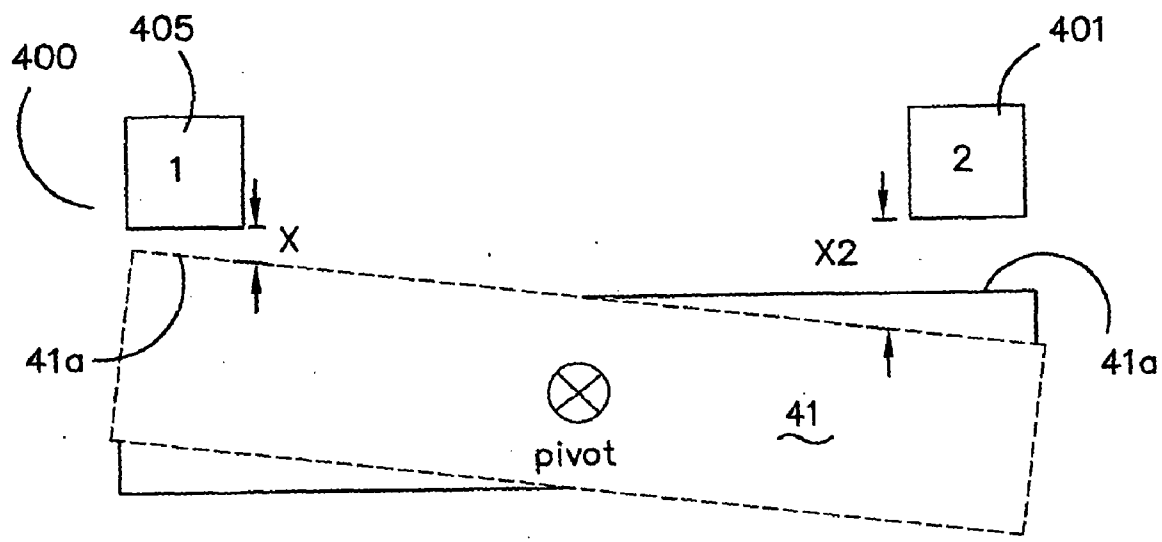


FIGURE 33

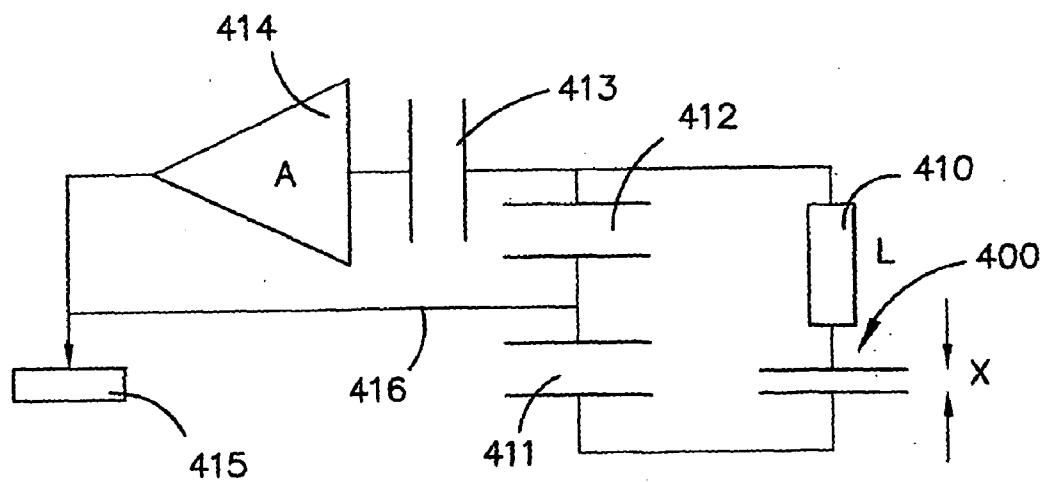


FIGURE 34

GRAVITY GRADIOMETER

FIELD OF THE INVENTION

[0001] This invention relates to a gravity gradiometer, and in particular, but not exclusively, to a gravity gradiometer for airborne use. The invention has particular application for measuring diagonal and off-diagonal components of the gravitational gradient tensor.

BACKGROUND OF THE INVENTION

[0002] Gravimeters are widely used in geological exploration to measure the first derivatives of the earth's gravitational field. Whilst some advances have been made in developing gravimeters which can measure the first derivatives of the earth's gravitational field because of the difficulty in distinguishing spatial variations of the field from temporal fluctuations of accelerations of a moving vehicle, these measurements can usually be made to sufficient precision for useful exploration only with land-based stationary instruments.

[0003] Gravity gradiometers (as distinct from gravimeters) are used to measure the second derivative of the gravitational field and use a sensor which is required to measure the differences between gravitational forces down to one part in 10^{12} of normal gravity.

[0004] Typically such devices have been used to attempt to locate deposits such as ore deposits including iron ore and geological structures bearing hydrocarbons.

[0005] International publication WO 90/07131 partly owned by the present applicants associated company discloses a gravity gradiometer. The gradiometer includes a gimbal bearing arrangement comprised of three concentric rings in which is mounted the sensing equipment. The sensing equipment generally comprises two spaced apart bars respectively located in shielded housings and each mounted on a web bearing. The instrument disclosed in that application is relatively complicated in that it includes a large number of parts and is relatively heavy which is a disadvantage particularly in airborne applications.

SUMMARY OF THE INVENTION

[0006] The invention provides a gravity gradiometer for measuring components of the gravitational gradient tensor, comprising:

[0007] a sensor for measuring the components of the gradient tensor;

[0008] a mounting for supporting the sensor, the mounting comprising:

[0009] a first mount section having a base and a first mount peripheral wall, the peripheral wall having a plurality of cut-outs, the first mount section being mountable for rotation about a first axis;

[0010] a second mount section for mating with the first mount section, the second mount section having a peripheral wall; and

[0011] connectors extending outwardly from the peripheral wall and which pass through the respective cut-outs in the first mount section so as to mount the second mount section and therefore the first mount section for rotation about a second axis and a third axis; and

[0012] wherein the connectors are for connecting the first and second mount sections in a Dewar for cryogenic operation of the gradiometer.

[0013] The form of the mounting according to this aspect of the invention avoids much of the weight of the gimbal rings used in prior art designs. Thus, gradiometers made in accordance with this aspect of the invention are of significantly decreased weight compared to previous designs.

[0014] Preferably the first, second and third axes are orthogonal z, x and y axes.

[0015] Preferably the connectors comprise radially extending lugs.

[0016] In one embodiment the lugs are integral with the second mount section.

[0017] In another embodiment the lugs are separate to the second mount section and are attached to the second mount section.

[0018] Preferably the sensor is a first bar and a second bar transverse with respect to the first bar, and the second mount section has first, second and third parts.

[0019] In the preferred embodiment of the invention the first bar is connected to the first mount section and the second bar is connected to the first mount section.

[0020] Most preferably the first bar and second bar are arranged orthogonal to one another.

[0021] Preferably the first mount section has a first flexural web for mounting the first mount section for rotation about the z axis.

[0022] Preferably the first flexural web divides the first mount into a primary mount portion and a secondary mount portion, the sensor being connected to one of the primary mount portion and secondary mount portion, so that the primary mount portion can pivot relative to the secondary mount portion about the first flexural web to thereby pivotally couple the first and second mount sections for pivotal movement about the first axis.

[0023] Preferably the second mount section is cylindrical and a first cut is formed in a cylindrical wall of the section to form a second flexure web which has two web portions diagonally opposite one another, and a third flexural web is formed by a second cut in the wall and is formed by two web portions diagonally opposite one another, the first cut separating the first and second parts and the second cut separating the second and third parts.

[0024] Preferably the first part has mounting lugs for mounting the mount within a Dewar for cryogenic operation of the gradiometer.

[0025] Preferably the first bar is located in a first housing which is fixed to the first mount section, the bar being connected to the first housing by a fourth flexure web for movement relative to the first housing in response to the gravitational gradient.

[0026] Preferably the second bar is located in a second housing fixed to the first mount section, and connected to the housing by a fifth flexure web so the second bar can move relative to the housing in response to the gravitational gradient.

[0027] Preferably the first and second bars have associated transducers for outputting a signal indicative of movement of the bars in response to the gravitational gradient.

[0028] Preferably the first housing and first bar is a monolithic structure and the second housing and the second bar is a monolithic structure.

[0029] Preferably the second mount section is a monolithic structure.

[0030] In the preferred embodiment of the invention actuators are provided for moving the mount about the three

orthogonal axes so as to stabilise orientation of the sensor during use of the gradiometer.

[0031] Preferably the actuators are computer controlled.

[0032] Preferably linear and angular accelerometers are provided.

BRIEF DESCRIPTION OF THE DRAWINGS

[0033] Preferred embodiments of the invention would be described, by way of example, with reference to the accompanying drawings, in which:

[0034] FIG. 1 is a schematic view of a gradiometer of one embodiment of the invention.

[0035] FIG. 2 is a perspective view of a first mount forming part of a mounting of the gradiometer of the preferred embodiment;

[0036] FIG. 3 is a view of a second mount of the mounting;

[0037] FIG. 4 is a view from underneath the mount of FIG. 3;

[0038] FIG. 5 is a cross-sectional view along the line IV-IV of FIG. 3;

[0039] FIG. 6 is a cross-sectional view along the line V-V of FIG. 3;

[0040] FIG. 7 is a view of the assembled structure;

[0041] FIG. 8 is a view showing the sensor mounted on the gimbal structure;

[0042] FIG. 9 is a plan view of a bar of the preferred embodiment;

[0043] FIG. 10 is a diagram showing actuator control;

[0044] FIG. 11 is a block diagram showing operation of the rotatable support system;

[0045] FIG. 12 is a view of a gradiometer of the preferred embodiment;

[0046] FIG. 13 is a view of a first mount of a second embodiment;

[0047] FIG. 14 is a view of part of the mounting of FIG. 13 to illustrate the location and extent of the flexural web of the first mount;

[0048] FIG. 15 is a view of the mounting of FIG. 13 from beneath;

[0049] FIG. 16 is a view of the mounting of FIG. 13 including a second mount of the second embodiment;

[0050] FIG. 17 is a cross-sectional view through the assembly shown in FIG. 16;

[0051] FIG. 18 is a view from beneath of the section shown in FIG. 17;

[0052] FIG. 19 is a view from beneath of the second mount of the second embodiment;

[0053] FIG. 20 is a view of the second mount of FIG. 19 from above;

[0054] FIG. 21 is an exploded view of the second mount of the second embodiment;

[0055] FIG. 22 is view of the assembled mounting and sensors according to the second embodiment;

[0056] FIG. 23 is a perspective view of the gradiometer with some of the outer vacuum container removed;

[0057] FIG. 24 is a plan view of a housing for supporting a bar according to a further embodiment of the invention;

[0058] FIG. 25 is a more detailed view of part of the housing of FIG. 24;

[0059] FIG. 26 is a view of a transducer used in the preferred embodiment;

[0060] FIG. 27 is a view similar to FIG. 25 but showing the transducer of FIG. 26 in place;

[0061] FIG. 28 is a diagram to assist explanation of the circuits of FIGS. 29 and 30;

[0062] FIG. 29 is a circuit diagram relating to the preferred embodiment of the invention, particularly showing use of one of the sensors as an angular accelerometer;

[0063] FIG. 30 is a frequency tuning circuit;

[0064] FIG. 31 is a cross-sectional view through an actuator according to one embodiment of the invention;

[0065] FIG. 32 is a view of part of the actuator of FIG. 31;

[0066] FIG. 33 is a diagram illustrating balancing of the sensors of the gradiometer of the preferred embodiment; and

[0067] FIG. 34 is a circuit diagram of a calibration sensor used when balancing the gradiometer.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0068] FIG. 1 is a schematic view of a gravity gradiometer according to the preferred embodiment of the invention.

[0069] The gradiometer shown in FIG. 1 comprises a double walled Dewar 1 which is supported in an external platform 2. The external platform 2 enables adjustment of the Dewar and therefore the contents of the Dewar about three orthogonal axes. The external platform 2 is generally known and its adjustment by suitable motors or the like is also known. Thus, a detailed description will not be provided.

[0070] A vacuum canister 3 is provided in the Dewar and the Dewar is supplied with liquid gas such as liquid helium He so that the gradiometer can operate at cryogenic temperature. The Dewar 1 is closed by an end plate 4 which includes connectors 5a for connecting electrical leads (not shown) to external components (not shown).

[0071] The canister 3 is closed by an end plate 9 which includes connectors 5b for connecting electric leads (not shown) to the connectors 5a. The gradiometer has a main casing 61 formed from a twelve-sided ring 62 and hemispherical domes 63 (see FIG. 12). An internal mounting 5 is connected to the ring 62. The ring 62 carries a support 65 to which a feed through flange 9 is coupled. A neck plug 11 formed of baffles 11a which sandwich foam 11b is provided above the canister 3. The baffles 11a are supported on a hollow rod 93 which extends to the canister 3 and which is also used to evacuate the canister 3.

[0072] With reference to FIG. 2 a first mount 10 of a rotatable mounting 5 (FIG. 7) of the gradiometer is shown which comprises a base 12 and an upstanding peripheral wall 14. The peripheral wall 14 has a plurality of cut-outs 16. The base 12 supports a hub 18.

[0073] FIGS. 3 and 4 show a second mount 20 which comprises a peripheral wall 22 and a top wall 24. The peripheral wall 22 has four lugs 13 for connecting the mount to the casing 61. The top wall 24 and the peripheral wall 22 define an opening 28. The peripheral wall 22 has a first part 25, a second part 26 and a third part 27. The second mount 20 is a monolithic integral structure and the first part 25 is formed by making a circumferential cut 19 through the peripheral wall except for the formation of flexure webs as will be described hereinafter. The third part 27 is formed by making a second circumferential cut 29 through the peripheral wall 22 except for flexure webs which will also be described hereinafter. The second mount 20 is mounted on the first mount 10 by locating the hub 18 into the opening 28 and the lugs 13 through respective cut-outs 16 as is shown in FIG. 7.

[0074] The first mount 10 is joined to the second mount 20. The first flexure web 31 is formed in the first mount 10 so a

primary mount portion of the mount **10** can pivot about a web **31** relative to a secondary mount portion of the mount **10**. This will be described in more detail with reference to the second embodiment shown in FIGS. **13** to **21**.

[0075] The lugs **13** connect the mounting **5** in the canister **3** which, in turn, locates in the Dewar **1** for cryogenic operation of the gradiometer.

[0076] The Dewar is in turn mounted in a first external platform for course rotational control of the gradiometer about three orthogonal x, y, x axes. The mounting **5** mounts the sensor **40** (which will be described in more detail herein-after and which is preferably in the form of a mass quadrupole) for much finer rotational adjustment about the x, y and z axes for stabilising the gradiometer during the taking of measurements particularly when the gradiometer is airborne.

[0077] The first flexure web **31** allows the first mount **10** to move relative to the second mount **20** about a z axis shown in FIG. **7**.

[0078] FIGS. **5** and **6** are views along the lines IV and V respectively which in turn are along the cuts **19** and **29** shown in FIG. **3**. The peripheral wall **22** may be cut by any suitable cutting instrument such as a wire cutter or the like. FIG. **5** shows the bottom surface **19a** formed by the cut **27**. As is apparent from FIGS. **3** and **5** the cut **27** has two inverted v-shaped peaks **34**. The apex of the peaks **34** is not cut and therefore form a second flexure web **33** which join the first part **25** to the second part **26**. Thus, the second part **26** is able to pivotally rotate relative to the first part **25** about the x axis in FIG. **7**. The second cut **29** is shown in FIG. **6** and again the bottom surface **29a** formed by the cut **29** is visible. Again the second cut **29** forms two v-shaped peaks **35** and the apexes of the peaks **35** are not cut and therefore form a third flexure web **37** which connect the second part **26** to the third part **27**. Thus, the third part **27** is able to pivotal rotate about the y axis shown in FIG. **7**.

[0079] FIG. **8** shows sensor **40** mounted on the mounting. The sensor **40** is an Orthogonal Quadrupole Responder—OQR sensor formed of a first mass and a second mass in the form of a first bar **41** and a second bar **42** (not shown in FIG. **8**) orthogonal to the bar **41** and which is of the same shape as the bar **41**.

[0080] The bar **41** is formed in a first housing **45** and the bar **42** is formed in a second housing **47**. The bar **41** and housing **45** is the same as bar **42** and the housing **47** except that one is rotated 90° with respect to the other so that the bars are orthogonal. Hence only the housing **45** will be described.

[0081] The housing **45** has an end wall **51** and a peripheral side wall **52a**. The end wall **51** is connected to rim **75** (FIGS. **2** and **7**) of the wall **14** of the first mount **10** by screws or the like (not shown). The bar **41** is formed by a cut **57** in the wall **51** except for a fourth flexure web **59** which joins the bar **41** to the wall **51**. The flexure web is shown enlarged in the top view of the bar **41** in FIG. **9**. Thus, the bar **41** is able to pivot relative to the housing **45** in response to changes in the gravitational field. The bar **42** is mounted in the same way as mentioned above and also can pivot relative to its housing **47** in response to changes in the gravitational field about a fifth flexure web **59**. The housing **47** is connected to base **12** (FIG. **2**) of the first mount **10**.

[0082] The bar **41** and the housing **45** together with the flexure web **59** are an integral monolithic structure.

[0083] Transducers **71** (not shown in FIGS. **2** to **6**) are provided for measuring the movement of the bars and for producing output signals indicative of the amount of move-

ment and therefore of the measurement of the differences in the gravitational field sensed by the bars.

[0084] FIG. **10** is a schematic block diagram showing actuator control to stabilise the gradiometer by rotating the mounting **5** about three orthogonal axes (x, y, z). A controller **50** which may be a computer, microprocessor or the like outputs signals to actuators **52**, **53**, **54** and **55**. The actuator **52** could rotate the mounting **5** about the x axis, the actuator **54** could rotate the mounting **5** about the y axis and the actuator **54** could rotate the mounting **5** about the z axis. However, in the preferred embodiment, two of the four actuators **52**, **53**, **54** and **55** are used to rotate the mounting about each axis so that rotation about each axis is caused by a combination of two linear movements provided from two actuators. The linear movement provided by each actuator will be described with reference to FIGS. **31** and **32**. The position of the mounting **5** is monitored so that appropriate feedback can be provided to the controller **50** and the appropriate control signals provided to the actuators to rotate the support **10** as is required to stabilise the support during movement through the air either within or towed behind an aircraft.

[0085] The preferred embodiment also includes angular accelerometers which are similar in shape to the bars **41** and **42** but the shape is adjusted for zero quadrupole moment. The linear accelerometers are simple pendulous devices with a single micro pivot acting as the flexural hinge.

[0086] FIG. **11** is a view of a feedback control used in the preferred embodiment.

[0087] FIG. **12** is a cut away view of the gradiometer ready for mounting in the Dewar **1** for cryogenic operation which in turn is to be mounted in the external platform. Although FIGS. **2** to **8** show the gradiometer with the bars **41** and **42** top and bottom, the instrument is actually turned on its side (90°) so that the bars **41** and **42** are at the ends as is shown in FIG. **12**.

[0088] FIG. **12** shows the mounting **5** arranged within the casing **61** and formed by the ring **62** and the transparent hemispherical ends **63**. The ring **62** has connectors **69** for connecting the internal wiring from transducers **71** (see FIG. **8**) and SQuID (Superconducting Quantum Interference Device) Electronics located in the casing **61** to the connectors **5b** (FIG. **1**).

[0089] The transducers **71** measure the angle of displacement of the bars **41** and **42** and the control circuitry (not shown) is configured to measure the difference between them.

[0090] Error correction can be performed numerically based on digitised signals from the accelerometers and a temperature sensor.

[0091] The transducers **71** are SQuID based transducers and the error correction is made possibly by the large dynamic range and linearity of the SQuID based transducers.

[0092] FIGS. **13** to **21** show a second embodiment in which like parts indicate like components to those previously described.

[0093] In this embodiment the first mount **10** has cut-outs **80** which effectively form slots for receiving lugs (not shown) which are connected to the mount **10** in the cut-outs **80** and also to the second mount **20** shown in FIGS. **19** to **21**. In this embodiment the lugs are separate components so that they can be made smaller, and more easily, made than being cut with the second mount section **20** which forms the second flexure web **33** and the third flexure web **37**.

[0094] In FIG. 13 a cut 87 is made to define the part 18a of the hub 18. The cut 87 then extends radially inwardly at 88 and then around central section 18c as shown by cut 101. The cut 101 then enters into the central section 18c along cut lines 18d and 18e to define a core 18f. The core 18f is connected to the central section 18c by the flexural web 31 which is an uncut part between the cut lines 18e and 18d. The part 10a therefore forms a primary mount portion of the mount 10 which is separated from a secondary mount portion 10a of the mount 10 except for where the portion 18a joins the portion 10a by the flexural web 31. The part 18a effectively forms an axle to allow for rotation of the part 18a relative to the part 10a in the z direction about the flexure web 31.

[0095] As is shown in FIG. 14, the cut line 88 tapers outwardly from the upper end shown in FIG. 14 to the lower end and the core 18c tapers outwardly in corresponding shape, as best shown in FIG. 17.

[0096] As is apparent from FIGS. 13 to 18, the first mount 10 is octagonal in shape rather than round, as in the previous embodiment.

[0097] FIGS. 19 to 21 show the second mount 20. FIG. 16 shows the second mount 20 mounted in the first mount 10. As is best shown in FIGS. 19 and 20, the second mount 20 has cut-outs 120 which register with the cut-outs 80 for receiving lugs (not shown). The lugs can bolt to the second mount 20 by bolts which pass through the lugs and into bolt holes 121. The lugs (not shown) are mounted to the mount 20 before the mount 20 is secured to the first mount 10.

[0098] In the embodiment of FIGS. 19 and 20, the peaks 34 and inverted peaks 35 are flattened rather than of V-shape as in the previous embodiment.

[0099] In this embodiment, top wall 24 is provided with a central hole 137 and two attachment holes 138a. Three smaller holes 139a are provided to facilitate pushing of the housing 45 off the part 18a if disassembly is required. When the second mount 20 is located within the first mount 10, the upper part of central section 18c projects through the hole 137, as best shown in FIG. 16. The mount 20 can then be connected to the mount 10 by fasteners which pass through the holes 138 and engage in holes 139b (see FIG. 13) in the part 18a.

[0100] Thus, when the first housing 45 and its associated bar 41 is connected to the rim 75 of the housing 10 and the second housing 47 is connected to the base 12, the housings 45 and 47 and their associated bars 41 and 42 are therefore able to move about three orthogonal axes defined by the flexure web 31, the flexure web 33 and the flexure web 37.

[0101] As is best seen in FIG. 21 which is an exploded view of the three parts 25, 26 and 27 which make up the second mount 20, an opening extends through the mount 20 which is formed by the hole 137, hole 138 and hole 139. It should be understood that the mount 20 shown in FIG. 21 is a monolithic structure and is merely shown in exploded view to clearly illustrate the location of the flexural webs 33 and 35. Obviously the flexural web 33 shown in FIG. 21 joins with the part 26 and the flexural web 35 shown in FIG. 21 joins with the part 27. The holes 137, 138 and 139 define a passage through which the axle or first portion 18a of the first mount 10 can extend when the second mount 20 is located in the first mount 10.

[0102] Thus, when the second mount 20 is fixed to the part 18a, the second mount 20 can pivot with the first portion 10a of the first mount 10 about a z axis defined by the flexure web 31 whilst the second portion formed by the part 18a remains

stationary. Movement about the x and y axes is achieved by pivotal movement of the second mount 20 about the flexure webs 33 and 35 as previously described.

[0103] FIG. 22 shows the linear and annular accelerometers 90 fixed to the housings 45 and 47.

[0104] The gravity gradient exerts a torque on a rigid body with any mass distribution provided it has a non-zero quadrupole moment. For a planar body, in the x-y plane and pivoted about the z-axis, the quadrupole is the difference between moments of inertia in the x and y directions. Thus a square or circle has zero quadrupole moment, while a rectangle has a non-zero value.

[0105] The torque produced is what constitutes the signal measured by the gradiometer.

[0106] There are two dynamical disturbances which can also produce torques and consequently are sources of error.

[0107] The first is linear acceleration.

[0108] This produces a torque if the centre of mass is not exactly at the centre of rotation—i.e. the bar is “unbalanced”. The bars 41 and 42 are balanced as well as possible (using grub screws to adjust the position of the centre of mass) but this is not quite good enough, so there is a residual error. This error can be corrected by measuring the linear acceleration and using this to numerically subtract away the erroneous part of the signal.

[0109] The second is angular motion.

[0110] There are two aspects to angular motion, each of which produces a different error.

[0111] The first is aspect angular acceleration.

[0112] Angular acceleration produces a torque on the mass distribution through its moment of inertia (even if the quadrupole moment is zero). This is an enormous error and two preferred techniques are used to counteract it.

[0113] The first is to use internal rotational stabilization. This is depicted in the block diagram of FIG. 10. Here Ho(s) represents the sensor assembly pivoted about the mounting 5 (as per FIG. 9). The block A(s) represents the actuator, which provides the feedback torque to effect the stabilization by canceling the applied disturbances. T(s) represents the sensor (or transducer) which measures the effect of the applied disturbance. This is the angular accelerometer. Using angular accelerometers in rotational control is unusual—usually gyros and/or highly damped tilt meters are used, but for our purpose the angular accelerometers are better, as the error is proportional to the angular acceleration disturbance.

[0114] The second is to use common mode rejection CMRR—that is why 2 orthogonal bars are needed. For the two bars, the error torque produced by the angular acceleration is in the same direction, but the signal torque produced by the gravity gradient is in opposite direction.

[0115] Therefore, by measuring the difference in deflection between the two bars, the gradient is sensed but not the angular acceleration.

[0116] Therefore, two separate angular accelerometers 90 (labeled 90' in FIG. 22 for ease of identification) are provided. We have two independent output signals from the pair of OQR bars 41 and 42. The first is proportional to the difference in deflection, which gives the gradient signal and the second is proportional to the sum of their deflections, which is proportional to the angular acceleration and provides the sensor for the z-axis rotational control.

[0117] The x and y axes require separate angular accelerometers. Rotational stabilization about these axes is required because the pivot axes of the two bars are not exactly parallel

and also to counteract the second form of error produced by angular disturbance, discussed below.

[0118] The second aspect is angular velocity.

[0119] Angular velocity produces centrifugal forces, which are also a source of error. The internal rotational stabilization provided by the actuators reduces the angular motion so that the error is below 1 Eotvos.

[0120] FIG. 23 shows main body 61 and connector 69 with the hemispherical ends removed.

[0121] FIG. 24 is a plan view of housing 45 according to a still further embodiment of the invention. As is apparent from FIG. 24, the housing 45 is circular rather than octagonal, as is the case with the embodiment of FIG. 8.

[0122] The housing 45 supports bar 41 in the same manner as described via flexure web 59 which is located at the centre of mass of the bar 41. The bar 41 is of chevron shape, although the chevron shape is slightly different to that in the earlier embodiments and has a more rounded edge 41e opposite flexure web 59 and a trough-shaped wall section 41f, 41g and 41h adjacent the flexure web 59. The ends of the bar 41 have screw-threaded bores 300 which receive screw-threaded members 301 which may be in the form of plugs such as grub screws or the like. The bores 300 register with holes 302 in the peripheral wall 52a of the housing 45. The holes 302 enable access to the plugs 301 by a screwdriver or other tool so that the plugs 301 can be screwed into and out of the bore 300 to adjust their position in the bore to balance the mass 41 so that the centre of gravity is at the flexure web 59.

[0123] As drawn in FIG. 24, the bores 300 are a 45° angle to the horizontal and vertical in FIG. 24. Thus, the two bores 302 shown in FIG. 24 are at right angles with respect to one another.

[0124] FIG. 24 also shows openings 305 for receiving the transducer 71 for monitoring the movement of the bar 41 and producing signals which are conveyed to the SQUID device. Typically, the transducer is in the form of a coil and as the bar 41 moves slightly due to the gravity difference at ends of the bar, a change in capacitance occurs which alters the current in the coil to thereby provide a signal indicative of movement of the bar 41.

[0125] FIG. 25 is a more detailed view of part of the housing of FIG. 24 showing the openings 305. As can be seen from FIG. 25, the openings 305 have shoulders 401 which form grooves 402. A spring 403 is arranged adjacent surface 406.

[0126] FIG. 26 shows the transducer 71. The transducer 71 is formed by a generally square macor plate 410 which has a circular boss 407. A coil 408 is wound about the boss 407 and may be held in place by resin or the like. The coil 408 may be multi-layer or a single layer coil.

[0127] FIG. 27 shows the location of the plate 410 in the opening 305 in which the plate locates in the grooves 402 and is biased by the spring 403 against the shoulders 401 to hold the plate 410 in place with the coils 408 being adjacent the edge face 41a of the bar 41.

[0128] Thus, the coil 408 and the bar 41 form an 1c circuit so that when the bar 41 moves, the current passing through the coil 408 is changed.

[0129] As will be apparent from FIG. 24, four transducers 71 are arranged adjacent the ends of the bar 41. The other housing 47 also has four transducers arranged adjacent the bar 42. Thus, eight transducers 71 are provided in the gradiometer.

[0130] FIG. 28 is a diagram of the bars 41 and 42 showing them in their "in use" configuration. The transducers which

are located in the openings 305 are shown by reference numbers 71a to 71e to equate to the circuit diagrams of FIGS. 29 and 30.

[0131] With reference to FIGS. 29 and 30, transducers 71a and 71b associated with the bar 41, and transducers 71g and 71e associated with the bar 42 are used to provide the gravity gradient measurements.

[0132] Input terminals 361 provide input current to the superconducting circuits shown in FIG. 29. Heat switches which may be in the form of resistors 362 are provided which are used to initially set the superconducting current within the circuit. The heat switches 362 are initially turned on for a very short period of time to heat those parts of the circuit at which the resistors 362 are located to stop those parts of the circuit from superconducting. Currents can then be imposed on the superconducting circuit and when the heat switches formed by the resistors 362 are switched off, the relevant parts of the circuit again become superconducting so that the current can circulate through the circuits subject to any change caused by movement of the bars 41 and 42 under the influence of the gravity gradient and angular acceleration, as will be described hereinafter.

[0133] The transducers 71a, 71b, 71g and 71e are connected in parallel to circuit line 365 and to circuit line 366 which connect to a SQUID 367.

[0134] Thus, as the bars 41 and 42 rotate about their respective flexure web, the bars 41 and 42, for example, come closer to the transducer 71a and therefore further away from the transducer 71b, and closer to the transducer 71h and further away from the transducer 71g respectively. This therefore changes the current flowing through the transducers and those currents are effectively subtracted to provide signals for providing a measure of the gravity gradient.

[0135] As is shown in FIG. 31, transducers 71c and 71d form a separate circuit and are used for frequency tuning of the bar 41 and transducers 71a and 71b. Similarly, the transducers 71e and 71f are used for frequency tuning of the bar 42 and the transducers 71g and 71h. Frequency tuning of the bars is important because the bars should be identical in order to reject angular accelerations. The frequency tuning circuits therefore enable electronic tuning of the bars to match resonant frequencies and to achieve mode rejection so that each of the bars does function in an identical manner.

[0136] The transducers 71a, 71b, 71g and 71h are also used to form angular accelerometers for measuring the angular movement of the mounting 5 so that feedback signals can be provided to compensate for that angular movement.

[0137] To do this, the line 366 is connected to a transformer 370. The polarity of the signals from the transducers 71a and 71b and 71g and 71h are reversed so that the output of the transducer 370 on lines 371 and 372 is an addition of the signals rather than a subtraction, as is the case when the gradient is measured so the addition of the signals gives a measure of the angular movement of the bars. The outputs 371 and 372 are connected to SQUID device 375 for providing a measure of the angular acceleration which can be used in the circuit of FIG. 10 to provide compensation signals to stabilise the mounting 5.

[0138] Thus, according to the preferred embodiment of the invention, the angular accelerometers 90' provide a measurement of angular acceleration, for example, around the x and y axes, and the angular accelerometer formed by the bars 41 and

42 and the transducers **71a**, **71b**, **71g** and **71h** provide a measure of the angular accelerometer around the, for example, z axis.

[0139] FIGS. **31** and **32** show an actuator for receiving the control signals to adjust the mounting in response to angular movement of the mounting **5**.

[0140] The actuator shown in FIGS. **31** and **32** are schematically shown in FIG. **10** by reference numerals **52**, **53**, **54** and **55**. All of the actuators are the same and FIGS. **31** and **32** will be described with reference to the actuator **52** which makes adjustment around the x axis shown in FIG. **10**.

[0141] Actuator **52** shown in FIG. **31** has a hollow disc housing **310** which has a mounting bracket **311** for connecting the disc housing **310** to mounting **5**. The hollow disc housing **310** therefore defines an inner chamber **312** in which is located coil support plate in the form of a disc **313**. The disc **313** has a wide hub section **314** and two annular surfaces **315** and **316** onto which windings **W1** and **W2** of coils are wound about the hub **314**.

[0142] The disc **313** is also provided with a radial bore **319** and a hole **320** at the periphery of the disc **313** which communicates with the bore **319**. A hole **321** is provided at the hub **314** and communicates with the bore **319** and extends to a hollow rod **328** which locates in a tube **330**. The rod **330** is fixed to the disc **313** and also to support frame **340** which is fixed to main body **61** (not shown in FIG. **31**). The tube **330** is connected to the disc housing **310** for movement with the disc housing **310** relative to disc **313**, rod **328** and frame **340**.

[0143] The winding **W1** provided on the face **315** has a lead **331** which passes through the hole **320** and then through the bore **319** to the hole **321** and then through the tube **328** to the right, as shown in FIG. **31**. A lead **332** from the other end of the winding **W1** passes through the hole **321** and through the hollow rod **328** also to the right so that current can be supplied to the winding **W1** through the leads **331** and **332**.

[0144] The second winding **W2** provided on the face **316** has a lead **333** which passes through a radial hole **334** and bore **345** in the disc **313** and then through hole **337** to tube **328** and to the left in FIG. **31**. The other end of the winding **W2** has a lead **338** which passes through the hole **337** into the tube **328** and to the left in FIG. **31**. Thus, current can circulate through the winding **W2** via the leads **333** and **338**.

[0145] When the windings **W1** and **W2** are energised or the current passing through the windings changes, the disc housing **310** is moved relative to the disc **313** and frame **340** and because the disc housing **310** is connected to the mounting **5** by the bracket **311**, the mounting **5**, in the case of the actuator **52**, is adjusted. The movement of the disc housing **310** is generally a longitudinal movement (i.e. linear movement) in the direction of the axis of the tube **330** and rod **328**. To facilitate such movement, clearance is provided between the ends of the rod **330** and the frame **340** and about the disc **313**. The bracket **311** is offset relative to the flexure web (such as the flexure web **37**) so that movement of the housing **310** applies a torque to the first part **25** of the mounting **5** to cause rotation of the part **25** about the flexure web **37**.

[0146] In the preferred embodiment of the invention, four actuators are provided for providing actual adjustment about the various axes and flexure webs and the actuators operate in combination in response to signals received from the angular accelerometers to maintain stability of the mounting **5** when the gradiometer is in use.

[0147] For cryogenic operation of the gradiometer, the mounting **5**, housings **45** and **47**, bars **41** and **42**, the hollow

disc housing **310**, coils, and electrical leads referred to previously, are all made from superconducting material such as niobium.

[0148] In embodiments of the invention where the gradiometer is not cryogenically operated, the components can be formed from other materials such as aluminium.

[0149] The angular accelerometers **90'** have zero quadrupole moment which means that the centre of mass coincides with the flexure web and that consequentially they are insensitive to both gravity gradient and centrifugal force. Linear accelerometers **90''** (FIG. **22**) could also be provided. The linear accelerometers **90''** do not apply active compensation but may apply corrections to the final measured gradient data. Thus, data relating to linear acceleration can be recorded and possibly used in later processing.

[0150] One or both of the bars **41** and **42** can also be used as an angular accelerometer to provide a measure of angular movement of the mounting **5** so that appropriate feedback signals can be generated to compensation for that movement by control of the actuators previously described.

[0151] In the preferred embodiment, four angular accelerometers are provided with two of the accelerometers being formed by the bars **41** and **42**. The use of four accelerometers arranged at 45° angles with respect to one another enables adjustment about the x, y and z axes by torque supplied from two or more of the actuators at any one time.

[0152] The disc **310** prevents flux from the windings **W1** and **W2** from leaving the actuator and because the leads **331** and **332** and **333** and **338** leave the actuator through the elongate tube **330**, the ability of flux to pass out of the actuator is substantially prevented.

[0153] Thus, spurious magnetic fields which may detrimentally effect operation of the instrument are not generated by the actuator and therefore do not influence the sensitivity or operation of the instrument.

[0154] The tube **330** preferably has a length to diameter ratio of 10:1 at the least.

[0155] The disc plate **316** is preferably formed from macor and the hollow disc housing **310** is formed in two parts **310a** and **310b**. The part **310b** forming a closure panel which enables the disc **313** to be located in the chamber **312** and then the disc housing **310** closed by locating the plate **310b** in place.

[0156] With reference to FIGS. **33** and **34**, the manner in which the balance of the bars **41** and **42** is achieved will be described. A pair of displacement sensors formed by capacitors **400** and **401** are provided for two main purposes:

[0157] 1. To measure the residual linear acceleration sensitivity of each bar **41** (and **42**) to enable the bars to be mechanically balanced using the grub screws **301** described with reference to FIG. **24**, before operation at low temperatures; and

[0158] 2. To measure the induced linear acceleration sensitivity of each bar **41** and **42**.

[0159] The bars **41** and **42**, in their respective housings, are rotated in a jig (not shown) through 360°. This provides an acceleration range of 2 g_E, which is typically 100 times greater than the accelerations which may be conveniently applied at low temperature. A typically requirement is for the capacitors **400** and **401** to be able to detect 0.1 nm over a period of 1 to 20 minutes. A pair of capacitors **400** and **401** is required for each bar to provide some discrimination against sensor drift, since rotation of the bar **41** will cause one capacitor **400** to increase and the other capacitor **401** to decrease by

the same amount, as is shown in FIG. 33, whereas thermal expansion will cause both outputs of the capacitors 400 and 401 to increase. The capacitors 400 and 401 remain in place, even though they are unusable at low temperatures, and therefore their components need to be non-magnetic so as to not interfere with the operation of the gradiometer and, in particular, its nearby superconducting circuitry.

[0160] FIG. 33 shows that as the bar 41 pivots, the gap applicable to the capacitor 400 decreases and the gap of the capacitor 401 increases.

[0161] The capacitors 400 and 401 are formed by the face 41a of the bar 41 (and the corresponding face on the other bar 42) and second plates 405 which are spaced from the face 41a. The gap between the plates of the respective capacitors 400 and 401 must typically be resolved to about 1 ppm.

[0162] FIG. 34 shows the calibration circuit applicable to the capacitor 400. A circuit for the other capacitor 401 is identical.

[0163] The capacitor 400 forms a high Q-factor resonant circuit with inductor 410. The inductor 410 and capacitor 400 are provided parallel to capacitors 411 and 412 and connect via capacitor 413 to an amplifier 414. The output of the amplifier 414 is provided to a frequency counter 415 and also fed back between the capacitors 412 and 411 by line 416. The capacitor 400 therefore determines the operating frequency of the amplifier 414 which can be read to a high precision.

[0164] If the bar 41 is out of balance, the frequency counter 45 will tend to drift because of the imbalance of the bar. This can be adjusted by moving the grub screws 301 into and out of the masses as previously described until balance takes place. The amplifier 414 can then be disconnected from the frequency counter 415 so that the gradiometer can be arranged within the Dewar 1 with the other parts of the circuits shown in FIG. 34 in place.

[0165] Since modifications within the spirit and scope of the invention may readily be effected by persons skilled within the art, it is to be understood that this invention is not limited to the particular embodiment described by way of example hereinabove.

[0166] In the claims which follow and in the preceding description of the invention, except where the context requires otherwise due to express language or necessary implication, the word "comprise" or variations such as "comprises" or "comprising" is used in an inclusive sense, i.e. to specify the presence of the stated features but not to preclude the presence or addition of further features in various embodiments of the invention.

1. A gravity gradiometer for measuring components of the gravitational gradient tensor, comprising:

- a sensor for measuring the components of the gradient tensor;
- a mounting for supporting the sensor, the mounting comprising:
- a first mount section having a base and a first mount peripheral wall, the peripheral wall having a plurality of cut-outs, the first mount section being mountable for rotation about a first axis;
- a second mount section for mating with the first mount section, the second mount section having a peripheral wall; and

connectors extending outwardly from the peripheral wall and which pass through the respective cut-outs in the first mount section so as to mount the second mount section and therefore the first mount section for rotation about a second axis and a third axis; and

wherein the connectors are for connecting the first and second mount sections in a Dewar for cryogenic operation of the gradiometer.

2. The gravity gradiometer of claim 1 wherein the first, second and third axes are orthogonal z, x and y axes.

3. The gravity gradiometer of claim 1 wherein the connectors comprise radially extending lugs.

4. The gravity gradiometer of claim 3 wherein the lugs are integral with the second mount section.

5. The gravity gradiometer of claim 3 wherein the lugs are separate to the second mount section and are attached to the second mount section.

6. The gravity gradiometer of claim 1 wherein the sensor is a first bar and a second bar transverse with respect to the first bar, and the second mount section has first, second and third parts.

7. The gravity gradiometer of claim 6 wherein the first bar is connected to the first mount section and the second bar is connected to the first mount section.

8. The gravity gradiometer of claim 6 wherein the first bar and second bar are arranged orthogonal to one another.

9. The gravity gradiometer of claim 1 wherein the first mount section has a first flexural web for mounting the first mount section for rotation about the z axis.

10. The gravity gradiometer of claim 9 wherein the first flexural web divides the first mount into a primary mount portion and a secondary mount portion, the sensor being connected to one of the primary mount portion and secondary mount portion, so that the primary mount portion can pivot relative to the secondary mount portion about the first flexural web to thereby pivotally couple the first and second mount sections for pivotal movement about the first axis.

11. The gravity gradiometer of claim 10 wherein the second mount section is cylindrical and a first cut is formed in a cylindrical wall of the section to form a second flexure web which has two web portions diagonally opposite one another, and a third flexural web is formed by a second cut in the wall and is formed by two web portions diagonally opposite one another, the first cut separating the first and second parts and the second cut separating the second and third parts.

12. The gravity gradiometer of claim 11 wherein the first part has mounting lugs for mounting the mount within a Dewar for cryogenic operation of the gradiometer.

13. The gravity gradiometer of claim 6 wherein the first bar is located in a first housing which is fixed to the first mount section, the bar being connected to the first housing by a fourth flexure web for movement relative to the first housing in response to the gravitational gradient.

14. The gravity gradiometer of claim 13 wherein the second bar is located in a second housing fixed to the first mount section, and connected to the housing by a fifth flexure web so the second bar can move relative to the housing in response to the gravitational gradient.

15. The gravity gradiometer of claim 6 wherein the first and second bars have associated transducers for outputting a signal indicative of movement of the bars in response to the gravitational gradient.

16. The gravity gradiometer of claim **13** wherein the first housing and first bar is a monolithic structure and the second housing and the second bar is a monolithic structure.

17. The gravity gradiometer of claim **1** wherein the second mount section is a monolithic structure.

18. The gravity gradiometer of claim **1** wherein actuators are provided for moving the mount about the three orthogonal

axes so as to stabilise orientation of the sensor during use of the gradiometer.

19. The gravity gradiometer of claim **18** wherein the actuators are computer controlled.

20. The gravity gradiometer of claim **1** wherein linear and angular accelerometers are provided.

* * * * *