



- (51) **International Patent Classification:**
A61C 8/00 (2006.01) A61C 13/263 (2006.01)
- (21) **International Application Number:**
PCT/CA2016/050840
- (22) **International Filing Date:**
15 July 2016 (15.07.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**

62/231,732	15 July 2015 (15.07.2015)	US
62/285,664	5 November 2015 (05.11.2015)	US
62/386,919	16 December 2015 (16.12.2015)	US
62/389,993	15 March 2016 (15.03.2016)	US
- (72) **Inventor; and**
- (71) **Applicant : MORRIS, Christopher** [CA/CA]; 31 Olivia Marie Road, Brampton, Ontario L6Y 0M5 (CA).
- (74) **Agent: CHATTERJEE, Jaidip;** c/o PatentAxis Inc., 10 King Street East, Suite 500, Toronto, Ontario M5C 1C3 (CA).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

(54) **Title:** DIRECT DENTAL BRIDGE

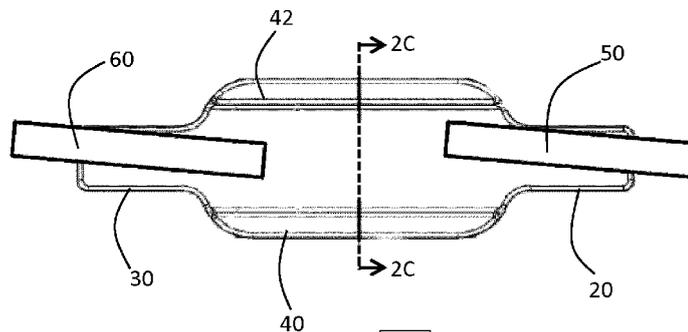


FIGURE 2



(57) **Abstract:** Described herein is a reinforcement bar combination for a direct dental bridge, the reinforcement bar combination comprising: first and second elongate bars, each of the first and second elongate bars contacting a single occlusal preparation formed in a single abutment tooth and each of the first and second elongate bars having an end positioned on a central pad of a third elongate bar to form a reinforcement scaffold. The first elongate bar is a first elongate torque bar that is optionally bent. The second elongate bar is a second elongate torque bar that is optionally bent. The third elongate bar is a proximal bar comprising a central planar pad bound by a perimeter, a coronal facing surface and an apical facing surface, a first insertion arm extending in a mesial direction from the perimeter of the pad, a second insertion arm extending in a distal direction from the perimeter of the pad; a first vertical sidewall extending in a coronal direction from the coronal oriented surface of the pad; a second vertical sidewall extending in a coronal direction from the coronal oriented surface of the pad. Method of use of the reinforcement bar combination to produce a direct dental bridge is also described.



DIRECT DENTAL BRIDGE

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to dental restorations, and more particularly direct dental restorations to replace at least one missing tooth.

Description of the Related Art

10 If a single tooth, or less frequently two adjacent teeth are lost, and there are healthy teeth on either side of edentulous space created by the lost one or two teeth, then a fixed dental prosthesis called a bridge can be used to fill the edentulous space by fixing the prosthesis to the healthy teeth (termed abutment teeth) and placing a span containing artificial replacement teeth termed pontics between the abutment teeth.

 Bridges can be indirect or direct bridges.

15 An indirect bridge is fabricated in a laboratory on an impression model of the patient's teeth. Once the indirect bridge is made in the laboratory, it is sent back to the dental office where the dentist cements it in place in the patient's mouth. An indirect bridge requires two visits to the dentist – a first visit to cut or grind abutment teeth and to make the impression model and a second visit to fix the indirect bridge made in the laboratory. Problems with indirect bridges include the financial cost of the bridge to the patient and cumulative time of
20 the restoration with the two visit process requiring two sittings, two injections and time in the chair.

 The cost for a laboratory fabricated bridge in industrialized countries is so high that the majority of citizens who lose a tooth cannot afford to have it replaced with a fixed laboratory fabricated bridge and as a result choose to leave the space without a tooth or teeth
25 and attempt to chew and masticate with their remaining teeth.

 A direct bridge is a bridge that is built directly on the healthy abutment teeth in the mouth of the patient. The objective of placing a bridge directly in the mouth is to save chair time and to cost the patient less money and also to cut less of the abutment tooth away when making the bridge. A direct bridge can often be fixed in a single visit to the dentist.

To create a bridge directly in the mouth, the dentist must install a reinforcement or framework that spans the abutment teeth and must create a pontic form to fill the edentulous space. Preformed bars or frameworks that decrease the amount of time needed to create the direct bridge provide a significant advantage to the dentist, as blood and saliva can egress
5 onto the abutment teeth and edentulous space that need to be kept dry to optimize results.

Dental fibers have been used as low cost reinforcements for inexpensive direct bridges that most people can afford. The dental fibers were used as reinforcements spanning from abutment to abutment and placed within a pontic tooth to give the span strength against fracture forces of chewing. To make the direct bridge the dentist used composite resin filling
10 materials with the fibers imbedded within the resin to build and create the pontic and bridge.

Yet despite the availability of these fibers, the majority of dentists around the world do not fabricate low cost fiber reinforced direct bridges. The reasons dentists do not provide these fiber reinforced direct bridges is that they do not provide a wide pontic support, are too difficult to cut to size, and are too time consuming to place in the mouth as a treatment upon
15 which the dentist can effectively replace laboratory processed bridges.

Preformed bars or frameworks that span two abutment teeth have been previously described, for example in U.S. Patent Nos. 4457714, 4820157, 4894012, 4950162, 5772438, 6200136, 6039569, 6345984 and U.S. Patent Application Publication Nos. 2004/0265782, 2006/0051723, 2007/0003904 and 2008/0096166.

20 However, despite the incredible demand and need and interest from dentists for direct bridges, no such preformed bar or framework has been commercially successful and widely adopted by dentists for use as a reinforcement for direct bridges.

Accordingly, there is a continuing need for alternative direct dental bridge devices and methods.

25

SUMMARY OF THE INVENTION

In an aspect there is provided a reinforcement bar combination for a direct dental bridge, the reinforcement combination comprising: first and second elongate bars, each of the first and second elongate bars contacting a single occlusal preparation formed in a single

abutment tooth and each of the first and second elongate bars having an end positioned on a central pad of a third elongate bar to form a reinforcement scaffold.

In another aspect there is provided, a reinforcement bar combination for supporting a direct dental bridge, the reinforcement bar combination comprising:

5 an elongate proximal bar comprising a central planar pad/platform bound by a perimeter, a coronal oriented/facing surface and an apical oriented/facing surface, a first insertion arm extending in a mesial direction from the perimeter of the pad, a second insertion arm extending in a distal direction from the perimeter of the pad; a first vertical sidewall extending in a coronal direction from the coronal oriented surface of the pad; a
10 second vertical sidewall extending in a coronal direction from the coronal oriented surface of the pad; and

a first elongate torque bar receiving abutting support from less than the full longitudinal distance of the proximal bar; and

a second elongate torque bar receiving abutting support from less than the full
15 longitudinal distance of the proximal bar.

In still another aspect there is provided, a reinforcement bar combination for supporting a direct dental bridge, the reinforcement combination comprising:

an elongate proximal bar comprising:

a central planar pad bound by a perimeter, a coronal facing surface and an apical
20 facing surface,

a first insertion arm extending in a mesial direction from the perimeter of the pad,

a second insertion arm extending in a distal direction from the perimeter of the pad;

a semi-tubular vertical extension extending in a coronal direction from the coronal facing surface of the pad with the longitudinal axis of the semi-tubular vertical extension
25 aligned perpendicular to the pad; and

an elongate torque bar having a first end positioned external to the proximal bar and having a second end contact and receive abutting support from a coronal surface of the pad.

In other aspects methods of use of the reinforcement combinations to produce a direct dental bridge are also provided.

30

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows (A) perspective, (B) top, and (C) lateral cross-section views of a proximal bar component of a reinforcement bar assembly for producing a direct dental bridge;

5 Figure 2 shows (A) perspective, (B) top, and (C) lateral cross-section views of the proximal bar shown in Figure 1 aligned with two torque bars to provide a reinforcement bar assembly for producing a direct dental bridge;

Figure 3 shows a sequence of views (A to P) schematically illustrating experimental development of the reinforcement bar assembly shown in Figure 2.

10 Figure 4 shows results of a three-point bend test of a proximal bar.

Figure 5 shows further views of the proximal bar variant shown in Figure 3E in (A) coronal perspective view, (B) coronal and apical comparisons, and (C) longitudinal end view with illustrative dimensions indicated in millimeters.

15 Figure 6 shows a coronal surface view of a series of a plurality of the proximal bar variant shown in Figure 1 that may be provided in a kit, the plurality of proximal bars arranged from left to right according to increasing longitudinal length.

Figure 7 shows various views of a further variant of the proximal bar with illustrative dimensions indicated in millimeters and shows a series of a plurality of this proximal bar variant that may be provided in a kit.

20 Figure 8 shows isometric and lateral cross-section views of the proximal bar variant shown in Figure 5 compared to corresponding views for two further variants of the proximal bar with illustrative dimensions indicated in millimeters.

25 Figure 9 shows (A) an isometric view of yet another variant of the proximal bar, (B) an isometric view of the variant proximal bar in combination with two bent torque bars, and (C) a coronal surface view of the variant proximal bar in combination with two bent torque bars.

30 Figure 10 shows (A) an isometric view of yet a further variant of the proximal bar, (B) an isometric view of the variant proximal bar in combination with two bent torque bars, and (C) a coronal surface view of the variant proximal bar in combination with two bent torque bars.

Figure 11 shows an illustrative series of a plurality of bent torque bars that may be provided in a kit.

Figure 12 shows (A) an isometric view and (B) a coronal surface view of yet another variant of the proximal bar used in combination with a single torque bar to replace a first
5 bicuspid or a canine tooth.

Figure 13 shows a schematic representation of a direct dental bridge illustrating advantages of the proximal bar shown in Figure 1 in comparison to a prior art proximal bar.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

10 Now referring to the drawings, devices and methods for creating a direct dental bridge to replace at least one missing tooth are described. The direct dental bridge can be used to replace a missing posterior tooth or a canine anterior tooth. Posterior teeth are premolars (also called bicuspids) and molars, as compared to incisors and canines, which are anterior teeth.

Figure 1 shows (A) perspective, (B) top, and (C) lateral cross-section views of a
15 proximal bar 10 of a reinforcement bar assembly for supporting a direct dental bridge. The proximal bar is an elongate structure having a longitudinal axis that is oriented in a mesiodistal direction when producing the direct dental bridge. A mesial direction is towards the anterior midline in a dental arch, while a distal direction is towards the tooth furthest from the anterior midline (ie., a direction towards a wisdom tooth) in each quadrant. Each tooth
20 includes a mesial surface and a distal surface. When producing the direct dental bridge the proximal bar 10 spans a first cavity preparation in a distal surface of a mesial abutment tooth to a second cavity preparation in the mesial surface of a distal abutment tooth. Facing mesial and distal surfaces of adjacent teeth are generally referred to as proximal surfaces. Accordingly, the corresponding first and second cavity preparations in facing distal and
25 mesial surfaces of the abutment teeth can be more generally referred to as first and second cavity preparations in the proximal surfaces of the abutment teeth, and proximal bar 10 is sized longitudinally to span the first and second cavity preparations and the edentulous space therebetween. First and second cavity preparations in the proximal surfaces of the abutment teeth may also be referred to as distal and mesial proximal preparations, respectively.

The proximal bar 10 comprises a central planar pad 12 bound by a first surface 14 and an opposing second surface 16 joined at a perimeter 18. The first surface 14 is generally parallel to the second surface 16. When creating the direct dental bridge the first surface 14 and the second surface 16 are both aligned transverse to a coronal axis of at least one abutment tooth with the first surface 14 facing a coronal direction and the second surface 16 facing an apical direction.

A first insertion arm 20 extends horizontally from the perimeter 18 of the central planar pad 12. The first insertion arm 20 has a first end 22 that is integrally connected to the perimeter 18 of the central planar pad 12 and a second end 24 that is free to be inserted or fit within a cavity preparation in a proximal surface of an abutment tooth. The first insertion arm 20 is substantially co-planar with the central planar pad 12. When producing the direct dental bridge the first insertion arm 20 extends in a mesial direction from the perimeter 18 of the central planar pad 12 so that a portion of the first insertion arm 20 at or near its second end 24 fits and finds abutting support within a cavity preparation within the proximal surface (the distal surface) of the mesial abutment tooth.

A second insertion arm 30 extends horizontally from the perimeter 18 of the central planar pad 12. The second insertion arm 30 has a first end 32 that is integrally connected to the perimeter 18 of the central planar pad 12 and a second end 34 that is free to be inserted or fit within a cavity preparation in a proximal surface of an abutment tooth. The second insertion arm 30 is substantially co-planar with the central planar pad 12 and with the first insertion arm 20. When producing the direct dental bridge the second insertion arm 30 extends in a distal direction from the perimeter 18 of the central planar pad 12 so that a portion of the second insertion arm 30 at or near its second end 34 fits and finds abutting support within a cavity preparation within the proximal surface (the mesial surface) of the distal abutment tooth.

A first vertical extension 40 extends substantially vertically from and substantially perpendicularly to the first surface 14 of central planar pad 12. The first vertical extension 40 is substantially co-extensive with the central planar pad 12 along its longitudinal dimension. When producing the direct dental bridge the first vertical extension extends in a coronal direction from the first surface 14 or coronal facing surface of the central planar pad 12.

A second vertical extension 42 extends substantially vertically from and substantially perpendicularly to the first surface 14 of central planar pad 12. The second vertical extension 42 is substantially co-extensive with the central planar pad 12 along its longitudinal dimension. When producing the direct dental bridge the second vertical extension 42 extends
5 in a coronal direction from the first surface 14 or coronal facing surface of the central planar pad 12.

The vertical extensions, shown in Figure 1, function as vertical walls of vertical sidewalls and therefore the term vertical extension may be used interchangeably with the terms vertical wall or vertical sidewall.

10 The first vertical sidewall 40 and the second vertical sidewall 42 are substantially co-extensive and substantially parallel and are symmetrically positioned with reference to a longitudinal line of symmetry of the central planar pad 12. The first and second vertical sidewalls have a lateral spacing greater than the width of the first and second horizontal insertion arms. The first and second vertical sidewalls combine with the first surface 14 of the
15 central planar pad 12 to form a channel or trough with a U-shaped lateral cross-section providing an open trough defining first and second open longitudinal ends that are contiguous and communicative with first and second insertion arms, respectively.

The proximal bar 10 only inserts into the cavity preparation in the proximal surfaces of the abutment teeth from about 1 mm to about 2mm. Therefore, the proximal bar cannot be
20 relied upon to resist torque or twisting forces that may be exerted upon a dental bridge structure.

To provide reinforcement of a dental bridge against fracture due to torque or twisting forces two torque bars are aligned with the proximal bar and abutment teeth with each torque bar extending from within an occlusal cavity preparation of the abutment tooth to within and
25 between the first and second vertical sidewalls of the proximal bar 10.

Figure 2 shows (A) perspective, (B) top, and (C) lateral cross-section views of the proximal bar shown in Figure 1 aligned with two torque bars to provide a reinforcement bar assembly for producing a direct dental bridge.

A first elongate torque bar 50 is a straight bar having at least one longitudinal flat side
30 for abutting support from the first insertion arm 20 and a portion of the coronal facing surface

of the central planar pad 12. The first elongate torque bar 50 is defined by a first free end section 52 for contact with and receiving abutting support from an occlusal cavity preparation of a mesial abutment tooth, a central body section 54 for contact with and receiving abutting support from the first insertion arm 20, and a second free end section 56 for contact with and receiving abutting support from the central planar pad 12. The first and second vertical sidewalls act as guards or walls to constrain angular motion the first elongate torque bar 50. Typically, the first elongate torque bar 50 is aligned with the proximal bar 10 so that it overlaps with less than the full longitudinal distance of the coronal facing surface of the central planar pad 12.

A second elongate torque bar 60 is a straight bar having at least one longitudinal flat side for abutting support from the second insertion arm 30 and a portion of the coronal facing surface of the central planar pad 12. The second elongate torque bar 60 is defined by a first free end section 62 for contact with and receiving abutting support from an occlusal cavity preparation of a distal abutment tooth, a central body section 64 for contact with and receiving abutting support from the second insertion arm 30, and a second free end section 66 for contact with and receiving abutting support from the central planar pad 12. The first and second vertical sidewalls act as guards to constrain angular motion the second elongate torque bar 60. Typically, the second elongate torque bar 60 is aligned with the proximal bar 10 so that it overlaps with less than the full longitudinal distance of the coronal facing surface of the central planar pad 12.

The first and second elongate torque bars can be positioned in varied longitudinal overlap with the proximal bar depending on the requirements of a direct restoration as angles or alignment of occlusal cavity preparation and edentulous space may be specific to each direct dental bridge restoration. The first and second elongate torque bars can be independently positioned to longitudinally overlap the proximal bar, where each of the first and second torque bars is independently limited to a longitudinal overlap that is less than the full longitudinal distance of the proximal bar, more typically independently limited to a longitudinal overlap that is less than 80% of the full longitudinal distance of the proximal bar, the full longitudinal distance of the proximal bar being the longest distance from a free end of the first horizontal insertion arm to a free end of the second horizontal insertion arm.

The first and second elongate torque bars can be independently positioned to overlap one of the first or second insertion arms and the central planar pad, but limited to a longitudinal overlap that is less than the full longitudinal distance of the proximal bar. Each of the first and second elongate torque bars can independently overlap with any portion of the longitudinal distance of the coronal facing surface of the central planar pad 12. Typically, the first elongate torque bar longitudinal overlap is confined to the first insertion arm and the central planar pad so that the first elongate torque bar contacts and receives abutting support from the first insertion arm and the central planar pad, but not the second insertion arm. Typically, the second elongate torque bar longitudinal overlap is confined to the second insertion arm and the central planar pad so that the second elongate torque bar contacts and receives abutting support from the second insertion arm and the central planar pad, but not the first insertion arm.

The first and second elongate torque bars can be varied in angular orientation to and longitudinal overlap with the proximal bar depending on the requirements of a direct restoration as angles or alignment of occlusal cavity preparation and edentulous space may be specific to each direct dental bridge restoration. Angular orientation of each of the first and second torque bar can independently deviate up to about 60 degrees from the longitudinal axis of the proximal bar and up to about 20 degrees from the plane of the coronal facing surface of the proximal bar. The first and second vertical sidewalls of the proximal bar 10 act as guards or walls to limit angular orientation of the first and second elongate torque bars when installing a reinforcement bar assembly. The first and second vertical sidewalls can also act as guards or walls to constrain angular motion of the first and/or second elongate torque bars, with the vertical sidewalls providing a resistive force when torque or twisting forces are exerted upon a direct dental bridge.

Figure 3 shows a sequence of views (A to P) schematically illustrating experimental development of the reinforcement bar assembly shown in Figure 2.

Figure 3A shows the side view of crowns of a molar 80 on the left and a bicuspid tooth 82 on the right and an edentulous space 84 in between. The molar 80 and bicuspid 82 teeth are termed abutments or abutment teeth. The molar 80 is the distal abutment tooth and

the bicuspid 82 is the mesial abutment tooth. An edentulous space is a space where a natural tooth is missing and extends between the proximal surfaces of the abutment teeth.

Figure 3B shows a top view (coronal view) of the same two abutment teeth shown in Figure 3A – the molar 80 and the bicuspid 82. A reinforcement bar assembly that spans the edentulous space 84 can be used to reinforce composite resin in such a manner that the composite resin can be used to produce a permanent composite resin direct dental bridge replacing the missing tooth with a replacement tooth called a pontic.

Figure 3C shows a side view of proximal and occlusal cuts, also called preparations, into the abutment teeth. A distal occlusal cavity preparation 90 and a distal proximal cavity preparation 92 are formed in the molar 80, while a mesial occlusal cavity preparation 94 and a mesial proximal cavity preparation 96 are formed in the bicuspid 82. Occlusal and proximal preparations are cut by a dentist using a rotary tool such as a dental drill actuating rotation of a suitable dental burr.

Figure 3D shows a top view (coronal view) of the proximal and occlusal cuts, also called preparations, into the abutment teeth. Each proximal and occlusal cuts receives an end portion of a reinforcement bar. A combination or assembly of reinforcements bars supports application and shaping of composite resin to form a direct dental bridge to span and fill the edentulous space 84. The reinforcement bar assembly provides a framework or scaffold to reinforce the composite resin and support a prosthetic tooth called a pontic which replaces the missing tooth.

Figure 3E shows a top view (coronal view) of a reinforcement bar combination that was cut to a suitable size and shape and used to make the direct dental bridge for patients. The reinforcement bar combination comprises a single occlusal bar 100 and a single proximal bar 10a. The occlusal bar 100 is a long straight bar that is cut by the dentist to span the longitudinal distance between distal and mesial occlusal preparations (90, 94), the occlusal bar 100 having a first end 102 that is received in distal occlusal preparation 90, a second end 104 that is received in mesial occlusal preparation 94, and a central portion 106 that receives abutting support the proximal bar 10a. The proximal bar 10a shown in Figure 3E is a modification of the proximal bar 10 shown in Figure 1 with both the first vertical sidewall 40a and the second vertical sidewall 42a laterally offset from the perimeter 18 of the central

planar pad 12. The proximal bar 10a has the first and second vertical sidewalls, 40a and 42a, situated closer to the longitudinal line of symmetry of the proximal bar 10 so as to provide a grip on the occlusal bar to better support or resist torque forces applied to the dental bridge and transferred to the occlusal bar. The reinforcement bar combination shown in Figure 3E
5 requires that the direct bridge comprise a single proximal bar and a single occlusal bar extending from abutment tooth to abutment tooth.

The purpose of the occlusal bar spanning mesial to distal occlusal preparations is to provide additional support and reinforcement for the pontic tooth against occlusal forces directed to the pontic. The occlusal bar provides this support by being simultaneously fixed in
10 the occlusal preparations of both the abutment teeth and spanning through the pontic to give the pontic strength against fracture.

The purpose of the occlusal bar and the proximal bar being used together was to use the strength of the combination of the two bars to provide the strength to the pontic.

Figure 3F shows a side view and Figure 3G shows a top view of the occlusal bar 100
15 and the proximal bar 10a sized and placed to fit into the occlusal and proximal preparations, respectively, cut in the abutment teeth. Case studies and experiments have shown that the reinforcement bar combination as shown in Figure 3F and 3G can be successfully used for abutment teeth that are aligned with each other. However, in practice many teeth that serve as abutments are either tipped or rotated. Figures 3H, 3I and 3G show examples of tipped and
20 rotated teeth from which it is apparent that the reinforcement bar combination of occlusal and proximal bars as shown in Figure 3F and 3G cannot function as intended since the occlusal bar 100 cannot be aligned to sit within both mesial and distal occlusal preparations.

Figure 3H shows a tipped molar 80a abutment tooth and a tipped bicuspid 82a
abutment tooth. The occlusal bar 100 cannot sit in the distal and mesial occlusal preparations
25 as intended due to the tipping of the abutments.

Figure 3I shows an ideal alignment molar 80 abutment tooth and a rotated bicuspid
82b abutment tooth.

Figure 3J shows the position of the nerve pulp horns 120 as the small circles in the
bicuspid and molar abutment teeth. Figure 3J also shows that the occlusal preparation in any
30 abutment has to be cut down the center of the tooth between the pulp horns 120 to avoid

hitting the pulp horn 120 of the nerve when cutting the tooth. Figure 3J also shows the straight occlusal bar 100 in place in the mesial occlusal preparation 94 of the bicuspid showing how it would be positioned in the mesial occlusal preparation 94 causing an alignment problem for the occlusal bar 100 with respect to molar 80 making it difficult to be used in a direct bridge.

Experimentation and attempts to employ the occlusal bar to reinforce direct bridges in the mouth has established that the occlusal bar inserted into and spanning from mesial occlusal preparation to distal occlusal preparation cannot be employed in many cases due to even slight tipping and rotation of the teeth out of and away from a perfect straight line.

The straight line available in real life between two abutment teeth is determined by the position of the nerves in the abutment teeth and the nerve horns sticking up into the cuspal areas of the abutment teeth. These pulp horns dictate the width of each occlusal preparation and the direction of the line of the occlusal preparation and thus the positioning of the occlusal bar and the straight line or longitudinal axis position of the occlusal bar when placed within these preparations.

Experiments and case studies involving numerous attempts to place a single occlusal bar from abutment tooth to abutment tooth in the mouth of patients to build direct bridges led to the discovery that the straight line direction of each of the occlusal preparations are so tightly defined by the pulp horns that it is rare in the mouth that the straight line direction of the occlusal preparations of both abutment teeth will be lined up so precisely that a single occlusal bar can be placed in both occlusal preparations simultaneously to span the edentulous space and sit in each occlusal preparation and provide a suitable reinforcement.

Since the straight occlusal bars could not be used in the vast majority of direct bridges, attempts were made to fabricate direct bridges in the mouth using bendable fibers. Fibers could be used to reinforce a direct bridge with the proximal bar as the fibers could bend and twist to fit the directions of the available occlusal preparations of each abutment and through the channel or trough defined by vertical sidewalls of the proximal bar.

Therefore, to overcome the problems of tipped and rotated teeth experiments were conducted using bendable fibers as occlusal reinforcements in combination with the proximal bar 10a instead of a straight and ridged occlusal bar 100.

Figures 3K and 3L show the proximal bar 10a in place in mesial and distal preparations and bendable fibers 130 used as an occlusal bar to adapt to the occlusal preparations of tipped and rotated teeth and also inserted between the vertical sidewalls of the proximal bar 10a to reinforce a direct bridge.

5 Ribbond (polyethylene), Fiber-Kor, Splint-It from Pentron Corporation and E-Fiber from Preat Corporation (fiber glass) which are commercially available to dentists, were tested for use as the bendable fiber occlusal bar 130 in combination with the proximal bar 10a for producing a direct dental bridge. This technique of direct dental bridge construction using fibers as the occlusal bar was functional and the bridging and reinforcing are successful, but
10 problems and disadvantages of using fibers were observed.

 An example of a problem observed by using bendable fibers is that polyethylene fibers are not reliably strong because the dentist had to impregnate the polyethylene fibers with dental resin chair side and could not reliably and consistently achieve complete impregnation and thorough wetting of these fibers.

15 Another problem with using bendable fibers to replace the occlusal bar was difficulty in compacting and placing and curing the fibers to lay flat in the bottom (ie., along the apical or gingival surface) of the occlusal preparations and within the space between the first and second vertical sidewalls of the proximal bar. The fibers tended not to lay down and they were difficult to manage and cure exactly where they are desired to be in the bottom of the
20 occlusal preparations. The fibers would extend up into the occlusal surface so that when the bridge is completed the fibers are exposed and part of the occlusal surface. More specifically, experiments with glass fibers (which were chosen for being stronger more reliable than polyethylene fibers) revealed that these glass fibers are difficult to work with and difficult to push into place and cure in place in the occlusal preparations.

25 Another problem with using bendable fibers is that since the fibers are not easily controlled to lay flat in the occlusal preparations and are in or close to the the occlusal surface the fibers are at risk of being more exposed as the patient uses the bridge and wears down the composite resin.

Faced with the above problems with using the bendable fibers, further experimentation of reinforcement bar combinations were conducted. Case studies showed that the proximal bar 10a was actually supporting the pontic on its own very well.

5 Furthermore, three-point bend tests of the proximal bar 10a independently conducted by Acuren Materials Testing found the proximal bars were able to withstand over 150 lbs of occlusal force before breaking. Figure 4 shows the results of the proximal bar three-point bend tests conducted by Acuren,

10 Moreover, case studies confirmed that the proximal bar was more than adequately strong to withstand the occlusal forces applied to it. Therefore, the concept that combination of 2 reinforcement bars – a proximal bar and an occlusal bar – acting together to resist occlusal forces, where the occlusal bar is a continuous fiber from mesial occlusal preparation to distal occlusal preparation may not be needed or necessary for resisting occlusal forces.

15 Therefore, experiments established that the concept of a single occlusal bar or fiber span reinforcement spanning from mesial occlusal preparation to distal occlusal preparation to assist in the resisting of occlusal forces to provide a combined strength with the proximal bar may be eliminated.

20 However, the proximal bar only inserts into the abutment tooth about 1 mm and therefore the proximal bar cannot be relied upon to resist torque or twisting forces at the join or isthmus between the pontic and the abutment tooth. Thus, further analysis established that while eliminating a reinforcement structure that spanned from occlusal preparation to occlusal preparation may not critically reduce resistance to occlusal forces, it could leave torque forces placed across the isthmus of where the pontic joins the abutment tooth without sufficient resistance.

25 Without wishing to be bound by theory, based on recognition that the proximal bar sufficiently withstands occlusal forces but cannot be relied upon to sufficiently resist torque or twisting forces at the isthmus, a hypothesis was developed that the occlusal bar can function as a reinforcement against fracture due to torque or twisting forces at the isthmus between the pontic and the abutment tooth. The hypothesis was further developed to investigate replacement of the single occlusal bar with two shorter bars. Case studies have
30 shown that the function of the single occlusal bar can be accomplished by two separate short

occlusal bars at each end of the direct bridge. More specifically, case studies established that resisting torque forces across the isthmus could be accomplished with two separate short ceramic bars that extended between the occlusal preparation of one abutment to and into the trough or channel defined by vertical sidewalls of the proximal bar. Again, without wishing to be bound by theory, twisting or torque forces could be successfully resisted by each of the two short occlusal bars which extended from within the occlusal preparation of the abutment tooth to within and between the vertical sidewalls of the proximal bar. Since these short occlusal bars are believed to counter or resist torque forces, these bars are called torque reinforcement bars or torque bars.

Torque bars can come in different sizes depending on the size of the abutment tooth it is placed into. For example, lateral cross-section dimensions for a torque bars for a molar may be 1.6mm by 1.0mm and for a bicuspid may be 1.2mm by 1.0. Thus, torque bars may be categorized in kits as molar torques bars and bicuspid torque bars, with molar torque bars typically having a greater lateral cross-sectional area than bicuspid torque bars. Lateral cross-sectional shapes of torque bars may be varied including circular, trapezoid and other polygonal shapes.

Figure 3M shows a top view (coronal view) of the proximal bar 10a and the first elongate torque bar 50 and the second elongate torque bar 60 configured and positioned in proximal and occlusal cuts of ideally aligned molar 80 and bicuspid 80 abutment teeth. However, this combination of reinforcement bar configuration and arrangement between two abutment teeth so that both occlusal preparation and both proximal preparation are co-aligned and parallel is not frequent clinically. Rather one or both abutment teeth being tipped or rotated presents much more frequently in practice. In order to accommodate a range of angular orientations of misaligned abutment teeth and consequent angular orientations of a straight elongate torque bar relative to a proximal bar, the lateral spacing between the first and second vertical sidewalls can be increased to a lateral spacing shown for proximal bar 10 in Figure 3N or Figure 1, for example, as compared to the lateral spacing shown for proximal bar 10a in Figure 3M, for example. As the lateral spacing between the vertical sidewalls of the proximal bar is increased the torque bars can fit between the vertical sidewalls in numerous cases of small irregularities of orientation that are so common in abutment teeth.

Figure 3N shows the vertical sidewalls of the proximal bar moved to the furthest lateral position possible on the proximal bar 10 – the first and second vertical sidewalls, 40 and 42, are located at opposing lateral sides of the perimeter 18 of the central planar pad 12. Figure 3N shows that by spacing the vertical sidewalls laterally a straight elongate torque bar 50 can be used to fit between the vertical sidewalls with a range of angular orientations and thus be used to strengthen the isthmus against torque forces even when an abutment tooth is rotated from an ideal alignment, for example rotated bicuspid 82b. Depending on the degree of rotational deviation from ideal alignment of an abutment tooth, a bent torque bar may be provided to accommodate the rotational deviation. In cases where the abutment tooth is severely rotated, the torque bar can be provided in a variety of bent shapes to be selected as needed by the particular rotation of the abutment tooth.

Figure 3O shows a bent elongate torque bar 50a being used to provide reinforcement at the isthmus when configuring a three bar reinforcement combination for a severely rotated abutment tooth, such as rotated bicuspid 82b.

Tipped and rotated teeth, especially tipped molars, are very common. Torque bars can be prefabricated in a variety of angles so that they can be used in cases of tipped and rotated teeth.

Figure 3P shows the bent torque bar 60a used for a tipped molar 80a.

Torque bars can be provided in sets of multiple types of bars, including straight bars and a variety of bent bars where the dentist can select the angle of the torque bar bend that best suits the alignment of the abutment teeth.

Figure 3Q shows a longitudinal end cross-section view of a proximal bar 10b and torque bar 60b where the vertical sidewalls 40b, 42b are to the furthest lateral position possible on the proximal bar 10b and the inner surfaces of the vertical sidewalls are angled inwards to form a dovetailed trough. Figure 3Q also shows the torque bar 60b is widest at the base and while the torque bar sits loosely between the vertical sidewalls before application of composite resin, once the composite resin is applied and cured to form a direct bridge, the composite resin surrounding the torque bar will apply forces to the dove tailed angles of the vertical sidewalls during an application of force to the direct bridge. Proximal bar 10b differs from proximal bar 10 in that a lateral cross-section of the trough formed by the first and

second vertical sidewalls of proximal bar 10b shows a dovetailed shape. Elongate torque bar 60b differs from elongate torque bar 60 in its lateral cross-section shape, the lateral cross-section of torque bar 60b having an acute trapezoid shape, and more specifically an isosceles trapezoid shape to match the dovetailed trough of proximal bar 10b.

5 Experiments illustrated in Figure 3 have established a clear advantage of using two torque bars instead of a single occlusal bar to provide reinforcement for rotated or tipped abutment teeth.

Another advantage of using two torque bars instead of a single occlusal bar is that the torque bars can be provided in different sizes for different abutment teeth. A molar is larger
10 than a bicuspid and so a larger stronger torque bar can be provided for a molar, for example with dimensions of a rectangular bar 1.6mm wide and 1.2 mm high. The bicuspid bar would be smaller, for example 1.2mm wide by 1.2mm high. The torque bars need to be long enough to extend far into the occlusal preparation of the abutment tooth and then extend into the trough of the proximal bar, for example to about the middle of the proximal pad.

15 Another advantage of using two torque bars instead of a single occlusal bar is that it allows for bent torque bars to be provided to fit into occlusal preparations of tipped and severely rotated teeth so that when these cases are found in the mouth a dentist can place a torque bar that sits flat in the floor of the occlusal preparation and bends at the isthmus and then extends along flat surface of the proximal bar to between the vertical sidewalls.

20 Proximal bars and torque bars can be sold in a kit to the dentist or a manufacturer can make them and stock them to be ordered as needed.

A kit may include proximal bars with wide pads to support the pontic and with sufficiently spaced apart vertical sidewalls being manufactured and provided for the dentist in a kit of increments of length, as shown for example in Figures 6 and 7. For example, a
25 plurality of proximal bar sizes may be provided in a kit for use including proximal bars with pads of varied horizontal length including for example 4mm, 5mm, 6mm, 7mm, 8mm etc to 25mm. In cases of long spans proximal bars may be made with slight variations to increase the strength needed for longer spans, ie. proximal bars of pad length greater than 10 mm. These variations may include, for example, increased thickness of the proximal bar and or

additional longitudinal ribs placed along the length under the proximal pad towards the gingiva.

A kit may include torque bars of sizes for molar torque bars and of sizes for bicuspid torque bars that can be provided for the dentist to cut to length for placement in each proximal bar and pontic combination where the dentist can select the torque bar for either the
5 molar or bicuspid depending on the abutment tooth.

A kit may include bent torque bars to be used in cases of tipped abutments and cases where the width of the vertical sidewalls of the proximal bar and the direction of the torque bar determined by the pulp horns of the abutment teeth do not accommodate the straight
10 torque bar due to the more than normally experienced rotation and of the abutment teeth. The kit may include a plurality of torque bars having different bend angles as shown for example in Figure 11.

Several illustrative variants have been described above. Further variants and modifications are described below. Moreover, guiding relationships for configuring variants
15 and modifications are also described below. Still further variants and modifications are contemplated and will be recognized by the person of skill in the art.

Many variations in the shape and orientation of vertical extensions can be accommodated by the proximal bar. The vertical extensions, shown in Figure 1 for example, function as vertical walls and therefore the term vertical extension may be used
20 interchangeably with the terms vertical wall or vertical sidewall. The shape and orientation of vertical sidewalls can be modified to suit a particular implementation and can readily deviate from the shape and orientation shown in Figure 1 while not compromising their function as walls that directly or indirectly transfer resistive force to torque bars to provide resistance to torque or twisting forces exerted upon a direct bridge. For example, variant proximal bar 10a
25 shown in Figure 5, variant proximal bar 10c shown in Figure 7, variant proximal bars 10d and 10e shown in Figure 8, and variant proximal bar 10f shown in Figure 12 all deviate from the shape and/or orientation of vertical extensions in proximal bar 10 shown in Figure 1 while maintaining function, and perhaps even enhancing function depending on the needs of a particular implementation.

The vertical extensions, shown in Figure 1 for example, function as vertical walls and therefore the terms vertical extension and vertical sidewall may be used interchangeably. The vertical extensions shown in Figure 1 are in parallel alignment with each other and parallel with the longitudinal axis of the proximal bar. However, non-parallel alignment can be tolerated with independent deviation of each vertical bar of up to 30 degrees from parallel alignment with the longitudinal axis of the proximal bar readily tolerated and perhaps found to be advantageous depending on the implementation.

Each vertical extension shown in Figure 1 is a continuous elongate strip. Vertical extensions can readily be modified to include gaps so as to be discontinuous.

Each vertical extension shown in Figure 1 is confined within the perimeter of the pad, and typically longitudinal ends of each vertical extension will be limited within the perimeter of the pad. A vertical extension overhanging the perimeter of the pad or longitudinally extending beyond the perimeter of pad can be tolerated. However, when straight torque bars are used, the longitudinal dimension of vertical extensions will typically be less than the longitudinal dimension of the proximal bar. Furthermore, coincidence of a longitudinal end of the vertical extension with a longitudinal end of the proximal bar is typically avoided when straight torque bars are used. Typically, the insertion arms, and more particularly the free insertion ends that are seated within occlusal preparations, are devoid of vertical extensions, when the proximal bar is used in combination with straight torque bars. When a suitable bent torque bar is used to mitigate angular irregularities presented by rotated teeth, the vertical extensions can be positioned on insertion arms and can even span the full longitudinal length of the proximal bar. As shown in Figure 10, for example, when bent torque bars are used the vertical extensions are co-extensive with the entire length of the proximal bar with longitudinal ends of the vertical extensions coincident with longitudinal ends of the proximal bar.

Interior facing surfaces of first and second vertical extensions act as opposing lateral sidewalls and combine with a coronal surface of the central planar pad to form a channel or trough. The surfaces of the vertical sidewalls that define the trough may be perpendicular to the coronal surface of the central planar pad. However, angular orientations that deviate from a perpendicular alignment can be tolerated and may even be advantageous, for example as

seen with the dovetailed shape trough illustrated in Figure 3Q. Angular deviations of 30 degrees from a perpendicular alignment can readily be accommodated.

The first and second vertical extensions can act as opposing lateral sidewalls to define a trough with first and second opposing and open longitudinal ends, each of the first and second opposing and open longitudinal ends aligned and communicative with at least one of the first and second insertion arms. However, the openings can be modified to be partially closed. Furthermore, one end of the trough may be fully closed as shown in Figure 12 illustrating a variant proximal bar 10f that is used for reinforcement of direct bridges the replace a first bicuspid tooth or a canine tooth. Proximal bar 10f shown in Figure 12 comprises a central planar pad 160 bound by a perimeter 162, a first insertion arm 164 extending in a mesial direction from the perimeter to receive abutting support from a distal proximal preparation formed in a canine or lateral incisor and a second insertion arm 166 extending in a distal direction from the perimeter to receive abutting support from a mesial proximal preparation formed in a first or second bicuspid, a semi-tubular vertical extension 168 extending coronally from the pad with an open end of the semi-tubular vertical extension aligned with the second insertion arm 166 and a concave surface of the vertical extension communicative with the second insertion arm 166, a convex surface of the semi-tubular vertical extension facing the first insertion arm 164 and the semi-tubular vertical extension blocking communication of the coronal surface of the pad with the first insertion arm 164. The semi-tubular vertical extension can be any convenient shape including semi-cylindrical as shown in Figure 11. Figure 12 also shows a torque bar 170 sized to have a first end to contact and receive abutting support from an occlusal preparation in a bicuspid tooth and a second end to contact and receive abutting support from a coronal surface of the pad.

As shown in the drawings, for example Figure 1, the coronal facing surface of pad located between the first and second vertical extensions forms a continuous and co-planar surface with at least one of the first and second insertion arms. However, this co-planar arrangement can be modified and deviations from a co-planar arrangement can be tolerated, for example where a shape of a torque bar matches the deviation from a co-planar alignment.

First and second vertical extensions may be positioned at the perimeter of the pad. More specifically, the first and second vertical extensions can be positioned along laterally

opposing portions or lateral sides of the perimeter of the pad as shown for example in Figure 1 in proximal bar 10. However, positioning of first and second vertical extensions at the perimeter is not critical, and vertical extensions laterally offset from the perimeter of the pad are readily tolerated as shown for example in Figure 5 for variant proximal bar 10a and in 5 Figure 8 for variant proximal bar 10e.

The lateral spacing of the first and second vertical spacing can be modified to suit a particular implementation. As shown in Figure 1, a lateral spacing of the interior facing surfaces of the first and second vertical extensions is greater than the width of at least one of the first and second insertion arms. However, as shown in Figures 8 and 9 for variant 10 proximal bar 10d the lateral spacing of first and second vertical extensions may be less than both of the insertion arms. Similarly, while Figure 1 shows lateral spacing of the interior facing surfaces of the first and second vertical extensions to be at least three fold greater than the width of at least one of the first and second elongate torque bars, this dimensional relationship is not a requirement as shown for example in Figure 9 and Figure 10. The lateral 15 spacing to be greater than the width of an insertion arm or at least two to three fold greater than the width of a torque bar does provide a significant advantage when straight torque bars are used in that such lateral spacing allows for flexibility of angular orientation of the straight torque bar relative to the proximal bar to accommodate a rotated abutment tooth. The lateral spacing can be less than the width of an insertion arm, for example as shown in Figures 9 and 20 10, where bent torque bars are used to accommodate angular irregularities presented by rotated teeth.

Shape and orientation of elongate torque bars can be varied. Torque bars can have any desired lateral cross-sectional shape including circular, triangular and trapezoid shapes, and may also include other polygonal shapes defining its lateral cross-section. The orientation of 25 each torque bar can be varied in terms of angular orientation as well as longitudinal overlap with the proximal bar. Factors influencing variance in angular orientation can include degree of misalignment of an abutment tooth as well as choice of straight versus bent torque bars and the degree of bend of a bent torque bar. Longitudinal overlap of a torque bar with a proximal bar will be less than the full length of the proximal bar as a single torque bar will 30 never be used to span the proximal bar to be seated in both mesial and distal occlusal

preparations. Thus, generally a first longitudinal end of a first elongate torque bar is positioned within a first occlusal cavity preparation but not in a second occlusal cavity preparation, and a first longitudinal end of a second elongate torque bar is positioned within the second occlusal cavity preparation, but not in the first occlusal cavity preparation.

5 While the longitudinal overlap of the torque bar with the proximal bar can extend beyond the perimeter of the pad, frequently a longitudinal end of the torque bar will be positioned within the perimeter of the pad and in between the vertical extensions. For example, given that the first ends of the first and second elongate torque bars are to be positioned in first and second occlusal preparations, respectively, then the second
10 longitudinal end of the first elongate torque bar is positioned in between the first and second vertical extensions, and the second longitudinal end of the second elongate torque bar is positioned in between the first and second vertical extensions.

The torque bars need not contact the vertical extensions, as resistance to torque forces can be transferred from the vertical extensions to the torque bars through intervening
15 restorative material in the absence of direct contact between torque bar and vertical extension. However, direct contact between a torque bar and a vertical extension is readily tolerated and may be likely where lateral spacing of the interior facing surfaces of the vertical extensions is narrower than the insertion arms. In such cases the second longitudinal end of the first elongate torque bar may contact a surface of at least one of the first and second
20 vertical extensions, and/or the second longitudinal end of the second elongate torque bar may contact a surface of at least one of the first and second vertical extensions.

Longitudinal overlap of each torque bar with a proximal bar will typically include overlap with a single insertion arm and all or part of the pad, and will typically avoid overlap with both insertion arms. For example, the first elongate torque bar may have at least one
25 longitudinal flat side receiving abutting support from the first insertion arm and less than 75% of the longitudinal distance of the coronal facing surface of the pad. In another example, the second elongate torque bar may have at least one longitudinal flat side receiving abutting support from the second insertion arm and less than 75% of the longitudinal distance of the coronal facing surface of the pad.

Just as torque bar shapes can accommodate extensive variation, torque bars can also include various types of bends. Bends may vary with respect to angle, accommodating any desired acute angle, typically ranging from 5 degrees to 60 degrees. Bends can also vary in terms of shape, for example sharp bends that form a vertex at the bend ranging to smooth bends that form a curve first and second elongate torque bars includes a bend. Typically, the bend of a torque bar is located in a central portion of the torque bar so that the bend can be positioned at or near the isthmus. First and second torque bars can be independently selected to be straight or include bends, and if bent then independently selected for a desired angle, depending on the abutment teeth alignment of a particular implementation.

A kit can be prepared that includes at least one size of proximal bar and at least one size of torque bar and instructions for configuring and aligning the proximal bar and the torque bar as a reinforcement bar combination to provide structural support and to create a direct dental bridge. Typically, kits will include more than one size of proximal bar and more than one size of torque bar. As shown in Figures 6 and 7, kits may include a plurality of different sizes of proximal bars, where each of the plurality of different sizes correspond to a particular type of edentulous space or a particular sized pontic for replacing a particular missing tooth. For example, the proximal bar can be provided in a plurality of different sizes, each of the plurality of different sizes providing a different sized pad with the perimeter of the pad corresponding to a different posterior tooth. Kits will typically include torque bars in a plurality of different sizes and/or a plurality of different shapes. For example, torque bars may be categorized as molar torque bars and bicuspid torque bars depending on the intended occlusal preparation that is to receive a torque bar. Molar torque bars may be provided with larger cross-sectional areas than bicuspid torque bars.

A kit may include proximal bars with wide pads to support the pontic and with sufficiently spaced apart vertical extensions being manufactured and provided for the dentist in a kit of increments of length. For example, a plurality of proximal bar sizes may be provided in a kit for use including proximal bars with pads of varied longitudinal/horizontal length including for example 4mm, 5mm, 6mm, 7mm, 8mm etc to 25mm, as illustrated in Figures 6 or 7. In cases of long spans proximal bars may be made with slight variations to

increase the strength needed for longer spans, ie. proximal bars of pad length greater than 10 mm.

5 A kit may include torque bars of sizes for molar torque bars and of sizes for bicuspid torque bars that can be provided for the dentist to cut to length for placement in each proximal bar and pontic combination where the dentist can select the torque bar for either the molar or bicuspid depending on the abutment tooth. Torque bar size and shape variation schemes may be distinguished on the basis of any convenient category with a molar versus bicuspid categorization being an illustrative example.

10 A kit may include bent torque bars to be used in cases of tipped abutments and cases where the width of the vertical sidewalls of the proximal bar and the direction of the torque bar determined by the pulp horns of the abutment teeth do not accommodate the straight torque bar due to the more than normally experienced rotation and of the abutment teeth. Kits may include a plurality of bent torque bars providing a selection of angular increments for the dentist as shown for example in Figure 11. Bent torque bars may be provided in a plurality of
15 different angles including, for example, one or more angles selected from about 5 degrees, about 10 degrees, about 15 degrees, about 20 degrees, about 25 degrees, about 30 degrees, about 35 degrees, about 40 degrees, about 45 degrees, about 50 degrees, about 55 degrees, about 60 degrees, or any angle therebetween. Bent torque bars may also be categorized as molar torque bars and bicuspid torque bars, with molar torque bars typically providing a
20 larger lateral cross-sectional area than bicuspid torque bars.

The proximal bar and the torque bars are an assembly that act in combination and cooperate to form a structural reinforcement for a direct dental bridge. The reinforcement is a framework that provides a supporting scaffold for placing and shaping a restorative material to replace at least one missing tooth.

25 Torque bars are not joined or coupled to the proximal bar until the torque bars are positioned with the proximal bar during a direct dental bridge restoration and the proximal bars and torque bars reinforcement combination is fixed in position by application and curing of a restorative material such as a photo-curable composite resin restorative material having properties for replacement of a posterior tooth or properties for replacement of a canine
30 anterior tooth. The reinforcement bar combination may be used with any suitable dental

restorative material. The restorative material is often chosen to be a composite resin restorative material, but other restorative materials may also be used. . Composite resins are often composed of Bis-GMA and other dimethacrylate monomers (TEGMA, UDMA, HDDMA), a filler material such as silica and in most current applications, a photoinitiator.

5 As examples of composite resin restorative material that may be useful, the composite resin restorative material may include a photoinitiator and one or more compounds from the group consisting of glass, silica, zirconia, ceramic, quartz, and aluminum.

Manufacturing of the proximal bars and torque bars can be accomplished using any suitable technique, including any suitable mold, machining or extrusion technique. Each

10 proximal bar is typically an integral unit and each torque bar is typically an integral unit.

The proximal bar and the first and second elongate torque bars can be varied in size and shape depending on the requirements of a direct restoration as dimensions of occlusal cavity preparation and edentulous space differ among posterior teeth, for example bicuspids provide a smaller occlusal surface compared to molars. Tables 1 and 2 provide illustrative

15 examples showing differences in longitudinal and lateral dimensions comparing single tooth replacements with a direct dental bridge.

Table 1. Examples of longitudinal dimensions for direct bridge structural elements for producing direct restorations to replace a single missing tooth.

Missing tooth	Proximal bar – central pad length (mm)	Mesial torque bar length (mm)	Distal torque bar length (mm)
1st bicuspid	3-5	n/a	5-6 (2nd Bicuspid) + 4-6 (proximal bar)
2nd bicuspid	3-5	5-6 (1st Bicuspid) + 4-6 (proximal bar)	8-9 (1st molar) + 4-6 (proximal bar)
1st molar	5-9	5-6 (2nd Bicuspid) + 4-6 (proximal bar)	8-9 (2nd molar) + 5-10 (proximal bar)
2nd molar	5-9	8-9 (1st molar) + 5-10 (proximal bar)	8-9 (3rd molar) + 5-10 (proximal bar)
3rd molar (wisdom tooth)	n/a	n/a	n/a

Table 2. Examples of lateral dimensions for direct bridge structural elements for producing direct restorations to replace a single missing tooth.

Missing tooth	Lateral spacing of Vertical sidewalls of Proximal bar: interior width (mm)	Mesial torque bar width (mm)	Distal torque bar width (mm)
1st bicuspid	4-6	n/a	1.0-1.4
2nd bicuspid	4-6	1.0-1.4	1.2-1.8
1st molar	4-6	1.0-1.4	1.2-1.8
2nd molar	4-6	1.2-1.8	1.2-1.8
3rd molar (wisdom tooth)	n/a	n/a	n/a

Manufacturing of the proximal bars and torque bars can be accomplished using any suitable technique, including any suitable mold, machining or extrusion technique. Each proximal bar is typically an integral unit and each torque bar is typically an integral unit. Proximal bars and torque bars can be made from the same or different material as desired. Proximal bars and torque bars can be made of any suitable dental material used for reinforcement bars such as dental ceramic materials including for example zirconia, alumina toughened zirconia, yttria stabilized zirconia, or Ceria-doped tetragonal zirconia polycrystal/alumina (Ce-TZP/Al₂O₃).

The proximal bar has small insertion arms/ends that fit into proximal preparations in the abutment teeth where the proximal preparations have a flat bottom or gingival seat, and where the flat proximal gingival seat is cut as wide as is biologically beneficial where this width is up to about 5 mm wide but frequently less than about 4 mm wide.

The insertion arm of the proximal bar can be flat where it inserts into the abutment tooth and sits on the flat gingival seat so it can resist rotational forces around the long axis of the bridge. When bent torque bars are used in combination with the proximal bar, one or both of the insertion arms can be configured with substantially parallel first and second vertical extensions or sidewalls and therefore the range of vertical dimension of the insertion arm can be increased by the added thickness of the vertical extension. Regardless of whether the

insertion arm includes vertical sidewalls or is devoid of vertical sidewalls, the apical surface of the insertion arm will typically be flat to sit on a flat gingival seat of a proximal preparation.

5 The insertion arm of the proximal bar typically ranges from about 2mm wide to about 5mm wide. The insertion arm width should be sufficiently narrow to preserve the embrasure space for tooth and gum cleansing and is frequently less than about 4mm, with widths closer to 5mm wide suitable in some cases of large teeth.

10 The proximal preparation is cut deep enough gingivally to allow for the placement of the torque bar in the occlusal preparation coronal to the proximal bar, where the occlusal preparation is cut reasonably no more than 2 mm deep into the occlusal surface.

To accommodate the proximal bar and the torque bar the proximal preparation must be cut a minimum of 3 mm deep or even 4mm deep thus allowing the vertical depth of the proximal preparation to accept a proximal bar gingivally in the proximal preparation and torque bar sitting coronal to the proximal bar in the proximal preparation .

15 If the proximal preparation is cut 3 mm deep then the proximal bar can be 1mm thick with the occlusal preparation being cut the 2 mm deep. If the proximal preparation is cut 4mm deep then the insertion end of the proximal bar can be 2mm thick and the occlusal preparation can be cut 2mm deep.

20 Typically the proximal preparation will not be cut more than 4mm deep because the abutment tooth narrows towards the root area and so cutting the proximal bar deeper than the 4 mm results in the proximal preparation getting closer to the nerve of the tooth.

25 Based on steric and spatial constraints observed in mouths, size ranges of various portions of the proximal bar may be established. For example, the insertion arm of the proximal bar functions well in the shape of a rectangular bar that has a flat bottom to sit on a flat gingival seat of a proximal preparation, where the flat bottom insertion arm is most often 2 to 4 mm wide and 1 to 2 mm vertically high. When bent torque bars are used in combination with the proximal bar, one or both of the insertion arms can be configured with substantially parallel first and second vertical extensions or sidewalls and therefore the range of vertical dimension of the insertion arm can be increased by the added thickness of the
30 vertical extension.

The central planar pad of the proximal bar is a thin flat plate or platform designed to support the width (bucco-lingual) and length (mesio-distal) of a replacement pontic tooth where the perimeter of the pad is of circular or oval shape or has rounded corners, and the pad typically ranges from 1 to 2mm in thickness. The pad can be up to 3mm thick but over 2 mm the pad gets difficult to use in numerous cases in the mouth as there is commonly only 5mm of space between the gingiva of an edentulous space and an occlusal surface of a corresponding tooth extending from the opposing jaw. The coronal surface of the central planar pad will typically be flat. The apical surface of the central planar pad may be flat or may optionally be modified to mimic and facilitate a pontic shape. For example, to mimic a desired pontic shape the apical surface of the pad may be rounded on its lateral edges, or the apical surface could be rounded as a partial cylinder surface or partial domed surface so that a lateral cross-section of the pad shows a substantially flat coronal surface and a rounded apical surface, thereby providing an apical surface that mimics the base of the pontic as it contacts the gingival surface. It should be noted that even if the apical surface is optionally rounded, the apical surface of the insertion arms will remain flat.

The maximum width of most teeth is about 10 mm. However the pontic has to be made with a covering of composite resin surrounding the proximal bar so space is needed on both sides of the proximal bar pad for the composite covering over the sides of the proximal pad. Therefore, the width of the central pad portion of the proximal bar can typically range from about 5 mm to about 9 mm, and frequently ranges from about 6 mm to about 7 mm.

Thus, a useful structure of the proximal bar is a flat pad in a central portion of the proximal bar, the flat pad ranging from about 5mm to about 9mm wide and from about 1mm to about 2mm thick with round corners to mimic the round shape of a tooth with proximal insertion arms which extend as rectangular bars from the opposing sides of the flat pad where the insertion arm ends are about 2mm to about 4 mm wide and from about 1mm to about 2 mm thick. The insertion arms can be provided with a length from about 5mm to about 6 mm so the dentist can cut them to length and fit them into the proximal preparations across the span. When bent torque bars are used in combination with the proximal bar, one or both of the insertion arms can be configured with substantially parallel first and second vertical

extensions or sidewalls and therefore the range of vertical dimension of the insertion arm can be increased by the added thickness of the vertical extension.

Insertion arms/ends can be sized to fit in any convenient manner including, for example, sized to predetermined dimensions as manufactured or sized by a dentist that cuts and/or shapes mesial and distal insertion arms to fit mesial and distal proximal preparations, respectively, when creating a specific direct dental bridge. As an example of a dentist cutting a proximal bar during a direct dental bridge procedure, proximal bars can be manufactured with each insertion arm having a minimum 6 mm length/longitudinal dimension, with each arm cut and/or shaped by the dentist so that arms fit mesial and distal proximal preparations and fit the span. In this example, about 3 mm on each insertion arm can be cut away leaving 3mm of each insertion arm sitting in the mesial and distal proximal preparation.

A central planar pad is a platform or plate in a central location of the proximal bar. The central planar pad is wider than both the first insertion arm and the second insertion arm. An advantage of the central pad being wider than first and second insertion arms is that the central pad can provide improved pontic support compared to a prior art proximal bar that has a single and consistent lateral cross-section area along its entire longitudinal length. Another advantage is that central pad does not extend within an embrasure space between a pontic and an abutment tooth as compared to embrasure encroachment seen in a prior art proximal bar. A further advantage of central planar pad is it provides a platform for wider spacing of vertical extensions to accommodate a greater range of angular orientation of torque bars due to rotated teeth. These advantages are illustrated in Figure 13.

Figure 13A shows a top view (coronal view) of an abutment molar 80 and an abutment bicuspid 82 and a molar pontic 200 between the two abutments. It can be seen that in normal architecture the contacts of the teeth are small defining the isthmus 202 of the pontic with each abutment tooth and the embrasure spaces 204 are the indentations of space on either side (buccal side and lingual side) of the isthmus contact 202. The embrasure spaces 204 are needed to allow adequate cleaning of the gum tissues

Figure 13B shows a one-size-fits-all prior art proximal bar 210 installed into the abutment teeth and across and within the pontic. The prior art proximal bar 210 has a single and consistent lateral cross-section area along its entire longitudinal length and as a result is

cut to size and used for all direct restorations to replace a missing posterior tooth regardless of the specific details of the abutment teeth and edentulous space.

Figure 13B shows that the single width prior art proximal bar 210 which is attempting to give adequate occlusal support to the width of the pontic 200 is encroaching on the embrasure spaces 204 at the isthmus 202 of the pontic and the abutments.

Since the prior art proximal bar 210 requires a single and consistent width along its entire longitudinal length, the choice of width faces dueling or competing concerns of sufficient width in the central location of the proximal bar to provide pontic support and sufficient narrowness at the ends of the proximal bar to avoid encroachment upon embrasure spaces.

Figure 13C shows that proximal bar 10 solves these dueling or competing concerns by providing a central pad that is wider than both the first and second insertion arms. The insertion arms, 20 and 30, are sufficiently narrow in width to protect the embrasure space 204 for adequate cleaning and also to leave enough room for composite resin to cover the proximal bar and hide it under the composite resin for desired esthetics. Furthermore, the central pad 12 is sufficiently wide in the central portion of the proximal bar to provide suitable pontic support. Thus, proximal bar 10 can provide suitable pontic support without compromising embrasure spaces. The wider central pad of proximal bar 10 compared to the relatively narrow central portion of prior art proximal bar 210 provides a further advantage of allowing laterally spaced apart vertical sidewalls or walls to be far enough apart to accept the torque bars from rotated teeth.

Proximal bars and torque bars described herein may be used in any desired combination to produce a direct dental bridge. Methods to produce direct dental bridges comprise steps of positioning a proximal bar to span from a mesial proximal preparation to a distal proximal preparation and positioning at least one torque bar in an occlusal preparation and covering the proximal bar and torque bar with a restorative material. The step of positioning at least one torque bar can include a first torque bar contacting a mesial occlusal preparation but not contacting a distal occlusal preparation, and a second torque bar contacting a distal occlusal preparation, but not contacting a mesial occlusal preparation. A further step can include for example cutting a proximal bar and cutting at least one torque bar

to be suitably sized for a proximal and occlusal preparations, respectively. A further step can include selecting a suitable proximal bar from a plurality of different sized and/or shaped proximal bars. A further step can include selecting a suitable torque bar from a plurality of different sized and/or shaped torque bars. A further step can include curing and shaping of restorative material.

Directional terms such as vertical, horizontal, coronal, occlusal, apical, gingival, buccal, lingual, mesial, and distal back are intended in the context of a reinforcement bar as placed in a direct bridge in a mouth, but use of these directional terms does not require that reinforcement bar be installed in a mouth and can describe structural features of a reinforcement bar outside while outside the mouth.

Embodiments described herein are intended for illustrative purposes without any intended loss of generality. Still further variants, modifications and combinations thereof are contemplated and will be recognized by the person of skill in the art. Accordingly, the foregoing detailed description is not intended to limit scope, applicability, or configuration of claimed subject matter.

WHAT IS CLAIMED IS:

1. A reinforcement combination for supporting a direct dental bridge, the reinforcement combination comprising:

an elongate proximal bar comprising:

- 5 a central planar pad bound by a perimeter, a coronal facing surface and an apical facing surface,
 a first insertion arm extending in a mesial direction from the perimeter of the pad,
 a second insertion arm extending in a distal direction from the perimeter of the
10 pad;
 a first vertical sidewall extending in a coronal direction from the coronal facing surface of the pad;
 a second vertical sidewall extending in a coronal direction from the coronal oriented surface of the pad;
- 15 a first elongate torque bar having a first longitudinal end positioned external to the proximal bar and a second longitudinal end positioned on the coronal facing surface of the pad and within the perimeter of the pad; and
a second elongate torque bar having a first longitudinal end positioned external to the proximal bar and a second longitudinal end positioned on the coronal facing surface of the
20 pad and within the perimeter of the pad.
2. The reinforcement combination of claim 1, wherein the first and second vertical sidewalls are aligned to be substantially parallel.
3. The reinforcement combination of claim 1 or 2, wherein the vertical sidewalls are confined within the perimeter of the pad.
- 25 4. The reinforcement combination of any one of claims 1 to 3, wherein the coronal facing surface of the pad bordered by first and second vertical sidewalls forms a trough with first and second opposing and open longitudinal ends, each of the first and second opposing and open longitudinal ends aligned and communicative with at least one of the first and second insertion arms.

5. The reinforcement combination of any one of claims 1 to 4, wherein the coronal facing surface of pad located between the first and second vertical sidewalls forms a continuous and co-planar surface with at least one of the first and second insertion arms.
6. The reinforcement combination of any one of claims 1 to 5, wherein at least one of the first and second vertical sidewalls is positioned at the perimeter of the pad.
7. The reinforcement combination of claim 6, wherein the first and second vertical sidewalls are positioned along laterally opposing portions of the perimeter of the pad.
8. The reinforcement combination of any one of claims 1 to 5, wherein at least one of the first and second vertical sidewalls is laterally offset from the perimeter of the pad.
9. The reinforcement combination of claim 8, wherein both the first and second vertical sidewalls are laterally offset from the perimeter of the pad.
10. The reinforcement combination of any one of claims 1 to 9, wherein a lateral spacing of the first and second vertical sidewalls is greater than the width of at least one of the first and second insertion arms.
11. The reinforcement combination of any one of claims 1 to 10, wherein the lateral spacing of the first and second vertical sidewalls is at least three fold greater than the width of at least one of the first and second elongate torque bars.
12. The reinforcement combination of any one of claims 1 to 11, wherein the first longitudinal end of the first elongate torque bar is positioned within a first occlusal cavity preparation, and the first longitudinal end of the second elongate torque bar is positioned within a second occlusal cavity preparation.
13. The reinforcement combination of any one of claims 1 to 12, wherein the second longitudinal end of the first elongate torque bar is positioned in between the first and second vertical sidewalls, and the second longitudinal end of the second elongate torque bar is positioned in between the first and second vertical sidewalls.
14. The reinforcement combination of any one of claims 1 to 13, wherein the second longitudinal end of the first elongate torque bar contacts a surface of at least one of the first and second vertical sidewalls, and the second longitudinal end of the second elongate torque bar contacts a surface of at least one of the first and second vertical sidewalls.

15. The reinforcement combination of any one of claims 1 to 14, wherein the first elongate torque bar has at least one longitudinal flat side receiving abutting support from the first insertion arm and less than 75% of the longitudinal distance of the coronal facing surface of the pad.
- 5 16. The reinforcement combination of any one of claims 1 to 15, wherein the second elongate torque bar has at least one longitudinal flat side receiving abutting support from the second insertion arm and less than 75% of the longitudinal distance of the coronal facing surface of the pad.
17. The reinforcement combination of any one of claims 1 to 16, wherein at least one of the
- 10 first and second elongate torque bars includes a bend.
18. The reinforcement combination of claim 17, wherein the bend is a vertex.
19. The reinforcement combination of claim 17, wherein the bend is a curve.
20. The reinforcement combination of any one of claims 17 to 19, wherein the bend is located in a central section of the at least one of the first and second elongate torque bars.
- 15 21. The reinforcement combination of any one of claims 17 to 20, wherein both of the first and second elongate torque bars include a bend.
22. A kit comprising the reinforcement combination of any one of claims 1 to 21 and instructions for use of the reinforcement combination to create a direct dental bridge.
23. The kit of claim 22, wherein the proximal bar is provided in a plurality of different sizes,
- 20 each of the plurality of different sizes providing a different sized pad with the perimeter of the pad corresponding to a different posterior tooth.
24. The kit of claim 23, wherein the posterior tooth is a bicuspid or a molar.
25. A direct dental bridge restoration comprising the reinforcement combination of any one of claims 1 to 21 and a restorative material.
- 25 26. The direct dental bridge restoration of claim 25, wherein the restorative material is a composite resin restorative material.
27. The direct dental bridge restoration of claim 25, wherein the composite resin restoration filler material includes a photoinitiator and one or more compounds selected from the group consisting of glass, silica, zirconia, ceramic, quartz, and alumina.

28. An elongate proximal bar for supporting a direct dental bridge, the elongate proximal bar comprising:
a central planar pad bound by a perimeter, a coronal facing surface and an apical facing surface;
- 5 a first insertion arm extending in a mesial direction from the perimeter of the pad;
a second insertion arm extending in a distal direction from the perimeter of the pad;
a first vertical sidewall extending in a coronal direction from the coronal facing surface of the pad; and
a second vertical sidewall extending in a coronal direction from the coronal oriented surface
10 of the pad.
29. The elongate proximal bar of claim 28, wherein the first and second vertical sidewalls are aligned to be substantially parallel.
30. The elongate proximal bar of claim 28 or 29, wherein the vertical sidewalls are confined within the perimeter of the pad.
- 15 31. The elongate proximal bar of any one of claims 28 to 30, wherein the coronal facing surface of the pad bordered by first and second vertical sidewalls forms a trough with first and second opposing and open longitudinal ends, each of the first and second opposing and open longitudinal ends aligned and communicative with at least one of the first and second insertion arms.
- 20 32. The elongate proximal bar of any one of claims 28 to 31, wherein the coronal facing surface of pad located between the first and second vertical sidewalls forms a continuous and co-planar surface with at least one of the first and second insertion arms.
33. The elongate proximal bar of any one of claims 28 to 32, wherein at least one of the first and second vertical sidewalls is positioned at the perimeter of the pad.
- 25 34. The elongate proximal bar of claim 33, wherein the first and second vertical sidewalls are positioned along laterally opposing portions of the perimeter of the pad.
35. The elongate proximal bar of any one of claims 28 to 32, wherein at least one of the first and second vertical sidewalls is laterally offset from the perimeter of the pad.
36. The elongate proximal bar of claim 35, wherein both the first vertical sidewall are
30 laterally offset from the perimeter of the pad.

37. The elongate proximal bar of any one of claims 28 to 36, wherein a lateral spacing of the first and second vertical sidewalls is greater than the width of at least one of the first and second insertion arms.
38. A kit comprising the elongate proximal bar of any one of claims 28 to 37 and instructions
5 for use of the elongate proximal bar to create a direct dental bridge.
39. The kit of claim 38, wherein the proximal bar is provided in a plurality of different sizes, each of the plurality of different sizes providing a different sized pad with the perimeter of the pad corresponding to a different posterior tooth.
40. The kit of claim 39, wherein the posterior tooth is a bicuspid or a molar.
- 10 41. A direct dental bridge restoration comprising the elongate proximal bar of any one of claims 28 to 37 and a restorative material.
42. The direct dental bridge restoration of claim 41, wherein the restorative material is a composite resin restorative material.
43. The direct dental bridge restoration of claim 42, wherein the composite resin restorative
15 material includes a photoinitiator and one or more compounds selected from the group consisting of glass, silica, zirconia, ceramic, quartz, and alumina.
44. A reinforcement combination for a direct dental bridge, the reinforcement combination comprising: first and second elongate bars, each of the first and second elongate bars contacting a single occlusal preparation formed in a single abutment tooth and each of the
20 first and second elongate bars having an end positioned on a central pad of a third elongate bar to form a reinforcement scaffold.
45. The reinforcement combination of claim 44, wherein the first elongate bar has a different lateral cross-sectional area or shape than the lateral cross-sectional area of the second elongate bar.
- 25 46. The reinforcement combination of claim 44, wherein at least one of the first and second elongate bars is bent.
47. The reinforcement combination of claim 44, wherein the third elongate bar is seated on and inserts into proximal preparations of both abutment teeth.
48. The reinforcement combination of claim 44, further comprising first and second lateral
30 walls extending coronally from the central planar pad of the third elongate bar.

49. The reinforcement combination of claim 48, wherein the ends of the first and second elongate bars positioned on the central pad are located between interior facing surfaces of the first and second lateral walls that form a trough on the central pad.

50. The reinforcement combination of claim 49, wherein the trough is 1mm to 7mm wide.

5 51. The reinforcement combination of any one of claims 44 to 50, wherein the third elongate bar is from 1mm to 3.5mm in an apical to coronal dimension.

52. The reinforcement combination of any one of claims 44 to 51, wherein the central pad is 5mm to 8mm wide.

10 53. The reinforcement combination of any one of claims, wherein an end of the third elongate bar is a rectangle 1mm to 2mm high and 2mm to 4 mm wide.

54. A reinforcement combination for supporting a direct dental bridge, the reinforcement combination comprising:

an elongate proximal bar comprising:

15 a central planar pad bound by a perimeter, a coronal facing surface and an apical facing surface,

a first insertion arm extending in a mesial direction from the perimeter of the pad,

a second insertion arm extending in a distal direction from the perimeter of the pad;

20 a semi-tubular vertical extension extending in a coronal direction from the coronal facing surface of the pad with the longitudinal axis of the semi-tubular vertical extension aligned perpendicular to the pad; and

an elongate torque bar having a first end positioned external to the proximal bar and having a second end contact and receive abutting support from a coronal surface of the pad.

25 55. The reinforcement combination of claim 54, wherein the semi-tubular vertical extension is bound by an interior concave surface and an exterior convex surface, the concave surface facing towards the second insertion arm and the convex surface facing towards the first insertion arm.

56. The reinforcement combination of claim 54, wherein a base of the semi-tubular vertical extension is coincident with a portion of the perimeter of the pad that joins the first insertion arm.

57. The reinforcement combination of claim 55 or 56, wherein an open axial face of the semi-tubular vertical extension is aligned and communicative with the second insertion arm, the semi-tubular vertical extension blocking communication of the coronal surface of the pad with the first insertion arm.

58. The reinforcement combination of claim 54 wherein the first insertion arm is sized to fit into a preparation of a canine or incisor tooth and the second insertion arm is sized to fit into a preparation of a bicuspid tooth.

59. The reinforcement combination of claim 54, wherein the semi-tubular vertical extension is semi-cylindrical or horseshoe shaped.

60. The reinforcement combination of claim 54, wherein the first end of the elongate torque bar contacts and receive abutting support from an occlusal preparation in a bicuspid tooth.

61. The reinforcement combination of claim 54, wherein the coronal dimension of the first insertion arm is substantially co-extensive with the axial length of the semi-tubular vertical extension.

62. The reinforcement combination of claim 54, wherein the pad is substantially co-planar with the second sidewall arm and the first sidewall arm extends coronally relative to the pad.

63. A reinforcement combination for supporting a direct dental bridge, the reinforcement combination comprising:

an elongate proximal bar comprising:

a central planar pad bound by a perimeter, a coronal facing surface and an apical facing surface,

a first insertion arm extending in a mesial direction from the perimeter of the pad,

a second insertion arm extending in a distal direction from the perimeter of the pad;

a first vertical sidewall extending in a coronal direction from the coronal facing surface of the pad and a co-planar coronal surface of at least one of the first and second insertion arms;

a second vertical sidewall extending in a coronal direction from the coronal oriented surface of the pad and a co-planar coronal surface of at least one of the first and second insertion arms;

5 a first elongate torque bar having a first longitudinal end positioned external to the proximal bar and a second longitudinal end positioned on the coronal facing surface of the pad and within the perimeter of the pad; and

a second elongate torque bar having a first longitudinal end positioned external to the proximal bar and a second longitudinal end positioned on the coronal facing surface of the pad and within the perimeter of the pad.

10 64. The reinforcement combination of claim 63, wherein the first longitudinal end of the first elongate torque bar is positioned within a first occlusal cavity preparation, and the first longitudinal end of the second elongate torque bar is positioned within a second occlusal cavity preparation.

15 65. The reinforcement combination of any one of claim 64, wherein the second longitudinal end of the first elongate torque bar is positioned in between the first and second vertical sidewalls, and the second longitudinal end of the second elongate torque bar is positioned in between the first and second vertical sidewalls.

20 66. The reinforcement combination of anyone of claims 63 to 65, wherein the second longitudinal end of the first elongate torque bar contacts a surface of at least one of the first and second vertical sidewalls, and the second longitudinal end of the second elongate torque bar contacts a surface of at least one of the first and second vertical sidewalls.

25 67. The reinforcement combination of any one of claims 63 to 66, wherein the first elongate torque bar has at least one longitudinal flat side receiving abutting support from the first insertion arm and less than 75% of the longitudinal distance of the coronal facing surface of the pad.

68. The reinforcement combination of any one of claims 63 to 66, wherein the second elongate torque bar has at least one longitudinal flat side receiving abutting support from the second insertion arm and less than 75% of the longitudinal distance of the coronal facing surface of the pad.

69. The reinforcement combination of any one of claims 63 to 68, wherein at least one of the first and second elongate torque bars includes a bend.

70. The reinforcement combination of claim 69, wherein the bend is a vertex.

71. The reinforcement combination of claim 69, wherein the bend is a curve.

5 72. The reinforcement combination of any one of claims 69 to 71, wherein the bend is located in a central section of the at least one of the first and second elongate torque bars.

73. The reinforcement combination of any one of claims 69 to 72, wherein both of the first and second elongate torque bars include a bend.

74. The reinforcement combination of any one of claims 63 to 73, wherein the first and
10 second vertical sidewalls extend in a coronal direction from the coronal oriented surface of the pad and a co-planar coronal surface of both the first and second insertion arms.

75. The reinforcement combination of any one of claims 63 to 74, wherein the first and second vertical sidewalls span the entire length of the proximal bar.

76. An elongate proximal bar for supporting a direct dental bridge, the elongate proximal bar
15 comprising:

a central planar pad bound by a perimeter, a coronal facing surface and an apical facing surface,

a first insertion arm extending in a mesial direction from the perimeter of the pad,

a second insertion arm extending in a distal direction from the perimeter of the pad;

20 a first vertical sidewall extending in a coronal direction from the coronal facing surface of the pad and a co-planar coronal surface of at least one of the first and second insertion arms;

a second vertical sidewall extending in a coronal direction from the coronal oriented surface of the pad and a co-planar coronal surface of at least one of the first and second insertion arms.

25 77. The elongate proximal bar of claim 76, wherein the first and second vertical sidewalls extend in a coronal direction from the coronal oriented surface of the pad and a co-planar coronal surface of both the first and second insertion arms.

78. The elongate proximal bar of claim 77, wherein the first and second vertical sidewalls span the entire length of the proximal bar.

30

FIGURE 1

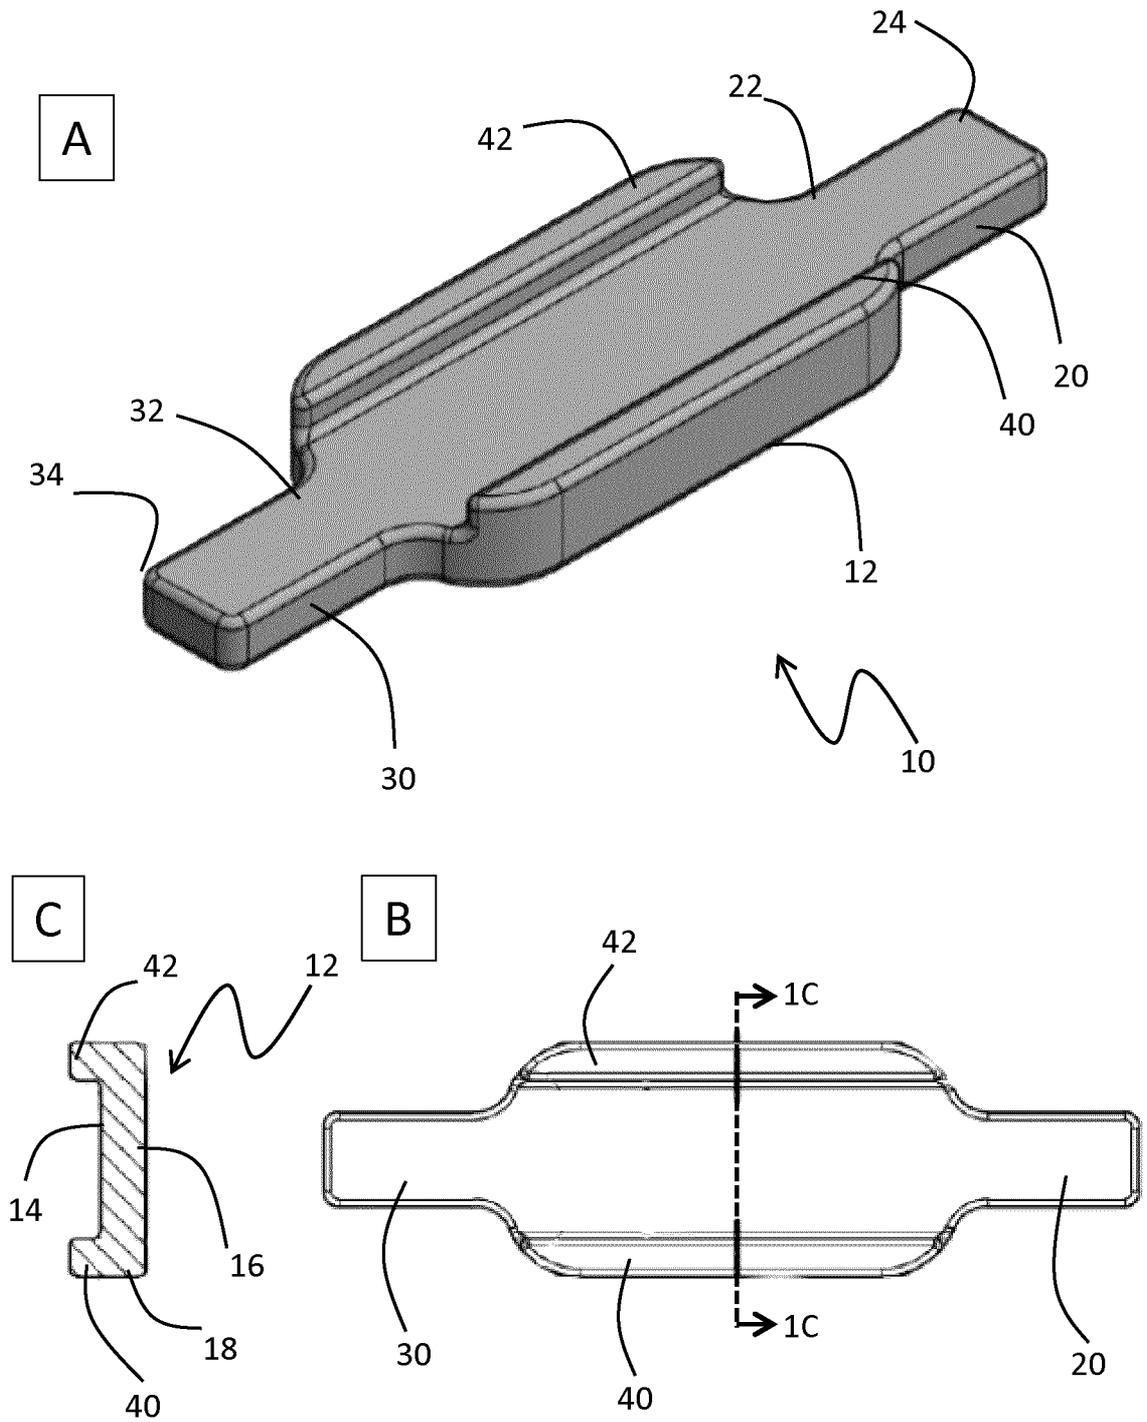


FIGURE 2

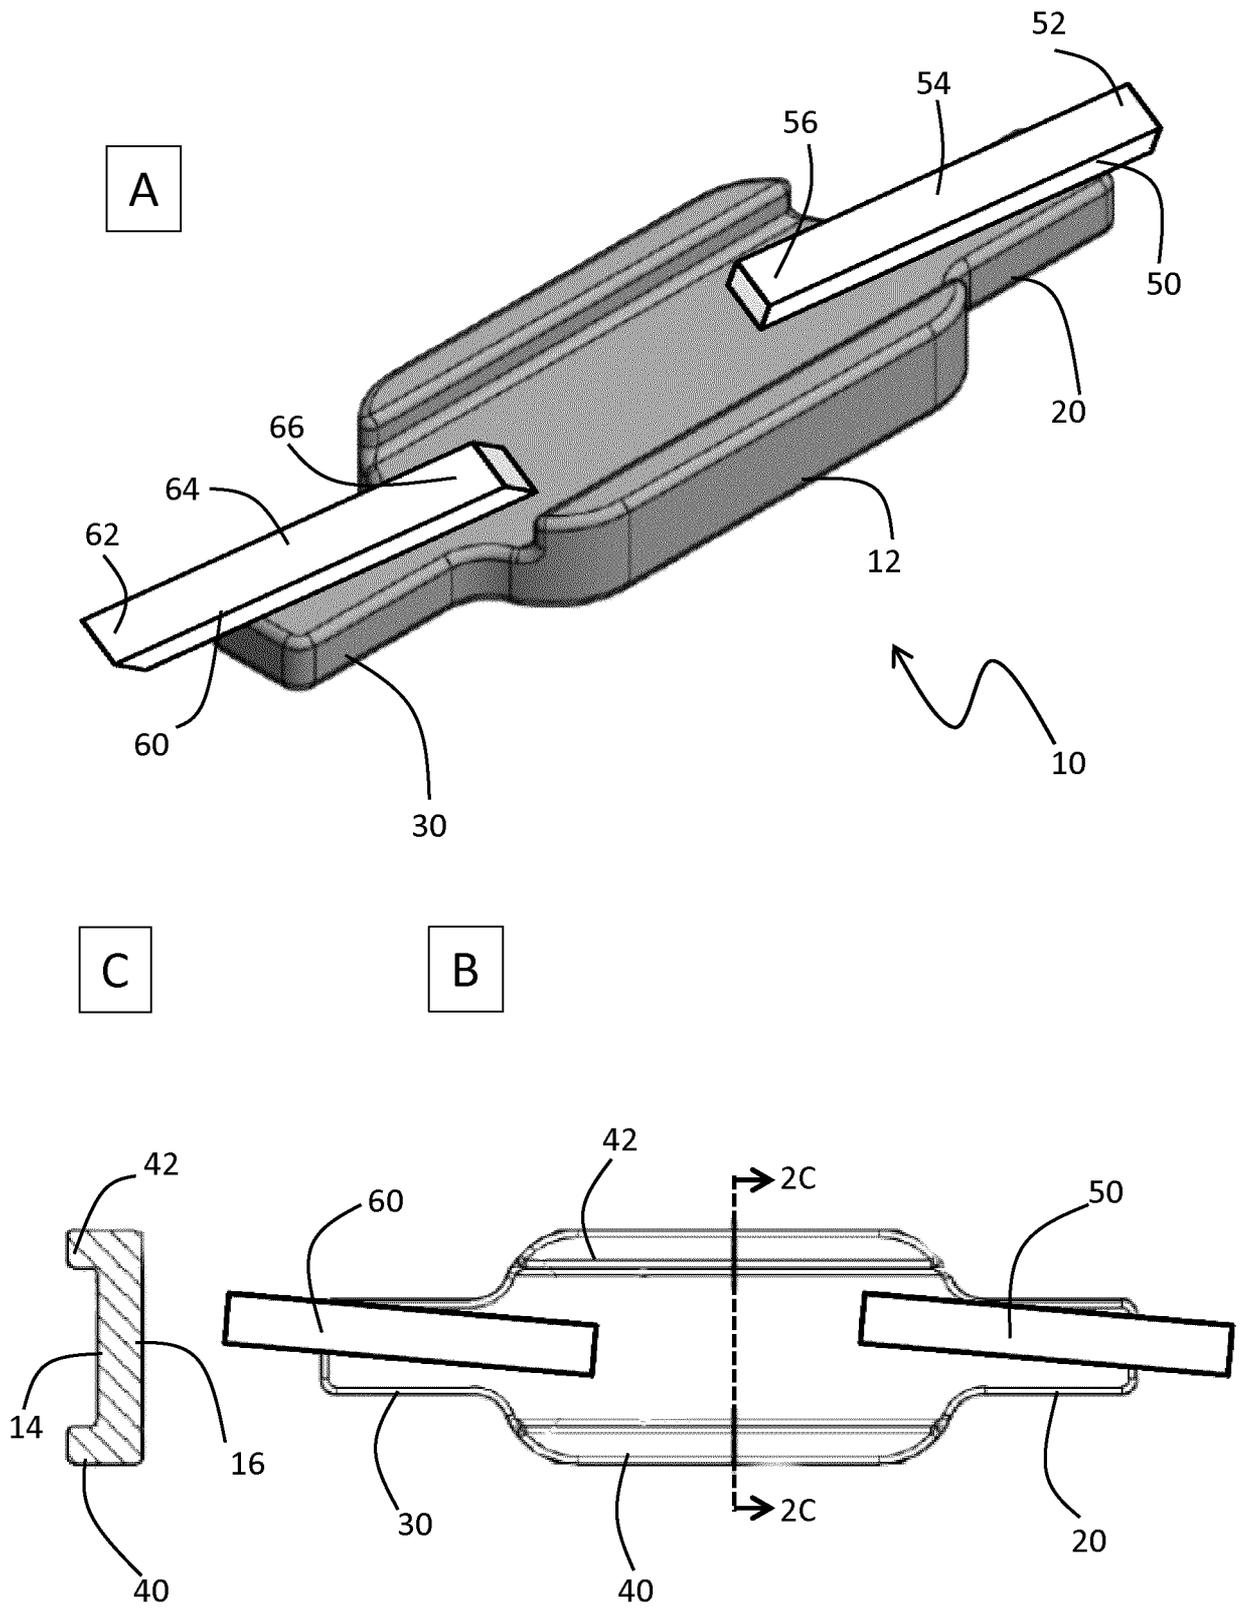


FIGURE 3

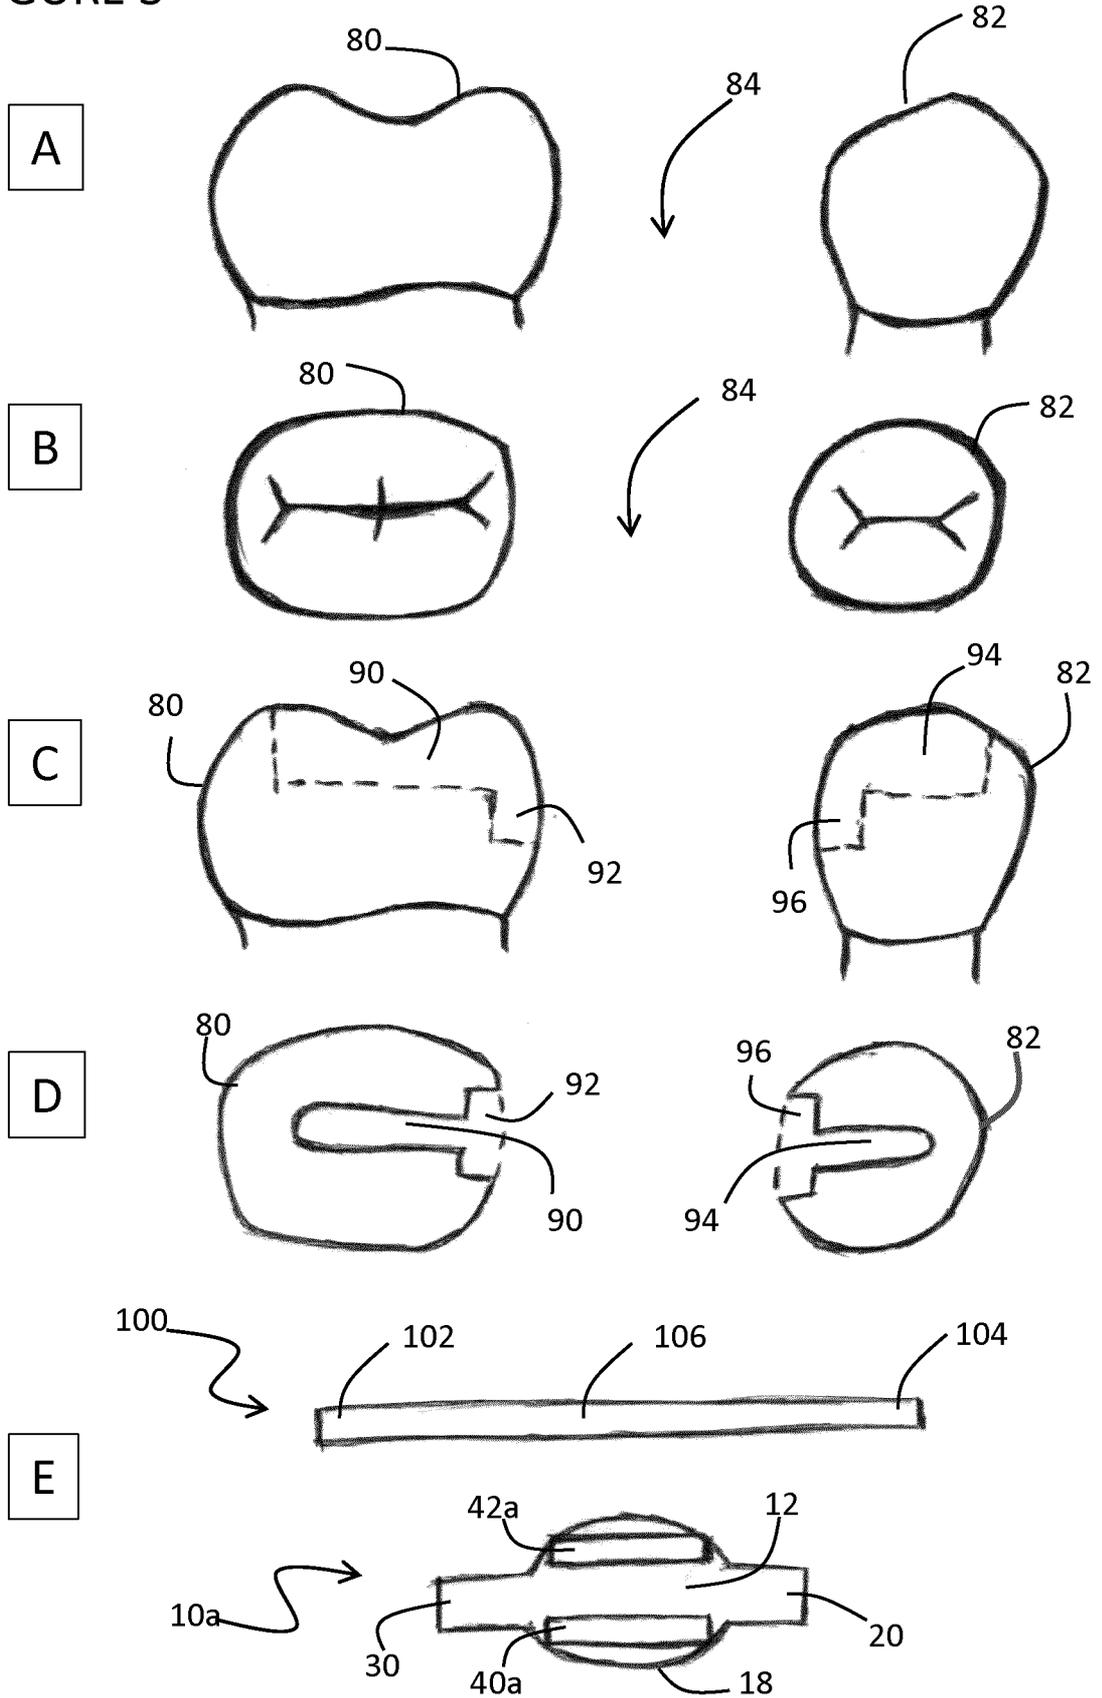


FIGURE 3 (cont'd)

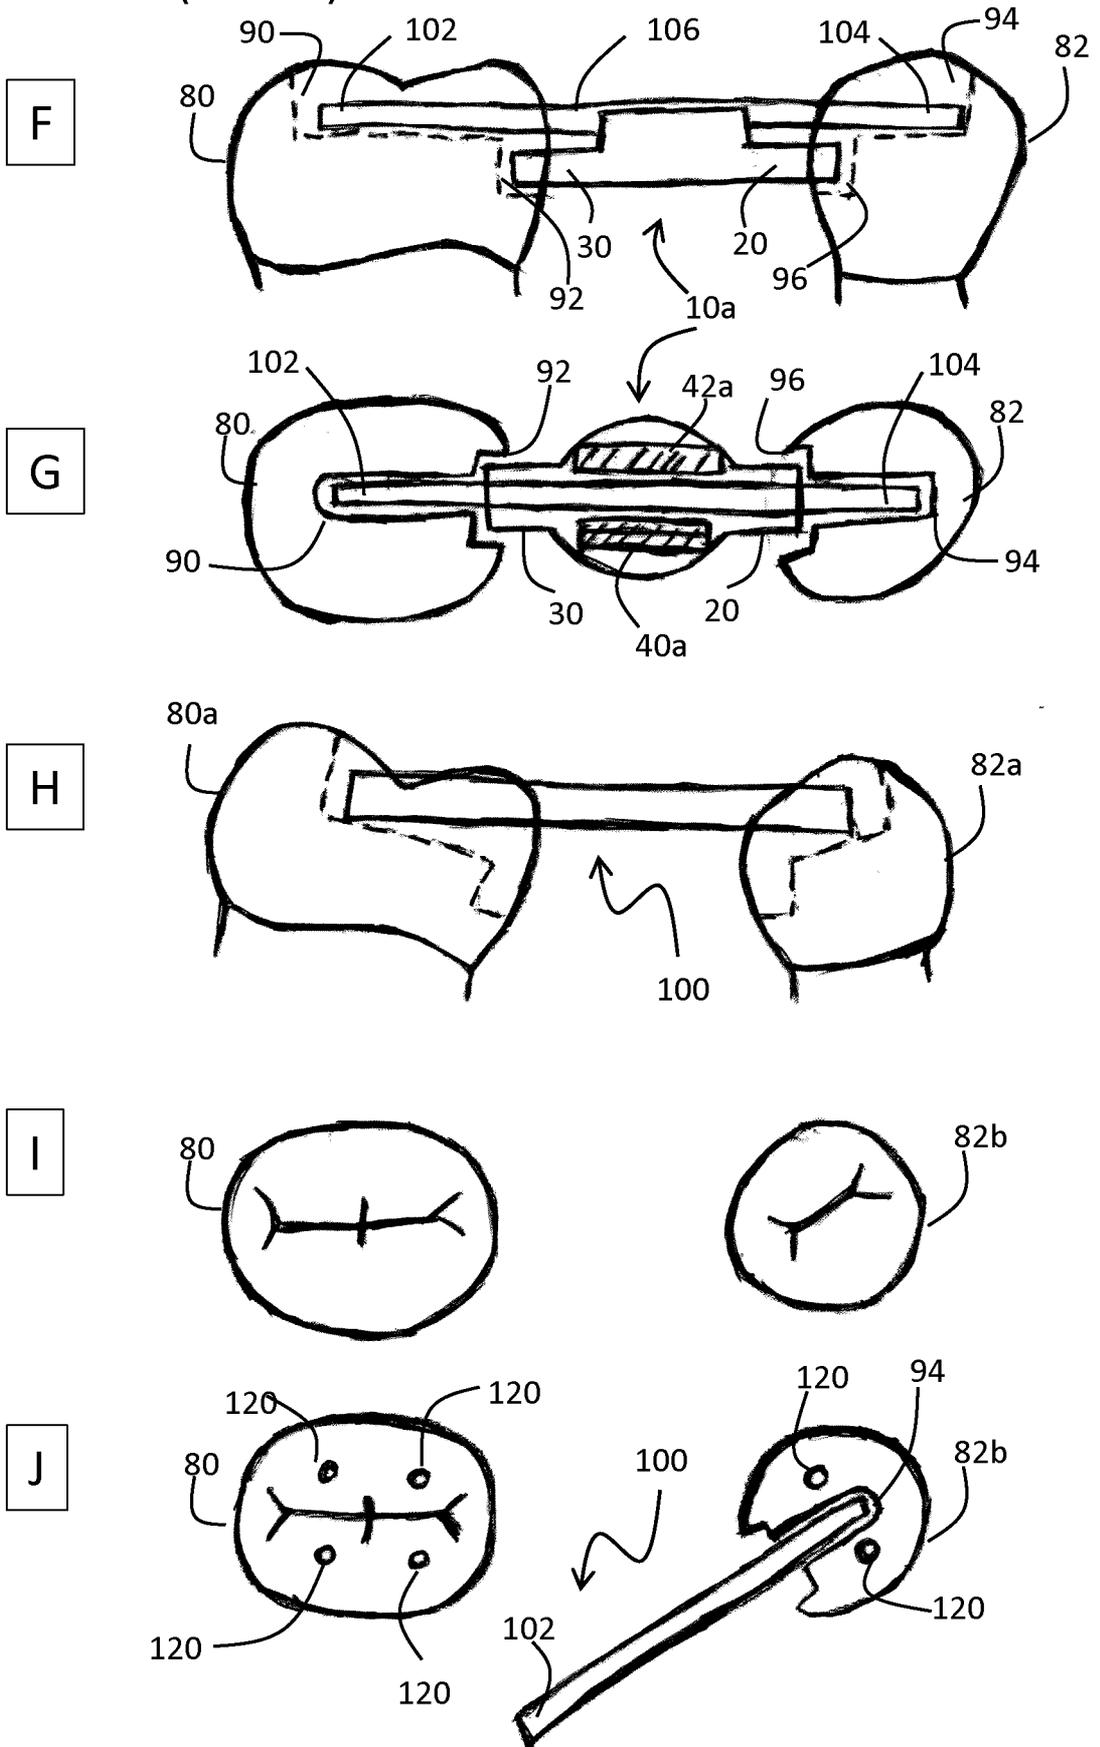


FIGURE 3 (cont'd)

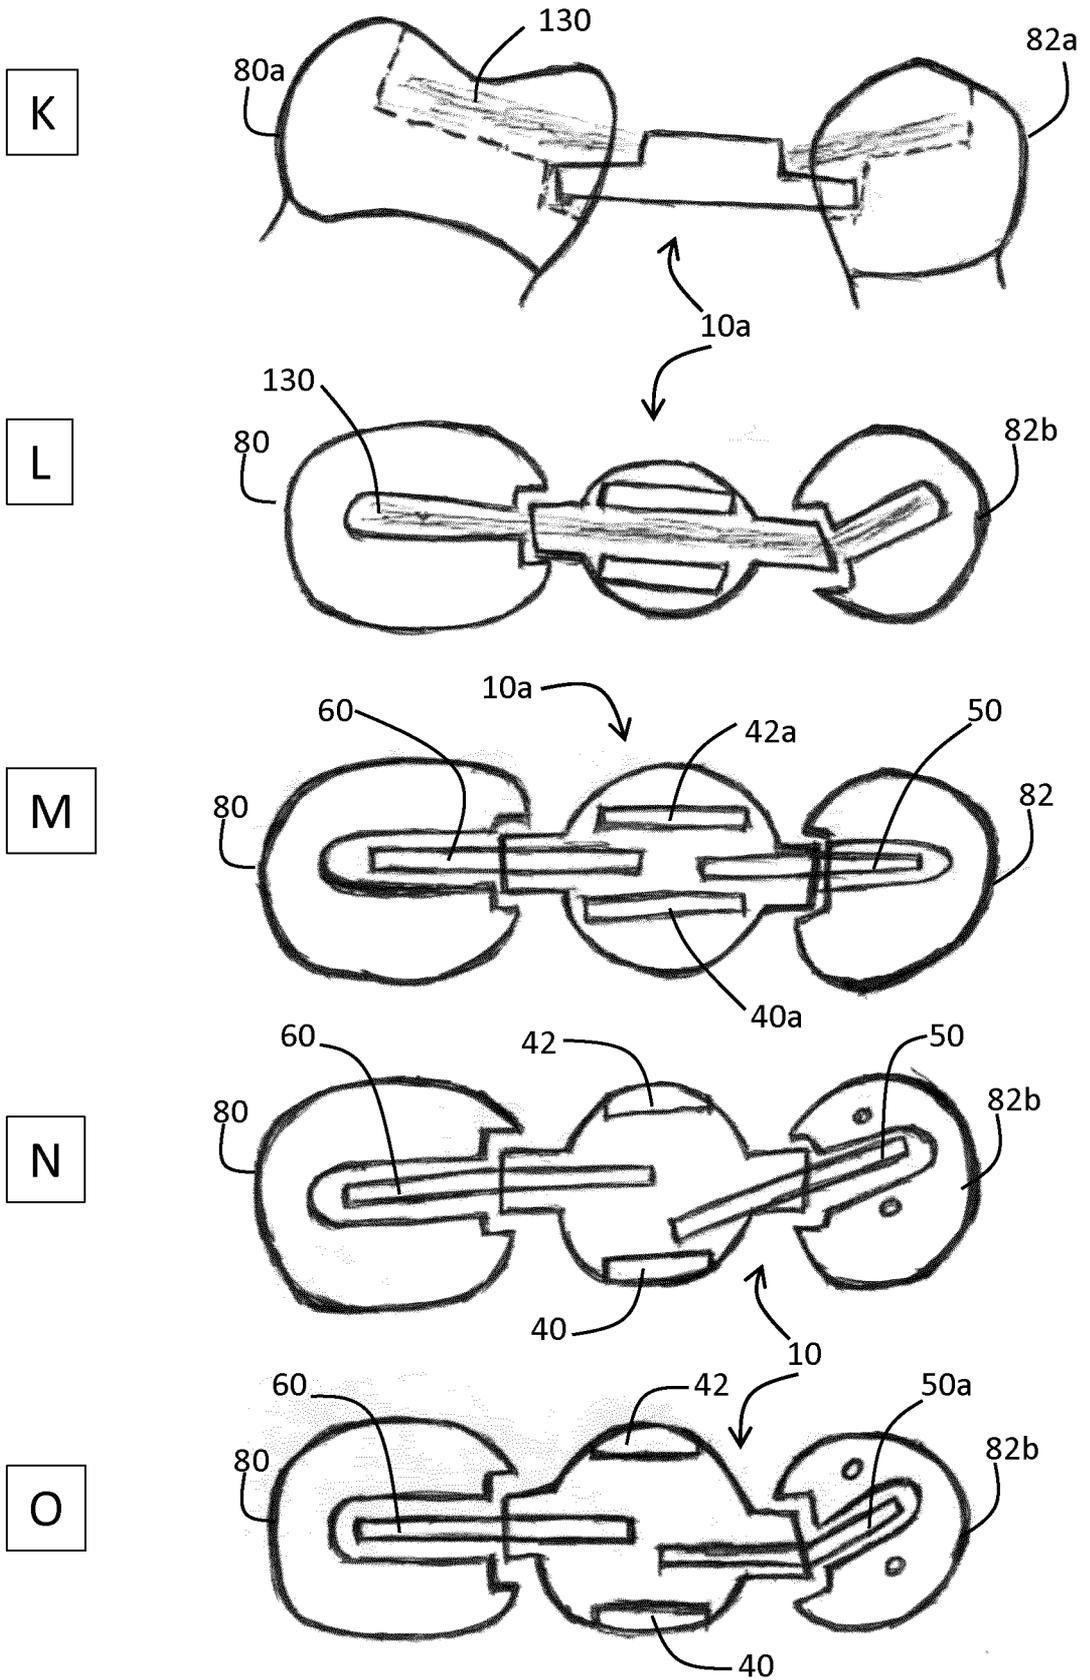


FIGURE 3 (cont'd)

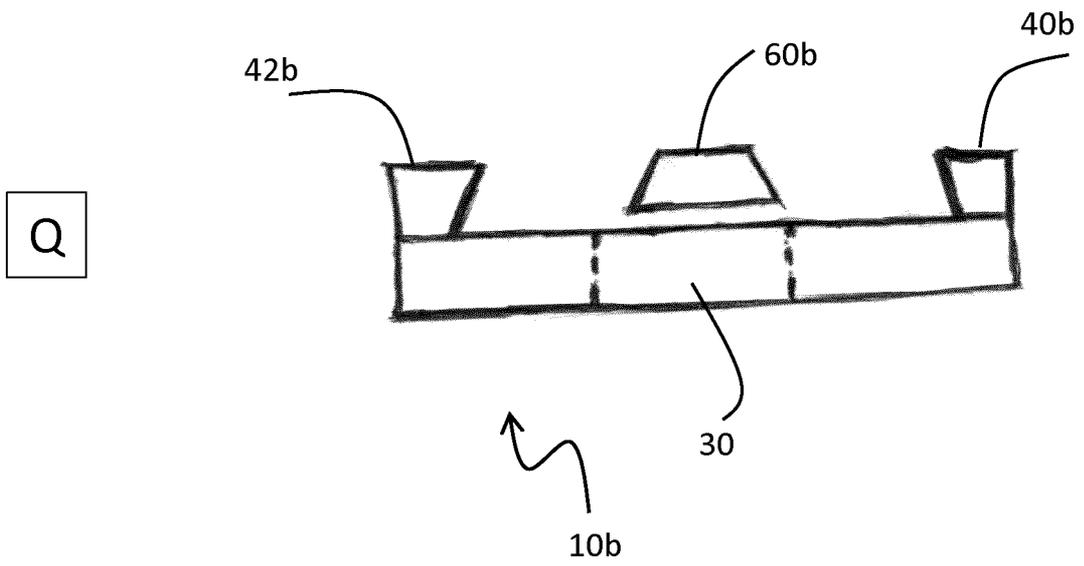
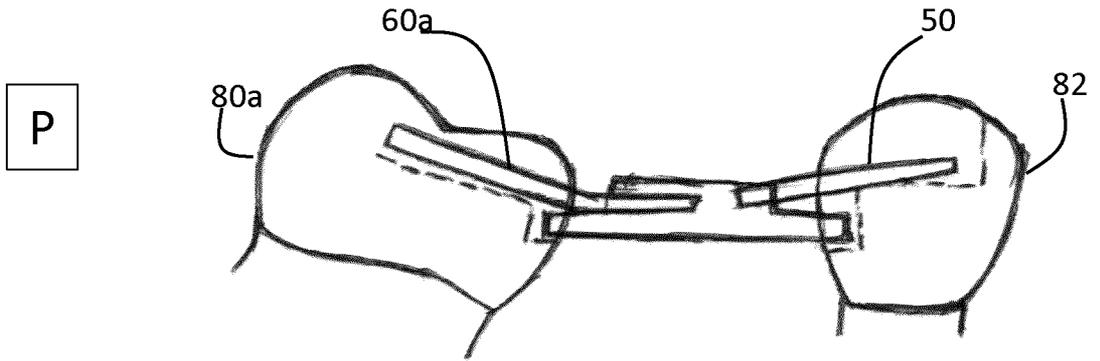


FIGURE 4
Proximal Bar Fracture Test on 13.5mm Span

Sample Number	Load at Max.Load (kN)	Load at Max.Load (lbf)	Displacement at Max. Load (mm)	Load at Cursor Point 1 (kN)	Load at Cursor Point 1 (lbf)	Displacement at Cursor Point 1 (mm)	Dimension on Left (mm)	Dimension on Middle (mm)	Dimension on Right (mm)
1	0.693	156	0.370	0.693	156	0.366	2.46x1.10	1.91x6.13	2.45x1.11
2	0.789	177	0.330	0.789	177	0.331	2.46x1.13	6.17x1.94	2.45x1.12
3	0.801	180	0.360	0.801	180	0.362	2.47x1.11	6.16x1.95	2.46x1.14
4	0.648	146	0.320	0.648	146	0.322	2.46x1.13	6.22x1.95	2.40x1.15
Mean	0.733	165	0.345	0.733	179	0.346	NA	NA	NA
S.D.	0.074	17	0.024	0.074	17	0.022	NA	NA	NA

FIGURE 5


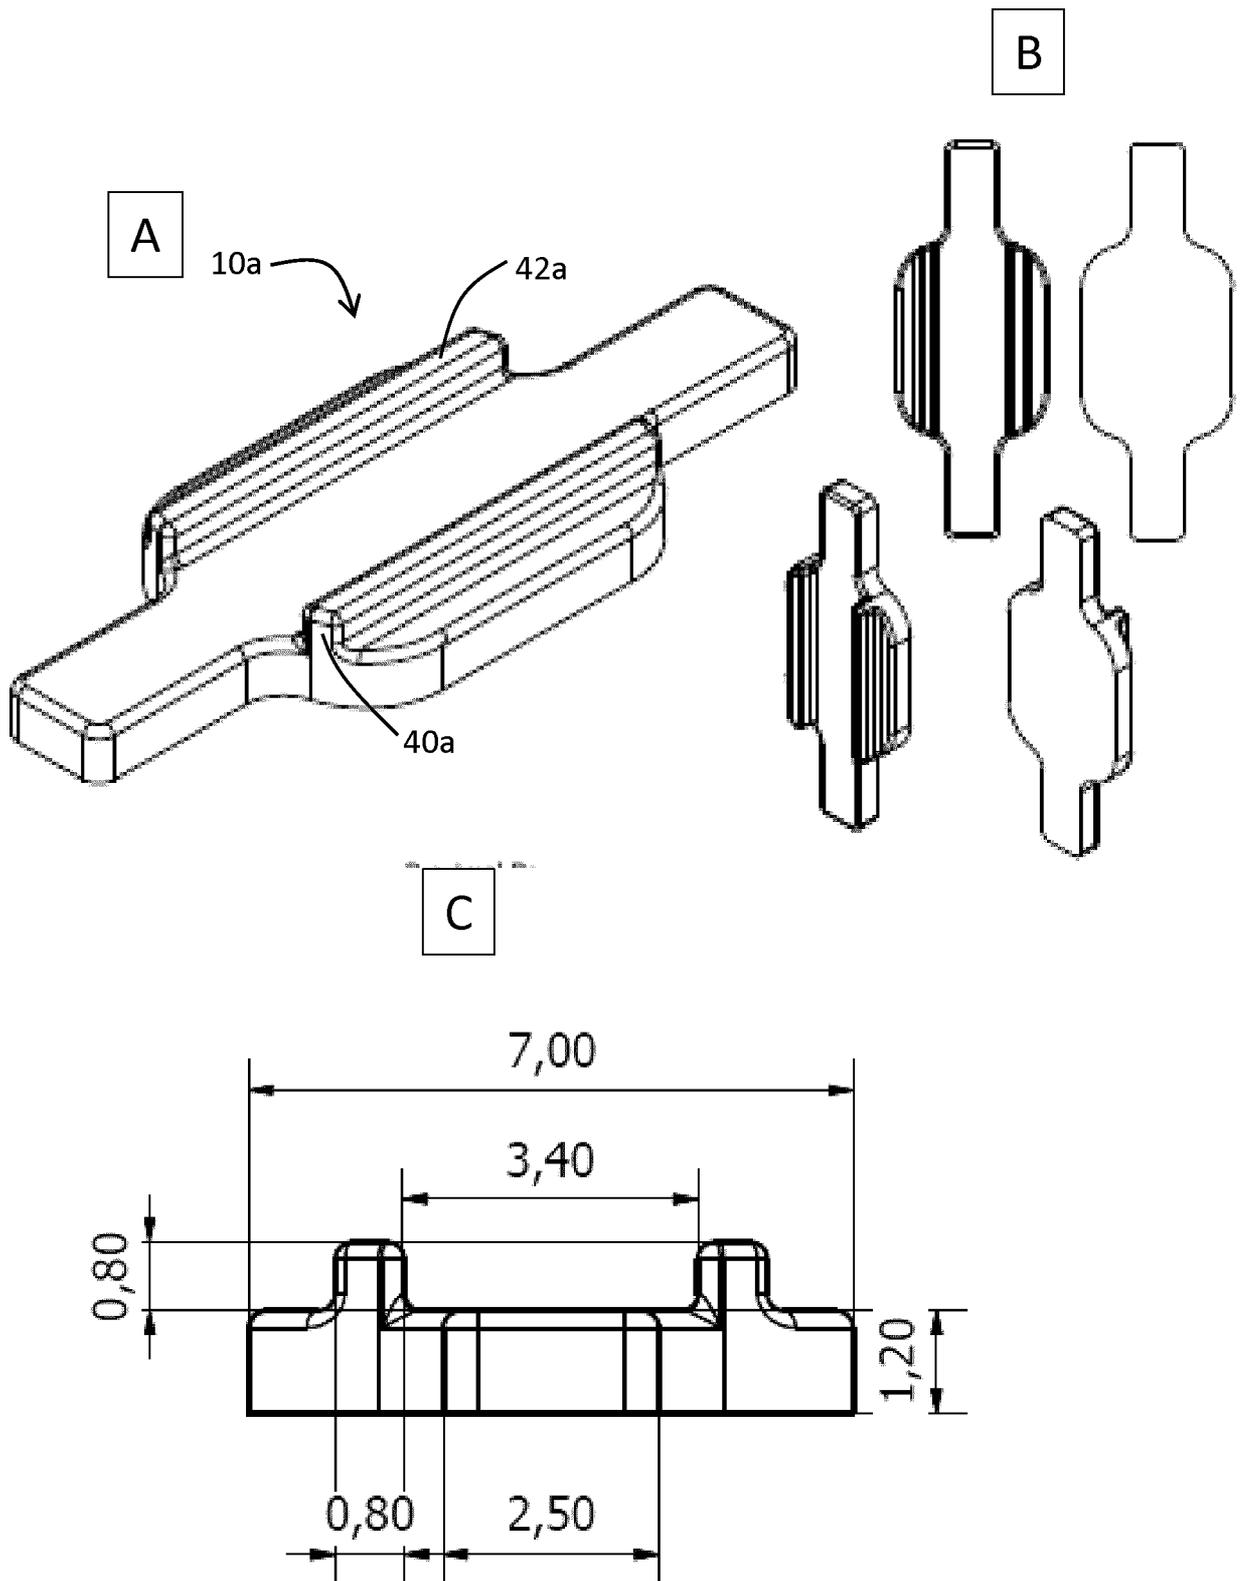


FIGURE 6

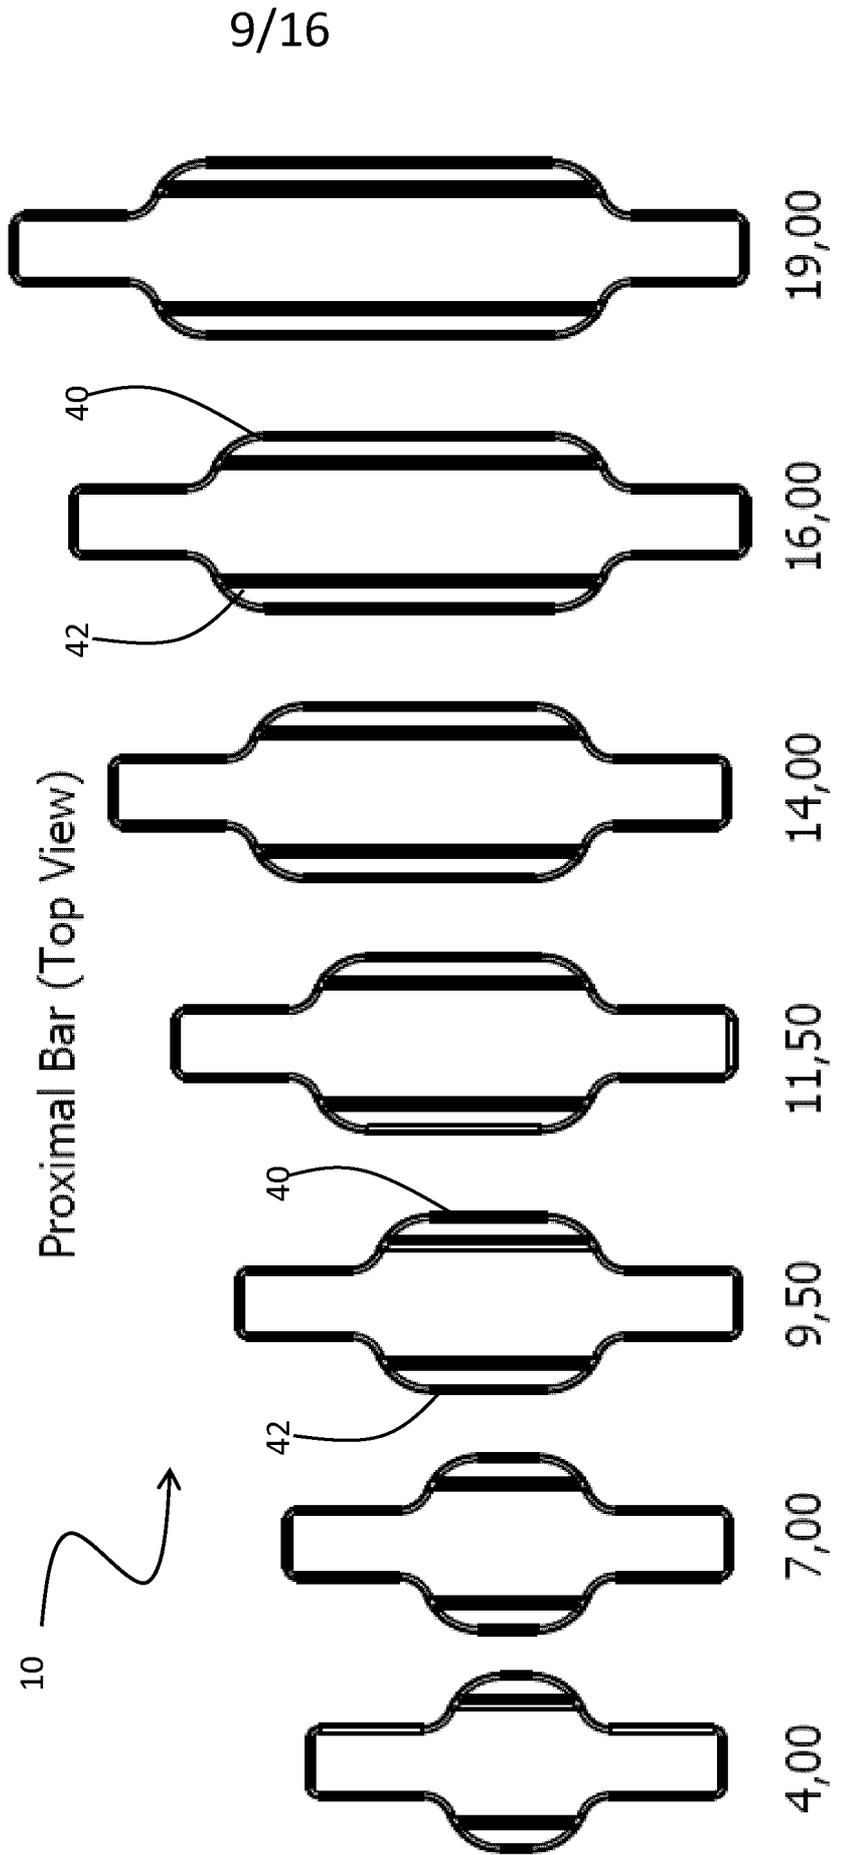

10/16

FIGURE 7


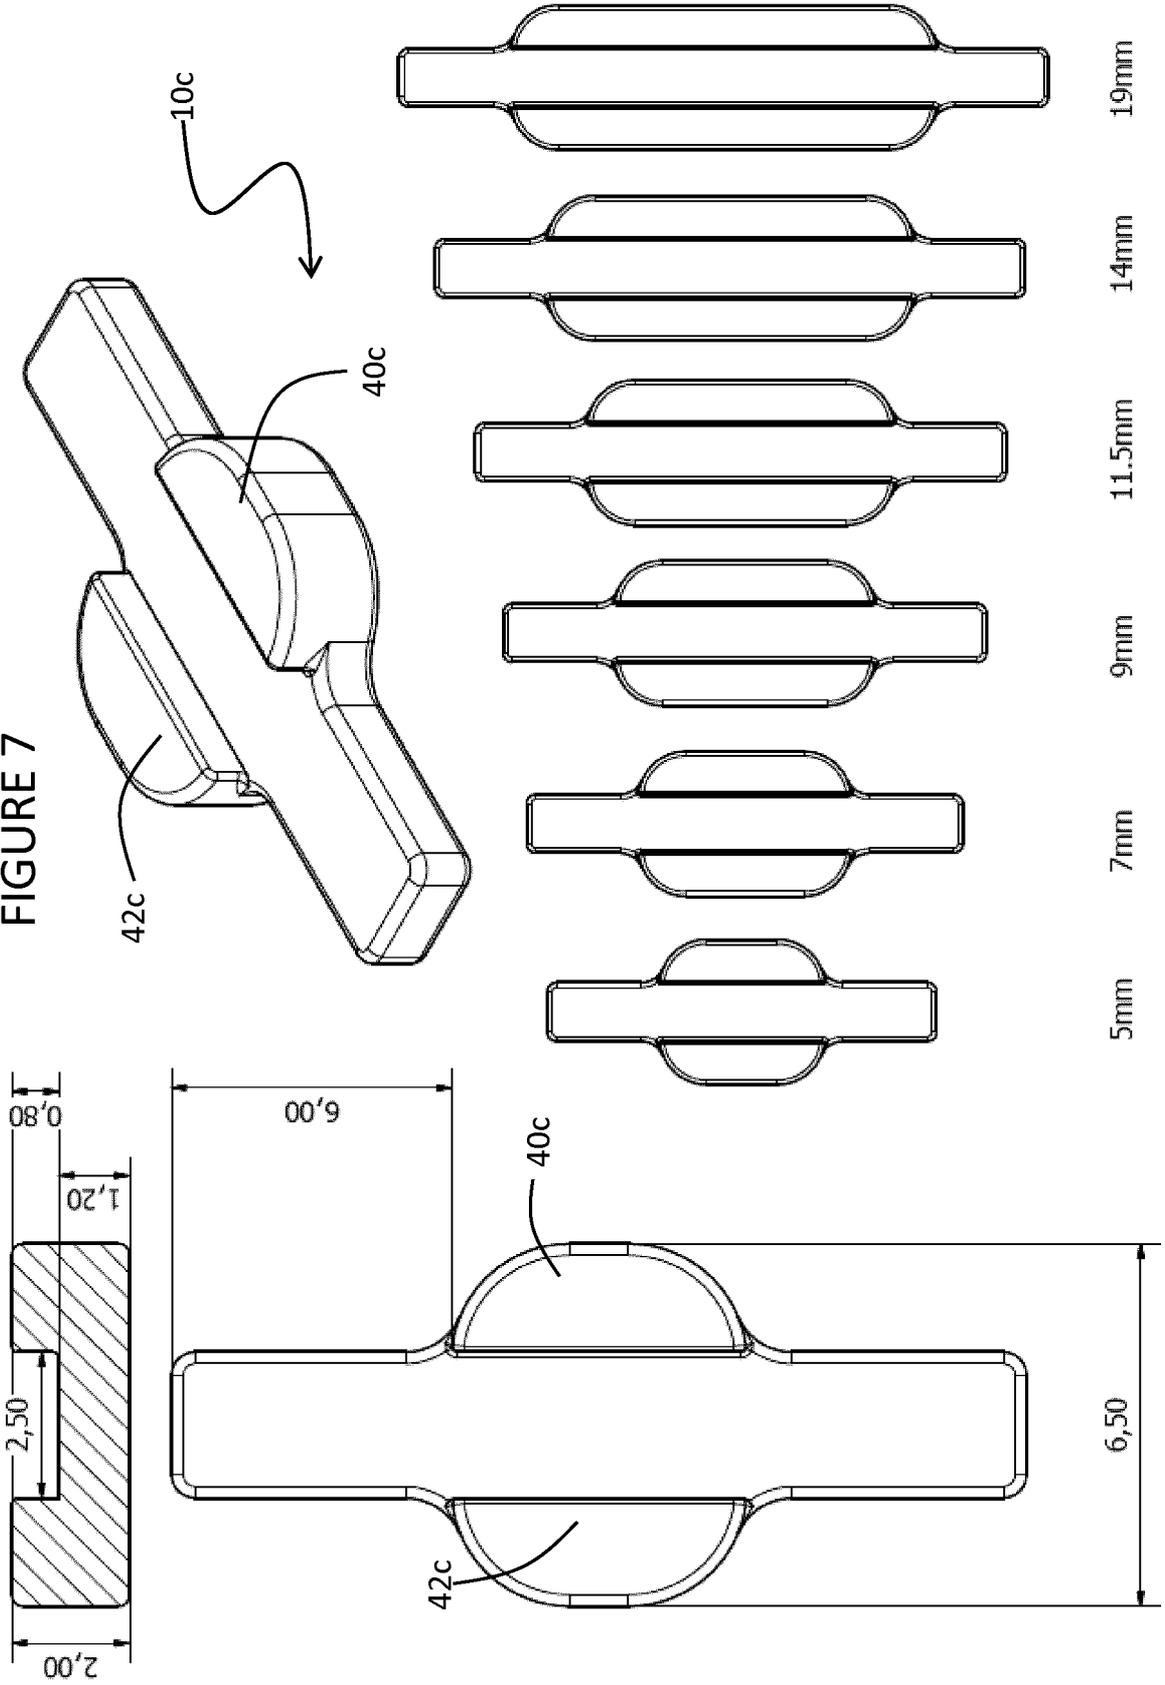



FIGURE 8

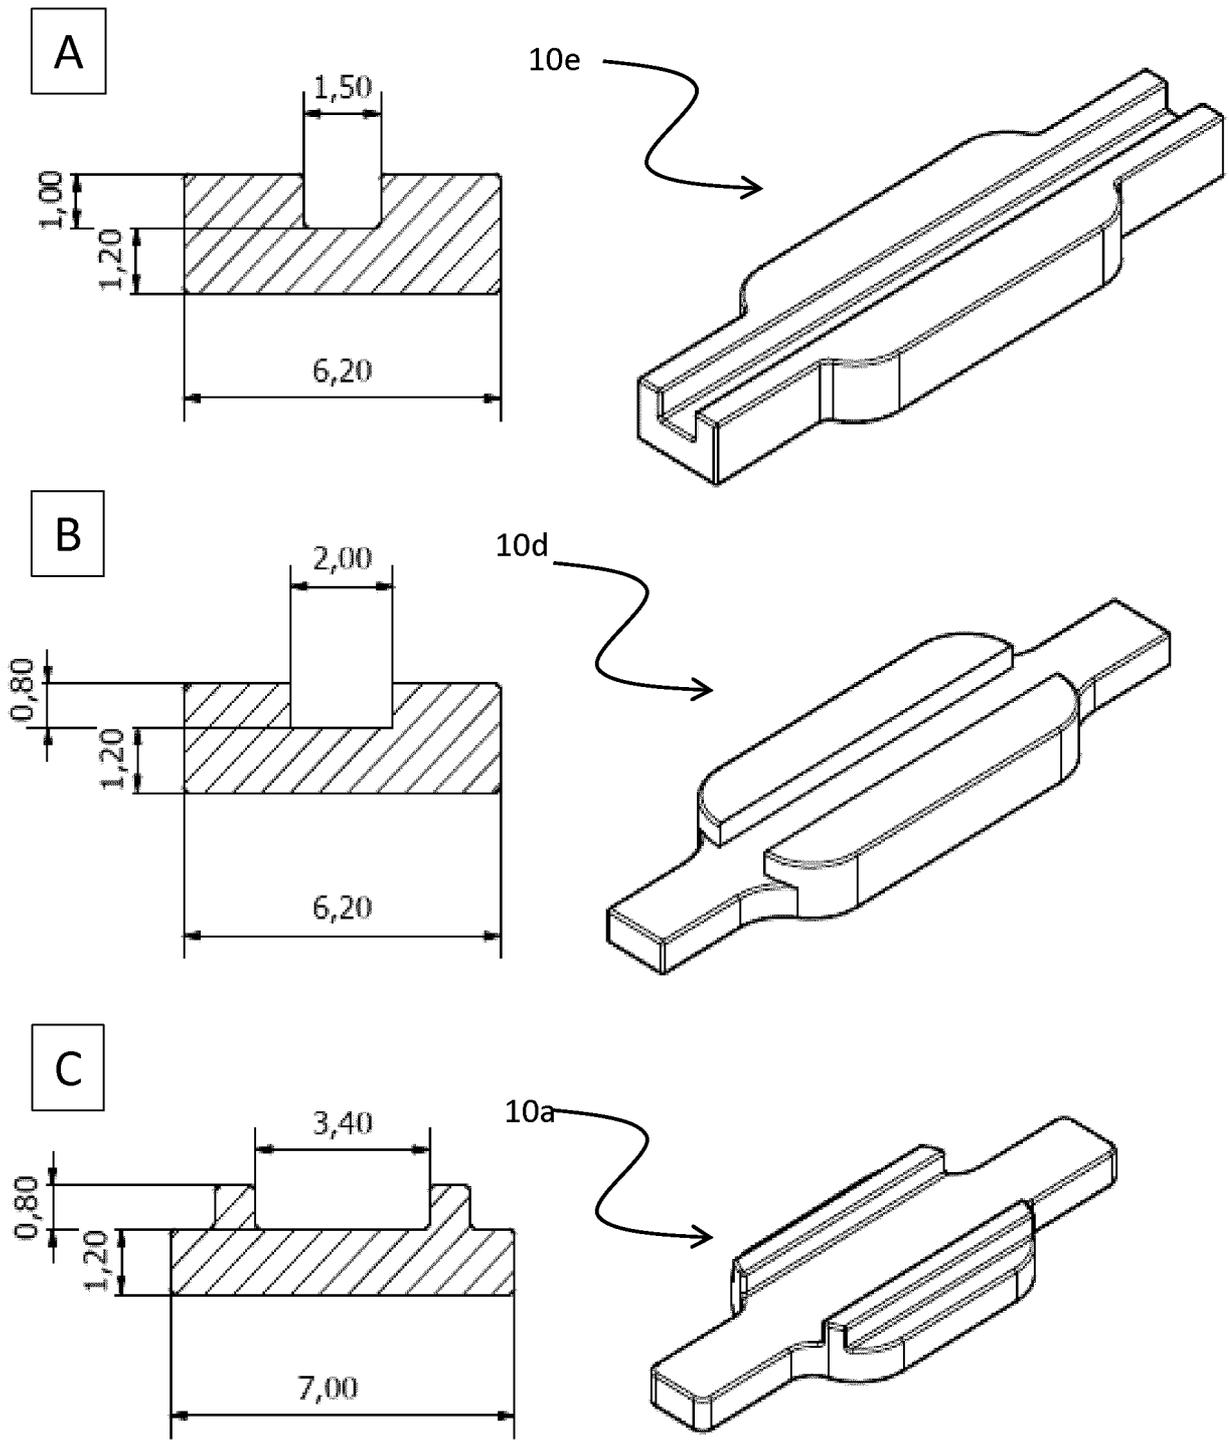


12/16

FIGURE 9

A

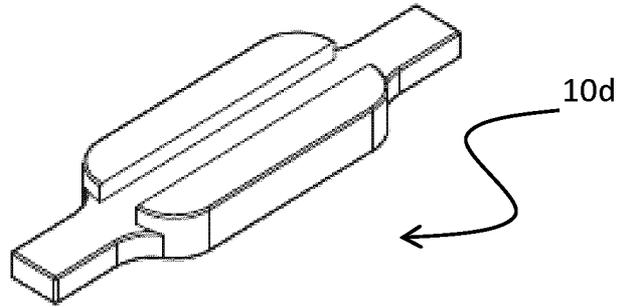

B

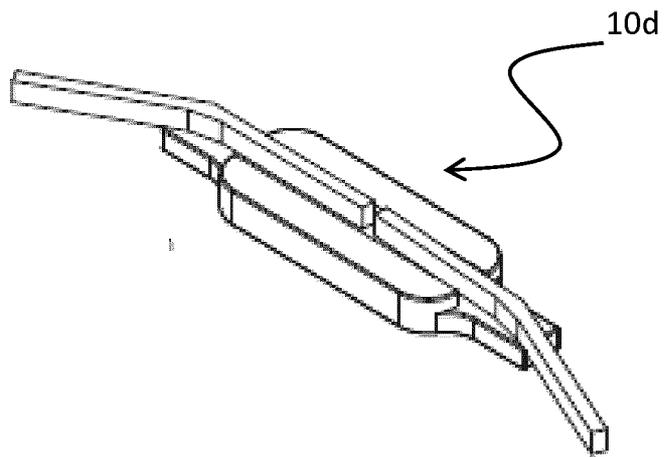

C

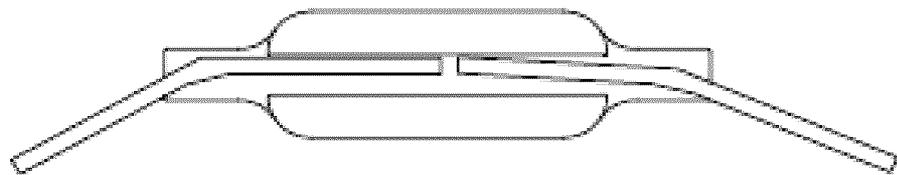


FIGURE 10


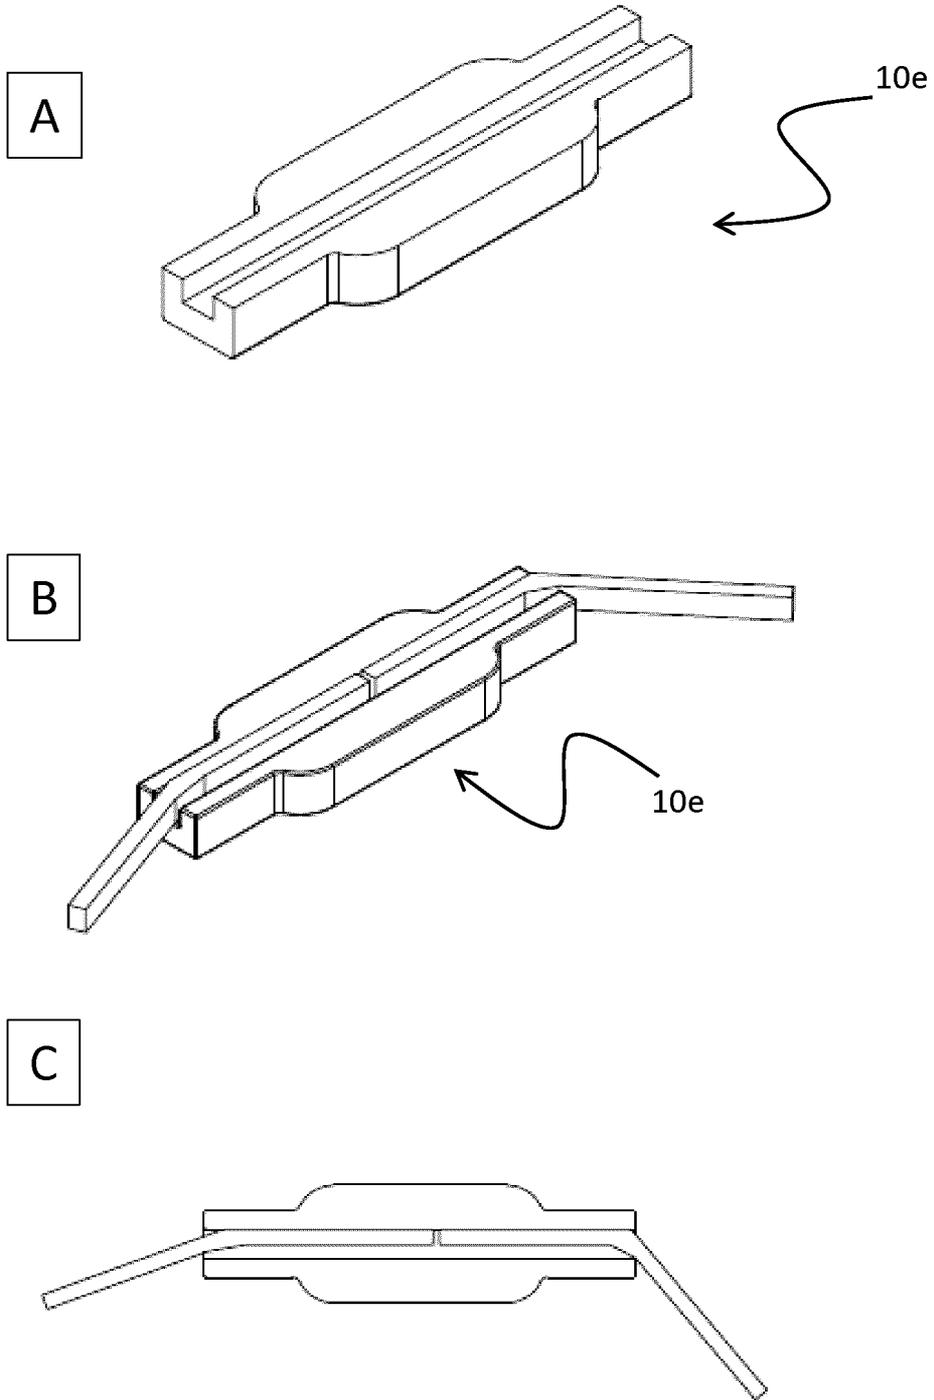


FIGURE 11

A

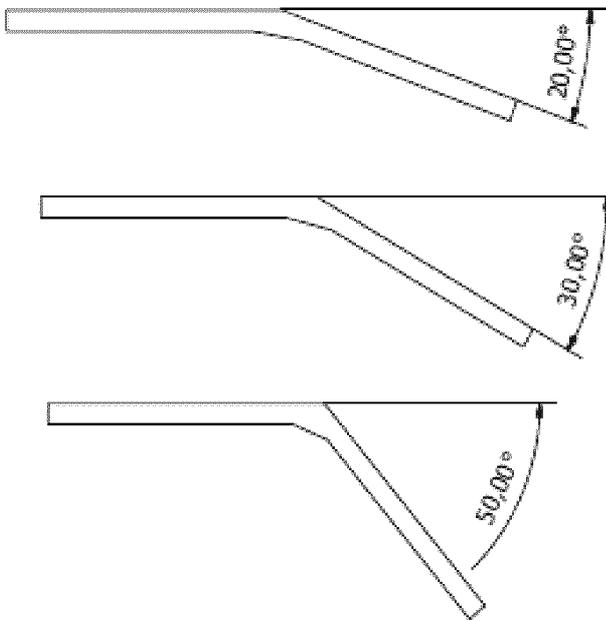

B

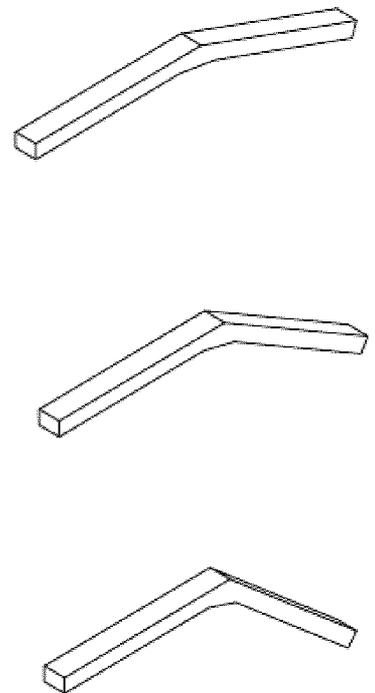


FIGURE 12

15/16


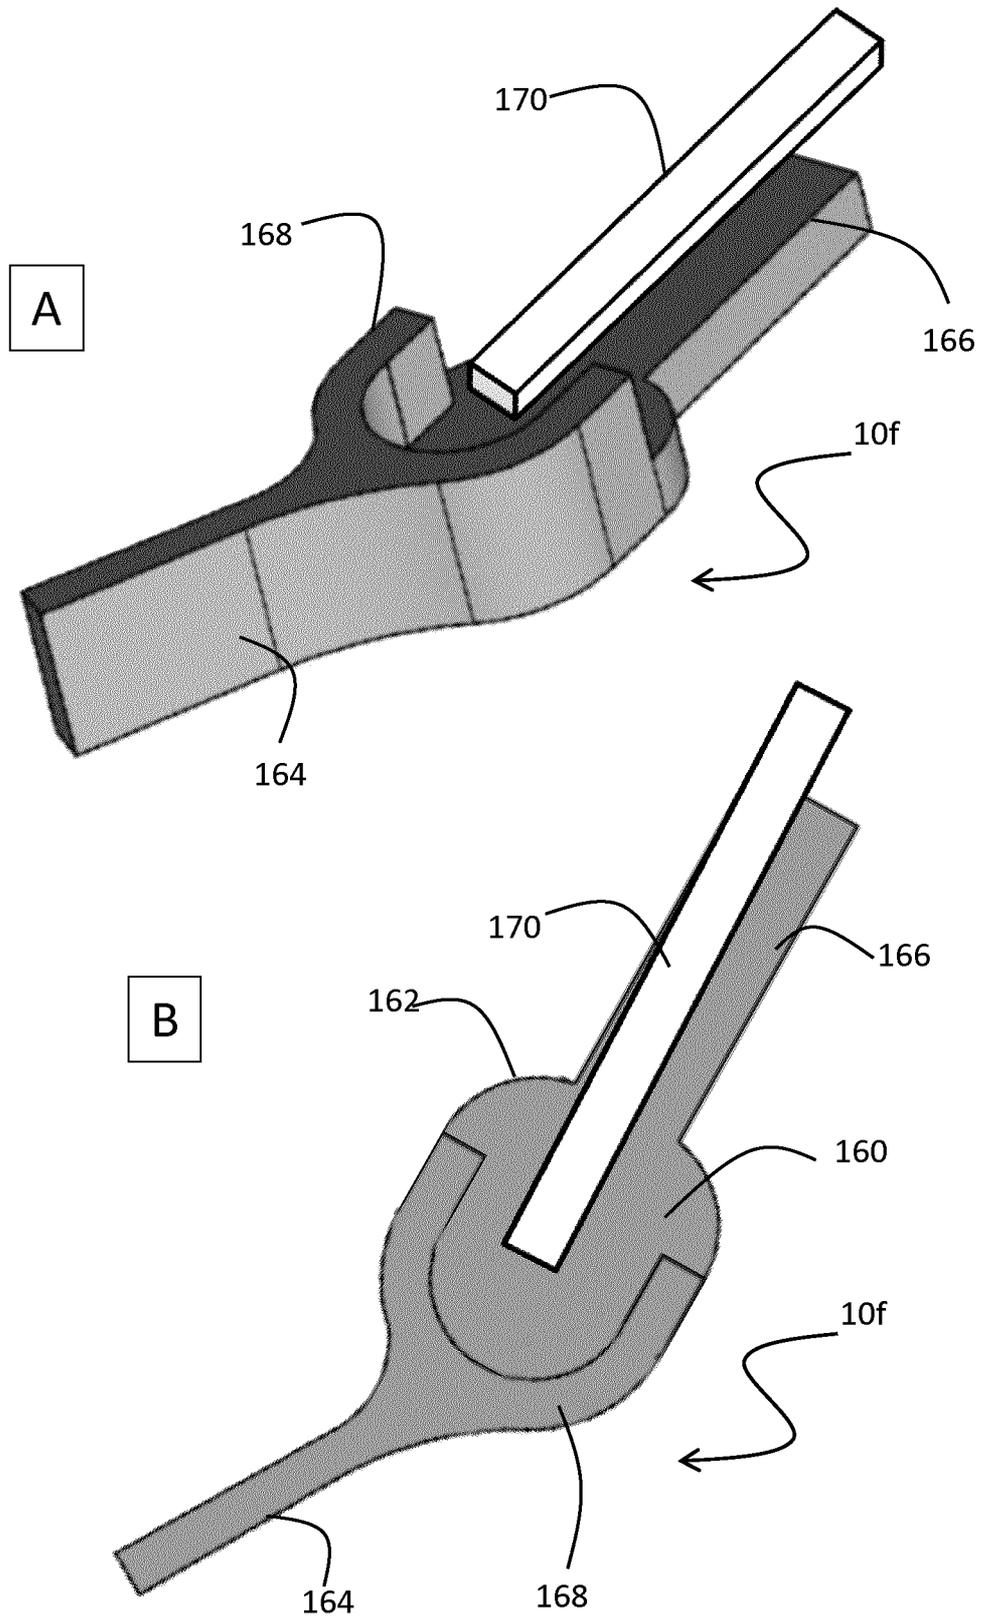


FIGURE 13

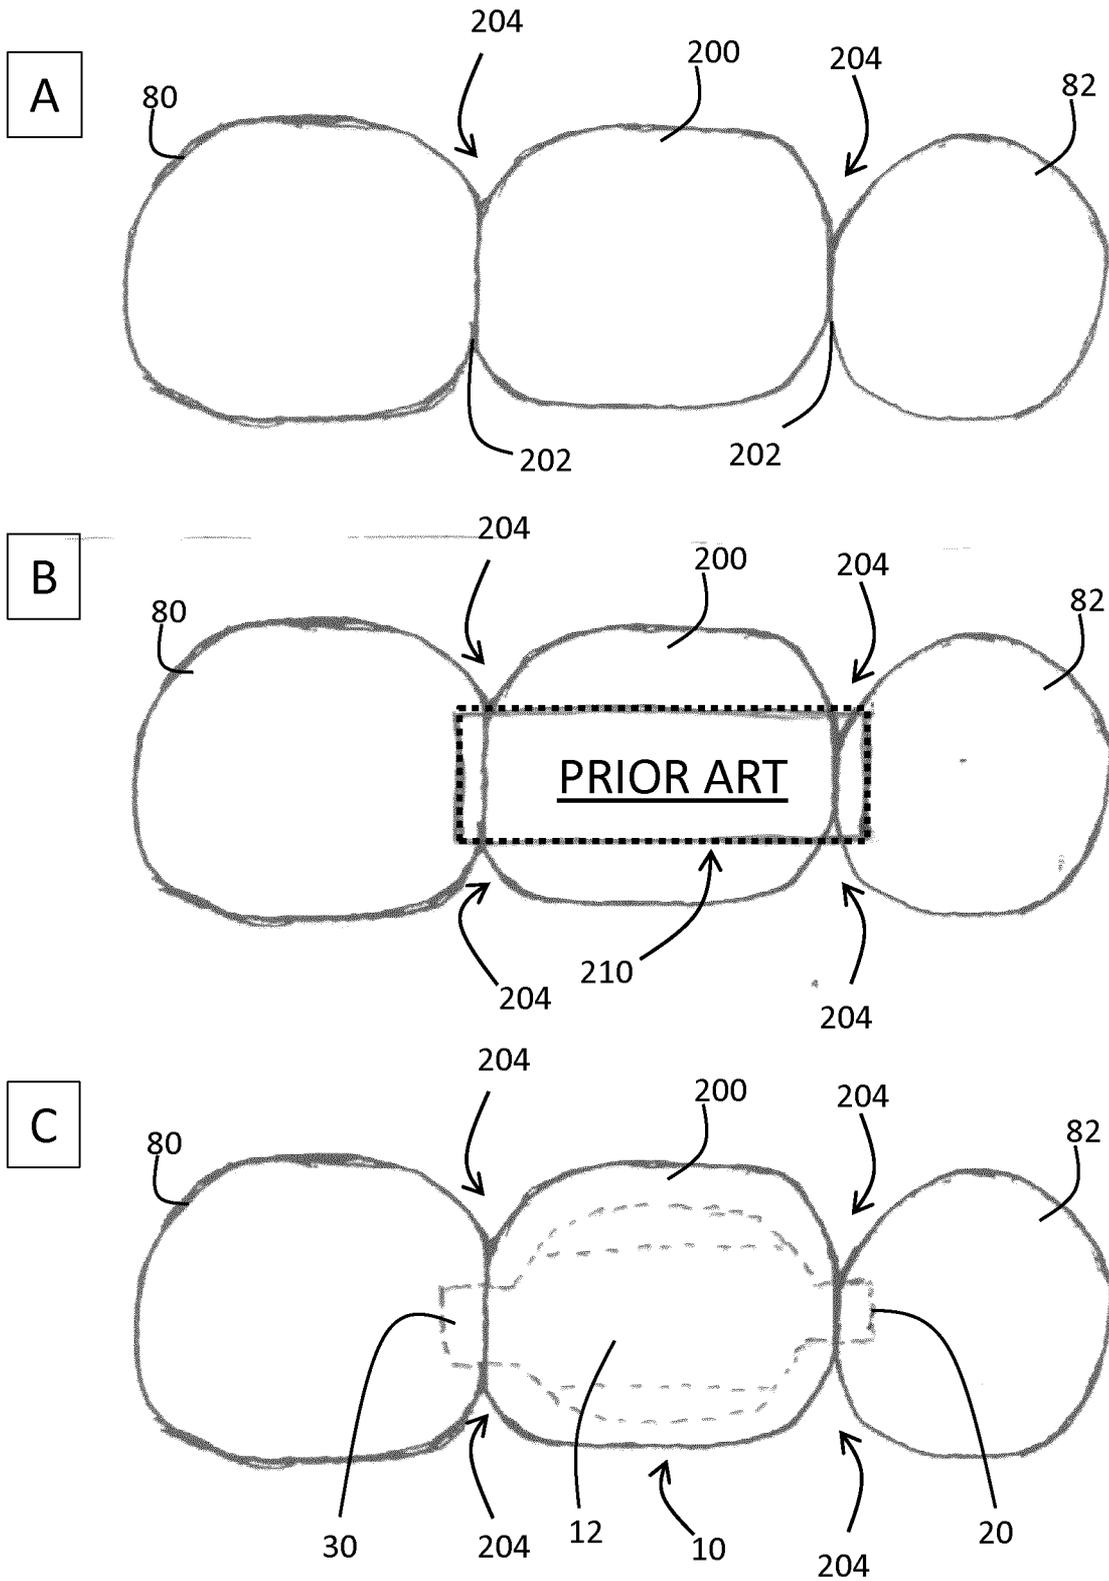

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CA2016/050840

A. CLASSIFICATION OF SUBJECT MATTER
 IPC: **A61C 8/00** (2006.01), **A61C 13/263** (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC: **A61C 8/00** (2006.01), **A61C 13/263** (2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)
 Questel Orbit FAMPAT, Canadian Patent Database, keywords: bridge, bar

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO98/58597A1; (MARSHALL, H.); 30 December 1998 (30-12-1998) *entire document*	28-53
Y		76-78
Y	WO2005/058179A2; (DELMONICO, F.); 30 June 2005 (30-06-2005) *entire document*	76-78

Further documents are listed in the continuation of Box C.

See patent family annex.

* "A" "E" "L" "O" "P"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance earlier application or patent but published on or after the international filing date document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed	"T" "X" "Y" "&"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art document member of the same patent family
--------------------------------------	--	--------------------------	--

Date of the actual completion of the international search
 05 October 2016 (05-10-2016)

Date of mailing of the international search report
 07 October 2016 (07-10-2016)

Name and mailing address of the ISA/CA
 Canadian Intellectual Property Office
 Place du Portage I, C114 - 1st Floor, Box PCT
 50 Victoria Street
 Gatineau, Quebec K1A 0C9
 Facsimile No.: 819-953-2476

Authorized officer

Amie Dunse
 819-639-7848

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of the first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claim Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claim Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claim Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

The claims are directed to a plurality of inventive concepts as follows:

Group A - Claims 1 to 27 and 54 to 75 are directed to a reinforcement combination comprising: an elongate proximal bar comprising: a central planar pad, a first insertion arm, a second insertion arm and an elongate torque bar;

Group B - Claims 28 to 43 are directed to an elongate proximal bar comprising: a central planar pad, a first insertion arm, a second insertion arm and a first and second vertical sidewall extending in a coronal direction from the pad;

Continued on extra sheet, page 5

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claim Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

Group C - Claims 44 to 53 are directed to a reinforcement combination comprising: first and second elongate bars and each of the bars having an end positioned on a central pad of a third elongate bar; and

Group D - Claims 76 to 78 are directed to an elongate proximal bar comprising: a central planar pad, a first and second insertion arm and a first and second vertical sidewall extending in a coronal direction from the pad and a co-planar coronal surface of at least one of the first and second insertion arms.

The claims must be limited to one inventive concept as set out in PCT Rule 13.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2016/050840

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
WO9858597A1	30 December 1998 (30-12-1998)	WO9858597A1 AU8143498A CA2293655A1 CA2293655C EP0991370A1 EP0991370A4 US5934907A US6250925B1	30 December 1998 (30-12-1998) 04 January 1999 (04-01-1999) 30 December 1998 (30-12-1998) 30 November 2004 (30-11-2004) 12 April 2000 (12-04-2000) 17 October 2007 (17-10-2007) 10 August 1999 (10-08-1999) 26 June 2001 (26-06-2001)
WO2005058179A2	30 June 2005 (30-06-2005)	WO2005058179A2 WO2005058179A3 CN1893888A US2011236858A1 US8177557B2 US2007281282A1 US2008318186A1	30 June 2005 (30-06-2005) 01 June 2006 (01-06-2006) 10 January 2007 (10-01-2007) 29 September 2011 (29-09-2011) 15 May 2012 (15-05-2012) 06 December 2007 (06-12-2007) 25 December 2008 (25-12-2008)