



US007605626B2

(12) **United States Patent**  
**Hur**

(10) **Patent No.:** **US 7,605,626 B2**  
(45) **Date of Patent:** **\*Oct. 20, 2009**

(54) **CLOCK GENERATOR AND CLOCK DUTY CYCLE CORRECTION METHOD**

(75) Inventor: **Hwang Hur**, Kyoungki-do (KR)

(73) Assignee: **Hynix Semiconductor Inc.**, Kyoungki-Do (KR)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

6,853,225 B2	2/2005	Lee	
6,859,081 B2	2/2005	Hong et al.	
6,897,693 B2 *	5/2005	Kim	327/158
7,046,059 B2 *	5/2006	Kwak	327/158
7,057,431 B2 *	6/2006	Kwak	327/158
7,142,026 B2 *	11/2006	Kwak	327/158
7,368,966 B2 *	5/2008	Hur	327/175
2003/0219088 A1 *	11/2003	Kwak	375/376

(Continued)

FOREIGN PATENT DOCUMENTS

JP	2004-129255	4/2004
----	-------------	--------

(21) Appl. No.: **12/080,069**

(22) Filed: **Mar. 31, 2008**

(65) **Prior Publication Data**

US 2008/0204099 A1 Aug. 28, 2008

**Related U.S. Application Data**

(63) Continuation of application No. 11/323,581, filed on Dec. 29, 2005, now Pat. No. 7,368,966.

(30) **Foreign Application Priority Data**

Mar. 31, 2005 (KR) ..... 2005-0027354

(51) **Int. Cl.**

**H03K 3/017** (2006.01)  
**H03K 5/04** (2006.01)  
**H03K 7/08** (2006.01)

(52) **U.S. Cl.** ..... 327/175; 327/172; 327/176

(58) **Field of Classification Search** ..... 327/31-38, 327/172-176

See application file for complete search history.

(56) **References Cited**


U.S. PATENT DOCUMENTS

6,373,309 B1 *	4/2002	Bang	327/175
6,735,669 B2 *	5/2004	Shin	711/106
6,815,985 B2 *	11/2004	Jeon	327/115

(57) **ABSTRACT**

A clock duty cycle correction (DCC) circuit for correcting a clock duty cycle of an external clock includes a phase comparator for comparing a phase of a rising clock with that of a falling clock to thereby output comparing signal; a DCC controller for outputting a DCC enable signal and a weight selection signal in response to the comparing signal and a first and a second lock state signal; a DCC mixing block for blending the rising clock and the falling clock in response to the DCC enable signal and the weight selection signal to thereby generate a rising and a falling pre-clock signals; and a clock selector for selectively output the rising and the falling pre-clock signals in response to the weight selection signal.

**11 Claims, 8 Drawing Sheets**

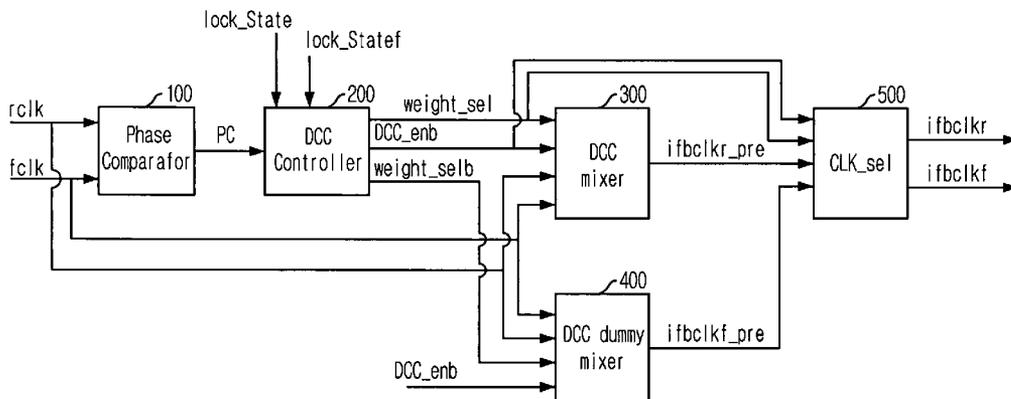

# US 7,605,626 B2

Page 2

---

## U.S. PATENT DOCUMENTS

2004/0066873 A1 4/2004 Cho et al.  
2005/0093600 A1 5/2005 Kwak

KR 10-2004-0037786 5/2004  
KR 10-2004-0082530 9/2004

## FOREIGN PATENT DOCUMENTS

KR 2000-0044265 7/2000

\* cited by examiner

FIG. 1  
(PRIOR ART)

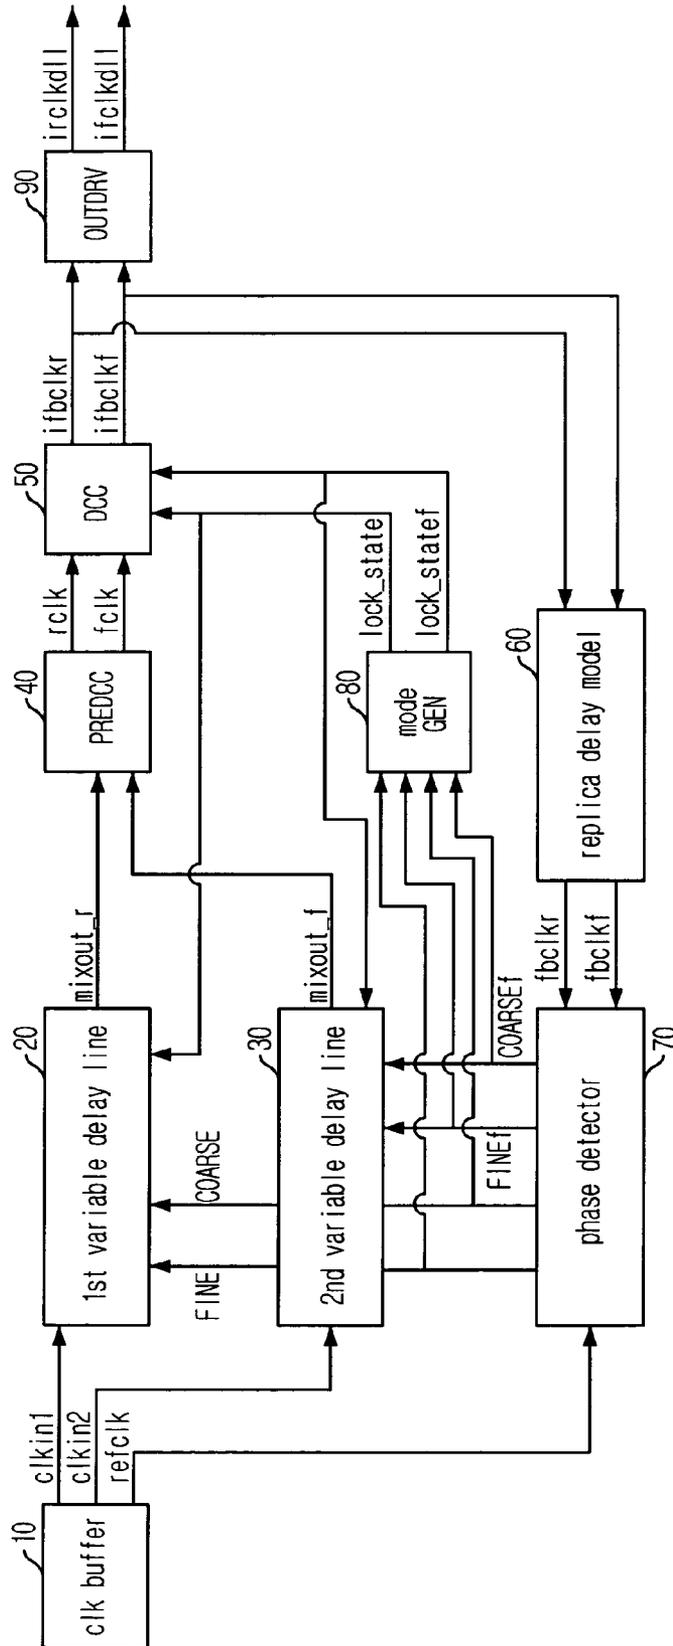


FIG. 2  
(PRIOR ART)

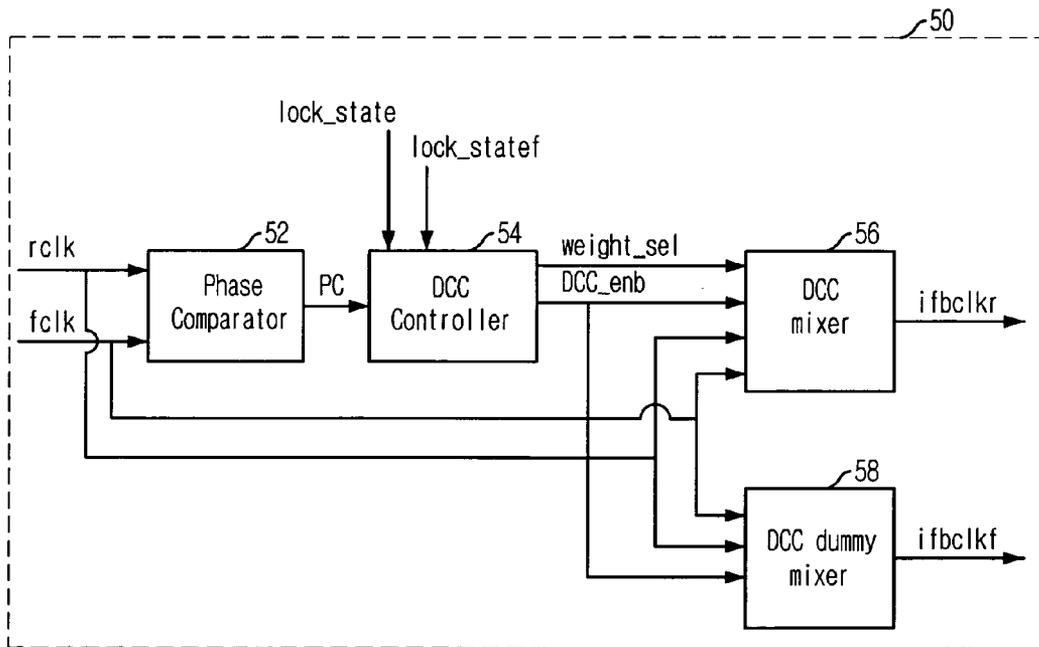


FIG. 3  
(PRIOR ART)

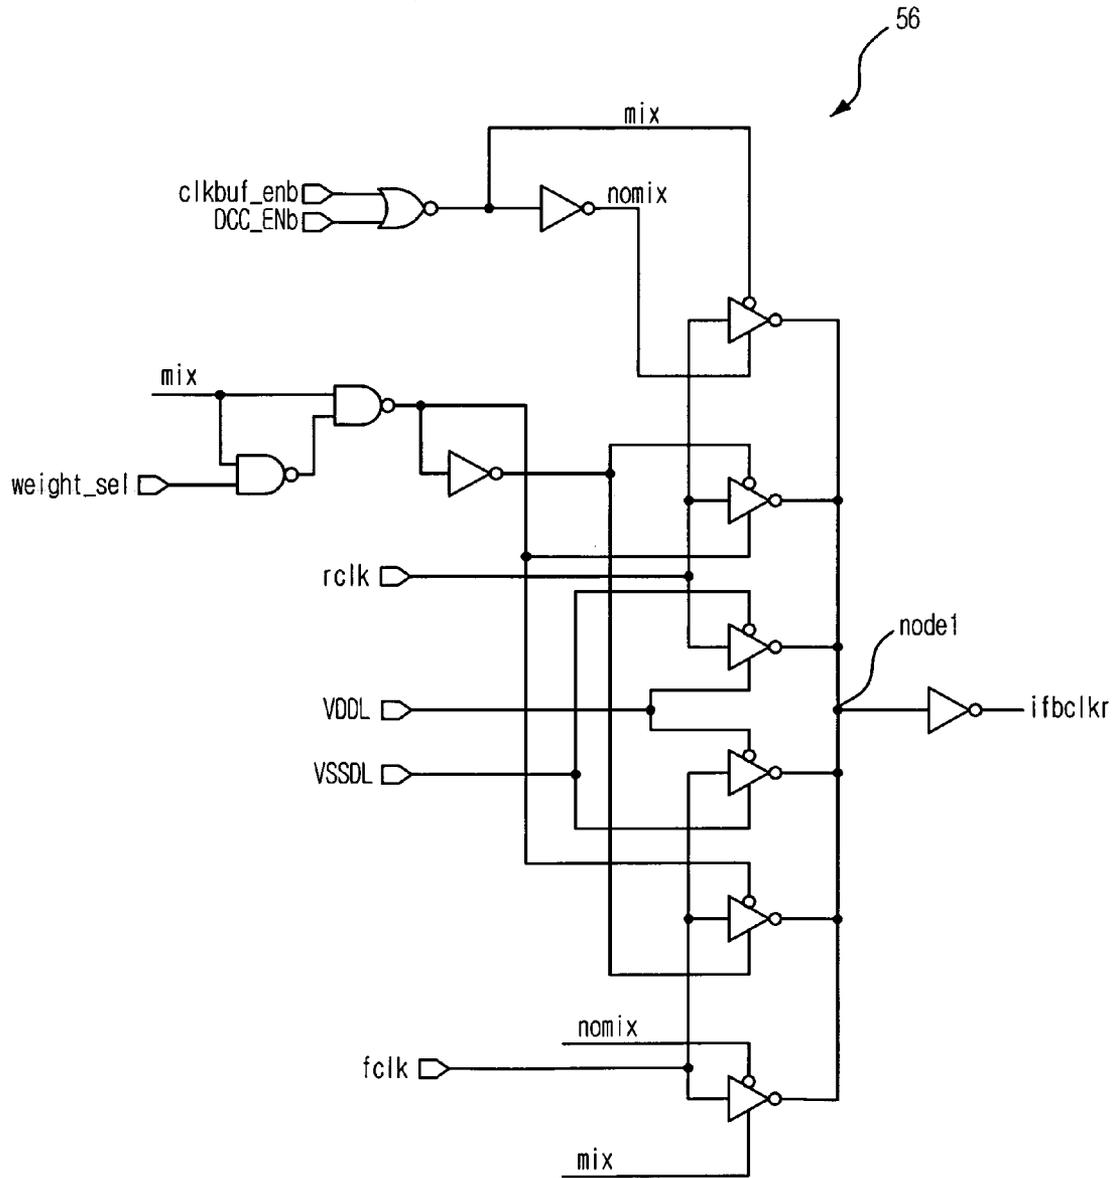




FIG. 5  
(PRIOR ART)

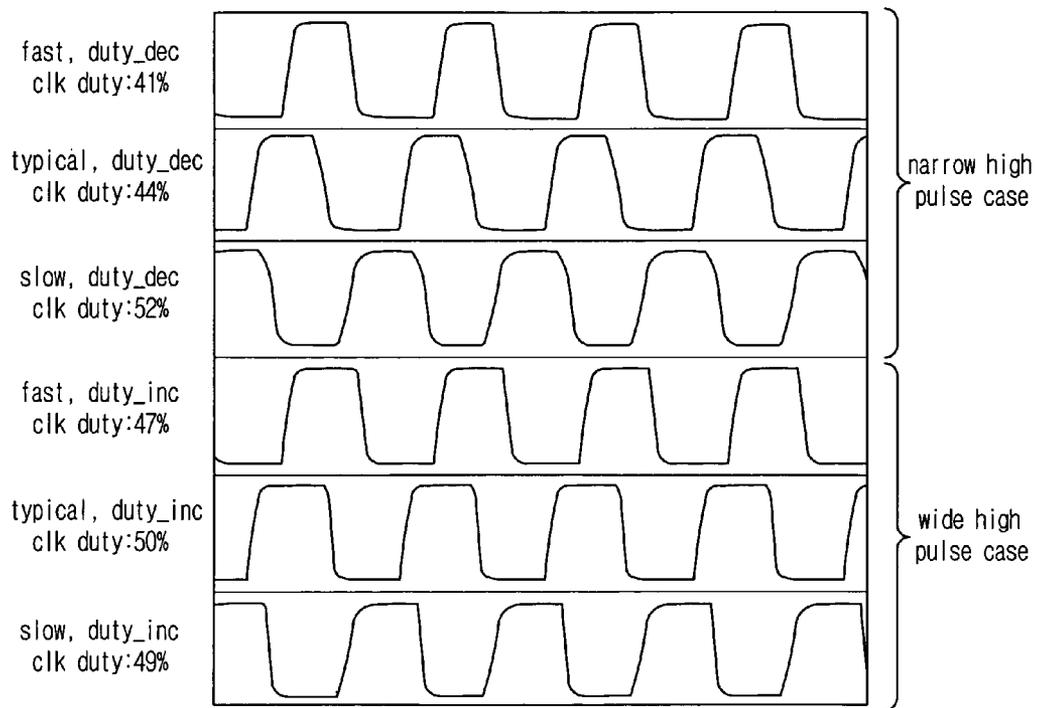


FIG. 6

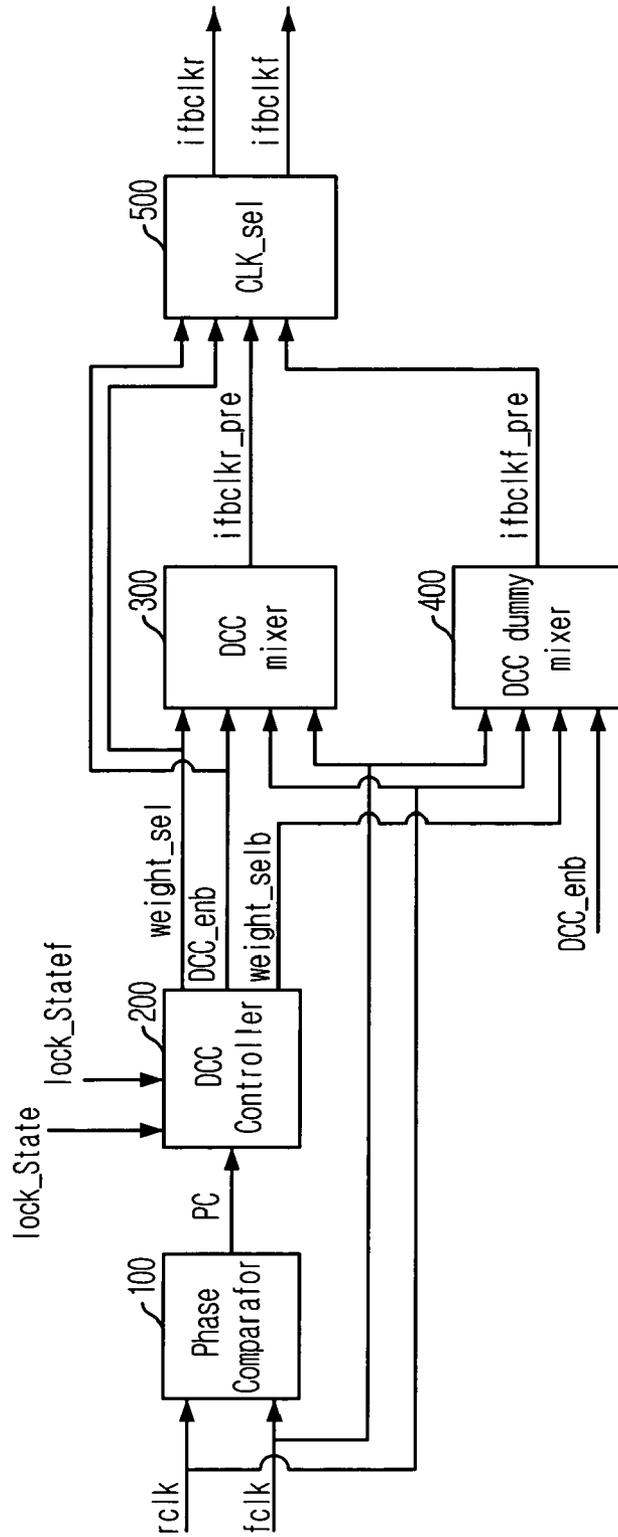


FIG. 7


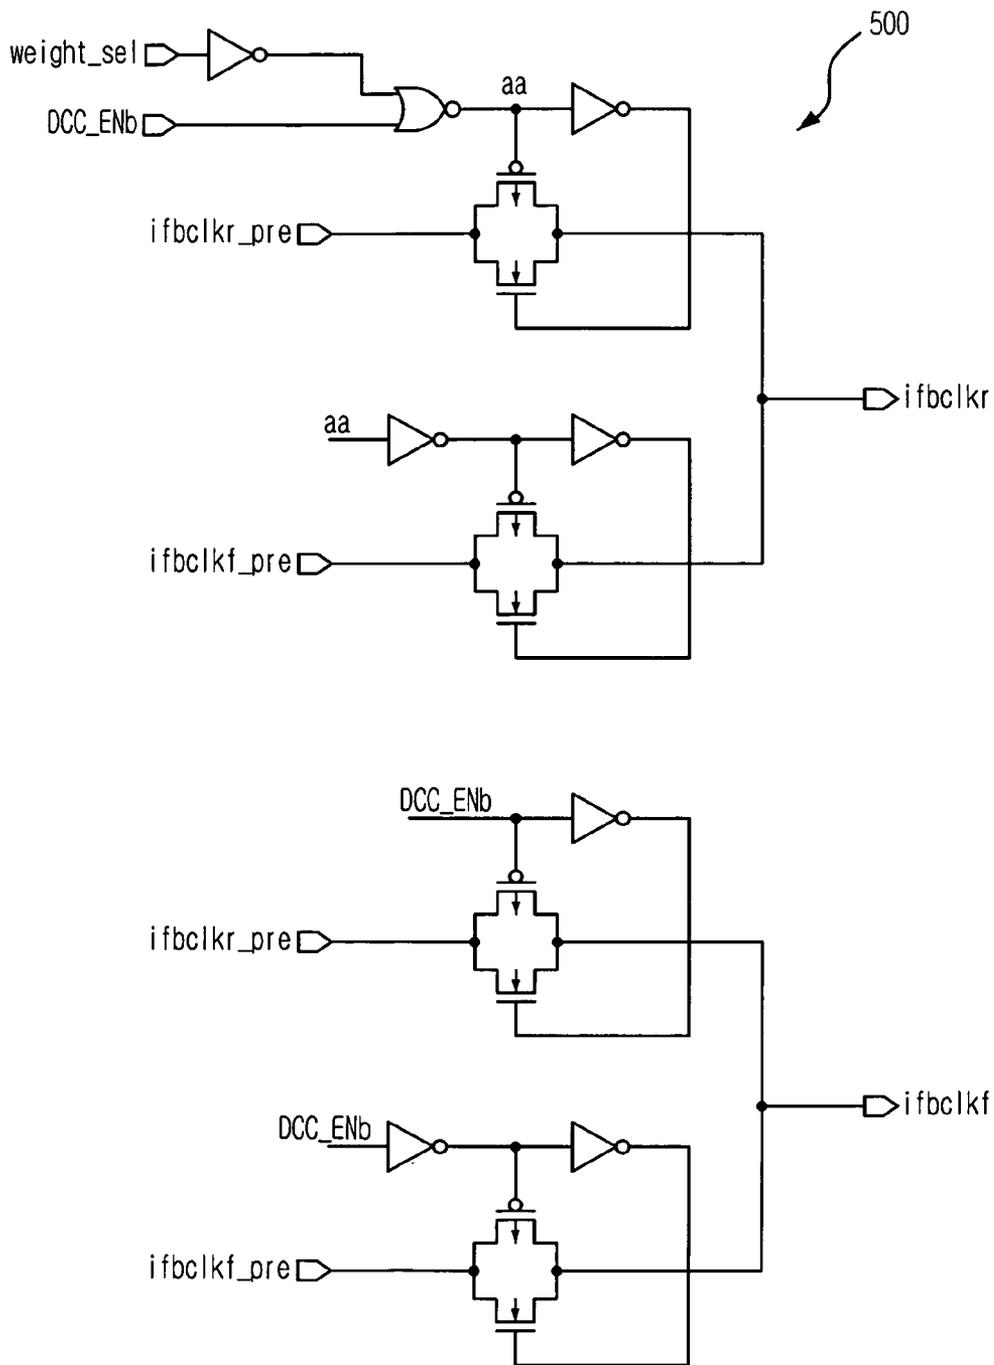


FIG. 8

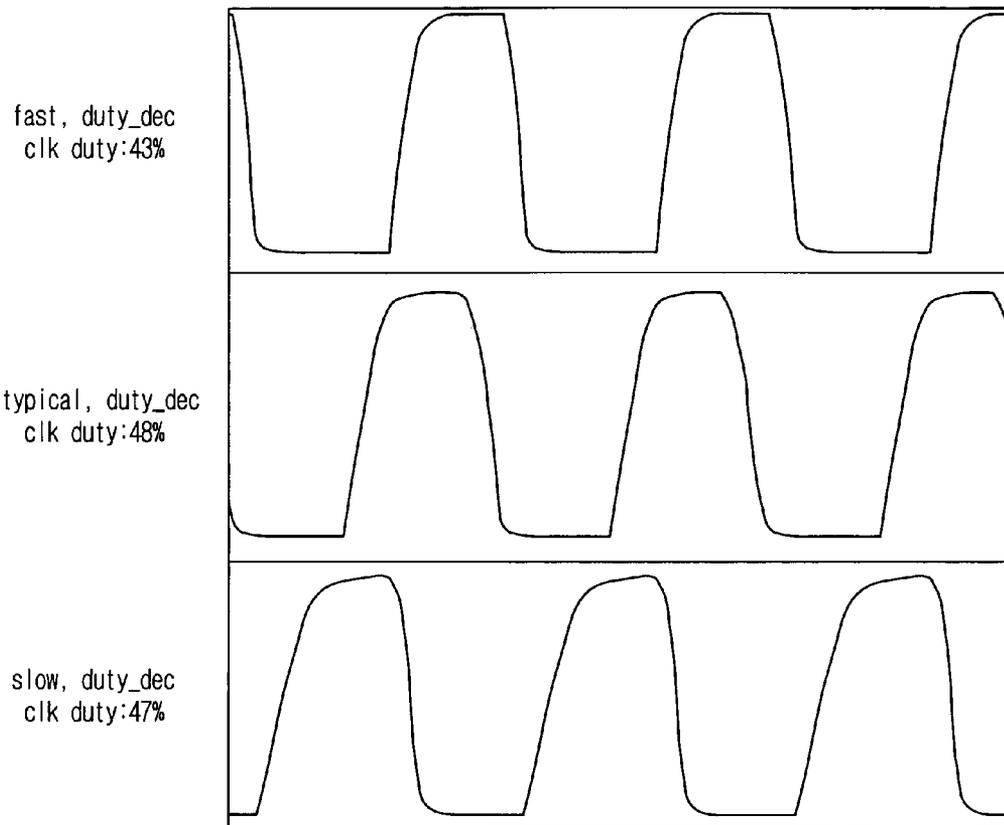

## CLOCK GENERATOR AND CLOCK DUTY CYCLE CORRECTION METHOD

### CROSS-REFERENCE TO RELATED APPLICATION

The present patent application is a continuation of application Ser. No. 11/323,581, filed Dec. 29, 2005 now U.S. Pat. No. 7,368,966.

### FIELD OF THE INVENTION

An embodiment of the invention relates to a clock generator; and, more particularly, to a clock generator for reducing a clock duty cycle variation.

### DESCRIPTION OF PRIOR ART

A time delay is generated while an external clock signal inputted to a synchronous semiconductor memory device is used as an internal clock signal of the synchronous semiconductor memory device. A delay locked loop (DLL) is employed for synchronizing the internal clock signal with the external clock signal by compensating a clock skew between the internal clock signal and the external clock signal.

Meanwhile, as operation speed of DRAM increases, an efficiency of the DLL affects the performance of the DRAM. In order to increase the efficiency of the DLL, a clock duty cycle of the DLL has to be tightly controlled, as a well-controlled clock duty cycle decreases jitter (which would otherwise degrade the operation speed of the DLL).

FIG. 1 is a block diagram describing a conventional DLL including a clock duty cycle corrector.

As shown, the conventional DLL includes a clock buffer **10**, first and second variable delay lines **20** and **30**, a pre-clock duty cycle corrector **40**, a clock duty cycle corrector **50**, a replica delay model **60**, a phase detector **70**, a mode generator **80**, and an output driver **90**.

The clock buffer **10** buffers an external clock to thereby output first and second internal clocks *clkin1* and *clkin2* and a reference clock *refclk*. Herein, the first and second internal clocks *clkin1* and *clkin2* have the same phase.

The first variable delay line **20** delays the first internal clock *clkin1* in response to a first fine delay control signal *FINE*, a first coarse delay control signal *COARSE*, and a first lock state signal *lock\_state* to thereby output a first internal delay signal *mixout\_r*. Herein, the first fine delay control signal *FINE* and the first coarse delay control signal *COARSE* are outputted from the phase detector **70**; and the first lock state signal *lock\_state* is outputted from the mode generator **80**.

The second variable delay line **30** delays the second internal clock *clkin2* in response to a second fine delay control signal *FINEf*, a second coarse delay control signal *COARSEf*, and a second lock state signal *lock\_statef* to thereby output a second internal delay signal *mixout\_f*. Herein, the second fine delay control signal *FINEf* and the second coarse delay control signal *COARSEf* are outputted from the phase detector **70**; and the second lock state signal *lock\_statef* is outputted from the mode generator **80**.

The pre-clock duty cycle corrector **40** buffers the first and second internal delay clocks *mixout\_r* and *mixout\_f* to thereby output a rising clock *rlk* and a falling clock *flk*, respectively. Herein, the rising clock *rlk* and the falling clock *flk* have opposite phase.

The clock duty cycle corrector **50** performs a clock duty cycle correction operation to the rising clock *rlk* and the

falling clock *flk* to thereby output a rising feedback clock *ifbclk* and a falling feedback clock *ifbclkf*.

The replica delay model **60** models delay elements to generate compensated rising feedback clock *fbclk* and a compensated falling feedback clock *fbclkf* by respectively compensating the rising feedback clock *ifbclk* and the falling feedback clock *ifbclkf* for a clock skew between the external clock and the rising and falling feedback clocks *ifbclk* and *ifbclkf*. Herein, a delay element corresponds to a delay occurred before the external clock inputted to the first and the second variable delay lines **20** and **30** after inputted from outside and after outputted from the first and the second variable delay lines **20** and **30** until outputted from the output buffer **90**.

The phase detector **70** compares the compensated rising and falling signals *fbclk* and *fbclkf* with the reference clock *refclk* to thereby output the delay control signals *FINE*, *COARSE*, *FINEf*, and *COARSEf*.

The mode generator **80** generates the first lock state signal *lock\_state* based on the first fine delay control signal *FINE* and the first coarse delay control signal *COARSE* and generates the second lock state signal *lock\_statef* based on the second fine delay control signal *FINEf* and the second coarse delay control signal *COARSEf*. Herein, the first and second lock state signals *lock\_state* and *lock\_statef* indicate to the clock duty cycle corrector **50** that the rising and the falling clocks are in a lock state.

The output driver **90** buffers and outputs the rising feedback clock *ifbclk* and the falling feedback clock *ifbclkf* outputted from the clock duty cycle corrector **50**.

FIG. 2 is a block diagram showing the conventional clock duty cycle corrector **50** shown in FIG. 1.

As shown, the conventional clock duty cycle corrector **50** includes a phase comparator **52**, a DCC controller **54**, a DCC mixer **56**, and a DCC dummy mixer **58**.

The phase comparator **52** compares a phase of a falling edge of the rising clock *rlk* with that of the falling clock *flk*. That is, when the phase of the falling edge of the rising clock *rlk* leads that of the falling clock *flk*, the phase comparator **52** outputs a phase comparing signal *PC* of a logic level 'H'. On the contrary, when the phase of the falling edge of the falling clock *flk* leads that of the rising clock *rlk*, the phase comparing signal *PC* becomes a logic level 'L'.

The DCC controller **54** receives the phase comparing signal *PC* outputted from the phase comparator **52** to thereby output a DCC enable signal *DCC\_enb* for enabling the clock duty cycle correction operation and a weight selection signal *weight\_sel* for determining a weight of the rising clock *rlk* and the falling clock *flk* in response to the first and the second lock state signals *lock\_state* and *lock\_statef*. In detail, when the rising clock *rlk* and the falling clock *flk* are in a lock state, i.e., the first and the second lock state signals *lock\_state* and *lock\_statef* are activated, the DCC enable signal *DCC\_enb* is activated as a logic level 'L'.

The DCC mixer **56** is a block for actually performing the clock duty cycle correction operation by blending the rising clock *rlk* and the falling clock *flk*. The DCC mixer **56** blends the rising clock *rlk* and the falling clock *flk* based on the DCC enable signal *DCC\_enb* and the weight selection signal *weight\_sel*. Herein, when the DCC enable signal *DCC\_enb* is a logic level 'H', the DCC mixer **56** outputs the rising clock *rlk* as the rising feedback clock *ifbclk*. Meanwhile, when the DCC enable signal *DCC\_enb* is a logic level 'L', the DCC mixer **56** blends the rising clock *rlk* and the falling clock *flk*.

FIG. 3 is a schematic circuit diagram depicting the conventional DCC mixer **56** shown in FIG. 2.

As shown, the conventional DCC mixer **56** is provided with two NAND gates, one NOR gate, three inverters, and a plurality of tri-state inverters serially connected to each other. As mentioned above, the conventional DCC mixer **56** performs the clock duty cycle correction operation by blending the rising clock rclk and the falling clock folk based on the weight selection signal weight\_sel.

Meanwhile, when a high pulse width of the external clock is relatively large, the DCC mixer **56** corrects the clock duty cycle by using the weight selection signal which will be at a logic level 'L'. On the contrary, when the high pulse width of the external clock is relatively small, the DCC mixer **56** corrects the clock duty cycle by using the weight selection signal which will indicate a logic level 'H'.

FIG. 4 is a schematic circuit diagram showing the conventional DCC dummy mixer **58** shown in FIG. 2.

When the DCC enable signal DCC\_enb is at logic level 'H', the conventional DCC dummy mixer **58** outputs the falling clock fclk as the falling feedback clock ifbclkf. On the other hand, when the DCC enable signal DCC\_enb is at logic level 'L', the conventional DCC dummy mixer **58** generates the logic level 'H' as the falling feedback clock ifbclkf.

FIG. 5 is a waveform demonstrating an operation of the conventional DLL shown in FIG. 1.

When the high pulse width of the external clock is relatively large (wide high pulse case in FIG. 5), the clock duty cycle of the DLL is about 49% when a skew is slow (FF); about 50% when the skew is typical (TT); and about 47% when the skew is fast (SS). Accordingly, the clock duty cycle variation of the conventional art is about 3% when the high pulse of the external clock is large. Meanwhile, when the high pulse width of the external clock is relatively small (narrow high pulse case in FIG. 5), the clock duty cycle of the DLL is about 52% when the skew is slow(FF); about 44% when the skew is typical (TT); and about 41% when the skew is slow (SS). That is, the clock duty cycle variation of the conventional art is about 11% when the high pulse width of the external clock is relatively small. As shown, in case of the small high pulse width of the external clock, the performance of the clock duty cycle corrector **50** is not efficient.

#### SUMMARY OF THE INVENTION

An embodiment of the invention is a clock generator for reducing clock duty cycle variation in a narrow high pulse case (e.g. a narrow high pulse as described above). The clock generator may also be used to reduce clock duty cycle variation in other instances.

In accordance with an aspect of the present invention, there is provided an apparatus for correcting a clock duty cycle of an external clock for use in a semiconductor memory device having a DLL including: a phase comparator for comparing a phase of a rising clock with that of a falling clock to thereby output a comparing signal; a clock duty cycle correction (DCC) controller for outputting a DCC enable signal and a weight selection signal in response to the comparing signal and first and second lock state signals; a DCC mixing block for blending the rising clock and the falling clock in response to the DCC enable signal and the weight selection signal to thereby generate rising and falling pre-clock signals; and a clock selector for selectively outputting the rising and the falling pre-clock signals in response to the weight selection signal.

In accordance with another aspect of the present invention, there is provided a method for correcting a clock duty cycle of an external clock for use in a semiconductor memory device having a DLL including: comparing a phase of a rising clock

with that of a falling clock to thereby output a comparing signal; outputting a clock duty cycle correction (DCC) enable signal and a weight selection signal in response to the comparing signal and first and second lock state signals; blending the rising clock and the falling clock in response to the DCC enable signal and the weight selection signal to thereby generate rising and falling pre-clock signals; and selectively outputting the rising and the falling pre-clock signals in response to the weight selection signal.

In accordance with still another aspect of the present invention, there is provided a clock duty cycle correction (DCC) circuit for correcting a clock duty cycle of an external clock including: a phase comparator for comparing a phase of a rising clock with that of a falling clock to thereby output a comparing signal; a DCC controller for outputting a DCC enable signal and a weight selection signal in response to the comparing signal and first and second lock state signals; a DCC mixing block for blending the rising clock and the falling clock in response to the DCC enable signal and the weight selection signal to thereby generate rising and falling pre-clock signals; and a clock selector for selectively outputting the rising and the falling pre-clock signals in response to the weight selection signal.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects and features of the present invention will become apparent from the following description of preferred embodiments taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a block diagram describing a conventional DLL including a clock duty cycle corrector;

FIG. 2 is a block diagram showing a conventional clock duty cycle corrector shown in FIG. 1;

FIG. 3 is a schematic circuit diagram depicting a conventional DCC mixer shown in FIG. 2;

FIG. 4 is a schematic circuit diagram showing a conventional DCC dummy mixer shown in FIG. 2;

FIG. 5 shows waveforms demonstrating an operation of the conventional DLL shown in FIG. 1;

FIG. 6 is a block diagram describing a clock duty cycle corrector in accordance with an embodiment of the invention;

FIG. 7 is a schematic circuit diagram depicting a clock selector shown in FIG. 6; and

FIG. 8 shows example waveforms demonstrating an operation of the clock duty cycle corrector when a high pulse width of the external clock is small.

#### DETAILED DESCRIPTION OF INVENTION

Hereinafter, a clock generator including a clock duty cycle corrector in accordance with the different embodiments of the invention will be described in detail referring to the accompanying drawings.

FIG. 6 is a block diagram describing a clock duty cycle corrector in accordance with an embodiment of the invention. The clock duty cycle corrector includes a phase comparator **100**, a DCC controller **200**, a DCC mixer **300**, a DCC dummy mixer **400**, and a clock selector **500**.

The phase comparator **100** is similar to the conventional phase comparator **52**. That is, the phase comparator **100** of the present invention compares a phase of a falling edge of a rising clock rclk with that of a falling edge. According to an embodiment of the present invention, when the falling edge of the rising clock leads that of the falling clock, the phase comparator **100** outputs a phase comparing signal PC of a logic level 'H'. On the other hand, when the falling edge of the

falling clock leads that of the rising clock, the phase comparing signal PC becomes a logic level 'L'.

The DCC controller **200** outputs a DCC enable signal, a weight selection signal, and an inverted weight selection signal (weight\_selb). In detail, the DCC controller **200** activates the DCC enable signal DCC\_enb as a logic level 'L' in response to an activation of the first and second lock state signals lock\_state and lock\_statef. Further, the weight selection signal weight\_sel and the inverted weight selection signal weight\_selb are used for determining a weight of the rising clock rclk and the falling clock fclk based on the phase comparing signal PC.

Herein, a logic level of the weight selection signal weight\_sel is determined by the high pulse width of an external clock. That is, when the high pulse width is relatively small, the weight selection signal weight\_sel becomes a logic level 'H'. Further, when the high pulse width is relatively large, the weight selection signal weight\_sel becomes a logic level 'L'.

The DCC mixer **300** and the DCC dummy mixer **400** of the present invention are similar to those of conventional art, respectively.

The DCC mixer **300** of an embodiment of the present invention blends the rising clock rclk and the falling clock fclk based on the DCC enable signal DCC\_enb and the weight selection signal weight\_sel to thereby output a rising pre-clock signal ifbclkr\_pre. In detail, the DCC mixer **300** outputs the rising clock rclk as the rising pre-clock signal ifbclkr\_pre, when the DCC enable signal DCC\_enb is a logic level 'H'. When DCC\_enb is 'L', the DCC mixer **300** blends the rising clock rclk and the falling clock fclk based on the weight selection signal weight\_sel to thereby adjust the clock duty cycle in ifbclkr\_pre.

The DCC dummy mixer **400** blends the rising clock rclk and the falling clock fclk based on the inverted weight selection signal weight\_selb and the DCC enable signal DCC\_enb to thereby output a falling pre-clock signal ifbclkf\_pre. In detail, the DCC dummy mixer **400** outputs the falling clock fclk as the falling pre-clock signal ifbclkf\_pre when the DCC enable signal DCC\_enb is a logic level 'H' and, when DCC\_enb is 'L', blends the rising clock rclk and the falling clock fclk based on the inverted weight selection signal weight\_selb to thereby adjust the clock duty cycle in ifbclkf\_pre. Accordingly, the DCC dummy mixer **400** performs a clock duty cycle correction operation in the opposite way of that of the DCC mixer **300**.

Meanwhile, in another embodiment, the DCC controller **200** can be implemented with similar structure of conventional art, and the DCC dummy mixer **400** inverts the weight selection signal weight\_sel, to thereby perform the same operation with that of the abovementioned embodiment.

FIG. 7 is a schematic circuit diagram depicting the clock selector **500** shown in FIG. 6.

When the DCC enable signal DCC\_enb is at logic level 'H', the clock selector **500** outputs the rising and the falling pre-clock signals ifbclkr\_pre and ifbclkf\_pre as rising and falling feedback clocks ifbclkr and ifbclkf, respectively.

Thereafter, when the DCC enable signal DCC\_enb becomes logic level 'L', the falling feedback clock ifbclkf is stuck at logic level 'H'; the clock selector **500** selectively outputs the rising and falling clock signals ifbclkr-pre and ifbclkf\_pre, as the rising feedback clock ifbclkr, in response to the weight selection signal weight\_sel. When the weight selection signal weight\_sel is at logic level 'H', the falling pre-clock signal ifbclkf\_pre is outputted as the rising feedback clock ifbclkr; on the other hand, when the weight selection signal weight\_sel is at logic level 'L', the rising pre-clock ifbclkr\_pre is outputted as the rising feedback clock ifbclkr.

FIG. 8 shows example waveforms demonstrating operation of the clock duty cycle corrector when a high pulse width of the external clock is small.

The clock duty cycle of the DLL is about 43% when a skew is fast (FF); about 48% when the skew is typical (TT); and about 47% when the skew is slow (SS). Accordingly, the clock duty cycle variation in this embodiment of the invention is about 5% when the high pulse of the external clock is small.

The clock generator of the different embodiments of the present invention reduces the clock duty cycle variation even though the high pulse of the external clock is small. Further, by using the present invention, jittering factors of the DLL can be also reduced to thereby obtain a high data processing speed.

The present application contains subject matter related to Korean patent application No. 2005-27354, filed in the Korean Patent Office on Mar. 31, 2005, the entire contents of which being incorporated herein by reference.

While the present invention has been described with respect to the particular embodiments, it will be apparent to those skilled in the art that various changes and modifications may be made without departing from the spirit and scope of the invention as defined in the following claims.

What is claimed is:

1. An apparatus for correcting clock duty cycle, comprising:
  - a first duty cycle correction (DCC) mixing block configured to mix a rising clock with a falling clock in response to a DCC enable signal and a weight selection signal to thereby generate a rising pre-clock signal;
  - a second DCC mixing block configured to mix a falling clock with a rising clock in response to the DCC enable signal and the weight selection signal to thereby generate a falling pre-clock signal; and
  - a clock selector for selectively outputting the rising and the falling pre-clock signals in response to the DCC enable signal and the weight selection signal,
 wherein the clock selector outputs the rising pre-clock signal as a rising feedback clock and the falling pre-clock signal as a falling feedback clock when the DCC enable signal is inactivated.
2. The apparatus as recited in claim 1, further comprising:
  - a phase comparator configured to compare a phase of the rising clock with a phase of the falling clock to output a comparing signal;
  - a clock DCC controller configured to output the DCC enable signal and the weight selection signal in response to the comparing signal.
3. The apparatus as recited in claim 2, wherein the DCC controller outputs the weight selection signal and an inverted weight selection signal.
4. The apparatus as recited in claim 1, wherein the clock selector outputs the falling feedback clock stuck as logic high level and selects one of the rising and falling pre-clocks as the rising feedback clock in response to the weight selection signal when the DCC enable signal is active.
5. The apparatus as recited in claim 1, wherein each of the first and second DCC mixing blocks includes:
  - a rising clock mixer for mixing the rising clock with the falling clock based on the DCC enable signal and the weight selection signal to thereby generate the rising pre-clock signal; and
  - a falling clock mixer for mixing the rising clock with the falling clock based on the DCC enable signal and the inverted weight selection signal to thereby generate the falling pre-clock signal.

7

6. The apparatus as recited in claim 1, wherein the clock selector outputs the falling pre-clock signal as the rising feedback clock when the weight selection signal is inactivated and the DCC enable signal is activated and outputs the rising pre-clock signal as the rising feedback clock when the weight selection signal and the DCC enable signal are activated. 5

7. The apparatus as recited in claim 6, wherein the clock selector includes:

- a first inverter for inverting the weight selection signal;
- a first NOR gate for receiving an output of the first inverter and the DCC enable signal; 10
- a second inverter for inverting an output of the first NOR gate;
- a third inverter for inverting the DCC enable signal;
- a first transmit gate for transmitting the rising pre-clock signal in response to the output of the first NOR gate; 15
- a second transmit gate for transmitting the falling pre-clock signal in response to an output of the second inverter;
- a third transmit gate for transmitting the rising pre-clock signal in response to the DCC enable signal; 20
- a fourth transmit gate for transmitting the falling pre-clock signal in response to an output of the third inverter.

8. The apparatus as recited in claim 7, in combination with a delay lock loop (DLL) for compensating a clock skew between an external clock applied to the DLL and an internal clock produced by the DLL. 25

9. A method for correcting clock duty cycle, comprising:
- comparing a phase of a rising clock with a phase of a falling clock to thereby output a comparing signal; 30
  - outputting a clock duty cycle correction (DCC) enable signal and a weight selection signal in response to the comparing signal and first and second lock state signals;
  - mixing the rising clock with the falling clock in response to the DCC enable signal and the weight selection signal to thereby generate rising and falling pre-clock signals; 35
  - and

8

selectively outputting the rising and the falling pre-clock signals in response to the weight selection signal and the DCC enable signal,

wherein the selectively outputting the rising and falling pre-clock signals includes outputting the rising pre-clock signal as a rising feedback clock and outputting the falling pre-clock signal as a falling feedback clock until the DCC enable signal is activated.

10. The method as recited in claim 9, wherein said blending the rising clock and the falling clock includes: blending the rising clock and the falling clock based on the DCC enable signal and the weight selection signal to thereby generate the rising pre-clock signal; and blending the rising clock and the falling clock based on the DCC enable signal and the weight selection signal to thereby generate the falling pre-clock signal.

11. A clock duty cycle correction (DCC) circuit for correcting clock duty cycle, comprising:

- a phase comparator for comparing a phase of a rising clock with a phase of a falling clock to output a comparing signal;
  - a DCC controller for outputting a DCC enable signal and a weight selection signal in response to the comparing signal and first and second lock state signals;
  - a DCC mixing block for blending the rising clock and the falling clock in response to the DCC enable signal and the weight selection signal to thereby generate rising and falling pre-clock signals; and
  - a clock selector for selectively outputting the rising and the falling pre-clock signals in response to the weight selection signal and the DCC enable signal;
- wherein the selectively outputting the rising and falling pre-clock signals includes outputting the rising pre-clock signal as a rising feedback clock and outputting the falling pre-clock signal as a falling feedback clock until the DCC enable signal is activated.

\* \* \* \* \*