



(43) International Publication Date
18 September 2014 (18.09.2014)

(10) International Publication Number
WO 2014/144136 A1

(51) International Patent Classification:
A41F 9/00 (2006.01)

(21) International Application Number:
PCT/US2014/028422

(22) International Filing Date:
14 March 2014 (14.03.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/787,320 15 March 2013 (15.03.2013) US

(71) Applicant: UNIVERSITY OF MASSACHUSETTS
[US/US]; 225 Franklin Street, 12th Floor, Boston, MA
02100 (US).

(72) Inventors: CROSBY, Alfred, J.; 36 Rosemary Street,
Amherst, MA 01002 (US). BARTLETT, Michael, D.;
279 Amherst Road, Apt. 54, Sunderland, MA 01375 (US).
IRSCHICK, Duncan, J.; 8 Moss Lane, Amherst, MA
01002 (US). KING, Daniel, R.; 279 Amherst Road, Apt.
44, Sunderland, MA 01375 (US).

(74) Agent: TAI, Kuangshin; Wolf, Greenfield & Sacks, P.C.,
600 Atlantic Avenue, Boston, MA 02210-2206 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: HIGH CAPACITY EASY RELEASE EXTENDED USE ADHESIVE CLOSURE DEVICES

(57) Abstract: Unique designs, devices, systems, materials and fabrication methods are provided including adhesive closure devices that are easily released and are suitable for extended/repeated use in a variety of applications.



WO 2014/144136 A1

HIGH CAPACITY EASY RELEASE EXTENDED USE ADHESIVE CLOSURE DEVICES

Priority Claims and Related Applications

[0001] This application claims the benefit of U.S. Provisional Application No. 61/787,320, filed March 15, 2013, the entire content of which is incorporated herein by reference in its entirety.

Technical Field

[0002] The present disclosure generally relates to closure systems and devices. More particularly, the present disclosure relates to systems, devices, materials and fabrication methods that provide adhesive closure devices that are easily closed/released and suitable for extended/repeated use in a variety of applications.

Background

[0003] The design of closures that function over a range of force capacities, and which offer an easy, silent and smooth release, is desirable for many reasons. Hook and loop fasteners are widely used as closures with other designs, such as metal or plastic snap buttons, buttons used with openings, zippers and straps that attach to one another via interlocking, also being widely used.

[0004] Hook and loop fasteners (*e.g.*, VelcroTM) are widely used in many closure applications such as apparel, houseware, shoes, and toys, among others. Hook and loop fasteners typically have two components: Two lineal fabric strips that are attached to the opposing surfaces to be fastened. The first component features tiny hooks; and the second features even smaller loops. When the two components are pressed together, the hooks catch in the loops and the two pieces fasten or bind temporarily. Separation is caused by pulling or peeling the two surfaces apart, accompanied by a distinctive "ripping" sound.

[0005] Zipper-based devices are also commonly seen closure systems. A zipper-based closure system was described in US Patent Pub. No. 20090106951A1, which can be employed on apparel.

[0006] While all of the above options are effective as closures for some applications, they all suffer significant disadvantages. For example, hook and loop fasteners are known for being strong, but they are also noisy during peeling. They also present some aesthetic

downfalls, including their bulky design, abrasiveness and their tendency to attach accidentally to other surfaces, such as clothes. Other means of closure, such as buttons and zippers, also present limitations, as they are often bulky, noisy and prone to failure.

Summary

[0007] Various embodiments provide unique releasable closure devices that can be easily closed and released, and which are also silent and suitable for extended and repeated use. Various adhesive closure systems and devices, as well as related methods, disclosed herein can be designed to fit a number of applications ranging from fasteners, reinforcements, taping, apparel, housewares, to shoes and toys, for example. The closure devices in accordance with aspects described herein are comparable, and, in some cases, superior to, hook and loop fasteners, but with a substantially smoother and more silent release, and with a much thinner profile.

[0008] In one aspect, various embodiments generally relate to a releasable, surface-adhesive closure device. The device includes two adhesive pads, each pad comprising a backing layer having high in-plane stiffness; and an adhesive layer of an elastic material having an adhering surface on at least one side of the elastic material, wherein the elastic material is applied onto the backing layer on at least the side opposing the adhering surface. The two adhesive pads form a releasable seal when pressed against each other with the two adhering surfaces positioned face to face.

[0009] In another aspect, various embodiments generally relate to a releasable, surface-adhesive closure device. The device includes: an adhesive pad and an adherent member. The adhesive pad includes a backing layer having high in-plane stiffness; and an adhesive layer of an elastic material having an adhering surface on at least one side of the elastic material, wherein the elastic material is applied onto the backing layer on at least the side opposing the adhering surface. The adherent member having a surface for adherence by the adhesive pad. The adhesive pad and the adherent member form a releasable seal when pressed against each other with the adhering surface and the adherent surface positioned face to face.

[0010] In yet another aspect, various embodiments generally relate to a releasable, surface-adhesive closure device. The device includes: two adhesive pads and a tether component. Each of the two adhesive pads includes a backing layer having high in-plane stiffness and an adhesive layer of an elastic material having an adhering surface on at least one side of the elastic material. The elastic material is applied onto the backing layer on at least the side opposing the adhering surface. The tether component attached to the two adhesive pads such

that the two adhering surfaces face are disposed on the same side and together form a releasable connection or closure once the two adhesive pads adhesively attach to a third-object adherent surface.

[0011] In yet another aspect, various embodiments generally relate to a releasable, surface-adhesive closure device. The device includes: a first adhesive-adherent set comprising an adhesive pad and a first adherent surface; a second adhesive-adherent set comprising a second adhesive pad and a second adherent surface; and a tether component attached to the two adhesive-adherent set such that, when looped around, the first adhesive pad is adapted to adhesively attach to the second adherent surface and the second adhesive pad is adapted to adhesively attach to the first adherent surface, thereby forming a releasable connection or closure. Each adhesive pad includes a backing layer having high in-plane stiffness and a adhesive layer of an elastic material having an adhering surface on at least one side of the elastic material. The elastic material is applied onto the backing layer on at least the side opposing the adhering surface.

[0012] In yet another aspect, various embodiments generally relate to a releasable, surface-adhesive closure device. The device includes: a first adhesive pad, a second adhesive pad, and an insert component. The first adhesive pad includes: a first backing layer having high in-plane stiffness, and a first adhesive layer of an elastic material having an adhering surface on at least one side of the elastic material, wherein the elastic material is applied onto the first backing layer on at least the side opposing the adhering surface. The second adhesive pad includes: a second backing layer having high in-plane stiffness, and a second adhesive layer of an elastic material having an adhering surface on at least one side of the elastic material, wherein the elastic material is applied onto the backing layer on at least the side opposing the adhering surface. The insert component includes a first surface and a second surface. The insert component is disposed between the first adhesive pad and the second adhesive pad such that the first surface of the insert component and the first adhesive layer of the first adhesive pad, when pressed together, form a first releasable seal, and the second surface of the insert component and the second adhesive layer of the second adhesive pad, when pressed together, form a second releasable seal.

Brief Description of the Drawings

[0013] **FIG. 1** shows a schematic illustration of an exemplary embodiment of an adhesive pad.

- [0014] **FIG. 2** shows certain design factors and schematic illustrations in accordance with some embodiments.
- [0015] **FIG. 3** shows a schematic illustration of an exemplary fabrication process in accordance with some embodiments.
- [0016] **FIG. 4** shows a schematic illustration of an exemplary embodiment.
- [0017] **FIGs. 5a-5d** show exemplary photos of an exemplary device according to an embodiment.
- [0018] **FIG. 6** shows an exemplary device according to an embodiment holding a weight.
- [0019] **FIG. 7** shows a schematic illustration of an exemplary embodiment.
- [0020] **FIG. 8** shows a schematic illustration of an exemplary embodiment.
- [0021] **FIG. 9** shows a schematic illustration of an exemplary embodiment.
- [0022] **FIG. 10** shows a schematic illustration of an exemplary embodiment used as part of a shoe.
- [0023] **FIG. 11** shows a schematic illustration of an exemplary embodiment used as part of a jacket.
- [0024] **FIG 12A** shows a “male” and “female” embodiment.
- [0025] **FIG 12B** shows how “male” and “female” embodiments can be joined to form a closure.
- [0026] **FIGs. 13a-13f** illustrate an exemplary embodiment of fabricating an adhesive pad.
- [0027] **FIGs. 14a-14d** depict an exemplary embodiment of a sandwich-type device.

Detailed Description

- [0028] The present disclosure provides unique releasable closure systems and devices that are easily closed and released, silent, and suitable for extended and repeated use. The closure devices are strong, yet are easily, smoothly and silently released over multiple loading cycles, thereby offering significant advantages over existing closure systems.
- [0029] A technological breakthrough, GeckskinTM is a gecko-inspired, fabric-backed adhesive system that relies on the integration of three parts (a “pad”, “skin”, and a “tendon”), which collectively provide for stiffness in the direction of loading, thus enabling high adhesive force capacity, yet with an easy and repeatable release.
- [0030] Gecko-inspired closure systems offer significant advantages over existing closure technologies. Whereas closures such as VelcroTM, zippers or buttons are noisy and often challenging to engage and disengage, closures made using gecko-like adhering materials are significantly more silent, smooth and easily operated. In addition, while existing closure

devices tend to be bulky, closures made from gecko-like adhering materials can be thin and light-weight, thereby taking up less space and weight on apparel. Furthermore, gecko-inspired systems can be designed to have exceptional mechanical strength, potentially stronger than hoop and lock fasteners, and with a greater degree of reusability.

[0031] Designs and systems allow separation time and energy to be minimized, while maintaining the ability to support high holding or tightening forces. The designs, systems and methods disclosed herein do not require the use of surface fibrillar structures to achieve desired attributes. Though, for some embodiments, the device may employ various configurations of surface fibrillar structures.

[0032] As a component of systems, the adhesive pad utilized herein adopts a “dry” adhesive pad structure, sometimes referred to as a “T-pad”, an embodiment of which is schematically illustrated in **FIG. 1**. Properly designed, the T-pad device can support high loads under shear, normal, and multi-mode (*i.e.* peel) loadings while requiring relatively low forces and energy for release (or separation) under specifically-designed release strategies. In a basic structure of the adhesive component, a “pad” is connected to a tether (*e.g.*, a synthetic fabric tether), which may be referred to herein as the “tendon”. The tether may be arranged so as to maintain a generally high stiffness along the primary axis of loading. The connection between the tendon and the pad has pre-defined dimensions, orientation, and spatial location, according to particular needs, that can be modified to control the release strategy and provide a suitable balance of shear and normal loading. Two exemplary embodiments of adhesive pad devices are schematically illustrated in **FIG. 1**, wherein **(a)** depicts an adhesive pad **1** having an adhering surface **2** having a circular outer boundary **5**. The adhesive pad is attached or otherwise coupled to a tether component **3** at line **4**. Similarly, **(b)** depicts an adhesive pad **10** having an adhering surface **12** having a rectangular outer boundary **15**. The adhesive pad is coupled (*e.g.*, connected, attached) to a tether component **13** at line **14**. It should be appreciated that other types and shapes of adhering surfaces may be employed, and are not limited to those specifically described herein. For example, the adhering surface may have any suitable shape, such as circular, rectangular, polygonal, irregular, oblong, etc.

[0033] Such an adhesive pad design represents a unique combination of adhesion attributes of polymer materials and integrated mechanical designs through proper conservation of rotational freedom, low flexural modulus normal to the adhesive interface, and high stiffness in load bearing directions. A scaling relationship has been developed by the inventors to provide a framework for understanding the adhesive performance of the materials devices

over a range of size scales and geometries (**FIG. 2**). This scaling relationship suggests that the adhesive capacity (F_c) of an interface is governed by three simple parameters, which are dependent on both the geometry and material properties of the interface. To design reversible adhesives which can adhere to various substrates, the interfacial interactions (G_c) should rely upon non-specific van der Waals forces, rendering G_c an ineffective control parameter.

Therefore, to scale F_c for adhesive materials the material system must not just rely on area on contact (A) or the system compliance (C) but must develop attributes that increase the A/C ratio. This presents a challenge; materials should generally be soft to increase true contact, yet stiff to be able to withstand high loads. Soft materials are able to create large-scale contact but are compliant when subject to relatively high loads, while stiff materials are less likely to be able to create extensive contact with a substrate; though, both cases result in a null effect on the A/C ratio. Embodiments disclosed herein provide a mechanism for maximizing A/C, and most importantly, tuning this governing parameter for different applications.

[0034] As schematically illustrated in **FIG. 3**, an efficient and effective fabrication method may be used to fabricate the adhesive pad. The method involves integrating a thin layer of an elastic elastomer on the surface of a fabric.

[0035] The tether may be connected to the adhesive pad through any suitable method, such as conventional sewing, stitching, or gluing, which allows easy control of dimensional, orientational, and spatial location of the attachment. The attachment should provide sufficient load sharing and load bearing capacity, which can be controlled through the method of attachment, such as via the stitching pattern, width, and length. Appropriate stitching patterns include straight stitching, zigzag stitching, multi zigzag stitch, satin stitching, honeycomb stitching, ladder stitch, double overlock stitch, and criss-cross stitching. Non-stitch attachment methods, such as hot melt adhesives for fabrics, may also be used.

[0036] For example, in an embodiment, a tether-pad connection includes a straight-line stitch that is centered on the one axis of the pad and extends to a length of approximately 2/3 the chord length perpendicular the second pad axis. The tether-pad connection maintains rotational freedom while maintaining high stiffness in the direction of loading. The tether-pad connection may also maintain substantially equal load sharing along the entire length of the connection.

[0037] One adhesive pad can act independently or in conjunction with an array of adhesive pads or units (sometimes referred to as a “T-surface”), which may be mounted with

rotationally-free joints to a supporting substrate that can be rigid in one or more directions, for example. For certain applications, *e.g.*, a large weight bearing shelf, multiple attachment points for the tether to the adhesive pad may also be employed.

[0038] The closure system derives its effectiveness largely due to the ability for a soft elastomeric pad to be integrated into a stiff skin, such as a high strength fiber fabric, so as to achieve large areas of interfacial contact while maintaining high stiffness in the direction of applied loads, *e.g.*, along the fibers of the skin fabric. The interfacial bond may be reversible, for example, provided by Van der Waals forces along the surface of the interfacial bond. Force capacity of the closure is directly related to the axial stiffness of the fabric fibers that comprise the tendon and skin; therefore, high capacity closures are fabricated from high stiffness fibers, such as Kevlar, carbon fibers, or glass. The reusability of the closure system is enhanced by using pad, skin, and tendon materials that behave elastically within the force capacity range of the designed closure, such that viscoelastic, plastic, or fracture deformation losses in the materials are minimized or otherwise reduced. The bending and draping flexibility of the pad, skin, and tendon are directly related to maximizing the probability of establishing intimate, interfacial contact between connecting pads, thus increasing the force capacity and reusability of the closure.

[0039] A closure device in accordance with an embodiment is schematically illustrated in **FIG. 4**. The closure device **100** includes two adhesive pads each with a layer of an elastic material impregnated in a backing layer. The first pad's layer of elastic material **102** is impregnated in a backing layer **104** forming an adhering surface **105**. The second pad's layer of elastic material **110** forms an adhering surface **112**. While in this embodiment, the elastic material impregnates the backing layer, it can be appreciated that, the elastic material may be applied to the backing layer by any suitable manner, for example, by coating thereon, saturating, or another appropriate method.

[0040] A tendon (as shown, a belt shaped) member **106**, or alternatively, two separate members **106** and **107**, is connected, at one end, to the backing layer of the adhesive pad at **108** and, at the other end, to the backing layer of the second pad. To make a closure, the two adhering surfaces **105** and **112** are pressed together. To release the closure, a tugging force may be applied lifting one adhesive pad away from the other.

[0041] **FIG. 5** shows an exemplary device in use: (A) device in the open state, (B) placing the adhesive pad on the receiving surface and forming a closure by compression with fingers, (C) being pulled in shear, and (D) being peeled to release the device back to open state. **FIG.**

6 shows an exemplary picture of the device in closed form being used in holding a significant weight (25 lb. or 11.34 kg).

[0042] Another embodiment of a closure device is schematically illustrated in **FIG. 7**. The closure device **200** includes an adhesive pad with a layer of an elastic material **202** impregnated in a backing layer **204** forming an adhering surface **205**. A tendon (as shown, a belt shaped) member **206**, or alternatively, two separate members **206** and **207**, is connected, at one end, to the backing layer of the adhesive pad at **208**. The belt shaped member **206** is attached, at the other end, to a receiving member **210** having a surface **212** for receiving the adhering surface of the adhesive pad.

[0043] In yet another example, as schematically illustrated in **FIG. 8**, the closure device **300** includes two adhesive pads with two backing layers **304** and **314**, respective. Each backing layer supports both a layer of an elastic material and a receiving member. Thus, the backing layer **304** supports a first adhesive layer **302** having an adhering surface **305** as well as a first receiving member **310** having a receiving surface **318**. Similarly, the backing layer **314** supports a second adhesive layer **312** having an adhering surface **315** as well as a second receiving member **320** having a receiving surface **328**. The belt shaped member **306** connects the two adhesive pad/receiving member sets. When in use, the adhering surface **305** is pressed against receiving surface **328**, while the adhering surface **315** is pressed against receiving surface **318**, thereby forming a suitable connection or closure (*e.g.*, a closed loop). It can be appreciated that the particular patterns shown and described herein are not aspects for various embodiments and other suitable configurations be employed.

[0044] In another exemplary embodiment, as schematically illustrated in **FIG. 9**, two independent adhesive devices are included in the device to form a closure with a surface of a third object. Here, the closure device **400** includes a first adhesive pad with a layer of an elastic material **402** impregnated in a first backing layer **404** forming a first adhering surface **405**. The device **400** also includes a second adhesive pad with a layer of an elastic material **412** impregnated in a second backing layer **414** forming a second adhering surface **415**. The first and second adhesive pads are joined together by a belt shaped member **406**, which is attached to the first backing layer at **408** and at the second backing layer at **418**. When in use, the first and second adhering surfaces **405** and **415** adhere to a surface of a third object (*e.g.*, wall or window **420**) to form a connection or closure (*e.g.*, a looped closure).

[0045] **FIG. 10** schematically illustrates another exemplary embodiment of the device **500**, which may be used as part of an article of footwear (*e.g.*, shoe, boot, etc.), in place of or in

addition to traditional laces or other tightening members. A first adhesive pad **510** and a second adhesive pad **520** are positioned such that when they are suitably pressed against each other so as to mutually adhere, the article of footwear is in a closed state.

[0046] **FIG. 11** schematically illustrates another exemplary embodiment of the device **600**, which may be used as part of an article of clothing (e.g., coat, suit or other suitable article of clothing) in place of or in addition to buttons or zippers. A first adhesive pad **610** and a second adhesive pad **620** are positioned such that when they are suitably pressed against each other, the article of clothing is in a closed state.

[0047] In another exemplary embodiment, as schematically illustrated in **FIG. 12A** and **12B**, a “lock and key” model in which a region on one pad has a topographically raised region (*i.e.*, male) and the other pad has a topographically depressed region (*i.e.*, female). As depicted in **FIG. 12A**, the in-plane shape of the “female” (**710**) and “male” (**720**) regions are complementary with respect to one another, allowing a tight fit when coupled together (**FIG. 12B**). The materials used for at least one pad are soft, or suitably compliant, such as an elastomer. The height of the mating regions are less than the thickness of the pad materials surrounding the mating regions.

[0048] **FIG. 14** shows another embodiment having a sandwich-type configuration. **FIG. 14 (a)-(c)** depicts a device with a 3-piece design. In this embodiment, two adhesive pads are included, and an insert can be disposed or inserted therebetween. The insert has two adherent faces for receiving the adhering surfaces of the two adhesive pads. **FIG. 14(d)** schematically illustrates this embodiment in a closed configuration. The insert is adhered to the pads on opposite sides, providing for a stronger bond than would otherwise be the case if the insert is adhered to an adhesive pad on only a single side.

[0049] The embodiment can be expanded to include one or more additional inserts and/or adhesive pads. For example, the embodiment may include a second insert and a third adhesive pad, taking the configuration of: adhesive pad : insert : adhesive pad : insert : adhesive pad, wherein each insert is sandwiched by two adhesive pads and the adhesive pad sandwiched by two inserts has two adhering surfaces. In this case, the adhesive pad disposed in-between the two inserts presents two adhering surfaces opposite the two inserts.

Embodiments in accordance with the present disclosure may include further inserts and adhesive pads, as desired. The embodiment may be utilized in a variety of applications, for example, with two adhesive pads linked or otherwise coupled to an object and the insert

coupled to another object such that when pressed together, a releasable connection or closure is formed.

[0050] In certain embodiments, a looped connection or closure may be formed. Or, in other embodiments, a non-looped connection or closure may be formed, for example, when two separate adhesive pads are used as shown in **FIGs. 10 and 11**.

[0051] In some embodiments, a closure device, in use, may form a continuous loop. In some embodiments, a closure device, in use, does not form a continuous loop.

[0052] Thus, in one aspect, the present disclosure generally relates to a releasable, surface-adhesive closure device. The device may include two adhesive pads, each pad comprising a planar backing layer having high in-plane stiffness; and a planar adhesive layer of an elastic material having an adhering surface on at least one side, wherein the elastic material may be applied (e.g., impregnated, coated, etc.) to the backing layer on at least the side opposing the adhering surface. The two adhesive pads form a releasable seal when suitably pressed against each other with the two adhering surfaces positioned face to face.

[0053] In another aspect, the present disclosure generally relates to a releasable, surface-adhesive closure device. The device may include: an adhesive pad and an adherent member. The adhesive pad may include a backing layer having high in-plane stiffness; and a planar adhesive layer of an elastic material having an adhering surface on at least one side, wherein the elastic material is applied to the backing layer on at least the side opposing the adhering surface. The adherent member having a surface for adherence by the adhesive pad. The adhesive pad and the adherent member form a releasable seal when pressed against each other with the adhering surface and the adherent surface positioned face to face.

[0054] The term “releasable”, as used herein, refers to the capability of an object becoming free from attachment, mooring, adhesion, bonding, or other restraint from another object with no or minimal impairment, ruin, destruction or other damage to either object.

[0055] The term “impregnated”, as used herein, refers to an object being filled, coated, covered, imbued, soaked, permeated, infiltrated, saturated, or otherwise contacted with a material. An object may be partially “impregnated”, for example, partially filled, coated, covered, imbued, soaked, permeated, or infiltrated with a material.

[0056] The term “in-plane stiffness” refers to the resistance to deformation under a specified load applied in the plane of a material (e.g., a fabric material). The units of stiffness are force per distance. A material (e.g., a fabric material) is said to have “high” in-plane

stiffness when the bending stiffness of the composite material (e.g., elastomer and fabric) is less than the in-plane stretching stiffness.

[0057] In certain preferred embodiments, the planar backing layer of the adhesive pad, the tether component, and the adherent member together consecutively form a single continuous planar component.

[0058] In certain preferred embodiments, the adhering surface of the adhesive pad and the adherent surface of the adherent member are on the different side of the single continuous planar component.

[0059] The adherent surface may be any suitable surface, for example, a surface of metal, wood, glass, carbon, polymers, gels, leather, plastic or ceramic.

[0060] In yet another aspect, the present disclosure generally relates to a releasable, surface-adhesive closure device. The device may include: two adhesive pads and a tether component. Each of the two adhesive pads may include a backing layer having high in-plane stiffness and a adhesive layer of an elastic material having an adhering surface on at least one side. The elastic material is applied to the backing layer on at least the side opposing the adhering surface. The tether component attached to the two adhesive pads such that the two adhering surfaces face are disposed on the same side and together form a releasable connection or closure once the two adhesive pads adhesively attach to a third-object adherent surface.

[0061] In yet another aspect, the present disclosure generally relates to a releasable, surface-adhesive closure device. The device may include: a first adhesive-adherent set comprising an adhesive pad and a first adherent surface; a second adhesive-adherent set comprising a second adhesive pad and a second adherent surface; and a tether component attached to the two adhesive-adherent set such that, when looped around, the first adhesive pad is adapted to adhesively attach to the second adherent surface and the second adhesive pad is adapted to adhesively attach to the first adherent surface, thereby forming a releasable connection or closure. Each adhesive pad includes a planar backing layer having high in-plane stiffness and a planar adhesive layer of an elastic material having an adhering surface on at least one side. The elastic material may be impregnated onto or otherwise applied to the backing layer on at least the side opposing the adhering surface.

[0062] In yet another aspect, various embodiments generally relate to a releasable, surface-adhesive closure device. The device includes: a first adhesive pad, a second adhesive pad, and an insert component. The first adhesive pad includes: a first backing layer having high

in-plane stiffness, and a first adhesive layer of an elastic material having an adhering surface on at least one side of the elastic material, wherein the elastic material is applied onto the first backing layer on at least the side opposing the adhering surface. The second adhesive pad includes: a second backing layer having high in-plane stiffness, and a second adhesive layer of an elastic material having an adhering surface on at least one side of the elastic material, wherein the elastic material is applied onto the backing layer on at least the side opposing the adhering surface. The insert component includes a first surface and a second surface. The insert component is disposed between the first adhesive pad and the second adhesive pad such that the first surface of the insert component and the first adhesive layer of the first adhesive pad, when pressed together, form a first releasable seal, and the second surface of the insert component and the second adhesive layer of the second adhesive pad, when pressed together, form a second releasable seal.

[0063] In certain embodiments, the second adhesive pad has an adhering surface on two sides of the adhesive layer, and the device further includes: a second insert component comprising a first surface and a second surface; and a third adhesive pad. The third adhesive pad may include: a third backing layer having high in-plane stiffness, and a third adhesive layer of an elastic material having an adhering surface on at least one side, wherein the elastic material is applied to the backing layer on at least the side opposing the adhering surface. The second insert component is disposed between the second adhesive pad and the third adhesive pad such that the first surface of the second insert and the second adhesive layer of the second adhesive pad, when pressed together, form a third releasable seal, and the second surface of the second insert and the third adhesive layer of the third adhesive pad, when pressed together, form a fourth releasable seal.

[0064] Embodiments of the closure device may have any appropriate dimension, size or shape.

[0065] The adhering surfaces may have any sizes suitable for the application at hand, for example, having an area from about 0.01 cm^2 to about $10,000 \text{ cm}^2$ or larger (e.g., about 0.01 cm^2 , 0.05 cm^2 , 0.1 cm^2 , 0.5 cm^2 , 1 cm^2 , 2 cm^2 , 5 cm^2 , 10 cm^2 , 20 cm^2 , 50 cm^2 , 100 cm^2 , 200 cm^2 , 500 cm^2 , $1,000 \text{ cm}^2$, $3,000 \text{ cm}^2$, $5,000 \text{ cm}^2$, $10,000 \text{ cm}^2$ or greater, from about 0.01 cm^2 to about $5,000 \text{ cm}^2$, from about 0.01 cm^2 to about $3,000 \text{ cm}^2$, from about 0.01 cm^2 to about $1,000 \text{ cm}^2$, from about 0.01 cm^2 to about 500 cm^2 , from about 0.01 cm^2 to about 200 cm^2 , from about 0.01 cm^2 to about 100 cm^2 , from about 0.01 cm^2 to about 50 cm^2 , from about 0.01 cm^2 to about 20 cm^2 , from about 0.01 cm^2 to about 10 cm^2 , from about 0.01 cm^2 to about 5

cm², from about 0.01 cm² to about 2 cm², from about 0.01 cm² to about 1 cm², from about 0.02 cm² to about 10,000 cm², from about 0.1 cm² to about 10,000 cm², from about 0.5 cm² to about 10,000 cm², from about 1 cm² to about 10,000 cm², from about 5 cm² to about 10,000 cm², from about 10 cm² to about 10,000 cm², from about 50 cm² to about 10,000 cm², from about 100 cm² to about 10,000 cm², from about 200 cm² to about 10,000 cm², from about 500 cm² to about 10,000 cm², from about 1,000 cm² to about 10,000 cm²).

[0066] Each adhesive layer may have any thickness suitable for the application at hand, for example, having a substantially uniform thickness from about 0.0001 mm to about 10 cm (e.g., 0.0001 mm, 0.0005 mm, 0.0001 cm, 0.0005 cm, 0.001 cm, 0.005 cm, 0.01 cm, 0.05 cm, 0.1 cm, 0.2, 0.5 cm, 1 cm, 2 cm, 5 cm, 10 cm, from about 0.0001 mm to about 10 cm, from about 0.0001 mm to about 5 cm, from about 0.0001 mm to about 3 cm, from about 0.0001 mm to about 2 cm, from about 0.0001 mm to about 1 cm, from about 0.0001 mm to about 0.5 cm, from about 0.0001 mm to about 0.3 cm, from about 0.0001 mm to about 0.2 cm, from about 0.0001 mm to about 0.1 cm, from about 0.0005 mm to about 10 cm, from about 0.001 mm to about 10 cm, from about 0.01 mm to about 10 cm, from about 0.05 mm to about 10 cm, from about 0.1 mm to about 10 cm, from about 0.5 mm to about 10 cm, from about 1 mm to about 10 cm, from about 5 mm to about 10 cm, from about 1 cm to about 10 cm, from about 2 cm to about 10 cm).

[0067] In certain embodiments, a planar layer of the elastic material has a smooth adhering surface area of greater than about 0.01 cm² and has a substantially uniform thickness of less than about 0.001 cm. In certain embodiments, the planar layer of the elastic material has a smooth adhering surface area of greater than about 0.05 cm² and has a substantially uniform thickness of less than about 0.005 cm. In certain embodiments, the planar layer of the elastic material has a smooth adhering surface area of greater than about 0.1 cm² and has a substantially uniform thickness of less than about 0.01 cm. In certain embodiments, the planar layer of the elastic material has a smooth adhering surface area of greater than about 0.2 cm² and has a substantially uniform thickness of less than about 0.5 cm. In certain embodiments, the planar layer of the elastic material has a smooth adhering surface area of greater than about 0.5 cm² and has a substantially uniform thickness of less than about 0.2 cm. In certain embodiments, the planar layer of the elastic material has a smooth adhering surface area of greater than about 1.0 cm² and has a substantially uniform thickness of less than about 0.1 cm. In certain embodiments, the planar layer of the elastic material has a smooth adhering surface area of greater than about 5.0 cm² and has a substantially uniform thickness

of less than about 0.05 cm. In certain embodiments, the planar layer of the elastic material has a smooth adhering surface area of greater than about 10 cm² and has a substantially uniform thickness of less than about 0.02 cm. In certain embodiments, the planar layer of the elastic material has a smooth adhering surface area of greater than about 100 cm² and has a substantially uniform thickness of less than about 0.01 cm. In certain embodiments, the planar layer of the elastic material has a smooth adhering surface area from about 10 cm² to about 100 cm² and has a substantially uniform thickness from about 0.01 cm to about 0.05 cm. In certain embodiments, the planar layer of the elastic material has a smooth adhering surface area from about 1,000 cm² to about 100 cm² and has a substantially uniform thickness from about 0.5 cm to about 0.05 cm.

[0068] In certain embodiments, the elastic material has an elastic modulus from about 0.001 MPa to about 100,000 MPa (*e.g.*, 0.001 MPa, 0.01 MPa, 0.05 MPa, 0.1 MPa, 0.5 MPa, 1.0 MPa, 5.0 MPa, 10 MPa, 15 MPa, 20 MPa, 30 MPa, 40 MPa, 50 MPa, 100 MPa, 200 MPa, 500 MPa, 1,000 MPa, 5,000 MPa, 10,000 MPa, 50,000 MPa, 100,000 MPa, from about 0.001 MPa to about 50,000 MPa, from about 0.001 MPa to about 10,000 MPa, from about 0.001 MPa to about 5,000 MPa, from about 0.001 MPa to about 2,000 MPa, from about 0.001 MPa to about 1,000 MPa, from about 0.001 MPa to about 500 MPa, from about 0.001 MPa to about 100 MPa, from about 0.001 MPa to about 50 MPa, from about 0.01 MPa to about 100,000 MPa, from about 0.1 MPa to about 100,000 MPa, from about 0.5 MPa to about 100,000 MPa, from about 1 MPa to about 100,000 MPa, from about 5 MPa to about 100,000 MPa, from about 10 MPa to about 100,000 MPa, from about 50 MPa to about 100,000 MPa, from about 100 MPa to about 100,000 MPa, from about 1,000 MPa to about 100,000 MPa).

[0069] In certain preferred embodiments, the elastic material has an elastic modulus from about 0.05 MPa to about 500 MPa. In certain embodiments, the elastic material has an elastic modulus from about 0.05 MPa to about 300 MPa. In certain embodiments, the elastic material has an elastic modulus from about 0.05 MPa to about 100 MPa. In certain embodiments, the elastic material has an elastic modulus from about 0.05 MPa to about 50 MPa. In certain embodiments, the elastic material has an elastic modulus from about 1 MPa to about 500 MPa. In certain embodiments, the elastic material has an elastic modulus from about 1 MPa to about 300 MPa. In certain embodiments, the elastic material has an elastic modulus from about 1 MPa to about 100 MPa.

[0070] The term “backing layer”, as used herein, refers to a layer of a material such as fabrics, films, foils, sheets, laminates, panels or panes, wherein the layer is used for support

or backing. The backing layer may be made of any suitable material including natural or synthetic, metallic or non-metallic, polymeric or non-polymeric materials and may be formed from a single component or a hybrid/blend of two or more components.

[0071] In certain embodiments, the backing layer is made of a fabric material. In certain embodiments, the tether is a fabric material.

[0072] The terms “fabric” or “fabrics”, as used herein, refer to a material made through weaving, knitting, braiding, intertwining, interlacing, spreading, bonding, connecting or otherwise linking. A fabric may use naturally occurring or synthetic materials or a blend or hybrid thereof wherein both natural and synthetic materials are present. A fabric may be made from a single, two or multiple components and can be made by one or more of weaving, knitting, braiding, intertwining, interlacing, spreading, bonding, connecting or linking.

Exemplary synthetic materials useful for fabrics include polyester, polyolefin, spandex, nylon, carbon fiber, polyaramid, carbon fiber polyaramid hybrid, carbon fiber basalt hybrid, fiberglass, carbon fiber, metal fiber, or fiberglass hybrid. Exemplary natural fabrics include cotton, hemp, wool, silk, bamboo string, cellulose, jute, and pina. In certain embodiments, the tether is a non-fabric material, for example, selected from leather, metal sheets, plastic sheets, or non-woven textiles. In some embodiments, the material is made from chain-link meshes.

[0073] In certain preferred embodiments, the material of the fabric backing layer may include any suitable material, such as nylon, carbon fiber, cotton, polyaramid, carbon fiber, polyaramid hybrid, another appropriate material, or combinations thereof.

[0074] The unique approach to a closure system as disclosed herein represents a unique combination of adhesion attributes of polymer materials and integrated mechanical designs through proper conservation of rotational freedom, low flexural modulus normal to the adhesive interface, and high stiffness in load bearing directions. A scaling relationship has been developed by the inventors to provide a framework for understanding the adhesive performance of the materials devices over a range of size scales and geometries (**FIG. 2**). This scaling relationship suggests that the adhesive capacity (F_c) of an interface is governed by three simple parameters, which are dependent on both the geometry and material properties of the interface. To design reversible adhesives which can adhere to various substrates, the interfacial interactions (G_c) should rely upon non-specific van der Waals forces, rendering G_c an ineffective control parameter. Therefore, to scale F_c for adhesive materials the material system must not just rely on area on contact (A) or the system compliance (C) but must develop attributes that increase the A/C ratio. This presents a

challenge; materials must be soft to increase true contact but stiff to achieve high loads. Soft materials are able to create large-scale contact but have a high compliance when loaded, while stiff materials are unable to create extensive contact; both cases result in a null effect on the A/C ratio. Embodiments described herein provide for a mechanism for maximizing A/C, and tuning this governing parameter for different applications. As schematically illustrated in **FIG. 3**, an efficient and effective fabrication method may be used to fabricate the T-pad. The method involves integrating a thin layer of an elastic elastomer into a surface of a fabric.

[0075] The tether can be connected to the pad through any suitable methods, such as conventional sewing, stitching, or gluing, which allows easy control of dimensional, orientational, and spatial location of the attachment. The attachment should provide sufficient load sharing and load bearing capacity, which, in some cases, can be controlled through the stitching pattern, width, and length. Appropriate stitching patterns include straight stitching, zigzag stitching, multi zigzag stitch, satin stitching, honeycomb stitching, ladder stitch, double overlock stitch, and criss-cross stitching.

[0076] For example, a particularly advantageous tether-pad connection is a straight-line stitch that is centered on the one axis of the pad and extends to a length of approximately $2/3$ the chord length perpendicular the second pad axis. The tether-pad connection should maintain rotational freedom while maintaining high stiffness in the direction of loading. The tether-pad connection should preferably maintain equal load sharing along the entire length of the connection.

[0077] An adhering surfaces may be microscopically smooth or patterned, for example. A backing layer may be a fabric backing layer. A planar layer of an elastic material may comprise the same elastic material or different elastic materials.


[0078] In certain preferred embodiments, the elastic material is a block copolymer elastomer. In certain preferred embodiments, the elastic material comprises one or more of siloxane-based elastomers, urethane-based elastomers, and acrylate-based elastomers.

[0079] In some embodiments, each layer of an elastic material comprises two or more separate smaller elastic material layer units.

[0080] It is noted that the term “backing”, as used herein, includes but is not limited to the situation where the referred to layer or material is the back (or the last) layer of the device structure. As described herein, a backing layer may be an interior layer or component of a structural arrangement.


[0081] Elastic materials that may be used in the adhesive pads include any suitable elastomers, naturally occurring or synthetic. For example, suitable elastomers include siloxane-based elastomers, urethane-based elastomers, acrylate-based elastomers, ethylene-propylene, polybutadiene, polyisoprene, polychloroprene, ethylene-acrylate, bromoisobutylene-isoprene, chloroisobutylene-isoprene, acrylonitrile-butadiene, styrene-butadiene, styrene-butadiene-styrene, styrene-isoprene-styrene, or styrene-ethylene-butylene-styrene rubbers.

[0082] An exemplary siloxane-based elastomer is polydimethylsiloxane (PDMS), which belongs to a group of polymeric organosilicon compounds that are commonly referred to as silicones. PDMS, widely used silicon-based organic polymer, has preferred rheological (or flow) properties. PDMS is generally inert, non-toxic and non-flammable.



A Polydimethylsiloxane

[0083] Other elastic materials that may be used in the adhesive pads include polyurethanes, which are polymers of organic units covalently joined by urethane (carbamate) links.

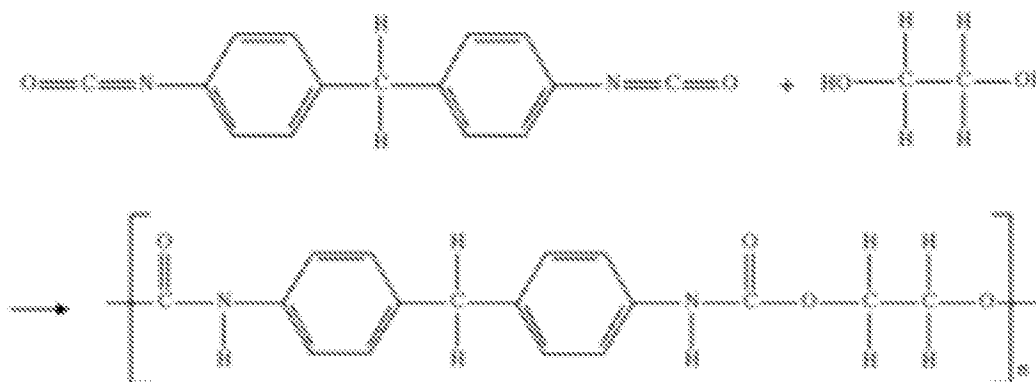

A Polyurethane

[0084] A urethane linkage is produced by reacting an isocyanate group, -N=C=O with a hydroxyl group, -OH . Polyurethanes are produced by the polyaddition reaction of a polyisocyanate with a polyalcohol (polyol) in the presence of a catalyst and other additives. In this case, a polyisocyanate is a molecule with two or more isocyanate functional groups, R-(N=C=O)_n , $n \geq 2$ and a polyol is a molecule with two or more hydroxyl functional groups, R'-(OH)_n , $n \geq 2$. The reaction product is a polymer containing the urethane linkage, -RNHCOOR' . Examples of polyurethane monomers (“pre-polymers”) includes hydroxyl ended molecules,

such as polyethylene glycol, polypropylene glycol, poly tetramethylene glycol, or bisphenol A (hydroxyl-containing monomers) and an aliphatic or aromatic based isocyanate, such as methylene diphenyl diisocyanate, toluene diphenyl diisocyanate, hexamethylene diisocyanate, isophorone diisocyanate, or a polyisocyanate resulting from the combination of multiple of these monomers (for example, three molecules of methylene diphenyl diisocyanate form a trimer which contains three isocyanate functional groups).

[0085] In some embodiments of the releasable, surface-adhesive closure device, a region on one adhesive pad has a topographically raised or male region and a region on the other adhesive pad has a topographically depressed or female region such that a lock and key type coupling occurs once the two adhesive pads are pressed against one another.

[0086] The devices may be designed to be suitable for single, two, multiple, extended and repeated use (*e.g.*, 100 or more repeated closures and releases over an extended period of months or longer).

[0087] In certain embodiments, the ratio of storage to loss elastic moduli is at least greater than about 10 (*e.g.*, greater than 15, 20, or 50) at the operating temperature of interest.

[0088] The layer of the elastic material may have any size and shape as a particular application requires, for example, it may have a substantially circular outer boundary, a substantially rectangular outer boundary, a substantially elliptical outer boundary, or a substantially irregular outer boundary. The size of the closure device may be any suitable size dependent on the application, for example, ranging from about 1 mm² to about 500 cm².

[0089] The adhesive closure systems and devices, as well as related methods, disclosed herein can be designed, for example, to fit a number of applications ranging from fasteners, reinforcements, taping or wrapping, apparel, housewares, shoes, gloves, toys, medical devices, among others.

Examples

Fabrication of PU Adhesive Pads

[0090] **FIG. 13** schematically illustrates an embodiment of the molding technique by which to form a pad with polyurethane. On top of a polytetrafluoroethylene substrate fiber was placed for the adhesive backing layer. A polytetrafluoroethylene (PTFE) spacer was placed on top of the fiber that allows for controlling polyurethane (PU) thickness, and uncured PU prepolymer was poured into the mold. A polydimethylsiloxane pad was then placed on top with a glass plate, and finally the system was weighted with a 20.5 kg weight. This setup is allowed to cure for 24 hours. The second adhering surface is then prepared following the

same procedure on the other end of the fiber such that the two adhering surfaces are disposed on different sides. Next, the entire device is placed into a 70° C oven for 24 hours to finish the curing process. The adhesive pad is then mechanically cut to size.

[0091] Utilizing this molding technique, a smooth adhering surface (utilizing a smooth PDMS top layer), or surface features (utilizing a patterned PDMS top layer) can be achieved. The thickness of the adhesive can be changed by modifying the thickness of the PTFE spacer. This method may also be altered to work using a doctor blade system, which would allow for mass production of adhesive pads.

[0092] Elastic modulus referred to herein is the storage modulus values and can be determined, for example, by dynamic mechanical analysis (*e.g.*, where the elastic material is a 40 mm x 5 mm x 1 mm strip, and tested in extension at a strain of 0.1%, at a frequency of 1 Hz, and at a temperature of 20 °C). This procedure is not meant to be the only procedure for determining elastic modulus.

[0093] In this specification and the appended claims, the singular forms "a," "an," and "the" include plural reference, unless the context clearly dictates otherwise.

[0094] Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art. Although any methods and materials similar or equivalent to those described herein can also be used in the practice or testing of embodiments disclosed herein, the preferred methods and materials are now described. Methods recited herein may be carried out in any order that is logically possible, in addition to a particular order disclosed.

Incorporation by Reference

[0095] References and citations to other documents, such as patents, patent applications, patent publications, journals, books, papers, web contents, have been made in this disclosure. All such documents are hereby incorporated herein by reference in their entirety. Any material, or portion thereof, that is said to be incorporated by reference herein, but which conflicts with existing definitions, statements, or other disclosure material explicitly set forth herein is only incorporated to the extent that no conflict arises between that incorporated material and the present disclosure material. In the event of a conflict, the conflict is to be resolved in favor the embodiments disclosed herein as the preferred disclosure.

Equivalents

[0096] The representative examples are intended to help illustrate the aspects, and are not intended to, nor should they be construed to, limit the scope. Indeed, various modifications and many further embodiments thereof, in addition to those shown and described herein, will become apparent to those skilled in the art from the full contents of this document, including the examples and the references to the scientific and patent literature included herein. The examples contain important additional information, exemplification and guidance that can be adapted to the practice of embodiments disclosed herein in its various embodiments and equivalents thereof.

What is claimed is:

CLAIMS

1. A releasable, surface-adhesive closure device comprising two adhesive pads, each pad comprising:
 - a planar backing layer having high in-plane stiffness; and
 - a planar adhesive layer of an elastic material having an adhering surface on at least one side of the elastic material, wherein the elastic material is applied to the backing layer on at least the side opposing the adhering surface,wherein the two adhesive pads form a releasable seal when pressed against each other with the two adhering surfaces positioned face to face.
2. The releasable, surface-adhesive closure device of Claim 1, further comprising:
 - a tether component attached to the two adhesive pads such that the two adhering surfaces face are disposed on different sides,wherein the two adhesive pads together form a releasable connection or closure once the two adhesive pads adhesively attach to each other.
3. The releasable, surface-adhesive closure device of Claim 2, wherein the planar backing layers of the adhesive pads and the tether component together consecutively form a single continuous planar component.
4. The releasable, surface-adhesive closure device of Claim 2, wherein each planar backing layer comprises a natural fabric material, a synthetic fabric material, or a blend or hybrid thereof.
5. The releasable, surface-adhesive closure device of Claim 4, wherein the natural fabric material is selected from cotton, hemp, wool, silk, bamboo string, cellulose, jute, and pina.
6. The releasable, surface-adhesive closure device of Claim 4, wherein the synthetic fabric material is a fabric of polyester, polyolefin, spandex, nylon, carbon fiber, polyaramid, carbon fiber polyaramid hybrid, carbon fiber basalt hybrid, fiberglass, carbon fiber, or fiberglass hybrid.
7. The releasable, surface-adhesive closure device of Claim 1, wherein a region on one adhesive pad has a topographically raised or male region and a region on the other adhesive pad has a topographically depressed or female region such that a lock and key type coupling occurs once the two adhesive pads are pressed against one another.
8. A releasable, surface-adhesive closure device comprising an adhesive pad, comprising:

- a planar backing layer having high in-plane stiffness; and
- a planar adhesive layer of an elastic material having an adhering surface on at least one side of the elastic material, wherein the elastic material is applied to the backing layer on at least the side opposing the adhering surface; and
- an adherent member having a surface for adherence by the adhesive pad, wherein the adhesive pad and the adherent member form a releasable seal when pressed against each other with the adhering surface and the adherent surface positioned face to face.
9. The releasable, surface-adhesive closure device of Claim 8, further comprising:
 - a tether component attached to the adhesive pad and the adherent member, and the adhesive pad and the adherent member together form a releasable connection or closure once the adhesive pad adhesively attaches to the adherent member.
 10. The releasable, surface-adhesive closure device of Claim 9, wherein the planar backing layer of the adhesive pad, the tether component, and the adherent member together consecutively form a single continuous planar component.
 11. The releasable, surface-adhesive closure device of Claim 8, wherein the adhering surface of the adhesive pad and the adherent surface of the adherent member are on the different side of the single continuous planar component.
 12. The releasable, surface-adhesive closure device of Claim 9, wherein each planar backing layer comprises a natural fabric material, a synthetic fabric material, or a blend or hybrid thereof.
 13. The releasable, surface-adhesive closure device of Claim 12, wherein the natural fabric material is selected from cotton, hemp, wool, silk, bamboo string, cellulose, jute, and pina.
 14. The releasable, surface-adhesive closure device of Claim 12, wherein the synthetic fabric material is a fabric of polyester, polyolefin, spandex, nylon, carbon fiber, polyaramid, carbon fiber polyaramid hybrid, carbon fiber basalt hybrid, fiberglass, carbon fiber, or fiberglass hybrid.
 15. The releasable, surface-adhesive closure device of Claim 12, wherein the adherent surface comprises a surface of metal, wood, carbon, polymers, gels, leather, plastic or ceramic.
 16. The releasable, surface-adhesive closure device of Claim 9, wherein the releasable connection or closure is part of a closed loop.

17. A releasable, surface-adhesive closure device, comprising:
 - two adhesive pads, each pad comprising a planar backing layer having high in-plane stiffness; and a planar adhesive layer of an elastic material having an adhering surface on at least one side, wherein the elastic material is applied to the backing layer on at least the side opposing the adhering surface; and
 - a tether component attached to the two adhesive pads such that the two adhering surfaces face are disposed on the same side,wherein the two adhesive pads together form a releasable connection or closure after the two adhesive pads adhesively attach to a third-object adherent surface.
18. The releasable, surface-adhesive closure device of Claim 17, wherein the planar backing layers of the adhesive pads and the tether component together consecutively form a single continuous planar component.
19. The releasable, surface-adhesive closure device of Claim 17, wherein each planar backing layer comprises a natural fabric material, a synthetic fabric material, or a blend or hybrid thereof.
20. The releasable, surface-adhesive closure device of Claim 19, wherein the natural fabric material is selected from cotton, hemp, wool, silk, bamboo string, cellulose, jute, and pina.
21. The releasable, surface-adhesive closure device of Claim 19, wherein the synthetic fabric material is a fabric of polyester, polyolefin, spandex, nylon, carbon fiber, polyaramid, carbon fiber polyaramid hybrid, carbon fiber basalt hybrid, fiberglass, carbon fiber, or fiberglass hybrid.
22. The releasable, surface-adhesive closure device of Claim 17, wherein a region on one adhesive pad has a topographically raised or male region and a region on the other adhesive pad has a topographically depressed or female region such that a lock and key type coupling occurs once the two adhesive pads are pressed against one another.
23. A releasable, surface-adhesive closure device, comprising:
 - a first adhesive-adherent set comprising an adhesive pad and a first adherent surface;
 - a second adhesive-adherent set comprising a second adhesive pad and a second adherent surface; and
 - a tether component attached to the two adhesive-adherent set such that, when looped around, the first adhesive pad is adapted to adhesively attach to the second

adherent surface and the second adhesive pad is adapted to adhesively attach to the first adherent surface, thereby forming a releasable connection or closure, wherein each adhesive pad comprises a planar backing layer having high in-plane stiffness; and a planar adhesive layer of an elastic material having an adhering surface on at least one side of the elastic material, wherein the elastic material is applied to the backing layer on at least the side opposing the adhering surface.

24. The releasable, surface-adhesive closure device of Claim 23, wherein the planar backing layers of the adhesive pads and the tether component together consecutively form a single continuous planar component.
25. The releasable, surface-adhesive closure device of Claim 23, wherein each planar backing layer comprises a natural fabric material, a synthetic fabric material, or a blend or hybrid thereof.
26. The releasable, surface-adhesive closure device of Claim 23, wherein the natural fabric material is selected from cotton, hemp, wool, silk, bamboo string, cellulose, jute, and pina.
27. The releasable, surface-adhesive closure device of Claim 23, wherein the synthetic fabric material is a fabric of polyester, polyolefin, spandex, nylon, carbon fiber, polyaramid, carbon fiber polyaramid hybrid, carbon fiber basalt hybrid, fiberglass, carbon fiber, or fiberglass hybrid.
28. The releasable, surface-adhesive closure device of Claim 23, wherein a region on one adhesive pad has a topographically raised or male region and a region on the other adhesive pad has a topographically depressed or female region such that a lock and key type coupling occurs once the two adhesive pads are pressed against one another.
29. A releasable, surface-adhesive closure device, comprising:
 - a first adhesive pad comprising
 - a first planar backing layer having high in-plane stiffness, and
 - a first planar adhesive layer of an elastic material having an adhering surface on at least one side, wherein the elastic material is applied to the first planar backing layer on at least the side opposing the adhering surface;
 - a second adhesive pad comprising
 - a second planar backing layer having high in-plane stiffness, and

a second planar adhesive layer of an elastic material having an adhering surface on at least one side, wherein the elastic material is applied to the planar backing layer on at least the side opposing the adhering surface; and

an insert component comprising a first surface and a second surface, wherein the insert component is disposed between the first adhesive pad and the second adhesive pad such that

the first surface of the insert component and the first adhesive layer of the first adhesive pad, when pressed together, form a first releasable seal, and

the second surface of the insert component and the second adhesive layer of the second adhesive pad, when pressed together, form a second releasable seal.

30. The releasable, surface-adhesive closure device of Claim 29, wherein the second adhesive pad comprises an adhering surface on two sides of the adhesive layer, further comprising

a second insert component comprising a first surface and a second surface;

and

a third adhesive pad comprising

a planar backing layer having high in-plane stiffness, and

a planar adhesive layer of an elastic material having an adhering surface on at least one side, wherein the elastic material is applied to the backing layer on at least the side opposing the adhering surface; and wherein the second insert component is disposed between the second and third adhesive pad such that

the first surface of the second insert and the adhesive layer of the second adhesive pad, when pressed together, form a third releasable seal, and

the second surface of the second insert and the adhesive layer of the third adhesive pad, when pressed together, form a fourth releasable seal.

31. The releasable, surface-adhesive closure device of any of Claims 1, 8, 17, 23 and 29, wherein each of the adhering surface has an area from about 0.01 cm^2 to about 100 m^2 .
32. The releasable, surface-adhesive closure device of any of Claims 1, 8, 17, 23 and 29, wherein each of the adhesive layer has a substantially uniform thickness from about 0.0001 mm to about 10 cm .

33. The releasable, surface-adhesive closure device of any of Claims 1, 8, 17, 23 and 29, wherein the elastic material has an elastic modulus from about 0.001 MPa to about 100,000 MPa.
34. The releasable, surface-adhesive closure device of any of Claims 1-30, suitable for multiple cycles of surface-adhesive closures and releases.


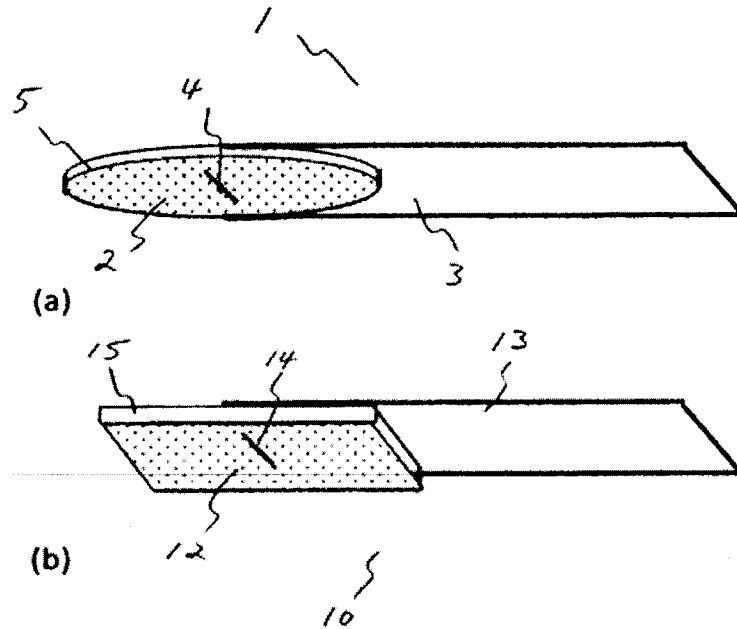



FIG. 1

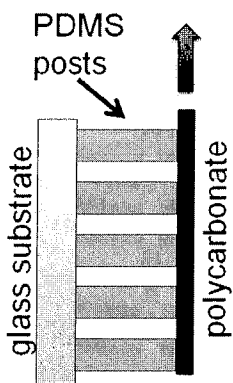

$$F_c = \sqrt{G_c} \sqrt{\frac{A}{C}}$$

$$C_{post} = \frac{4}{3\mu} \frac{t^3}{bh^3}$$

Add elements by the rules of compliance addition




$$F_c = \sqrt{G_c} \sqrt{\frac{(b_1 h_1 + b_2 h_2 + b_3 h_3 + \dots)}{C_1 C_2 C_3 \dots / (C_1 C_2 \dots + C_2 C_3 \dots + C_1 C_3 \dots)}}$$

$$= N \sqrt{G_c} \sqrt{\frac{bh}{C}}$$

FIG. 2

Fabric

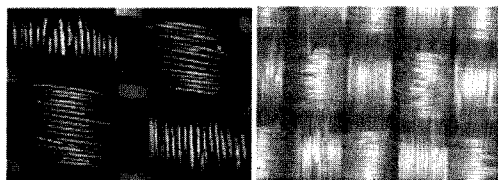

Molding
 $t > 1 \text{ mm}$



Pour PDMS into
mold



Impregnate fabric with
PDMS



Cure at room temperature

Meyer Bar
 $10 \text{ } \mu\text{m} < t < 1 \text{ mm}$




FIG. 3


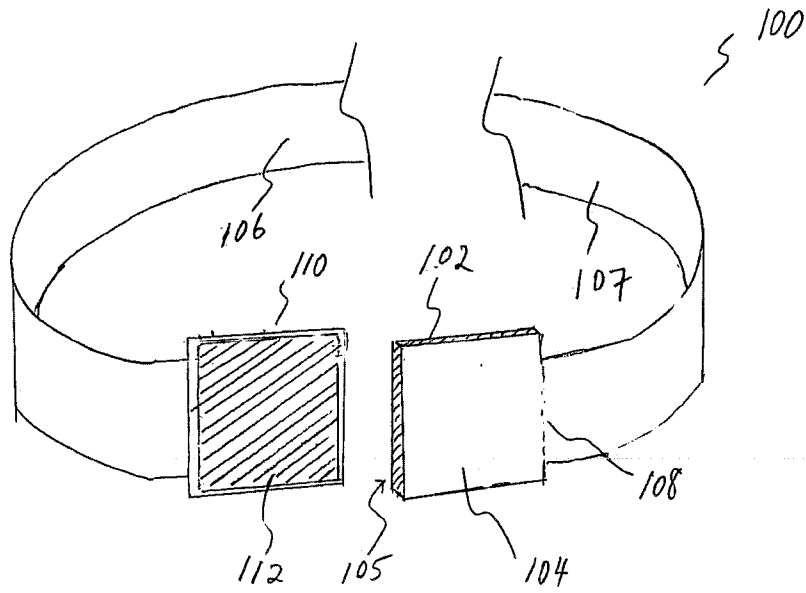



FIG. 4




(A)

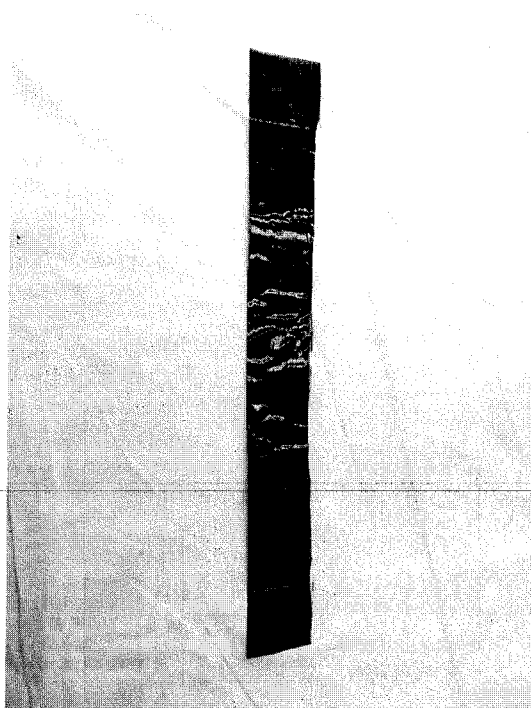

(B)

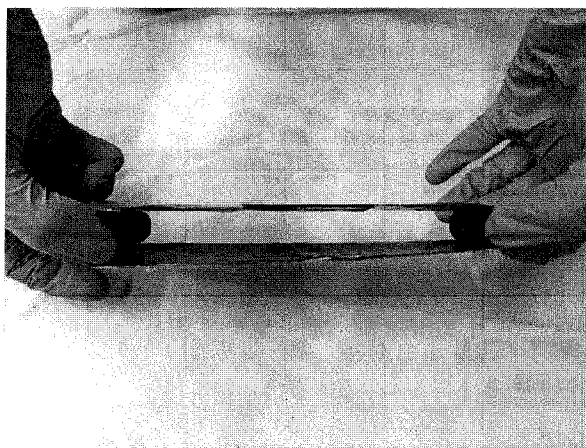

(C)

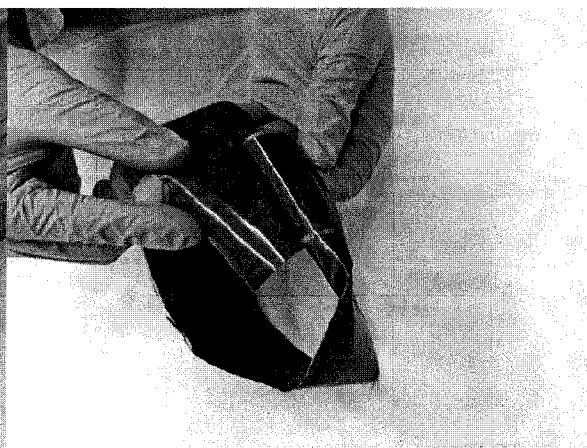

(D)

FIG. 5

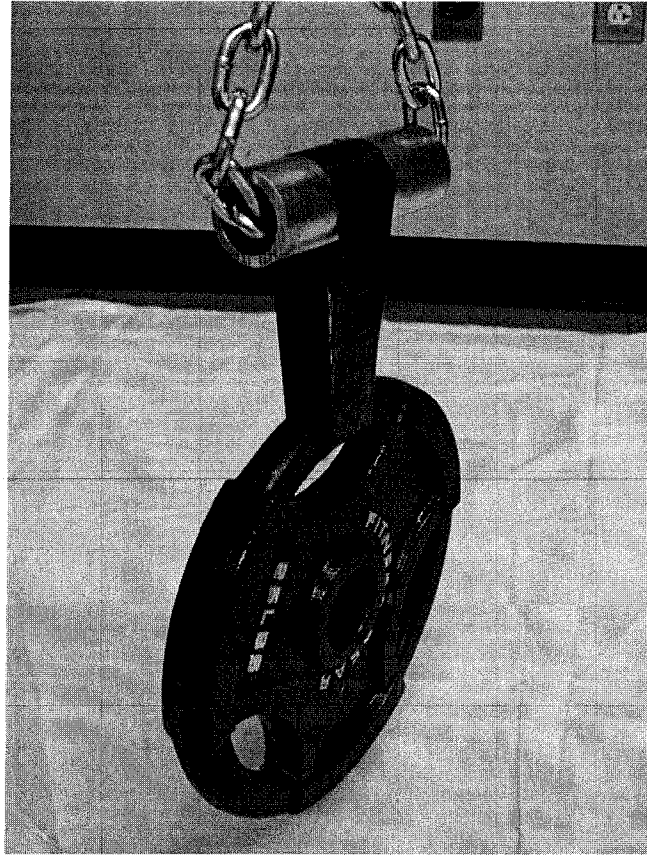


FIG. 6

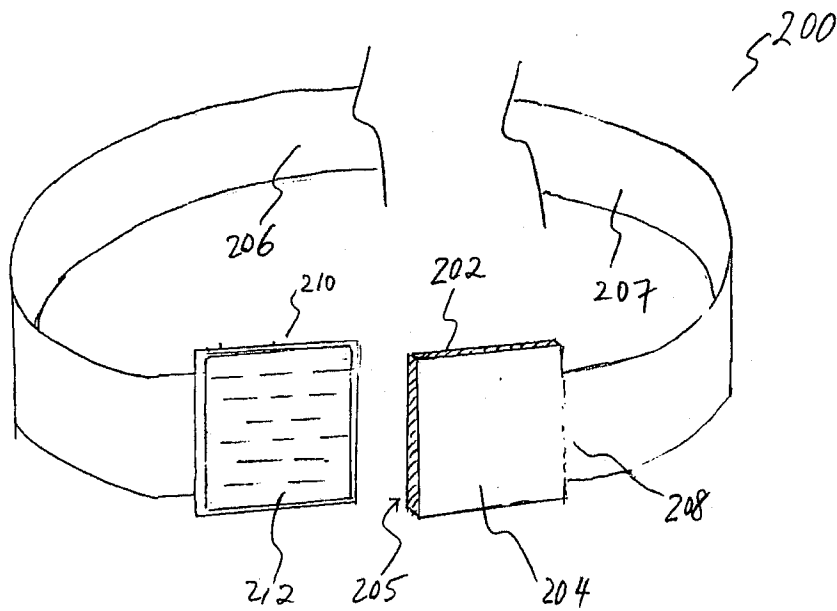


FIG. 7

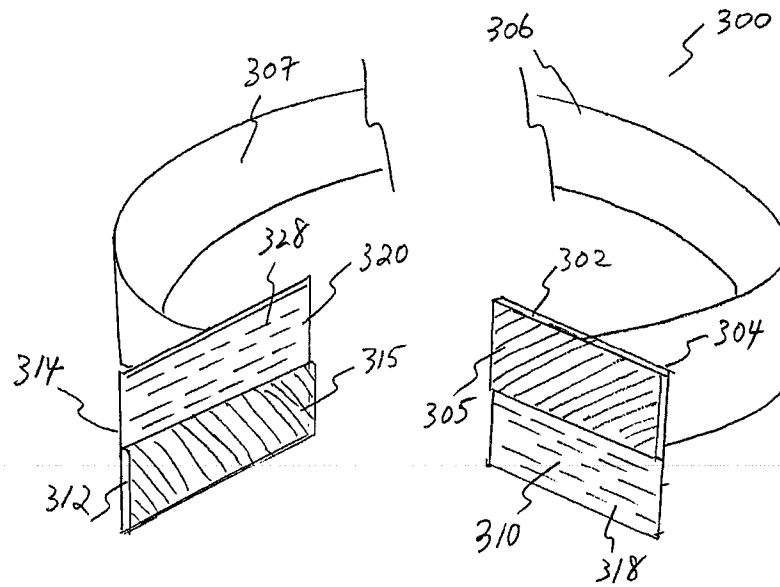


FIG. 8

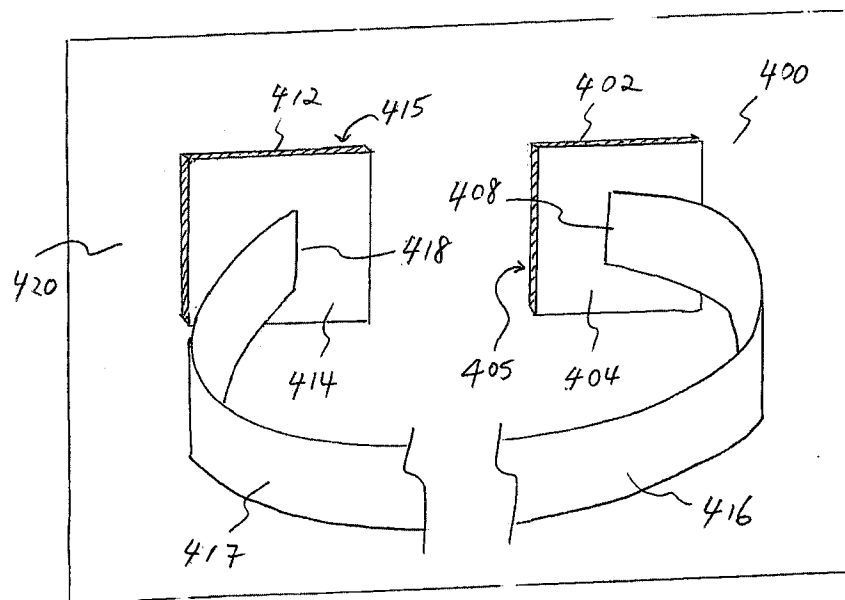


FIG. 9

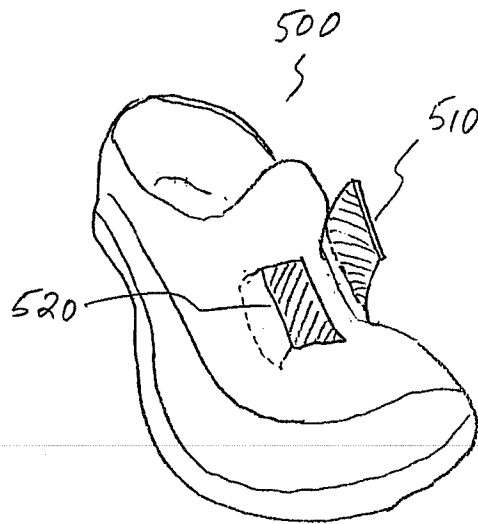


FIG. 10

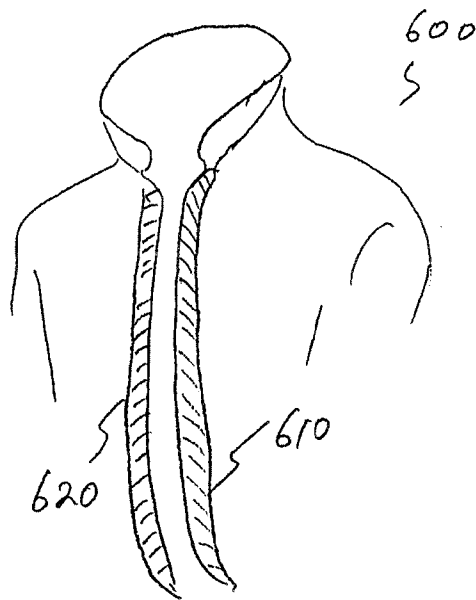


FIG. 11

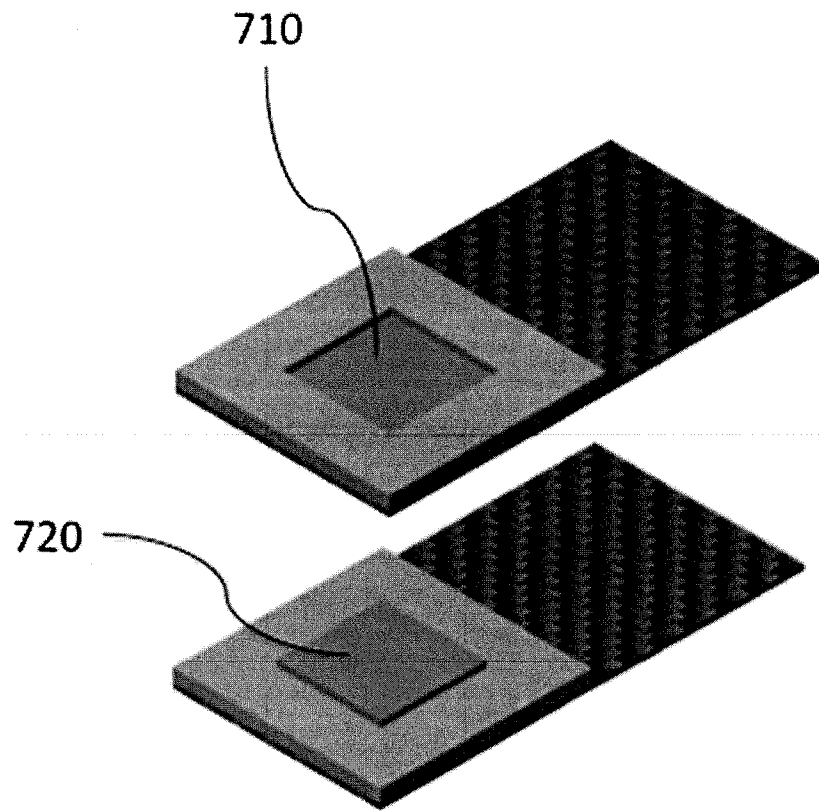


FIG. 12A

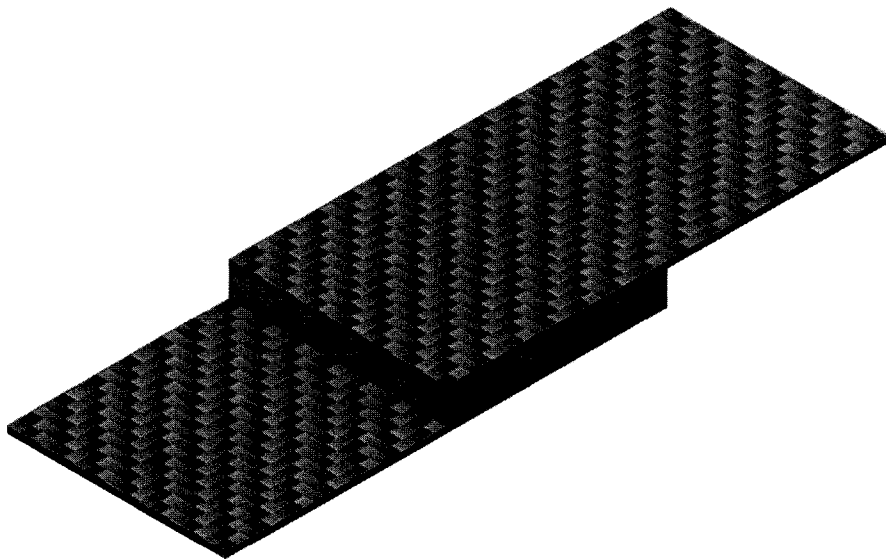


FIG. 12B

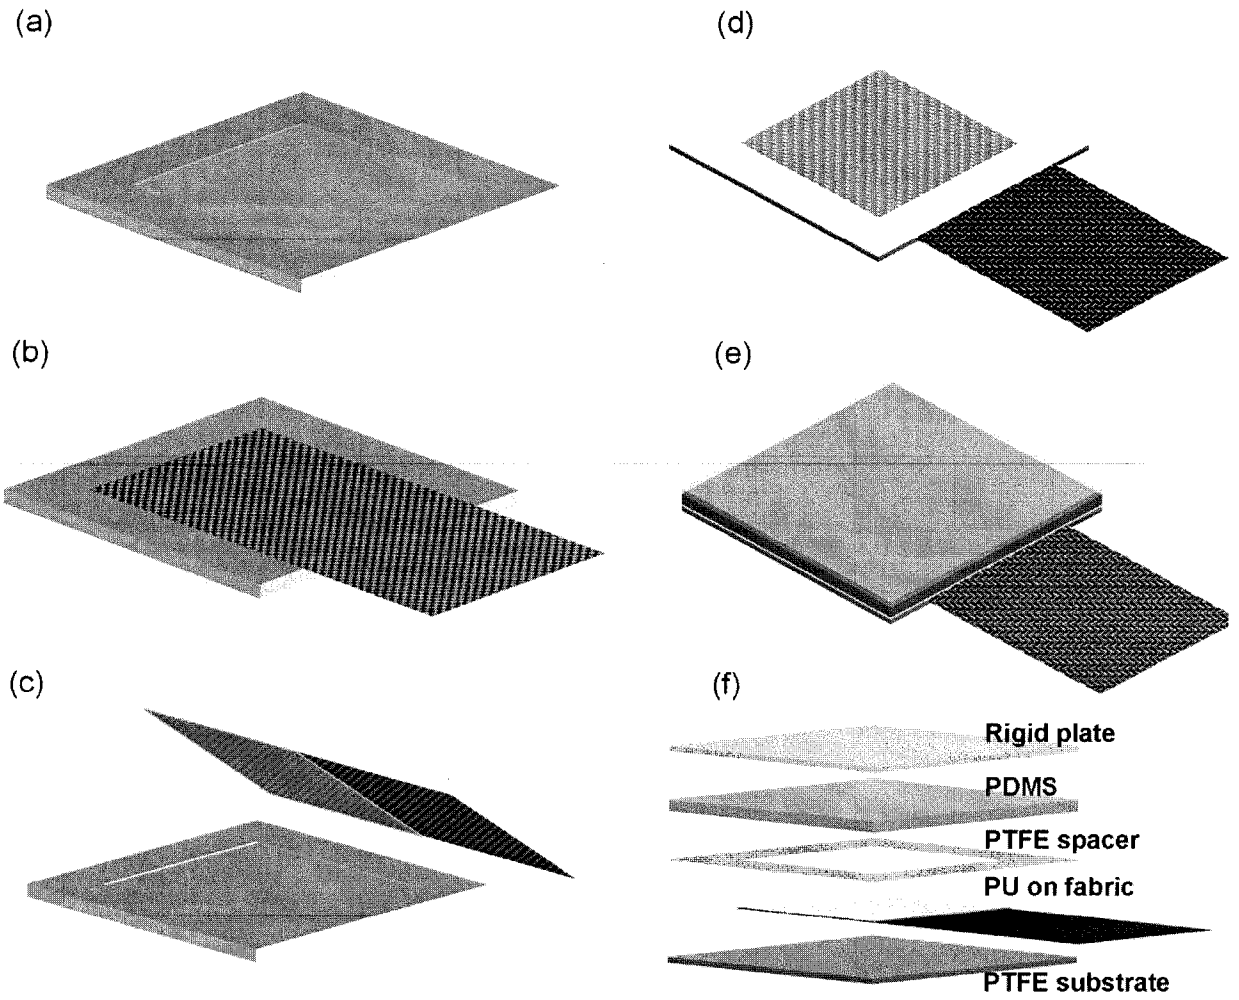


FIG. 13

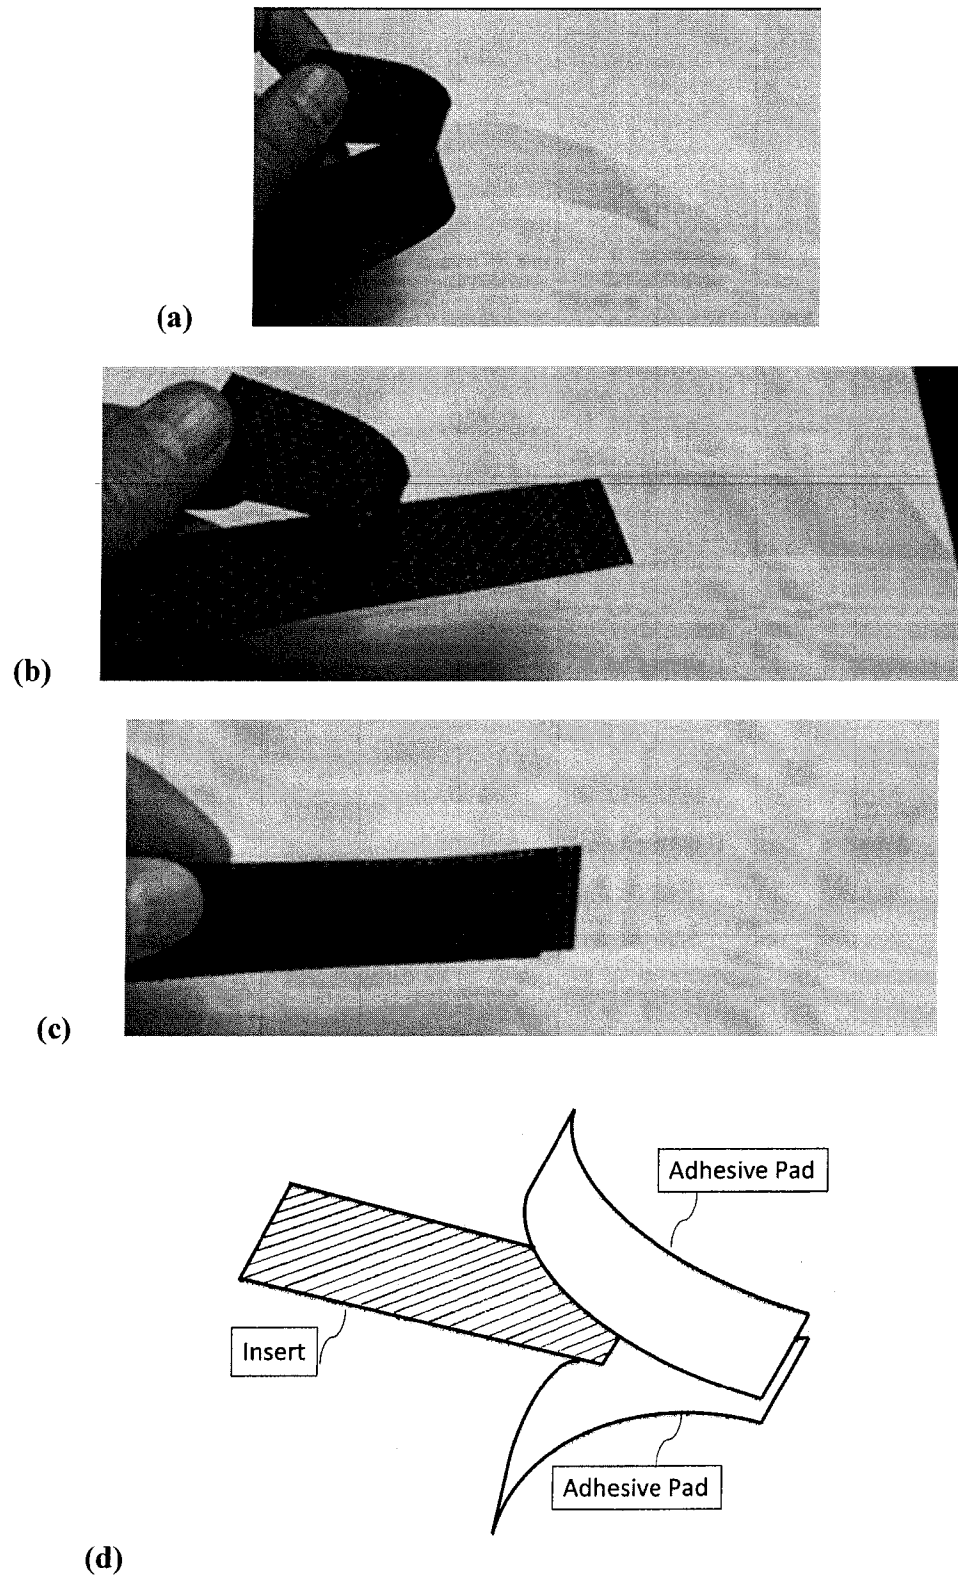


FIG. 14

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 2014/028422

A. CLASSIFICATION OF SUBJECT MATTER <i>A41F 9/00 (2006.01)</i>		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) A41F 9/00, A45C 13/30, A45F 3/14		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Espacenet, DWPI		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	RU 2381969 C2 (KRAFT FUDZ GLOBAL BRENDLS ELELSI) 20.02.2010, abstract, p. 3, lines 27-53, p. 4, lines 1-30, p. 6, lines 30-41, 51, p. 7, lines 1-53, p. 10, lines 22-53, p. 11, lines 1-9, fig. 1, 2, 15, 16, 18	1, 4-6
Y		2, 3, 7-34
Y	WO 2011/019511 A2 (CRYOVAC, INC. et al.) 17.02.2011, abstract, fig. 1-5, 36-39	8-16
Y	RU 111405 U1 (VOINOV VLADIMIR PETROVICH) 20.12.2011, claims, fig. 1-5	2, 3, 7, 17-34
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
*	Special categories of cited documents:	
“A”	document defining the general state of the art which is not considered to be of particular relevance	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“E”	earlier document but published on or after the international filing date	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“L”	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“O”	document referring to an oral disclosure, use, exhibition or other means	“&” document member of the same patent family
“P”	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search 02 June 2014 (02.06.2014)		Date of mailing of the international search report 28 August 2014 (28.08.2014)
Name and mailing address of the ISA/RU: FIPS, Russia, 123995, Moscow, G-59, GSP-5, Berezhkovskaya nab., 30-1 Facsimile No. +7 (499) 243-33-37		Authorized officer V. Vasilieva Telephone No. 8(495)531-64-81

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 2014/028422

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.