




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B29C 47/60	A1	(11) International Publication Number: WO 99/56937 (43) International Publication Date: 11 November 1999 (11.11.99)
<p>(21) International Application Number: PCT/US99/09866</p> <p>(22) International Filing Date: 6 May 1999 (06.05.99)</p> <p>(30) Priority Data: 09/073,281 6 May 1998 (06.05.98) US 09/283,516 1 April 1999 (01.04.99) US</p> <p>(71) Applicant (for all designated States except US): E.I. DU PONT DE NEMOURS AND COMPANY [US/US]; 1007 Market Street, Wilmington, DE 19898 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): LEVEQUE, Alain, Yves [FR/FR]; 959, route du Château, F-74330 Choisy (FR). SCHIRMER, Karl, Adolf [DE/DE]; Laurentiusstrasse 12C, D-90451 Nürnberg (DE).</p> <p>(74) Agents: WALKER, P., Michael et al.; E.I. du Pont de Nemours and Company, Legal Patent Records Center, 1007 Market Street, Wilmington, DE 19898 (US).</p>		<p>(81) Designated States: AE, AL, AU, BA, BB, BG, BR, CA, CN, CU, CZ, EE, GD, GE, HR, HU, ID, IL, IN, IS, JP, KP, KR, LC, LK, LR, LT, LV, MG, MK, MN, MX, NO, NZ, PL, RO, SG, SI, SK, SL, TR, TT, UA, US, UZ, VN, YU, ZA, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>

(54) Title: PLASTICIZING SCREW

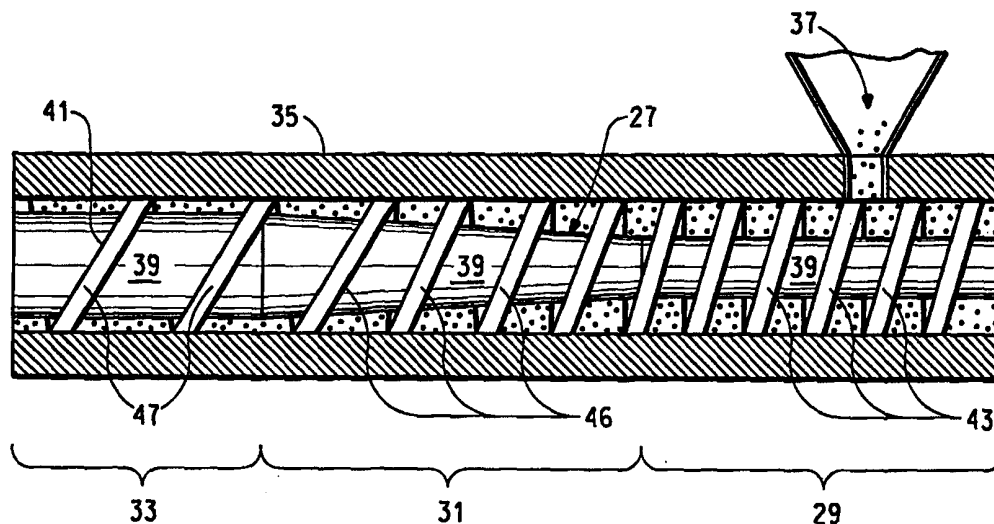

(57) Abstract

The present invention relates to a screw (27) for use in, for example, an injection molding machine or an extruder. The screw (27) includes a screw shaft (39) having a thread (41) spirally positioned about the screw shaft (39) so as to form a plurality of flights (43, 45, 47). The screw (27) has three zones (29, 31, 33), a feeding zone (29), a compression zone (31) and a metering zone (33), and the depth and pitch of the flights (43, 45, 47) of the screw (27) are designed based upon the material to be used in the screw (27) so that the difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone (29) and the ratio of the actual flow to the theoretical drag flow of material in the metering zone (33) is less than 0.2, preferably less than 0.1, and more preferably less than 0.05. This design results in a screw (27) which has a balanced mass flow, and thus a constant pressure gain along the screw without pressure peaks.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

PLASTICIZING SCREW

BACKGROUND

1. Field of the Invention

5 This invention relates to the field of screws that are used, for example, to melt or soften polymer, such as in a machine for injection molding polymer or a machine for extruding polymer.

2. Description of the Related Art

 The use of screws to injection mold or extrude polymer is well known.
10 Turning to Figure 1, there is shown a conventional or standard screw 11 for use in injection molding which includes three zones: a feeding zone 13, a compression or transition zone 15 and a metering zone 17. Screw 11 is housed in a hollow cylindrical barrel 19 having a constant inner diameter and preferably a smooth inner surface. Polymer resin, which may be in any form such as pellets, granules,
15 flakes or powder, is fed through an opening 21 in barrel 19 into feeding zone 13 where screw 11 turns to pack and then push the pellets into compression zone 15. The pellets are melted in compression zone 15 and then pushed to metering zone 17 where the molten material is homogenized. Afterwards the homogenized melt is either injection molded or processed further.

20 Screw 11 has a screw shaft 23 having a thread 25 spirally positioned about shaft 23 to form flights 25. Flights 25 are characterized by their depth, which is the height of flight 25 above shaft 23 and by their pitch, which is the length P of the distance between two adjacent flights 25 plus one flight width. The outside diameter OD of a screw 11 includes the depth of a flight 25 above and below shaft
25 23, whereas the root diameter RD of screw 11 is the diameter of shaft 23 only, without including the depth of flights 25. Conventionally flights 25 in a screw 11 have the same pitch in each of feeding zone 13, compression zone 15 and metering zone 17, but have a changing depth from zone to zone. Specifically, flights 25 have a constant depth x in feeding zone 13, a constant depth y in
30 metering zone 17 where $y < x$, and a gradually decreasing depth of x to y in compression zone 15.

 Screws are often characterized by their compression ratio, which is a ratio that is used to quantify the amount the screw compresses or squeezes the resin. The concept behind the compression ratio is to divide the volume of a flight in the
35 feed section by the volume of a flight in the metering section, but the actual standard that is used is a simplified method based on the following equation:

$$\text{Compression ratio} = \frac{\text{depth of flight in feeding zone}}{\text{depth of flight in metering zone}}$$

This compression ratio is referred to as the depth compression ratio. High
5 compression screws, which are usually used for crystalline or semi-crystalline materials, such as polymers, have compression ratios of greater than about 2.5. Standard compression screws, which are usually used for amorphous materials, have compression ratios of from about 1.8 to about 2.5, more commonly 2.2.

Various problems with high compression screws include: overheating
10 caused by compression that is too high or is uncontrolled; "bridging", which is when the polymer melt turns with the screw and is not pushed forward; and screw deposit which builds up in the compression and metering zones. These problems limit the maximum screw rotation speed and by consequence the output of molten material. In an attempt to overcome these problems some users switch to standard
15 screws, but the depth of the flight in the metering zone of a standard screw is too high to give good melt homogeneity under some conditions, especially with crystalline materials.

Many attempts have been made to improve the performance of screws. US Patent No. 4,129,386, discloses an extrusion device which has a grooved
20 barrel in combination with a screw having a helix angle or pitch D in the feed zone that constantly increases through a transition zone to a helix angle F in the metering zone. The feed zone has a constant flight height G, the metering zone has a constant flight I, and the t transition zone has a constantly decreasing flight height from feed zone flight height G to metering zone flight height I. This screw
25 design suffers from problems of overfeeding of the material to be extruded, and requires a grooved barrel in order to prevent buildup of excessive pressure gradients along the screw.

What is needed, therefore, is a screw which will produce a homogeneous melt without the problems associated with screws having a high compression
30 ratio.

SUMMARY OF THE INVENTION

The present invention relates to a screw for use in, for example, an injection molding machine or an extruder. The screw includes a screw shaft having a thread spirally positioned about the screw shaft so as to form a plurality
35 of flights which are divided into three zones: a feeding zone, a compression zone and a metering zone.

The depth, width and pitch of the flights of the screw are designed based upon the material to be used in the screw so that the difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone is less than 0.2, preferably less than 0.1, and more preferably less than 0.05. In a preferred embodiment the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and/or the ratio of the actual flow to the theoretical drag flow of material in the metering zone is from about 0.8 to 1.0.

This design results in a screw which has a balanced mass flow, and thus a constant pressure gain along the screw without pressure peaks.

An example of a screw that has the desired difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone is a screw in which the pitch of at least a portion of the flights in the metering zone is greater than the pitch of at least a portion of the flights in the feeding zone; the pitch of at least a portion of the flights in the feeding zone is less than the outside diameter of the screw; the pitch of at least a portion of the flights in the metering zone is greater than the outside diameter of the screw; the pitch of at least a portion of the flights increases through the compression zone; and the depth of at least a portion of the flights decreases through the compression zone moving from nearer the feeding zone to nearer the metering zone.

The inventive screw allows a higher screw rotation speed, has a higher throughput, and decreases the injection molding cycle time compared to conventional screws.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a side view in elevation of a standard screw; and

Figure 2 is a side view in elevation of a screw made in accordance with this invention.

DETAILED DESCRIPTION

The present invention relates to a screw for use in, for example, an injection molding machine or an extruder. The screw includes a screw shaft having a thread spirally positioned about the screw shaft so as to form a plurality of flights. The screw has three zones: a feeding zone, a compression zone and a metering zone, and in use is mounted in a hollow cylindrical barrel having a preferably smooth inner cylindrical wall which allows the screw to rotate within the hollow barrel.

As used herein, the term "feeding zone" refers to that zone of the screw where the material has not been compressed. In the case of polymer pellets, for example, the pellets are present in their unmelted bulk form. The term "metering zone" refers to that zone of the screw where the material has been fully
5 compressed. In the case of resin pellets, for example, the pellets are present in a completely molten form. The term "compression zone" refers to that zone of the screw where the material is compressed. In the case of polymer pellets, for example, the pellets are present in a mixed state between their bulk form and molten form.

10 A flight is characterized by its depth, which is defined as the height of the flight above the screw shaft, by its width, and by its pitch, which is defined as flight length (the distance between two adjacent turns of the flight on the screw shaft) plus one flight width. If the flight has a pitch of 25mm, it means that when the screw is rotated once, the polymer in the flight is moved axially 12.5mm in the
15 screw.

The present invention is based on the discovery that if the design of the flights is based upon the volume of the material to be present in the flights there is obtained a screw having a higher screw rotation speed, a higher throughput, and a decrease in injection molding cycle time compared to conventional screws.

20 Accordingly, in the present invention the depth, width and pitch of the flights of the screw are designed based upon the material to be used in the screw so that the absolute difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone is less than 0.2, preferably
25 less than 0.1, and more preferably less than 0.05. This design results in a screw which has a balanced mass flow, and thus a constant pressure gain along the screw without pressure peaks. In a preferred embodiment the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone is
30 from about 0.8 to 1.0.

The above ratios may be calculated on a mass per time or a volume per time basis.

The actual flow of material and the theoretical drag flow of material in the feeding zone and the metering zone are determined as follows.

35 The actual flow of material in the metering zone is determined by weighing the output of material from the screw over a given period of time. This mass flow rate may be converted into a volumetric flow rate by dividing the mass

flow rate by the melt density of the material used in the screw. By "melt density" is meant the density of the material, such as polymer, used in the screw when the material has been melted.

5 The mass flow rate of material in the screw is assumed to be constant, and the actual volumetric flow of material in the feeding zone is determined by taking the mass flow rate of material from the metering zone and dividing that mass flow rate by the bulk density of the material used in the screw. By "bulk density" is meant the mass of the material, such as polymer particles or granules, used in the screw divided by the total volume of the solid particles or granules and the voids or open spaces between them.

10 By "drag flow" is meant the theoretical volumetric flow of material which results from the relative movement between the screw and the internal surface of the screw barrel, that is, the forward flow of material due to the turning of the helical screw which forces the material forward and through the barrel. Drag flow is proportional to the product of the average relative velocity of the material and the channel cross-sectional area of the cylindrical barrel. In other words, the drag flow is the volumetric pumping capacity of material, and is usually calculated on a volume per time basis. Drag flow is based on a number factors related to the screw including the pitch, depth, width and angle of the flights, and the speed of the screw. The drag flow, which is directed toward the outlet end of the screw, may be increased by increasing the speed of the screw and/or by increasing the depth of the flights of the screw.

25 The theoretical drag flow is calculated using well known, conventional formulae such as shown in Gerhard Schenkel, "Kunststoff-Extrudertechnik," published by Carl Hanser Verlag, Munich (1963), pp. 123-125.

30 The theoretical drag flow calculated for the feeding zone must be adjusted by a correction factor related to the geometry of the flights in that zone and the material used in the screw. This correction factor is necessary because of the bulk nature of the material in the feeding zone and the influence of the flanks of the flights, and is normally in the range of 0.7 to 0.95, more typically in the range of 0.8 to 0.95. The correction factor may be obtained using known methods, such as shown on page 123 of Schenkel where there is presented a graph of the ratio of flight height to flight length to correction factor. The correction factor is determined by taking the ratio of the flight height to flight length and reading an appropriate correction factor from the chart.

35 While theoretically the calculation of the theoretical drag flow in the metering zone also needs to be adjusted by a correction factor, in fact the

correction factor is very close to 1.0 because in the metering zone the material is molten, and thus this correction factor is approximated as 1.0.

A screw having the ratios described above has a relatively constant pressure gain per pitch along the screw. If pressure peaks occur in a screw, stress
5 will be applied to the material in the screw which will result in screw deposit and a decrease in the mechanical properties of the material.

There is no limitation on the type of material that may be used in the screw, although the screw has been found to be especially useful in injection molding and extruding polymers.

10 An example of a screw that has the desired difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone is a screw in which:

the pitch of at least a portion of the flights in the metering zone is greater
15 than the pitch of at least a portion of the flights in the feeding zone;

the pitch of at least a portion of the flights in the feeding zone is less than the outside diameter of the screw;

the pitch of at least a portion of the flights in the metering zone is greater than the outside diameter of the screw;

20 the pitch of at least a portion of the flights increases through the compression zone; and

the depth of at least a portion of the flights decreases through the compression zone moving from nearer the feeding zone to nearer the metering zone.

25 In a preferred embodiment, the geometry of the flights is such that the pitch of the flights in the metering zone is greater than the pitch of the flights in the feeding zone, the pitch of the flights in the feeding zone is less than the outside diameter of the screw, the pitch of the flights in the metering zone is greater than the outside diameter of the screw, the pitch of the flights increases
30 through the compression zone, and the depth of the flights decreases through the compression zone moving from nearer the feeding zone to nearer the metering zone. As used herein, the term "outside diameter of the screw" means the diameter as measured to include the screw shaft and the depth of the flight above and below the screw shaft.

35 The compression ratio of a screw quantifies the relative amount a screw compresses a resin, and is based on the concept of dividing the volume of a flight in the feeding zone by the volume of a flight in the metering zone. An

approximation that is normally used as the compression ratio is the ratio of the depth of the flights in the feeding zone to the depth of the flights in the metering zone.

Thus, the usual method for changing the compression ratio of a screw has
5 been to change the depth of the flights in the feeding and metering zones. Since the depth of the flights in conventional screws is constant in the feeding zone and constant in the metering zone, the compression ratio of the screw would be increased by increasing the depth of the flights in the feeding zone, or decreasing the depth of the flights in the metering zone, or doing both. However, if the
10 compression ratio of the screw is too high it leads to the problems discussed above, namely, bridging and the build up of undesirable heat build up and screw deposits.

The present invention is based on the discovery that one can obtain the benefits of a high compression screw having a relatively high depth of flights in
15 the feeding zone and relatively small depth of flights in the metering zone without the disadvantages associated with a high compression screw, by providing a screw having an absolute difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone is less than 0.2, preferably
20 less than 0.1, and more preferably less than 0.05.

In effect, changing the pitch and the depth of the screw of the invention, as described above, lowers the compression ratio of the screw substantially, and thereby removes the disadvantages associated with a high compression ratio screw. At the same time the screw of the invention provides all the benefits
25 associated with the relatively high feeding zone flight depths and relatively low metering zone flight depths associated with a high compression ratio screw.

The compression ratio volume, calculated by taking the ratio of the feeding zone volume to the compression zone volume, is not simple to measure when both the pitch and the depth of the flights of the screw change. One reason
30 is that the changing pitch causes a variation in the angle of the flights along the screw shaft. It has been discovered that the compression ratio volume for a screw having a changing flight pitches and changing flight depths may be approximated by taking the ratio of the melt density to the bulk density for the polymer to be used with the screw.

35 The ratio of the melt density to the bulk density for many polymer materials is approximately equal to 1.3, and this value of 1.3 is a minimum for the compression ratio of the screw. Below a ratio of 1.3, the polymer granules are not

compressed enough to push entrapped air out of the polymer during the injection molding process.

With the present invention, improved results have been obtained with a screw having very low compression ratio, i.e., equivalent to the lower limit of 1.3 or higher but lower than the compression ratio of a high compression screw.

The discovery that a screw could be made and used successfully designed upon a small difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone, and with different pitches in the feeding and metering zones, and a changing pitch in the compression zone, was unexpected in view of the conventional teaching that the screw designed based on the volume of material in the flights and should have same pitch in each of the feeding, compression and metering zones. The features of the screw of the present invention allow the screw to have a higher screw rotation speed, a higher throughput, and a decrease in injection molding cycle time compared to conventional screws.

The invention is illustrated in Figure 2 where there is shown a screw 27 having a feeding zone 29, a compression zone 31 and a metering zone 33. Screw 27 is housed in a hollow cylindrical barrel 35 having a substantially constant inner diameter. Polymer resin, which may be in any convenient form, such as pellets, granules, flakes or powder, is fed through opening 37 in barrel 35 into feeding zone 29 where screw 27 turns to pack and then push the pellets into compression zone 31 as with a conventional screw.

Screw 27 has a screw shaft 39 and a thread 41 spirally positioned about shaft 39 to form feeding zone flights 43, compression zone flights 45 and metering zone flights 47.

The pitch of feeding zone flights 43 is smaller than the outside diameter of screw 27, and, in a preferred embodiment, the pitch of each of feeding zone flights 43 is approximately equal. The pitch of metering zone flights 47 is larger than the outside diameter of screw 27, and, in a preferred embodiment, the pitch of each of metering zone flights 47 is also approximately equal. Further, the pitch of feeding zone flights 43 is smaller than the pitch of metering zone flights 47.

As is shown in Figure 2, the depth of compression zone flights 45 gradually decreases moving from nearer feeding zone 29 towards metering zone 33, and the pitch of compression zone flights 45 gradually increases moving from nearer feeding zone 29 towards metering zone 33. The change in depth of compression zone flights 45 is obtained because in compression zone 31 screw

shaft 39 has the shape of a tapered cone. While the depth of compression zone flights 45 decreases while moving from nearer feeding zone 29 towards metering zone 33, it is not necessary that the depth of each successive compression zone flight 45 be smaller than the previous one. Similarly, while the pitch of compression zone flights 45 increases from nearer feeding zone 29 towards metering zone 33, it is not necessary that the pitch of each successive compression zone flights 45 be larger than the previous one.

The inventive screw may be used in an injection molding machine, or an extruder, or it may be used as the melting section of a larger screw.

While the invention has been illustrated as having one flight, as is known to those skilled in the art, the scope of the present invention includes a screw having more than one flight.

EXAMPLES

EXAMPLE 1 AND COMPARATIVE EXAMPLE 2

In Example 1 a screw according to the invention was made and in Comparative Example 2 a conventional screw was made. The physical dimensions of the screws are set forth in Table 1 below.

Delrin® 500 P, a polyacetal resin available from E. I. du Pont de Nemours and Company (DuPont), was injection molded using both screws. The resin had a ratio of melt density/bulk density of $1.16/0.87 = 1.33$. The results are summarized in Table 1 below.

TABLE 1

	Example 1	Comparative Example 2
Screw diameter, mm	30	30
Depth of flights in the feeding zone, mm	8	7
Pitch of flights in the feeding zone, mm	28	30
Depth of flights in the metering zone, mm	2.3	2.2
Pitch of flights in the metering zone, mm	50	30
Screw speed (rpm)	250	125
Screw output (kg/hr)	61	25
Compression ratio (volume)	1.47	2.6
Feeding zone actual flow, g/min.	72	29
Feeding zone drag flow correction factor	0.81	
Feeding zone theoretical drag flow, g/min.	73	37
Ratio of feeding zone actual flow to theoretical drag flow	0.98	0.78
Metering zone actual flow, g/min.	54	22
Metering zone theoretical drag flow, g/min.	54	17
Ratio of metering zone actual flow to theoretical drag flow	1.00	1.25
Difference in ratio of actual flow to theoretical drag flow in feeding zone and metering zone	0.02	0.47

The screw of Example 1 had a small difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone compared to the screw of Comparative Example 2. Thus, the screw of Example 1 produced a homogenous melt, a more consistent screw retraction time and allowed a higher RPM, that is, a higher output of resin that the screw of Comparative Example 2 without creating screw deposit, splays, bridging, or other defects.

EXAMPLE 3 AND COMPARATIVE EXAMPLE 4

Zytel® 135 F, a nylon resin available from DuPont, was also injection molded as in the previous Examples. In Example 3, the resin was injection molded using a screw according to the invention and in Example 4, the resin was injection molded using a screw according to the prior art. The results are summarized in Table 2 below.

TABLE 2

	Example 3	Comparative Example 4
Screw diameter, mm	32	32
Depth of flights in the feeding zone, mm	8	5.9
Pitch of flights in the feeding zone, mm	26	32
Depth of flights in the metering zone, mm	2.1	2.1
Pitch of flights in the metering zone, mm	48	32
Screw speed (rpm)	275	300
Screw output (kg/hr)	50	40
Compression ratio (volume)	1.56	2.4
Feeding zone actual flow, g/min.	59	48
Feeding zone drag flow correction factor	0.80	
Feeding zone theoretical drag flow, g/min.	81	76
Ratio of feeding zone actual flow to theoretical drag flow	0.73	0.64
Metering zone actual flow, g/min.	42	35
Metering zone theoretical drag flow, g/min.	58	36
Ratio of metering zone actual flow to theoretical drag flow	0.73	0.95
Difference in ratio of actual flow to theoretical drag flow in feeding zone and metering zone	0	0.31

The screw of Example 3 had no difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone compared to a difference of 0.31 for the screw of Comparative Example 4. Thus, the screw of Example 3 produced a homogenous melt, a more consistent screw retraction time

and allowed a higher RPM, that is, a higher output of resin that the screw of Comparative Example 4 without creating screw deposit, splays, bridging, or other defects.

EXAMPLE 5 AND COMPARATIVE EXAMPLE 6

- 5 Delrin® 500 P is injection molded as in the previous Examples using a screw having a diameter of 65 mm. In Example 3, the resin is injection molded using a screw according to the invention and in Example 4, the resin is injection molded using a screw according to the prior art. The results are summarized in Table 3 below.

10

TABLE 3

	Example 5	Comparative Example 6
Screw diameter, mm	65	65
Depth of flights in the feeding zone, mm	10	7.8
Pitch of flights in the feeding zone, mm	40	65
Depth of flights in the metering zone, mm	2.7	2.8
Pitch of flights in the metering zone, mm	75	65
Screw speed (rpm)	180	140
Screw output (kg/hr)	185	110
Compression ratio (volume)	1.6	2.5
Feeding zone actual flow, g/min.	212	127
Feeding zone drag flow correction factor	0.84	
Feeding zone theoretical drag flow, g/min.	248	279
Ratio of feeding zone actual flow to theoretical drag flow	0.85	0.46
Metering zone actual flow, g/min.	159	121
Metering zone theoretical drag flow, g/min.	121	170
Ratio of metering zone actual flow to theoretical drag flow	0.93	0.79
Difference in ratio of actual flow to theoretical drag flow in feeding zone and metering zone	0.08	0.33

- The screw of Example 5 has a small difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone compared to a difference of 0.33 for the screw of Comparative Example 6. Thus, the screw of Example 5 produces a homogenous melt, a more consistent screw retraction time and allowed a higher RPM, that is, a higher output of resin that the screw of Comparative Example 6 without creating screw deposit, splays, bridging, or other defects.

CLAIMS

1. A screw comprising a screw shaft having a thread spirally positioned about the screw shaft so as to form a plurality of flights, said screw having a feeding zone, a compression zone and a metering zone, wherein the depth, width
5 and pitch of the flights of the screw are designed based upon the material to be used in the screw so that the difference in the ratio of the actual flow of material to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow of material to the theoretical drag flow of material in the metering zone is less than 0.2.
- 10 2. The screw of claim 1, wherein the difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone is less than 0.1.
- 15 3. The screw of claim 1, wherein the difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone is less than 0.05.
- 20 4. The screw of claim 1, wherein the ratio of the actual flow of material to the theoretical drag flow of material in the feeding zone is between 0.8 and 1.0.
5. The screw of claim 1, wherein the ratio of the actual flow of material to the
25 theoretical drag flow of material in the metering zone is between 0.8 and 1.0.
6. The screw of claim 1, wherein the pitch of at least a portion of the flights in the metering zone is greater than the pitch of at least a portion of the flights in the feeding zone,

the pitch of at least a portion of the flights in the feeding zone is less than the outside diameter of the screw,

the pitch of at least a portion of the flights in the metering zone is greater than the outside diameter of the screw,

5 the pitch of at least a portion of the flights increases through the compression zone, and

the depth of at least a portion of the flights decreases through the compression zone moving from nearer the feeding zone to nearer the metering zone.

10

7. The screw of claim 6, wherein the pitch of the flights in the metering zone is greater than the pitch of the flights in the feeding zone.

8. The screw of claim 6, wherein the pitch of the flights in the metering zone
15 is approximately equal.

9. The screw of claim 6, wherein the pitch of the flights in the feeding zone is less than the outside diameter of the screw.

20 10. The screw of claim 6, wherein the pitch of the flights in the feeding zone is approximately equal.

11. The screw of claim 6, the pitch of the flights in the metering zone is greater than the outside diameter of the screw.

25

12. The screw of claim 6, wherein the depth of the flights in the metering zone is approximately equal.

13. The screw of claim 6, wherein the depth of the flights decreases through
30 the compression zone moving from nearer the feeding zone to nearer the metering zone.

14. The screw of claim 6, wherein the depth of the flights in the feeding zone is approximately equal.

5 15. An injection molding machine which includes the screw of claim 1.

16. An injection molding machine which includes the screw of claim 4.

17. An extruder which includes the screw of claim 1.

10

18. An extruder which includes the screw of claim 6.

19. In a screw comprising a screw shaft having a thread spirally positioned about the screw shaft so as to form a plurality of flights, said screw having a
15 feeding zone, a compression zone and a metering zone, wherein the pitch of at least a portion of the flights in the metering zone is greater than the pitch of at least a portion of the flights in the feeding zone, the pitch of at least a portion of the flights in the feeding zone is less than the outside diameter of the screw, the pitch of at least a portion of the flights in the metering zone is greater than the
20 outside diameter of the screw, the pitch of at least a portion of the flights increases through the compression zone, and the depth of at least a portion of the flights decreases through the compression zone moving from nearer the feeding zone to nearer the metering zone,

wherein the improvement comprises that the depth and pitch of the flights
25 are selected based upon the material to be used in said screw so that the difference in the ratio of the actual flow to the theoretical drag flow of material in the feeding zone and the ratio of the actual flow to the theoretical drag flow of material in the metering zone is less than 0.2.

1/2

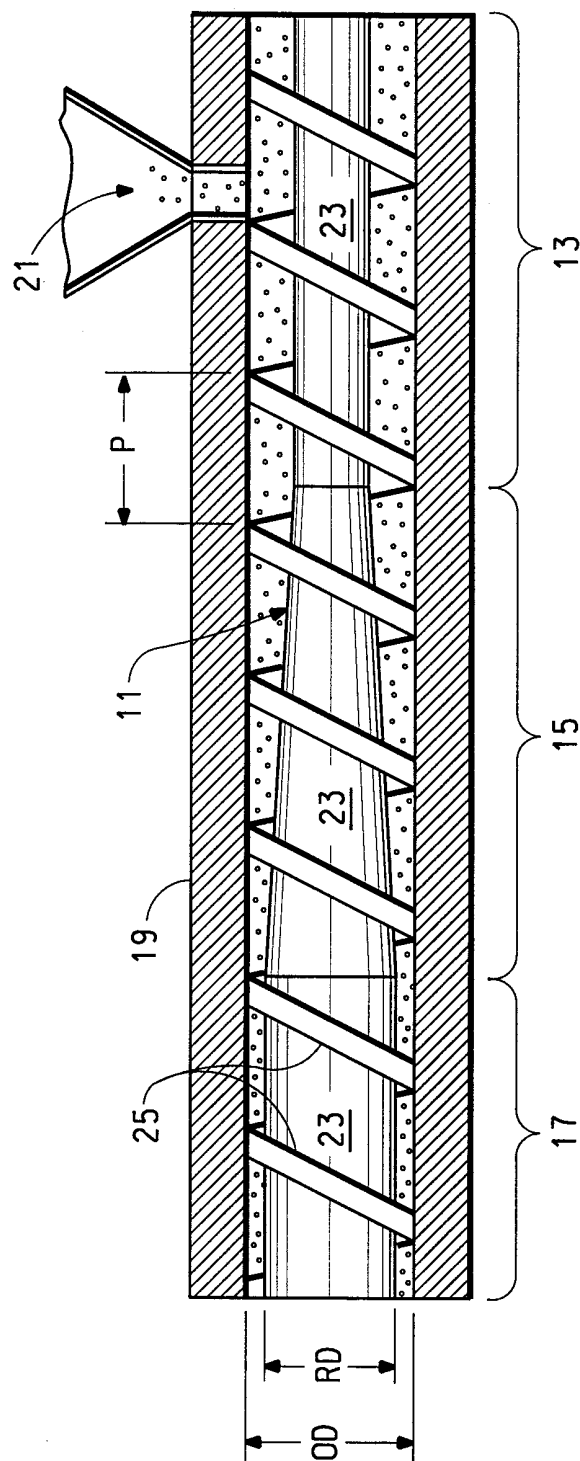


FIG. 1
(PRIOR ART)

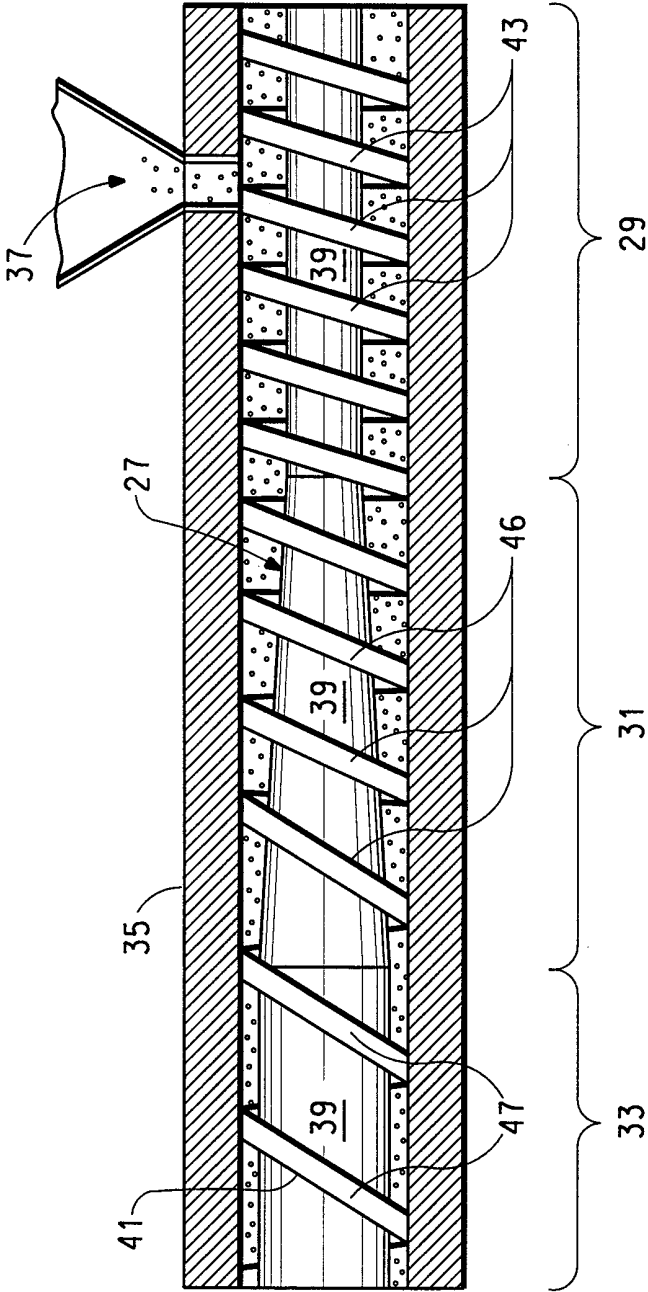


FIG. 2

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/09866

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B29C47/60

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 129 386 A (RAUWENDAAL CHRISTIAAN J) 12 December 1978 (1978-12-12) the whole document ---	1-19
A	PATENT ABSTRACTS OF JAPAN vol. 006, no. 232 (M-172), 18 November 1982 (1982-11-18) & JP 57 133038 A (SEKISUI KASEIHIN KOGYO KK), 17 August 1982 (1982-08-17) abstract ---	1-19
A	US 4 173 445 A (MCKELVEY JAMES M ET AL) 6 November 1979 (1979-11-06) figure 2 -----	1,6



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 August 1999

Date of mailing of the international search report

19/08/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Jensen, K

INTERNATIONAL SEARCH REPORT

Information on patent family members

In tional Application No

PCT/US 99/09866

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4129386 A	12-12-1978	NONE	
JP 57133038 A	17-08-1982	NONE	
US 4173445 A	06-11-1979	AU 528936 B	19-05-1983
		AU 4895179 A	24-01-1980
		CA 1124026 A	25-05-1982
		EP 0007752 A	06-02-1980
		JP 55015895 A	04-02-1980