



- (51) **International Patent Classification:**  
*H04B 1/707* (2011.01)
- (21) **International Application Number:**  
PCT/US2013/050452
- (22) **International Filing Date:**  
15 July 2013 (15.07.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
61/672,074 16 July 2012 (16.07.2012) US  
13/930,540 28 June 2013 (28.06.2013) US
- (71) **Applicant:** TEXAS INSTRUMENTS INCORPORATED [US/US]; P. O. Box 655474, Mail Station 3999, Dallas, TX 75265-5474 (US).
- (71) **Applicant (for JP only):** TEXAS INSTRUMENTS JAPAN LIMITED [JP/JP]; 24-1, Nishi-shinjuku 6-chome, Shinjuku-ku Tokyo, 160-8366 (JP).
- (72) **Inventors:** SCHMIDL, Timothy, M.; 8610 Southwestern Blvd. Apt. 2105, Dallas, TX 75206 (US). DABAK, Anand, G.; 8625 Kendall Drive, Plano, TX 75025 (US).
- (74) **Agents:** FRANZ, Warren, L. et al.; Texas Instruments Incorporated, Deputy General Patent Counsel, P.O. Box 655474, Mail Station 3999, Dallas, TX 75265-5474 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

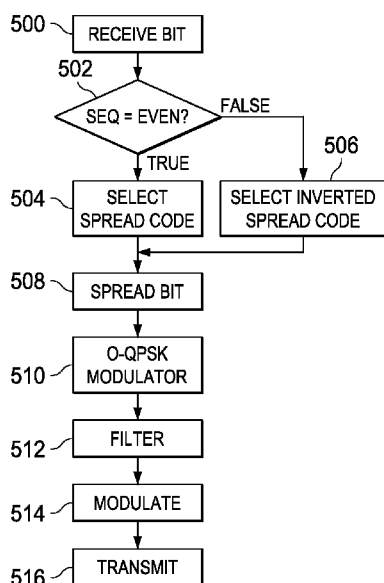
(54) **Title:** INVERTED SPREADING DSSS FOR SMART UTILITY NETWORKS

FIG. 5A

(57) **Abstract:** A method of operating a transmitter is disclosed. The method includes receiving a sequence of data bits (DATA), wherein each data bit has a respective sequence number. A first data bit of the sequence is spread (508) with a first spreading code (504) determined by the sequence number (502) of the first data bit. A second data bit of the sequence is spread (508) with an inverse of the first spreading code (506) determined by the sequence number (502) of the second data bit. The first and second data bits are modulated (510) and transmitted (516) to a remote receiver.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

**Published:**

- *with international search report (Art. 21(3))*

## INVERTED SPREADING DSSS FOR SMART UTILITY NETWORKS

**[0001]** This relates to wireless communication systems and, more particularly, to inverted spreading of a direct sequence spread spectrum (DSSS) smart utility network (SUN).

### BACKGROUND

**[0002]** A smart utility network (SUN) is a low rate (40 kb/s to 1 Mb/s), low power wireless technology that is specifically designed to be used in utility metering applications, such as transmitting electric, gas, or water usage data from the meter(s) on the customer premises to a data collection point (hub) operated for the utility. For example, meters could be installed for each house in a residential neighborhood, and then the data could be sent every 15 minutes from each meter to a pole top data collection point. This data collection point could then be connected by fiber, copper wire, or wireless to a central office which collects all the data for a region. Data could either be sent directly from each meter to the collection point (star configuration), or it could be hopped from meter to meter until it reaches the collection point (mesh configuration).

**[0003]** There are different physical layers (PHYs) that can be used for SUN including FSK (frequency shift keying), DSSS (direct sequence spread spectrum), and OFDM (orthogonal frequency division multiplexing). Devices that are allowed into a closed utility network may be controlled by the utility or the network operator. A smart utility network (SUN) standard specification is also known as the IEEE 802.15.4g specification and is incorporated by reference herein in its entirety.

**[0004]** A network may be set up in a mesh configuration where devices can communicate with neighbor devices rather than just with a hub. This helps to increase coverage since communication can be achieved even if the link directly to the hub is not good. However, this can increase the amount of traffic that goes through some devices since they have to include packet data from their neighbors as well as their own data. A mesh network may be appropriate for an urban or suburban area with a high density of meters and non-line-of-sight conditions between meters so that communication links between some meters and a hub is poor.

**[0005]** A star configuration is one where a hub communicates directly with each meter.

This could be appropriate for rural environments when the density of meters is low so that there may not be a convenient neighbor to use as an intermediate hop. A mix between a star and mesh configuration can also be used in some deployments.

**[0006]** Since meters have a long life span such as 20 years, there may be many generations of meters deployed in a utility network. Earlier deployed meters are often referred to as legacy equipment. In one embodiment all legacy the devices in the utility network may communicate using FSK, often at a fixed data rate such as 50 kb/s, 100 kb/s or 150 kb/s.

**[0007]** The DSSS (direct sequence spread spectrum) PHY (physical layer) uses offset QPSK (O-QPSK) modulation with a chip rate of either 100 kchip/s, 1000 kchip/s, or 2000 kchip/s. The term offset means that the in-phase (I) and quadrature (Q) channels are offset by one chip time. For the 100 kchip/s mode, there is a preamble of 32 zeros with each bit spread by a spreading code of length 32. This results in a preamble of length 10240 microseconds with a repetition period of 320 microseconds. For the 1000 kchip/s mode, there is a preamble of 56 zeros with each bit spread by a spreading code of length 64. This results in a preamble of length 3584 microseconds with a repetition period of 64 microseconds. For the 2000 kchip/s mode, there is a preamble of 56 zeros with each bit spread by a spreading code of length 128. This results in a preamble of length 3584 microseconds with a repetition period of 64 microseconds.

**[0008]** A DSSS packet consists of a synchronization header (SHR), which contains the preamble and start frame delimiter (SFD), a physical layer header (PHR), and a physical layer payload (PSDU). For the 1000 kchip/s mode the SFD consists of 16 bits which are spread with a spreading code of length 64. The MAC header, payload, and CRC are all contained within the PSDU. The SFD bit sequence is 1 1 1 0 1 0 1 1 0 1 1 0 0 0 1 0.

**[0009]** The PHY header consists of 24 bits as is shown below:

| Bit string index | 0         | 1         | 2   | 3        | 4  | 5–15   | 16–23 |
|------------------|-----------|-----------|-----|----------|----|--------|-------|
| Bit mapping      | SM        | RM1       | RM0 | R1       | R0 | L10–L0 | H7–H0 |
| Field            | Spreading | Rate Mode |     | Reserved |    | Frame  | HCS   |

| name | Mode |  |  | Length |  |
|------|------|--|--|--------|--|
|------|------|--|--|--------|--|

**[0010]** The spreading mode (SM) field is set to 0 when DSSS is used for PSDU spreading. There are 4 rate modes for DSSS. Rate Mode 0 has a spreading factor of 16 and a data rate of 31.25 kb/s. Rate Mode 1 has a spreading factor of 4 (which is implemented with a (16,4) spreading code) and a data rate of 125 kb/s. Rate Mode 2 has a spreading factor of 2 (which is implemented with a (8,4) spreading code) and a data rate of 250 kb/s. Rate Mode 3 does not use spreading and has a data rate of 500 kb/s. For all rate modes the PSDU is coded with a rate  $1/2$ ,  $k=7$  convolutional code.

**[0011]** The reserved bits are set to 0, and these may be used later to allow future evolution of the standard. The frame length is the length of the PSDU in octets, so the PSDU can contain up to 2047 octets (bytes). The header check sequence is an 8-bit CRC check for the header.

**[0012]** The structure of the transmitter chain is shown in FIG. 1 which is taken from IEEE 802.15.4g specification. For the 902-928 MHz band the SHR contains the 56 preamble bits “all 0” and the 16 SFD bits. Bit differential encoding (BDE) is applied, but for the preamble there is no effect since the “0” bits remain “0” bits after differentially encoding with the previous bit. Then a 64-chip spreading is applied to the SHR. The PHR with the 24 bits shown above has 6 tails bits appended, and then a rate  $1/2$ ,  $k=7$  convolutional code is applied, followed by an interleaver. Then a length 16 spreading code is applied. For the PSDU there 6 tails bits appended and then possibly some pad bits so that the interleaver has an integer number of blocks to process. Then the same rate  $1/2$ ,  $k=7$  convolutional code is applied as was done for the PHR. After interleaving there are four possible rate modes that may be used. Rate mode 0 is the same spreading as is used for the PHR. There is no spreading for Rate mode 3. Rate mode 1 uses (16,4) spreading, so that for each 4 input bits there are 16 chips that are generated.

**[0013]** The chip timing for the O-QPSK modulator is shown in FIG. 2. The in-phase (I) and quadrature (Q) bits are offset in time by  $T_c$ , and  $2 T_c$  is the duration in time of each bit.

**[0014]** For the 902-928 MHz band the O-QPSK pulse shape is a half sine wave pulse as shown in Equation [1] below.

$$p(t) = \sin\left(\frac{\pi t}{2T_C}\right) \quad \text{for } 0 \leq t \leq 2T_C, \text{ and } 0 \text{ otherwise} \quad [1]$$

**[0015]** While the preceding approach specified in IEEE 802.15.4g provides wireless communications for smart utility networks, the present inventors recognize that still further improvements are possible. One problem with using a block code such as an (8,4) code to spread two bits or a (16,4) code to spread four bits is that it is computationally complex to generate soft decisions that are necessary for a Viterbi decoder. For example, a hard decision for a BPSK symbol is simply +1 or -1. However, a soft decision is a decimal value with a more positive value indicating a more probable +1 and a more negative value indicating a more probable -1. This soft decision is not only computationally difficult, it is also less accurate than desired. Accordingly, the preferred embodiments described below are directed toward this as well as improving upon the prior art.

#### SUMMARY

**[0016]** An example method of operating a transmitter is disclosed. The method includes receiving a sequence of data bits. Each data bit of the sequence has a respective sequence number. A first data bit of the sequence is spread with a first spreading code determined by the sequence number of the first data bit. A second data bit of the sequence is spread with an inverse of the first spreading code determined by the sequence number of the second data bit. The first and second data bits are modulated and transmitted to a remote receiver.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0017]** FIG. 1 is a diagram of a smart utility network (SUN) transmitter of the prior art as disclosed in the IEEE 802.15.4g specification;

**[0018]** FIG. 2 is a chip timing diagram of an O-QPSK modulator that may be used with the SUN transmitter of FIG. 1;

**[0019]** FIGS. 3A - 3D are block diagrams of various embodiments of wireless transmitters of the invention;

**[0020]** FIGS. 4A - 4C are block diagrams of various embodiments of wireless receivers of the invention;

**[0021]** FIGS. 5A and 5B are flow charts showing operation of the transmitters of FIGS. 3A and 3B, respectively;

[0022] FIGS. 6A and 6B are flow charts showing operation of the receivers of FIGS. 4A and 4B, respectively;

[0023] FIG. 7 is a packet error rate diagram comparing standard block coding to inverted spreading according to the invention for (8,4) spreading; and

[0024] FIG. 8 is a packet error rate diagram comparing standard block coding to inverted spreading according to the invention for (16,4) spreading.

#### DETAILED DESCRIPTION OF EXAMPLE EMBODIMENTS

[0025] Communication within a smart utility network must be reliable for many different configurations for rural as well as urban networks. Due to the longevity of existing utility hardware, any modification to existing specifications should be backwards compatible with existing hardware. Embodiments of the invention, therefore, are directed to improved coding of a direct sequence spread spectrum (DSSS) communication system that may be readily employed in existing transmitters and receivers. Moreover, the invention is directed to simplified encoding at the transmitter as well as simplified decoding at the receiver of legacy DSSS systems. In particular, the invention is directed to inverted spreading, wherein one spreading sequence is used for even numbered bits, and an inverted spreading sequence is used for odd numbered bits. In another embodiment of the invention, alternate bits may be inverted and a same spreading code may be applied to all bits.

[0026] FIG. 3A is a block diagram of a first embodiment of a wireless transmitter of the invention. The transmitter includes an input buffer 300 coupled to receive a data sequence (DATA). A multiplex circuit 304 is coupled to a memory circuit 302 having stored spreading code values. An exclusive OR (XOR) circuit 306 is coupled to receive a sequence of data bits from input buffer 300 and a selected spreading code via multiplex circuit 304. The XOR circuit 306 produces a spread data sequence which is an exclusive OR (XOR) of each bit with a respective spreading code. The spread data sequence is applied to offset quadrature phase shift keyed (O-QPSK) modulator 308 and, subsequently, to shaping filter 310. In some embodiments the modulator and shaping filter may be combined by using a lookup table to implement the combination of the two functions. The data sequence from shaping filter 310 is applied to modulator circuit 312 where it is modulated by a radio frequency (RF) carrier (CARRIER) and applied to an RF amplifier (not shown) for transmission to a remote receiver. Operation of the transmitter of FIG. 3A will now be explained with reference to the flow chart of FIG. 5A for a 2-

chip spreading code. The transmitter receives a sequence of data bits 500 at input buffer 300. Each bit of the sequence has a respective sequence number which is either even or odd. The input buffer 300 is arranged to transmit one bit of the sequence for each half cycle of clock signal CLK. A low half cycle of clock signal CLK selects spreading code 01 from memory circuit 302. Correspondingly, a high half cycle of clock signal CLK selects spreading code 10, which is the inverse of spreading code 01. In this manner, the transmitter determines whether the data bit sequence is even or odd at step 502. During a low half cycle of CLK, spreading code 01 is selected at step 504. Likewise, during a high half cycle of CLK, inverted spreading code 10 is selected at step 506. XOR circuit 306 then produces a corresponding spread data sequence at step 508. O-QPSK circuit 308 then modulates the spread data sequence at step 508 and applies the modulated data sequence to shaping filter circuit 310 at step 512. The filtered data sequence is then modulated 312 by the RF CARRIER at step 514 and transmitted to a remote receiver. Table I below illustrates operation of the transmitter for an exemplary data sequence 0110 having corresponding sequence numbers 0 through 3 in the first row. The second row illustrates the spreading code selected by multiplex circuit 304. Here, spreading code 01 is selected for even sequence numbers 0 and 2. Correspondingly, spreading code 10 is selected for odd sequence numbers 1 and 3. The spread data sequence in the third row is the XOR of each data bit of the sequence with the respective chips of the selected spreading code. In the first column, for example, an XOR of data bit 0 with spreading code 01 produces spread data 01. In the second column, an XOR of data bit 1 with spreading code 10 produces spread data 01.

|                |    |    |    |    |
|----------------|----|----|----|----|
| DATA BIT (0-3) | 0  | 1  | 1  | 0  |
| SPREAD CODE    | 01 | 10 | 01 | 10 |
| SPREAD DATA    | 01 | 01 | 10 | 10 |

Table I

**[0027]** FIG. 3B is a block diagram of a second embodiment of a wireless transmitter of the invention. The transmitter includes an input buffer 300 coupled to receive a data sequence (DATA). A switching circuit 326 is coupled to receive either a data bit from buffer 300 or an inverted data bit produced by inverter 324 during each half cycle of CLK. The switching circuit may be a transmission gate or other suitable logic circuit as is well known in the art. Either the selected data bit or inverted data bit is then applied to XOR circuit 306. XOR circuit 306 is also coupled to receive a spreading code which is applied to either the selected or inverted data bit.

The XOR circuit 306 produces a spread data sequence which is an exclusive OR (XOR) of each bit with spreading code. The spread data sequence is applied to O-QPSK modulator 308 and, subsequently, to shaping filter 310. The data sequence from shaping filter 310 is applied to modulator circuit 312 where it is modulated by a carrier and applied to an RF amplifier (not shown) for transmission to a remote receiver.

**[0028]** Operation of the transmitter of FIG. 3B will now be explained with reference to the flow chart of FIG. 5B for a 2-chip spreading code. The transmitter receives a sequence of data bits 500 at input buffer 300. Each bit of the sequence has a respective sequence number which is either even or odd. The input buffer 300 is arranged to transmit one bit of the sequence for each half cycle of clock signal CLK. A low half cycle of clock signal CLK transmits the data bit from buffer 300 to XOR circuit 306 via switching circuit 326. Correspondingly, a high half cycle of clock signal CLK transmits the inverted data bit from inverter 324 to XOR circuit 306 via switching circuit 326. In this manner, the transmitter determines whether the data bit sequence is even or odd at step 502. During a low half cycle of CLK the data bit is transmitted directly to XOR circuit 306. However, during a high half cycle of CLK, the inverted data bit from inverter 324 is transmitted to XOR circuit 306 at step 518. XOR circuit 306 then produces a spread data sequence at step 520 by applying a single spreading code to either the selected data bit or the inverted data bit. O-QPSK modulator 308 then modulates the spread data sequence at step 508 and applies the modulated data sequence to shaping filter circuit 310 at step 512. The filtered data sequence is then modulated 312 by the RF CARRIER at step 514 and transmitted to a remote receiver at step 516. Table II below illustrates operation of the transmitter for an exemplary data sequence 0110 having corresponding sequence numbers 0 through 3 in the first row. The second row is the selected data bit which is transmitted via switching circuit 326 to XOR circuit 306. The third row shows the exemplary spreading code used for each selected data bit in the second row. The spread data sequence in the fourth row is the XOR of each selected data bit of the second row with the respective chips of the spreading code in the third row. In the first column, for example, an XOR of the selected data bit 0 with spread code 01 produces spread data 01. In the second column, an XOR of selected inverted data bit 0 with spread code 10 also produces spread data 01.

|                |   |   |   |   |
|----------------|---|---|---|---|
| DATA BIT (0-3) | 0 | 1 | 1 | 0 |
| SELECTED DATA  | 0 | 0 | 1 | 1 |

|             |    |    |    |    |
|-------------|----|----|----|----|
| SPREAD CODE | 01 | 01 | 01 | 01 |
| SPREAD DATA | 01 | 01 | 10 | 10 |

Table II

[0029] FIG. 3C shows a third embodiment of a wireless transmitter of the invention which may be extended to communication systems with multiple spreading codes. The transmitter of FIG. 3C is similar to the embodiment of FIG. 3A. Memory circuit 334 is arranged to store the multiple spreading codes. Address counter 330 addresses selected spreading codes in memory circuit 334, and multiplex circuit 332 applies the selected spreading codes to XOR circuit 306.

[0030] Operation of the transmitter of FIG. 3C is explained with reference to Table III below for the previously discussed data sequence and 4-chip spreading. One of ordinary skill in the art having access to the instant specification will understand that the embodiment of FIG. 3C may be extended to any practical data sequence and spreading code. The transmitter receives a sequence of data bits at input buffer 301. Each data bit of the sequence has a respective sequence number (0-3) which is either even or odd. The input buffer 301 is arranged to transmit one bit of the sequence for each cycle of clock signal CLK. The transmitter determines whether the data bit sequence number is even or odd from the least significant bit of address counter 330 and selects the appropriate spreading code shown in the second row of Table III. For example, spreading code 0110 in the first column is selected for the first data bit having even sequence number 0. Spreading code 1001, which is the inverse of 0110, is selected in the second column for the second data bit having odd sequence number 1. XOR circuit 306 then produces a corresponding spread data sequence shown in the third row of Table III. O-QPSK circuit 308 then modulates the spread data sequence and applies the modulated data sequence to shaping filter circuit 310. The filtered data sequence is then modulated 312 by the RF CARRIER and transmitted to a remote receiver.

|                |      |      |      |      |
|----------------|------|------|------|------|
| DATA BIT (0-3) | 0    | 1    | 1    | 0    |
| SPREAD CODE    | 0110 | 1001 | 0101 | 1010 |
| SPREAD DATA    | 0110 | 0110 | 1010 | 1010 |

Table III

[0031] FIG. 3D is a block diagram of a fourth embodiment of a wireless transmitter of the invention. The transmitter is the same as the transmitter of FIG. 3A except that XOR circuit 340 is added between XOR circuit 306 and modulator circuit 308. In an alternative embodiment,

XOR circuit 340 might be added before buffer 300. XOR circuit 340 is coupled to receive a scrambling or whitening code (CODE). The scrambling code is preferably a pseudo random noise (PN) sequence that may be generated by a linear feedback shift register or other suitable means. For example, there may be many local utility transmitters in a network that report to a remote receiver or network hub.

**[0032]** FIG. 4A is a block diagram of a first embodiment of a wireless receiver of the invention which may be used with the transmitter of FIG. 3A. The receiver includes demodulator circuit 400 which is coupled to receive an input data sequence (INPUT) and RF carrier (CARRIER). Modulator circuit 400 produces a base band signal that is applied to shaping filter 402. The filtered input data is then applied to offset quadrature phase shift keyed (O-QPSK) demodulator 408. The demodulated input data is subsequently applied to multiplier circuit 410. Multiplier circuit 410 receives a selected despreading code from memory circuit 404 via multiplex circuit 406 and applies the resulting despread signal to output buffer 412. Output buffer 412 responsively produces output data sequence (DATA).

**[0033]** Operation of the receiver of FIG. 4A will now be explained with reference to the flow chart of FIG. 6A for a 2-chip despreading code. A sequence of data bits is received 600 at demodulator circuit 400. Each bit of the sequence has a respective sequence number which is either even or odd. The multiplier circuit demodulates 602 the data sequence with the RF CARRIER to produce a base band signal that is applied to shaping filter 402. The shaping filter 402 filters 604 the data sequence. The resulting data sequence is demodulated 606 by O-QPSK demodulator 408 to produce the data sequence in the first row of Table IV below. This is the same data sequence produced in the third row of Table I above except that after modulation a logical 0 is -1 and a logical 1 is +1. Clock signal CLK operates synchronously with the clock signal of the transmitter of FIG. 3A and is arranged to receive one bit or two chips of the data sequence for each half cycle of clock signal CLK. A low half cycle of clock signal CLK selects despreading code +1-1 from memory circuit 404. Correspondingly, a high half cycle of clock signal CLK selects despreading code -1+1, which is the inverse of despreading code +1-1. In this manner, the receiver determines whether the data sequence is even or odd at step 608. During a low half cycle of CLK, despreading code +1-1 is selected at step 610. Likewise, during a high half cycle of CLK, inverted despreading code -1+1 is selected at step 612. The selected despreading sequence is shown in the second row of Table IV. Multiplier circuit 410 then

produces a corresponding despread data sequence at step 614 as shown in the third row of Table IV below. The despread data sequence in the third row is the product of each chip of the modulated data sequence in the first row with the respective chips of the selected desreading code in the second row. In the first column, for example, a product of data chips -1+1 with desreading code +1-1 produces despread data bit -1-1. This has a summed value of -2 and is interpreted as a logical 0. In the second column, a product of data chips -1+1 with desreading code -1+1 produces despread data +1+1. This has a summed value of +2 and is interpreted as a logical 1. Output buffer 412 subsequently produces the data sequence (DATA) at step 616.

|               |      |      |      |      |
|---------------|------|------|------|------|
| MOD SEQ (0-3) | -1+1 | -1+1 | +1-1 | +1-1 |
| DESPREAD CODE | +1-1 | -1+1 | +1-1 | -1+1 |
| DESPREAD DATA | -1-1 | +1+1 | +1+1 | -1-1 |
| SUMMED DATA   | -2   | +2   | +2   | -2   |

Table IV

**[0034]** By way of example, the despread data sequence of the third row of Table IV is shown as a hard decision. Thus, a -1-1 for both chips of a data bit is interpreted as a logical 0, and a +1+1 for both chips of a data bit is interpreted as a logical 1. A soft decision, however, is based on receiving a logical 0 chip as approximately a -1 and a logical 1 chip as approximately a +1. The two chips of each bit are preferably averaged or summed after desreading and a negative result is interpreted as a logical 0 data bit. Likewise, a positive sum or average is interpreted as a logical 1 data bit. The 2-chip example of FIG. 4A, therefore, produces two independent samples of each data bit and advantageously provides a high level of noise immunity. Referring to FIG. 7, there is a simulation comparing a conventional (8,4) data signal with an (8,4) data signal with inverted desreading according to the invention of FIG. 4A. In the simulation of FIG. 7, a data sequence of 250 bytes is convolutionally encoded with a rate 1/2, k=7 code. After convolutional encoding the data bits are whitened with a 511 length PN sequence. The packet error rate performance for 2-chip desreading with the (8,4) inverted spreading code is significantly better than with conventional (8,4) encoding. The inverted desreading has about 0.35 dB better performance at 10% packet error rate.

**[0035]** FIG. 4B is a block diagram of a second embodiment of a wireless receiver of the invention which may be used with the transmitter of FIG. 3B. The receiver of FIG. 4B is similar to the receiver of FIG. 4A except that a single 2-chip desreading code is applied to multiplier

circuit 410. The demodulated input data from O-QPSK demodulator 408 is also applied to multiplier circuit 410. Multiplier circuit 410 applies the resulting despread signal to output buffer 412. Output buffer 412 responsively applies the output data sequence to switching circuit 416 and to inverter 414. Switching circuit 416 subsequently produces the data sequence from output buffer 412 or an inverted data sequence from inverter 414. The switching circuit 416 may be a transmission gate or other suitable logic circuit as is well known in the art.

**[0036]** Operation of the receiver of FIG. 4B is explained with reference to the flow chart of FIG. 6B for a 2-chip despreading code. A sequence of data bits is received 600 at demodulator circuit 400. Each bit of the sequence has a respective sequence number which is either even or odd. The multiplier circuit demodulates 602 the data sequence with the RF CARRIER to produce a base band signal that is applied to shaping filter 402. The shaping filter 402 filters 604 the data sequence. The resulting data sequence is demodulated 606 by O-QPSK demodulator 408 to produce the data sequence in the first row of Table V below. This is the same data sequence produced in the fourth row of Table II above. The despreading code in the second row of Table V is also applied to multiplier circuit 410 to produce the despread data sequence of the third row. Clock signal CLK operates synchronously with the clock signal of the transmitter of FIG. 3B and is arranged to transmit one bit or two chips of the data sequence through output buffer 412 for each half cycle of clock signal CLK. A low half cycle of clock signal CLK indicates an even data bit. Correspondingly, a high half cycle of clock signal CLK indicates an odd data bit. In this manner, the receiver determines whether the data sequence is even or odd at step 608. During a low half cycle of CLK, output buffer 412 produces output data 616 via switching circuit 416. During a high half cycle of CLK, inverter 414 inverts the data bit 620 and produces inverted output data 616. Thus, despread data having an even sequence number is unchanged in row four. However, despread data having an odd sequence number is inverted in the fourth row. The fifth row shows an average value of the data sequence in the fourth row. As previously explained with regard to Table IV, a negative value in the fifth row is interpreted as a logical 0 and a positive value is interpreted as a logical 1.

|               |      |      |      |      |
|---------------|------|------|------|------|
| MOD SEQ (0-3) | -1+1 | -1+1 | +1-1 | +1-1 |
| DESPREAD CODE | +1-1 | +1-1 | +1-1 | +1-1 |
| DESPREAD DATA | -1-1 | -1-1 | +1+1 | +1+1 |
| ODD INV DATA  | -1-1 | +1+1 | +1+1 | -1-1 |

|             |    |    |    |    |
|-------------|----|----|----|----|
| SUMMED DATA | -2 | +2 | +2 | -2 |
|-------------|----|----|----|----|

Table V

**[0037]** FIG. 4C is a block diagram of a third embodiment of a wireless receiver of the invention which may be used with the transmitter of FIG. 3D. The receiver is similar to the previously discussed receiver of FIG. 4A except that multiplier circuit 418 is added between demodulator circuit 408 and multiplier circuit 410. Multiplier circuit 418 is coupled to receive a scrambling or whitening code (CODE) used by a remote transmitter such as in FIG. 3D. In an alternative embodiment, the despreading code and the descrambling code may be combined by XOR and used with a single multiplier circuit. For example, there may be many remote utility transmitters in the network that report to the receiver or network hub of FIG. 4C.

**[0038]** FIG. 8 illustrates a simulation comparing a conventional (16,4) data signal with a (16,4) data signal with inverted spreading according to the invention of FIG. 3C and Table III above. One of ordinary skill in the art having access to the instant specification will appreciate that (16,4) encoding with inverted spreading as well as many other encoding and spreading sequences may be applied to any of the previously discussed transmitters of FIGS. 3A through 3D and receivers of FIGS. 4A through 4C. In the simulation of FIG. 8, a data sequence of 250 bytes is convolutionally encoded with a rate 1/2, k=7 code. After convolutional encoding the data bits are whitened with a 511 length PN sequence. The packet error rate performance for 4-chip spreading with the (16,4) inverted spreading code is significantly better than with conventional (16,4) encoding. The inverted spreading has about 0.7 dB better performance at 10% packet error rate. This is also significantly better than the simulation of FIG. 7, since 4-chip encoding produces four independent samples of each data bit.

**[0039]** Advantages of the invention include improved packet error rate performance, reduced complexity of transmitter and receiver design, and backwards compatibility with legacy systems extend to many other encoding schemes, modulation schemes, and communication systems.

## CLAIMS

What is claimed is:

1. A method of operating a transmitter, comprising the steps of:  
receiving a sequence of data bits, each data bit having a respective sequence number;  
spreading a first data bit of the sequence with a first spreading code determined by the sequence number of the first data bit;  
spreading a second data bit of the sequence with an inverse of the first spreading code determined by the sequence number of the second data bit; and  
modulating the first and second data bits.
2. A method as in claim 1, comprising:  
spreading each data bit having an even sequence number with the first spreading code;  
and  
spreading each data bit having an odd sequence number with the inverse of the first spreading code.
3. A method as in claim 1, comprising scrambling the first and second data bits with a scrambling code.
4. A method as in claim 1, wherein the step of modulating comprises offset quadrature phase shift keyed (O-QPSK) modulation.
5. A method as in claim 1, wherein the first spreading code comprises at least four chips.
6. A method of operating a transmitter, comprising the steps of:  
receiving a sequence of data bits, each data bit having a respective sequence number;  
spreading a first data bit of the sequence with a first spreading code;  
inverting a second data bit of the sequence in response to the sequence number of the second data bit;  
spreading the second data bit of the sequence with the first spreading code; and

modulating the first and second data bits.

7. A method as in claim 6, comprising:  
spreading each data bit of the sequence having an even sequence number with the first spreading code;  
inverting each data bit of the sequence having an odd sequence number; and  
spreading each inverted data bit with the first spreading code.
8. A method as in claim 6, comprising scrambling the first and second data bits with a scrambling code.
9. A method as in claim 6, wherein the step of modulating comprises offset quadrature phase shift keyed (O-QPSK) modulation.
10. A method as in claim 6, wherein the first spreading code comprises at least four chips.
11. A method of operating a receiver, comprising the steps of:  
receiving a sequence of data bits, each data bit having a respective sequence number;  
despreading a first data bit of the sequence with a first spreading code determined by the sequence number of the first data bit; and  
despreading a second data bit of the sequence with an inverse of the first spreading code determined by the sequence number of the second data bit.
12. A method as in claim 11, comprising:  
despreading each data bit having an even sequence number with the first spreading code;  
and  
despreading each data bit having an odd sequence number with the inverse of the first spreading code.
13. A method as in claim 11, comprising descrambling the first and second data bits with a descrambling code.

14. A method as in claim 11, comprising offset quadrature phase shift keyed (O-QPSK) demodulating the sequence of data bits after the step of receiving.
15. A method as in claim 11, wherein the first spreading code comprises at least four chips.
16. A method of operating a receiver, comprising the steps of:  
receiving a sequence of data bits, each data bit having a respective sequence number;  
despreading a first data bit of the sequence with a first spreading code;  
despreading the second data bit of the sequence with the first spreading code; and  
inverting a second data bit of the sequence in response to the sequence number of the second data bit.
17. A method as in claim 16, comprising:  
despreading each data bit of the sequence having an even sequence number with the first spreading code;  
despreading each inverted data bit with the first spreading code; and  
inverting each data bit of the sequence having an odd sequence number.
18. A method as in claim 16, comprising descrambling the first and second data bits with a descrambling cod.
19. A method as in claim 16, comprising offset quadrature phase shift keyed (O-QPSK) demodulating the sequence of data bits after the step of receiving.
20. A method as in claim 16, wherein the first spreading code comprises at least four chips.

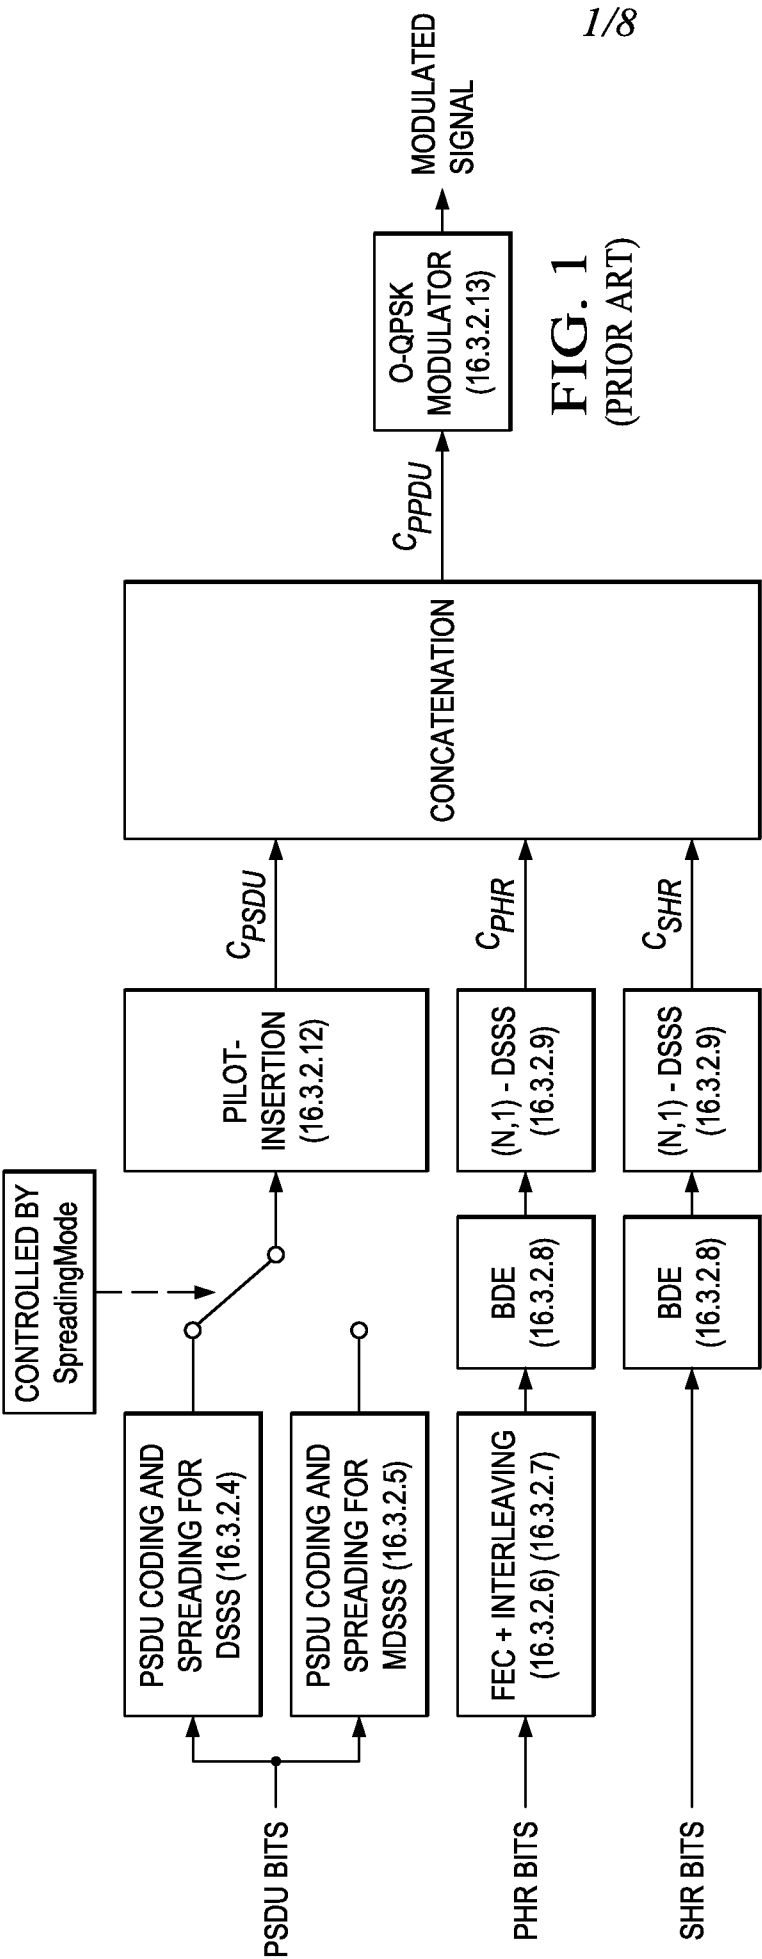


FIG. 1  
(PRIOR ART)

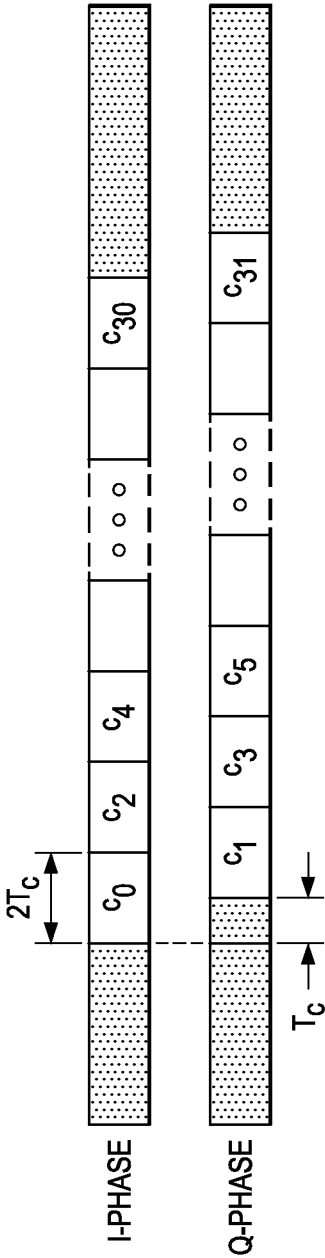


FIG. 2  
(PRIOR ART)

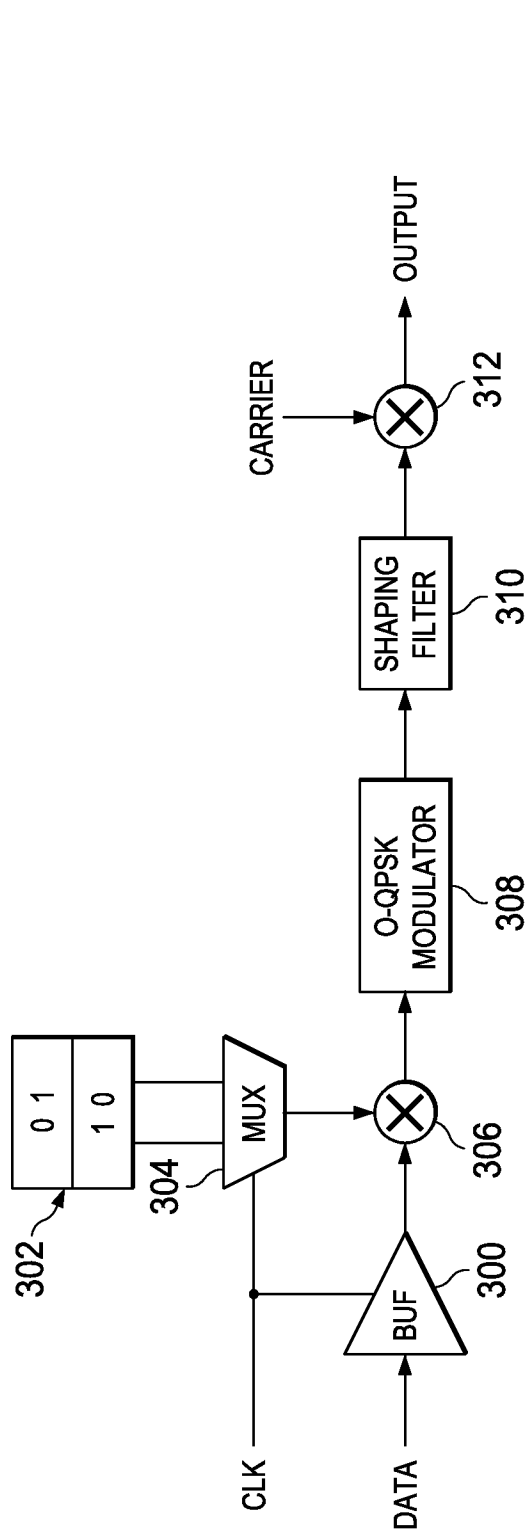


FIG. 3A

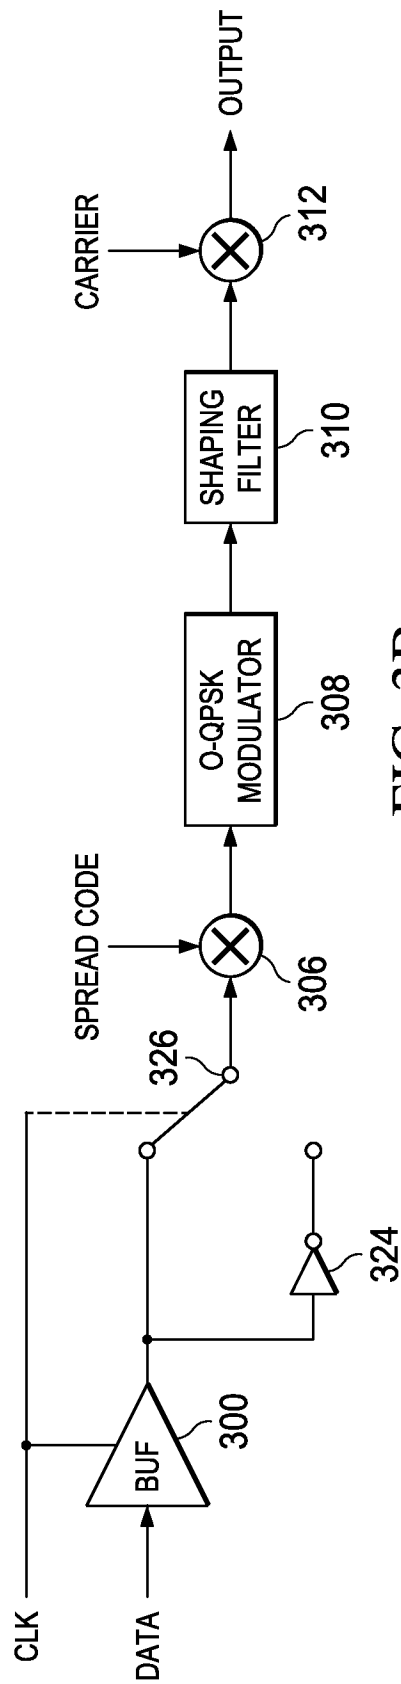


FIG. 3B

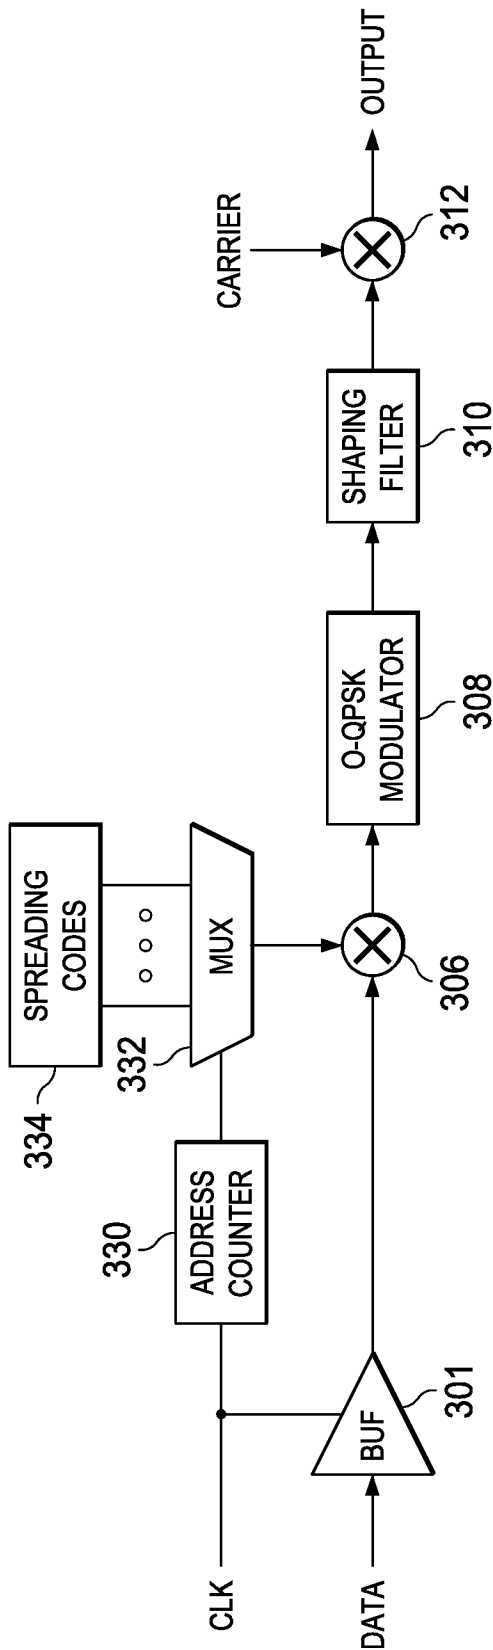


FIG. 3C

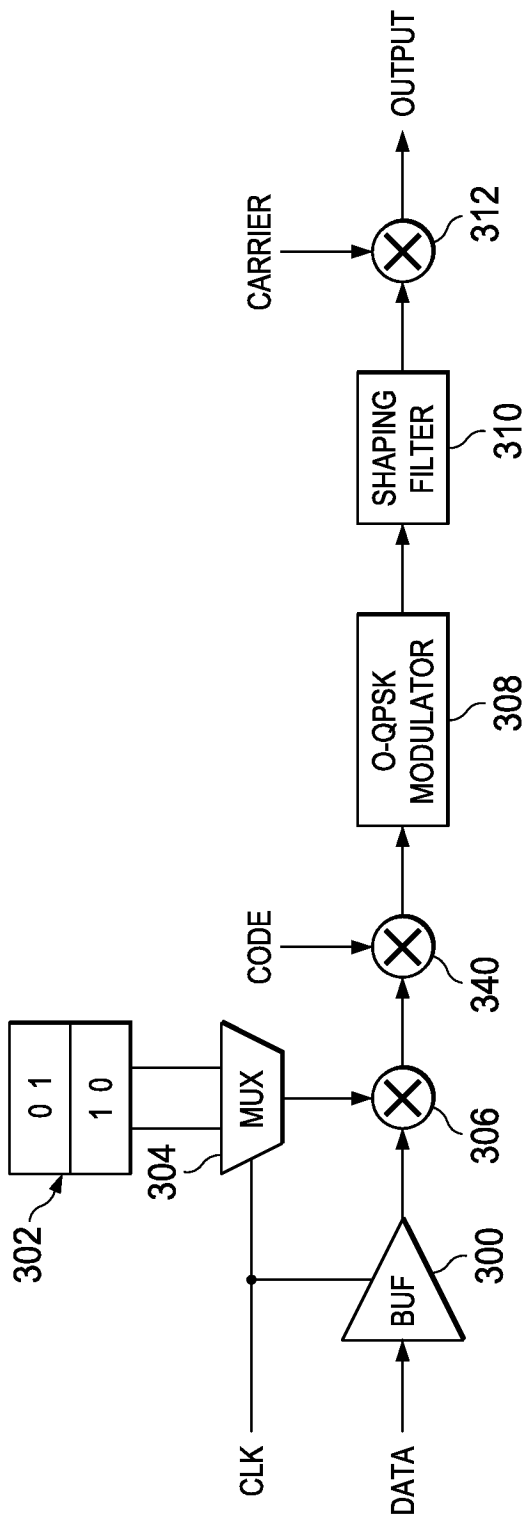


FIG. 3D

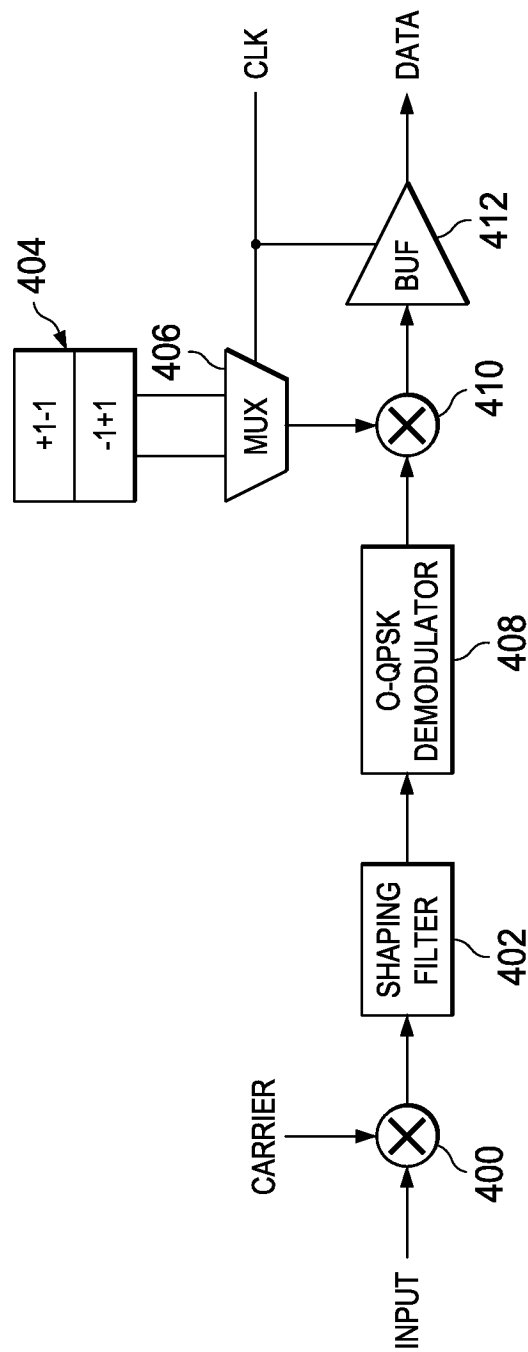


FIG. 4A

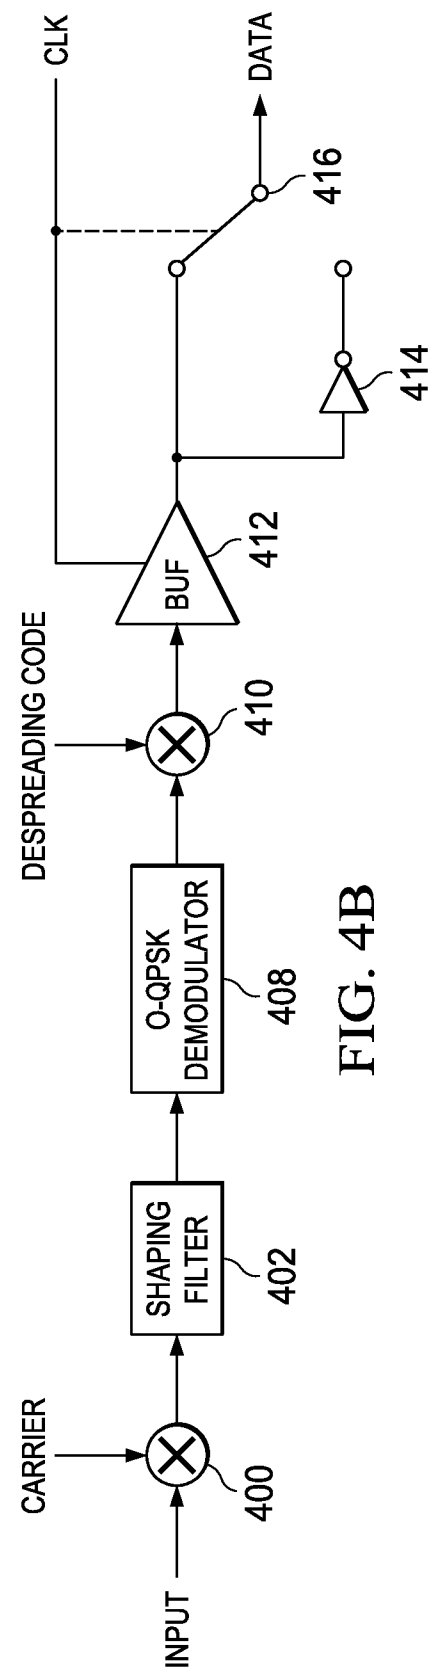


FIG. 4B

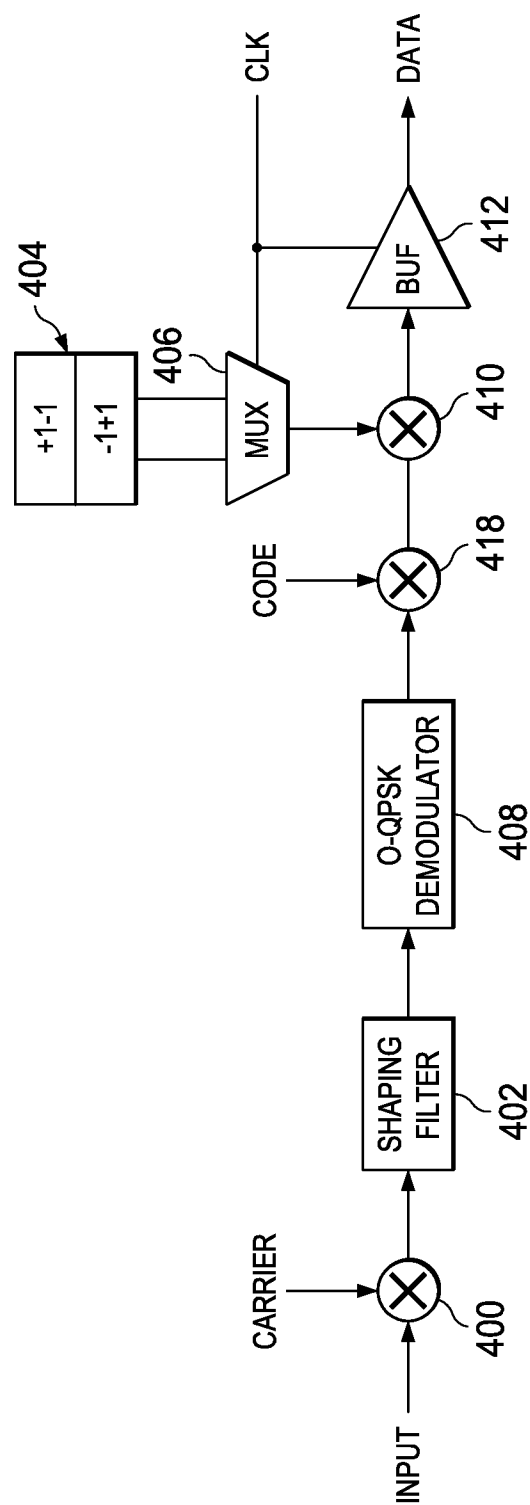


FIG. 4C

6/8

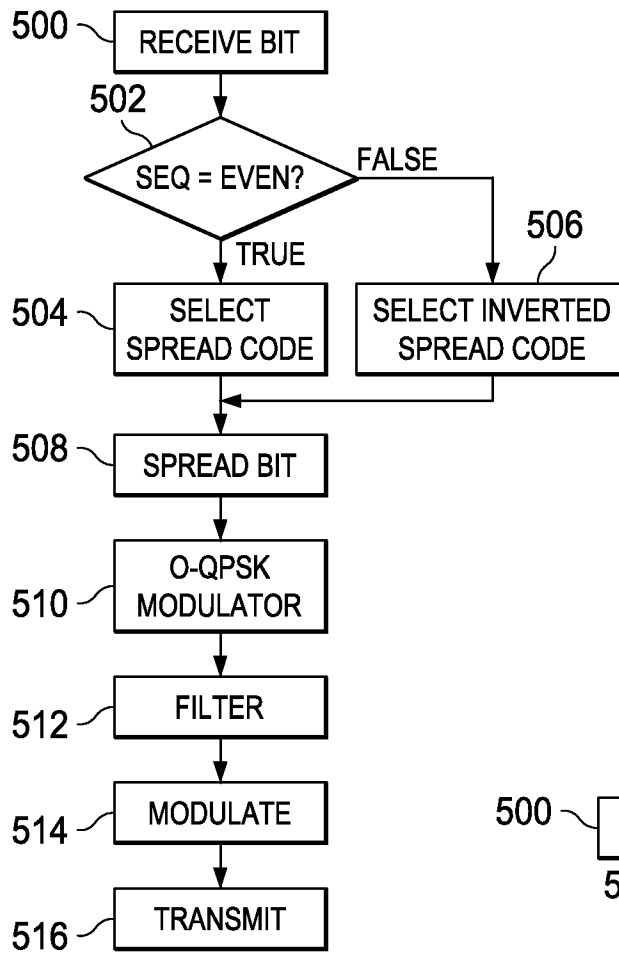


FIG. 5A

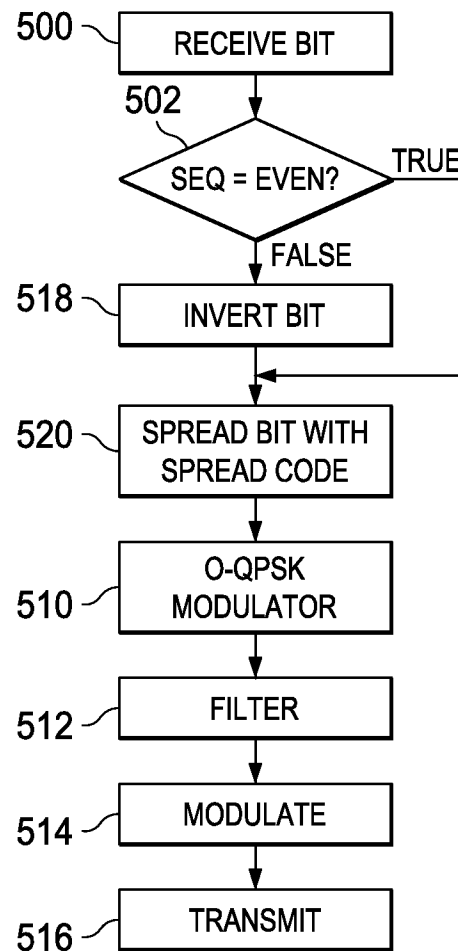


FIG. 5B

7/8

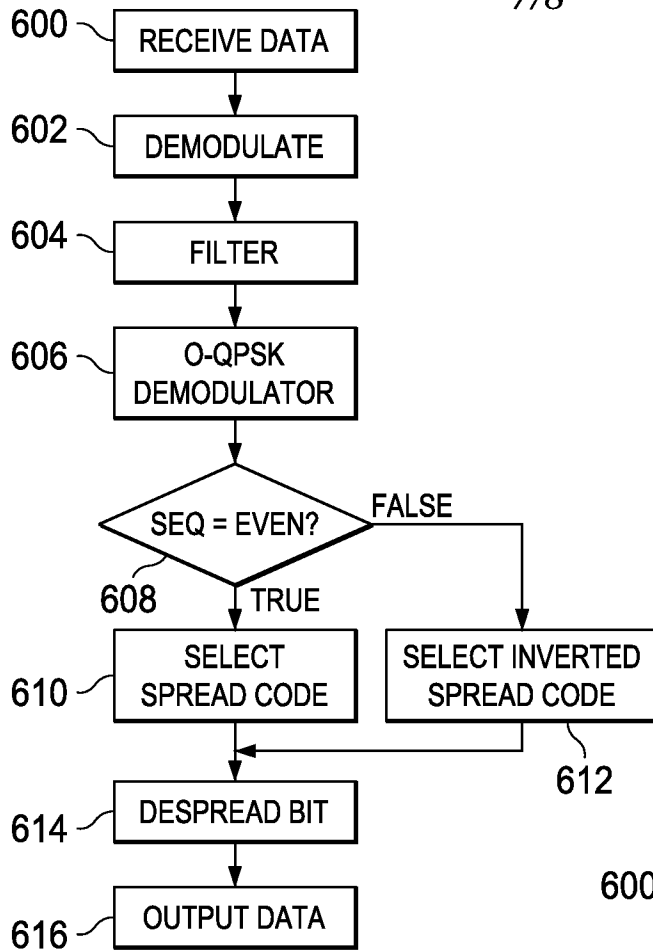


FIG. 6A

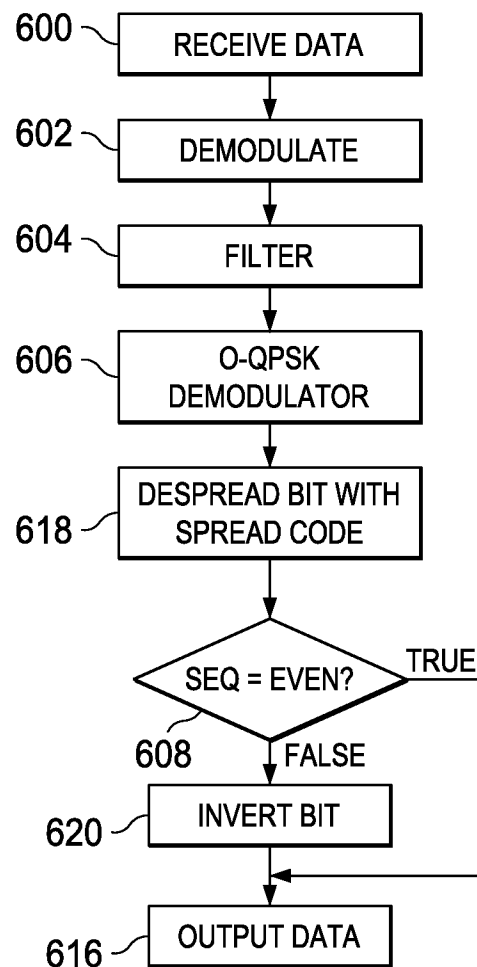


FIG. 6B

8/8

FIG. 7


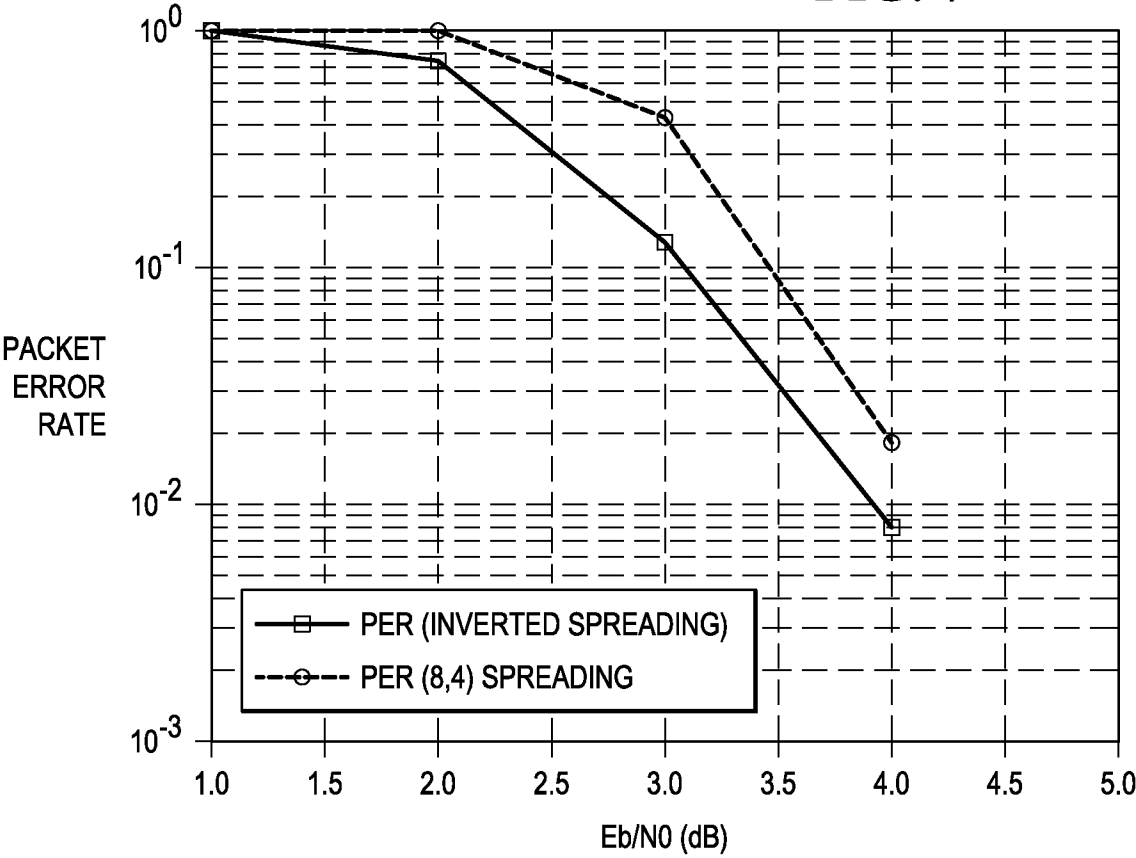


FIG. 8

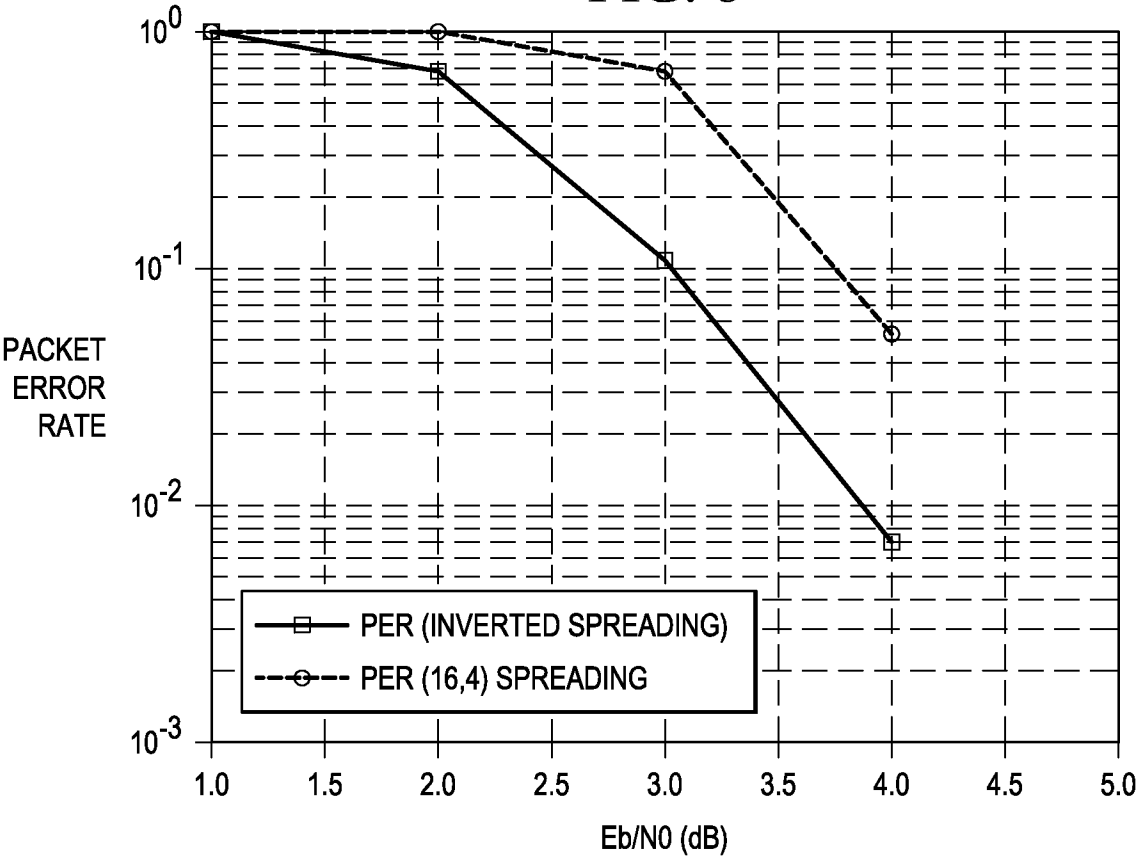

**A. CLASSIFICATION OF SUBJECT MATTER****H04B 1/707(2011.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

H04B 1/707; H04K 1/00; H04B 1/69; H04M 1/00; H04L 27/06; H04B 1/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; Keywords: inverse, spreading code, data bit, sequence number

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                         | Relevant to claim No. |
|-----------|------------------------------------------------------------------------------------------------------------|-----------------------|
| A         | US 2004-0137946 A1 (HISASHI KAWABATA) 15 July 2004<br>See paragraphs 23-34; and figs. 3,5,6.               | 1-20                  |
| A         | US 2005-0175072 A1 (ROBERT MACK et al.) 11 August 2005<br>See paragraphs 25-45; and figs. 5-7.             | 1-20                  |
| A         | US 2003-0091130 A1 (KAZUHIKO TERASHIMA et al.) 15 May 2003<br>See paragraphs 30-46; and fig. 1.            | 1-20                  |
| A         | US 2001-0048712 A1 (TAKAYUKI TOMITA et al.) 06 December 2001<br>See paragraphs 20-43; and fig. 1.          | 1-20                  |
| A         | US 2009-0207889 A1 (KAORU KOBAYASHI et al.) 20 August 2009<br>See paragraphs 83-90,103-109; and figs. 7,8. | 1-20                  |



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

07 November 2013 (07.11.2013)

Date of mailing of the international search report

**07 November 2013 (07.11.2013)**

Name and mailing address of the ISA/KR

Korean Intellectual Property Office  
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City,  
302-701, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KIM, Jin Ho

Telephone No. +82-42-481-8699



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2013/050452**

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s)                                                                                                                                              | Publication<br>date                                                                                                        |
|-------------------------------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| US 2004-0137946 A1                        | 15/07/2004          | DE 10327552 A1<br>JP 04026423 B2<br>JP 2004-023668 A<br>US 6975885 B2                                                                                                   | 01/04/2004<br>26/12/2007<br>22/01/2004<br>13/12/2005                                                                       |
| US 2005-0175072 A1                        | 11/08/2005          | US 7729408 B2<br>US 8488651 B1                                                                                                                                          | 01/06/2010<br>16/07/2013                                                                                                   |
| US 2003-0091130 A1                        | 15/05/2003          | CN 1205774 C0<br>CN 1401168 A0<br>EP 1248402 A1<br>JP 2002-185430 A<br>US 7352828 B2<br>WO 02-49251 A1                                                                  | 08/06/2005<br>05/03/2003<br>09/10/2002<br>28/06/2002<br>01/04/2008<br>20/06/2002                                           |
| US 2001-0048712 A1                        | 06/12/2001          | EP 1160994 A2<br>EP 1160994 A3<br>JP 03398708 B2<br>JP 2001-345737 A                                                                                                    | 05/12/2001<br>02/01/2004<br>21/04/2003<br>14/12/2001                                                                       |
| US 2009-0207889 A1                        | 20/08/2009          | CN 101164247 A0<br>CN 101164247 B<br>EP 1858170 A1<br>EP 1858170 A4<br>JP 04031003 B2<br>JP 2006-246059 A<br>KR 10-2007-0106798 A<br>US 8090004 B2<br>WO 2006-093332 A1 | 16/04/2008<br>20/07/2011<br>21/11/2007<br>24/04/2013<br>09/01/2008<br>14/09/2006<br>05/11/2007<br>03/01/2012<br>08/09/2006 |