



- (51) **International Patent Classification:**
H04N 21/23 (2011.01) *H04N 5/3745* (2011.01)
- (21) **International Application Number:**
PCT/US2014/047441
- (22) **International Filing Date:**
21 July 2014 (21.07.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P. [US/US]; 11445 Compaq Center Drive W., Houston, Texas 77070 (US).
- (72) **Inventor:** MILLER, Joseph; 13600 EDS Drive, Herndon, Virginia 20171 (US).
- (74) **Agents:** HA, Miranda, J. et al.; Hewlett-Packard Company, Intellectual Property Administration, 3404 E. Harmony Road, Mail Stop 35, Fort Collins, Colorado 80528 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the identity of the inventor (Rule 4.17(i))

[Continued on next page]

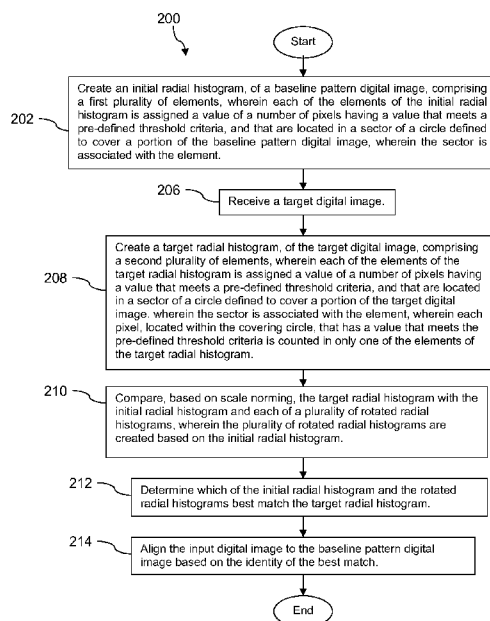
(54) **Title:** RADIAL HISTOGRAM MATCHING

Figure 5

(57) **Abstract:** An example radial histogram matching system may generate a target radial histogram by identifying pixels in an input digital image that are determined to be on, traversing each of the pixels in the input digital image one time to determine how many of the pixels that are turned on are contained in each sector of a circle and assigning to each element of the target radial histogram the number of on pixels in that element. The system may also compare the target radial histogram to each of an initial and a sequence of rotated radial histograms to determine a match score for each of the comparisons, and identify an offset rotation between a baseline pattern digital image and the input digital image based on the match scores.



— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*

RADIAL HISTOGRAM MATCHING

BACKGROUND

[0001] Digital images may be created by, for example, digital cameras and then processed by computers in a variety of ways. Two different digital images may be compared with each other using automated machine processes to determine similarities and differences between the images. For example, two different digital images may be compared to determine if they are substantially identical or contain an identical object. Digital images may be stored in a variety of formats and may be transcoded from one format into another format, for example in a format that supports more efficient storage and electronic communication transport of the digital image. Digital images may represent an image as an array or matrix of pixels or picture elements. Each pixel may have a value or a plurality of values that represent the subject picture element of the subject image (e.g., a small picture element of an image of a cat) as an integer value. For example, a grey scale digital image may represent each pixel element as an integer in the range of 0 to 255, where 0 is black, 255 is white, and intermediate numbers are intermediate between black and white. Alternatively, a color image may represent each pixel element by three integer values, each integer value representing the intensity of the color tone in one of a set of primary colors, such as red, green, and blue. Other value ranges are used in different circumstances.

BRIEF DESCRIPTION OF THE DRAWINGS

[0002] For a detailed description of various examples, reference will now be made to the accompanying drawings in which:

[0003] Figure 1 shows a digital image processing system in accordance with various examples;

[0004] Figure 2A shows another digital image processing system in accordance with various examples;

[0005] Figure 2B shows yet another digital image processing system in accordance with various examples;

[0006] Figure 3 shows a circular area used in a digital image processing scan in accordance with various examples;

[0007] Figure 4A, Figure 4B, Figure 4C, and Figure 4D show different aspects of a digital image processing operation in accordance with various examples;

[0008] Figure 5 shows a flow of a method in accordance with various examples;

[0009] Figure 6 shows a radial histogram matching system in accordance with various examples; and

[0010] Figure 7 shows a non-transitory storage device in accordance with various examples.

DETAILED DESCRIPTION

[0011] Certain terms are used throughout the following description and claims to refer to particular system components. As one skilled in the art will appreciate, different companies may refer to a component by different names. This document does not intend to distinguish between components that differ in name but not function. In the following discussion and in the claims, the terms “including” and “comprising” are used in an open-ended fashion, and thus should be interpreted to mean “including, but not limited to...” Also, the term “couple” or “couples” is intended to mean either an indirect or direct wired or wireless connection. Thus, if a first device couples to a second device, that connection may be through a direct connection or through an indirect connection via other devices and connections.

[0012] When processing and/or comparing digital images it may be desirable to align a digital image before processing. Automatically aligning an input digital image with a baseline digital image before comparing the two images can improve the accuracy of the comparison. Alignment can be performed by rotating one digital image with respect to the other digital image, translating one digital image in 2-dimensions (e.g., in an x-axis direction and in a y-axis direction) with respect to the other digital image, or both rotating and translating one digital image with reference to the other digital image. Another digital image processing operation that may be performed before comparing two images is to adapt the scale of the two images so that the two images are compared according to a common scale. A variety of practical applications may involve this kind of pre-comparison alignment processing and scale processing. Several examples of applications are discussed below.

[0013] This disclosure teaches a novel creation of a radial histogram based on a digital image. Each pixel of a digital image is identified that has a pixel value that satisfies a pre-defined value threshold (e.g., has a value equal to or greater than 90 in a pixel value range from 0 to 255). Such pixels satisfying this condition are deemed “on” and may be referred to as on pixels or as on-pixels. A circular area of the digital image is selected and analyzed to produce a radial histogram, for example using machine instructions executed by a processing resource to automatically select and analyze on-pixels within the circular area of the digital image. The radial histogram comprises elements or values that correspond to sectors of the circular area. In an example, the radial histograms have 360 sectors, each sector subtending 1 degree. Every on-pixel that is located in a sector is counted and the count is assigned as the value of the corresponding element of the radial histogram. Each pixel is counted only once in at least some implementations, which enhances the accuracy of the histogram and improves the process of scaling of digital images. In an example, during the process of generating the radial histogram of a digital image, the maximum count of on-pixels in any element, the minimum count of on-pixels in any element, and the difference between the maximum count of on-pixels and the minimum count of on-pixels are determined. The difference between the maximum count of on-pixels and the minimum count of on-pixels may be referred to as the range of the histogram. The range may be used to scale between two different radial histograms being compared.

[0014] A radial histogram like that described above may be rotated by shifting the starting point or the index into the histogram. For example, a radial histogram comprising 360 elements can be rotated by one degree shifting the original first element to be the new second element, shifting the second original element to be the new third element, and so on, and shifting the original 360th element to be the new first element. Any rotation may be performed by shifting the index accordingly. It is to be noted that this rotation need not involve moving the stored values of the elements but only shifting the index into a data structure (for example a circular data structure) containing the elements.

[0015] In an example, the baseline digital image is processed to generate an initial radial histogram. The initial radial histogram is then used to create histograms for each of the possible rotations of the radial histogram. For example, if the radial histogram has 360 elements, the initial radial histogram is generated and 359 different rotated radial histograms are generated from the initial radial histogram, each rotated radial histogram representing a one degree shift. The initial radial histogram and 359 rotated histograms may be stored once and used many times. In an example, the initial radial histogram is generated from a digital image of a tire tread pattern. The same tire tread pattern may be present on a large number of in-use tires on vehicles.

[0016] In an example, an input digital image is processed to generate a target radial histogram. The input digital image and the baseline digital image (to which the input digital image may be compared) may be images of substantially the same object or pattern in the world, but the images may be rotated, translated or out of scale with respect to each other. For example, a picture (e.g., the input digital image) taken of a tire tread pattern on a tire of a car may be rotated relative to the baseline digital image of the same tire tread pattern. Additionally, the picture may be translated relative to the baseline digital image of the same tire tread pattern. Finally, if the picture taken of the tire tread pattern on the tire of the car is taken either closer or farther away relative to the baseline digital image of the tire's tread, the scales of the two images may be different. These factors tend to impair successful pattern matching between digital images of the same object (e.g., a tire tread pattern).

[0017] In accordance with the disclosed implementations, the target radial histogram may be compared with each of the initial radial histogram and the rotated radial histograms. The best match identifies the rotational offset between the input digital image and the baseline digital image. Additionally, the same process can be used, by panning the circular analysis area across the target digital image and comparing the resultant target radial histogram to the initial radial histogram and the rotated radial histograms to find the best match between the input digital image and the baseline digital image. The comparisons may be performed taking scale offsets into account based on the range. When the

rotational offset, translational offset, and scale offset between the input digital image and the baseline digital image are known, the input digital image and the baseline digital image can be aligned properly for further digital image processing. For example, the process may compare features on the input digital image of a tire tread pattern to corresponding tire tread features on the baseline digital image of the tire tread pattern to determine an amount of tire tread wear and/or remaining tread life of a tire that is the subject of the input digital image.

[0018] Figure 1 shows a system 100 for digital image processing based on radial histograms, for example aligning an input digital image with a baseline digital image based on radial histograms of the digital images. This may have applications generally in automated shape recognition in digital images or in automated pattern recognition in digital images. In an example, the system 100 comprises a processor 102 coupled to memory 104. In an example, the system 100 may be a computer system such as a server computer. The memory 104 may store an application 106 which comprises machine instructions. The application 106 may also be referred to as a processing engine or as a plurality of processing engines. The application 106 may provide a variety of digital image processing operations, as discussed herein. All references herein to the functionality of the application 106 mean the processor 102 executing the application 106.

[0019] In an example, the application 106 may receive or access a baseline digital image, process it to generate an initial radial histogram 108, generate a plurality of rotated radial histograms 110 that are automatically rotated versions of the initial radial histogram, as will be described in more detail hereinafter. The application 106 may receive an input digital image, process it to generate a target radial histogram 112, and compare the target radial histogram 112 to each of the initial radial histogram 108 and the rotated radial histograms 110 to identify one radial histogram that compares most closely with the target radial histogram 112. The radial histogram that best matches to the target radial histogram 112 implies a rotational offset between the input digital image and the baseline digital image. For example, if a rotated radial histogram that is rotated 30 degrees with reference to the initial radial histogram 108 matches best to the target radial

histogram 112, that indicates that the input digital image is rotated about 30 degrees relative to the baseline digital image. To perform further digital image processing of the input digital image relative to the baseline digital image, the input digital image may be corrected, for example by digitally rotating the input digital image by a negative 30 degrees. Alternatively, the baseline digital image could be digitally rotated a positive 30 degrees.

[0020] In an example, the initial radial histogram 108 and rotated radial histograms 110 may be generated by the application 106 and stored in memory outside the system 100, for example in a data store external to the system 100. Alternatively, the initial radial histogram 108 and rotated radial histograms 110 may be generated by a different application executed on a different computer system and stored in a data store external to the system 100. The initial radial histogram 108 and rotated radial histograms 110 of the baseline digital image may be generated once and stored for use many times in aligning an input digital image to the baseline digital image.

[0021] Figure 2A shows a second system 120 that exemplifies one practical use of radial histograms in shape recognition or pattern recognition. The second system 120 comprises a digital camera 122 that takes a picture of an external object 124 to form an input digital image 126. While Figure 2A illustrates the external object 124 as a cat, any object may be used.

[0022] The second system 120 further comprises a server computer 130. The digital camera 122 may transmit the input digital image 126 to the server computer 130 for digital image processing. The digital camera 122 may transmit the input digital image 126 via a network 128 to the server 130. The network 128 may comprise a public network, a private network, or a combination of networks. The digital camera 122 may be linked to the network through other nodes (not shown). For example, the digital camera 122 may download the input digital image 126 to a desktop computer (not shown) or a laptop computer (not shown), and the computer may transmit the input digital image 126 via wired and/or wireless links to the network 128 and thence to the server 130. Alternatively, the digital camera 122 may be embedded in a mobile communication device such as

a mobile phone, and the mobile communication device may transmit the digital image 126 to the network 128 via wireless and wired links.

[0023] The server 130 comprises a central processing unit (CPU) 136 and a memory 138 that stores an application 140. The CPU 136 may be substantially similar to the processor 102 in Figure 1; the memory 138 may be substantially similar to the memory 104 in Figure 1; the application 140 may be substantially similar to the application 106 in Figure 1. The second system 120 further comprises a data store 132 that stores radial histograms 134, for example the initial radial histogram 108 and the rotated radial histograms 110. The data store 132 may store a plurality of initial radial histograms and the rotated radial histograms associated with each of the initial radial histograms. The data store may also store a plurality of baseline digital images 135 from which each of the initial radial histograms 134 may be generated.

[0024] In an example, the application 140 may perform some of the digital image processing in a graphics processor unit (GPU) 142. The application 140 may perform the compares between a target radial histogram and each of the initial radial histogram and the rotated radial histograms in parallel in the GPU 142.

[0025] The application 140 may use the matching of the target radial histogram to the initial radial histogram and the rotated radial histograms to align the input digital image to the baseline digital image and then to perform further digital processing between the aligned input digital image and the baseline digital image. For example, a lost cat that corresponds to the external object 124 may be matched to an image of a cat reported as lost in a lost pet data store. Alternatively, a pattern located on an object to be automatically processed or handled in a manufacturing system or inventory control system may be photographed to produce the input digital image 126 and compared using radial histograms to align to a baseline digital image of a like pattern. The alignment of the input digital image 126 to the baseline digital image in this example may promote automatically processing or handling of the object. The teachings of the present disclosure have a wide range of applications.

[0026] Figure 2B shows the second system 120 in a different practical use of radial histograms in shape recognition or pattern recognition. A tire 146 is photographed by the digital camera 122 to create an input digital image 148. The application 140 may generate a target radial histogram by performing digital image processing of the input digital image 148. The application 140 may then compare the target radial histogram of the input digital image 148 to an initial radial histogram and associated rotated radial histograms, where the initial radial histogram has been generated by digital image processing of a baseline digital image of a tire tread pattern. For example, the baseline digital image may be a picture of a brand new tire of a specific make and model. The input digital image 148 may be a picture of a used tire of the same specific make and model, for example a tire mounted on a wheel of a car driven by a user of a mobile phone in which the digital camera 122 is embedded.

[0027] The application 140 determines the best match between the target radial histogram and the initial and rotated radial histograms, and uses this best match to determine a possible rotational alignment of the input digital image 148 and the baseline digital image. In practice some additional alignments and compensations may be desirably performed before further processing the input digital image 148. For example, the compare process described above may be repeated while scanning across the input digital image 148 in a horizontal axis and in a vertical axis (x-axis and y-axis) to find a best match. This position of best match may be used to translate the input digital image 148 relative to the input digital image. Additionally, the scale of the input digital image 148 may be adapted to compare more accurately with the baseline digital images. These operations are described in further detail hereinafter.

[0028] When rotationally aligned, translationally aligned, and scaled, the input digital image 148 and the baseline digital image may be analyzed to determine a ratio between a tread height of the tire 146 and the tread height of another tire of the same make and model. For example, a ratio of 1:10 may indicate that the tire 146 has reached an end of the life of the tire and a ratio of 2:10 may indicate that 12% of the tire life remains. This information may be used to recommend to a

driver of the vehicle on which the tire 146 is mounted to bring the vehicle in to replace the tire 146 with a new tire.

[0029] Figure 3 shows some digital image processing of the input digital image 148. A circular area 160 is logically positioned over the extent of the larger input digital image 148, and the digital image in the area covered by the circular area 160 is processed according to a digital image processing operation to create a radial histogram. For example, all the pixels of the input digital image 148 that are determined to be located within the circular area 160 are processed or analyzed according to a digital image processing operation to create a radial histogram. The circular area 160 may be defined by a pixel that serves as an origin or center of the circular area 160 and by a maximum radius (PRmax). In an example, the maximum radius may be designated in numbers of pixels.

[0030] In another example, the input digital image 148 may be processed by a different abstract shape defined to cover a portion of the digital image. For example, an annular structuring element (SE) may be defined by a center, a maximum radius (PRmax), and a minimum radius (PRmin).

[0031] The center of the circular area 160 may be logically positioned over every pixel of the input digital image 148 sequentially and a target radial histogram generated for each positioning. In an example, some optimizations may be employed. For example, the generation of radial histograms may be done locating the center circular area 160 so the whole circular area is within the input digital image 148, for example at least a radius of the circle inside a perimeter of the input digital image 148. In another example, the center of the circular area 160 may be offset each sequential time by two pixels, by three pixels, by four pixels, or some other number of pixels, whereby the number of radial histograms generated may be reduced. This process can be referred to as scanning, for example scanning in an x-axis 162 and scanning in a y-axis 164.

[0032] Figure 4A shows the circular area 160 logically covering a portion of the input digital image 148. A portion of a tread pattern 166 covered by the circular area 160 is shown. The circular area 160 is logically partitioned into a plurality of sectors 1-12. The number of pixels in the digital image 148 that are deemed on-pixels in each of the sectors are counted, and elements of the histogram are

given a value corresponding to the number of on-pixels counted in the element. The sectors may be defined by a minimum angle (D_{min}) and a maximum angle (D_{max}) associated with the sector.

[0033] Figure 4B shows a radial histogram 170. Each element is assigned a value represented by the height of a cross-hatched bar. The value of each element corresponds to the number of on-pixels counted in each sector 1-12. In an example, the input digital image 148 may be analyzed to create a matrix that represents all the on-pixels and all the off-pixels, for example a matrix having as many elements as the input digital image 148 has pixels, and the matrix of on-pixels may be analyzed to determine the radial histogram. Each pixel of the input digital image 148 may be analyzed to determine if a value of the pixel meets or exceeds a pre-defined criterion, for example if a grey scale value of the pixel that may range from 0 to 255 is at least 90 or more. Alternatively, the pre-defined threshold may be a red color value of the pixel that may range from 0 to 255 is at least 90 or more. In other examples, other pixel value categories may be used and different pre-defined criteria may be used.

[0034] The generation of the radial histograms disclosed herein count any pixel in only one of the sectors 1-12. Counting pixels only once may increase the accuracy of the radial histograms and contribute to more accurate matching between the target radial histogram and the initial and rotated radial histograms. In an example, the processing of the radial histogram is conducted by traversing all of the pixels one-by-one. Because a pixel is not processed again after initial traversing, the double counting or over counting of pixels in generating the radial histogram is avoided.

[0035] Figure 4C and Figure 4D illustrate the processing a radial histogram to generate a rotated radial histogram. The process may be performed by shifting each element from a source histogram circularly by one sector. Thus, the unshifted value of the first element becomes the shifted value of the second element, the unshifted value of the second element becomes the shifted value of the third element, and the unshifted value of the twelfth element becomes the shifted value of the first element. A radial histogram 172 conceptually illustrates the radial histogram 170 rotated by one sector. A variety of approaches to

performing this digitally may be employed. Separate blocks of memory may contain rotated radial histograms, by copying to shifted locations. Alternatively, rotated radial histograms may be stored as an index into a circular data structure.

[0036] While Figure 4A shows a circular area 160 that is partitioned into 12 sectors, in other examples the circular area 160 may be partitioned into different numbers of sectors. In an example, the circular area 160 is partitioned into 360 sectors, each sector subtending about 1 degree. The radial histograms 170 and 172 are conceptually illustrated by bar graphs, but it is understood that the radial histograms may be stored in any suitable data structure, for example in a circular data structure, in an array, or in another data structure.

[0037] Figure 5 shows a method 200. The method may be performed by the hardware described herein (e.g., the hardware of Figures 6 and 7). At block 202, create an initial radial histogram, of a baseline pattern digital image, comprising a first plurality of elements, wherein each of the elements of the initial radial histogram is assigned a value of a number of pixels having a value that meets a pre-defined threshold criteria, and that are located in a sector of a circle defined to cover a portion of the baseline pattern digital image, wherein the sector is associated with the element. In an example, each pixel located within the covering circle that has a value that meets the pre-defined threshold criteria is counted in only one of the elements of the initial radial histogram. In an example, a plurality of rotated radial histograms may be created based on the initial radial histogram, where the rotated radial histograms are comprised of element values assigned shifted values of the element values of the initial radial histogram. At block 206, receive a target digital image.

[0038] At block 208, create a target radial histogram, of the target digital image, comprising a second plurality of elements, wherein each of the elements of the target radial histogram is assigned a value of a number of pixels having a value that meets a pre-defined threshold criteria, and that are located in a sector of a circle defined to cover a portion of the target digital image, wherein the sector is associated with the element, wherein each pixel located within the covering circle that has a value that meets the pre-defined threshold criteria is counted in only one of the elements of the target radial histogram. At block 210, compare, based

on scale norming, the target radial histogram with the initial radial histogram and each a plurality of the rotated radial histograms, wherein the plurality of rotated radial histograms are created based on the initial radial histogram.

[0039] For example, for each of the target radial histogram and the initial radial histogram a maximum value of an element may be determined, a minimum value of an element may be determined, and a range of the radial histogram may be determined as the difference between the maximum value and the minimum value. If the physical scaling of the input digital image is not the same as the physical scaling of the baseline digital image, the range of the radial histograms will be different. The radial histograms may be scaled to each other based on their respective ranges. For example, if the range of the target radial histogram is 2 times the range of the initial radial histogram, the values of the elements of the target radial histogram may be divided by 2 before comparing to the elements of the initial radial histogram and the rotated radial histograms. It is noted that the range of the rotated radial histograms will be the same as the range of the initial radial histogram, as these histograms contain the same values merely shifted to different elements. At block 212, determine which of the initial radial histogram and the rotated radial histograms best match the target radial histogram.

[0040] In an example, the method 200 may further determine that the best match satisfies a pre-defined alignment threshold. The processing may comprise determining how many angle sectors of the target radial histogram match exactly to the associated angle sectors of the compared radial histogram and determining that at least 90% of the angle sectors match exactly, 95% of the angle sectors match exactly, 99% of the angle sectors match exactly, or some other criterion. Alternatively, rather than counting exact matches, near exact matches may be counted.

[0041] At block 214, align the input digital image to the baseline pattern digital image based on the identity of the best match.

[0042] Figure 6 shows a radial histogram matching system 250 that comprises a target radial histogram generation engine, a comparison engine 254, and an identification engine 256. In an example, the target radial histogram generation engine 252 generates a target radial histogram by identifying pixels in the input

digital image that are determined to be on based on a value of the pixel meeting a pre-defined threshold criteria, traversing each of the pixels in the input digital image one time to determine how many of the pixels that are turned on are contained in each of a plurality of sectors of a circle and assigning to each of a plurality of elements of the target radial histogram the number of on pixels in that element, wherein the plurality of sectors comprise the whole circle, and wherein a pixel that is on is counted in only one sector. In an example, the comparison engine to compare the target radial histogram to each of an initial radial histogram and a sequence of rotated radial histograms to determine a match score for each of the comparisons. In an example, the identification engine to identify an offset rotation between the baseline pattern digital image and the input digital image based on the match scores. Each of the engines 252-256 of Figure 6 is implemented as a processor executing machine instructions.

[0043] Figure 7 shows a non-transitory storage device 260 comprising various software modules 264-276 which include machine instructions executable by a processing resource 280. The processing resource 280 may comprise a single processor, multiple processors, a single computer, or a network of computers. In an example, the processing resource may comprise one or more graphical processing units (GPUs). Each software module 264-276 provides functionality upon execution by the processing resource 280. Any reference herein to functionality performed by a particular module means the processing resource 280 executing the corresponding module. The various modules may be combined into one overall application or the functionality described herein as attributed to the modules may be implemented with fewer or more than the modules shown in the example of Figure 7. The non-transitory storage device 260 may include volatile memory (e.g., random access memory), non-volatile storage (e.g., magnetic storage, optical storage, solid state storage), or combinations thereof.

[0044] Each engine 252-256 of Figure 6 is implemented as the processing resource 280 executing one or more of the software modules 264-276.

[0045] Referring still to Figure 7, the pixel identification module identifies pixels in a baseline pattern digital image that are determined to be on based on a value

of the pixel meeting a pre-defined threshold criterion. The pixel traversal module 268 traverses each of the pixels in the baseline pattern digital image one time to determine how many of the pixels that are turned on are contained in each of 360 sectors of a circle. Each sector may subtend a degree of angle. For an implementation in which sector subtends a single degree, 360 sectors comprise the whole circle. A pixel that is on is counted in only one sector.

[0046] The assignment module 270 assigns to each of 360 elements of an initial radial histogram the number of on pixels in that element. The determination module 272 determines a maximum number of pixels counted in the 360 elements of the initial radial histogram, a minimum number of pixels counted in the 360 elements of the initial radial histogram, and a range of the initial radial histogram. The determined range is the difference between the maximum number of pixels and the minimum number of pixels counted in the 360 elements of the target radial histogram. The histogram generation module 274 generates 359 rotated radial histograms from the initial radial histogram by shifting the values of the initial radial histogram a number of elements based on the sequence position of each rotated radial histogram. The pixel identification module 264 identifies pixels in an input digital image that are determined to be on based on a value of the pixel meeting the pre-defined threshold criterion.

[0047] The pixel traversal module 268 also traverses each of the pixels in the input digital image one time to determine how many of the pixels that are turned on are contained in each of 360 sectors of a circle. Each sector may subtend a degree of angle, and, as explained above, the 360 sectors comprise the whole circle, and wherein a pixel that is on is counted in only one sector and to assign to each of 360 elements of the target radial histogram the number of on pixels in that element. The determination module 272 determines a maximum number of pixels counted in the 360 elements of the target radial histogram, a minimum number of pixels counted in the 360 elements of the target radial histogram, and the range of the target radial histogram (i.e., the difference between the maximum number of pixels and the minimum number of pixels counted in the 360 elements of the target radial histogram).

[0048] The match score module 276 determines 360 match scores, where each match score is determined by comparing the target radial histogram to a different one of the initial radial histogram and the 359 rotated radial histograms, wherein the comparisons take into account a scaling factor based on the ratio of the range of the initial radial histogram and the range of the target radial histogram. The match score module 276 also identifies an offset rotation between the baseline pattern digital image and the input digital image based on the match scores.

[0049] The above discussion is meant to be illustrative of the principles and various embodiments of the present invention. Numerous variations and modifications will become apparent to those skilled in the art once the above disclosure is fully appreciated. It is intended that the following claims be interpreted to embrace all such variations and modifications.

CLAIMS

What is claimed is:

1. A radial histogram matching system, comprising:
 - a target radial histogram generation engine to generate a target radial histogram by identifying pixels in an input digital image that are determined to be on based on a value of the pixel meeting a pre-defined threshold criteria, traversing each of the pixels in the input digital image one time to determine how many of the pixels that are turned on are contained in each of a plurality of sectors of a circle and assigning to each of a plurality of elements of the target radial histogram the number of on pixels in that element, and wherein the plurality of sectors comprise the whole circle,
 - a comparison engine to compare the target radial histogram to each of an initial radial histogram and a sequence of rotated radial histograms to determine a match score for each of the comparisons, and
 - an identification engine to identify an offset rotation between a baseline pattern digital image and the input digital image based on the match scores.
2. The system of claim 1, wherein a pixel that is on is counted in only one sector by the target radial histogram generation engine to generate a target radial histogram.
3. The system of claim 1, wherein the target radial histogram generation engine application further generates a plurality of target radial histograms based on centering the circle used for creating the histograms at different pixels within the input digital image, wherein the comparison engine further compares each of the plurality of target radial histograms to each of the initial radial histogram and the rotated radial histograms to determine the match scores for each of the comparisons, and wherein the identification engine further identifies a translation between the baseline pattern digital image and the input digital image based on the match scores.

4. The system of claim 1, wherein the comparison engine determines the match scores for each of the comparisons further based on scale norming of the histograms.

5. The system of claim 1, wherein the comparison engine uses a graphics processor unit (GPU) to compare the target radial histogram to each of the initial radial histogram and the sequence of rotated histograms.

6. A non-transitory storage device including machine instructions that, when executed by a processing resource, cause the processing resource to:

identify pixels, in a baseline pattern digital image and in an input digital image, that are determined to be on based on a value of a respective pixel meeting a pre-defined threshold criterion;

traverse each of the pixels in the baseline pattern digital image and in the input digital image one time to determine how many of the pixels that are on are contained in each of 360 sectors of a circle, wherein each sector subtends a degree of angle, and wherein the 360 sectors comprise the whole circle;

assign to each of 360 elements of an initial radial histogram, and to each of 360 elements of a target radial histogram, the number of on pixels in that element;

determine a range of the initial radial histogram as a difference between a maximum number of pixels and a minimum number of pixels counted in the 360 elements of the initial radial histogram;

determine a range of the target radial histogram as a difference between a maximum number of pixels and a minimum number of pixels counted in the 360 elements of the target radial histogram;

determine 360 match scores, where each match score is determined by comparing the target radial histogram to a different one of the initial radial histogram and 359 rotated radial histograms, wherein the rotated radial histograms are generated based on the initial radial histogram, and wherein the comparisons take into account a

scaling factor based on a ratio of the range of the initial radial histogram and the range of the target radial histogram; and
identify, based on the match scores, an offset rotation between the baseline pattern digital image and the input digital image.

7. The non-transitory storage device of claim 6, wherein a pixel that is on is counted in only one sector.

8. The non-transitory storage device of claim 6, wherein the machine instructions, when executed by the processing resources, further cause the processing resource to:

- determine a maximum number of pixels counted in the 360 elements of the initial radial histogram;
- determine a minimum number of pixels counted in the 360 elements of the initial radial histogram;
- determine a maximum number of pixels counted in the 360 elements of the target radial histogram; and
- determine a minimum number of pixels counted in the 360 elements of the target radial histogram.

9. The non-transitory storage device of claim 6, wherein the machine instructions, when executed by the processing resources, further cause the processing resource to generate 359 rotated radial histograms from the initial radial histogram by shifting the values of the initial radial histogram a number of elements based on the sequence position of each rotated radial histogram and further cause the processing resource to determine a 2-dimensional translation offset between the baseline pattern digital image and the input digital image based on the match scores.

10. The non-transitory storage device of claim 6, wherein the comparisons between of the target radial histogram to each of the initial radial histogram and the 359 rotated radial histograms are performed concurrently.

11. A method of aligning an input digital image to a baseline pattern digital image, comprising:

creating an initial radial histogram, of a baseline pattern digital image, comprising a first plurality of elements, wherein each of the elements of the initial radial histogram is assigned a value of a number of pixels having a value that meets a pre-defined threshold criteria, and that are located in a sector of a circle defined to cover a portion of the baseline pattern digital image, wherein the sector is associated with the element;

receiving a target digital image;

creating a target radial histogram, of the target digital image, comprising a second plurality of elements, wherein each of the elements of the target radial histogram is assigned a value of a number of pixels having a value that meets a pre-defined threshold criteria, and that are located in a sector of a circle defined to cover a portion of the target digital image, wherein the sector is associated with the element, wherein each pixel, located within the covering circle, that has a value that meets the pre-defined threshold criteria is counted in only one of the elements of the target radial histogram;

comparing, based on scale norming, the target radial histogram with the initial radial histogram and each of a plurality of rotated radial histograms, wherein the plurality of rotated radial histograms are created based on the initial radial histogram;

determining which of the initial radial histogram and the rotated radial histograms best match the target radial histogram; and

aligning the input digital image to the baseline pattern digital image based on the identity of the best match.

12. The method of claim 11, wherein the scale norming is accomplished by determining a minimum count of on pixels in the elements of the initial radial histogram, determining a maximum count of on pixels in the elements of the initial radial histogram, determining a minimum count of on pixels in the elements of the

target radial histogram, and determining a maximum count of on pixels in the elements of the target radial histogram.

13. The method of claim 12, wherein the scale norming is accomplished by determining a range of the initial radial histogram as a difference between the maximum count and the minimum count of on pixels in the elements of the initial radial histogram, determining a range of the target radial histogram as a difference between the maximum count and the minimum count of on pixels in the elements of the target radial histogram, and norming one of the values of the elements of the target radial histogram based on a ratio of the range of the initial radial histogram and the range of the target radial histogram.

14. The method of claim 11, wherein each pixel located within the covering circle that has a value that meets the pre-defined threshold criteria is counted in only one of the elements of the initial radial histogram and further comprising:

creating a plurality of rotated radial histograms that are comprised of element values assigned shifted values of the element values of the initial radial histogram; and

determining that the best match satisfies a pre-defined alignment threshold.

15. The method of claim 11, wherein aligning the input digital image to the baseline pattern digital image is further based on identifying a 2-dimensional offset of the input digital image to the baseline pattern digital image.

1/9

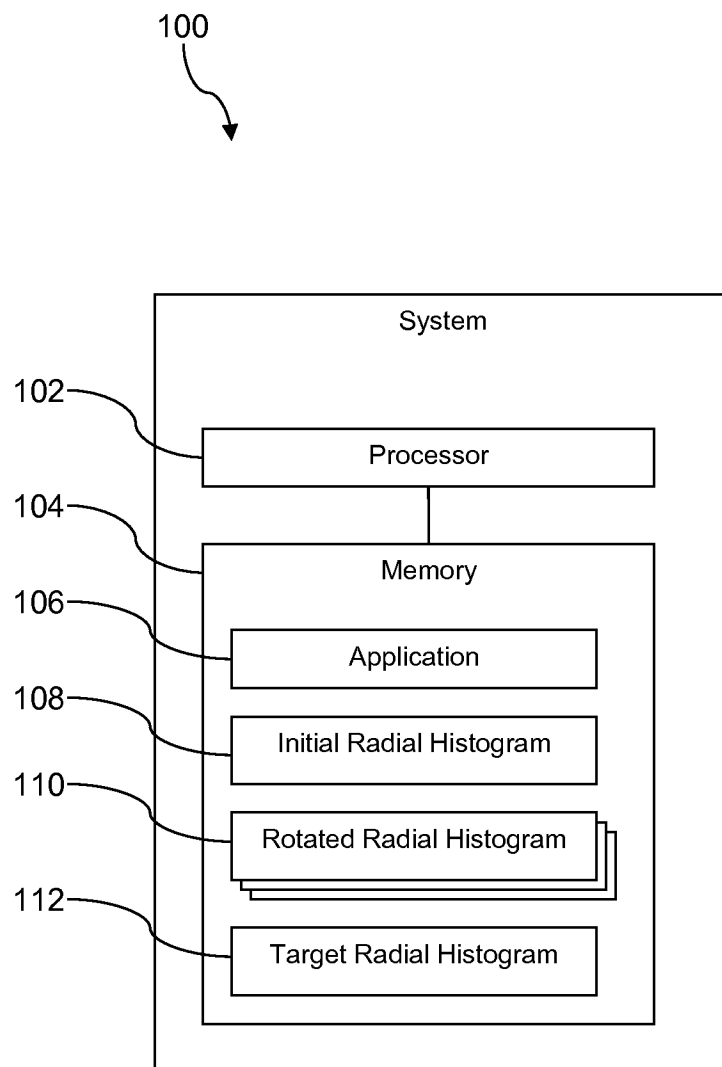


Figure 1

2/9

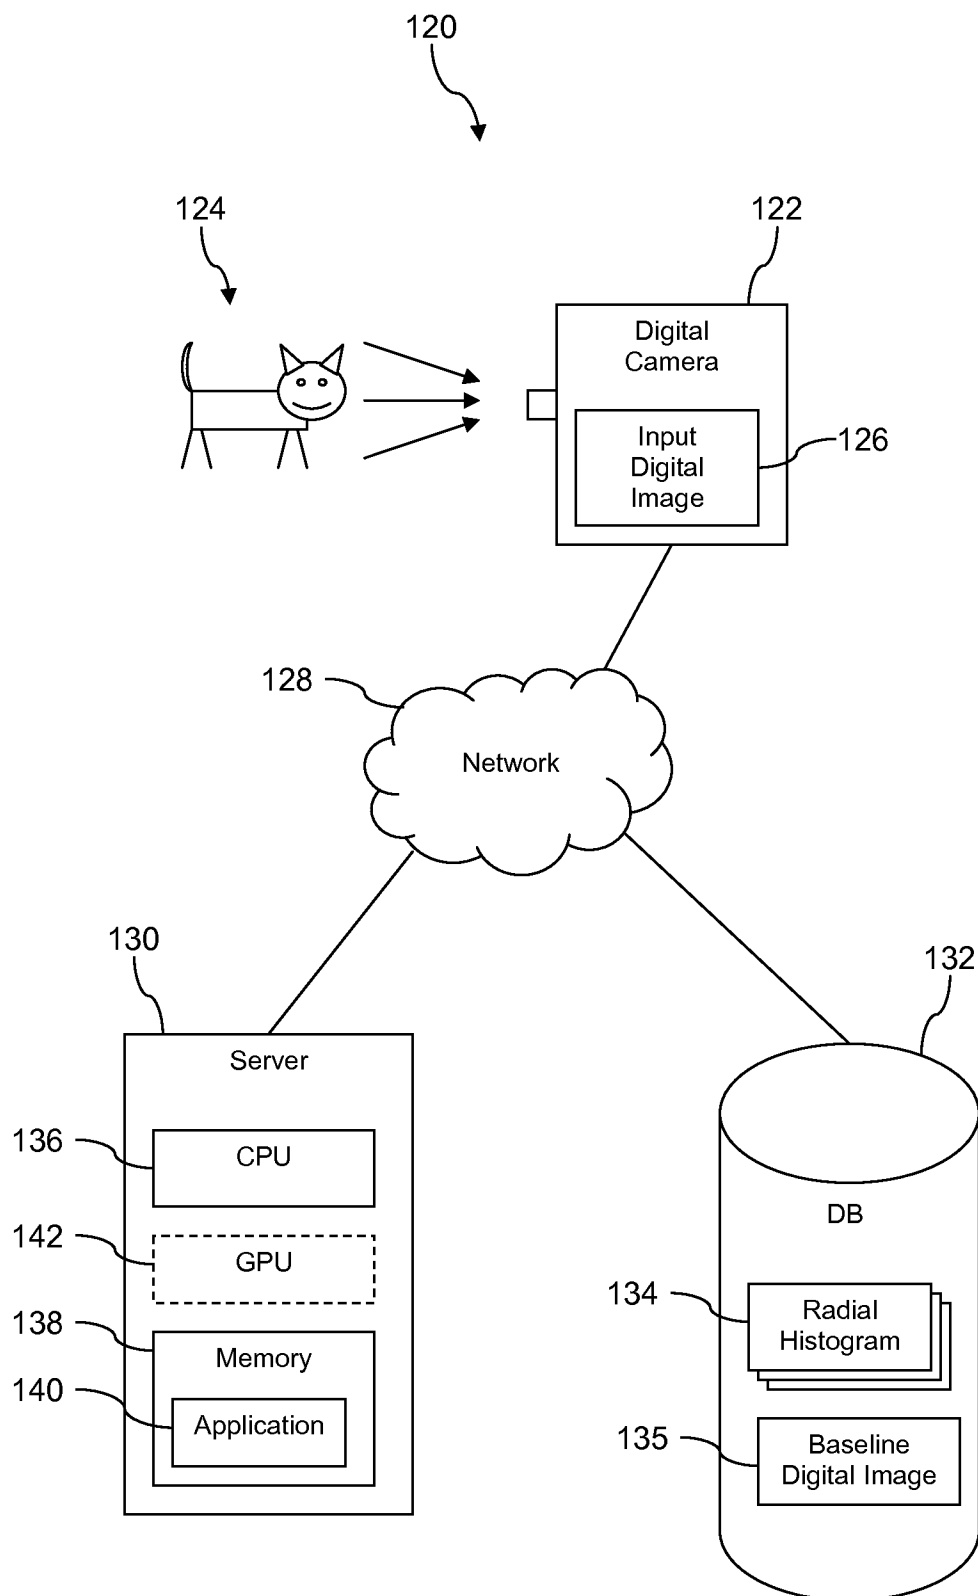


Figure 2A

3/9

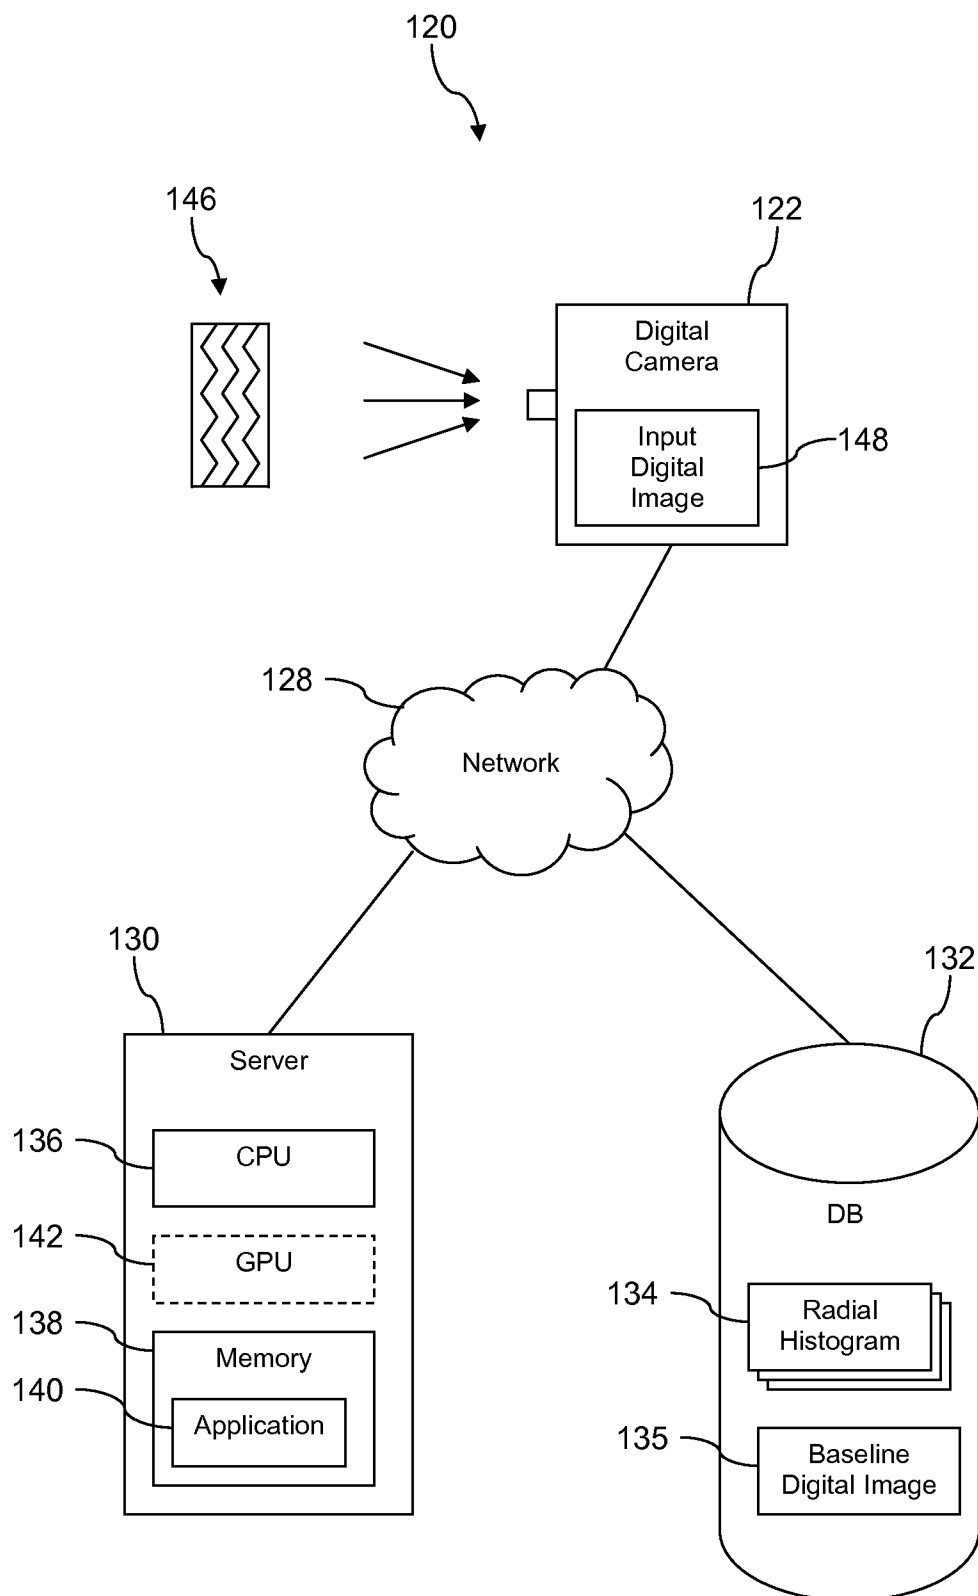


Figure 2B

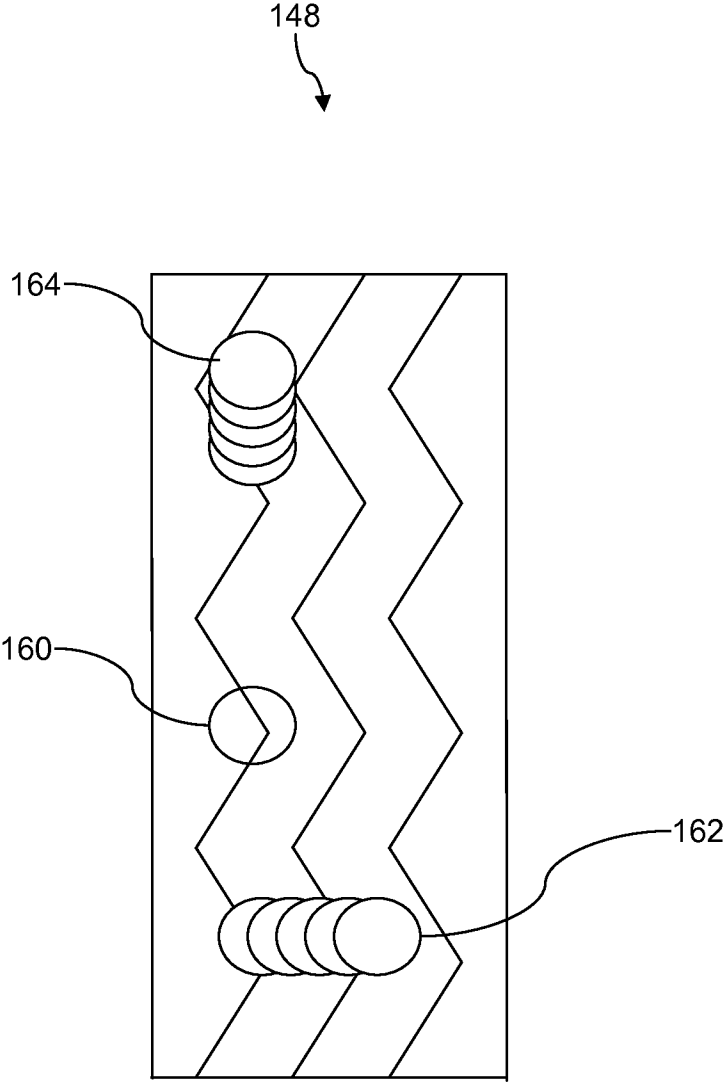


Figure 3

5/9

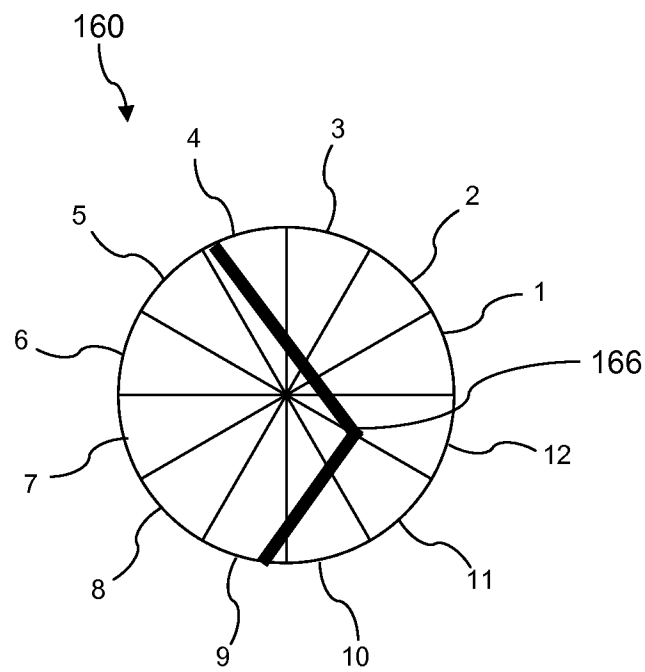


Figure 4A

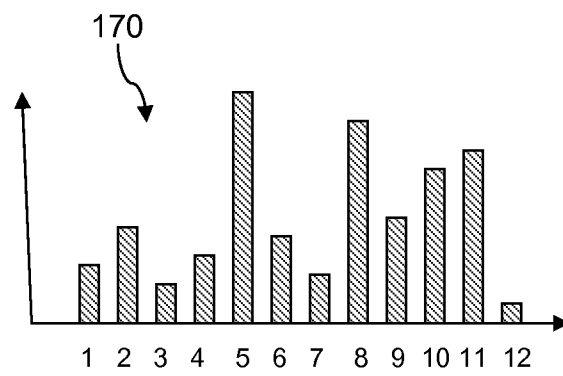


Figure 4B

6/9

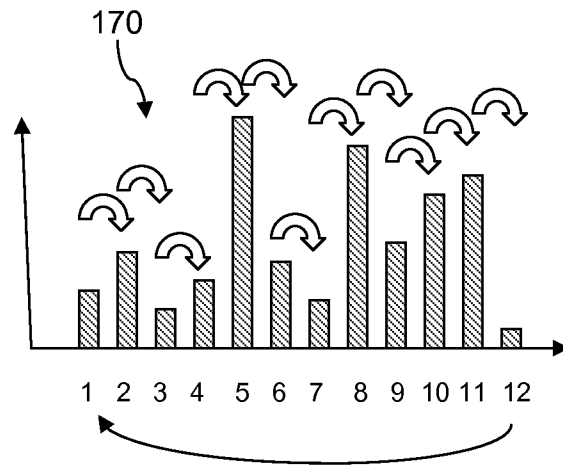


Figure 4C

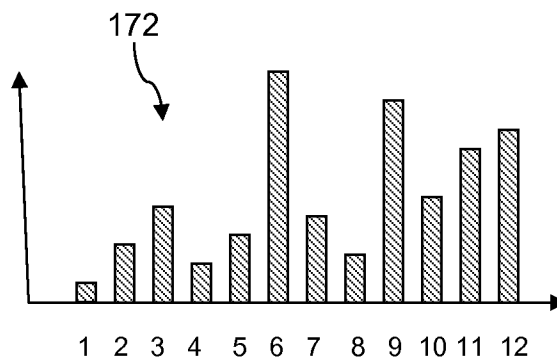


Figure 4D

7/9

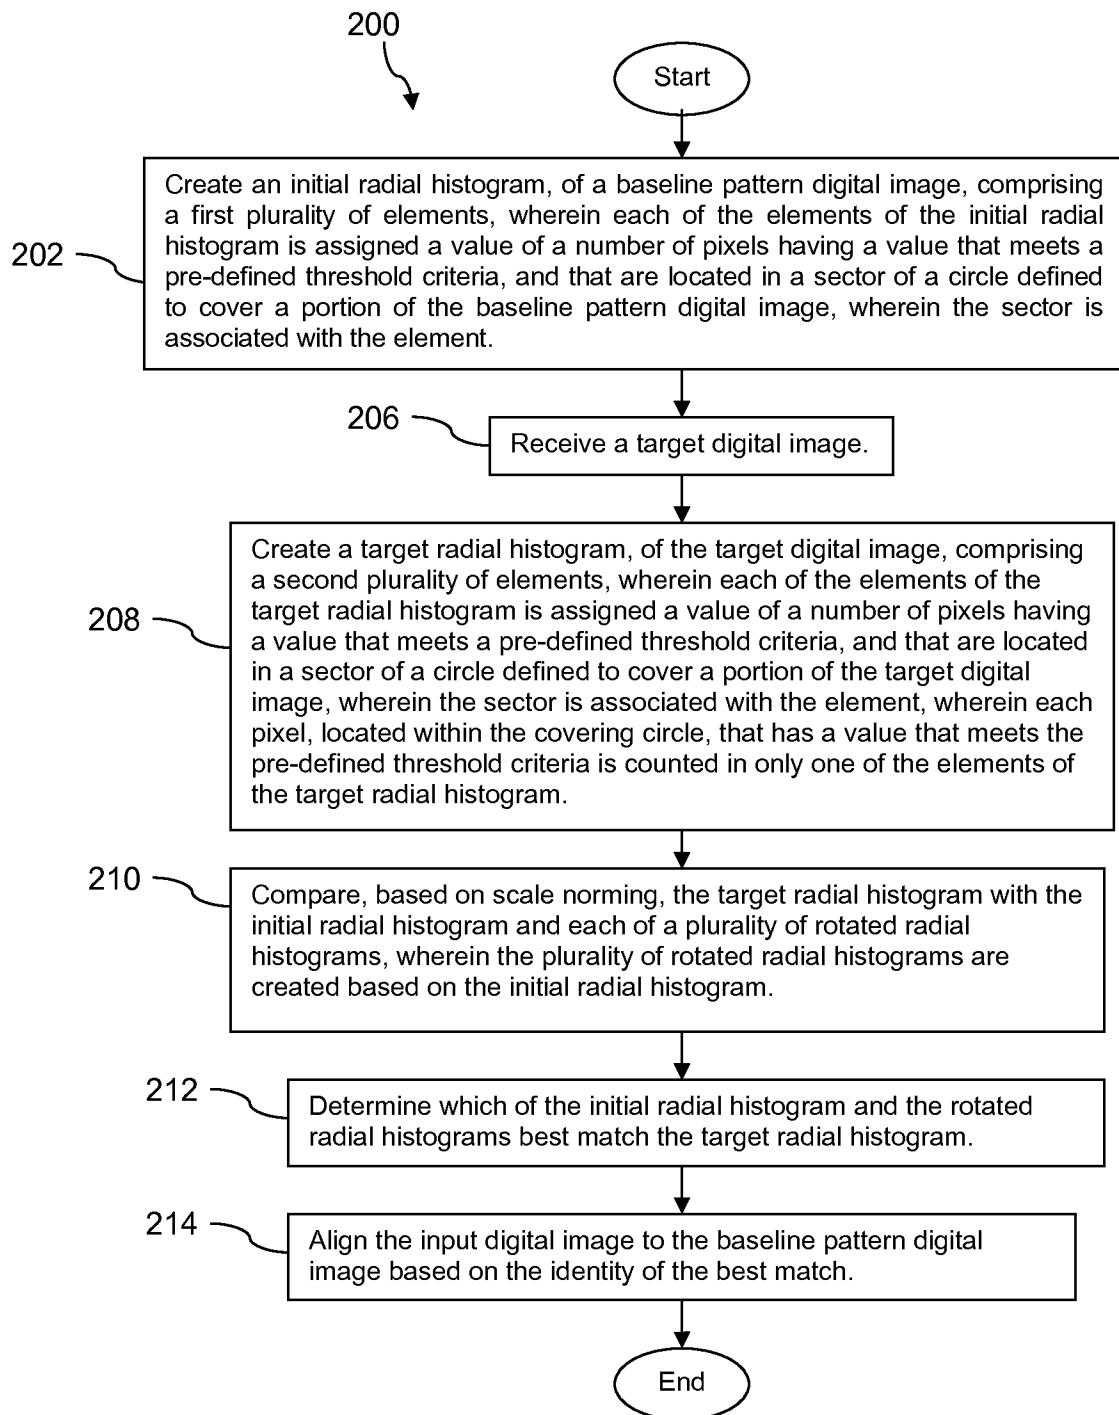
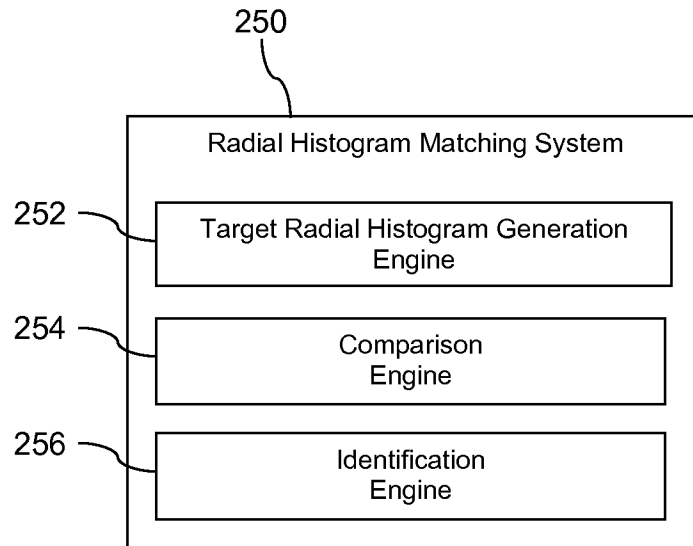


Figure 5

8/9

**Figure 6**

9/9

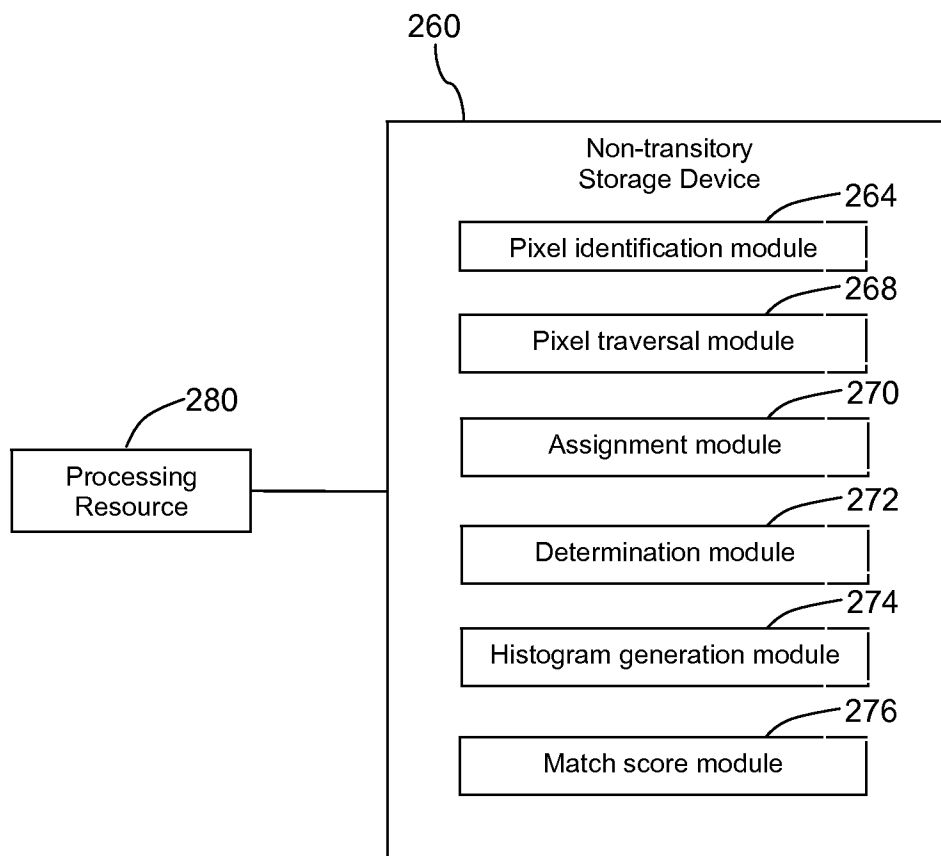


Figure 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/047441**A. CLASSIFICATION OF SUBJECT MATTER****H04N 21/23(2011.01)i, H04N 5/3745(2011.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04N 21/23; G06K 9/46; H04M 1/00; G06F 7/00; G06K 9/00; H04N 5/3745

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: histogram, circle, compare, rotate, match score, and similar terms.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 8447107 B1 (ARNAB DHUA et al.) 21 May 2013 See column 5, line 35 - column 16, line 46; figures 2, 6, 12; and claim 1.	1-5
A		6-15
Y	US 2014-0072217 A1 (XINYU XU et al.) 13 March 2014 See paragraphs 53-79; and claim 1.	1-5
A	US 2010-0113091 A1 (RAVI K. SHARMA) 06 May 2010 See paragraphs 96-120; and figures 6-7.	1-15
A	US 2012-0148091 A1 (AMAN KANSAL et al.) 14 June 2012 See paragraphs 52-56; and figure 5.	1-15
A	US 2004-0202349 A1 (BERNA EROL et al.) 14 October 2004 See paragraphs 84-105.	1-15

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 February 2015 (11.02.2015)

Date of mailing of the international search report

11 February 2015 (11.02.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. ++82 42 472 3473

Authorized officer

LEE, Jin Ick

Telephone No. +82-42-481-5770



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/047441

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 8447107 B1	21/05/2013	None	
US 2014-0072217 A1	13/03/2014	JP 2014-056572 A US 8774510 B2	27/03/2014 08/07/2014
US 2010-0113091 A1	06/05/2010	CA 2734613 A1 CA 2750359 A1 CA 2750406 A1 CA 2754061 A1 CN 102216941 A CN 102388378 A CN 102460475 A EP 2313847 A1 EP 2394224 A1 EP 2404443 A1 JP 05594852 B2 JP 2012-517188 A JP 2012-517767 A JP 2012-520018 A JP 2012-527705 A KR 10-2011-0043775 A KR 10-2011-0116201 A KR 10-2011-0118808 A KR 10-2011-0128322 A KR 10-2012 0047853 A US 2010-0046842 A1 US 2010-0048242 A1 US 2010-0205628 A1 US 2010-0222102 A1 US 2010-0228632 A1 US 2010-0261465 A1 US 2011-0034176 A1 US 2011-0143811 A1 US 2012-070078 A1 US 8004576 B2 US 8385971 B2 US 8412577 B2 US 8433306 B2 US 8520979 B2 US 8767084 B2 US 8768313 B2 US 8886206 B2 WO 2010-022185 A1 WO 2010-090946 A1 WO 2010-093510 A1 WO 2010-102040 A1 WO 2010-135455 A1	25/02/2010 19/08/2010 12/08/2010 10/09/2010 12/10/2011 21/03/2012 16/05/2012 27/04/2011 14/12/2011 11/01/2012 24/09/2014 26/07/2012 02/08/2012 30/08/2012 08/11/2012 27/04/2011 25/10/2011 01/11/2011 29/11/2011 14/05/2012 25/02/2010 25/02/2010 12/08/2010 02/09/2010 09/09/2010 14/10/2010 10/02/2011 16/06/2011 22/03/2012 23/08/2011 26/02/2013 02/04/2013 30/04/2013 27/08/2013 01/07/2014 01/07/2014 11/11/2014 25/02/2010 12/08/2010 19/08/2010 10/09/2010 25/11/2010
US 2012-0148091 A1	14/06/2012	US 2008-226130 A1	18/09/2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/047441

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004-0202349 A1	14/10/2004	US 8144920 B2	27/03/2012
		JP 04516778 B2	04/08/2010
		JP 05050075 B2	17/10/2012
		JP 2004-318879 A	11/11/2004
		JP 2010-205277 A	16/09/2010
		US 2007-0269139 A1	22/11/2007
		US 7236632 B2	26/06/2007
		US 7394938 B2	01/07/2008