

(19)



(11)

EP 2 607 635 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
20.01.2021 Bulletin 2021/03

(51) Int Cl.:
F01K 25/10^(2006.01) F01K 23/04^(2006.01)

(21) Application number: **12195287.3**

(22) Date of filing: **03.12.2012**

(54) **Cascaded Organic Rankine Cycle System**

Kaskadiertes organisches Rankine-Kreislaufsystem

Système à cycle de rankine organique en cascade

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **22.12.2011 US 201113334994**

(43) Date of publication of application:
26.06.2013 Bulletin 2013/26

(73) Proprietor: **Nanjing TICA Thermal Technology Co.,
Ltd.
Economic and Technological Development Zone,
Nanjing,
Jiangsu 210033 (CN)**

(72) Inventors:
• **Cogswell, Frederick J.**
Glastonbury, CT Connecticut 06033 (US)
• **Biederman, Bruce P.**
Meriden, CT Connecticut 06451 (US)
• **Zhang, Lili**
West Hartford, CT Connecticut 06119 (US)

(74) Representative: **Kramer Barske Schmidtchen
Patentanwälte PartG mbB
European Patent Attorneys
Landsberger Strasse 300
80687 München (DE)**

(56) References cited:
**WO-A1-2006/104490 WO-A1-2009/045196
DE-A1- 19 907 512 US-A1- 2010 319 346**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 607 635 B1

Description

BACKGROUND

[0001] The present disclosure relates to a cascaded organic Rankine cycle.

[0002] The Organic Rankine Cycle (ORC) is a vapor power cycle with an organic fluid refrigerant instead of water/steam as the working fluid. The working fluid is heated in an "evaporator/boiler" by a source of waste or low quality heat. The fluid starts as a liquid and ends up as a vapor. The high-pressure refrigerant vapor expands in the turbine to produce power. The low-pressure vapor exhausted from the turbine is condensed then sent back to the pump to restart the cycle.

[0003] The simple rankine cycle used for power generation follows the process order: 1) Adiabatic pressure rise through a pump; 2) Isobaric heat addition in a pre-heater, evaporator and superheater; 3) Adiabatic expansion in a turbine; and 4) Isobaric heat rejection in a condenser, although other cycle modifications are possible such as the addition of a vapor-to-liquid recuperator.

[0004] A main thermodynamic irreversibility in organic Rankine cycles is caused by the large temperature difference in the evaporator between the temperature of the waste heat stream and the boiling refrigerant. The higher the waste heat stream temperature the greater this irreversibility becomes. One way to reduce this loss is to cascade two thermodynamic cycles together where a cycle operating at higher temperatures rejects heat to a cycle operating at lower temperatures.

[0005] Cascaded Organic Rankine Cycle (ORC) systems are known from US 2010/319346 A1, WO 2006/104490 A1, WO 2009/045196 A1 and DE 199 07 512 A1.

SUMMARY

[0006] A cascaded Organic Rankine Cycle (ORC) system according to an exemplary aspect of the present invention includes a bottoming cycle in thermal communication with a topping cycle through a condenser/evaporator in which a bottoming cycle working fluid is first evaporated and then superheated and a topping cycle working fluid is first desuperheated and then condensed such that a percentage of total heat transfer from the topping cycle fluid that occurs during a saturated condensation is equal to or less than a percentage of total heat transfer to the bottoming cycle fluid that occurs during a saturated evaporation, wherein only said bottoming cycle includes a recuperator.

[0007] A method of operating a cascaded Organic Rankine Cycle (ORC) system in which a bottoming cycle is in thermal communication with a topping cycle according to an exemplary aspect of the present invention which includes maintaining a percentage from a fluid in the topping cycle at equal or less than a percentage of total heat transfer to a fluid in the bottoming cycle, wherein only the

working fluid in the bottoming cycle (24) is recuperated by use of a recuperator (24).

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Various features will become apparent to those skilled in the art from the following detailed description of the disclosed non-limiting embodiment. The drawings that accompany the detailed description can be briefly described as follows:

Figure 1 is a schematic diagram of a cascaded organic rankine cycle with a topping cycle and a bottoming cycle;

Figure 2 is a TS-diagram for the bottoming cycle; Figure 3 is a TS-diagram for the topping cycle; and Figure 4 is a plot of temperature profiles in the counter-flow heat exchangers of the desuperheating and then condensing topping fluid (Siloxane MM), and the evaporating and then superheating bottoming fluid (R245fa).

DETAILED DESCRIPTION

[0009] Figure 1 schematically illustrates a cascaded Organic Rankine Cycle (ORC) system 20. The cascaded ORC system 20 includes at least two Rankine cycles, where a relatively hotter topping cycle 22 is cascaded with a relatively cooler bottoming cycle 24. In the disclosed non-limiting embodiment, the topping cycle 22 uses Siloxane MM as the working fluid while the bottoming cycle 24 uses R245fa. It should be appreciated, however, that additional cycles and other working fluids may additionally be utilized.

[0010] The topping cycle 22 generally includes a power producing turbine 26 which is driven by the working fluid to drive a generator 28 that produces power. A refrigerant pump 30 increases the pressure of the working fluid from a condenser/evaporator 32. The heat exchanger group that transfers heat from the topping cycle 22 to the bottoming cycle 24 is referred to herein as the "condenser/evaporator" 32, although it should be understood that it may also include desuperheating and subcooling of the working fluid in the topping cycle 22, and preheating and superheating of the working fluid in the bottoming cycle 24.

[0011] An evaporator 34 such as a boiler receives a significant heat input from, for example, an oil circuit 36 to vaporize the Siloxane MM working fluid with the vapor thereof passed through to the turbine 26 to provide motive power. Upon leaving the turbine 26, the relatively lower pressure working fluid vapor passes to the condenser/evaporator 32 and is condensed by way of a heat exchange relationship with the bottoming cycle 24 such that the condenser/evaporator 32 operates as a condenser in the topping cycle 22 as well as an evaporator in the bottoming cycle 24.

[0012] In the disclosed non-limiting embodiment, the

turbine 26 is a radial inflow turbine that expands the topping cycle working fluid vapor down to a lower pressure and generates power by the extraction of work from this expansion process. The vapor is still superheated so that its heat potential is utilized in the condenser/evaporator 32. The condenser/evaporator 32 actually de-superheats the working fluid and ultimately condenses the working fluid back to liquid for communication through the pump 30. The condensed working fluid is then circulated to the evaporator 34 by the pump 30 to complete the topping cycle 22.

[0013] The bottoming cycle 24 generally includes a power producing turbine 36 which is driven by the working fluid in the bottoming cycle and in turn drives a generator 38 that produces power. A refrigerant pump 40 increases the pressure of the working fluid from a recuperator 40. The bottom cycle working fluid is in thermal communication with a cooling system such as a water circuit 42 through a water cooled condenser 44.

[0014] By the nature of the proposed cycle, the vapor entering and leaving turbine 36 is highly superheated. The energy potential of the superheated vapor at the turbine exit is not wasted, but is fed into a recuperator 46. The recuperator 46 transfers heat from the low-pressure hot vapor from the turbine exit to the high pressure liquid at the pump exit.

[0015] The recuperator 46 uses this superheat to pre-heat the liquid working fluid downstream of the pump 40. That is, if a cycle is driven to high turbine inlet superheat, then turbine outlet superheat will be high. The availability of this heat is thereby captured to maintain cycle efficiency as the recuperator 46 is an internal heat exchanger. When the low pressure side of the topping cycle 22 is de-superheated, it is essentially recuperated into the bottoming cycle 24 which is where high superheat is achieved. Matching of the working fluids and the pressures thereof facilitates this interaction.

[0016] The recuperator 46 is only in the bottoming cycle 24. As the topping cycle 22 is not recuperated, its waste heat is captured by the condenser/evaporator 32. Both cycles are highly superheated yet avoid heat-exchanger pinches to minimize the heat-transfer temperature difference and minimize process irreversibility.

[0017] Figure 2 shows a TS diagram for the bottoming cycle 24. The condenser/evaporator 32 receives nearly saturated liquid (a temperature that is close to boiling) from the recuperator 46. The condenser/evaporator 32 boils then heats the refrigerant from state 6 to 1. The state 1 condition is highly superheated. The exit state from the turbine 36, state 2, is also highly superheated. The recuperator 46 uses this heat (state 2 to 3) to heat the high pressure working fluid (state 5 to 6). Sizing of the recuperator 46 affects state 6. A smaller recuperator 46, for example, results in less heat transferred and therefore a cooler more subcooled state at 6 which results in more heat transfer required from the condenser/evaporator 32, and a larger percentage of that heat in the pre-heating and evaporating regimes.

[0018] Figure 3 shows a TS diagram for the topping cycle 22. The exit state of the topping cycle turbine 26 is highly superheated, but a recuperator is not used. Instead, the low pressure working fluid vapor is de-superheated as the bottoming cycle high-pressure working fluid is superheated. The choice of a heavy molecule such as Siloxane for the topping cycle 22 results in the highly angled saturation dome. As a result, the inlet state to turbine 26 is only slightly superheated.

[0019] Figure 4 represents an idealized counter-flow heat exchanger. The x-axis is normalized enthalpy change of each fluid, and the y-axis is temperature. The x-axis is based on the First Law of Thermodynamics which can be written for a heat exchanger as:

$$\dot{m}_A (h_{A \text{ in}} - h_{A \text{ out}}) = \dot{m}_B (h_{B \text{ out}} - h_{B \text{ in}})$$

[0020] Where the subscripts A and B refer to streams A and B respectively, $\dot{m}$ is the mass flow rate, and h is the enthalpy of the fluid.

[0021] In Figure 4, the warmer fluid (A) is shown to travel from right to left, and the colder fluid (B) to travel from left to right through the heat exchanger. Heat transfers from fluid A to fluid B; therefore, fluid A's enthalpy decreases while fluid B's enthalpy increases. For each section of the heat exchanger the above equation must be true. For example, the first 10% reduction in enthalpy of Fluid A must equal the last 10% increase of enthalpy of fluid B. If the fluids were simple fluids with constant specific heat, then each temperature profile would be a straight line. When the fluids are refrigerants, the temperature profiles have various non-linear shapes. When a fluid is saturated there is no change in temperature with change in enthalpy. The change in temperature with enthalpy is generally different for a fluid as a liquid than as a vapor; therefore, the choice of fluid and operational temperatures affect the shape of these curves. Furthermore, the choice of other system components will affect their shape. Specifically the choice of and the size of the recuperator 46 in the proposed cycle affects the starting enthalpy (and therefore temperature) of stream B.

[0022] Figure 4 shows how each temperature profile relates to the other at each physical location along the heat exchanger. In order for heat to flow from Fluid A to Fluid B, Fluid A must always be warmer than Fluid B. If A gets too close to B this is referred to as a temperature "pinch" condition. This is undesirable because a large heat exchange area is required to exchange the enthalpy in this region. In fact, the entire size of a heat exchanger may be defined by a "pinch" condition. Where the temperature difference is large, the thermodynamic cycle will be less efficient since more entropy is generated by heat exchange through larger temperature differences. An ideal arrangement is when the temperature difference throughout the heat exchanger remains relatively constant. Since vapor heat exchange usually has a lower

heat transfer rate than saturated, it may be desirable to maintain a somewhat higher temperature difference in this region, typically up to or equal to 1 to 2 times. For the ORC system 20, the condenser/evaporator 32 heat exchanger has two major regions. The first (on the left in Figure 4) is saturated for both fluids and the temperature profiles are flat. This section covers about 40 percent of the total heat transfer in the disclosed non-limiting embodiment. The second (on the right in Figure 4) is superheated and temperature increases with enthalpy. That is, a percent saturation for a fluid in the topping cycle 22 is maintained at 38 percent saturation compared to a 40 percent saturation for the working fluid in the bottoming cycle 24.

[0023] The point where the temperature profile transitions from flat (saturated) to increasing (vapor) will be identified herein as the "knee." For the above goals to be achieved, the "knee" of fluid A must lie equal to or slightly to the left of the "knee" of fluid B in the normalized enthalpy plot. If the "knee" lies far to the left then the saturated section may have a good heat transfer difference (typically 5 to 15F; 3 to 8C), but the heat transfer difference of the vapor section will be too large. If the "knee" lies too far to the right then a "pinch" condition will be created between the two fluids. Practically the temperature difference will increase and the saturated temperature difference will be too high.

[0024] The effect of the recuperator 46 on the condenser/evaporator 32 in the proposed cycle is to change the inlet enthalpy, and therefore temperature, of the colder fluid, B. By increasing the size of the recuperator 46, the enthalpy of the inlet of B increases by recovering heat from the turbine exit. This results in a smaller percentage of the total heat transfer for Fluid B occurring to the left of the knee, shifts the knee of B to the left and results in a pinch condition. Conversely, if the recuperator heat exchange is reduced or eliminated, this shifts knee of B to the right and therefore increases the temperature difference in the vapor section. That is, a percentage of total heat transfer from the working fluid in the topping cycle 22 that occurs during a saturated condensation is equal to or slightly less (within 10%) than a percentage of total heat transfer to the working fluid in the bottoming cycle 24 that occurs during a saturated evaporation.

[0025] The selection of a high superheat cascaded cycle with a condenser/evaporator heat exchanger transferring heat from the topping cycle to the bottoming cycle, and the selection of refrigerants for the topping and bottoming cycles and recuperator in the bottoming cycle allows for optimized heat exchanger temperature profiles.

Claims

1. A cascaded Organic Rankine Cycle (ORC) system (20) comprising:

a topping cycle (22); and

a bottoming cycle (24) in thermal communication with said topping cycle (22) through a condenser/evaporator (32) in which a bottoming cycle (24) working fluid is first evaporated and then superheated and a topping cycle working fluid is first desuperheated and then condensed such that a percentage of total heat transfer from said topping cycle fluid that occurs during a saturated condensation is equal to or less than a percentage of total heat transfer to said bottoming cycle fluid that occurs during a saturated evaporation, **characterized in that** only said bottoming cycle (24) includes a recuperator (46).

2. The system (20) as recited in claim 1, wherein said working fluid for said topping cycle (22) is Siloxane MM.

3. The system (20) as recited in claim 1 or 2, wherein said working fluid for said bottoming cycle (24) is R245fa.

4. The system (20) as recited in any preceding claim, wherein both said bottoming cycle fluid and said topping cycle fluid in the condenser/evaporator (32) are saturated over approximately 40% of said total heat transfer.

5. The system (20) as recited in any preceding claim, further comprising a hot oil circuit (36) in thermal communication with said topping cycle (22) through an evaporator (34).

6. The system (20) as recited in any preceding claim, further comprising a cooling circuit (42) in thermal communication with said bottoming cycle (24) through a condenser (44).

7. A method of operating a cascaded Organic Rankine Cycle (ORC) system (20) in which a bottoming cycle (24) is in thermal communication with a topping cycle (24) comprising maintaining a percentage of total heat transfer from a working fluid in the topping cycle (22) at equal to or less than a percentage of total heat transfer to a working fluid in the bottoming cycle (24),

characterized in that only the working fluid in the bottoming cycle (24) is recuperated by use of a recuperator (46).

8. The method as recited in claim 7, further comprising:

utilizing Siloxane MM as the working fluid in the topping cycle (22); and/or
utilizing R245fa as the working fluid in the bottoming cycle (24).

9. The method as recited in claim 7 or 8, further com-

prising utilizing a condenser/evaporator (32) as the thermal interface between the bottoming cycle (24) and the topping cycle (22).

10. The method as recited in any of claims 7 to 9, further comprising operating a condenser/evaporator (32) as a condenser for the topping cycle (22) and as an evaporator for the bottoming cycle (24).
11. The method as recited in any of claims 7 to 10, wherein a "knee" of the working fluid in the topping cycle (22) flowing right to left lies to the left of the "knee" of the working fluid of the bottoming cycle (24) flowing left to right in a normalized enthalpy plot.
12. The method as recited in any of claims 7 to 11, wherein the working fluid in the topping cycle (22) and the working fluid in the bottoming cycle (24) are saturated over approximately 40 % of said total heat transfer.

Patentansprüche

1. Kaskadiertes Organischer-Rankine-Kreislauf (ORC)-System (20), enthaltend:

einen oberen Kreislauf (22); und
einen unteren Kreislauf (24) in thermischer Verbindung mit dem oberen Kreislauf (22) durch einen Kondensator/Verdampfer (32), in dem ein unterer-Kreislauf (24)-Arbeitsfluid zunächst verdampft und dann überhitzt wird und ein oberer-Kreislauf-Arbeitsfluid zuerst entüberhitzt und dann kondensiert wird, so dass ein prozentualer Anteil einer Gesamtwärmeabgabe von dem oberer-Kreislauf-Fluid, die während einer gesättigten Kondensation erfolgt, gleich oder geringer ist als ein prozentualer Anteil einer Gesamtwärmeabgabe an das unterer-Kreislauf-Fluid, die während einer gesättigten Verdampfung erfolgt, **dadurch gekennzeichnet, dass** nur der untere Kreislauf (24) einen Rekuperator (46) aufweist.
2. System (20) nach Anspruch 1, wobei das Arbeitsfluid für den oberen Kreislauf (22) Siloxan MM ist.
3. System (20) nach Anspruch 1 oder 2, wobei das Arbeitsfluid für den unteren Kreislauf (24) R245fa ist.
4. System (20) nach einem der vorhergehenden Ansprüche, wobei sowohl das unterer-Kreislauf-Fluid als auch das oberer-Kreislauf-Fluid in dem Kondensator/Verdampfer (32) über etwa 40% der Gesamtwärmeabgabe gesättigt sind.
5. System (20) nach einem der vorhergehenden Ansprüche, ferner enthaltend eine Heißöl-Zirkulation

(36) in thermischer Verbindung mit dem oberen Kreislauf (22) durch einen Verdampfer (34).

6. System (20) nach einem der vorhergehenden Ansprüche, ferner enthaltend eine Kühlmittel-Zirkulation (42) in thermischer Verbindung mit dem unteren Kreislauf (24) über einen Kondensator (44).
7. Verfahren zum Betreiben eines kaskadierten Organischer-Rankine-Kreislauf (ORC)-Systems (20), bei dem ein unterer Kreislauf (24) in thermischer Verbindung mit einem oberen Kreislauf (24) ist, enthaltend Aufrechterhalten eines prozentualen Anteils einer Gesamtwärmeabgabe von einem Arbeitsfluid in dem oberen Kreislauf (22) bei gleich oder geringer als einem prozentualen Anteil einer Gesamtwärmeabgabe an ein Arbeitsfluid in dem unteren Kreislauf (24), **dadurch gekennzeichnet, dass** sich nur das Arbeitsfluid in dem unteren Kreislauf (24) unter Verwendung eines Rekuperators (46) regeneriert.

8. Verfahren nach Anspruch 7, ferner enthaltend:

Verwenden von Siloxan MM als das Arbeitsfluid in dem oberen Kreislauf (22); und/oder
Verwenden von R245fa als das Arbeitsfluid in dem unteren Kreislauf (24).


9. Verfahren nach Anspruch 7 oder 8, ferner enthaltend Verwenden eines Kondensators/Verdampfers (32) als die thermische Schnittstelle zwischen dem unteren Kreislauf (24) und dem oberen Kreislauf (22).
10. Verfahren nach einem der Ansprüche 7 bis 9, ferner enthaltend Betreiben eines Kondensators/Verdampfers (32) als ein Kondensator für den oberen Kreislauf (22) und als ein Verdampfer für den unteren Kreislauf (24).
11. Verfahren nach einem der Ansprüche 7 bis 10, wobei ein "Knie" des Arbeitsfluids in dem oberen Kreislauf (22), das von rechts nach links strömt, in einem normierten Enthalpiediagramm links von dem "Knie" des Arbeitsfluids des unteren Kreislaufs (24), das von links nach rechts strömt, liegt.

12. Verfahren nach einem der Ansprüche 7 bis 11, wobei das Arbeitsfluid in dem oberen Kreislauf (22) und das Arbeitsfluid in dem unteren Kreislauf (24) über etwa 40% der Gesamtwärmeabgabe gesättigt sind.

Revendications

1. Système (20) à cycle de Rankine organique (ORC) en cascade comprenant :

- un cycle de tête (22) ; et
un cycle bas (24) en communication thermique avec ledit cycle de tête (22) à travers un condenseur/évaporateur (32) dans lequel un fluide de travail du cycle bas (24) est d'abord évaporé puis surchauffé et un fluide de travail du cycle de tête est d'abord désurchauffé et puis condensé de telle sorte qu'un pourcentage du transfert thermique total dudit fluide du cycle de tête qui se produit pendant une condensation saturée est égal ou inférieur à un pourcentage de transfert thermique total vers ledit fluide du cycle bas qui se produit pendant une évaporation saturée, **caractérisé en ce que** seul ledit cycle bas (24) comprend un récupérateur (46).
2. Système (20) selon la revendication 1, dans lequel ledit fluide de travail pour ledit cycle de tête (22) est le Siloxane MM.
3. Système (20) selon la revendication 1 ou 2, dans lequel ledit fluide de travail pour ledit cycle bas (24) est R245fa.
4. Système (20) selon l'une quelconque des revendications précédentes, dans lequel ledit fluide du cycle bas et ledit fluide du cycle de tête dans le condenseur/évaporateur (32) sont saturés sur environ 40 % dudit transfert de chaleur total.
5. Système (20) selon l'une quelconque des revendications précédentes, comprenant en outre un circuit d'huile chaude (36) en communication thermique avec ledit cycle de tête (22) à travers un évaporateur (34).
6. Système (20) selon l'une quelconque des revendications précédentes, comprenant en outre un circuit de refroidissement (42) en communication thermique avec ledit cycle bas (24) à travers un condenseur (44).
7. Procédé de fonctionnement d'un système (20) à cycle de Rankine organique (ORC) en cascade dans lequel un cycle bas (24) est en communication thermique avec un cycle de tête (22) comprenant le maintien d'un pourcentage de transfert thermique total d'un fluide de travail dans le cycle de tête (22) à un niveau égal ou inférieur à un pourcentage de transfert thermique total vers un fluide de travail dans le cycle bas (24), **caractérisé en ce que** seul le fluide de travail dans le cycle bas (24) est récupéré par l'utilisation d'un récupérateur (46).
8. Procédé selon la revendication 7, comprenant en outre les étapes consistant à :
- utiliser le siloxane MM comme fluide de travail dans le cycle de tête (22) ; et/ou
utiliser le R245fa comme fluide de travail dans le cycle bas (24).
9. Procédé selon la revendication 7 ou 8, comprenant en outre l'étape consistant à utiliser un condenseur/évaporateur (32) comme interface thermique entre le cycle bas (24) et le cycle de tête (22).
10. Procédé selon l'une quelconque des revendications 7 à 9, comprenant en outre une étape consistant à faire fonctionner un condenseur/évaporateur (32) comme condenseur pour le cycle de tête (22) et comme évaporateur pour le cycle bas (24).
11. Procédé selon l'une quelconque des revendications 7 à 10, dans lequel un « coude » du fluide de travail du cycle de tête (22) s'écoulant de droite à gauche se trouve à gauche du « coude » du fluide de travail du cycle bas (24) s'écoulant de gauche à droite dans un diagramme d'enthalpie normalisée.
12. Procédé selon l'une quelconque des revendications 7 à 11, dans lequel le fluide de travail du cycle de tête (22) et le fluide de travail du cycle bas (24) sont saturés sur environ 40 % dudit transfert thermique total.

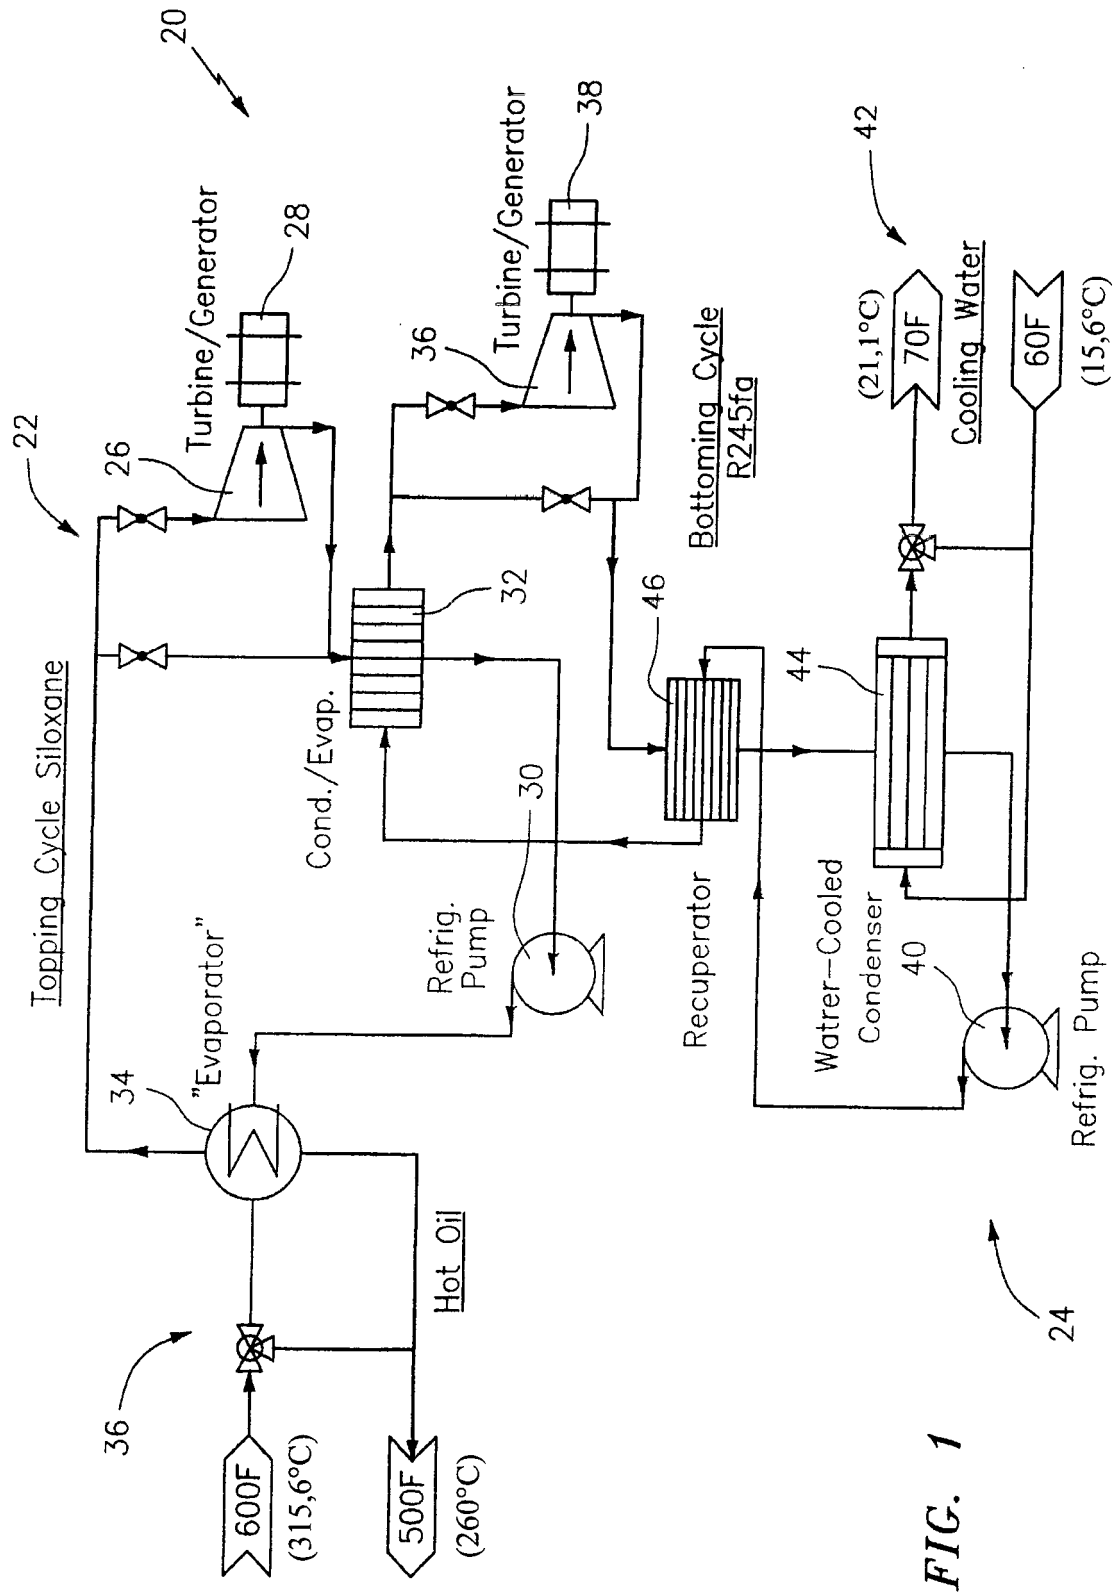

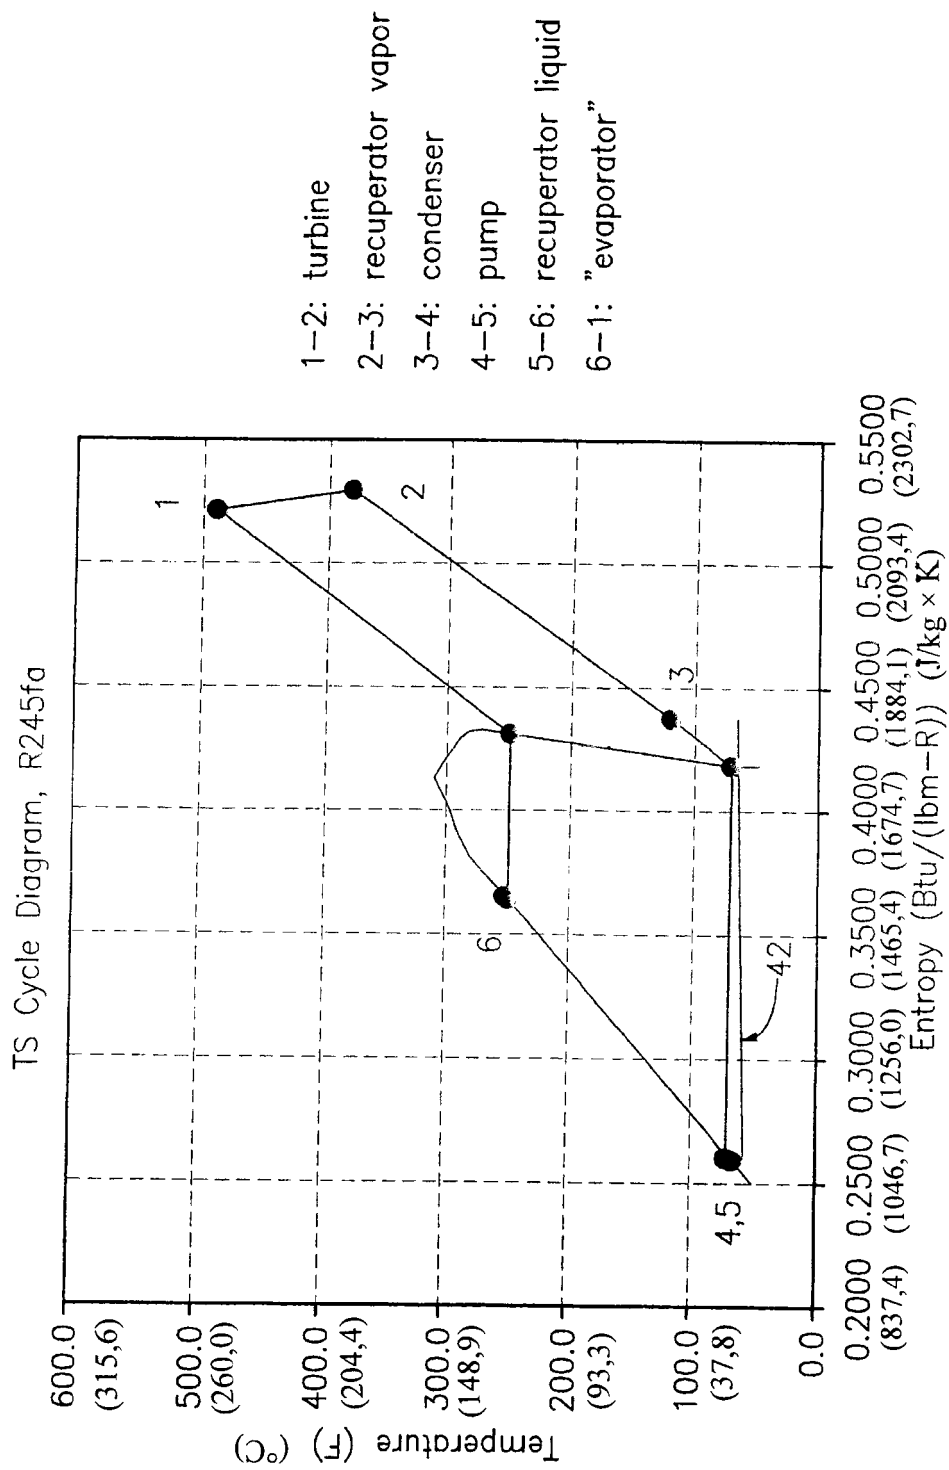


FIG. 2

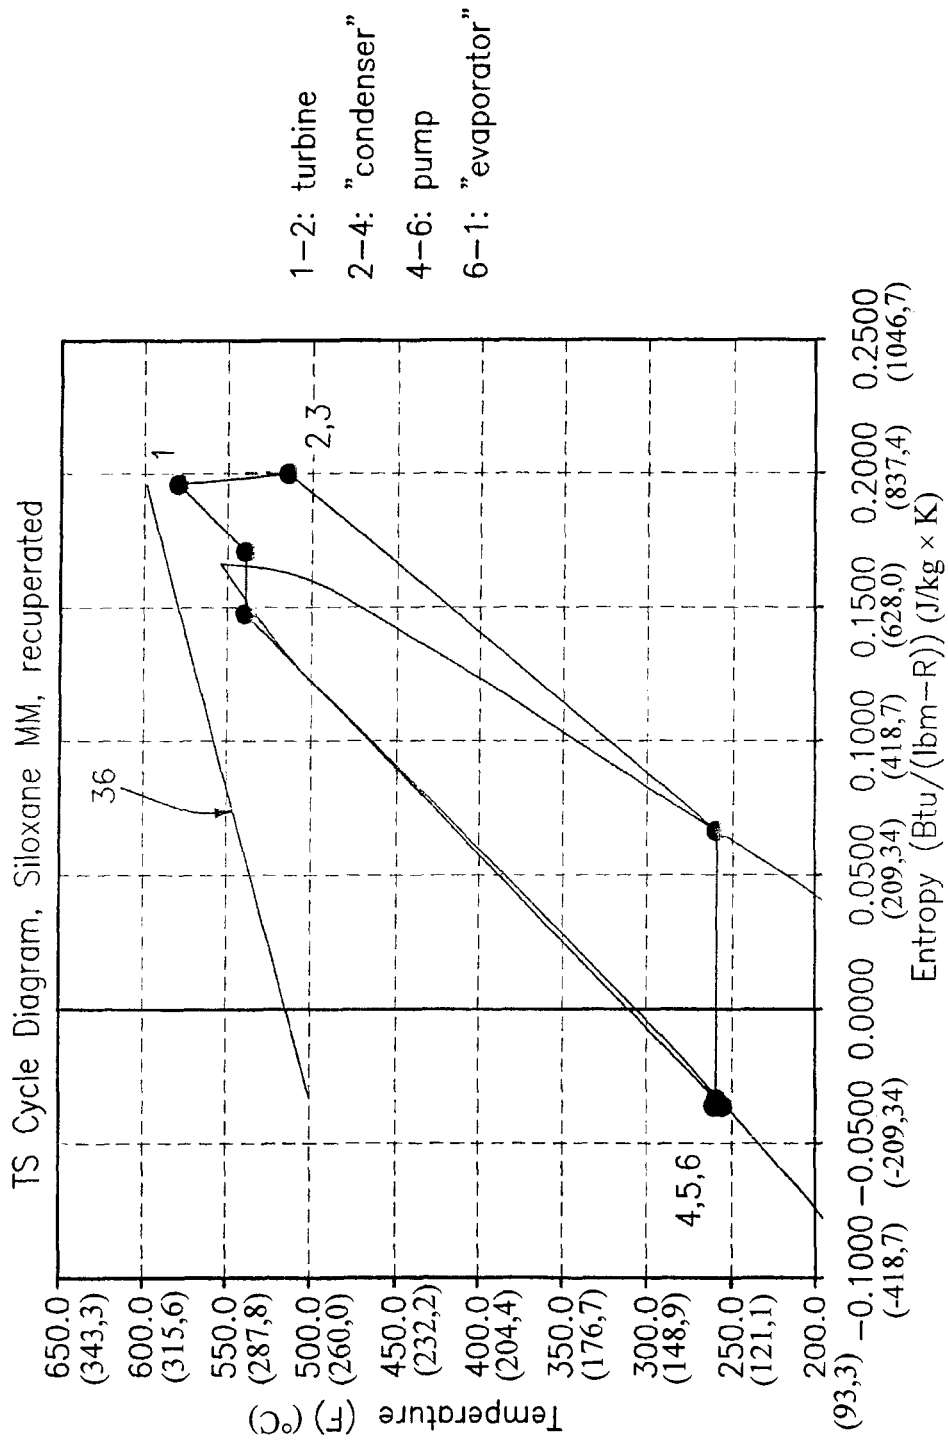


FIG. 3

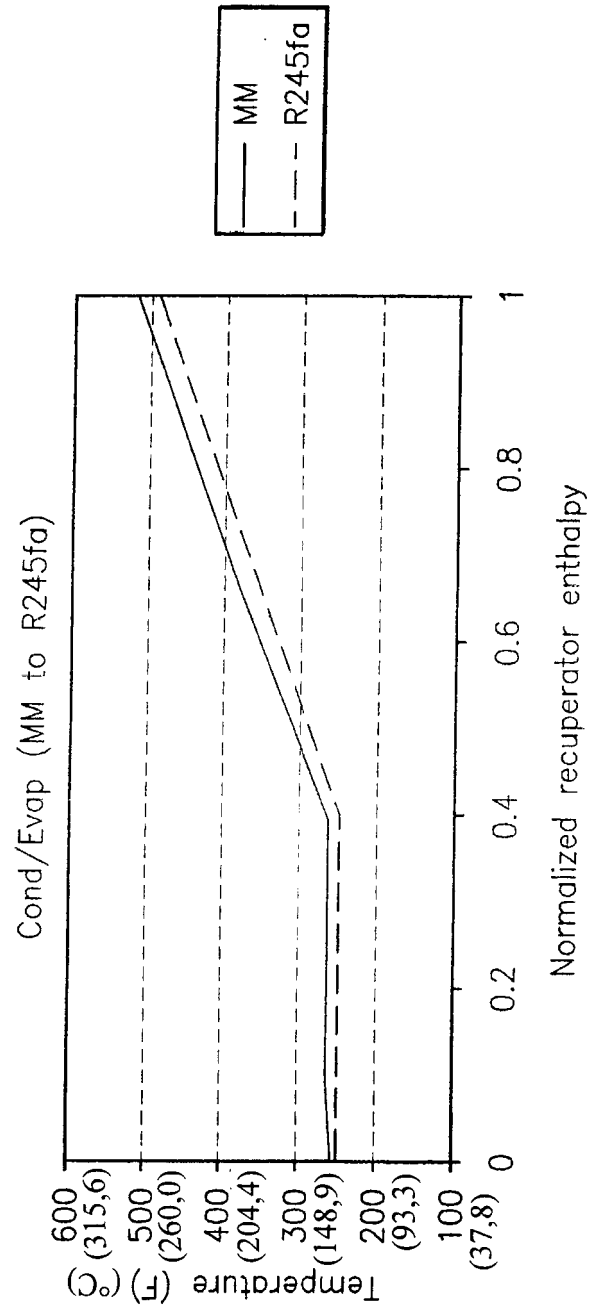


FIG. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2010319346 A1 [0005]
- WO 2006104490 A1 [0005]
- WO 2009045196 A1 [0005]
- DE 19907512 A1 [0005]