

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 December 2001 (06.12.2001)

PCT

(10) International Publication Number
WO 01/93614 A2

(51) International Patent Classification⁷: **H04Q 7/32**

(21) International Application Number: PCT/US01/12692

(22) International Filing Date: 18 April 2001 (18.04.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/585,890 31 May 2000 (31.05.2000) US

(71) Applicant (*for all designated States except US*): **ERICS-SON INC** [US/US]; 7001 Development Drive, Research Triangle Park, NC 27709 (US).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **IRVIN, David, Rand** [US/US]; 1546 Iredell Drive, Raleigh, NC 27608 (US).

(74) Agent: **MYERS BIGEL SIBLEY SAJOVEC, P.A.**; P.O. Box 37428, Raleigh, NC 27627 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WIRELESS COMMUNICATIONS TERMINALS AND METHODS INCLUDING MULTIPLE ENTRY PHONEBOOK FOR MULTIPLE TRANSCEIVERS

(57) Abstract: A wireless communications terminal includes a first transceiver that communicates with a first wireless communications system such as a cellular communications system. A second transceiver communicates with a second wireless communications system that typically has a shorter range than the first transceiver, such as a Bluetooth or FRS system. A multiple entry phonebook includes a first wireless communications system access number and a second wireless communications system access number for each of one or more entities. The wireless communications terminal includes a controller and/or other means that determines whether to use the first wireless communications system access number or the second wireless communications system access number in response to a request to call the corresponding entity. A wireless communication is initiated with the entity over the first wireless communications system using the first transceiver access number and the first transceiver or over the second communications system using the second transceiver access number and the second transceiver, in response to this determination.

WO 01/93614 A2



**WIRELESS COMMUNICATIONS TERMINALS AND METHODS
INCLUDING MULTIPLE ENTRY PHONEBOOK FOR MULTIPLE
TRANCEIVERS**

Field of the Invention

This invention relates to communications systems and methods, and more particularly to wireless communications systems and methods.

Background of the Invention

In recent years, wireless communication systems have emerged as an important alternative to wireline communications. These systems can offer users the convenience of mobility and personal services, as well as cost savings over traditional wireline systems in the installation and relocation of telecommunications equipment.

One type of wireless communications systems, cellular telephone systems, uses radio communications between a plurality of wireless communications terminals within the wireless system and between wireless communications terminals and the Public Switched Telephone Network (PSTN) for calls to or from outside the wireless system.

In cellular systems, a geographical area is divided into cells covered by one or more base stations. The cells are connected via a respective base station to a Mobile Services Switching Center (MSC). The MSC, in turn, is connected to the PSTN. The wireless communications terminals communicate with the MSC through the base stations. The MSC can switch calls between wireline and mobile subscribers, control signaling to the wireless communications terminals, compile billing statistics, and/or control the overall operation of the system.

Both analog and digital cellular systems have been developed. For example, analog cellular radiotelephone systems, such as designated AMPS, ETACS, NMT-450, and NMT-900, have been deployed successfully throughout the world.

More recently, digital cellular radiotelephone systems such as designated IS-54B in North America and the pan-European GSM system have been introduced. Multiple mode wireless communications terminals that include, for example, both analog and digital cellular capabilities, also have been introduced.

Satellites also may be employed to perform similar functions to those performed by base stations in a conventional terrestrial radiotelephone system, for example, in areas where population is sparsely distributed over large areas or where rugged topography tends to make conventional landline telephone or terrestrial cellular telephone infrastructure technically or economically impractical. A satellite radiotelephone system typically includes one or more satellites which serve as relays or transponders between one or more earth stations and wireless communications terminals. The satellite communicates with wireless communications terminals and earth stations over duplex links. The earth station may in turn be connected to the PSTN, allowing communications between wireless communications terminals, and communications between wireless communications terminals and conventional terrestrial cellular radiotelephones or landline telephones. The satellite radiotelephone system may utilize a single antenna beam covering the entire area served by the system, or the satellite may be designed such that it produces multiple minimally-overlapping beams, each serving distinct geographical coverage areas in the system's service region. A satellite and coverage area serve functions similar to that of a base station and cell, respectively, in a terrestrial cellular system.

It also is known to use two way unlicensed radios for wireless communications over limited distances. By using unlicensed two-way radios, the expenses associated with cellular and/or satellite radiotelephone communications may be avoided. Two-way radios include the Family Radio Service (FRS) radio that allows a group to use a small, easy to use and relatively inexpensive two-way radio for voice communications between members of the group. These radios may provide the group a choice of channels to use, to help reduce interference from other groups. FRS radios use the 460 MHz band of the radio spectrum that was allotted by the Federal Communications Commission (FCC) for narrow band two-way FM radio communications over a limited distance. See, for example, the "Family Radio Service (FRS) Information Page" at www.members.tripod.com.

Another example of wireless two-way radios is the Bluetooth™ personal area wireless networking standard which is a low power, short range, wireless technology designed for local area voice and data communications. Bluetooth technology provides a universal radio interface in the 2.45 GHz frequency band that enables portable electronic devices to connect and communicate wirelessly via short-range ad hoc networks. Bluetooth technology is described, for example, in Haartsen,

Bluetooth-The Universal Radio Interface for Ad Hoc, Wireless Connectivity, Ericsson Review No. 3, 1998, pp. 110-117, the disclosure of which is hereby incorporated herein by reference.

5

Summary of the Invention

Embodiments of the present invention can provide a multiple-entry phonebook which may contain multiple access numbers for each entity and also may contain user preferences as to which access number to try first. The access numbers for each entity correspond to different transceivers which may be used in a wireless communications terminal to communicate, for example, with a first wireless communication system and with a second wireless communication system over a shorter distance than the first transceiver.

More specifically, according to embodiments of the present invention, a wireless communications terminal includes a first transceiver that communicates with a first wireless communications system such as a cellular communications system. A second transceiver communicates with a second wireless communications system that typically has a shorter range than the first transceiver, such as a Bluetooth or FRS system. A multiple entry phonebook includes a first wireless communications system access number and a second wireless communications system access number for each of at least one entity. The wireless communications terminal includes a controller and/or other means that determines whether to use the first wireless communications system access number or the second wireless communications system access number in response to a request to call the corresponding entity. A wireless communication is initiated with the entity over the first wireless communications system using the first transceiver access number and the first transceiver or over the second communications system using the second transceiver access number and the second transceiver, in response to this determination.

According to other embodiments of the present invention, a wireless communication is initiated with the entity over the second wireless communications system using the second transceiver access number and the second transceiver if it is determined that the second transceiver access number is preferred for wireless communications with the entity. The wireless communications terminal is connected with the entity over the second wireless communications system using the second transceiver if wireless communications with the entity are available over the second

wireless communications system. The wireless communications terminal is connected with the entity over the first wireless communications system using the first transceiver if wireless communications with the entity are not available over the second wireless communications system.

5 According to other embodiments of the present invention, the multiple-entry phonebook includes an indicium as to whether the first wireless communications system access number or the second wireless communications system access number is preferred for wireless communications with the entity. A default indicium also may be included. The indicium may be set and/or changed using conventional wireless
10 terminal programming techniques. Thus, in communicating with an entity a user may specify that a short range, wireless communications system such as Bluetooth or FRS should be used for communication if this mode is available. If this mode is not available then a cellular and/or satellite radiotelephone system may be used. The costs of using a cellular and/or satellite radiotelephone system therefore may be
15 bypassed when other communications systems are available.

Embodiments of the present invention also may provide alternative communication in areas where no wireless infrastructure is present or where cellular access is difficult. For example, embodiments of the present invention may allow wireless terminals to communicate when in an isolated area, as long as the wireless
20 communications terminals are within a certain distance of one another. Embodiments of the present invention also may allow users to communicate within large buildings such as a shopping mall or office building, where cellular radiotelephone signals may be weak. Accordingly, embodiments of the present invention can provide users with communications terminals and methods that can be cost effective and can operate in a
25 variety of environments and conditions.

Brief Description of the Drawings

Figures 1A and 1B schematically illustrate wireless communications systems according to embodiments of the present invention.

30 Figure 2 is a block diagram of wireless communications terminals according to embodiments of the present invention.

Figure 3 is a schematic block diagram of wireless communications terminals according to other embodiments of the present invention.

Figure 4 illustrates a multiple-entry phonebook according to embodiments of the present invention.

Figure 5 is a flow chart illustrating wireless communications terminal operations according to embodiments of the present invention.

5

Detailed Description of Preferred Embodiments

The present invention now will be described with reference to the accompanying drawings, in which the preferred embodiments of the invention are shown. However, this invention may be embodied in many different forms and
10 should not be construed as limited to the specific embodiments shown. Rather, the preferred embodiments are provided so that this disclosure is thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

Figures 1A and 1B are conceptual illustrations of wireless communications systems and methods according to embodiments of the present invention. In
15 particular, Figures 1A and 1B illustrate a wireless communication among multi-mode wireless communications terminals **110a** and **110b**. It will be understood by those having skill in the art that the term "wireless communications terminal" is used herein to include analog and digital cellular and satellite radiotelephones, multiple mode radiotelephones, high function personal communications systems (PCS) devices that
20 may include large displays, scanners, full size keyboards and the like, and laptop, palmtop and pervasive computing devices that include wireless communications capabilities.

In particular, the wireless communications terminals **110a** and **110b** include a first transceiver that communicates with a first wireless communications system and a
25 second transceiver that communicates with a second wireless communications system that has a shorter range than the first wireless communications system. Thus, for example, as shown in Figure 1A, the first wireless communications system may be a cellular radiotelephone communications system **100**, including analog and/or digital, terrestrial and/or satellite wireless communications systems. As shown in Figure 1A,
30 the system **100** may include at least one radio network station **125** such as a cellular radiotelephone base station that provides communications between terminals **110a** and **110b** over first wireless communications system links **115**. The radio network station **125** may be connected to a wire network **135** as is known to those having skill in the art. The wireless communications terminals **110a** and **110b** may communicate

with one another over a wide area that is covered by the system **100** including one or more cells and/or one or more satellite beams.

Referring now to Figure 1B, when the first and second wireless communications terminals **110a** and **110b** are within a limited range of one another communications also may take place using the second wireless communications system **120** over a second wireless communications system link **105**. In embodiments of the present invention the second wireless communications system may be an unlicensed wireless communications system such as the Bluetooth system or an FRS system. Thus, in embodiments of the present invention, a cellular and/or satellite radiotelephone may be equipped with a limited-distance wireless transceiver, such as a Bluetooth transceiver or an FRS transceiver. The Bluetooth transceiver may be used to communicate with nearby peripheral devices, such as laptop computers and personal digital assistants (PDAs). The FRS transceiver may be used to communicate with other nearby FRS transceivers.

Figure 2 is a block diagram of wireless communications terminals according to embodiments of the present invention. As shown, a wireless communications terminal **110** can be a cellular telephone, a satellite telephone, and/or a high function terminal that provides functions in addition to those of a cellular telephone, such as facsimile, data communications, data processing, word processing, and other personal communications systems functions. These high function terminals are often referred to as Personal Communications Systems (PCS). Multiple mode wireless communication terminals that embody two or more of these functions also are included. Other wireless communication terminals that may omit a display and/or a microphone, also are included. Moreover, any and all of the elements of Figure 2 may be embodied using one or more analog or digital integrated circuits, integrated circuit microprocessors that run a stored program, Application-Specific Integrated Circuits (ASIC), or any other combination of hardware and/or software.

As shown in Figure 2, the terminal **110** includes a first transceiver **210** that communicates with a first wireless communications system such as the system **100** of Figures 1A and 1B. The terminal **110** also includes a second transceiver **220** that communicates with a second wireless communications system such as the wireless communications system **120** of Figures 1A and 1B, that has a shorter range than the first wireless communications system. It will be understood by those having skill in the art that the first and second transceivers need not be two physically separate

devices but rather can be implemented using one physical device. Alternatively, the first and second transceivers **210** and **220** can share some circuitry.

Continuing with the description of Figure 2, the first transceiver **210** and the second transceiver **220** are both connected to an antenna **222**. Alternatively, the first
5 transceiver **210** and the second transceiver **220** may be connected to separate antennas.

The terminal **110** also includes a control processor **250** and storage **260** that may be separate from and/or may be incorporated into the control processor **250**. A transmit circuit **230** and a receive circuit **240** may perform transmit and receive signal
10 processing, respectively. It will be understood that the transmit circuit **230** and the receive circuit **240** can be embodied in a single digital signal processor or other element and/or may include shared circuitry.

As further shown in Figure 2, when the wireless communications terminal **110** is a wireless radiotelephone it preferably includes a keypad **272**, display **278**, a
15 speaker **274** and/or microphone **282**. In order to provide a wireless communications terminal for receiving transmission of audio, video, data and/or multimedia signals, the keypad **272** may be a full scale personal computer keyboard and the display **278** may be a large graphic display. A scanner **276** also may be provided as may other devices **284** such as disk drives and/or modems. The design and interconnection of
20 the individual elements of wireless communication terminal **110**, as described above, are well known to those having skill in the art and need not be described further herein. As will be described in detail below, in embodiments of the present invention a multiple-entry phonebook may be stored in storage **260** and used by the control processor **250** to control selection and use of the first or second transceiver **210** or
25 **220**, respectively.

Referring now to Figure 3, a block diagram of wireless communications terminals **300** according to other embodiments of the present invention is shown. Voice communications, for example from microphone **308**, may be converted from analog to digital by analog-to-digital converter (A-to-D) **310**. This can allow the
30 audio signal processing to be carried out digitally using digital signal processors. However, the signal also may be retained in analog form and/or originate in digital form. Once the signal is converted, it may proceed either to a source coder **352** or to second transceiver transmit circuitry **342** depending on the position of switch **324**. It will be understood by those having skill in the art that the switch **324** need not be a

physical switch and can be implemented by software and/or other means known in the art. The position of switch **324** may be determined by a controller **380** with reference to the user transceiver preference in a phonebook **390**, as will be described in detail below.

5 If switch **324** operates in position **322**, then the signal may proceed to the source coder **325**. Then it may proceed to the baseband circuitry **362** that interfaces with the first transceiver **372**. The first transceiver **372** may be connected to an antenna **374**.

10 In contrast, if switch **324** operates in position **326**, the signal may proceed to the transmit circuitry **342** of the second transceiver **340**. The second transceiver **340** is connected to the antenna **374** and transmits over a shorter distance than first transceiver **372**. Although antenna **374** is depicted as one antenna in Figure 3, two separate antennas also can be used. The second transceiver **340** may be, for example, a Bluetooth transceiver and/or an FRS transceiver.

15 Upon receiving a signal from the first wireless communications system via antenna **374** and the first transceiver **372**, the received signal may be processed by the baseband circuitry **362**. Then the signal may proceed to source decoder **354** and is finally converted from digital to analog by digital-to-analog converter (D-to-A) **312**. Switch **334** is in position **336** during this process, preferably under control of the
20 controller **380**. As with switch **324**, switch **334** need not be a physical switch.

 When a signal is received from the second wireless communications system via the antenna **374** and the second transceiver receive circuitry **344**, the signal may be applied to the digital-to-analog converter (D-to-A) **312** which converts the signal from digital to analog. Switch **334** is in position **332** during this process. The analog
25 signal may be converted to an audible signal by a loudspeaker **314** and/or further processed. The signal also may be received in analog form or may be retained in digital form.

 Still referring to Figure 3, the positions of switches **324** and **334** are controlled by the controller **380** to determine whether the first transceiver **372** or the second
30 transceiver **340** is used. As will be described in detail below, the controller **380** may be responsive to a multiple-entry phonebook **390** and also may be responsible to a Man Machine Interface (MMI) **382** that can allow, for example, user selection of preferences for the phonebook **390**. It also will be understood that the controller **380** may perform other control functions for the terminal **300**, such as controlling

operations of the first and second transceivers **372** and **340**, respectively, and may be integrated with other functions thereof.

Referring now to Figure 4, embodiments of multiple-entry phonebooks according to the present invention now will be described. A multiple-entry
5 phonebook **400** may contain an entity number, names, or other identification **405**, a first wireless system access number **410**, a second wireless system access number **420**, and a user system preference **430**, also referred to herein as an indicium, for each of one or more entities. It will be understood by those having skill in the art that the multiple-entry phonebook **400** can contain more or less information than the
10 information shown in Figure 4. The multiple-entry phonebook **400** may be stored in the storage **260** of Figure 2 and may be accessed through the control processor **250**. The multiple entry phonebook **400** may correspond to the phonebook **390** of Figure 3, and may be accessed through the controller **380**. Methods of storing information in memory and of accessing information stored in memory are known to one of skill in
15 the art and need not be discussed further herein.

The entity number **405** represents the person or entity the user may contact, for example using embodiments of Figure 2 and/or Figure 3. Each entity in the multiple entry phonebook **400** may have more than one associated access number. It will be understood by those having skill in the art that the multiple-entry phonebook **400** can
20 be accessed using any technique known in the art, for example, by dialing a conventional phone number on a keypad, using a preprogrammed speed dial function, using voice activated dialing and/or other conventional techniques.

The first wireless system access numbers **410**, preferably are wide-area access numbers, such as a standard phone number in a cellular, satellite and/or wire network.
25 The second wireless system access numbers **420** preferably are a Bluetooth or other local-area address, such as a packet-header address, an FRS radio channel, and/or a broadcast message channel.

Finally, the multiple-entry phonebook **400** may also contain an indicium, also referred to as a user system preference **430**. The user can indicate which transceiver
30 access number to try first with respect to each entity listed in the phonebook when initiating a call by setting the user system preference **430**. It will be understood by those having skill in the art that the user system preference may be set in many different ways. For example, the terminal may have a preprogrammed default preference if the user chooses not to set a preference. Alternatively, a user may be

prompted to select a preference when a call is initiated. In yet another alternative, a user may program the terminal to prefer a particular transceiver, for example, using conventional phonebook or speed dialing user programming techniques.

Referring now to Figure 5, operations of wireless communications terminals according to embodiments of the present invention now will be illustrated using flowchart illustrations of methods, apparatus (systems) and computer program products according to embodiments of the invention. It will be understood that each block of the flowchart illustrations, and combinations of blocks, can be implemented by computer program instructions. These computer program instructions may be provided to a processor of a general purpose computer, a special purpose computer, and/or other programmable data processing apparatus to produce a machine, such that the instructions, which execute via the processor of the computer and/or other programmable data processing apparatus, create structures for implementing the functions specified in the flowchart block or blocks. These computer program instructions also may be stored in a computer-readable memory that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable memory produce an article of manufacture including instructions which implement the function specified in the flowchart block or blocks.

The computer program instructions also may be loaded onto a computer or other programmable data processing apparatus to cause a series of operational steps to be performed on the computer or other programmable apparatus to produce a computer implemented process or method such that the instructions which execute on the computer or other programmable apparatus provide steps for implementing the functions specified in the flowchart block or blocks. For example, these operations may be executed by the control processor **250** of Figure 2 and/or the controller **380** of Figure 3.

Referring now to Figure 5, at block **510** a user of the wireless communications terminal may request to call an entity. The request can be in any form known in the art for initiating a call. For example, the user may dial a conventional phone number, push a preprogrammed speed dial function, and/or use voice activated dialing. Then, at block **520**, a determination is made as to which access number to use to contact the entity. For example, the determination may be made as to whether to use the first wireless communications system access number or the second wireless

communications system access number in response to a request to call the corresponding entity. This determination is made with reference to the user system preference **430**. If no preference is indicated a default access number may be used. It will be understood by those having skill in the art that the default access number can be set to any access number and is not limited to a specific access number.

Then, at block **530**, the call can be initiated using the access number that was determined and using the associated transceiver. For example, a wireless communication is initiated with the entity over the first wireless communications system using the first transceiver access number and the first transceiver or over the second wireless communications system using the second transceiver access number and the second transceiver, in response to the determination. In a specific example, if it is determined in block **520** that the second transceiver access number should be used, then the second transceiver is used to call the second transceiver access number.

Then, at block **540** a determination is made as to whether the call can be completed. If the call can be completed, then at block **560** the user is connected to the entity using the selected transceiver and the access number that were initially determined. Stated differently, the wireless communications terminal is connected with the entity over the second wireless communications system using the second transceiver if wireless communications with the entity are available over the second wireless communications system. Alternatively, as shown in block **550**, if wireless communications with the entity are not available over the second wireless communications system then the wireless communications terminal can be connected with the entity over the first wireless communications system using the first transceiver.

In reference to block **540** in Figure 5, the call may not be completed for many reasons. For example, if the terminals are not within range of each other then the second transceiver may be unavailable because it may operate over a limited distance. Alternatively, the entity may have disabled communications over the selected wireless communications system, or infrastructure may not be in place at the location in question to support the selected wireless communications system.

Accordingly, embodiments of wireless communications terminals and methods according to the present invention may utilize a multiple-entry phonebook to access different wireless communications systems. Each of these communications systems may have its own transceiver and each transceiver may have its own

transceiver access number. These transceiver access numbers may be stored in the multiple-entry phonebook and used to access different wireless communications systems.

Thus, for example, a cellular telephone that incorporates a local-area walkie-talkie transceiver can include a double entry phonebook. When the user of the cellular telephone dials a number to place a call, the double entry phonebook is consulted to see if the cellular number can be associated with a walkie-talkie access number. If the association is positive, the cellular telephone attempts to place the call over the walkie-talkie rather than the cellular network. If this attempt fails, or if no association is found in the phonebook, the cellular telephone places the call conventionally over the cellular network. In preferred embodiments, the walkie-talkie is provided by an integrated Bluetooth transceiver and/or an FRS transceiver. For a Bluetooth transceiver a packet header address may be used as an access number. For an FRS transceiver, the access number may be a prearranged radio channel that the entity is known to monitor, rather than a packet header address. In other cases, the access number may be an address, in which case the cellular radiotelephone can transmit a rudimentary broadcast message according to the physical layer needs of the local area communications system.

While the present invention has been described with respect to its preferred embodiment, those skilled in the art will recognize that the present invention is not limited to the specific embodiment described and illustrated herein. Different embodiments and adaptations besides those shown herein and described as well as many variations, modifications and equivalent arrangements will now be apparent or will be reasonably suggested by the foregoing specification and drawings, without departing from the substance or scope of the invention. Accordingly, it is intended that the invention be limited only by the spirit and scope of the claims appended hereto.

What is Claimed is:

1. A wireless communications terminal comprising:
 - a first transceiver that communicates with a first wireless communications system;
 - a second transceiver that communicates with a second wireless
 - 5 communications system and has a shorter range than the first transceiver;
 - a multiple-entry phonebook comprising a first wireless communications system access number and a second wireless communications system access number for each of at least one entity;
 - means for determining whether to use the first wireless communications
 - 10 system access number or the second wireless communications system access number in response to a request to call the corresponding entity; and
 - means for initiating a wireless communication with the entity over the first wireless communications system using the first transceiver access number and the first transceiver or over the second wireless communications system using the second
 - 15 transceiver access number and the second transceiver in response to the means for determining.
2. The wireless communications terminal of Claim 1, wherein the means for initiating comprises:
 - means for initiating a wireless communication with the entity over the second wireless communications system using the second transceiver access number and the
 - 5 second transceiver, if the means for determining determines that the second transceiver access number is preferred for wireless communications with the entity;
 - means for connecting the wireless communications terminal with the entity over the second wireless communications system using the second transceiver if wireless communications with the entity are available over the second wireless
 - 10 communications system; and
 - means for connecting the wireless communications terminal with the entity over the first wireless communications system using the first transceiver if wireless communications with the entity are not available over the second wireless communications system.

3. The wireless communications terminal of Claim 1, wherein the multiple-entry phonebook includes an indicium as to whether the first wireless communications system access number or the second wireless communications system access number is preferred for wireless communications with the entity.

4. The wireless communications terminal of Claim 3, wherein the means for initiating comprises:

means for initiating a wireless communication with the entity over the second wireless communications system using the second transceiver access number and the second transceiver, if the indicium indicates that the second wireless communications system access number is preferred for wireless communications with the entity;

means for connecting the wireless communications terminal with the entity over the second wireless communications system using the second transceiver if wireless communications with the entity are available over the second wireless communications system; and

means for connecting the wireless communications terminal with the entity over the first wireless communications system using the first transceiver if wireless communications with the entity are not available over the second wireless communications system.

5. The wireless communications terminal of Claim 1, wherein the first wireless communications system access number comprises a wide-area address and wherein the second wireless communications system access number comprises a local area address.

6. The wireless communications terminal of Claim 5, wherein the local-area address comprises a packet-header address.

7. The wireless communications terminal of Claim 5, wherein the local-area address comprises a radio channel.

8. The wireless communications terminal of Claim 5, wherein the local area address comprises a broadcast message channel number.

9. The wireless communications terminal of Claim 5, wherein the local area address comprises a Bluetooth transceiver address.

10. The wireless communications terminal of Claim 5, wherein the local area address comprises a Family Radio Service (FRS) transceiver channel.

11. A wireless communications terminal comprising:
a first transceiver that communicates with a first wireless communications system;
a second transceiver that communicates with a second wireless communications system and has a shorter range than the first transceiver;
a multiple-entry phonebook comprising a first wireless communications system access number and a second wireless communications system access number for each of at least one entity; and
a controller that is configured to determine whether to use the first wireless communications system access number or the second wireless communications system access number in response to a request to call the corresponding entity, and that is further configured to initiate a wireless communication with the entity over the first wireless communications system using the first transceiver access number and the first transceiver or over the second wireless communications system using the second transceiver access number and the second transceiver in response to the determination.

12. The wireless communications terminal of Claim 11, wherein the controller is further configured to:
initiate a wireless communication with the entity over the second wireless communications system using the second transceiver access number and the second transceiver, if the controller determines that the second transceiver access number is preferred for wireless communications with the entity;
connect the wireless communications terminal with the entity over the second wireless communications system using the second transceiver if wireless communications with the entity are available over the second wireless communications system; and

connect the wireless communications terminal with the entity over the first wireless communications system using the first transceiver if wireless communications with the entity are not available over the second wireless communications system.

13. The wireless communications terminal of Claim 11, wherein the multiple-entry phonebook includes an indicium as to whether the first wireless communications system access number or the second wireless communications system access number is preferred for wireless communications with the entity.

14. The wireless communications terminal of Claim 13, wherein the controller is further configured to:

initiate a wireless communication with the entity over the second wireless communications system using the second transceiver access number and the second transceiver, if the indicium indicates that the second wireless communications system access number is preferred for wireless communications with the entity;

connect the wireless communications terminal with the entity over the second wireless communications system using the second transceiver if wireless communications with the entity are available over the second wireless communications system; and

connect the wireless communications terminal with the entity over the first wireless communications system using the first transceiver if wireless communications with the entity are not available over the second wireless communications system.

15. The wireless communications terminal of Claim 11, wherein the first wireless communications system access number comprises a wide-area address and wherein the second wireless communications system access number comprises a local area address.

16. The wireless communications terminal of Claim 15, wherein the local-area address comprises a packet-header address.

17. The wireless communications terminal of Claim 15, wherein the local-area address comprises a radio channel.

18. The wireless communications terminal of Claim 15, wherein the local area address comprises a broadcast message channel number.

19. The wireless communications terminal of Claim 15, wherein the local area address comprises a Bluetooth transceiver address.

20. The wireless communications terminal of Claim 15, wherein the local area address comprises a Family Radio Service (FRS) transceiver channel.

21. A wireless communications method for a wireless communications terminal that includes a first transceiver that communicates with a first wireless communications system and a second transceiver that communicates with a second wireless communications system and has a shorter range than the first transceiver, the
5 method comprising:

accessing a multiple-entry phonebook comprising a first wireless communications system access number and a second wireless communications system access number for each of at least one entity;

determining whether to use the first wireless communications system access
10 number or the second wireless communications system access number in response to a request to call the corresponding entity; and

initiating a wireless communication with the entity over the first wireless communications system using the first transceiver access number and the first transceiver or over the second wireless communications system using the second
15 transceiver access number and the second transceiver in response to the step of determining.

22. The method of Claim 21, wherein the step of initiating comprises:

initiating a wireless communication with the entity over the second wireless communications system using the second transceiver access number and the second transceiver, if the step of determining determines that the second transceiver access
5 number is preferred for wireless communications with the entity;

connecting the wireless communications terminal with the entity over the second wireless communications system using the second transceiver if wireless communications with the entity are available over the second wireless communications system; and

- 10 connecting the wireless communications terminal with the entity over the first wireless communications system using the first transceiver if wireless communications with the entity are not available over the second wireless communications system.

23. The method of Claim 21, wherein the multiple-entry phonebook includes an indicium as to whether the first wireless communications system access number or the second wireless communications system access number is preferred for wireless communications with the entity.

24. The method of Claim 23, wherein the step of initiating comprises:
initiating a wireless communication with the entity over the second wireless communications system using the second transceiver access number and the second transceiver, if the indicium indicates that the second wireless communications system
5 access number is preferred for wireless communications with the entity;

connecting the wireless communications terminal with the entity over the second wireless communications system using the second transceiver if wireless communications with the entity are available over the second wireless communications system; and

- 10 connecting the wireless communications terminal with the entity over the first wireless communications system using the first transceiver if wireless communications with the entity are not available over the second wireless communications system.

25. The method of Claim 21, wherein the first wireless communications system access number comprises a wide-area address and wherein the second wireless communications system access number comprises a local area address.

26. The method of Claim 25, wherein the local-area address comprises a packet-header address.

27. The method of Claim 25, wherein the local-area address comprises a radio channel.

28. The method of Claim 25, wherein the local area address comprises a broadcast message channel number.

29. The method of Claim 25, wherein the local area address comprises a Bluetooth transceiver address.

30. The method of Claim 25, wherein the local area address comprises a Family Radio Service (FRS) transceiver channel.

31. A wireless communications terminal comprising:
a cellular radiotelephone transceiver that communicates with a cellular radiotelephone communications system;
a Family Radio Service (FRS) transceiver that communicates with an FRS communications system;
5 a multiple-entry phonebook comprising a cellular access number and an FRS access channel number for each of at least one entity; and
a controller that is configured to determine whether to use the cellular access number or the FRS access channel number in response to a request to call the
10 corresponding entity, and that is further configured to initiate a wireless communication with the entity over the cellular radiotelephone communications system using the cellular access number and the cellular radiotelephone transceiver or over the FRS communications system using the FRS access channel number and the FRS transceiver in response to the determination.

32. The wireless communications terminal of Claim 31, wherein the controller is further configured to:

initiate a wireless communication with the entity over the FRS communications system using the FRS access channel number and the FRS transceiver, if the controller determines that the FRS access channel number is
5 preferred for wireless communications with the entity;

- connect the wireless communications terminal with the entity over the FRS communications system using the FRS transceiver if wireless communications with the entity are available over the FRS communications system; and
- 10 connect the wireless communications terminal with the entity over the cellular radiotelephone communications system using the cellular radiotelephone transceiver if wireless communications with the entity are not available over the FRS communications system.

33. The wireless communications terminal of Claim 31, wherein the multiple-entry phonebook includes an indicium as to whether the cellular access number or the FRS access channel number is preferred for wireless communications with the entity.

34. A wireless communications terminal comprising:
- a cellular radiotelephone transceiver that communicates with a cellular radiotelephone communications system;
- a Bluetooth transceiver that communicates with a Bluetooth wireless
- 5 communications system;
- a multiple-entry phonebook comprising a cellular access number and a Bluetooth address for each of at least one entity; and
- a controller that is configured to determine whether to use the cellular access number or the Bluetooth address in response to a request to call the corresponding
- 10 entity, and that is further configured to initiate a wireless communication with the entity over the cellular radiotelephone communications system using the cellular access number and the cellular radiotelephone transceiver or over the Bluetooth wireless communications system using the Bluetooth address and the Bluetooth transceiver in response to the determination.

35. The wireless communications terminal of Claim 34, wherein the controller is further configured to:
- initiate a wireless communication with the entity over the Bluetooth wireless communications system using the Bluetooth address and the Bluetooth transceiver, if
- 5 the controller determines that the Bluetooth address is preferred for wireless communications with the entity;

connect the wireless communications terminal with the entity over the Bluetooth wireless communications system using the Bluetooth transceiver if wireless communications with the entity are available over the Bluetooth wireless
10 communications system; and

connect the wireless communications terminal with the entity over the cellular radiotelephone communications system using the cellular radiotelephone transceiver if wireless communications with the entity are not available over the Bluetooth communications system.

36. The wireless communications terminal of Claim 34, wherein the multiple-entry phonebook includes an indicium as to whether the cellular access number or the Bluetooth address is preferred for wireless communications with the entity.

FIG. 1A

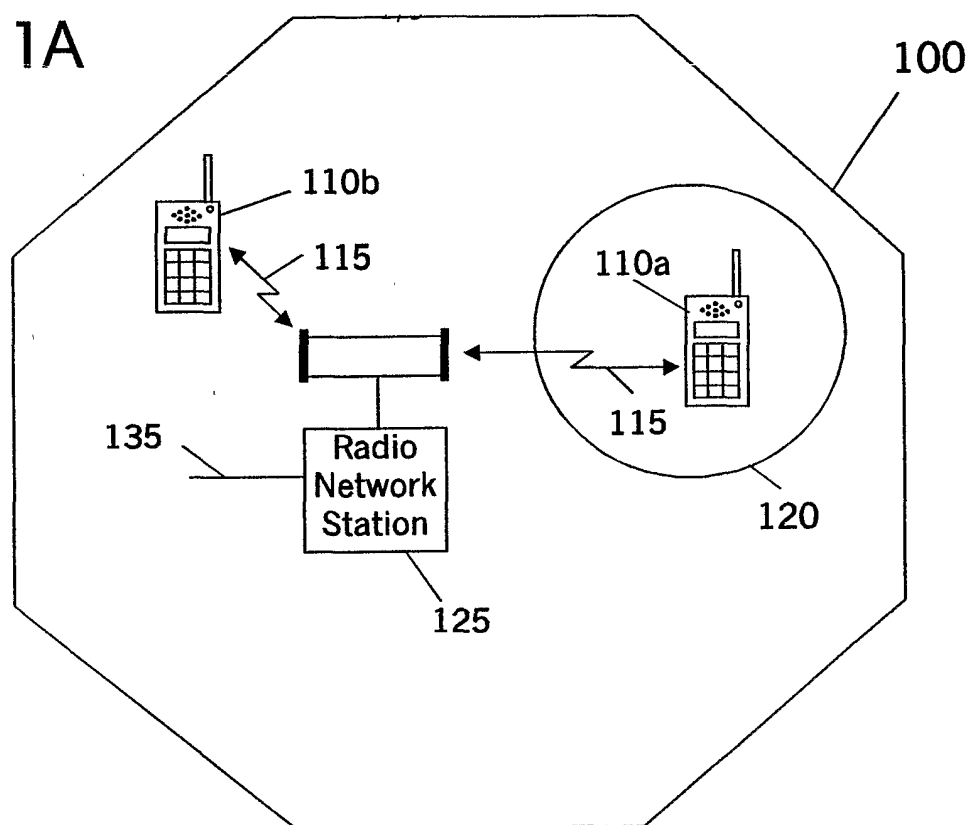


FIG. 1B

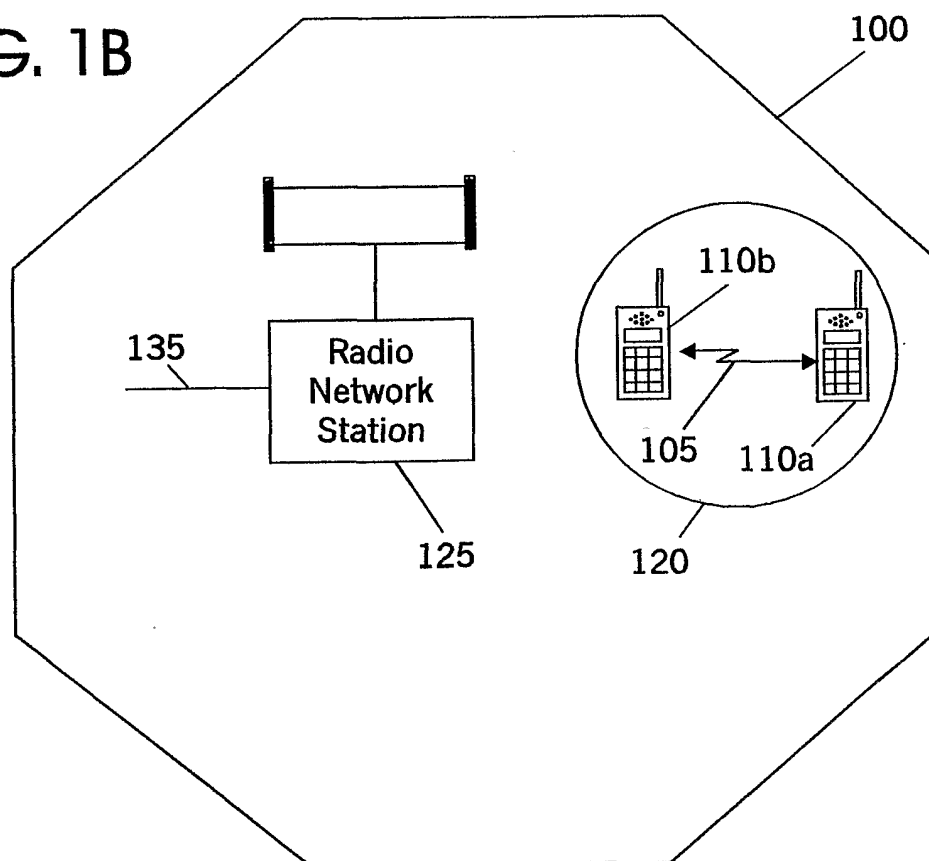
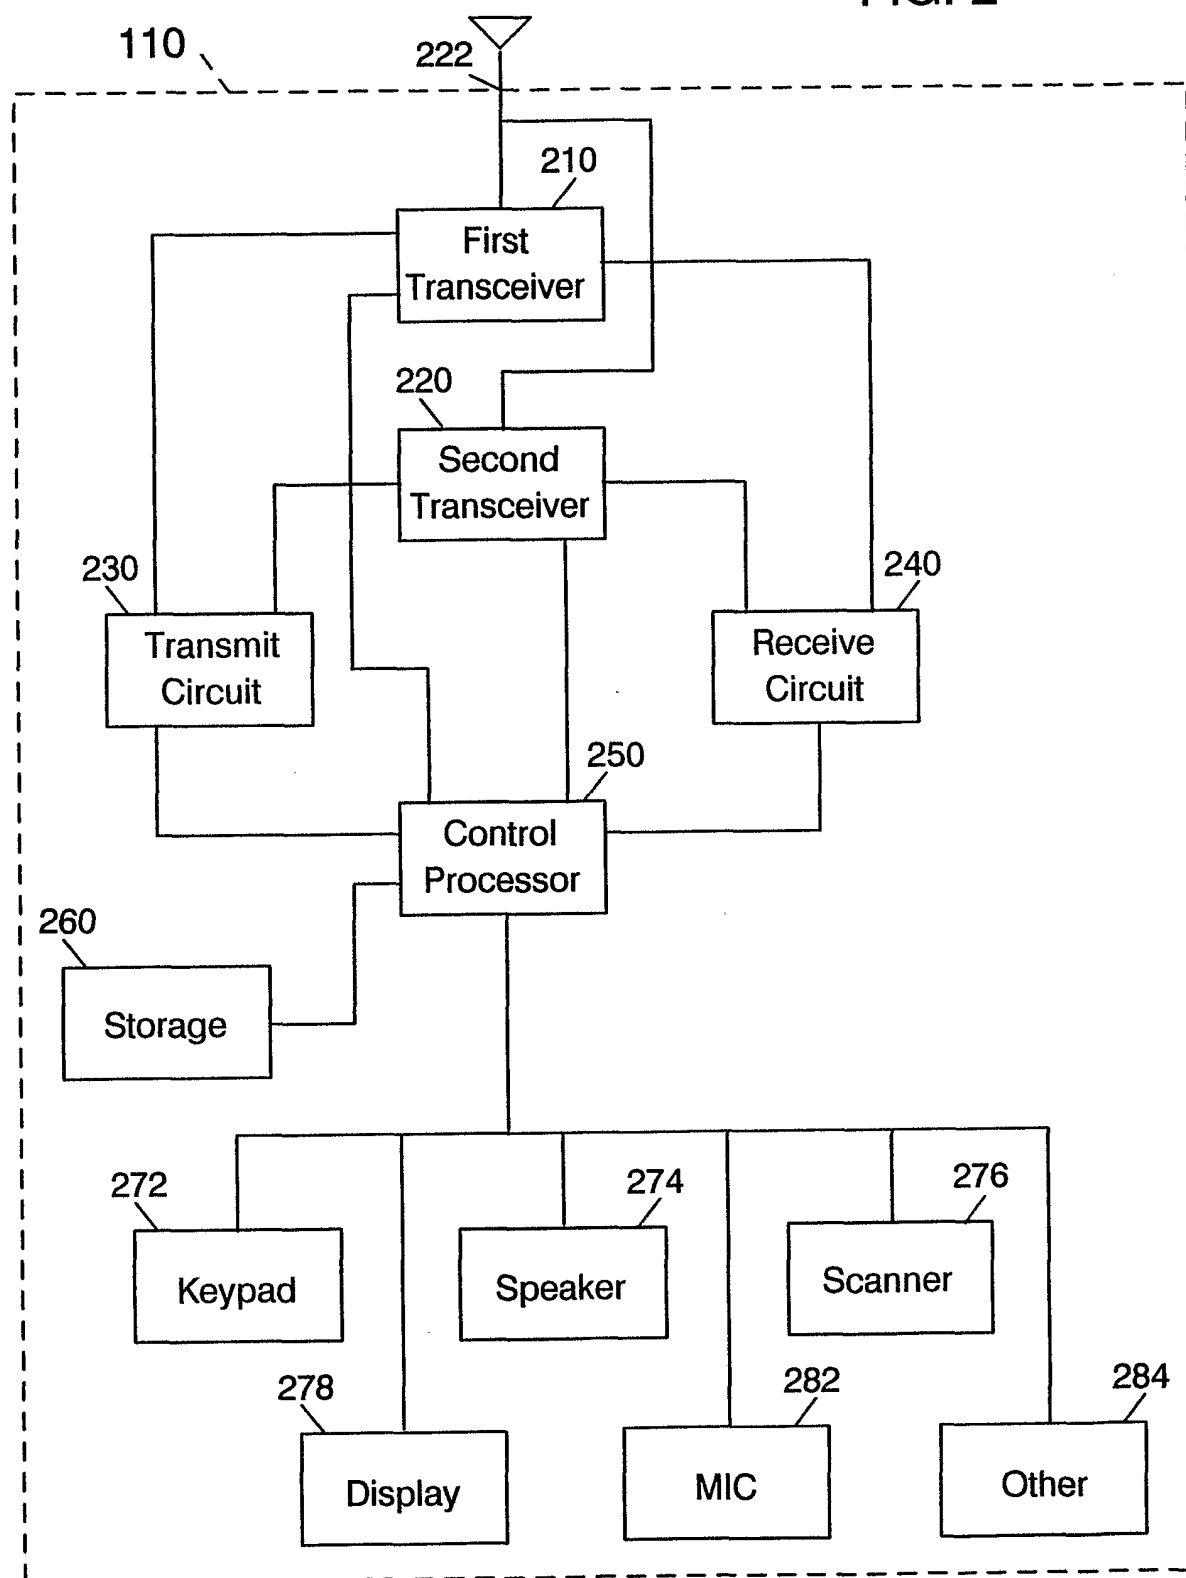


FIG. 2



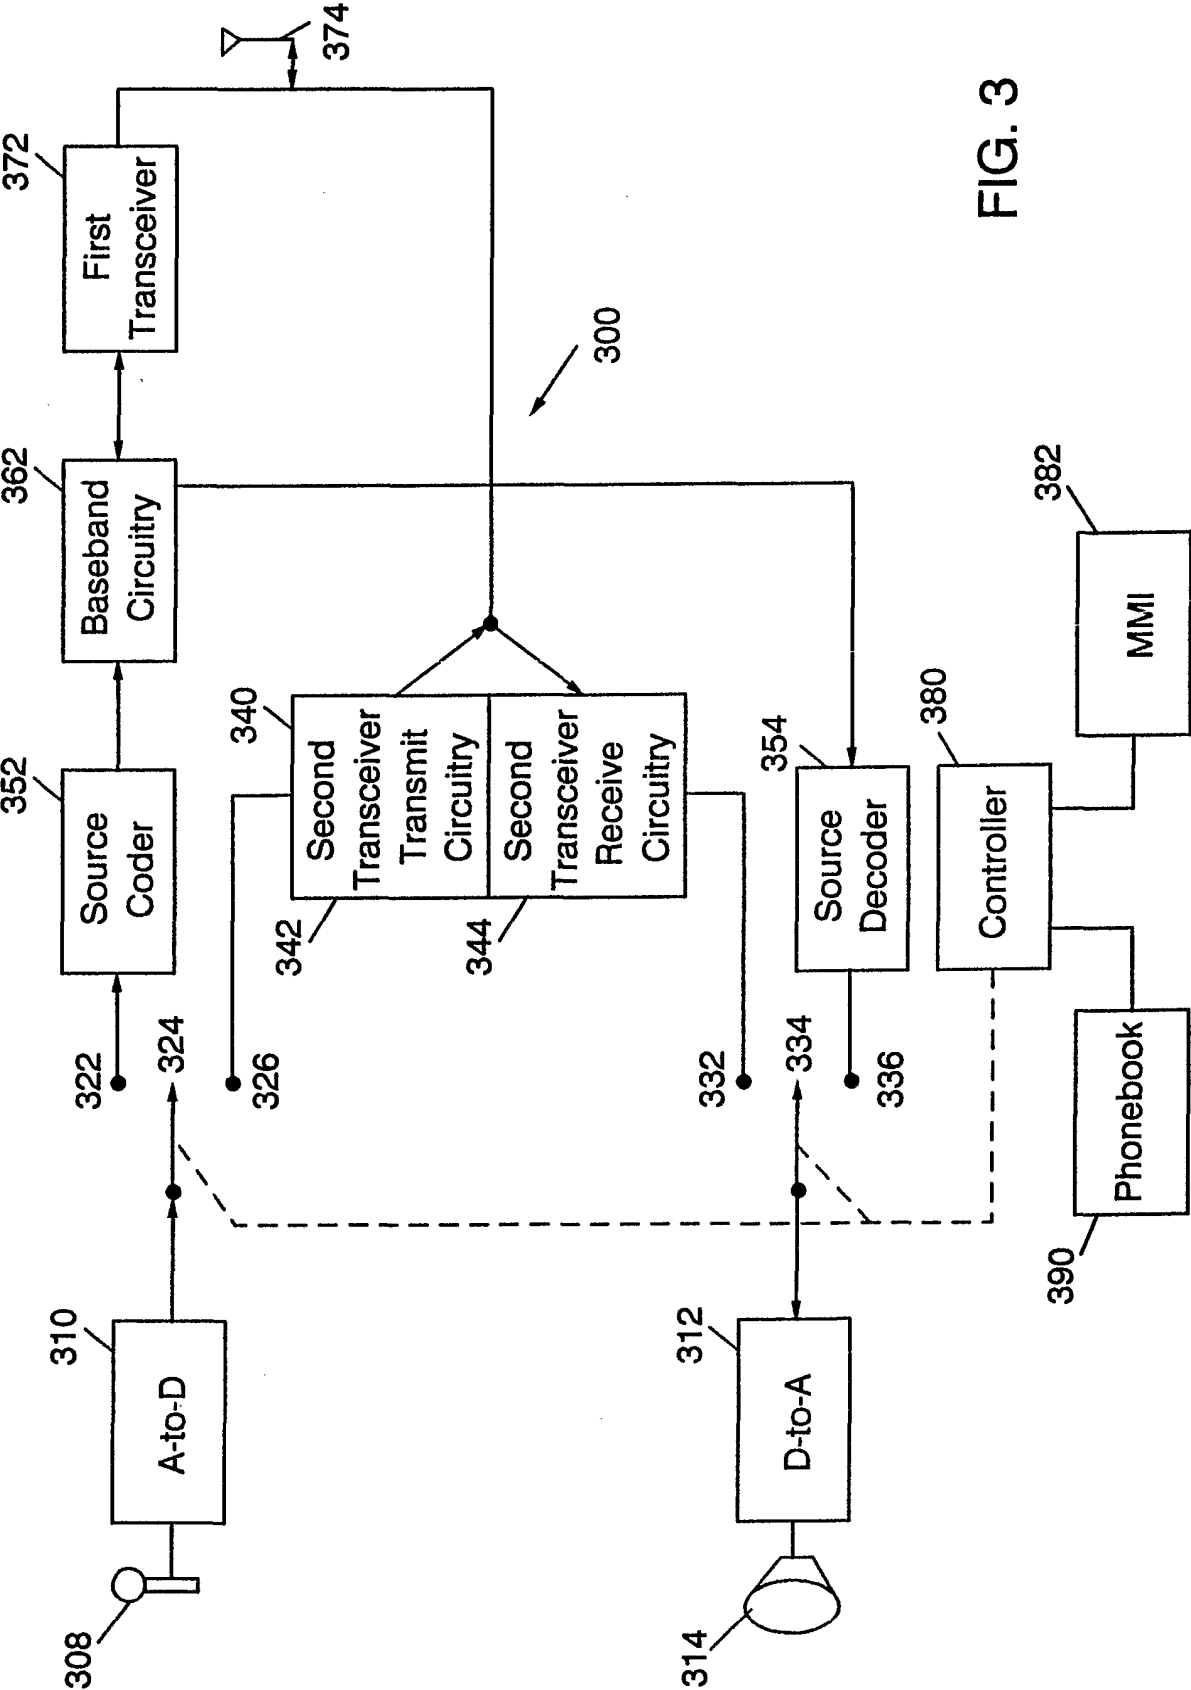


FIG. 3

FIG. 4

400

Entity	First Wireless System Access Numbers	Second Wireless System Access Numbers	User System Preference
1	Standard Phone Number	Bluetooth Address	First/ Second
2	Standard Phone Number	FRS - Radio Channel	First/ Second
3	Standard Phone Number	Broadcast Message	First/ Second
⋮	⋮	⋮	⋮

FIG. 5

