



(22) Date de dépôt/Filing Date: 2012/07/27

(41) Mise à la disp. pub./Open to Public Insp.: 2012/10/09

(45) Date de délivrance/Issue Date: 2013/10/01

(30) Priorités/Priorities: 2011/07/27 (US61/512,266);
2012/01/16 (US61/587,040)

(51) Cl.Int./Int.Cl. *A42B 3/04* (2006.01)

(72) Inventeurs/Inventors:

DUROCHER, JACQUES, CA;
LAPERRIERE, JEAN-FRANCOIS, CA;
GENEREUX, MARIE-CLAUDE, CA;
COTE, DENIS, CA


(73) Propriétaire/Owner:

BAUER HOCKEY CORP., CA

(74) Agent: SMART & BIGGAR

(54) Titre : CASQUE DE SPORT AVEC PROTECTION CONTRE LES IMPACTS PAR ROTATION

(54) Title: SPORTS HELMET WITH ROTATIONAL IMPACT PROTECTION

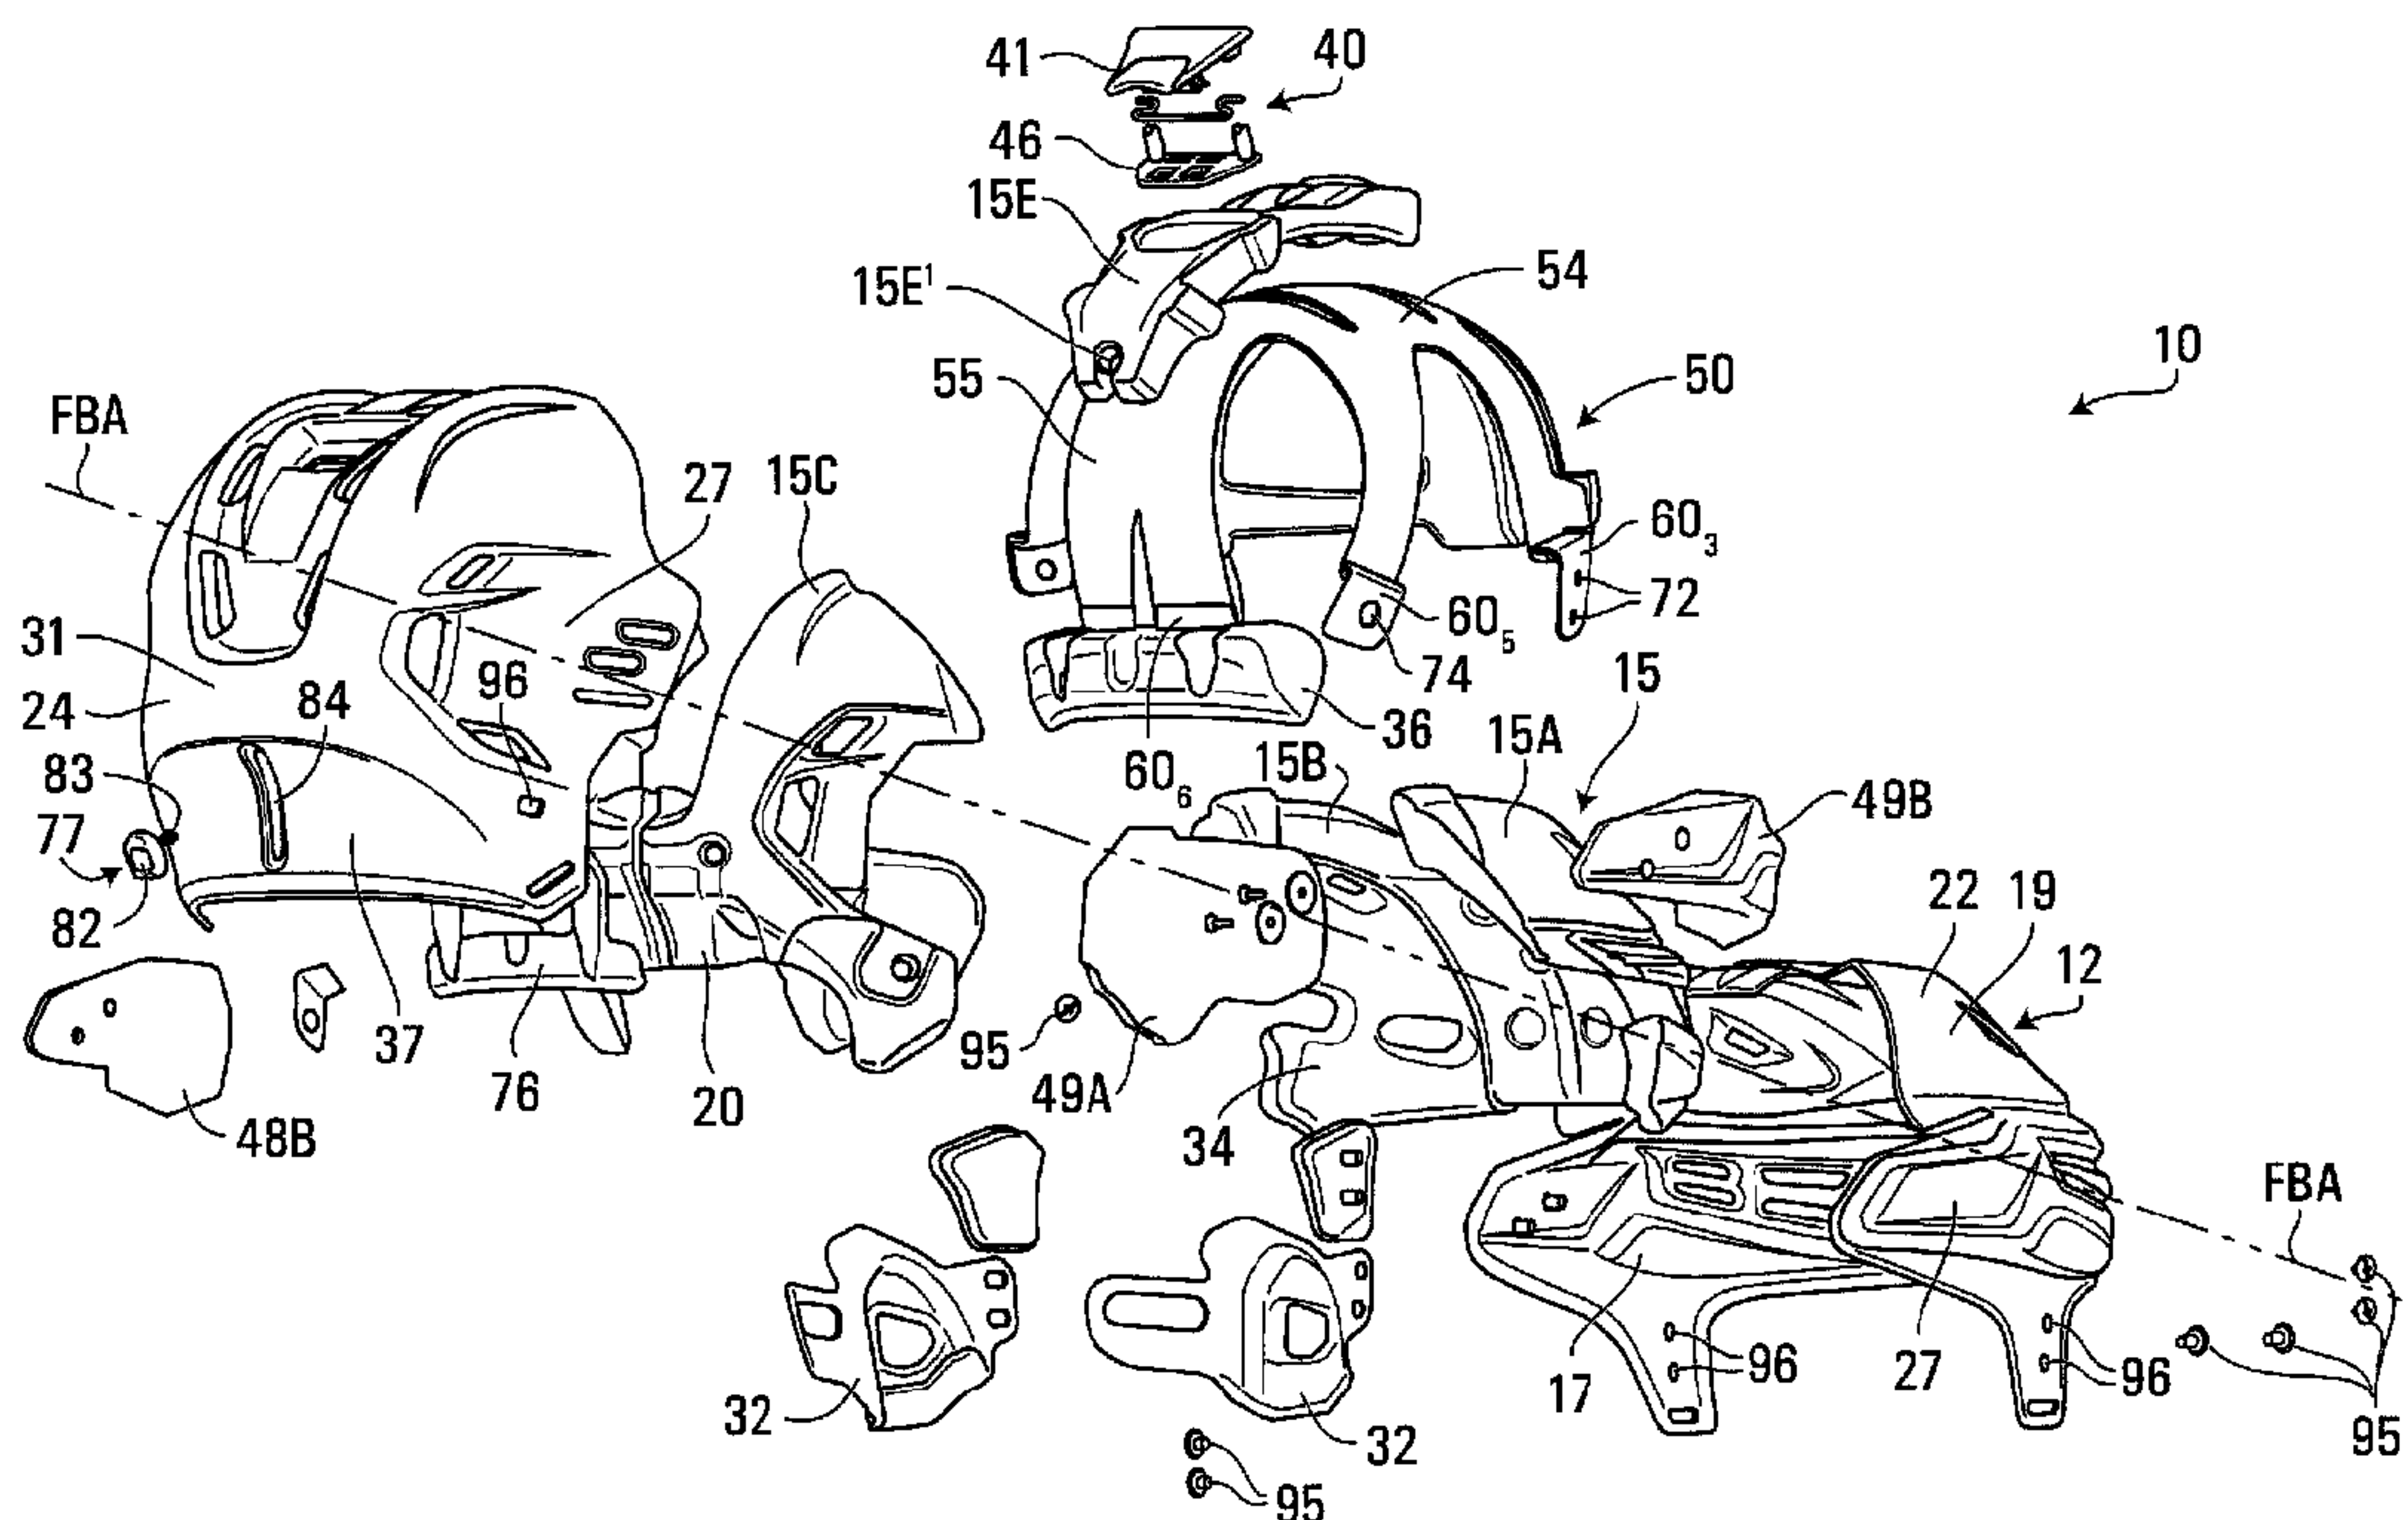

(57) Abrégé/Abstract:

A sports helmet for protecting a head of a wearer, comprising: an outer shell comprising an external surface of the sports helmet; inner padding disposed between the outer shell and the wearer's head; an adjustment mechanism operable by the wearer to vary an internal volume of the cavity to adjust a fit of the sports helmet on the wearer's head; and a rotational impact protection device disposed between the external surface of the sports helmet and the wearer's head when the sports helmet is worn, the rotational impact protection device comprising a surface movable relative to the external surface of the sports helmet in response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact, the surface of the rotational impact protection device undergoing displacement when the adjustment mechanism is operated by the wearer to vary the internal volume of the cavity.



ABSTRACT

A sports helmet for protecting a head of a wearer, comprising: an outer shell comprising an external surface of the sports helmet; inner padding disposed
5 between the outer shell and the wearer's head; an adjustment mechanism operable by the wearer to vary an internal volume of the cavity to adjust a fit of the sports helmet on the wearer's head; and a rotational impact protection device disposed between the external surface of the sports helmet and the wearer's head when the sports helmet is worn, the rotational impact protection device comprising a surface
10 movable relative to the external surface of the sports helmet in response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact, the surface of the rotational impact protection device undergoing displacement when the adjustment mechanism is operated by the wearer to vary the internal volume of the cavity.

SPORTS HELMET WITH ROTATIONAL IMPACT PROTECTION

Field of the invention

- 5 The invention relates generally to a sports helmet providing protection against rotational impacts.

Background of the invention

- 10 Helmets are worn in sports and other activities to protect their wearers against head injuries. To that end, helmets typically comprise a rigid outer shell and inner padding to absorb energy when impacted.

- Various types of impacts are possible. For example, a helmet may be subjected to a
15 radial impact in which an impact force is normal to the helmet and thus tends to impart a translational movement to the helmet. A helmet may also be subjected to a rotational impact which tends to impart an angular movement to the helmet. The rotational impact can be a tangential impact in which an impact force is tangential to the helmet or, more commonly, an oblique impact in which an impact force is oblique
20 to the helmet and has both a radial impact force component and a tangential impact force component.

- A rotational impact results in angular acceleration of the wearer's brain within his/her skull. This can cause serious injuries such as concussions, subdural hemorrhage, or
25 nerve damage. Linear acceleration also results if the rotational impact is oblique.

Although helmets typically provide decent protection against radial impacts, their protection against rotational impacts is usually deficient. This is clearly problematic given the severity of head injuries caused by rotational impacts.

For these and other reasons, there is a need for improvements directed to providing a sports helmet providing protection against rotational impacts.

Summary of the invention

5

According to an aspect of the invention, there is provided a sports helmet for protecting a head of a wearer and comprising a rotational impact protection device.

According to one aspect, the invention provides a sports helmet for protecting a
10 head of a wearer, the sports helmet defining a cavity for receiving the wearer's head, the sports helmet comprising: (a) an outer shell comprising an external surface of the sports helmet; (b) inner padding disposed between the outer shell and the wearer's head when the sports helmet is worn; (c) an adjustment mechanism operable by the wearer to vary an internal volume of the cavity to adjust a fit of the
15 sports helmet on the wearer's head; and (d) a rotational impact protection device disposed between the external surface of the sports helmet and the wearer's head when the sports helmet is worn, the rotational impact protection device comprising a surface movable relative to the external surface of the sports helmet in response to a rotational impact on the outer shell to absorb rotational energy from the rotational
20 impact, the surface of the rotational impact protection device undergoing displacement when the adjustment mechanism is operated by the wearer to vary the internal volume of the cavity.

According to another aspect, the invention provides a sports helmet for protecting a
25 head of a wearer, the sports helmet defining a cavity for receiving the wearer's head, the sports helmet comprising: (a) an outer shell comprising an external surface of the sports helmet; (b) inner padding disposed between the outer shell and the wearer's head when the sports helmet is worn; (c) an adjustment mechanism for adjusting an internal volume of the cavity to adjust a fit of the sports helmet on the
30 wearer's head; and (d) a floating liner disposed between the inner padding and the wearer's head when the sports helmet is worn, the floating liner being movable

relative to the outer shell in response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact, the floating liner being configured to accommodate adjustment of the internal volume of the cavity when the adjustment mechanism is operated by the wearer.

5

According to another aspect, the invention provides a sports helmet for protecting a head of a wearer, the sports helmet defining a cavity for receiving the wearer's head, the sports helmet comprising: (a) an outer shell comprising an external surface of the sports helmet; (b) inner padding disposed between the outer shell and the
10 wearer's head when the sports helmet is worn; and (c) a floating liner disposed between the inner padding and the wearer's head when the sports helmet is worn, the floating liner being movable relative to the outer shell in response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact, the floating liner comprising stretchable material such that at least part of the rotational
15 energy is absorbed by stretching of the stretchable material.

According to a further aspect, the invention provides a sports helmet for protecting a head of a wearer, the sports helmet defining a cavity for receiving the wearer's head, the sports helmet comprising: (a) an outer shell comprising an external surface of
20 the sports helmet; (b) inner padding disposed between the outer shell and the wearer's head when the sports helmet is worn; and (c) a floating liner disposed between the inner padding and the wearer's head when the sports helmet is worn, the floating liner being movable relative to the outer shell and the inner padding in response to a rotational impact on the outer shell to absorb rotational energy from
25 the rotational impact, the floating liner comprising an inner surface for contacting the wearer's head and an outer surface facing the inner padding, the outer surface of the floating liner being in frictional engagement with the inner padding in response to the rotational impact such that at least part of the rotational energy is dissipated by friction between the inner padding and the outer surface of the floating liner, the
30 outer surface of the floating liner having a coefficient of friction with the inner padding of at least 0.2 measured according to ASTM G115-10.

According to another aspect, the invention provides a sports helmet for protecting a head of a wearer, the sports helmet defining a cavity for receiving the wearer's head, the sports helmet comprising: (a) an outer shell comprising an external surface of the sports helmet; (b) inner padding disposed between the outer shell and the
5 the sports helmet; (c) a floating liner disposed between the inner padding and the wearer's head when the sports helmet is worn, the floating liner being movable relative to the outer shell in response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact; and (d) an
10 occipital pad for engaging an occipital region of the wearer's head, the occipital pad being selectively movable relative to the outer shell, the floating liner being movable with the occipital pad during adjustment of the occipital pad.

According to a further aspect, the invention provides a sports helmet for protecting a
15 head of a wearer, the sports helmet defining a cavity for receiving the wearer's head, the sports helmet comprising: (a) an outer shell comprising an external surface of the sports helmet; (b) inner padding disposed between the outer shell and the wearer's head when the sports helmet is worn; and (c) a floating liner disposed
20 between the inner padding and the wearer's head when the sports helmet is worn, the floating liner being movable relative to the outer shell in response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact, the floating liner comprising a top portion for contacting a top region of the wearer's head and a plurality of branches extending downwardly from the top portion of the floating liner and arranged for contacting the wearer's head.

25

According to another aspect, the invention provides a sports helmet for protecting a head of a wearer, the sports helmet defining a cavity for receiving the wearer's head, the sports helmet comprising: (a) an outer shell comprising an external surface of the sports helmet; (b) inner padding disposed between the outer shell and the
30 wearer's head when the sports helmet is worn; and (c) a floating liner disposed between the inner padding and the wearer's head when the sports helmet is worn,

the floating liner being movable relative to the outer shell in response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact, wherein an interface between the floating liner and the inner padding is fastener-free at an apex of the interface between the floating liner and the inner padding.

5

According to a further aspect, the invention provides a hockey or lacrosse helmet for protecting a head of a hockey or lacrosse player, the helmet defining a cavity for receiving the player's head, the helmet comprising: (a) an outer shell comprising an external surface of the helmet, the outer shell comprising a first shell member and a
10 second shell member moveable relative to one another for adjusting an internal volume of the cavity to adjust a fit of the helmet on the player's head; (b) an inner padding disposed between the outer shell and the player's head when the helmet is worn; and (c) a floating liner disposed between the inner padding and the player's head when the helmet is worn, the floating liner being movable relative to the outer
15 shell in response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact, the floating liner being configured to accommodate adjustments of the internal volume of the cavity when the first shell member and the second shell member are moved relative to one another.

20 According to another aspect, the invention provides a sports helmet for protecting a head of a wearer, comprising: (a) an outer shell comprising an external surface of the sports helmet; (b) an inner padding disposed between the outer shell and the wearer's head when the sports helmet is worn, the inner padding defining a cavity for receiving the wearer's head; (c) a rotational impact protection device disposed
25 between the inner padding and the wearer's head when the sports helmet is worn; and (d) an adjustment mechanism operable by the wearer to vary an internal volume of the cavity to adjust a fit of the sports helmet on the wearer's head; wherein the outer shell comprises a first shell member and a second shell member moveable relative to one another once the adjustment mechanism is operated by the wearer to
30 vary the internal volume of the cavity; wherein the rotational impact protection device comprises a surface movable relative to the external surface of the sports helmet in

response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact; and wherein the rotational impact protection device has a portion that undergoes displacement when the first shell member and the second shell members are moved relative to one another.

5

According to a further aspect, the invention provides a sports helmet for protecting a head of a wearer, comprising: (a) an outer shell comprising an external surface of the sports helmet; (b) an inner padding disposed between the outer shell and the wearer's head when the sports helmet is worn, the inner padding defining a cavity for
10 receiving the wearer's head; (c) a floating liner disposed between the inner padding and the wearer's head when the sports helmet is worn; and (d) an adjustment mechanism operable by the wearer to vary an internal volume of the cavity to adjust a fit of the sports helmet on the wearer's head; wherein the outer shell comprises a first shell member and a second shell member moveable relative to one another once the
15 adjustment mechanism is operated by the wearer to vary the internal volume of the cavity; wherein the floating liner is movable relative to the outer shell in response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact; and wherein the floating liner has a portion that undergoes displacement when the first shell member and the second shell members are moved relative to one
20 another.

According to another aspect, the invention provides a hockey or lacrosse helmet for protecting a head of a wearer, comprising: (a) an outer shell comprising an external surface of the helmet; (b) an inner padding disposed between the outer shell and the
25 wearer's head when the helmet is worn, the inner padding defining a cavity for receiving the wearer's head; (c) a floating liner disposed between the inner padding and the wearer's head when the helmet is worn; and (d) an adjustment mechanism operable by the wearer to vary an internal volume of the cavity to adjust a fit of the helmet on the wearer's head; wherein the outer shell comprises a first shell member
30 and a second shell member moveable relative to one another once the adjustment mechanism is operated by the wearer to vary the internal volume of the cavity; wherein the floating liner is movable relative to the outer shell in response to a

rotational impact on the outer shell to absorb rotational energy from the rotational impact; and wherein the floating liner has a portion that undergoes displacement when the first shell member and the second shell members are moved relative to one another.

5

According to a further aspect, the invention provides a sports helmet for protecting a head of a wearer, comprising: (a) an outer shell comprising an external surface of the sports helmet, the outer shell comprising first and second shell members moveable one relative to the other; (b) an inner padding disposed between the outer shell and the wearer's head, the inner padding defining a cavity for receiving the wearer's head; (c) a rotational impact protection means disposed between the inner padding and the wearer's head when the sports helmet is worn; and (d) adjustment means operable by the wearer for allowing adjustment of the first shell member relative to the second shell member to achieve a desired fit of the inner padding on the wearer's head; wherein the rotational impact protection means is movable relative to the outer shell in response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact.

According to a further aspect, the invention provides a sports helmet for protecting a head of a wearer, comprising: (a) an outer shell comprising an external surface of the sports helmet; (b) an inner padding disposed between the outer shell and the wearer's head when the sports helmet is worn, the inner padding defining a cavity for receiving the wearer's head; (c) a rotational impact protection device disposed between the inner padding and the wearer's head when the sports helmet is worn; and (d) an adjustment mechanism operable by the wearer for adjusting an internal volume of the cavity such that a fit of the inner padding on the wearer's head is adjustable; wherein the rotational impact protection device is movable relative to the outer shell in response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact.

30

According to another aspect, the invention provides a sports helmet for protecting a head of a wearer, comprising: (a) an outer shell comprising an external surface of the

sports helmet; (b) an inner padding disposed between the outer shell and the wearer's head when the sports helmet is worn, the inner padding defining a cavity for receiving the wearer's head; (c) a rotational impact protection means disposed between the inner padding and the wearer's head when the sports helmet is worn; and (d) adjustment means operable by the wearer for changing a configuration of the inner padding to vary an internal volume of the cavity such that a fit of the inner padding on the wearer's head is adjustable; wherein the rotational impact protection means is movable relative to the outer shell in response to a rotational impact on the outer shell to absorb rotational energy from the rotational impact.

These and other aspects of the invention will now become apparent to those of ordinary skill in the art upon review of the following description of embodiments of the invention in conjunction with the accompanying drawings.

Brief description of the drawings

A detailed description of embodiments of the invention is provided below, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows an example of a sports helmet for protecting a head of a wearer in accordance with an embodiment of the invention;

Figure 2 is a front view of the sports helmet Figure 1;

Figure 3 is a rear perspective view of the sports helmet Figure 1;

5 Figure 4 is a rear perspective view of the sports helmet Figure 1, showing the actuator in a released position and wherein the outer shell members define a first cavity for receiving the wearer's head;

Figure 5 is a side view of the sports helmet Figure 4;

10

Figure 6 is a side view of the helmet showing the actuator in the released position and showing movement of the outer shell members relative to each other;

Figure 7 is a side view of the sports helmet Figure 1, showing the actuator in the released position and wherein the outer shell members define a second cavity for receiving the wearer's head;

15

Figure 8 is a side view of the sports helmet Figure 7, showing movement of the actuator from the released position to a locked position;

20

Figure 9 is a front side perspective exploded view of the sports helmet Figure 1 shown without the chin strap and ear loops;

Figure 10 is a rear side perspective exploded view of the sports helmet Figure 9;

25

Figure 11 is a bottom perspective view of the sports helmet Figure 9 shown without the ear protector and the padding;

Figure 12 is a front side perspective exploded view of the helmet of Figure 9 showing the outer shell, inner padding and a rotational impact protection device that is implemented as a floating liner;

30

Figure 13 is a perspective view of the floating liner of Figure 12;

Figure 14 is a rear bottom perspective view of the floating liner of Figure 13 shown
5 without the occipital pad and the fastening members;

Figure 15 is a bottom perspective view of the floating liner of Figure 14;

Figure 16 is a bottom view of the floating liner of Figure 14 showing the separate
10 segments of the floating liner;

Figure 17 is an enlarged bottom perspective view of the front segment or branch of
the floating liner;

15 Figure 18 is a bottom view of the front branch of Figure 17;

Figure 19 is a top view of the front branch of Figure 17;

Figure 20 is a cross-sectional view taken along line 20-20;
20

Figure 21 is an enlarged side perspective view of a front fastening member;

Figure 22 is a side view of the front fastening member of Figure 21;

25 Figure 23 is a cross-sectional view taken along line 23-23;

Figure 24 is an enlarged side perspective view of a rear fastening member;

Figure 25 is a side view of the rear fastening member of Figure 24;
30

Figure 26 is a cross-sectional view taken along line 26-26;

Figure 27 is a front side perspective view of the first or front outer shell member of the outer shell;

5 Figure 28 is a front view of the front outer shell member of Figure 27;

Figure 29 is a side view of the front outer shell member of Figure 27;

Figure 30 is a top view of the front outer shell member of Figure 27;

10

Figure 31 is a top view of the second or rear outer shell member of Figure 27;

Figure 32 is a rear view of the rear outer shell member of the outer shell;

15 Figure 33 is a side view of the rear outer shell member of Figure 32;

Figure 34 is a front view of the rear outer shell member of Figure 32;

Figure 35 is an enlarged bottom perspective view of the actuator;

20

Figure 36 is a cross-sectional view taken along line 36-36;

Figure 37 is an enlarged top perspective view of a base member;

25 Figure 38 is a front view of the left and right front inner pad members of the inner padding;

Figure 39 is a rear view of the left and right front inner pad members of Figure 38;

30 Figure 40 is a side view of the left front inner pad member of Figure 38;

Figure 41 is a top view of the left and right front inner pad members of Figure 38;

Figure 42 is a rear perspective view of the left and right rear inner pad members of the inner padding;

5

Figure 43 is a rear view of the left and right rear inner pad members of Figure 42;

Figure 44 is a front view of the left and right rear inner pad members of Figure 42;

10 Figure 45 is a side view of the left rear inner pad member of Figure 42;

Figure 46 is an enlarged front perspective view of a wedge of the occipital adjustment device;

15 Figure 47 is a front view of the wedge of Figure 46;

Figure 48 is a side view of the wedge of Figure 46;

Figure 49 is an enlarged rear perspective view of a support of the occipital
20 adjustment device;

Figure 50 is a front view of the support of Figure 49;

Figure 51 is a top perspective view of the support of Figure 49;

25

Figure 52 is a side view of the support of Figure 49;

Figure 53 is an enlarged front perspective view of an occipital pad of the occipital adjustment device;

30

Figure 54 is a top view of the occipital pad of Figure 53;

Figure 55 is a rear perspective view of the occipital pad of Figure 53;

Figure 56 is a top view showing the helmet on one side and the floating liner on the
5 other side, the helmet and floating liner being on the wearer's head;

Figure 57 is a perspective view showing the helmet on one side and the floating liner
on the other side, the helmet and floating liner being on the wearer's head;

10 Figure 58 shows an example of a reaction of the sports helmet Figure 57 upon a
rotational impact on the outer shell;

Figure 59 shows an example of a reaction of the sports helmet Figure 58 upon a
rotational impact on the outer shell;

15

Figure 60 is a perspective view of the helmet on the wearer's head, where the outer
shell, floating liner and brain of the wearer's head are shown;

Figure 61 is a first view of an example of a reaction of the sports helmet Figure 61
20 upon a rotational impact on the outer shell;

Figure 62 is a second view of the example of a reaction of the sports helmet Figure
61 upon a rotational impact on the outer shell;

25 Figure 63 is a third view of the example of a reaction of the sports helmet Figure 61
upon a rotational impact on the outer shell;

Figure 64 is a schematic view of the cavity of the helmet;

30 Figure 65 is a front perspective view of the head of the wearer; and

Figure 66 is a side view of the head of the wearer.

It is to be expressly understood that the description and drawings are only for the purpose of illustrating certain embodiments of the invention and are an aid for understanding. They are not intended to be a definition of the limits of the invention.

Detailed description of embodiments

To facilitate the description, any reference numeral designating an element in one figure will designate the same element if used in any other figures. In describing the embodiments, specific terminology is resorted to for the sake of clarity but the invention is not intended to be limited to the specific terms so selected, and it is understood that each specific term comprises all equivalents.

Unless otherwise indicated, the drawings are intended to be read together with the specification, and are to be considered a portion of the entire written description of this invention. As used in the following description, the terms "horizontal", "vertical", "left", "right", "up", "down" and the like, as well as adjectival and adverbial derivatives thereof (e.g., "horizontally", "rightwardly", "upwardly", "radially", etc.), simply refer to the orientation of the illustrated structure. Similarly, the terms "inwardly," "outwardly" and "radially" generally refer to the orientation of a surface relative to its axis of elongation, or axis of rotation, as appropriate.

Figures 1 to 12 show an example of a helmet 10 for protecting a head 11 of a wearer in accordance with an embodiment of the invention. In this embodiment, the helmet 10 is a sports helmet for protecting the head 11 of the wearer who is a sports player. More particularly, in this embodiment, the sports helmet 10 is a hockey or lacrosse helmet for protecting the head 11 of the wearer who is a hockey or lacrosse player. It is noted, however, that the invention is not limited to any particular type of sports helmet. For instance, a sports helmet constructed using principles described herein in respect of the sports helmet 10 may be used for protecting the head of a player of

another type of contact sport (sometimes referred to as “full-contact sport” or “collision sport”) in which there are significant impact forces on the player due to player-to-player and/or player-to-object contact. For example, in one embodiment, a sports helmet constructed using principles described herein in respect of the sports helmet 10 may be a football helmet for protecting the head of a football player. Furthermore, a sports helmet constructed using principles described herein in respect of the sports helmet 10 may be for protecting the head of a wearer involved in a sport other than a contact sport (e.g., bicycling, motorcycle, skiing, snowboarding, horseback riding or another equestrian activity, etc.).

10

The sports helmet 10 defines a cavity 13 for receiving the wearer’s head 11 to protect the wearer’s head 11 when the sports helmet 10 is impacted (e.g., when the sports helmet 10 hits a board or an ice or other playing surface or is struck by a puck, ball, a lacrosse stick or a hockey stick or when the player is receiving a hit (body check) by another player and the head of the player is hit directly or indirectly). More particularly, in this embodiment, the sports helmet 10 is designed to provide protection against a radial impact in which an impact force is normal to the sports helmet 10 and thus tends to impart a translational movement to the sports helmet 10 (“radial” is used herein in a general sense to mean that the radial impact is along a direction which is perpendicular to a plane that is tangential to the helmet’s external surface and, since a helmet is generally round, such impact will extend along a radial direction). In addition, the sports helmet 10 is designed to provide protection against a rotational impact which tends to impart an angular movement to the sports helmet 10. A rotational impact can be a tangential impact in which an impact force is tangential to the sports helmet 10 or, more commonly, an oblique impact in which an impact force is oblique to the sports helmet 10 and has a radial impact force component and a tangential impact force component. A rotational impact thus exerts a rotational force on the sports helmet 10, i.e., the tangential impact force in the case of a tangential impact and the tangential impact force component in the case of an oblique impact.

The sports helmet 10 protects various regions of the wearer's head 11. As shown in Figures 65 and 66, the wearer's head 11 comprises a front region FR, a top region TR, left and right side regions LS, RS, a back region BR, and an occipital region OR. The front region FR includes a forehead and a front top part of the head 11 and
5 generally corresponds to a frontal bone region of the head 11. The left and right side regions LS, RS are approximately located above the wearer's ears. The back region BR is opposite the front region FR and includes a rear upper part of the head 11. The occipital region OR substantially corresponds to a region around and under the head's occipital protuberance.

10

The sports helmet 10 has an external surface 18 and an internal surface 20 that contacts the wearer's head 11 when the sports helmet 10 is worn. The sports helmet 10 has a front-back axis FBA, a left-right axis LRA, and a vertical axis VA which are respectively generally parallel to a dorsoventral axis, a dextrosinistral axis, and a
15 cephalocaudal axis of the wearer when the sports helmet 10 is worn and which respectively define a front-back direction, a left-right direction, and a vertical direction of the sports helmet 10. Since they are generally oriented longitudinally and transversally of the sports helmet 10, the front-back axis FBA and the left-right axis LRA can also be referred to as a longitudinal axis and a transversal axis,
20 respectively, while the front-back direction and the left-right direction can also be referred to a longitudinal direction and a transversal direction.

In response to an impact, the sports helmet 10 absorbs energy from the impact to protect the wearer's head 11. In particular, in this embodiment, as further discussed
25 below, the sports helmet 10 comprises a rotational impact protection device for causing an angular movement of its external surface 18 relative to its internal surface 20 in response to a rotational impact to absorb rotational energy from the rotational impact. This reduces rotational energy transmitted to the wearer's head 11 and therefore reduces angular acceleration of the wearer's brain within his/her skull.

30

In this embodiment, the sports helmet 10 comprises an outer shell 12, inner padding 15, and a floating liner 50, which implements the rotational impact protection device. As further discussed later, the floating liner 50 is allowed a certain degree of freedom of movement (for that reason it is referred to as “floating”) and constitutes an energy-absorbing structure that takes up a certain amount of energy during a rotational impact. The sports helmet 10 also comprises ear loops 14 and a chinstrap 16 for securing the sports helmet 10 to the wearer’s head 11. The sports helmet 10 further comprises ear protectors 32 for protecting the left and right ears of the wearer.

10

The outer shell 12 provides strength and rigidity to the sports helmet 10. To that end, the outer shell 12 is made of rigid material. For example, in various embodiments, the outer shell 12 may be made of thermoplastic material such as polyethylene, polyamide (nylon), or polycarbonate, of thermosetting resin, or of any other suitable material. The outer shell 12 has an inner surface 17 facing the inner padding 15 and an outer surface 19 opposite the inner surface 17. In this example of implementation, the outer surface 19 of the outer shell 12 constitutes the external surface 18 of the sports helmet 10.

15

The outer shell 12 comprises a front outer shell member 22 and a rear outer shell member 24 that are connected to one another. The front outer shell member 22 comprises a top portion 21 for facing at least part of the top region TR of the wearer’s head 11, a front portion 23 for facing at least part of the front region FR of the wearer’s head 11, and left and right side portions 25, 27 extending rearwardly from the front portion 23 for facing at least part of the left and right side regions LS, RS of the wearer’s head 11. The rear outer shell member 24 comprises a top portion 29 for facing at least part of the top region TR of the wearer’s head 11, a back portion 31 for facing at least part of the back region BR of the wearer’s head 11, an occipital portion 37 for facing at least part of the occipital region OR of the wearer’s head 11, and left and right side portions 33, 35 extending forwardly from the back

25

30

portion 31 for facing at least part of the left and right side regions LS, RS of the wearer's head 11.

The sports helmet 10 may be adjustable in order to adjust how it fits on the wearer's head 11. To that end, the sports helmet 10 comprises an adjustment mechanism 40 for adjusting a fit of the sports helmet 10 on the wearer's head 11. The adjustment mechanism 40 allows the fit of the sports helmet 10 to be adjusted by being operable by the wearer to vary the internal volume of the cavity 13 of the sports helmet 10. This can be done by adjusting one or more internal dimensions of the cavity 13 of the sports helmet 10, such as a front-back internal dimension FBD of the cavity 13 in the front-back direction of the sports helmet 10 and/or a left-right internal dimension LRD of the cavity 13 in the left-right direction of the sports helmet 10, as shown in Figure 64.

More particularly, in this embodiment, the outer shell 12 and the inner padding 15 are adjustable to adjust the fit of the sports helmet 10 on the wearer's head 11. To that end, in this case, the front outer shell member 22 and the rear outer shell member 24 are movable relative to one another to adjust the fit of the sports helmet 10 on the wearer's head 11. The adjustment mechanism 40 is connected between the front outer shell member 22 and the rear outer shell member 24 to enable adjustment of the fit of the sports helmet 10 by moving the outer shell members 22, 24 relative to one another. In this example, relative movement of the outer shell members 22, 24 for adjustment purposes is in the front-back direction of the sports helmet 10 such that the front-back internal dimension FBD of the cavity 13 of the sports helmet 10 is adjusted. This is shown in Figures 5 to 8 in which the rear outer shell member 24 is moved relative to the front outer shell member 22 from a first position, which is shown in Figure 5 and which corresponds to a relatively small size of the sports helmet 10, to a second position, which is shown in Figure 6 and which corresponds to an intermediate size of the sports helmet 10, and to a third position, which is shown in Figures 7 and 8 and which corresponds to a relatively large size of the sports helmet 10.

As best shown in Figures 4 to 10 and 35 to 37, the adjustment mechanism 40 may comprise an actuator 41 that can be moved (in this case pivoted) by the wearer between a locked position, in which the actuator 41 engages a locking part of the front outer shell member 22 and thereby locks the outer shell members 22, 24 relative to one another, and a released position, in which the actuator 41 is disengaged from the locking part of the front outer shell member 22 and thereby permits the outer shell members 22, 24 to move relative to one another so as to adjust the size of the helmet 10.

10

For example, the actuator 41 may comprise first and second pairs of teeth 42, 43 extending generally transversely relative to the longitudinal axis FBA. The actuator 41 can be moved (in this case pivoted) by the wearer between a locked position, in which the first and second pairs of teeth 42, 43 engage in first and second plurality of pairs of apertures 44, 45 provided on the front outer shell member 22 (as best shown in Figure 30) and thereby locks the outer shell members 22, 24 relative to one another, and a released position, in which the first and second pairs of teeth 42, 43 of the actuator 41 are disengaged from the first and second pairs of apertures 44, 45 of the front outer shell member 22 and thereby permits the outer shell members 22, 24 to move relative to one another so as to adjust the size of the sports helmet 10. As seen in Figure 31, the rear shell member 24 may comprise an aperture 24A in which the first and second pairs of teeth 42, 43 may extend in the locked position. It is understood that the rear shell member 24 may comprise two apertures instead of only one aperture. It is also understood that the actuator may comprise only one tooth, or only one pair of teeth instead of the first and second pairs of teeth 42, 43. As seen, in Figure 37, the adjustment mechanism 40 may also comprise a base member 46 having first and second posts 46A, 46B to which the actuator 41 is pivotably mounted and the base member 46 may comprise first and second apertures 48, 49 for receiving the pair of first and second teeth 42, 43. Again, it is understood that the base member 46 may comprise only one aperture if the actuator 41 has only one tooth or only one pair of teeth. The base member 46 may be

mounted between the inner padding 15 and the front outer shell member 22 and the first and second posts 46A, 46B may extend in left and right apertures 24B, 24C provided on the rear outer shell member 24. The adjustment mechanism 40 may be implemented in various other ways in other embodiments.

5

As shown in Figures 27 to 34, the outer shell 12 may comprise a plurality of ventilation holes 39₁-39_v for allowing air to circulate around the wearer's head 11. In this case, each of the front and rear outer shell members 22, 24 defines respective ones of the ventilation holes 39₁-39_v of the outer shell 12.

10

The outer shell 12 may be implemented in various other ways in other embodiments. For example, in other embodiments, the outer shell 12 may be a single-piece shell. In such embodiments, the adjustment mechanism 40 may comprise an internal adjustment device located within the sports helmet 10 and having a head-facing surface movable relative to the wearer's head 11 in order to adjust the fit of the sports helmet 10. For instance, in some cases, the internal adjustment device may comprise an internal pad member movable relative to the wearer's head 11 or an inflatable member which can be inflated so that its surface can be moved closer to or further from the wearer's head 11 to adjust the fit.

20

The inner padding 15 is disposed on the inner surface 17 of the outer shell 12 such that, in use, it is disposed between the outer shell 12 and the wearer's head 11 to absorb impact energy when the sports helmet 10 is impacted. As best seen in Figure 12, the inner padding 15 has an outer surface 38 facing the outer shell 12 and an inner surface 34 facing the floating liner 50. The inner padding 15 may be mounted to the outer shell 12 in various ways. For example, in some embodiments, the inner padding 15 may be mounted to the outer shell 12 by one or more fasteners such as mechanical fasteners (e.g., tacks, staples, rivets, screws, etc.), an adhesive, stitches, or any other suitable fastening element. In such embodiments, the inner padding 15 is affixed to the outer shell 12 and, during movement of the front and rear outer shell members 22, 24 to adjust the size of the sports helmet 10, various

25

30

parts of the inner padding 15 move along with the outer shell members 22, 24. The inner padding 15 has a three-dimensional external configuration that generally conforms to a three-dimensional internal configuration of the outer shell 12. The inner padding 15 comprises shock-absorbing material to absorb impact energy when
 5 the sports helmet 10 is impacted.

As best shown in Figures 9 to 11 and 38 to 45, the inner padding 15 comprises a front left inner pad member 15B for facing at least part of the front region FR and left side region LS of the wearer's head 11, a front right inner pad member 15A for
 10 facing at least part of the front region FR and right side region RS of the wearer's head 11, a rear left inner pad member 15D for facing at least part of the back region BR and left side region LS of the wearer's head 11, a rear right inner pad member 15C for facing at least part of the back region BR and right side region RS of the wearer's head 11, and a top inner pad member 15E for facing at least part of the top
 15 region TR and back region BR of the wearer's head 11. The front outer shell member 22 overlays the front right and left inner pad members 15A, 15B, the rear outer shell member 24 overlays the rear right and left inner pad members 15C, 15D and the front and rear outer shell members 22, 24 at least partially overlay the top inner pad member 15E. The inner pad members 15A, 15B, 15C, 15D, 15E of the
 20 inner padding 15 are movable relative to one another and with the outer shell members 22, 24 to allow adjustment of the fit of the sports helmet 10 using the adjustment mechanism 40. The inner padding 15 may comprise a plurality of ventilation holes 80₁-80_v. In this case, the ventilation holes 80₁-80_v are aligned with respective ones of the ventilation holes 39₁-39_v of the outer shell 12.

25

Each of the inner pad members 15A, 15B, 15C, 15D, 15E of the inner padding 15 comprises shock-absorbing material to absorb impact energy when the sports helmet 10 is impacted. For example, in this embodiment, each of the inner pad members 15A, 15B, 15C, 15D, 15E comprises polymeric cellular material. For
 30 instance, the polymeric cellular material may comprise polymeric foam such as expanded polypropylene (EPP) foam, expanded polyethylene (EPE) foam, or any

other suitable polymeric foam material and/or may comprise expanded polymeric microspheres (e.g., ExpancelTM microspheres commercialized by Akzo Nobel). Any other material with suitable impact energy absorption may be used for the inner padding 15 in other embodiments.

5

As best shown in Figure 9 and 10, the inner padding 15 may comprise left comfort pad members 48A, 49A for facing the left side region of the wearer's head 11 above the left ears and right comfort pad members 48B, 49B for facing the right side region of the wearer's head 11 above the right ears. The comfort pad members 48A, 48B, 10 49A, 49B may comprise any suitable soft material providing comfort to the wearer. For example, in some embodiments, the comfort pad members 48A, 48B, 49A, 49B may comprise polymeric foam such as polyvinyl chloride (PVC) foam or polyurethane foam (e.g., PORON XRD foam commercialized by Rogers Corporation).

15

The inner padding 15 may be implemented in various other ways in other embodiments. For example, in other embodiments, the inner padding 15 may comprise any number of pad members (e.g.: two pad members such as one pad member that faces at least part of the front region FR, top region TR, and left and 20 right side regions LS, RS of the wearer's head 11 and another pad member that faces at least part of the back region BR, top region TR, and left and right side regions LS, RS of the wearer's head 11; a single pad that faces at least part of the front region FR, top region TR, left and right side regions LS, RS, and back region BR of the wearer's head 11; etc.).

25

The floating liner 50 provides impact protection, including rotational impact protection, when the sports helmet 10 is impacted. The liner 50 is "floating" in that it is movable relative to one or more other components of the helmet 10 in response to a rotational impact on the outer shell 12. This movement allows rotational energy 30 from the rotational impact to be absorbed instead of being transmitted to the wearer's head 11. The floating liner 50 comprises a layer of material located

between the external surface 18 and the internal surface 20 of the helmet 10. The layer of material of the floating liner 50 may include a single material constituent or different material constituents and/or may have a constant thickness or a variable thickness.

5

As best shown in Figures 12, 57 and 59, in this embodiment, the floating liner 50 is disposed between the inner padding 15 and the wearer's head 11 and the floating liner 50 is movable relative to the inner padding 15 and the outer shell 12. In particular, the floating liner 50 is movable with relation to the inner padding 15 and the outer shell 12 in response to a rotational impact on the sports helmet 10 to absorb rotational energy from the rotational impact. This reduces rotational energy transmitted to the wearer's head 11 and therefore reduces angular acceleration of the wearer's brain within his/her skull. In this embodiment, rotational energy from a rotational impact is absorbed by a frictional engagement of the floating liner 50 with the inner padding 15 in which energy is dissipated through friction and by an elastic deformation of the floating liner 50 in which energy is absorbed through stretching of the floating liner 50.

An example of how the floating liner 50 provides rotation impact protection in this embodiment is illustrated in Figures 56 to 63. The floating liner 50 is mounted such that, when a rotational force RF is exerted on the outer shell 12 due to a rotational impact RI on the outer shell 12, the outer shell 12 and the inner padding 15 move relative to the floating liner 50. This movement includes an angular movement of the outer shell 12 and the inner padding 15 relative to the floating liner 50 by an angle θ relative to the front-back axis FBA of the sports helmet 10. The angle θ may have various values depending on an intensity of the rotational impact RI and a construction of the sports helmet 10. For example, in some cases, the angle θ may be between 2° and 10° .

Movement of the outer shell 12 and the inner padding 15 relative to the floating liner 50 creates friction between the floating liner 50 and the inner padding 15. This

friction dissipates rotational energy associated with the rotational impact RI. In addition, movement of the outer shell 12 and the inner padding 15 relative to the floating liner 50 induces an elastic deformation of the floating liner 50. More particularly, in this embodiment, the floating liner 50 stretches so as to curve in a direction of the rotational force RF. This stretching of the floating liner 50 absorbs rotational energy associated with the rotational impact RI.

In addition to its rotational impact protection, in this embodiment, the floating liner 50 also provides radial impact protection. More particularly, the floating liner 50 is elastically compressible in response to a linear impact force (i.e., a radial impact force in the case of a radial impact or a radial impact force component in the case of an oblique impact) to absorb energy by elastic compression. The floating liner 50 therefore implements a padding layer.

With reference to Figures 13 to 15, the floating liner 50 comprises a front portion 51 for facing the front region FR of the wearer's head 11, left and right side portion 52, 53 for facing the left and right side regions LS, RS of the wearer's head 11, a top portion 54 for facing the top region TR of the wearer's head 11, and a back portion 55 for facing the back region BR of the wearer's head 11. These portions of the floating liner 50 are arranged such that the floating liner 50 has a dome shape for receiving the wearer's head 11. In this example, the front portion 51, side portions 52, 53, and back portion 55 comprise respective segments or branches 70₁-70₆ extending downwardly from the top portion 54 and spaced from one another. The floating liner 50 also comprises an inner surface 59 for contacting the wearer's head 11 and an outer surface 61 facing the inner padding 15. In this case, the inner surface 59 of the floating liner 50 constitutes the internal surface 20 of the sports helmet 10 which contacts the wearer's head 11 when the sports helmet 10 is worn. The floating liner 50 may have various other shapes in other embodiments.

The floating liner 50 may be made of any suitable material to achieve its impact protection function. In this embodiment, in order to absorb energy by elastic

deformation, the floating liner 50 comprises elastic material that is elastically stretchable to absorb rotational energy associated with a rotational force when the sports helmet 10 is impacted. Also, in this case, the elastic material of the floating liner 50 is elastically compressible to absorb impact energy associated with a linear force when the sports helmet 10 is impacted. The elastic material of the floating liner 50 may thus be an elastically stretchable compressible impact-absorbing material. For example, in some embodiments, the elastic material of the floating liner 50 may comprise elastomeric material (e.g., elastomeric polyurethane foam such as PORON XRD foam commercialized by Rogers Corporation or any other suitable elastomeric foam).

As shown in Figure 16, the floating liner 50 may comprise a plurality of segments or branches 70_1 - 70_7 fastened to one another to create its front portion 51, left and right side portion 52, 53, top portion 54, and back portion 55. More particularly, in this embodiment, the segments 70_1 - 70_7 of the floating liner 50 are connected to one another by stitches. The floating liner 50 may be constructed in various other ways in other embodiments (e.g., it may comprise a different number and/or arrangement of segments, its segments may be fastened in other ways, or it may be a one-piece liner instead of having distinct segments).

20

The floating liner 50 may be fastened to a remainder of the sports helmet 10 in various ways. For example, as best shown in Figures 9 to 13, the floating liner 50 is fastened to the remainder of the sports helmet 10 at a plurality of fastening points 60_1 - 60_6 spaced apart from one another around the sports helmet 10. More particularly, in this example, the fastening point 60_1 is a front fastening point adjacent to the front portion 23 of the front outer shell member 22, the fastening points 60_2 , 60_3 are side fastening points respectively adjacent to the left and right side portions 25, 27 of the front outer shell member 22, the fastening points 60_4 , 60_5 are side fastening points respectively adjacent to the left and right side portions 33, 35 of the rear outer shell member 24, and the fastening point 60_6 is a rear fastening point adjacent to the back portion 31 of the rear outer shell member 24. In this case,

30

the fastening points 60₁-60₆ are distributed along a lower edge area of the sports helmet 10. Also, in this case, the fastening points 60₂, 60₃ and the fastening points 60₄, 60₅ are respectively located in front of and behind the ears of the wearer. The fastening points 60₁, 60₂, 60₃, 60₄, 60₅ may be located at the respective distal ends of the segments or branches 70₁, 70₂, 70₃, 70₅, 70₆ or adjacent these distal ends. The floating liner 50 may be connected to the remainder of the sports helmet 10 via any other number and/or relative arrangement of fastening points in other embodiments.

The fastening points 60₁-60₅ of the floating liner 50 may comprise respectively fastening members 71₁-71₅ which are fastened to the outer shell 12 and to which the floating liner 50 is attached. More particularly, the fastening members 71₁-71₅ are fastened to the outer shell 12 via mechanical fasteners (e.g., screws 95) and to the floating liner 50 via stitches. For instance, as shown in Figures 21 to 23, the fastening member 71₂, which could be a front fastening member, comprises two openings 72 to receive a mechanical fastener (screws 95) to fasten it to the outer shell 12 and a stitchable portion 73 to receive stitches to fasten it to the floating liner 50. Similarly, as shown in Figures 24 to 26, the fastening member 71₄, which could be a rear fastening member, comprises an opening 75 to receive a mechanical fastener (screw 95) to fasten it to the outer shell 12 and a stitchable portion 90 to receive stitches to fasten it to the floating liner 50. In this case, the stitchable portions 73 and 90 are formed as ledges projecting inwardly of the sports helmet 10. The fastening members 71₁, 71₂, 71₃, 71₄, 71₅ may be located at the respective distal ends of the segments or branches 70₁, 70₂, 70₃, 70₅, 70₆ or adjacent these distal ends.

The fastening members 71₁-71₅ may be implemented in various other ways in other embodiments. For example, the fastening members 71₁-71₅ may be affixed directly to the inner padding 15 such that the floating liner 50 is rather affixed to the inner padding 15 instead to the outer shell 12 or the fastening members 71₁-71₅ may be affixed to the outer shell 12 while portions of the padding 15 are located between one or more of the fastening members 71₁-71₅ and the outer shell 12 such that the floating liner 50 is affixed to the outer shell 12 through the inner padding 15.

The fastening members 71₁-71₅ may be made of any suitable material. For example, in this embodiment, the fastening members 71₁-71₅ are made of polymeric material (e.g., polypropylene, polyethylene, nylon, polycarbonate or polyacetal, or any other suitable plastic). In particular, in this example, the polymeric material of the fastening members 71₁-71₅ is such that each of these fastening members is more rigid than the floating liner 50 to enable the floating liner 50 to stretch when the helmet 50 is rotationally impacted. The fastening members 71₁-71₅ may be made of various other materials in other embodiments (e.g., metallic material).

As best shown in Figures 9 to 13 and 46 to 55, the sports helmet 10 may comprise an occipital adjustment device 75 having an occipital pad 36 facing the occipital region OR of the player's head and movable relative to the outer shell member 24 between different positions to adjust the fit of the sports helmet 10 on the wearer's head.

The occipital pad 36 may be made of any suitable padding material. For example, in some embodiments, the occipital pad 36 may comprise polymeric foam such as expanded polypropylene (EPP) foam, expanded polyethylene (EPE) foam, foam having two or more different densities (e.g., high-density polyethylene (HDPE) foam and low-density polyethylene foam), or any other suitable foam. Other materials may be used for the occipital pad 36 in other embodiments.

The occipital pad 36 is supported by a support 76 which is movable relative to the second shell member 24 in order to move the occipital pad 36. As best shown in Figure 6, a wedge 78 is located between the second shell member 24 and the support 76. The wedge 78 is connected to an actuator 77 such that, when the player operates the actuator 77, the wedge 78 moves between different positions relative to the second shell member 24 and the support 76. As seen in Figures 46 to 48, the

wedge 78 has a thickness that increases gradually from its top edge to its bottom edge such that downward vertical displacement of the wedge 78 between the second shell member 24 and the support 76 moves the occipital pad 36 from a first position towards a second position in which it applies a greater pressure upon the occipital region OR of the wearer's head. Movement of the occipital pad 36 allows it to be positioned in a first position in which it is closer to the back portion of the second shell member 24 and in a second position in which it is further inward of the sports helmet 10 and closer to the occipital region OR to apply more pressure on the occipital region OR than in its first position.

As best shown in Figures 49 to 52, the support 76 may have an upper portion with left and right connectors, projections or pins 76A, 76B that are received in apertures provided in the left and right rear inner pad members 15D, 15C (see apertures 15D₁, 15C₁, best shown in Figures 42 and 43) such that the support is mounted to the left and right rear inner pad members 15D, 15C. The upper portion of the support 76 may also comprise a member extending upwardly with a connector, projection or pin 76C that is received in an aperture 15E¹ provided in the top inner pad member 15E (see Figure 10) such that the top inner pad member 15E is only affixed at that point to the second shell member 24.

As best shown in Figure 46 and 47, the occipital adjustment device 75 may comprise a locking mechanism 79 for preventing unintentional movement of the wedge 78 and thus of the occipital pad 36. More particularly, the locking mechanism 79 comprises a plurality of protrusions 88₁-88_N on the inner surface of the wedge 78 adapted to register between a plurality of notches 81₁-81_F (best shown in Figure 34) on the inner surface 17 of the rear outer shell member 24 to put the wedge 78 in a locked position. Any other suitable locking mechanism may be used in other embodiments.

As best shown in Figures 9 and 10, the actuator 77 comprises a button 82 and a post 83 extending through a slot 84 in the rear outer shell member 24, passing through an aperture provided in the wedge 78 and having a distal end with a

diameter larger than that the wedge 78 for securing the actuator 77 to the wedge 78. In this example, the actuator 77 may comprise resilient material (e.g., nylon or polyacetal) characterized by an ability to return to its original shape when pressure is no longer applied on it. When the button 82 is pushed by the wearer towards the rear outer shell member 24, it is compressed and the post 83 and distal end are pushed away from the inner surface 27 of the rear outer shell member 24, thus disengaging the protrusions 88_1-88_N from the notches 81_1-81_F and allowing the wedge 78 to be moved upwardly or downwardly along the slot 84. The actuator 77 may be implemented in various other ways in other embodiments. For instance, in other embodiments, the actuator 77 may comprise a spring or any other biasing device for urging the wedge 78 in its locked position.

As best shown in Figure 13, the fastening point 60_6 of the floating liner 50 is located adjacent the occipital pad 36 and distal ends of the back portion 55 of the floating liner 50. The distal ends of the back portion 55 may have first and second stitchable tabs 55^{T1} , 55^{T2} (see Figure 14) and the occipital pad 36 may have corresponding first and second stitchable tabs 36^{T1} , 36^{T2} (see Figures 53 and 55) such that the back portion 55 of the floating liner 50 is affixed to the occipital pad 36 at the fastening point 60_6 via stitches passing through the first and second stitchable tabs 55^{T1} , 55^{T2} , 36^{T1} , 36^{T2} . Since the back portion 55 of the floating liner 50 is fastened to the occipital pad 36, movement of the occipital pad 36 during adjustment induces movement of the back portion 55 of the floating liner 50. In other words, in this case, the fastening point 60_6 of the floating liner 50 is adjustably movable relative to the outer shell 12. This can allow the floating liner 50 to more closely conform to the wearer's head 11.

A more detailed description of the floating liner 50 and its method of operation in this embodiment are provided below.

Figures 14 to 16 illustrate in greater detail the structure of the floating liner 50. The floating liner 50 is that component of the sports helmet 10 which constitutes the

interface between the wearer's head 11 and the helmet's inner padding 15. The floating liner 50 is designed to be movable with relation to the inner padding 15. The floating liner 50, when installed in the sports helmet 10, acquires its dome shape that generally conforms to the shape of the wearer's head 11.

5

The floating liner 50 is a spider-like structure that includes the top portion 54 and a series of branches which extend downwardly and connect the spider-like structure to the lower portion of the sports helmet 10 near the respective distal ends of the branches. More particularly, the floating liner 50 has an elongated band-like front segment or branch 70₁, an opposed elongated rear band-like segment or branch 70₄, lateral front band-like segments or branches 70₂, 70₆, lateral rear band-like segments or branches 70₃, 70₅, all extending downwardly from the top portion 54. The lateral front band-like segments or branches 70₂, 70₆ are provided with side extensions 110 that extend toward and connect with the front band-like segment 70₁.
 10 The extensions 110 run generally along the lower periphery of the helmet when the floating liner 50 is installed in the sports helmet 10.
 15

The various components of the floating liner 50 are attached to one another by stitching. In this example of implementation, stitches 120₁-120_s connect the various components of the floating liner 50 into its dome shape. Other forms of attachment may be used in other embodiments. For example, the various components can be glued to one another or the floating liner 50 can be formed as a single piece, such as by die-cutting it from a blank of material.
 20

Upon assembly, the floating liner 50 thus has the front and rear segments or branches 70₁, 70₄ that are elongated and extend along the longitudinal axis FBA of the sports helmet 10. The front and rear segments or branches 70₁, 70₄ connect with the top portion 54 such as to define openings, slots or slits 122₁, 122₂ with the front and rear segments 70₁, 70₄. The openings, slots or slits 122₁, 122₂ make the floating liner 50 somewhat stretchable in the longitudinal direction (further to the inherent stretchability of the material from which the floating liner 50 is made) such
 25
 30

as to accommodate changes in the internal volume defined by the sports helmet 10. To provide a better fit, the sports helmet 10 can be designed to be adjustable, as described in greater detail earlier. The adjustability is such that the internal volume of the sports helmet 10 changes to make it larger or smaller according to the particular
 5 size of the wearer's head 11. The openings, slots or slits 122₁, 122₂ can allow the floating liner 50 to expand or contract within the helmet's cavity 13 when an adjustment is made and thus prevent the floating liner 50 from bunching.

The lateral front and rear segments or branches 70₂, 70₃, 70₅, 70₆ extend along the
 10 transversal axis LRA of the sports helmet 10. Between the lateral front and rear segments or branches 70₂, 70₃ and 70₅, 70₆, left and right spaces 124, 126 are defined and these left and right spaces 124, 126 register with the respective left and right ears of the wearer. The spaces 124, 126 provide clearance to receive various components of the sports helmet 10 that protect the ears.

15 Figures 21 to 26 illustrate some of the fastening members, namely the fastening members 71₂, 71₄, for attaching the lateral front and rear segments or branches 70₂, 70₃, 70₅, 70₆ of the floating liner 50 to the remainder of the sports helmet 10. The fastening member 71₂ shown in Figures 21 to 23 is a front fastening member that
 20 attaches the lateral front segments or branches 70₂, 70₃, 70₅, 70₆ to the sports helmet 10. The fastening members 71₂, 71₃ are each in the form of a clip that is made of plastic material and to which the distal ends of the lateral front segments or branches 70₂, 70₆ are stitched. The fastening members 71₂, 71₃ are subsequently attached with screws 95 to the outer shell 12 of the sports helmet 10. The screws 95 are
 25 inserted through apertures 72 of the fastening members 71₂, 71₃ and through apertures 96 of the outer shell 12. Figures 24 to 26 illustrate the fastening member 71₄ that is a rear fastening member attaching the extremity of the lateral rear segment or branch 70₅ to the remainder of the sports helmet 10. The fastening member 71₄ is similar to the fastening member 71₂, except that a single screw 95 is
 30 used to mount the fastening member 71₄ to the outer shell 12. The fastening members 71₄, 71₅ are each attached at their distal ends to the lateral rear segments or branches 70₂, 70₃, via stitches and the fastening members 71₄, 71₅ are

subsequently attached with screws 95 passing through apertures 74 of the fastening members 71₄, 71₅ and through apertures 96 of the outer shell 12.

This arrangement is such that the floating liner 50 is retained to the outer shell 12 at a plurality of spaced apart locations that are adjacent the lower edge of the outer shell 12. It is understood that the floating liner 50 may be retained directly to the inner padding 15 via the fastening members 71₁-71₅ or be retained to the outer shell 12 while portions of the inner padding 15 are located between the fastening members 71₁-71₅ and outer shell 12. The floating liner 50 is retained at the front and at two locations on each side, one being in front the ear and near the temple region and the other behind the ear. At the back, the floating liner 50 connects with the occipital pad 36, which moves with relation to the outer shell 12, as described earlier.

The various components of the floating liner 50 may be made from material that has a constant thickness or the thickness may vary. In the example shown in the drawings, a variable thickness material is being used to provide, in addition to the rotational impact protection, protection against radial impacts.

Figures 17 to 20 illustrate in greater detail the structure of the front segment or branch 70₁ of the floating liner 50. The front segment or branch 70₁ of the floating liner 50 is a continuous sheet of material that has a base portion 140 from which project a series of padding areas or rigidifying zones 85₁-85_R. A ridge 142 is provided at least along a portion of the periphery of the front segment or branch 70₁ of the floating liner 50. In a specific example of implementation, the thickness of the base portion 140 is of about 1mm. The thickness of the padding area or rigidifying zone is of about 3mm while the thickness of the ridge 142 is of about 3.5 mm. In some embodiments, the thickness of the floating liner 50 may not exceed 10mm and preferably may be not exceed 5mm. The floating liner 50 may have any other suitable thickness in other embodiments

To avoid the floating liner 50 from projecting too far inwardly in the sports helmet with relation to the inner surface of the inner padding 15 on which the floating liner 50 rests, the inner padding 15 can be provided with one or more recesses in which one or more parts of the floating liner 50 can fit. With reference to Figure 40, which

shows the structure of the left and right front pad members 15A, 15B of the inner padding 15, the inner padding 15 defines a recessed area 15F that registers with the front segment 70₁ of the floating liner 50. The depth of the recessed area 15F is selected generally to match or to be slightly less than the maximal thickness of the front segment 70₁ of the floating liner 50. In this fashion, when the floating liner 50 is mounted to the sports helmet 10, the front segment 70₁ of the floating liner 50 sits in the recessed area 15F and its face that is oriented toward the wearer is generally flush or only slightly projects from the inner surface of the inner padding 15.

The floating liner 50 is a component of the sports helmet 10 that contributes to protect the head 11 of the wearer during an impact that has a rotational force component and which imparts an angular movement to the head 11. As briefly discussed earlier, several energy absorption mechanisms operate in conjunction with one another to take up at least a component of the energy in the impact and thus limit the residual energy that is transmitted to the wearer's head 11.

Without intent of being bound by any particular theory, the inventors have identified four primary energy absorption mechanisms. The first is the ability of the floating liner 50 to stretch during a relative movement between the floating liner 50 and the remainder of the helmet's structure which is rigid and moves in unison during the impact. Typically, the main components of the helmet structure that move in relation to the floating liner 50 are the outer shell 12 and the inner padding 15. Conceptually speaking, the sports helmet 10 thus provides two elements that can move one with relation to the other during a rotational impact. One of the elements is the outer shell/inner padding combination. The other element is the floating liner 50 which constitutes the interface between the outer shell/inner padding combination and the wearer's head 11. The floating liner 50 is designed to closely fit on the head 11 and

at the same time is attached to the outer shell 12 of the sports helmet 10 via rigid mounting points that include the fastening members 71₁ to 71₅ and the occipital pad 36. Thus, in the course of an impact that tends to impart an angular movement to the sports helmet 10, the outer shell/inner pad combination will tend to move with
5 relation to the floating liner 50 that is in contact with the head 11. The rigid mounting points will thus distort the floating liner 50 and stretch various parts of the floating liner 50. As the material of the floating liner 50 is being stretched, it absorbs energy.

The ability of the floating liner 50 to absorb energy can be enhanced by proper
10 selection of the material from which the floating liner 50 is made and also by the structure of the floating liner 50. From a structural point of view, the floating liner 50 is constructed as a series of elongated segments or branches (the front segment or branch 70₁, rear segment or branch 70₄, and lateral front and rear segments or branches 70₂, 70₃, 70₅, 70₆) that extend downwardly from the top portion 54 of the
15 floating liner 50 and thus run from the top of the head 11 downwardly (when taking the head 11 of the wearer as a reference). When an angular movement occurs, the extremities of those segments or branches, which are affixed to the outer shell/inner pad combination, are pulled as the outer shell/inner pad combination angularly moves, stretching the material from which the segments are made.

20

From a material point of view, the material of the floating liner 50 may be such that, when stretched, at least some degree of energy is absorbed in the material. In a specific example of implementation the material can be characterized by using the ASTM D2632-01 Standard Test method for rubber property-Resilience by Vertical
25 rebound. The material of the floating liner 50 that manifests energy absorption may have, according to this test a resilience of less than 30%, preferably less than 20%, even more preferably less than 15% and most advantageously less than 10%. A specific material that has been found to provide energy absorption in a helmet for use in hockey is sold under the trademark PORON XRD.

30

The second energy absorption mechanism that works in conjunction with the stretchability of the floating liner 50 is the frictional interface between the floating liner 50 and the inner padding 15. As the floating liner 50 moves with relation to the outer shell/inner padding combination, the presence of friction at the interface
5 dissipates energy during the movement, by generating heat. From a material perspective, the degree of friction that exists between the floating liner 50 and the inner padding 15 is controlled such that enough friction exists in order to enhance energy dissipation and at the same time the friction does not exceed a level at which the movement will be inhibited.

10 In a specific and non-limiting example of implementation, the degree of friction between the floating liner 50 and the mating surface of the inner pad is characterized by the ASTM G115 - 10 Standard Guide for Measuring and Reporting Friction Coefficients. The friction coefficient between the floating liner 50 and the inner
15 padding 15 is of at least 0.2, preferably of at least 0.3, more preferably of at least 0.4, even more preferably of at least 0.5 and most advantageously in the range of about 0.5 to about 0.6.

Note that very high coefficients of friction may not be optimal since the amount of
20 effort required to initiate the movement between the floating liner 50 and the inner padding 15 can become too high. In this case, the sports helmet 10 may not respond to low level rotational impacts where the angular acceleration imparted to the outer shell 12 and inner padding 15 is not sufficient to overcome the friction between the floating liner 50 and the inner padding 15. It is thus preferred to keep
25 the coefficient of friction between the floating liner 50 and the inner padding 15 to a level that does not exceed 0.75 and more preferably is at 0.7 or below.

The third energy absorption mechanism is compression of the material of the floating liner 50. This third mechanism may manifest itself when a radial impact force
30 component has the effect of pushing the sports helmet 10 toward the head, in addition to imparting to the sports helmet 10 angular motion. The compression of the

material will absorb some quantity of energy that depends on the degree of compression. From that perspective, a thicker floating liner 50 will be able to absorb more energy as a result of compression, than a thinner floating liner 50. Also, while certain areas of the material of the floating liner 50 may stretch, other areas of the floating liner's material may compress tangentially and this may also contribute to energy absorption.

The fourth energy absorption mechanism is the inertia of the outer shell 12 / inner padding 15 combination. Since this structure moves with relation to the head 11 of the wearer as a result of a rotational impact, the angular motion imparted to the structure requires some amount of energy. The fourth energy absorption mechanism is independent of the floating liner 50. It should also be noted that the fourth energy absorption mechanism can be maximized by decreasing the degree of friction between the floating liner 50 and the inner padding 15. Such a decrease of friction will increase the range of movement of the outer shell 12 / inner padding 15 combination such that the energy intake by the angularly accelerated mass will increase. However, a decrease of the degree of friction between the floating liner 50 and the inner padding 15 will also have the undesirable effect of decreasing the efficacy of the second energy absorption mechanism that relies on friction. The higher the friction, the more energy absorption will occur. On balance, the energy absorption mechanism that works on the basis of friction is preferred over the one that works on the basis of inertia since it is believed to be more effective. Accordingly, an interaction between the floating liner 50 and the inner padding 15 that largely favors slidability at the expense of friction is not desirable.

25

The various energy absorption mechanisms described above contribute differently to the overall ability of the sports helmet 10 to protect against rotational impacts. Generally, it is believed that, in the helmet structure described herein, the cumulative effect of the first three energy absorption mechanisms (i.e., the stretchability of the floating liner 50, the frictional engagement between the floating liner 50 and the inner padding 15, and the compression of the material of the floating liner 50) outweigh

30

significantly the effect of the fourth energy absorption mechanism (i.e., the inertia of the outer shell 12 / inner padding 15 combination).

Figures 61 to 64 illustrate the sequence of events that occur when the sports helmet 10 is subjected to a rotational impact RI. In Figure 61, the impact RI is shown by the arrow. Figures 62 to 64 show that as a result of the impact RI, the sports helmet 10 has angularly moved by a certain amount. For instance, in some cases, this movement can be of about 2 degrees for a relatively small impact to about 10 degrees for a larger one. The part of the sports helmet 10 that has moved angularly includes the outer shell 12 and the inner padding 15 that is rigidly attached to the outer shell 12. However, during that movement, the floating liner 50 is distorted. Figures 62 and 63 clearly show that the front segment 70₁ has been laterally stretched, the stretching of that component causing a certain degree of energy absorption.

The sports helmet may comprise an adjustment mechanism such as a movable inner pad member or an inflatable inner member for adjusting the internal volume of the cavity 13 to adjust the fit of the sports helmet 10 on the wearer's head and the floating liner 50 is movable relative to the outer shell 12 in response to a rotational impact on the outer shell 12 to absorb rotational energy from the rotational impact and the floating liner 50 is configured to accommodate adjustments of the internal volume of the cavity 13 using the adjustment mechanism.

The sports helmet may comprise a rotational impact protection device disposed between the external surface 18 of the sports helmet 10 and the wearer's head when the sports helmet 10 is worn, the rotational impact protection device comprising a surface 59 movable relative to the external surface 18 of the sports helmet 10 in response to a rotational impact on the outer shell 12 to absorb rotational energy from the rotational impact, the surface 59 of the rotational impact protection device undergoing displacement when the adjustment mechanism is operated by the wearer to vary the internal volume of said cavity.

In one variant, the rotational impact protection device is the floating liner 50 that is movable relative to the outer shell 12 in response to a rotational impact on the outer shell 12 to absorb rotational energy from the rotational impact and that is configured to accommodate adjustments of the internal volume of the cavity 13 when the first
5 shell member 22 and the second shell member 24 are moved relative to one another. The floating liner 50 may comprise stretchable material such that at least part of the rotational energy is absorbed by stretching of the stretchable material. The outer surface 59 of the floating liner 50 may be in frictional engagement with the inner padding 15 in response to the rotational impact such that at least part of the rotational
10 energy is dissipated by friction between the inner padding 15 and the outer surface 59 of the floating liner 50, the outer surface 59 of the floating liner 50 having a coefficient of friction with the inner padding 15 of at least 0.2 measured according to ASTM G115-10.

15 Several variants of the floating liner 50 are possible in other embodiments. For example, in some embodiments, in order to better manage the energy absorption of the floating liner 50, a hybrid structure can be considered where different components have different functions. For example, it is possible to construct the floating liner 50 from two different materials, one being more energy absorbing than the other when
20 the floating liner 50 is stretched. This could provide a more economical product where the parts of the floating liner 50 that do not stretch during a rotational impact use less expensive material, such as non-stretchable fabric, while the remainder is made up of stretchable and energy absorbing material. In one particular example, the top portion 54 could be made of non-stretchable material.

25 Instead of using non-stretchable material, other types of materials can be used to provide desirable attributes to the floating liner 50, such as comfort materials that have a high resiliency (those materials are stretchable but do not absorb much energy) and porous materials to absorb perspiration, among others.

In another possible variant, the friction between the floating liner 50 and the inner padding 15 can be selectively controlled by providing between these components a material that has a particular coefficient of friction. That material can be applied as a series of patches to the floating liner 50 or to the inner pad 15 such as to achieve the
5 desired degree of friction.

In another embodiment, the inner surface of the floating liner 50 which faces the inner padding 15 may be provided with a series of projections that fit in corresponding recesses made on the inner padding 15. In this case, the projections
10 are generally semi-spherical and are integrally formed with the remainder of the floating liner 50. The purpose of the projections is to create an interface with the inner padding 15 in which the resistance to movement is increased in order to increase the energy uptake. The mating relationship between the projections and the corresponding mating recesses in the inner padding 15 would require more energy
15 to move the floating liner 50 with relation to the inner padding 15. More energy is required since the projections must be deformed sufficiently to move out of the corresponding recesses. The number, shape and size of the projections can vary to a great extent in various embodiments. A larger number of projections will increase the holding force and thus require a stronger effort to initiate the movement between
20 the floating liner 50 and the inner padding 15. Larger projections will have the same effect since more material compression will be required for the projections to clear their respective recesses.

In order to allow for adjustability of the sports helmet 10, the recesses on the inner
25 padding 15 can be made sufficiently large such that they register with respective projections in a number of different positions of the inner pad segments. In such cases, elongated recesses can be used. Each elongated recess is oriented such that it extends along the direction in which the inner pad segment moves when the helmet size is adjusted. The width of the recess generally matches the diameter of
30 the projection. As the inner pad position changes when adjustments to the helmet size are made, the longitudinal position of the projection in the recess changes.

The reverse arrangement can also be considered, where projections are provided on the inner padding 15 and fit in corresponding recesses on the floating liner 50.

- 5 The attachment of the floating liner 50 to the sports helmet 10 is such as to enable the relative motion to occur during a rotational impact. This relative motion is made possible by the ability of the floating liner 50 to move over the inner padding 15 and also by the ability of the floating liner 50 to stretch. As discussed above, the floating liner 50 is connected to the outer shell 12 or the inner padding 15 near the lower
- 10 edge of the sports helmet 10, leaving the upper part of floating liner 50 freely resting on the inner padding 15. Such a construction thus provides an interface between the floating liner 50 and the inner padding 15 that is fastener-free over a surface area of a desired extent over which the free-floating interaction is desirable.
- 15 By “fastener-free” interface is meant an interface that does not contain any mechanical or adhesive fastener that could severely impede the ability of the two opposing surfaces that define the interface to move one with relation to the other. Figure 57 illustrates this characteristic. The fastener-free interface area is defined between two imaginary references, one being the apex of the interface, the other the
- 20 base of the interface. The apex is the highest or most outward point of the interface when the sports helmet 10 is being worn. In Figure 58, the apex is shown by the reference numeral 500. The base of the interface is a horizontal plane that is perpendicular to the vertical axis VA of the sports helmet 10. The interface is thus the dome-shaped area defined between the opposed (or mating) surfaces of the
- 25 floating liner 50 on the one hand and the inner padding 15 on the other hand, whose apex is 500 and whose base is intersected by the plane 502. In some embodiments, the distance D that separates the apex 500 and the plane 502 is less than 8 cm, more preferably less than 5 and even more preferably less than 3 cm.
- 30 The fastener-free interface area is also advantageous when the sports helmet 10 is adjustable to better fit the head 11 of the wearer. This fastener-free interface thus

allows the segments or branches that make up the inner padding 15 to be moved, such as to provide adjustability to several different positions without impeding the ability of the floating liner 50 to move with relation to the inner padding 15. As indicated earlier, the sports helmet 10 is adjustable along its longitudinal axis FBA by
5 allowing the front and the rear outer shell members 22, 24 to move one relatively to the other. As a result of this movement, the inner pad members of the inner padding 15 also move. Accordingly, each adjustment position of the outer shell 12 corresponds to a particular position of the inner pad members 15A, 15B, 15C, 15D, 15E. As the outer shell members 22, 24 are displaced along the longitudinal axis,
10 the inner pad members 15A, 15B, 15C, 15D, 15E are also moved one with relation to the other such as to alter the void volume of the sports helmet 10.

By using a fastener-less interface between the inner padding 15 and the floating liner 50, the inner pad members 15A, 15B, 15C, 15D, 15E can move during an
15 adjustment operation without interfering with the floating liner 50.

Note that if necessary to use some sort of fastener to retain the floating liner 50 to the upper part of the sports helmet 10, a possible arrangement can be considered where the floating liner 50 is connected to a component other than the inner padding
20 15. This component can be the outer shell 12. This connection can be independent from the inner padding 15 such as to allow the inner pad members 15A, 15B, 15C, 15D, 15E to move relative to one another without interfering with the floating liner 50. In a specific example (not shown in the drawings) the inner padding 15 is provided with apertures through which the connections can reach the outer shell 12. The
25 apertures are large enough such as to provide a range of motion for the inner pad members 15A, 15B, 15C, 15D, 15E for adjustability purposes. An example of a connection is an elastic strap that connects the floating liner 50 to the outer shell 12. The strap extends to a slot through the inner padding 15 such that the inner pad members 15A, 15B, 15C, 15D, 15E can move without interfering with the strap.
30 Note that in this example of implementation, the interface between the floating liner 50 and the inner padding 15 is still considered to be fastener-less since no fastener

exists between the floating liner 50 and the inner padding 15 that fixes the floating liner 50 relative to the inner padding 15.

The floating liner 50 may be elastic and self-standing. The floating liner 50 is self-standing in that it stands on its own upwardly within the sports helmet 10 and maintains its dome shape for receiving the wearer's head 11 when the sports helmet 10 is not being worn (i.e., when the wearer's head 11 is not received in the sports helmet 10). The dome shape of the floating liner 50 is maintained without the need of suspending the floating liner 50 from the inner padding 15 or from the outer shell 12, such as by using a fastener located near the apex 500 or any other suspension mechanism.

While being elastic, the floating liner 50 has sufficient rigidity to make it self-standing. The rigidity of the floating liner 50 is sufficient to prevent the floating liner 50 from falling down outside of the cavity 13 of the sports helmet 10 under its own weight when the wearer's head 11 is not received in the sports helmet 10.

The rigidity of the floating liner 50 and its ability to be self-standing may be achieved in various ways and is a function of the floating liner's material and structure. For example, in this embodiment, to increase the rigidity of its structure, the segments of the floating liner 50 are provided with the rigidifying zones 85₁-85_R spaced apart from one another by a plurality of flexing zones 86₁-86_F such that adjacent rigidifying zones are more rigid than a flexing zone in between them. The rigidifying zones 85₁-85_R contribute to maintain the shape of the floating liner 50 by providing additional support. The combination of the flexing zones 86₁-86_F and the rigidifying zones 85₁-85_R is selected to provide simultaneously flexibility and a degree of rigidity to cause the floating liner 50 to self-support itself.

In this embodiment, the rigidifying zones 85₁-85_R are more rigid than the flexing zones 86₁-86_F because they are thicker than the flexing zones 86₁-86_F. More particularly, in this embodiment, the rigidity is increased with the rigidifying zones 85₁-85_R and the ridges 142 of the floating liner 50 where additional material is provided. The rigidifying zones 85₁-85_R may be made more rigid than the flexing zones 86₁-86_F

in other ways in other embodiments (e.g., by being made of material having a greater modulus of elasticity and/or a greater hardness than material of the flexing zones 86₁-86_F).

5 Although it is sufficiently rigid to self-stand within the cavity 13 of the sports helmet 10, the floating liner 50 may also be sufficiently flexible to be manually pulled away from the inner padding 15. In this example, this may facilitate cleaning of the inner surface of the inner padding 15 and/or the outer surface 61 of the floating liner 50. More particularly, in this embodiment, the floating liner 50 can be manually pulled
10 away from the inner padding 15 such that at least part of the floating liner 50 extends outside of the cavity 13 of the sports helmet 10. In this example, this may allow the floating liner 50 to acquire an inverted dome shape in which its outer surface 61 is generally concave (instead of generally convex when the floating liner 50 has its dome shape within the sports helmet 10) and its inner surface 59 is generally convex
15 (instead of generally concave when the floating liner 50 has its dome shape within the sports helmet 10). In this case, the rigidity of the floating liner 50 allows it to be self-standing even in its inverted dome shape.

While in this embodiment the floating liner 50 is implemented in a particular way, the
20 floating liner 50 may be implemented in various other ways in other embodiments. For example, in other embodiments, the floating liner 50 may be made of materials other than those discussed herein, may have a shape different than that discussed herein, and/or may be located elsewhere between the external surface 18 and the internal surface 20 of the helmet 10 (e.g., between the outer shell 12 and the inner
25 padding 15).

Moreover, although in embodiments considered above the rotational impact protection device is implemented by the floating liner 50, the rotational impact protection device may be implemented in various other ways in other embodiments.

For example, in other embodiments, the inner padding 15 may implement the rotational impact protection device by allowing an angular movement of the external surface 18 of the helmet 10 relative to the inner surface 34 of the inner padding 15 in response to a rotational impact to absorb rotational energy from the rotational impact. For instance, in some embodiments, each of the inner pad members 15A, 15B, 15C, 15D, 15E may comprise elastically shearable material which can shear in response to a rotational impact to allow an angular movement of the external surface 18 of the helmet 10 relative to the inner surface 34 of the inner padding 15 (e.g., each of the inner pad members 15A, 15B, 15C, 15D, 15E of the inner padding 15 may comprise a shear pad). In other embodiments, the inner pad members 15A, 15B, 15C, 15D, 15E of the inner padding 15 may not necessarily themselves shear, but may be mounted to an elastically shearable layer disposed between the outer shell 12 and the inner padding 15. For example, the shearable material of the inner padding 15 and/or the shearable layer may be a gel, an elastomer, or any other suitable material that can elastically shear.

Any feature of any embodiment discussed herein may be combined with any feature of any other embodiment discussed herein in some examples of implementation.

Various embodiments and examples have been presented for the purpose of describing, but not limiting, the invention. Various modifications and enhancements will become apparent to those of ordinary skill in the art and are within the scope of the invention, which is defined by the appended claims.

CLAIMS

1. A sports helmet for protecting a head of a wearer, comprising:

- (a) an outer shell comprising an external surface of said sports helmet;
- 5 (b) an inner padding disposed between said outer shell and the wearer's head when said sports helmet is worn, said inner padding defining a cavity for receiving the wearer's head;
- (c) a rotational impact protection device disposed between said inner padding and the wearer's head when said sports helmet is worn; and
- 10 (d) an adjustment mechanism operable by the wearer to vary an internal volume of said cavity to adjust a fit of said sports helmet on the wearer's head;

wherein said outer shell comprises a first shell member and a second shell member moveable relative to one another once said adjustment mechanism is

15 operated by the wearer to vary said internal volume of said cavity;

wherein said rotational impact protection device comprises a surface movable relative to said external surface of said sports helmet in response to a rotational impact on said outer shell to absorb rotational energy from the rotational impact; and

20 wherein said rotational impact protection device has a portion that undergoes displacement when said first shell member and said second shell members are moved relative to one another.

2. The sports helmet of claim 1, wherein said portion of said rotational impact protection device is elastically deformable when said first shell member and

25 said second shell member are moved relative to one another.

3. The sports helmet of claim 1, wherein said portion of said rotational impact protection device comprises an opening changeable in shape when said first shell member and said second shell member are moved relative to one

30 another.

4. The sports helmet of any one of claims 1 to 3, wherein said adjustment mechanism comprises an actuator mounted to one of said first and second shell members, said actuator being movable by the wearer between a locked position, in which said actuator engages one of the other one of said first and second shell members for locking said first and second shell members relative to one another, and a released position, in which said actuator is disengaged from the other one of said first and second shell members for allowing said first and second shell members to move relative to one another.
5. The sports helmet of any one of claims 1 to 4, wherein said inner padding comprises an occipital pad for engaging an occipital region of the wearer's head and said adjustment mechanism is a first adjustment mechanism, said sports helmet further comprising a second adjustment mechanism being movable by the wearer and being connected to said occipital pad such that said occipital pad is movable from a first position towards a second position in which said occipital pad applies a greater pressure upon the occipital region of the wearer's head.
6. The sports helmet of claim 5, wherein said rotational impact protection device is mounted to said occipital pad such that said rotational impact protection device moves with said occipital pad when said occipital pad moves from its first position towards its second position.
7. The sports helmet of any one of claims 1 to 4, wherein said inner padding comprises a plurality of inner pad members movable relative to one another when said first shell member and said second shell member are moved relative to one another.
8. The sports helmet of claim 7, wherein a first one of said inner pad members is affixed to said first shell member and a second one of said inner pad members is affixed to said second shell member, said rotational impact protection device being connected to at least one of said first shell member and the first one of

inner pad members and to at least one of said second shell member and the second one of said inner pad members.

9. The sports helmet of any one of claims 1 to 4, wherein said rotational impact protection device is a floating liner disposed between said inner padding and the wearer's head when said sports helmet is worn.

10. The sports helmet of claim 9, wherein said floating liner is elastically deformable when said adjustment mechanism is operated by the wearer to vary said internal volume of said cavity.

11. The sports helmet of claim 9 or 10, wherein said floating liner comprises stretchable material such that at least part of the rotational energy is absorbed by stretching of said stretchable material.

12. The sports helmet of claim 11, wherein said stretchable material has a resilience of less than 30% measured using ASTM D2632-01.

13. The sports helmet of claim 11 or 12, wherein said stretchable material makes up at least a majority of said floating liner.

14. The sports helmet of any one of claims 9 to 13, wherein said floating liner comprises compressible material for compressing in response to a radial impact force component of the rotational impact.

15. The sports helmet of any one of claims 9 to 14, wherein said floating liner comprises a first portion and a second portion that is thicker than said first portion of said floating liner to provide a padding area.

16. The sports helmet of any one of claims 9 to 15, wherein said floating liner has an inner surface for facing the wearer's head and an outer surface facing said inner padding, said outer surface of said floating liner being in frictional engagement

with said inner padding in response to the rotational impact such that at least part of the rotational energy is dissipated by friction between said inner padding and said outer surface of said floating liner, said outer surface of said floating liner having a coefficient of friction with said inner padding of at least 0.2 measured according to ASTM G115-10.

17. The sports helmet of any one of claims 9 to 16, wherein said floating liner is fastened to at least one of said inner padding and said outer shell via a plurality of fastening members that are spaced apart from one another.

18. The sports helmet of claim 17, wherein said fastening members are located adjacent to a bottom edge of said inner padding or said outer shell.

19. The sports helmet of claim 17 or 18, wherein a first one of said fastening members engages said first shell member and a second one of said fastening members engages said second shell member.

20. The sports helmet of claim 17 or 18, wherein a first one of said fastening members and a second one of said fastening members are located in front of left and right ears of the wearer when said sports helmet is worn, and a third one of said fastening members and a fourth one of said fastening members are located behind the left and right ears of the wearer when said sports helmet is worn.

21. The sports helmet of any one of claims 17 to 20, wherein an interface between said floating liner and said inner padding is fastener-free at an apex of said interface between said floating liner and said inner padding.

22. The sports helmet of claim 21, wherein said interface between said floating liner and said inner padding is fastener-free from said apex of said interface between said floating liner and said inner padding to said fastening members.

23. The sports helmet of any one of claims 9 to 22, wherein said floating liner comprises a top portion for contacting a top region of the wearer's head and a plurality of branches extending downwardly from said top portion of said floating liner for contacting the wearer's head.

5

24. The sports helmet of any one of claims 9 to 23, further comprising an occipital pad for engaging an occipital region of the wearer's head, said occipital pad being selectively movable relative to said outer shell by the wearer, said floating liner being mounted to said occipital pad such that said floating liner moves with said occipital pad when said occipital pad is moved.

10

25. A sports helmet for protecting a head of a wearer, comprising:

- (a) an outer shell comprising an external surface of said sports helmet;
- (b) an inner padding disposed between said outer shell and the wearer's head when said sports helmet is worn, said inner padding defining a cavity for receiving the wearer's head;
- (c) a floating liner disposed between said inner padding and the wearer's head when said sports helmet is worn; and
- (d) an adjustment mechanism operable by the wearer to vary an internal volume of said cavity to adjust a fit of said sports helmet on the wearer's head;

15

20

wherein said outer shell comprises a first shell member and a second shell member moveable relative to one another once said adjustment mechanism is operated by the wearer to vary said internal volume of said cavity;

25

wherein said floating liner is movable relative to said outer shell in response to a rotational impact on said outer shell to absorb rotational energy from the rotational impact; and

wherein said floating liner has a portion that undergoes displacement when said first shell member and said second shell members are moved relative to one another.

30

26. The sports helmet of claim 25, wherein said portion of said floating liner is elastically deformable when said first shell member and said second shell member are moved relative to one another.

5 27. The sports helmet of claim 25, wherein said portion of said floating liner comprises an opening changeable in shape when said first shell member and said second shell member are moved relative to one another.

10 28. The sports helmet of any one of claims 25 to 27, wherein said adjustment mechanism comprises an actuator mounted to one of said first and second shell members, said actuator being movable by the wearer between a locked position, in which said actuator engages one of the other one of said first and second shell members for locking said first and second shell members relative to one another, and a released position, in which said actuator is disengaged from the other one of said first and second shell members for allowing said first and second shell members to move relative to one another.

20 29. The sports helmet of any one of claims 25 to 28, wherein said inner padding comprises an occipital pad for engaging an occipital region of the wearer's head and said adjustment mechanism is a first adjustment mechanism, said sports helmet further comprising a second adjustment mechanism being movable by the wearer and being connected to said occipital pad such that said occipital pad is movable from a first position towards a second position in which said occipital pad applies a greater pressure upon the occipital region of the wearer's head.

25 30. The sports helmet of claim 29, wherein said floating liner is mounted to said occipital pad such that said rotational impact protection device moves with said occipital pad when said occipital pad moves from its first position towards its second position.

30

31. The sports helmet of claim 25 to 28, wherein said inner padding comprises a plurality of inner pad members movable relative to one another using said adjustment mechanism to adjust said internal volume of said cavity.
- 5 32. The sports helmet of any one of claims 25 to 31, wherein said floating liner is elastically deformable to accommodate adjustments of said internal volume of said cavity.
- 10 33. The sports helmet of any one of claims 25 to 32, wherein said floating liner comprises stretchable material such that at least part of the rotational energy is absorbed by stretching of said stretchable material.
34. The sports helmet of claim 33, wherein said stretchable material has a resilience of less than 30% measured using ASTM D2632-01.
- 15 35. The sports helmet of claim 33 or 34, wherein said stretchable material makes up at least a majority of said floating liner.
- 20 36. The sports helmet of claim 33 or 34, wherein said stretchable material makes up substantially an entirety of said floating liner.
- 25 37. The sports helmet of any one of claims 33 to 36, wherein said stretchable material is compressible for compressing in response to a radial impact force component of the rotational impact.
38. The sports helmet of any one of claims 25 to 37, wherein said floating liner comprises a first portion and a second portion that is thicker than said first portion of said floating liner to provide a padding area.
- 30 39. The sports helmet of any one of claims 25 to 38, wherein said floating liner comprises an inner surface for contacting the wearer's head and an outer surface facing said inner padding, said outer surface of said floating liner being

in frictional engagement with said inner padding in response to the rotational impact such that at least part of the rotational energy is dissipated by friction between said inner padding and said outer surface of said floating liner, said outer surface of said floating liner having a coefficient of friction with said inner padding of at least 0.2 measured according to ASTM G115-10.

40. The sports helmet of any one of claims 25 to 39, wherein said floating liner comprises a top portion for contacting a top region of the wearer's head and a plurality of branches extending downwardly from said top portion of said floating liner for contacting the wearer's head.

41. The sports helmet of any one of claims 25 to 28, further comprising an occipital pad for engaging an occipital region of the wearer's head, said occipital pad being selectively movable relative to said outer shell by the wearer, said floating liner being mounted to said occipital pad such that said floating liner moves with said occipital pad when said occipital pad is moved.

42. The sports helmet of any one of claims 25 to 28, wherein a first one of said inner pad members is affixed to said first shell member and a second one of said inner pad members is affixed to said second shell member, said floating liner being connected to at least one of said first shell member and the first one of said inner pad members and to at least one of said second shell member and the second one of said inner pad members.

43. A hockey or lacrosse helmet for protecting a head of a wearer, comprising:

- (a) an outer shell comprising an external surface of said helmet;
- (b) an inner padding disposed between said outer shell and the wearer's head when said helmet is worn, said inner padding defining a cavity for receiving the wearer's head;
- (c) a floating liner disposed between said inner padding and the wearer's head when said helmet is worn; and

(d) an adjustment mechanism operable by the wearer to vary an internal volume of said cavity to adjust a fit of said helmet on the wearer's head; wherein said outer shell comprises a first shell member and a second shell member moveable relative to one another once said adjustment mechanism is operated by the wearer to vary said internal volume of said cavity; wherein said floating liner is movable relative to said outer shell in response to a rotational impact on said outer shell to absorb rotational energy from the rotational impact; and wherein said floating liner has a portion that undergoes displacement when said first shell member and said second shell members are moved relative to one another.

44. The hockey or lacrosse helmet of claim 43, wherein said portion of said floating liner is elastically deformable when said first shell member and said second shell member are moved relative to one another.

45. The hockey or lacrosse helmet of claim 43, wherein said portion of said floating liner comprises an opening changeable in shape when said first shell member and said second shell member are moved relative to one another.

46. The hockey or lacrosse helmet of any one of claims 43 to 45, wherein said adjustment mechanism comprises an actuator mounted to one of said first and second shell members, said actuator being movable by the wearer between a locked position, in which said actuator engages one of the other one of said first and second shell members for locking said first and second shell members relative to one another, and a released position, in which said actuator is disengaged from the other one of said first and second shell members for allowing said first and second shell members to move relative to one another.

47. The hockey or lacrosse helmet of any one of claims 43 to 46, wherein said inner padding comprises an occipital pad for engaging an occipital region of

the wearer's head and said adjustment mechanism is a first adjustment mechanism, said sports helmet further comprising a second adjustment mechanism being movable by the wearer and being connected to said occipital pad such that said occipital pad is movable from a first position towards a second position in which said occipital pad applies a greater pressure upon the occipital region of the wearer's head.

48. The hockey or lacrosse helmet of claim 47, wherein said floating liner is mounted to said occipital pad such that said rotational impact protection device moves with said occipital pad when said occipital pad moves from its first position towards its second position.

49. The hockey or lacrosse helmet of any one of claims 43 to 46, wherein said inner padding comprises a plurality of inner pad members movable relative to one another when said first shell member and said second shell member are moved relative to one another.

50. The hockey or lacrosse helmet of any one of claims 43 to 49, wherein said floating liner is elastically deformable to accommodate adjustments of said internal volume of said cavity when said first shell member and said second shell member are moved relative to one another.

51. The hockey or lacrosse helmet of any one of claims 43 to 46, wherein a first one of said inner pad members is affixed to said first shell member and a second one of said inner pad members is affixed to said second shell member, said floating liner being connected to at least one of said first shell member and the first one of said inner pad members and to at least one of said second shell member and the second one of said inner pad members.

52. The hockey or lacrosse helmet of any one of claims 43 to 51, wherein said floating liner comprises stretchable material such that at least part of the rotational energy is absorbed by stretching of said stretchable material.

53. The hockey or lacrosse helmet of claim 52, wherein said stretchable material has a resilience of less than 30% measured using ASTM D2632-01.
- 5 54. The hockey or lacrosse helmet of claim 52 or 53, wherein said stretchable material makes up at least a majority of said floating liner.
55. The hockey or lacrosse helmet of claim 52 or 53, wherein said stretchable material makes up substantially an entirety of said floating liner.
- 10 56. The hockey or lacrosse helmet of any one of claims 52 to 55, wherein said stretchable material is compressible for compressing in response to a radial impact force component of the rotational impact.
- 15 57. The hockey or lacrosse helmet of claim 45, wherein said helmet extends along a longitudinal axis and said opening is a slot extending transversally to said longitudinal axis.
- 20 58. The hockey or lacrosse helmet of any one of claims 43 to 57, wherein said floating liner comprises compressible material for compressing in response to a radial impact force component of the rotational impact.
- 25 59. The hockey or lacrosse helmet of any one of claims 43 to 58, wherein said floating liner comprises a first portion and a second portion that is thicker than said first portion of said floating liner to provide a padding area.
60. The hockey or lacrosse helmet of any one of claims 43 to 59, wherein an interface between said floating liner and said inner padding is fastener-free at an apex of said interface between said floating liner and said inner padding.
- 30 61. The hockey or lacrosse helmet of claim 60, wherein said interface between said floating liner and said inner padding is fastener-free from said apex of

said interface between said floating liner and said inner padding to a point of said interface between said floating liner and said inner padding that is at least 3 cm below said apex of said interface between said floating liner and said inner padding.

5

62. The hockey or lacrosse helmet of claim 60, wherein said floating liner is fastened to at least one of said inner padding and said outer shell via a plurality of fastening members located adjacent a bottom edge of said outer shell, said interface between said floating liner and said inner padding being fastener-free from said apex of said interface between said floating liner and said inner padding to said fastening members.

10

63. The hockey or lacrosse helmet of any one of claims 43 to 62, wherein said floating liner is fastened to at least one of said inner padding and said outer shell via a plurality of fastening members that are spaced apart from one another.

15

64. The hockey or lacrosse helmet of claim 63, wherein said fastening members are located adjacent to a bottom edge of said inner padding or said outer shell.

20

65. The hockey or lacrosse helmet of claim 63 or 64, wherein said plurality of fastening members comprises at least three fastening members.

66. The hockey or lacrosse helmet of any one of claims 63 to 65, wherein said helmet extends along a longitudinal axis bisecting said helmet into a first half and a second half, a first one of said fastening members is located in the first half of said helmet, and a second one of said fastening members is located in the second half of said helmet.

25

67. The hockey or lacrosse helmet of any one of claims 63 to 65, wherein a first one of said fastening members engages said first shell member and a second one of said fastening members engages said second shell member.

30

68. The hockey or lacrosse helmet of any one of claims 63 to 67, wherein a first one of said fastening members and a second one of said fastening members are located in front of left and right ears of the wearer when said helmet is worn, and a third one of said fastening members and a fourth one of said fastening members are located behind the left and right ears of the wearer when said helmet is worn.
69. The hockey or lacrosse helmet of any one of claims 63 to 67, wherein said first shell member is a front shell member and said second shell member is a rear shell member, said front shell member comprises left and right projections extending downwardly in front of left and right ears of the wearer, said rear shell member comprises left and right portions located behind the left and right ears of the wearer, and said floating liner is fastened to said left projection of said front shell member via a first one of said fastening members, to said right projection of said front shell member via a second one of said fastening members, to said left portion of said rear shell member via a third one of said fastening members, and to said right portion of said rear shell member via a fourth one of said fastening members.
70. The hockey or lacrosse helmet of any one of claims 43 to 51, wherein said floating liner comprises a top portion for contacting a top region of the wearer's head and a plurality of branches extending downwardly from said top portion of said floating liner for contacting the wearer's head.
71. The hockey or lacrosse helmet of claim 70, wherein said branches are fastened to at least one of said inner padding and said outer shell via a plurality of fastening members that are spaced apart from one another.
72. The hockey or lacrosse helmet of claim 71, wherein said fastening members are located adjacent to a bottom edge of said inner padding or said outer shell.

73. The hockey or lacrosse helmet of any one of claims 70 to 72, wherein each of said branches comprises stretchable material such that at least part of the rotational energy is absorbed by stretching of the stretchable material of at least one of said branches.

5

74. The hockey or lacrosse helmet of any one of claims 70 to 73, wherein said floating liner comprises stretchable material such that at least part of the rotational energy is absorbed by stretching of the stretchable material and each of said fastening members comprises rigid material that substantially does not stretch in response to the rotational impact.

10

75. The hockey or lacrosse helmet of claim 74, wherein said rigid material is selected in a group consisting of polyethylene, NYLON, polycarbonate and polyacetal.

15

76. The hockey or lacrosse helmet of any one of claims 43 to 46, further comprising an occipital pad for engaging an occipital region of the wearer's head, said occipital pad being selectively movable relative to said outer shell, said floating liner being mounted to said occipital pad such that said floating liner moves with said occipital pad when said occipital pad is moved.

20

77. The hockey or lacrosse helmet any one of claims 43 to 76, wherein said floating liner comprises foam material.

25

78. The hockey or lacrosse helmet of claim 77, wherein said foam material is PORON XRDTM foam.

30

79. The hockey or lacrosse helmet of any one of claims 43 to 78, wherein said floating liner comprises an inner surface for facing the wearer's head and an outer surface facing said inner padding, said outer surface of said floating liner being in frictional engagement with said inner padding in response to the rotational impact such that at least part of the rotational energy is dissipated by

friction between said inner padding and said outer surface of said floating liner, said outer surface of said floating liner having a coefficient of friction with said inner padding of at least 0.2 measured according to ASTM G115-10.

- 5 80. A sports helmet for protecting a head of a wearer, comprising:
- (a) an outer shell comprising an external surface of said sports helmet, said outer shell comprising first and second shell members moveable one relative to the other;
 - 10 (b) an inner padding disposed between said outer shell and the wearer's head, said inner padding defining a cavity for receiving the wearer's head;
 - (c) a rotational impact protection means disposed between said inner padding and the wearer's head when said sports helmet is worn; and
 - 15 (d) adjustment means operable by the wearer for allowing adjustment of said first shell member relative to said second shell member to achieve a desired fit of said inner padding on the wearer's head;

wherein said rotational impact protection means is movable relative to said outer shell in response to a rotational impact on said outer shell to absorb rotational energy from the rotational impact.

20

81. The sports helmet of claim 80, wherein said rotational impact protection means comprises an opening changeable in shape when said first shell member and said second shell member are moved relative to one another.

- 25 82. The sports helmet of claim 80 or 81, wherein said adjustment means comprises an actuator mounted to one of said first and second shell members, said actuator being movable by the wearer between a locked position, in which said actuator engages one of the other one of said first and second shell members for locking said first and second shell members relative to one another, and a released position, in which said actuator is disengaged from the
- 30 other one of said first and second shell members for allowing said first and second shell members to move relative to one another.

83. The sports helmet of any one of claims 80 to 82, wherein said inner padding comprises an occipital pad for engaging an occipital region of the wearer's head and said adjustment means is a first adjustment means, said sports helmet further comprising a second adjustment means being movable by the wearer and being connected to said occipital pad such that said occipital pad is movable from a first position towards a second position in which said occipital pad applies a greater pressure upon the occipital region of the wearer's head.

84. The sports helmet of claim 83, wherein said rotational impact protection means is mounted to said occipital pad such that said rotational impact protection means moves with said occipital pad when said occipital pad moves from its first position towards its second position.

85. The sports helmet of claim 82, wherein said inner padding comprises a plurality of inner pad members movable relative to one another when said first shell member and said second shell member are moved relative to one another.

86. The sports helmet of claim 85, wherein a first one of said inner pad members is affixed to said first shell member and a second one of said inner pad members is affixed to said second shell member, said rotational impact protection means being connected to at least one of said first shell member and the first one of said inner pad members and to at least one of said second shell member and the second one of said inner pad members.

87. The sports helmet of any one of claims 80 to 82, wherein said rotational impact protection means includes a floating liner disposed between said inner padding and the wearer's head when said sports helmet is worn.

88. The sports helmet of claim 87, wherein said floating liner is elastically deformable when said adjustment means is operated by the wearer to vary the internal volume of said cavity.
- 5 89. The sports helmet of claim 87 or 88, wherein said floating liner comprises stretchable material such that at least part of a rotational energy produced during the rotational impact is absorbed by stretching of said stretchable material.
- 10 90. The sports helmet of claim 89, wherein said stretchable material has a resilience of less than 30% measured using ASTM D2632-01.
91. The sports helmet of claim 89 or 90, wherein said stretchable material makes up at least a majority of said floating liner.
- 15 92. The sports helmet of any one of claims 87 to 91, wherein said floating liner comprises compressible material for compressing in response to a radial impact force component of the rotational impact.
- 20 93. The sports helmet of any one of claims 87 to 92, wherein said floating liner comprises a first portion and a second portion that is thicker than said first portion of said floating liner to provide a padding area.
- 25 94. The sports helmet of any one of claims 87 to 93, wherein said floating liner comprises an inner surface for contacting the wearer's head and an outer surface facing said inner padding, said outer surface of said floating liner being in frictional engagement with said inner padding in response to the rotational impact such that at least part of rotational energy produced during the rotational impact is dissipated by friction between said inner padding and said
- 30 outer surface of said floating liner, said outer surface of said floating liner having a coefficient of friction with said inner padding of at least 0.2 measured according to ASTM G115-10.

95. The sports helmet of claim 80, wherein said inner padding comprises first and second inner pad members movable relative to one another and wherein said adjustment means is movable by the wearer and is connected to said first inner pad member such that said first inner pad member is movable from a first position towards a second position in which said first inner pad member applies a greater pressure upon a region of the wearer's head.

96. The sports helmet of claim 95, wherein said first inner pad member comprises an occipital pad.

97. A sports helmet for protecting a head of a wearer, comprising:

- (a) an outer shell comprising an external surface of said sports helmet;
- (b) an inner padding disposed between said outer shell and the wearer's head when said sports helmet is worn, said inner padding defining a cavity for receiving the wearer's head;
- (c) a rotational impact protection device disposed between said inner padding and the wearer's head when said sports helmet is worn; and
- (d) an adjustment mechanism operable by the wearer for adjusting an internal volume of said cavity such that a fit of said inner padding on the wearer's head is adjustable;

wherein said rotational impact protection device is movable relative to said outer shell in response to a rotational impact on said outer shell to absorb rotational energy from the rotational impact.

98. The sports helmet of claim 97, wherein said outer shell comprises a first shell member and a second shell member moveable relative to one another and wherein a portion of said rotational impact protection device is elastically deformable when said first shell member and said second shell member are moved relative to one another.

99. The sports helmet of claim 97, wherein said outer shell comprises a first shell member and a second shell member moveable relative to one another and wherein a portion of said rotational impact protection device comprises an opening changeable in shape when said first shell member and said second shell member are moved relative to one another.

100. The sports helmet of any one of claims 98 or 99, wherein said adjustment mechanism comprises an actuator mounted to one of said first and second shell members, said actuator being movable by the wearer between a locked position, in which said actuator engages one of the other one of said first and second shell members for locking said first and second shell members relative to one another, and a released position, in which said actuator is disengaged from the other one of said first and second shell members for allowing said first and second shell members to move relative to one another.

101. The sports helmet of any one of claims 97 to 100, wherein said inner padding comprises an occipital pad for engaging an occipital region of the wearer's head and said adjustment mechanism is a first adjustment mechanism, said sports helmet further comprising a second adjustment mechanism being movable by the wearer and being connected to said occipital pad such that said occipital pad is movable from a first position towards a second position in which said occipital pad applies a greater pressure upon the occipital region of the wearer's head.

102. The sports helmet of claim 101, wherein said rotational impact protection device is mounted to said occipital pad such that said rotational impact protection device moves with said occipital pad when said occipital pad moves from its first position towards its second position.

103. The sports helmet of claim 98 or 99, wherein said inner padding comprises a plurality of inner pad members movable relative to one another when said first

shell member and said second shell member are moved relative to one another.

5 104. The sports helmet of claim 103, wherein a first one of said inner pad members is affixed to said first shell member and a second one of said inner pad members is affixed to said second shell member, said rotational impact protection device being connected to at least one of said first shell member and the first one of said inner pad members and to at least one of said second shell member and the second one of said inner pad members.

10 105. The sports helmet of any one of claims 97 to 104, wherein said rotational impact protection device is a floating liner disposed between said inner padding and the wearer's head when said sports helmet is worn.

15 106. The sports helmet of claim 105, wherein said floating liner is elastically deformable when said adjustment mechanism is operated by the wearer to vary said internal volume of said cavity.

20 107. The sports helmet of claim 105 or 106, wherein said floating liner comprises stretchable material such that at least part of the rotational energy is absorbed by stretching of said stretchable material.

25 108. The sports helmet of claim 107, wherein said stretchable material has a resilience of less than 30% measured using ASTM D2632-01.

109. The sports helmet of claim 107 or 108, wherein said stretchable material makes up at least a majority of said floating liner.

30 110. The sports helmet of any one of claims 105 to 109, wherein said floating liner comprises compressible material for compressing in response to a radial impact force component of the rotational impact.

111. The sports helmet of any one of claims 105 to 110, wherein said floating liner comprises a first portion and a second portion that is thicker than said first portion of said floating liner to provide a padding area.
- 5 112. The sports helmet of any one of claims 105 to 111, wherein said floating liner comprises an inner surface for contacting the wearer's head and an outer surface facing said inner padding, said outer surface of said floating liner being in frictional engagement with said inner padding in response to the rotational impact such that at least part of the rotational energy is dissipated by friction
10 between said inner padding and said outer surface of said floating liner, said outer surface of said floating liner having a coefficient of friction with said inner padding of at least 0.2 measured according to ASTM G115-10.
113. The sports helmet of claim 97, wherein said inner padding comprises first and
15 second inner pad members movable relative to one another and wherein said adjustment mechanism is movable by the wearer and is connected to said first inner pad member such that said first inner pad member is movable from a first position towards a second position in which said first inner pad member applies a greater pressure upon a region of the wearer's head.
- 20 114. The sports helmet of claim 97, wherein at least a portion of said inner padding moves relative to the wearer's head once said adjustment mechanism is operated by the wearer.
- 25 115. A sports helmet for protecting a head of a wearer, comprising:
- (a) an outer shell comprising an external surface of said sports helmet;
 - (b) an inner padding disposed between said outer shell and the wearer's head when said sports helmet is worn, said inner padding defining a cavity for receiving the wearer's head;
 - 30 (c) a rotational impact protection means disposed between said inner padding and the wearer's head when said sports helmet is worn; and

(d) adjustment means operable by the wearer for changing a configuration of said inner padding to vary an internal volume of said cavity such that a fit of said inner padding on the wearer's head is adjustable;

wherein said rotational impact protection means is movable relative to said outer shell in response to a rotational impact on said outer shell to absorb rotational energy from the rotational impact.

116. The sports helmet of claim 115, wherein said outer shell comprises a first shell member and a second shell member moveable relative to one another and wherein a portion of said rotational impact protection means is elastically deformable when said first shell member and said second shell member are moved relative to one another.

117. The sports helmet of claim 115, wherein said outer shell comprises a first shell member and a second shell member moveable relative to one another and wherein a portion of said rotational impact protection means comprises an opening changeable in shape when said first shell member and said second shell member are moved relative to one another.

118. The sports helmet of any one of claims 116 or 117, wherein said adjustment means comprises an actuator mounted to one of said first and second shell members, said actuator being movable by the wearer between a locked position, in which said actuator engages one of the other one of said first and second shell members for locking said first and second shell members relative to one another, and a released position, in which said actuator is disengaged from the other one of said first and second shell members for allowing said first and second shell members to move relative to one another.

119. The sports helmet of any one of claims 115 to 118, wherein said inner padding comprises an occipital pad for engaging an occipital region of the wearer's head and said adjustment means is a first adjustment means, said sports helmet further comprising a second adjustment means being movable by the

wearer and being connected to said occipital pad such that said occipital pad is movable from a first position towards a second position in which said occipital pad applies a greater pressure upon the occipital region of the wearer's head.

5

120. The sports helmet of claim 119, wherein said rotational impact protection means is mounted to said occipital pad such that said rotational impact protection means moves with said occipital pad moves from its first position towards its second position.

10

121. The sports helmet of claim 116 or 117, wherein said inner padding comprises a plurality of inner pad members movable relative to one another when said first shell member and said second shell member are moved relative to one another.

15

122. The sports helmet of claim 121, wherein a first one of said inner pad members is affixed to said first shell member and a second one of said inner pad members is affixed to said second shell member, said rotational impact protection means being connected to at least one of said first shell member and the first one of said inner pad members and to at least one of said second shell member and the second one of said inner pad members.

20

123. The sports helmet of any one of claims 115 to 122, wherein said rotational impact protection means includes a floating liner disposed between said inner padding and the wearer's head when said sports helmet is worn.

25

124. The sports helmet of claim 123, wherein said floating liner is elastically deformable when said adjustment means is operated by the wearer to vary the internal volume of said cavity.

30

125. The sports helmet of claim 123 or 124, wherein said floating liner comprises stretchable material such that at least part of a rotational energy produced

during the rotational impact is absorbed by stretching of said stretchable material.

- 5 126. The sports helmet of claim 125, wherein said stretchable material has a resilience of less than 30% measured using ASTM D2632-01.
127. The sports helmet of claim 125, wherein said stretchable material makes up at least a majority of said floating liner.
- 10 128. The sports helmet of any one of claims 123 to 127, wherein said floating liner comprises compressible material for compressing in response to a radial impact force component of the rotational impact.
- 15 129. The sports helmet of any one of claims 123 to 128, wherein said floating liner comprises a first portion and a second portion that is thicker than said first portion of said floating liner to provide a padding area.
- 20 130. The sports helmet of any one of claims 123 to 129, wherein said floating liner comprises an inner surface for contacting the wearer's head and an outer surface facing said inner padding, said outer surface of said floating liner being in frictional engagement with said inner padding in response to the rotational impact such that at least part of rotational energy produced during the rotational impact is dissipated by friction between said inner padding and said outer surface of said floating liner, said outer surface of said floating liner having a coefficient of friction with said inner padding of at least 0.2 measured according to ASTM G115-10.
- 25 131. The sports helmet of claim 115, wherein said inner padding comprises first and second inner pad members movable relative to one another and wherein said adjustment means is movable by the wearer and is connected to said first inner pad member such that said first inner pad member is movable from a
- 30

first position towards a second position in which said first inner pad member applies a greater pressure upon a region of the wearer's head.

132. The sports helmet of claim 131, wherein said first inner pad member
5 comprises an occipital pad.

Application number / numéro de demande: 2784316


Figures: _____

Pages: 35 - 38


Unscannable items
received with this application
(Request original documents in File Prep. Section on the 10th floor)

Documents reçu avec cette demande ne pouvant être balayés
(Commander les documents originaux dans la section de préparation des dossiers au
10^{ème} étage)



1/40

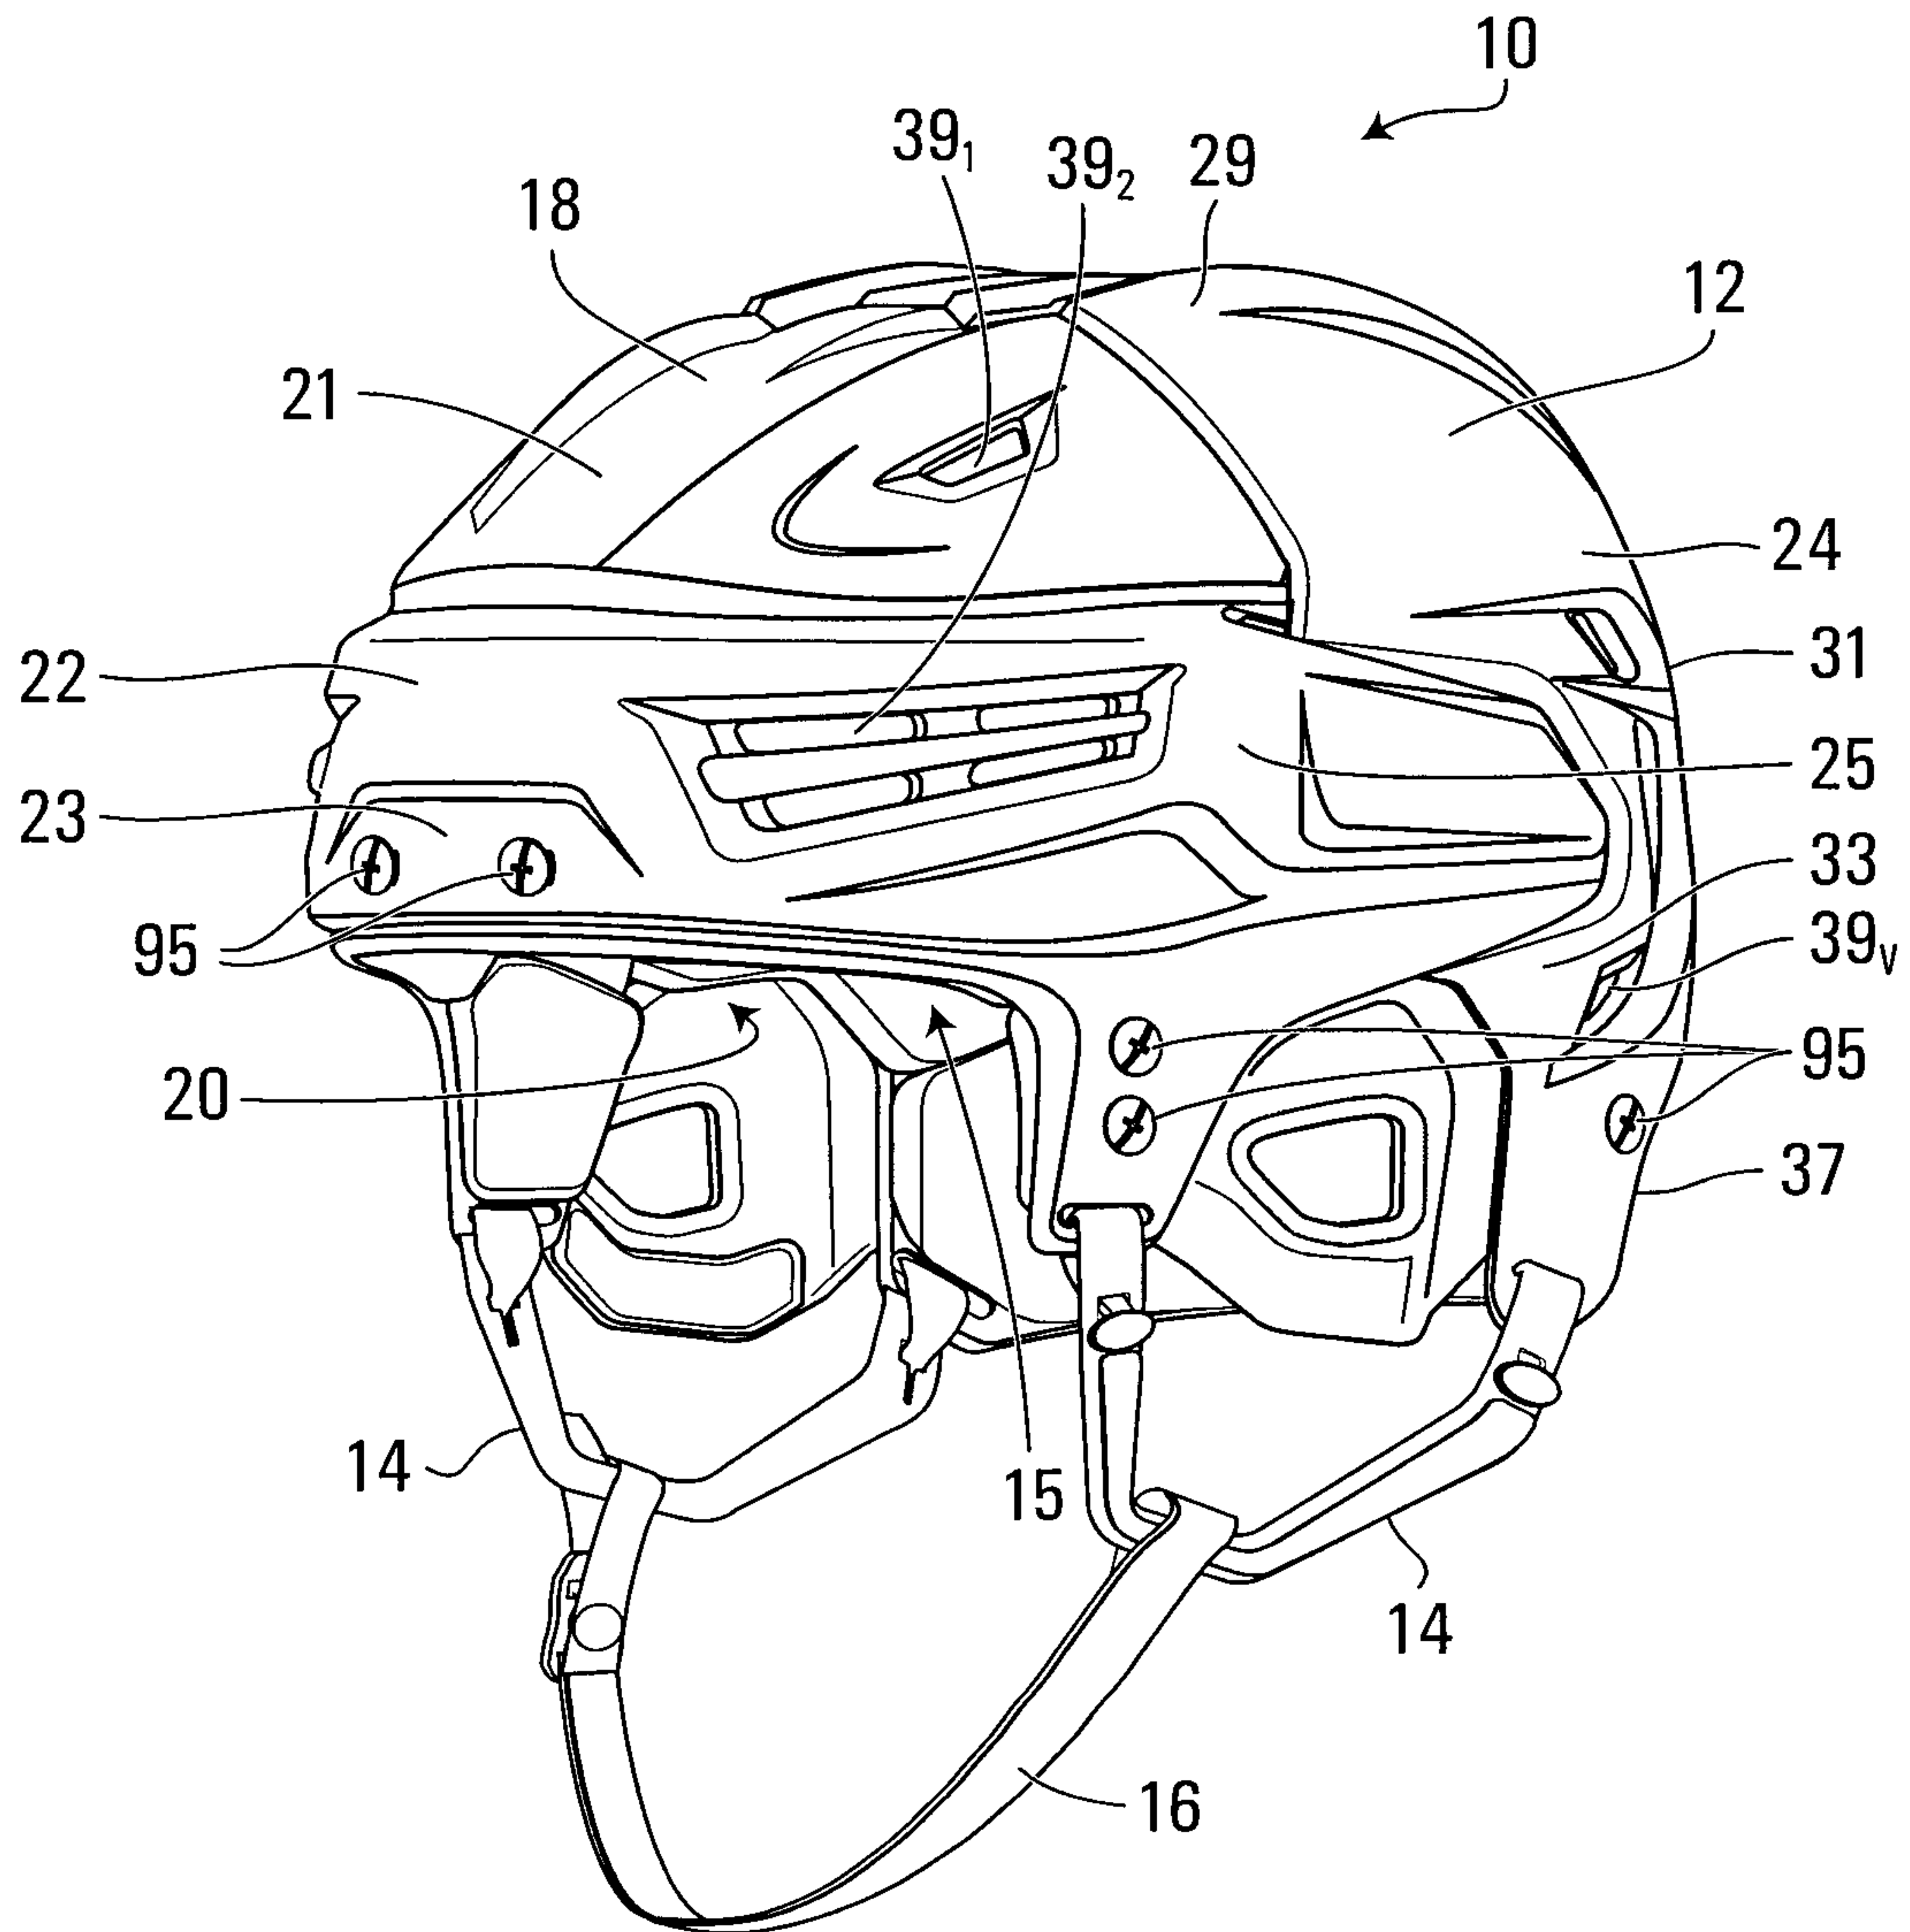**FIG. 1**

2/40

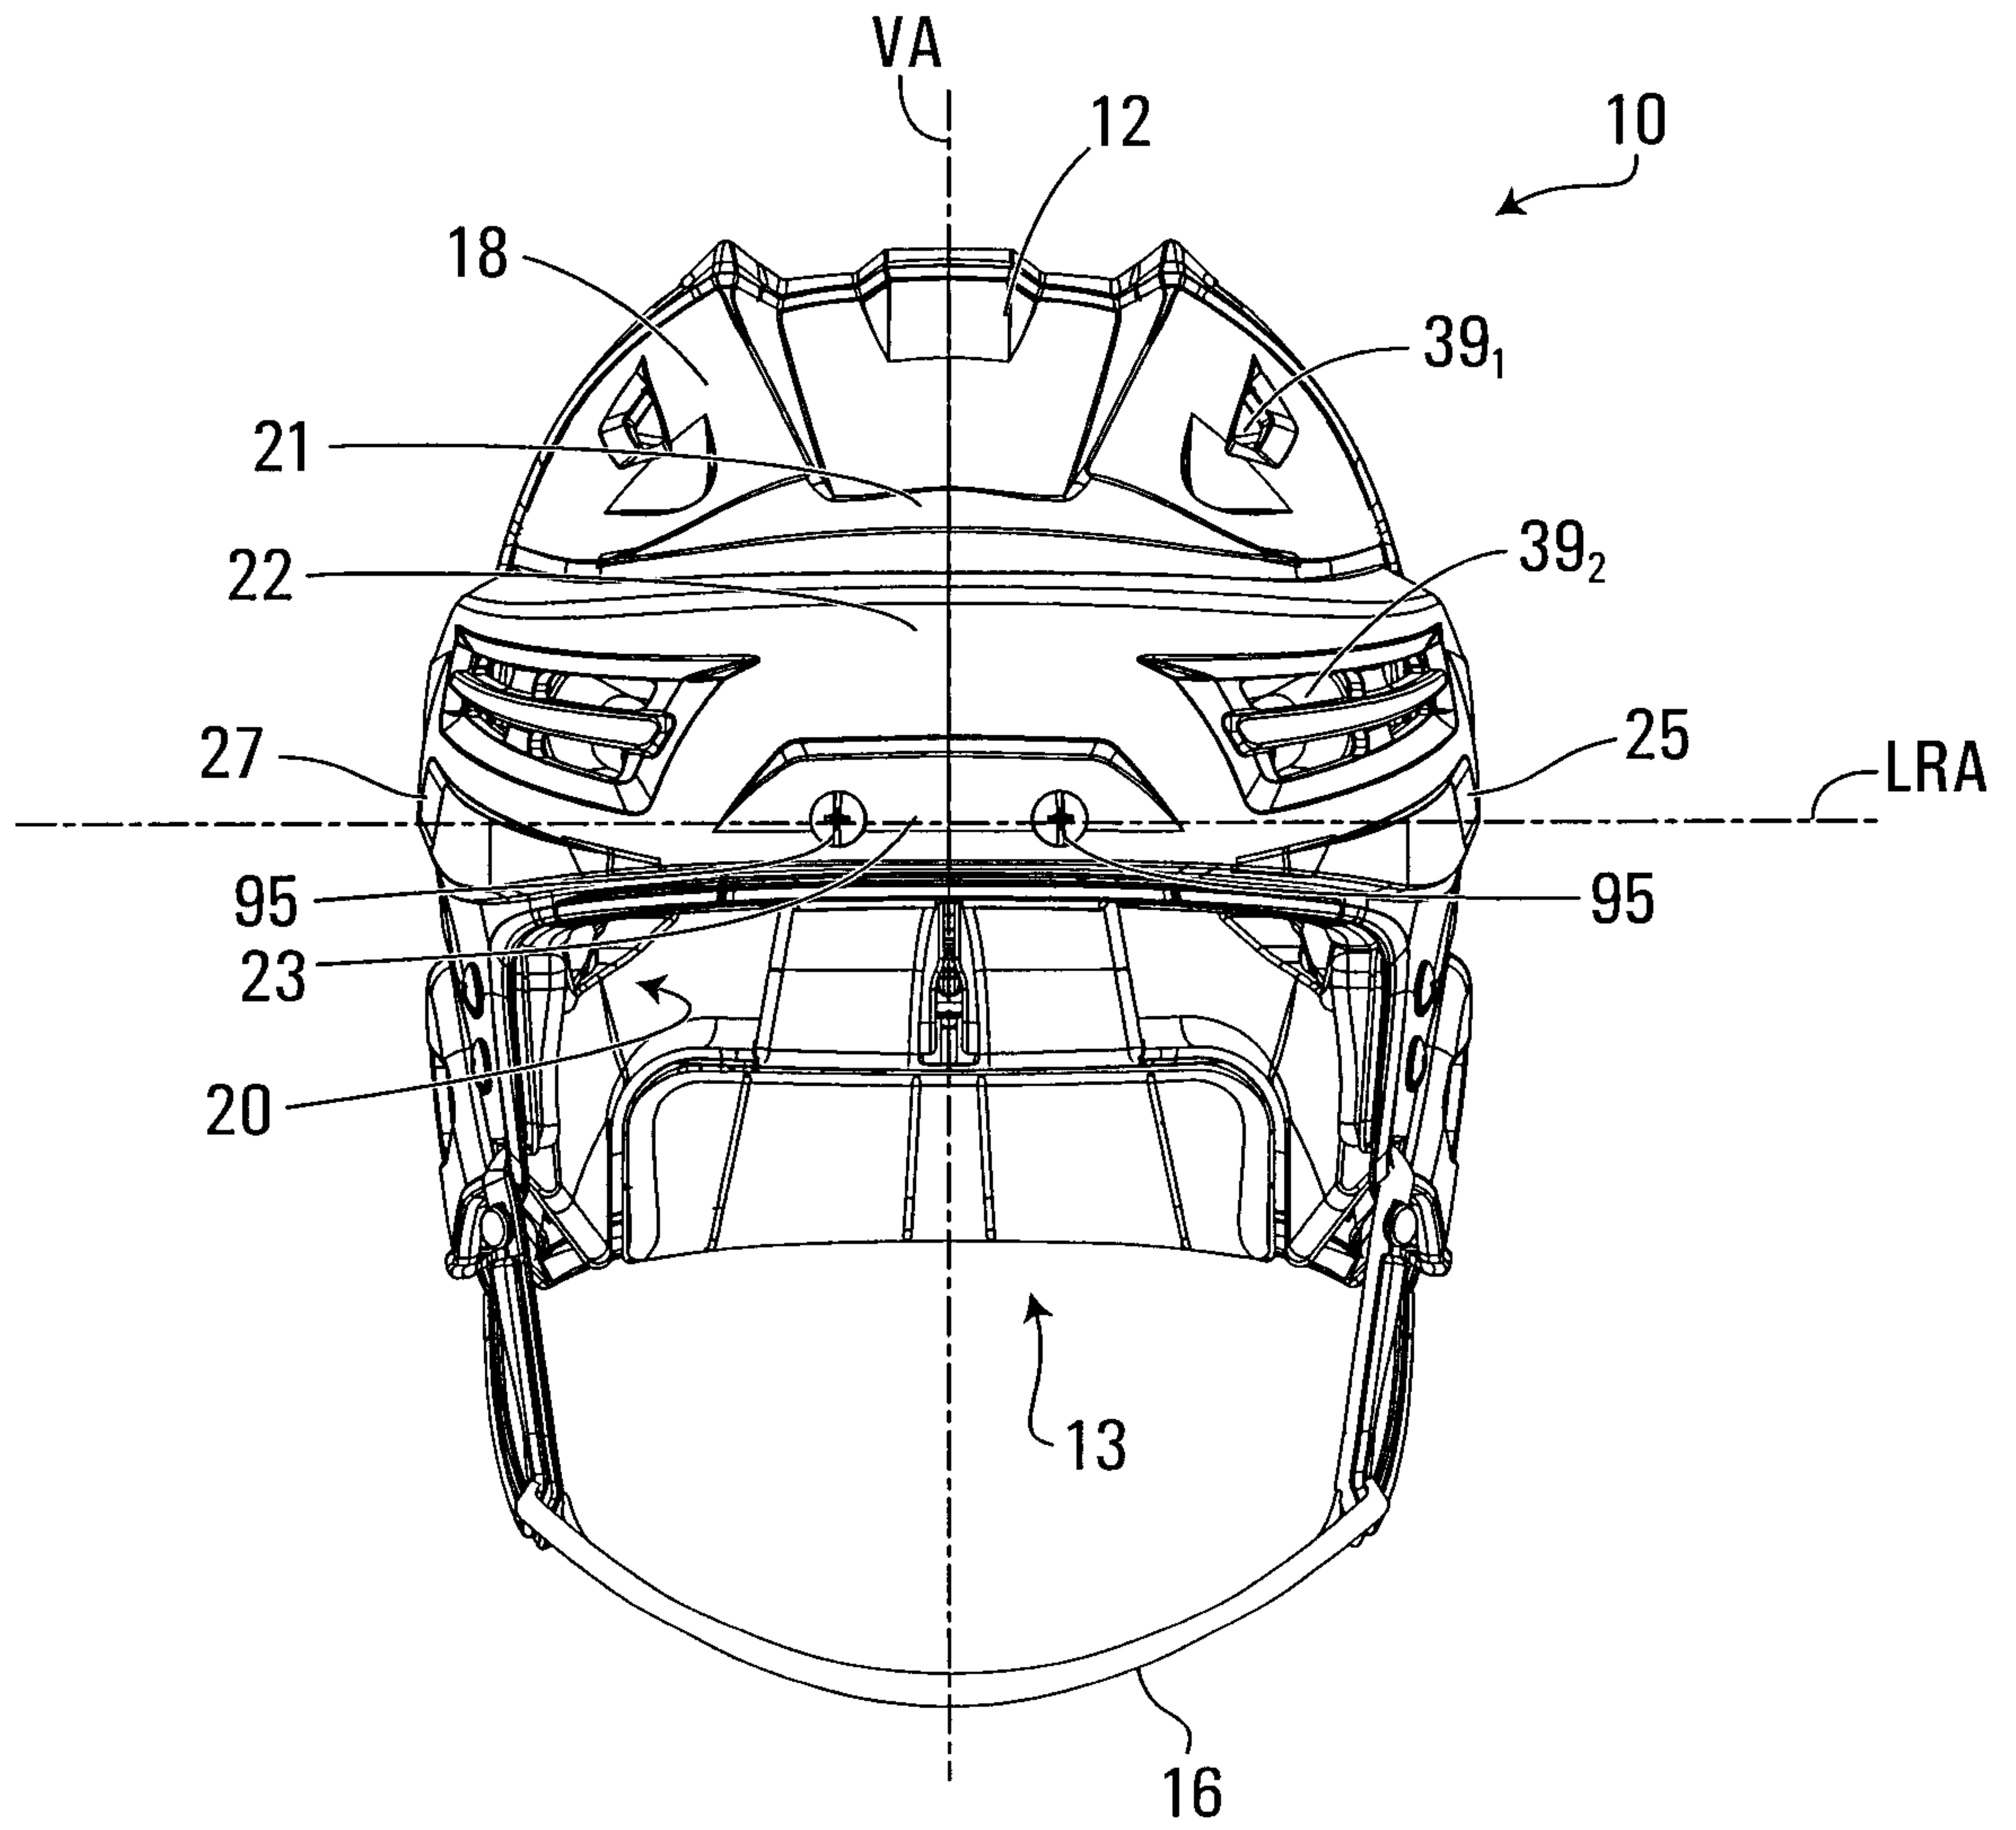**FIG. 2**

3/40

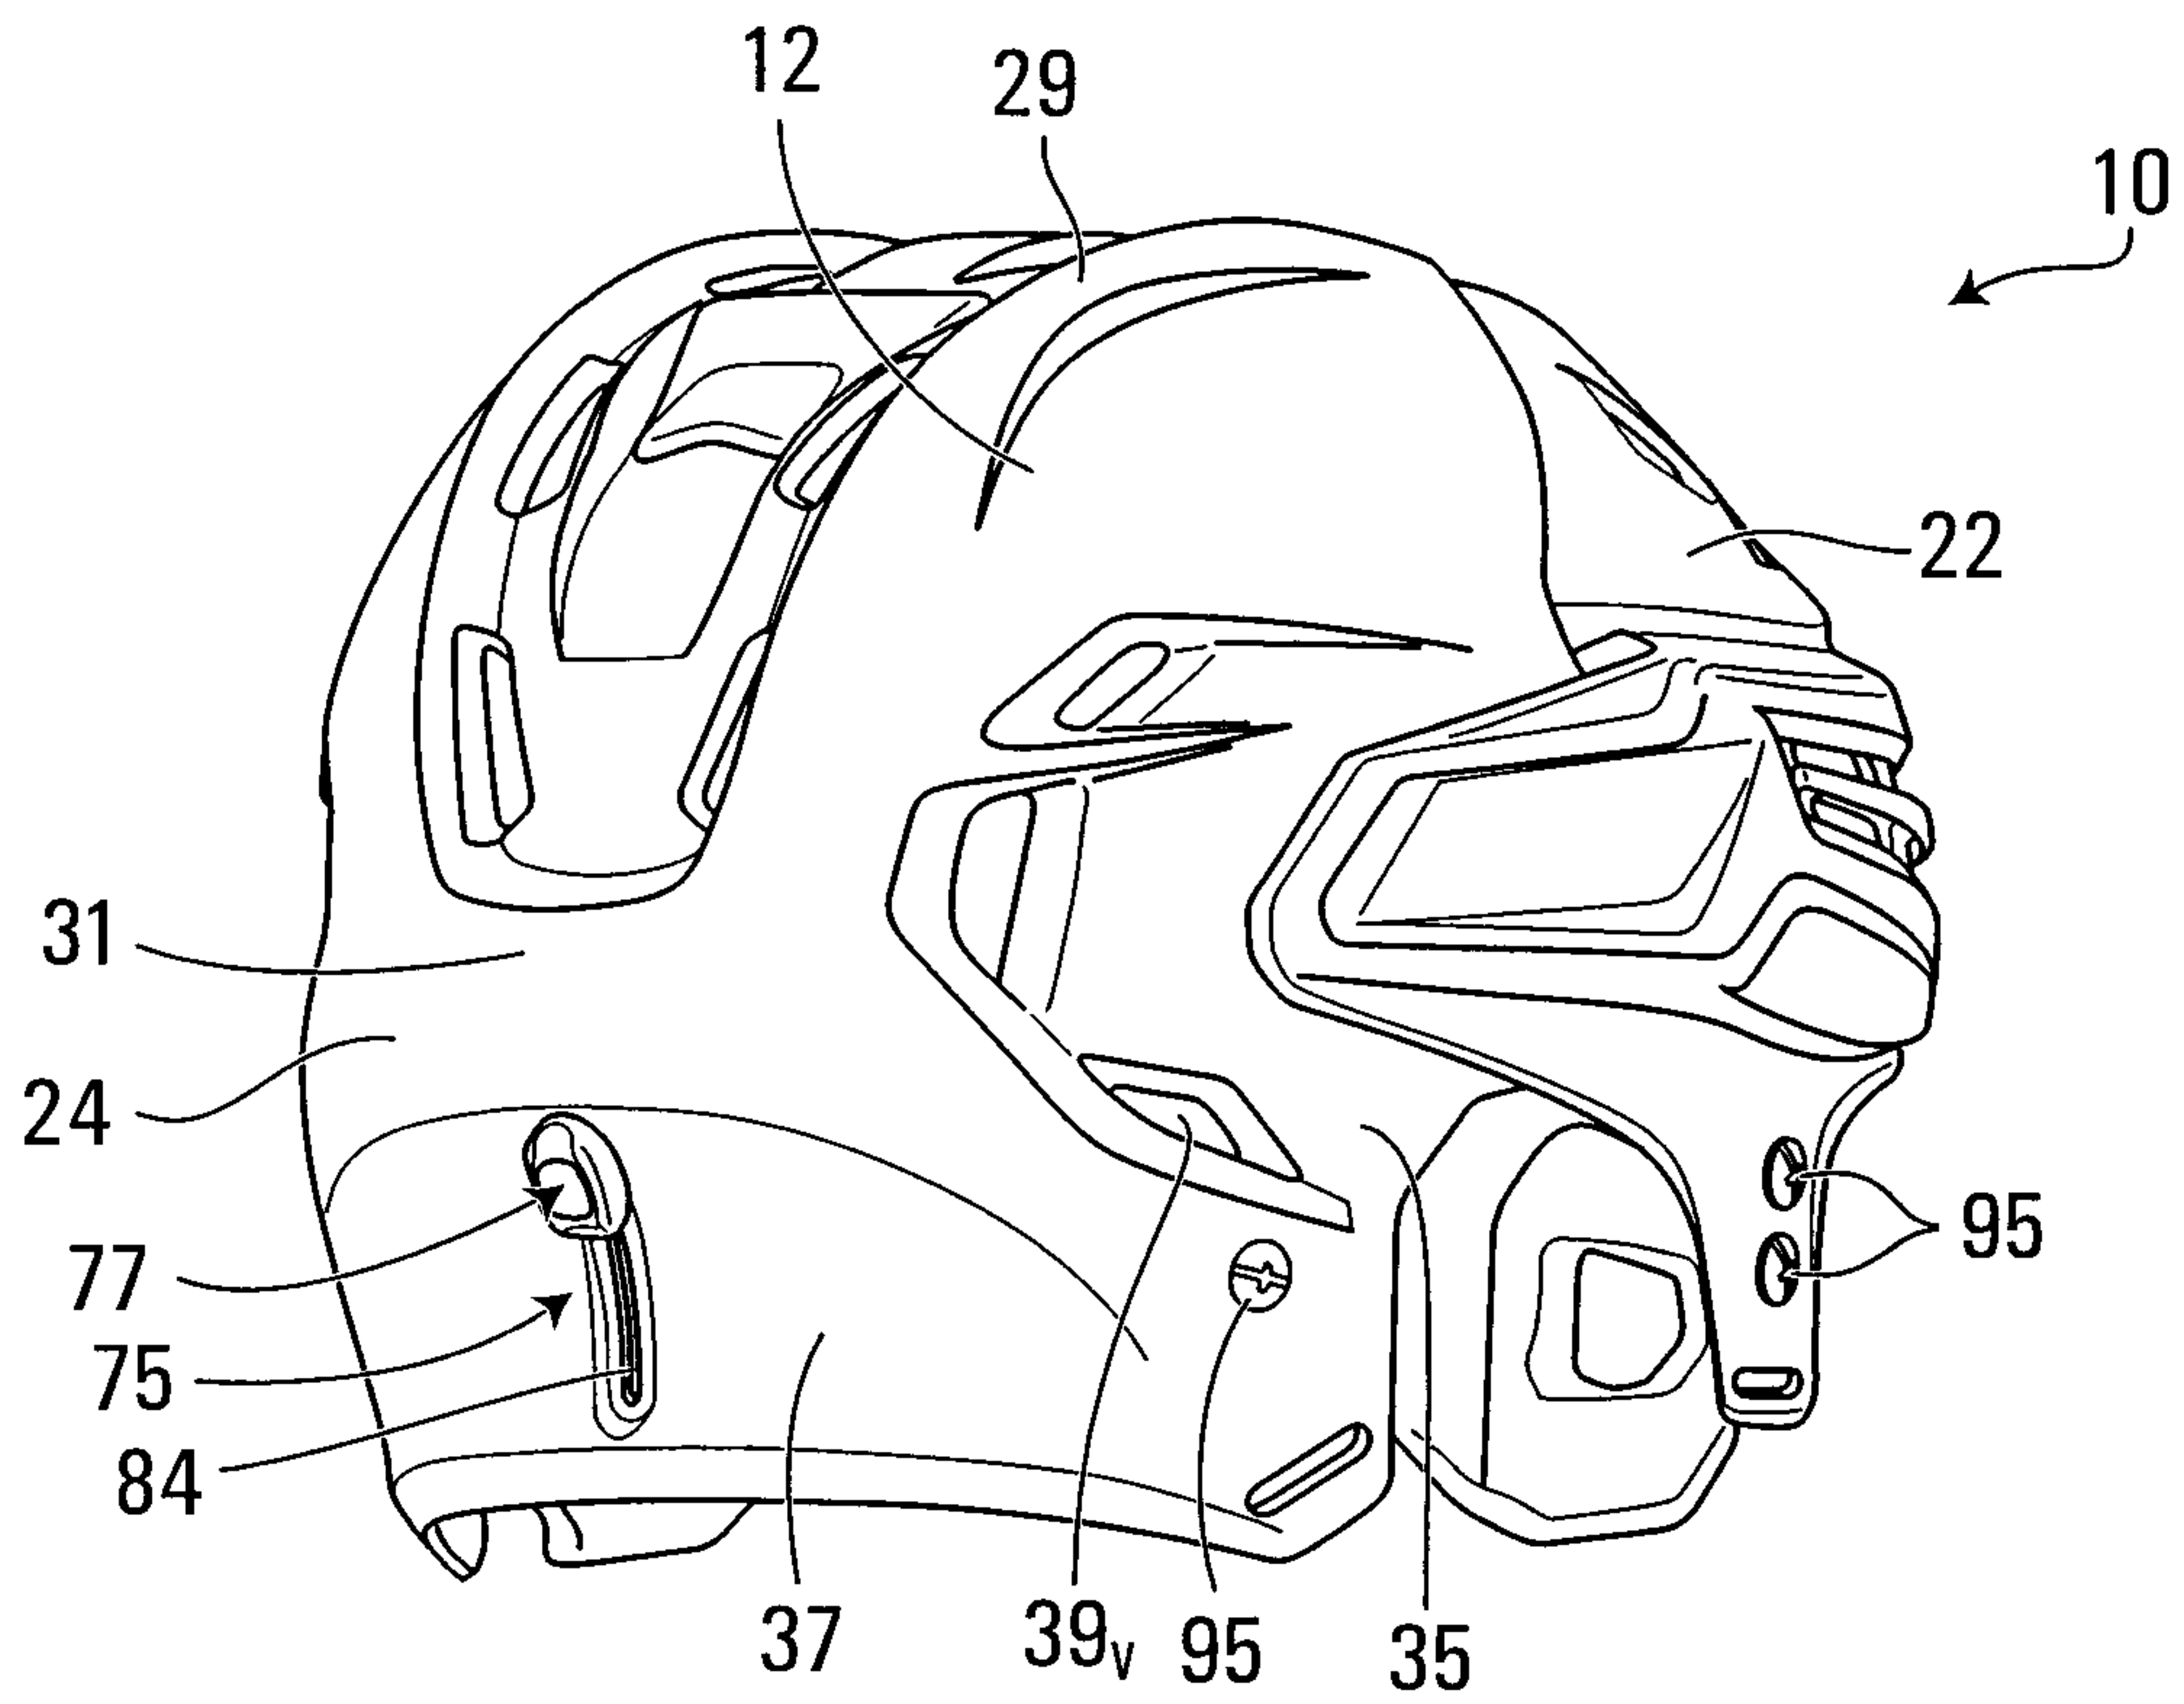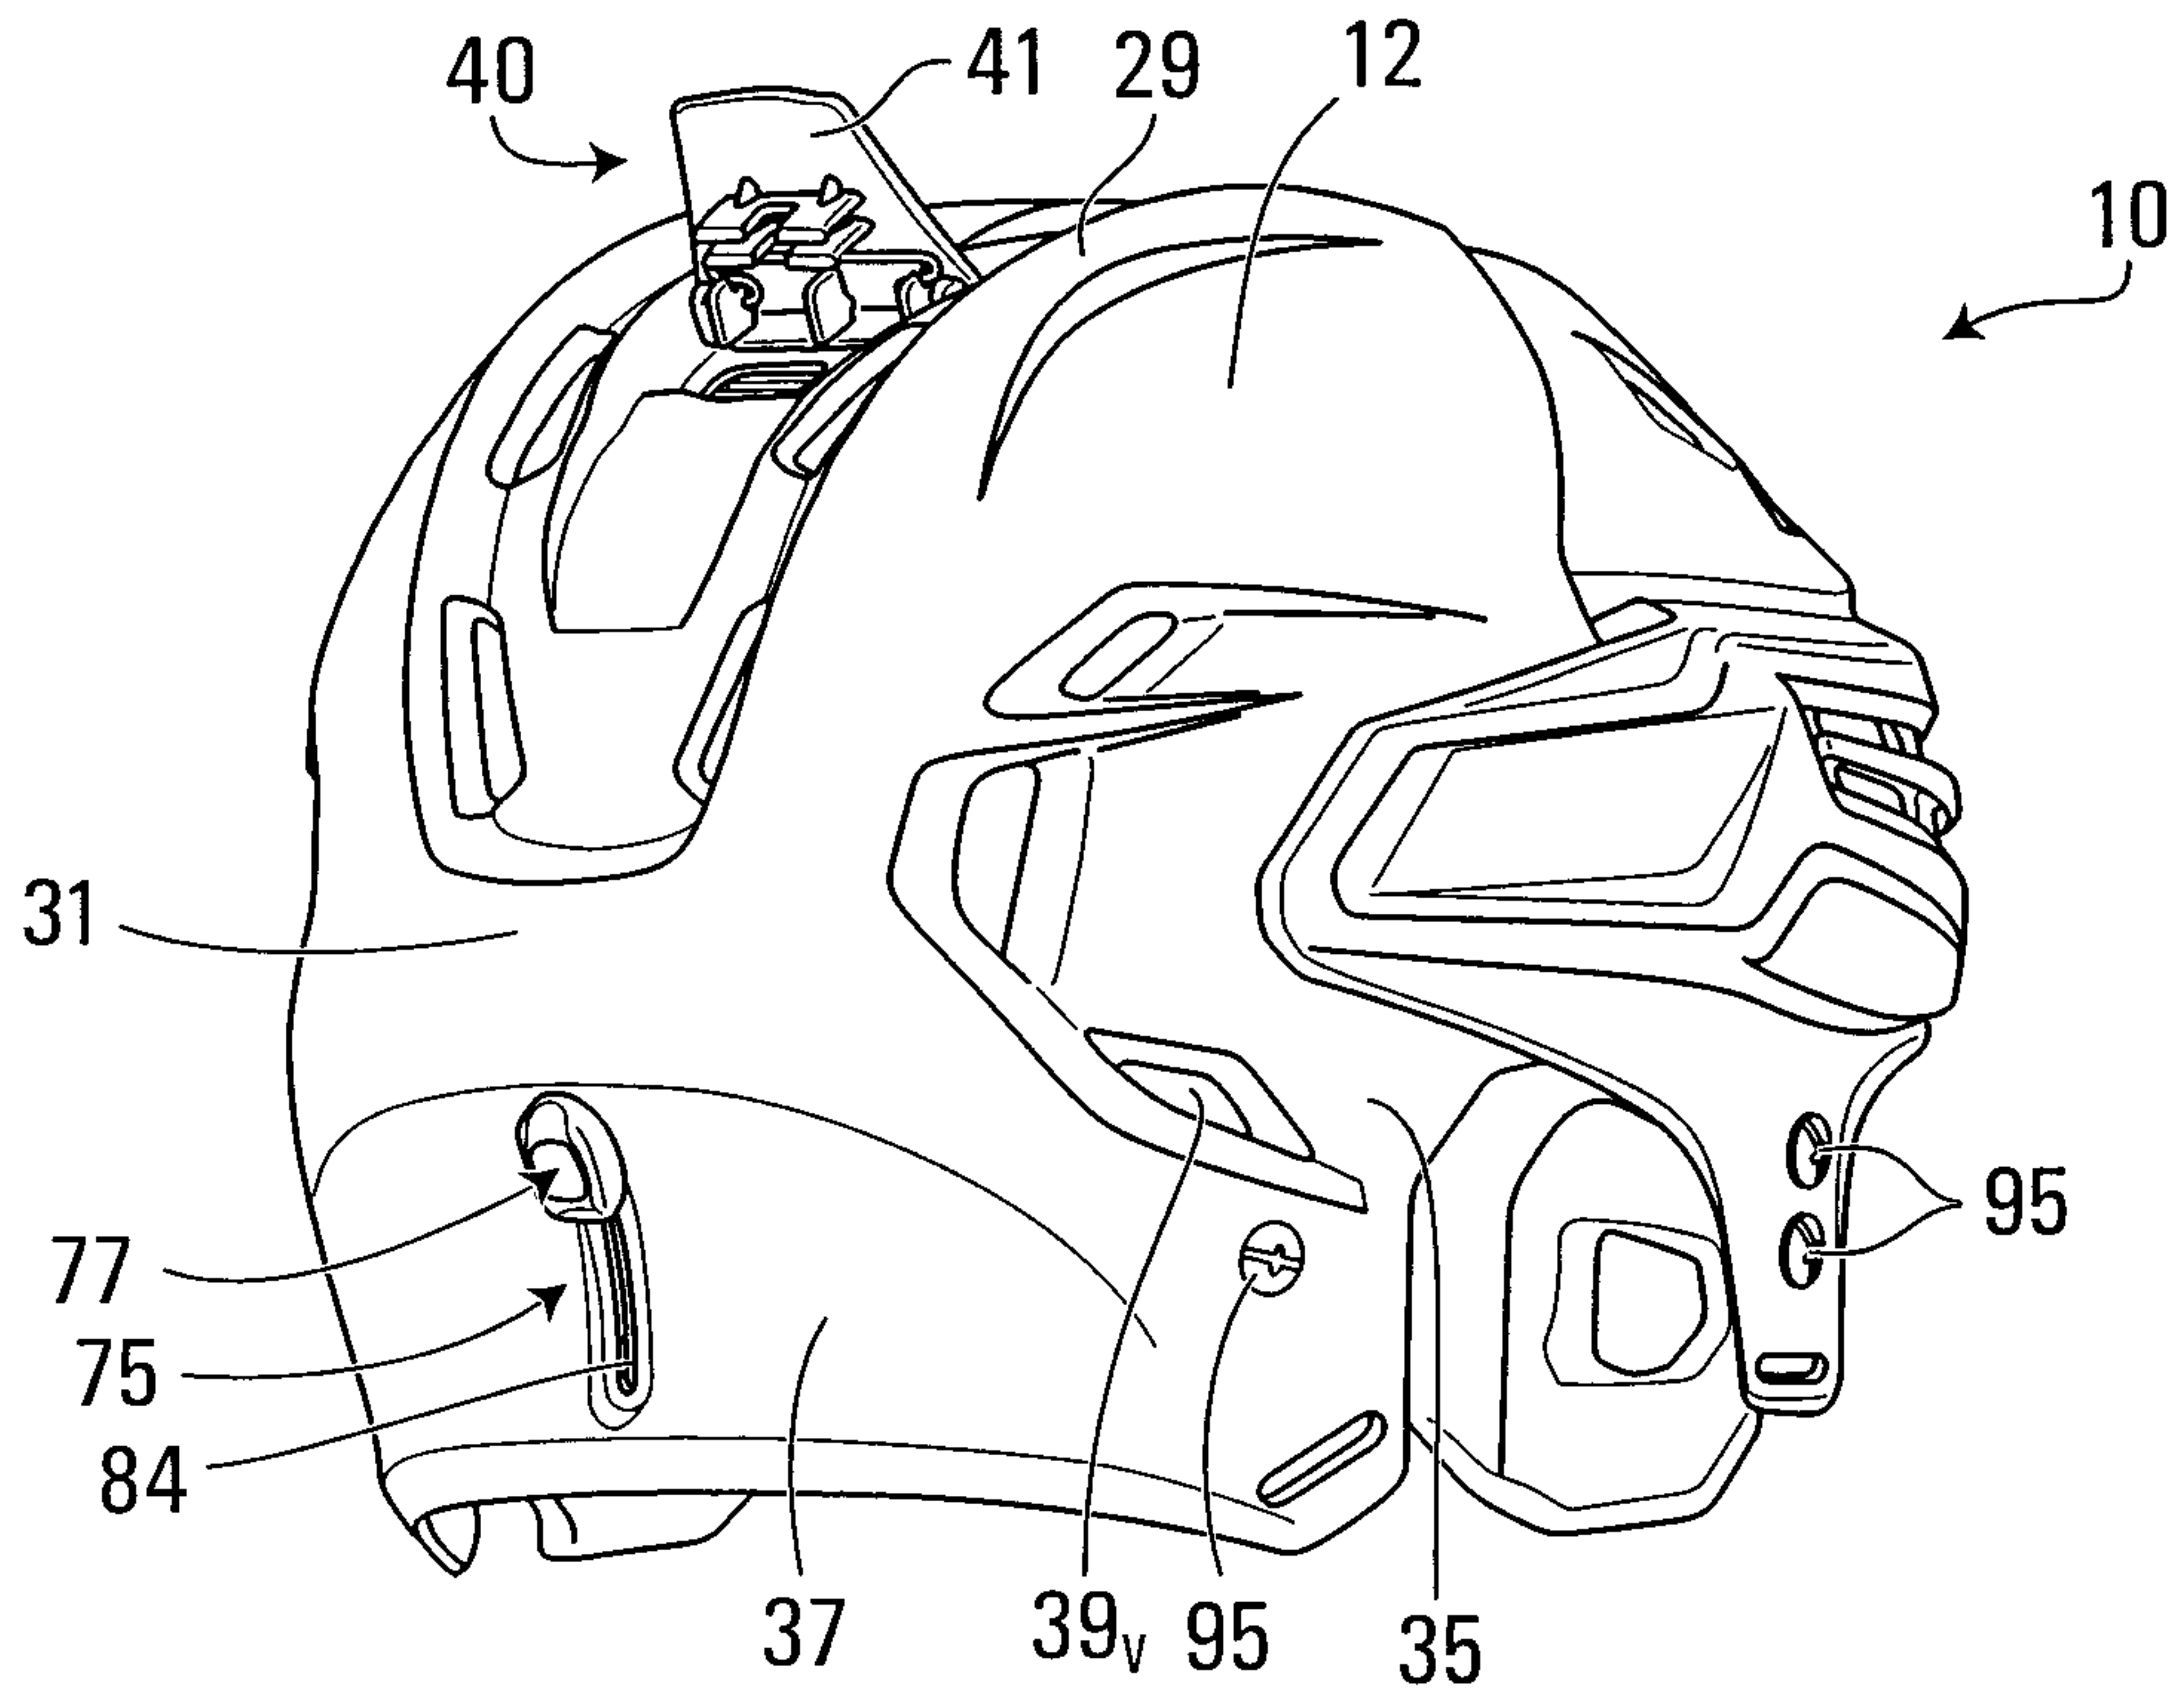**FIG. 3****FIG. 4**

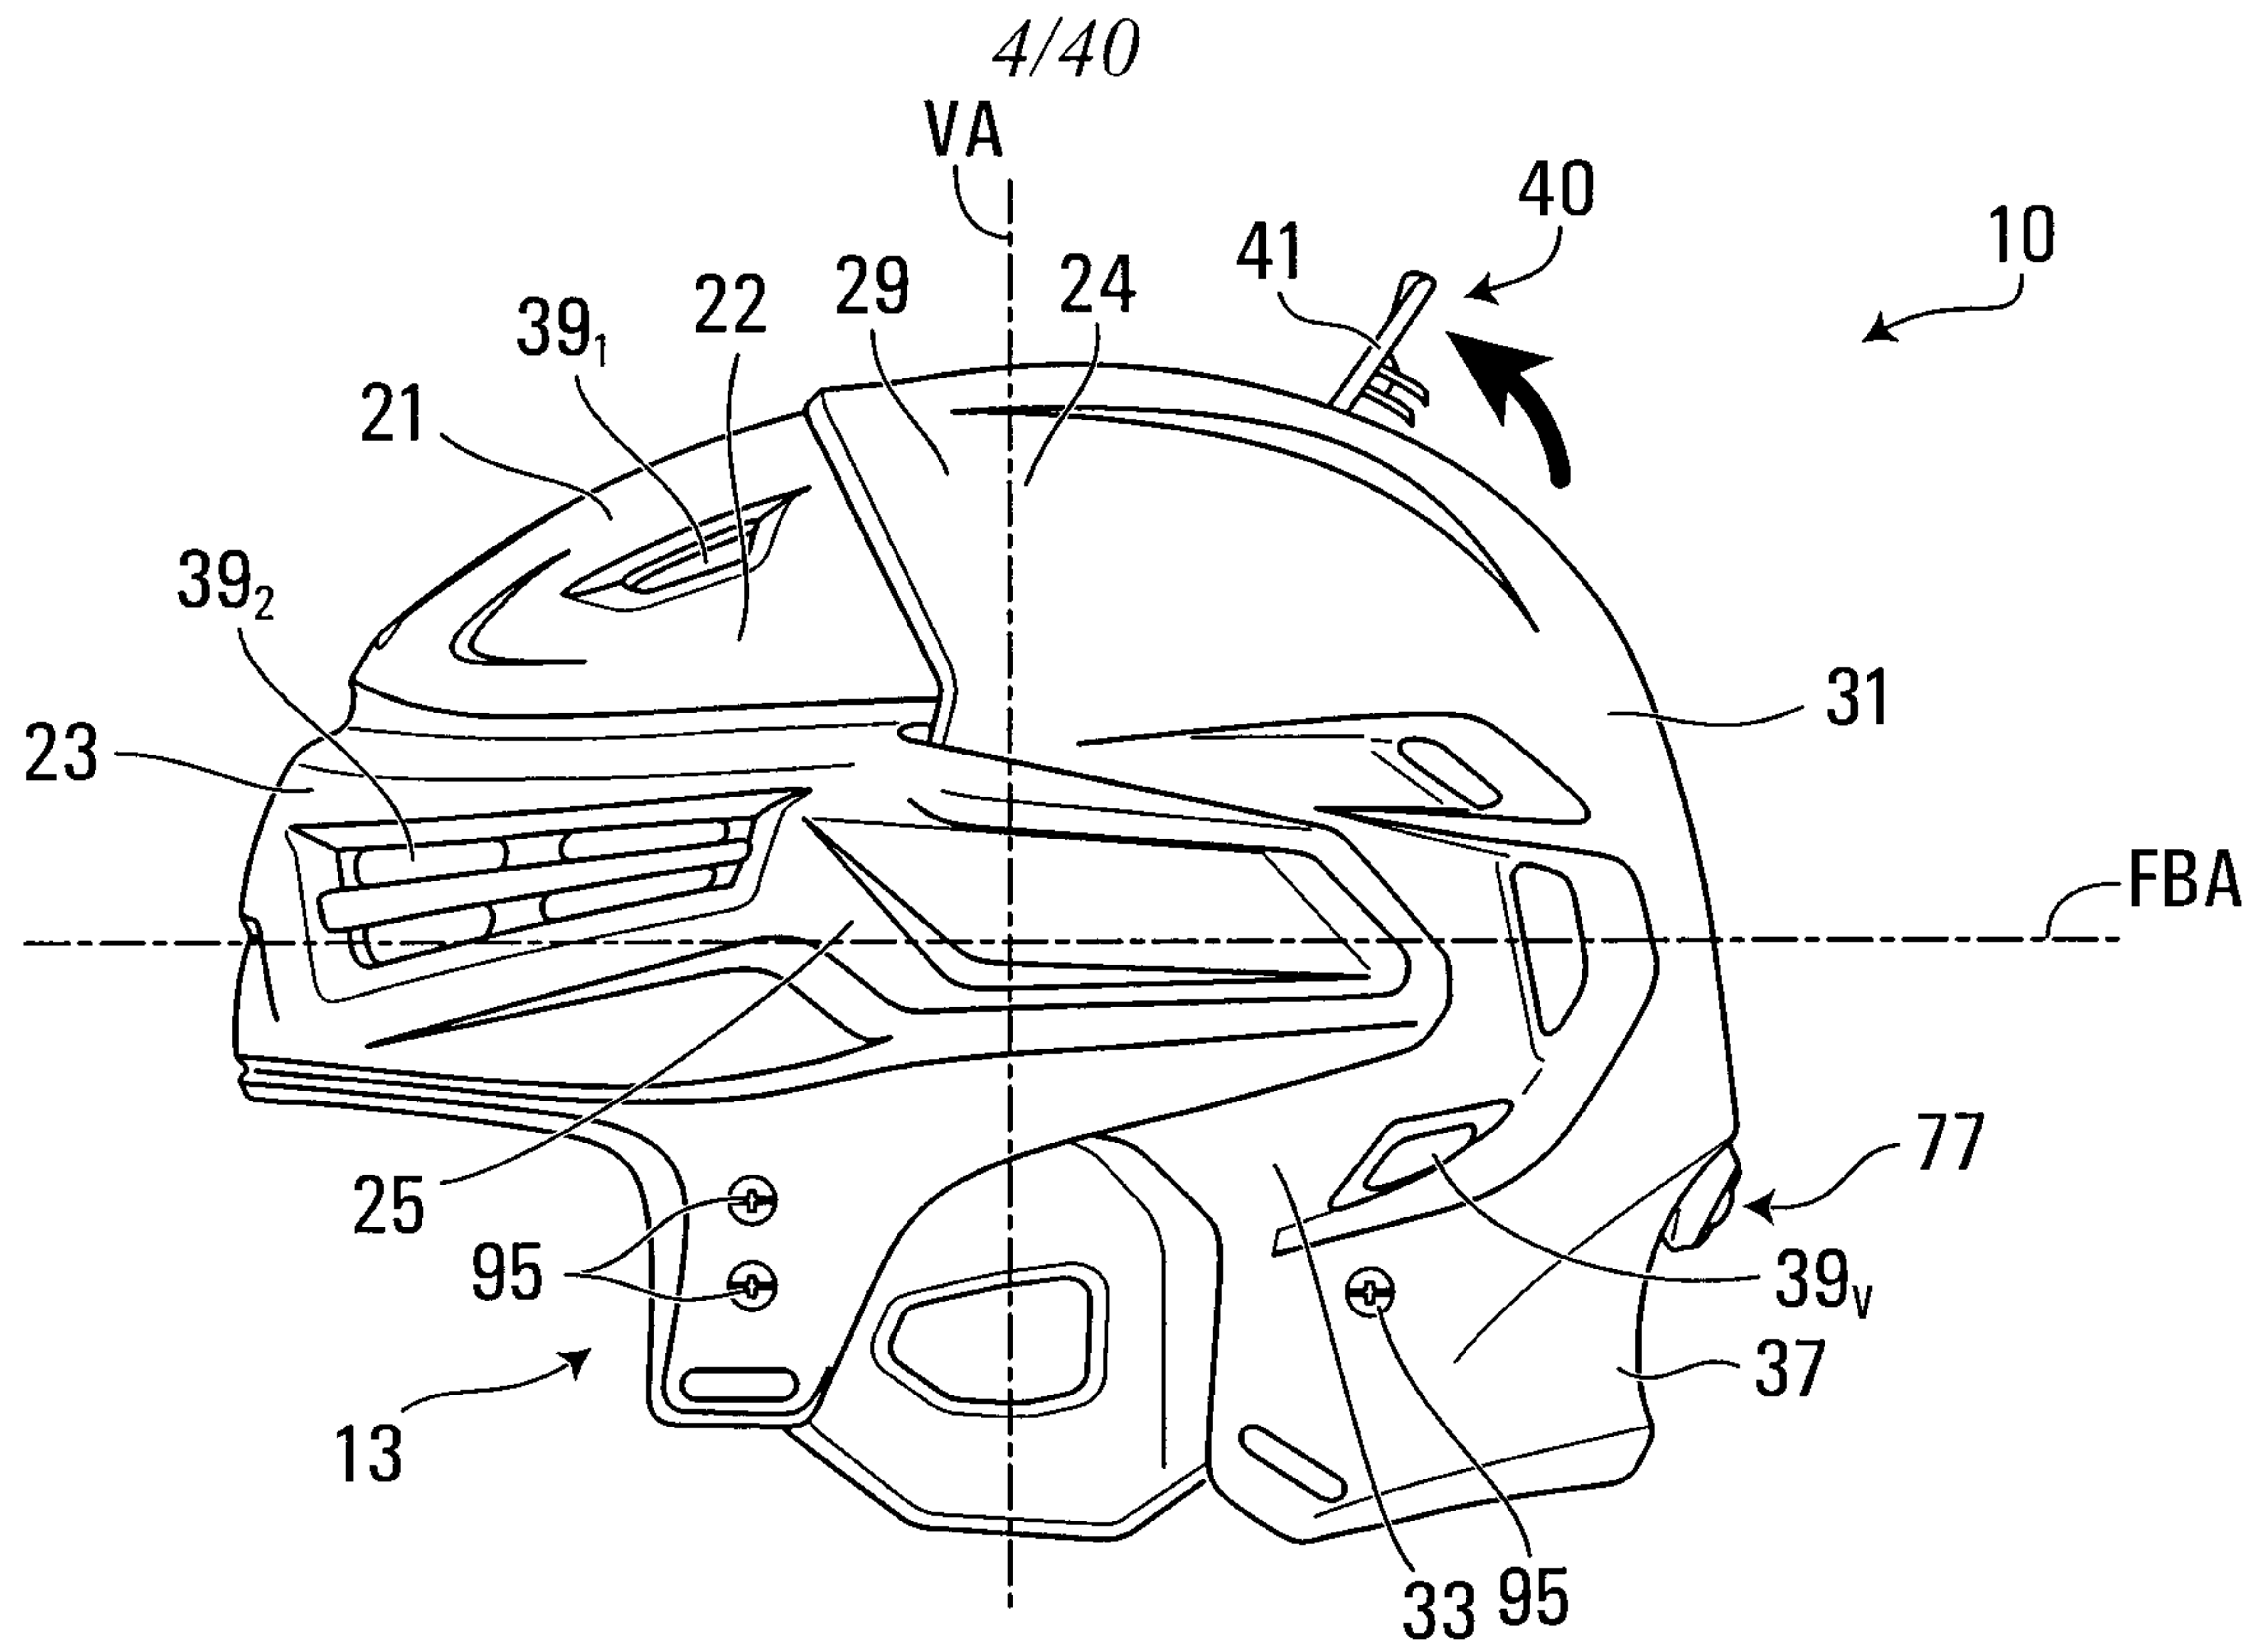


FIG. 5

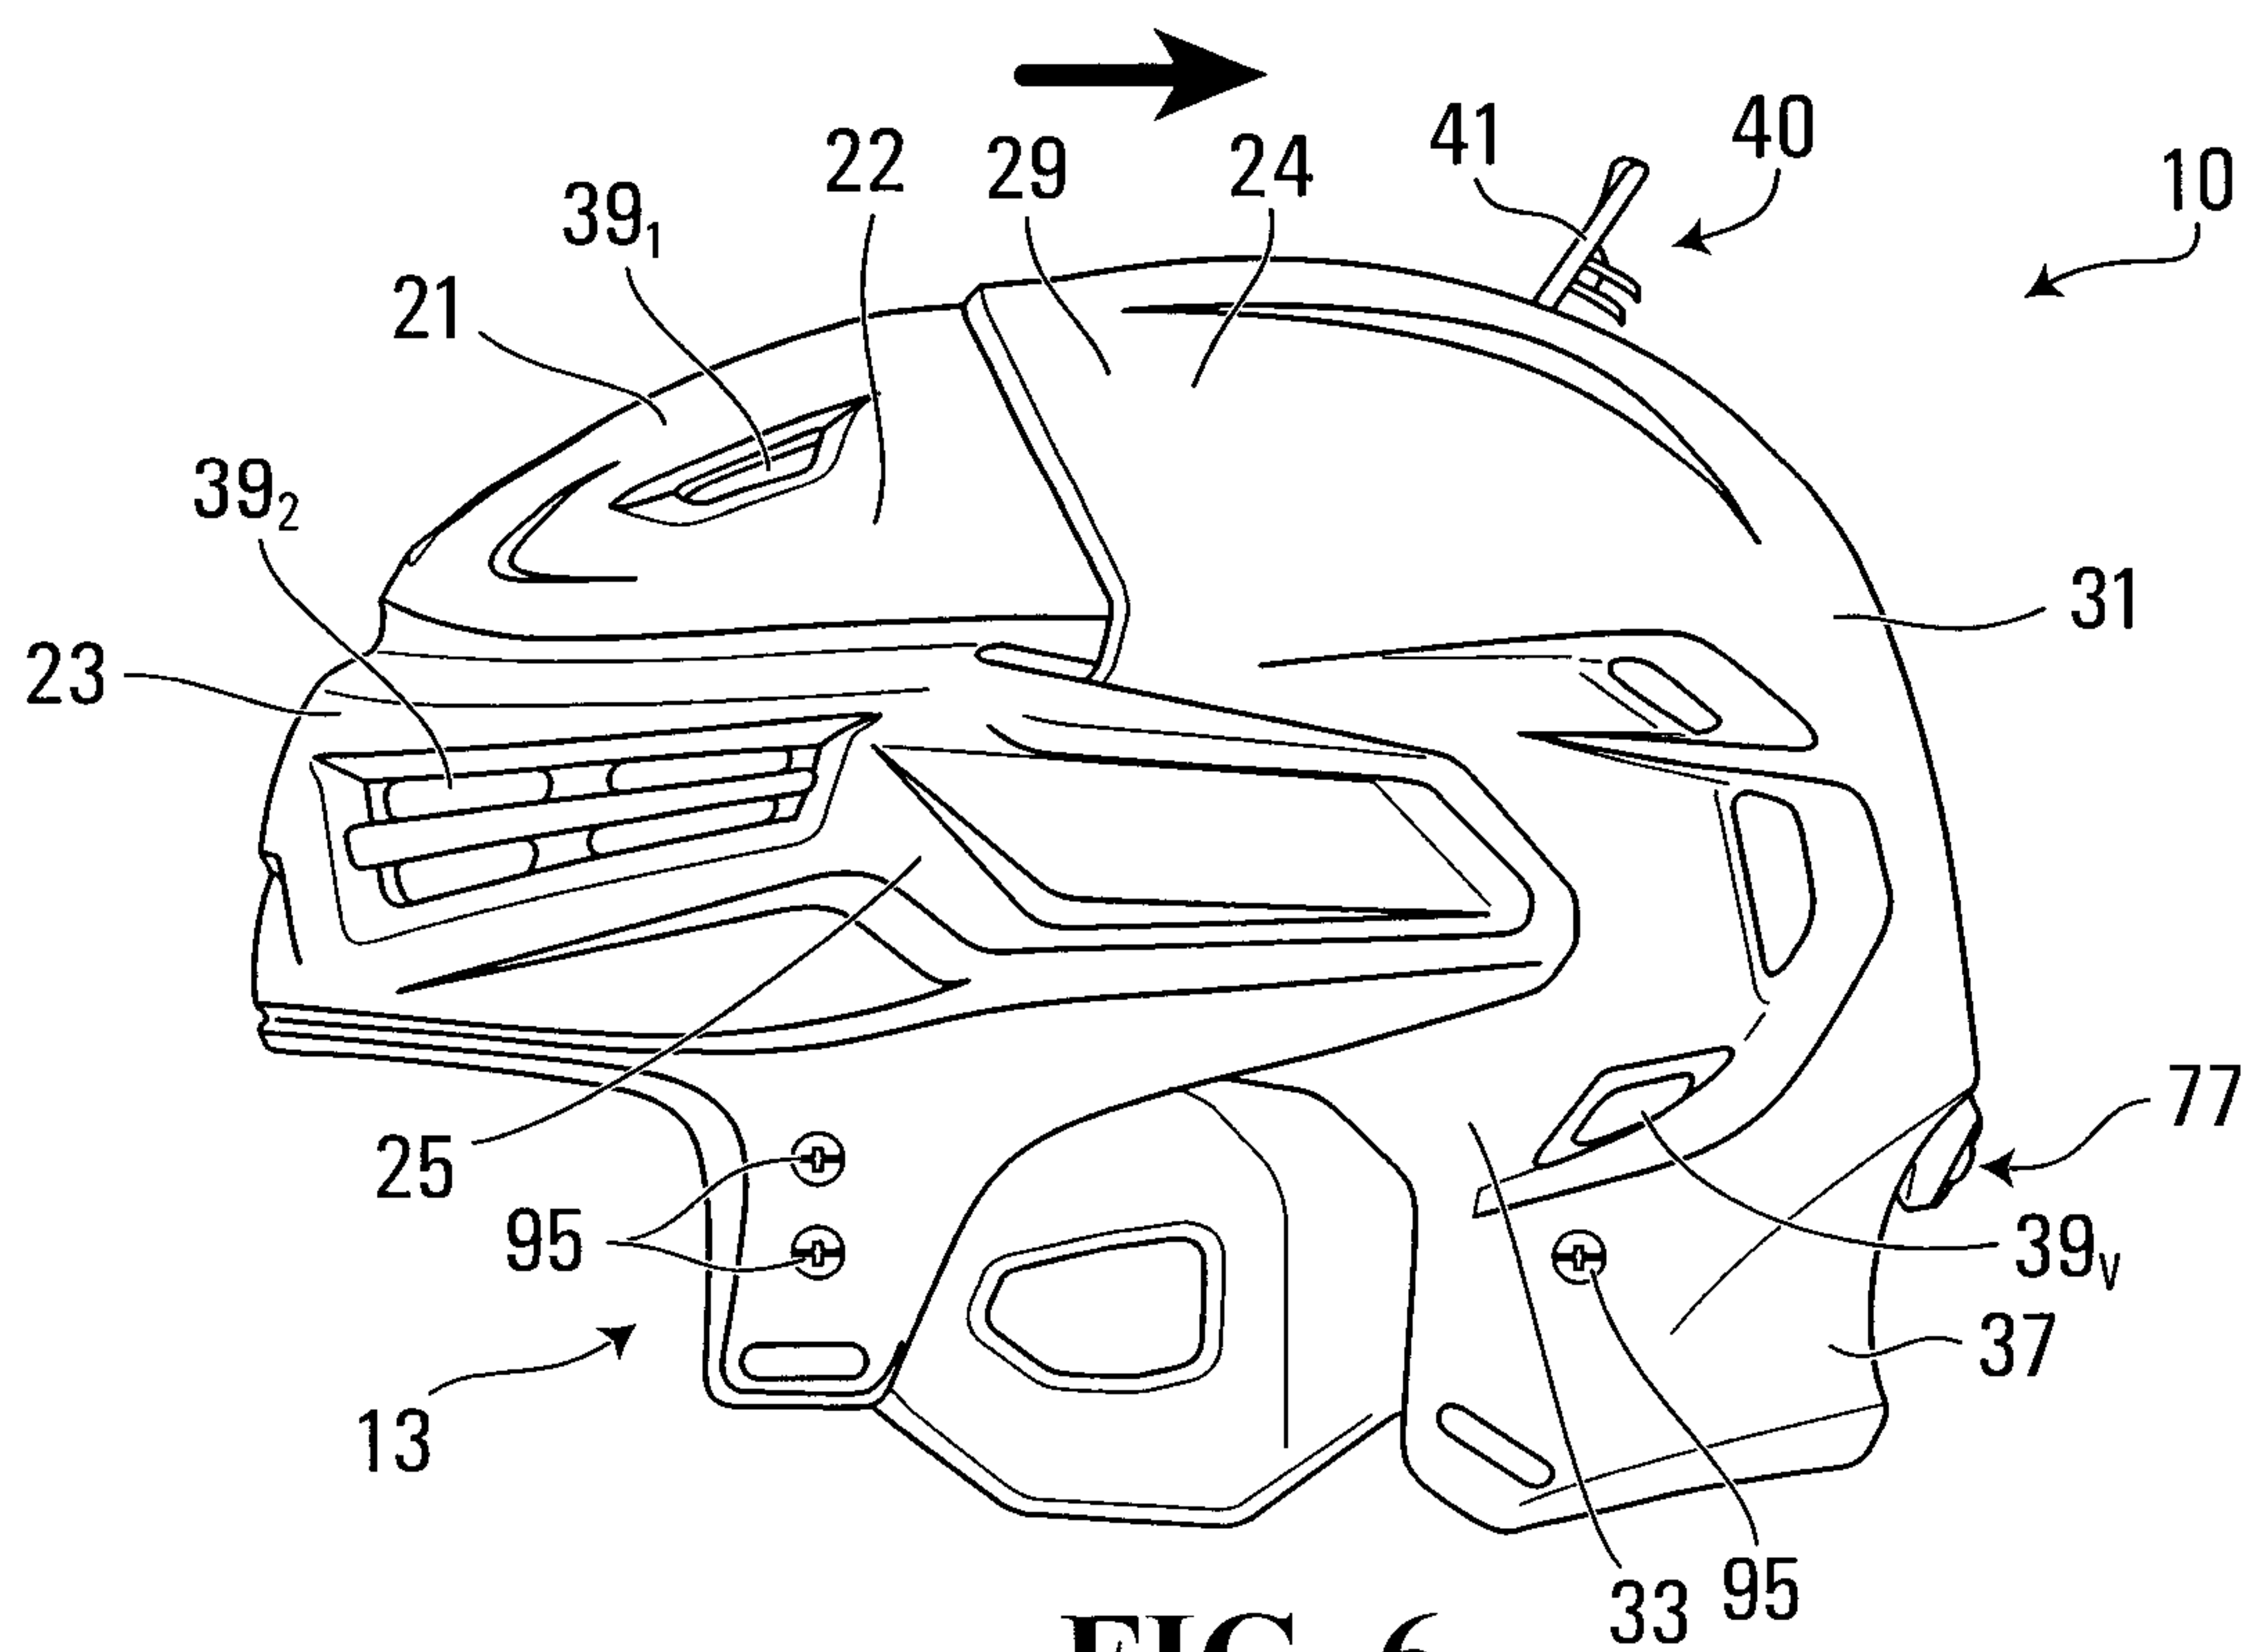


FIG. 6

5/40

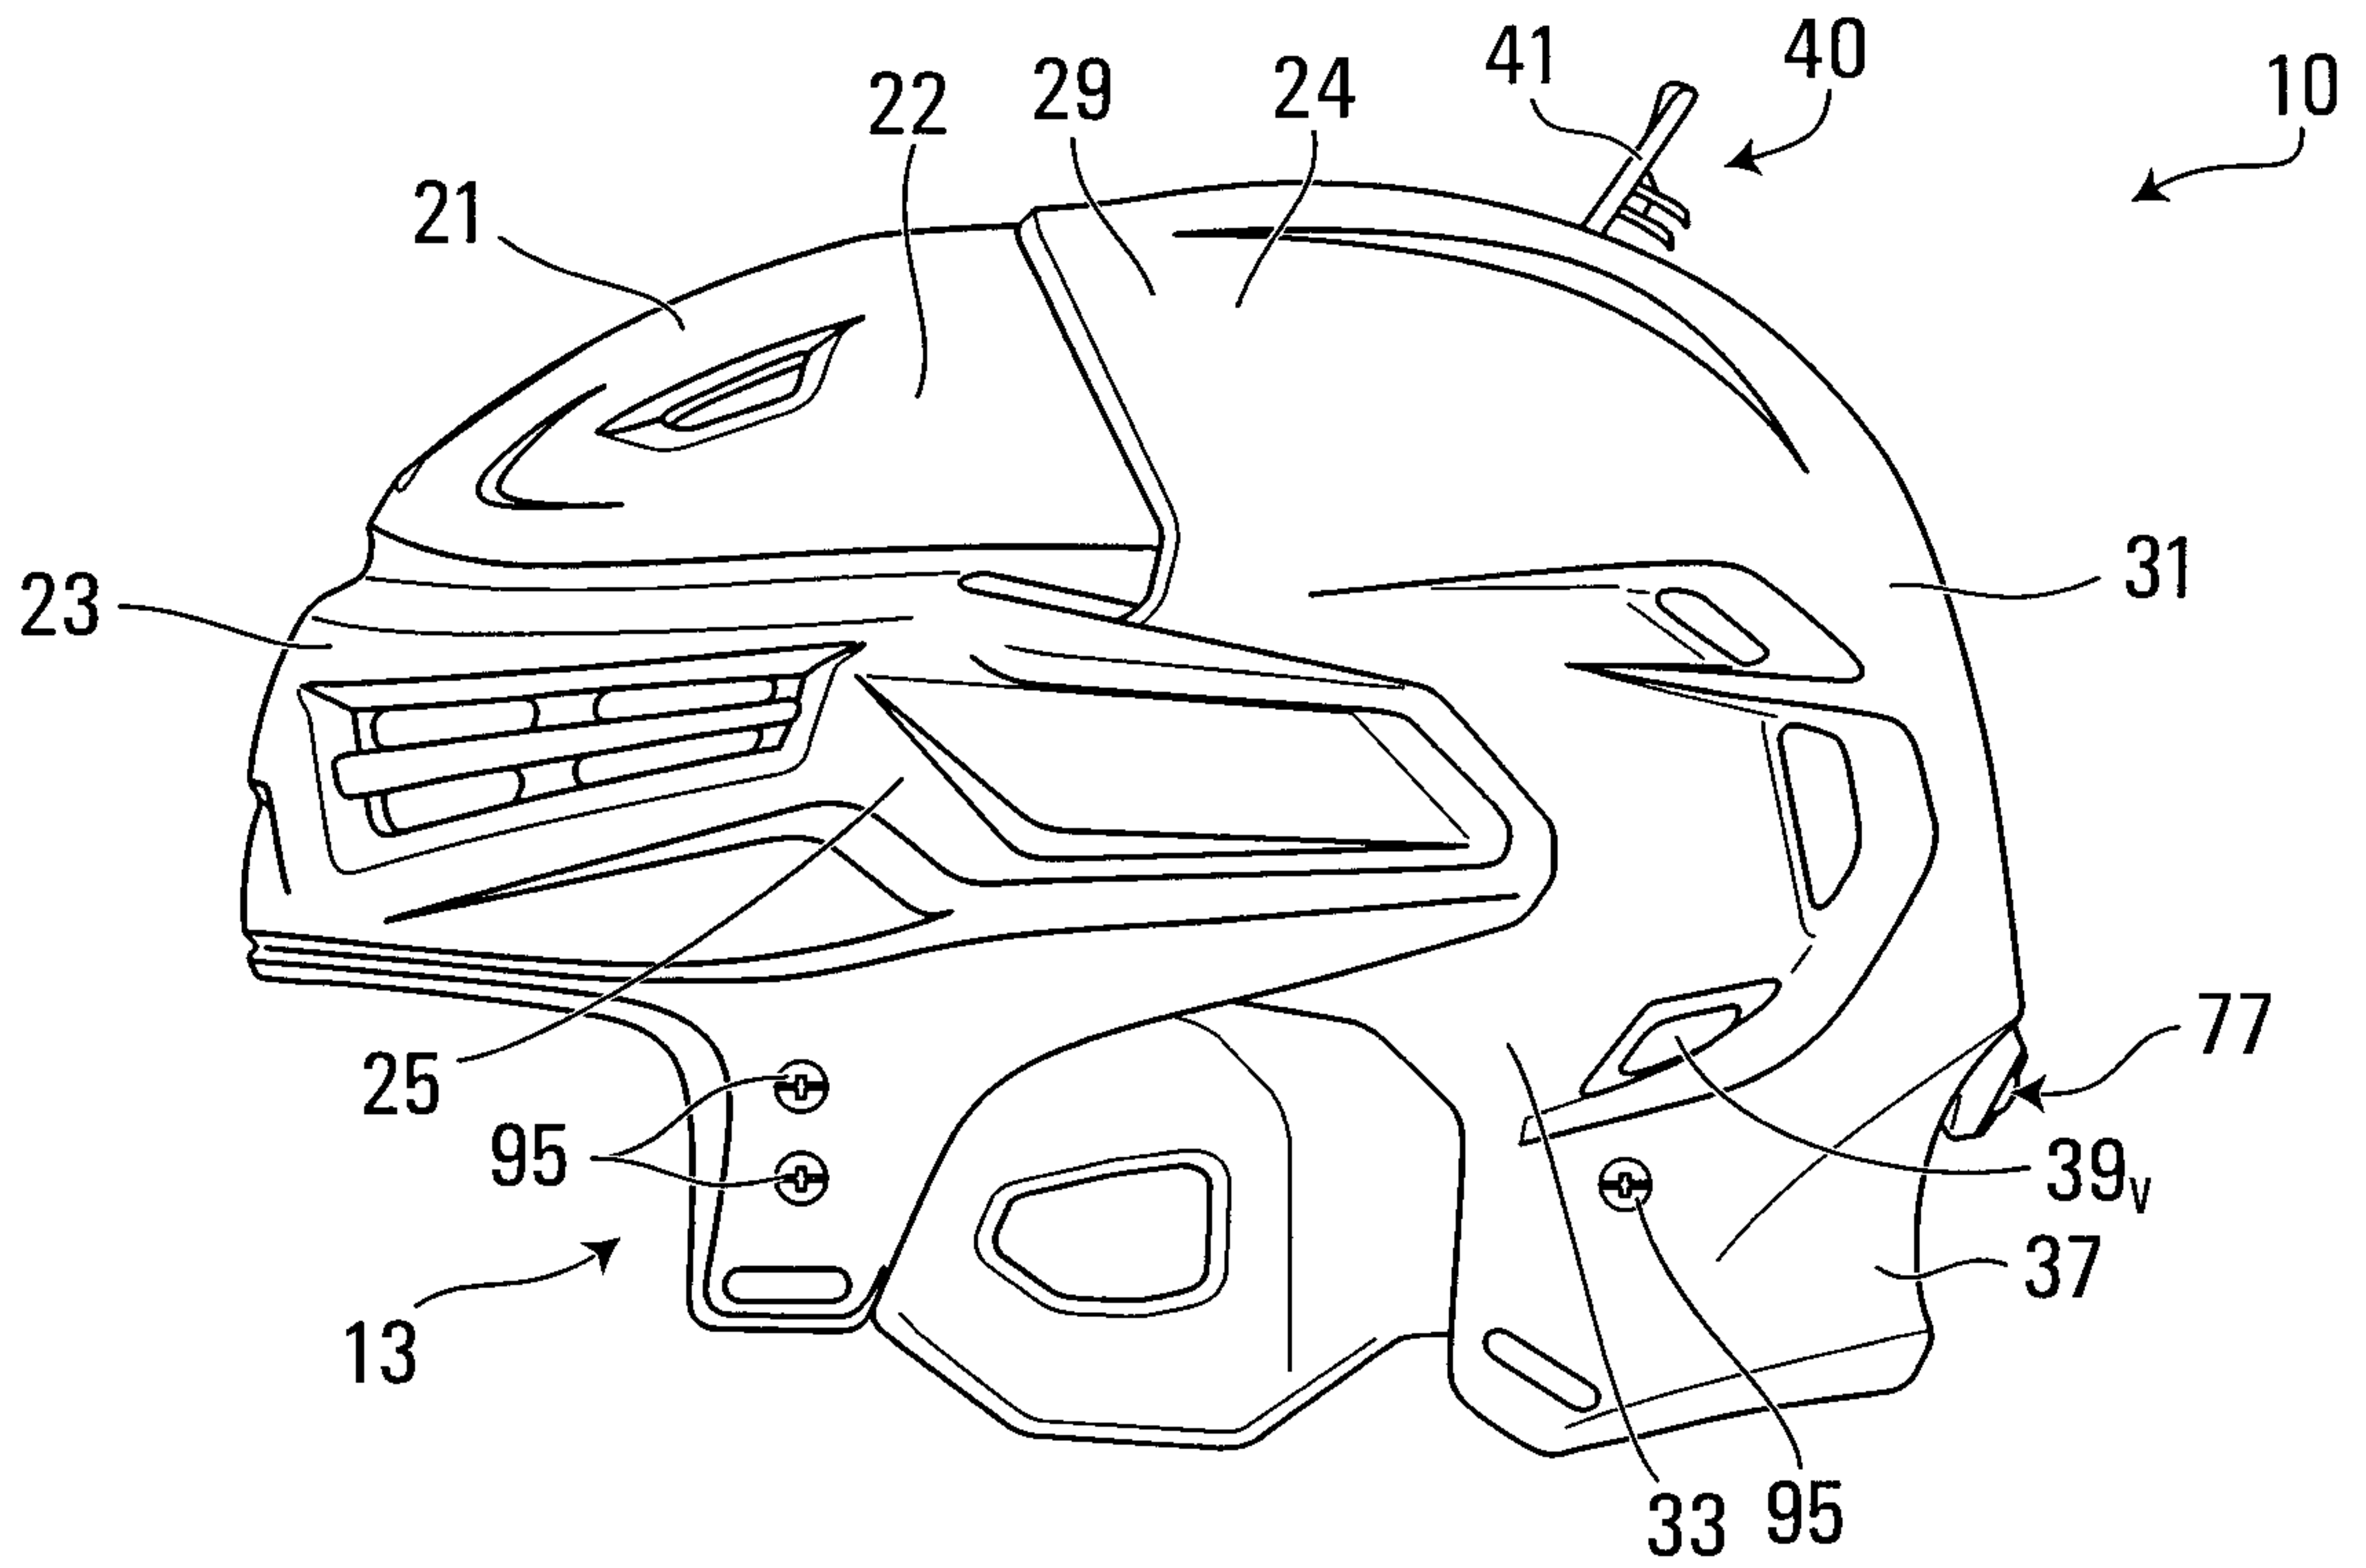


FIG. 7

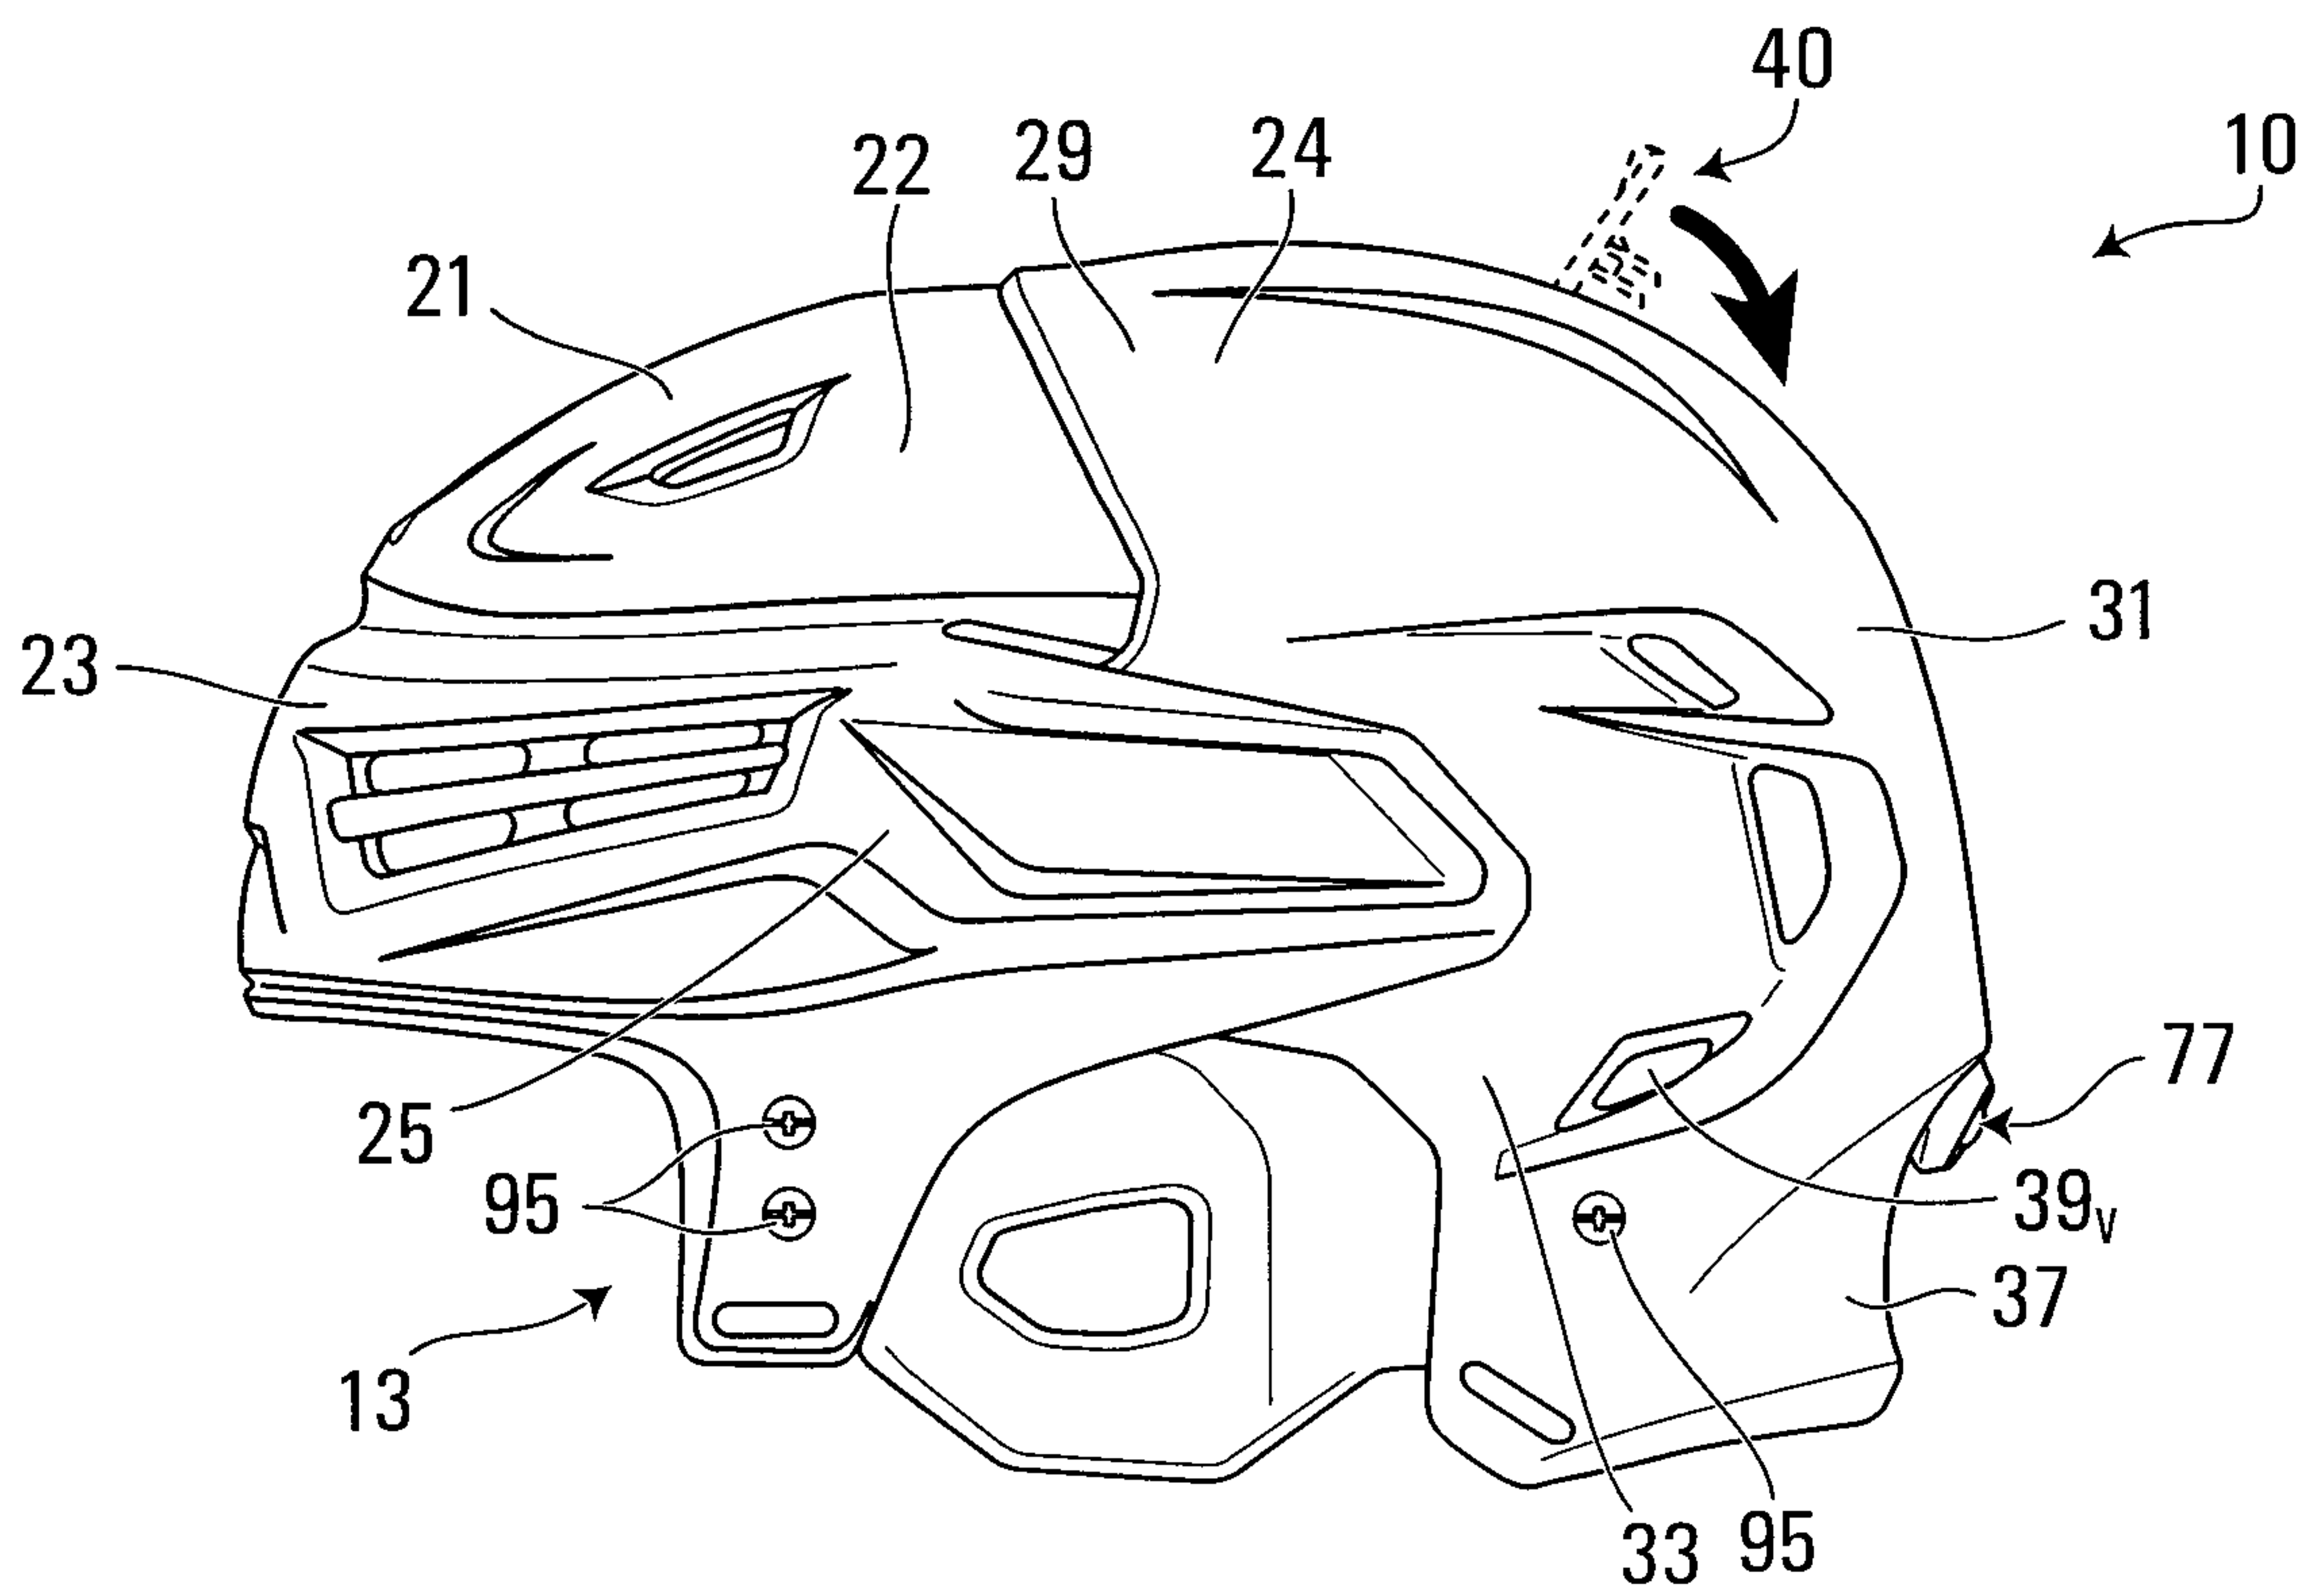


FIG. 8

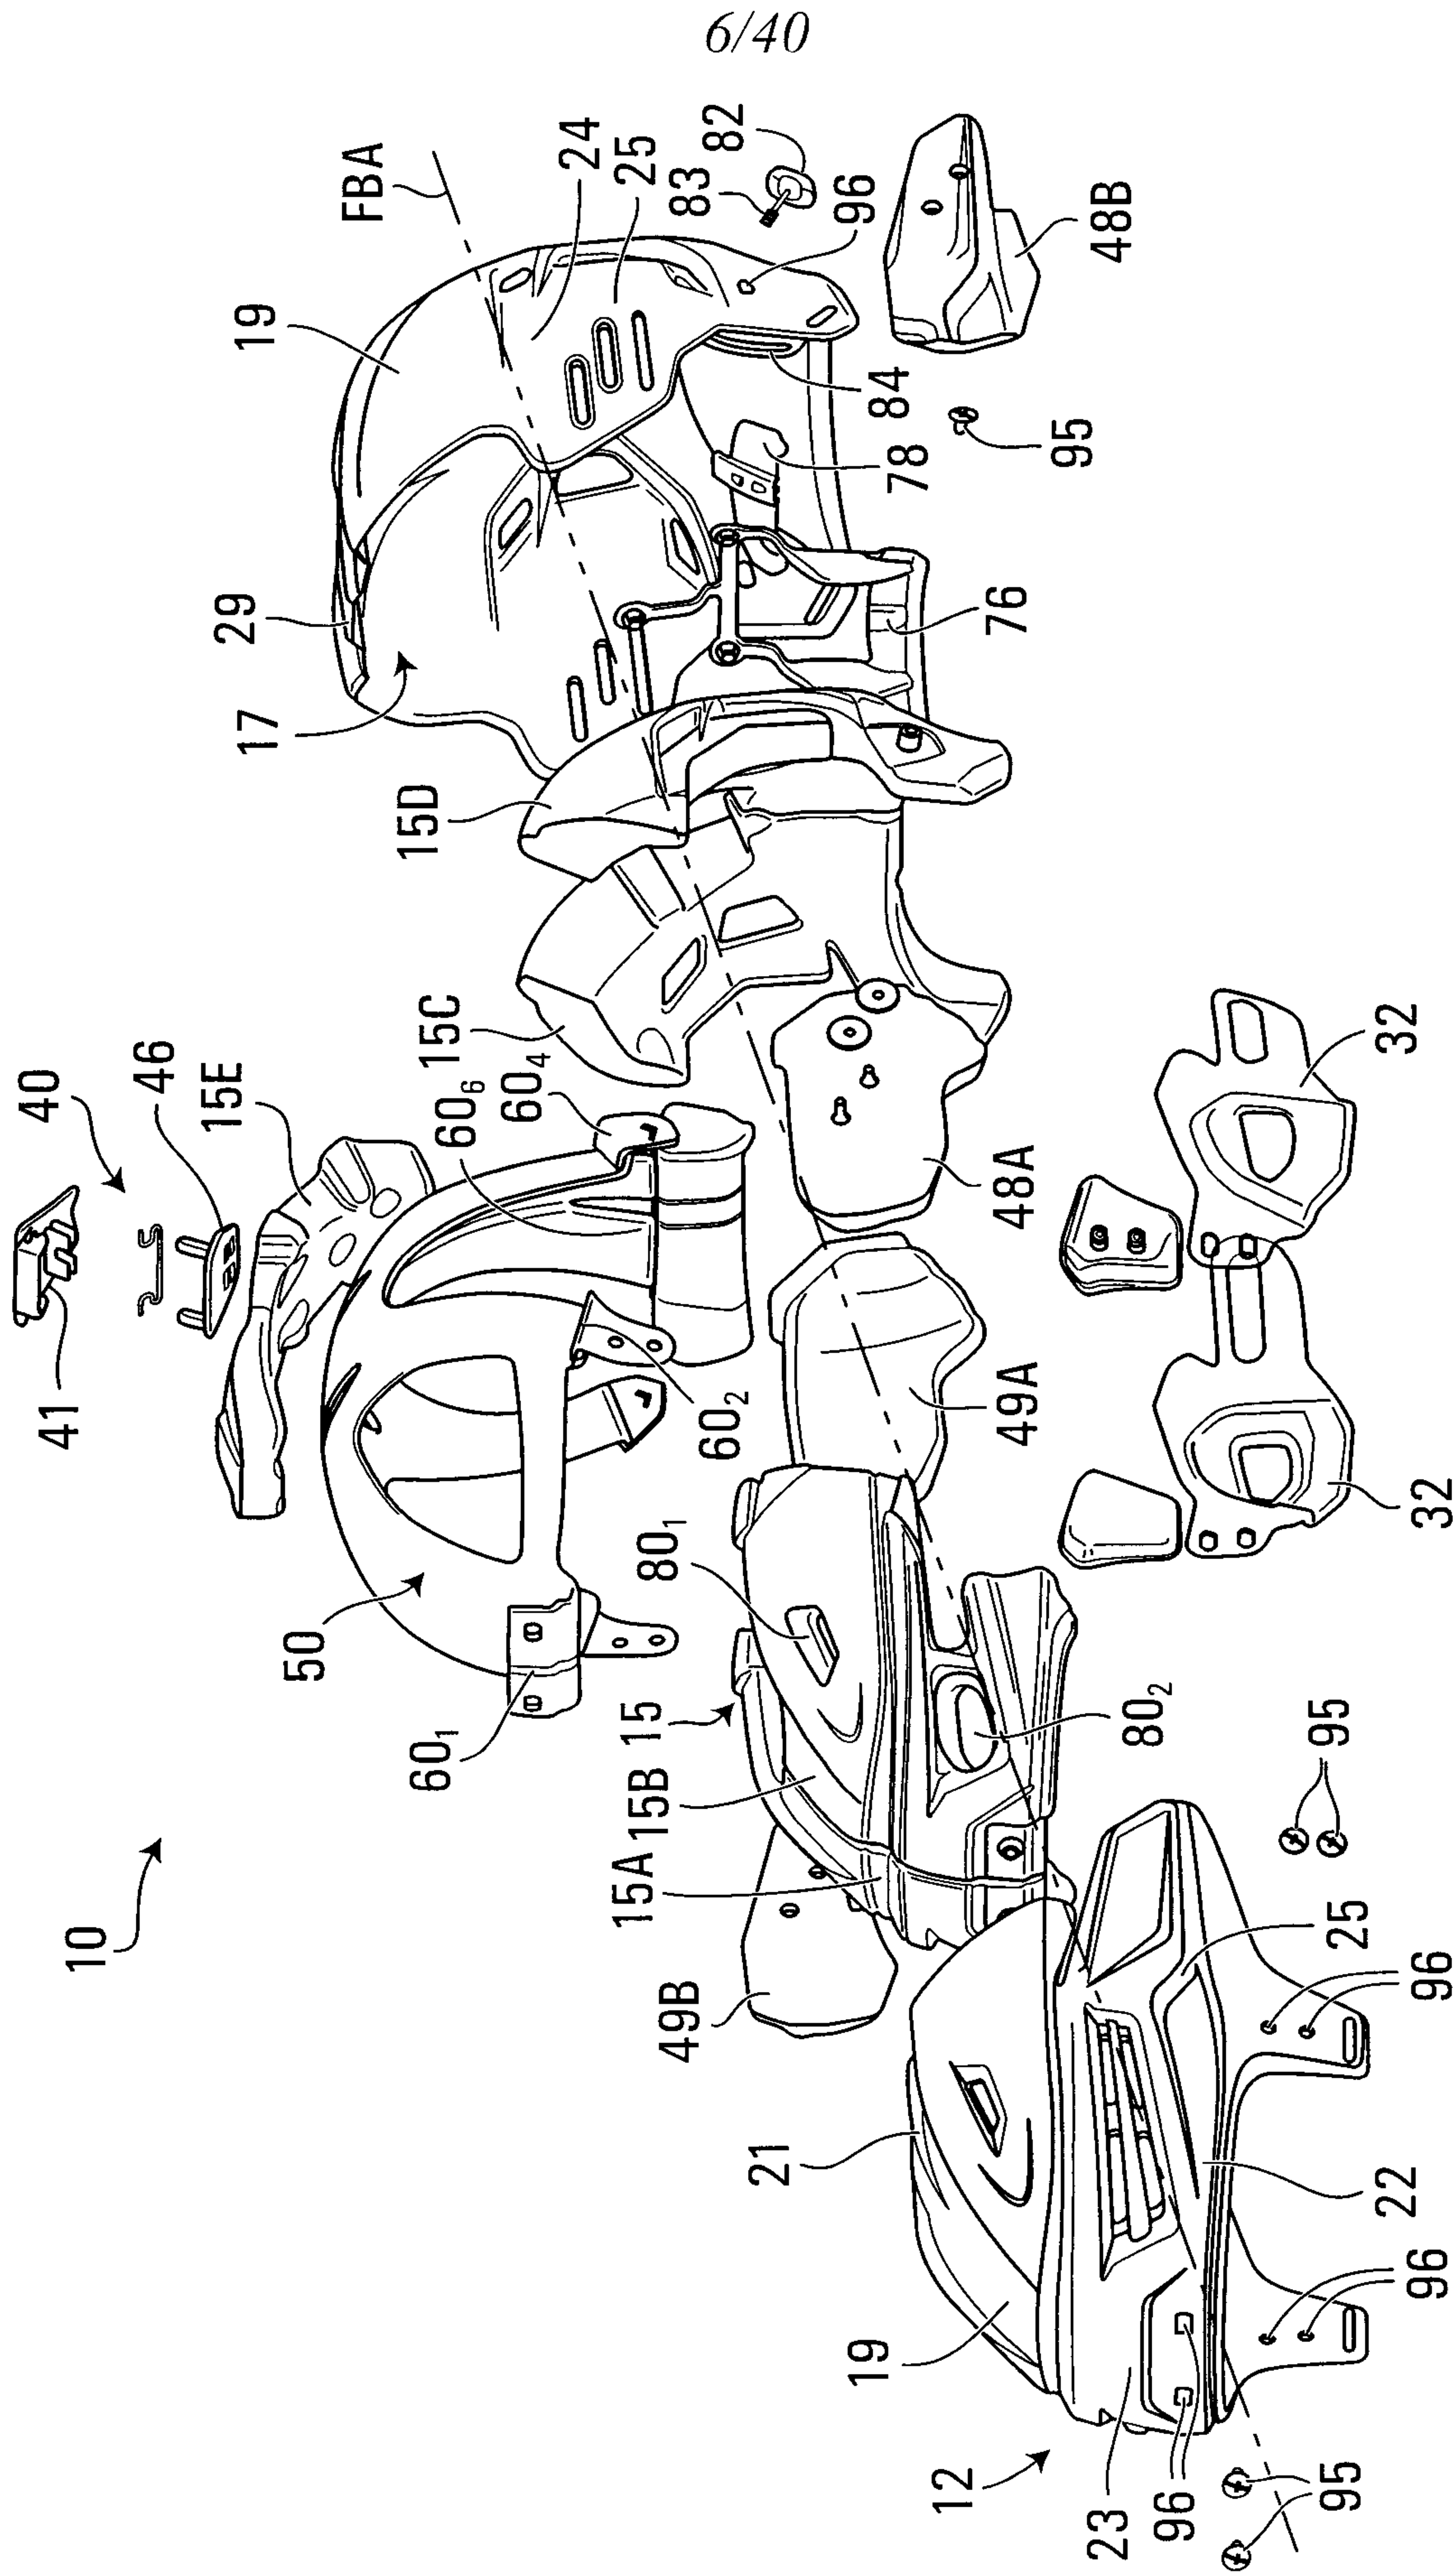


FIG. 9

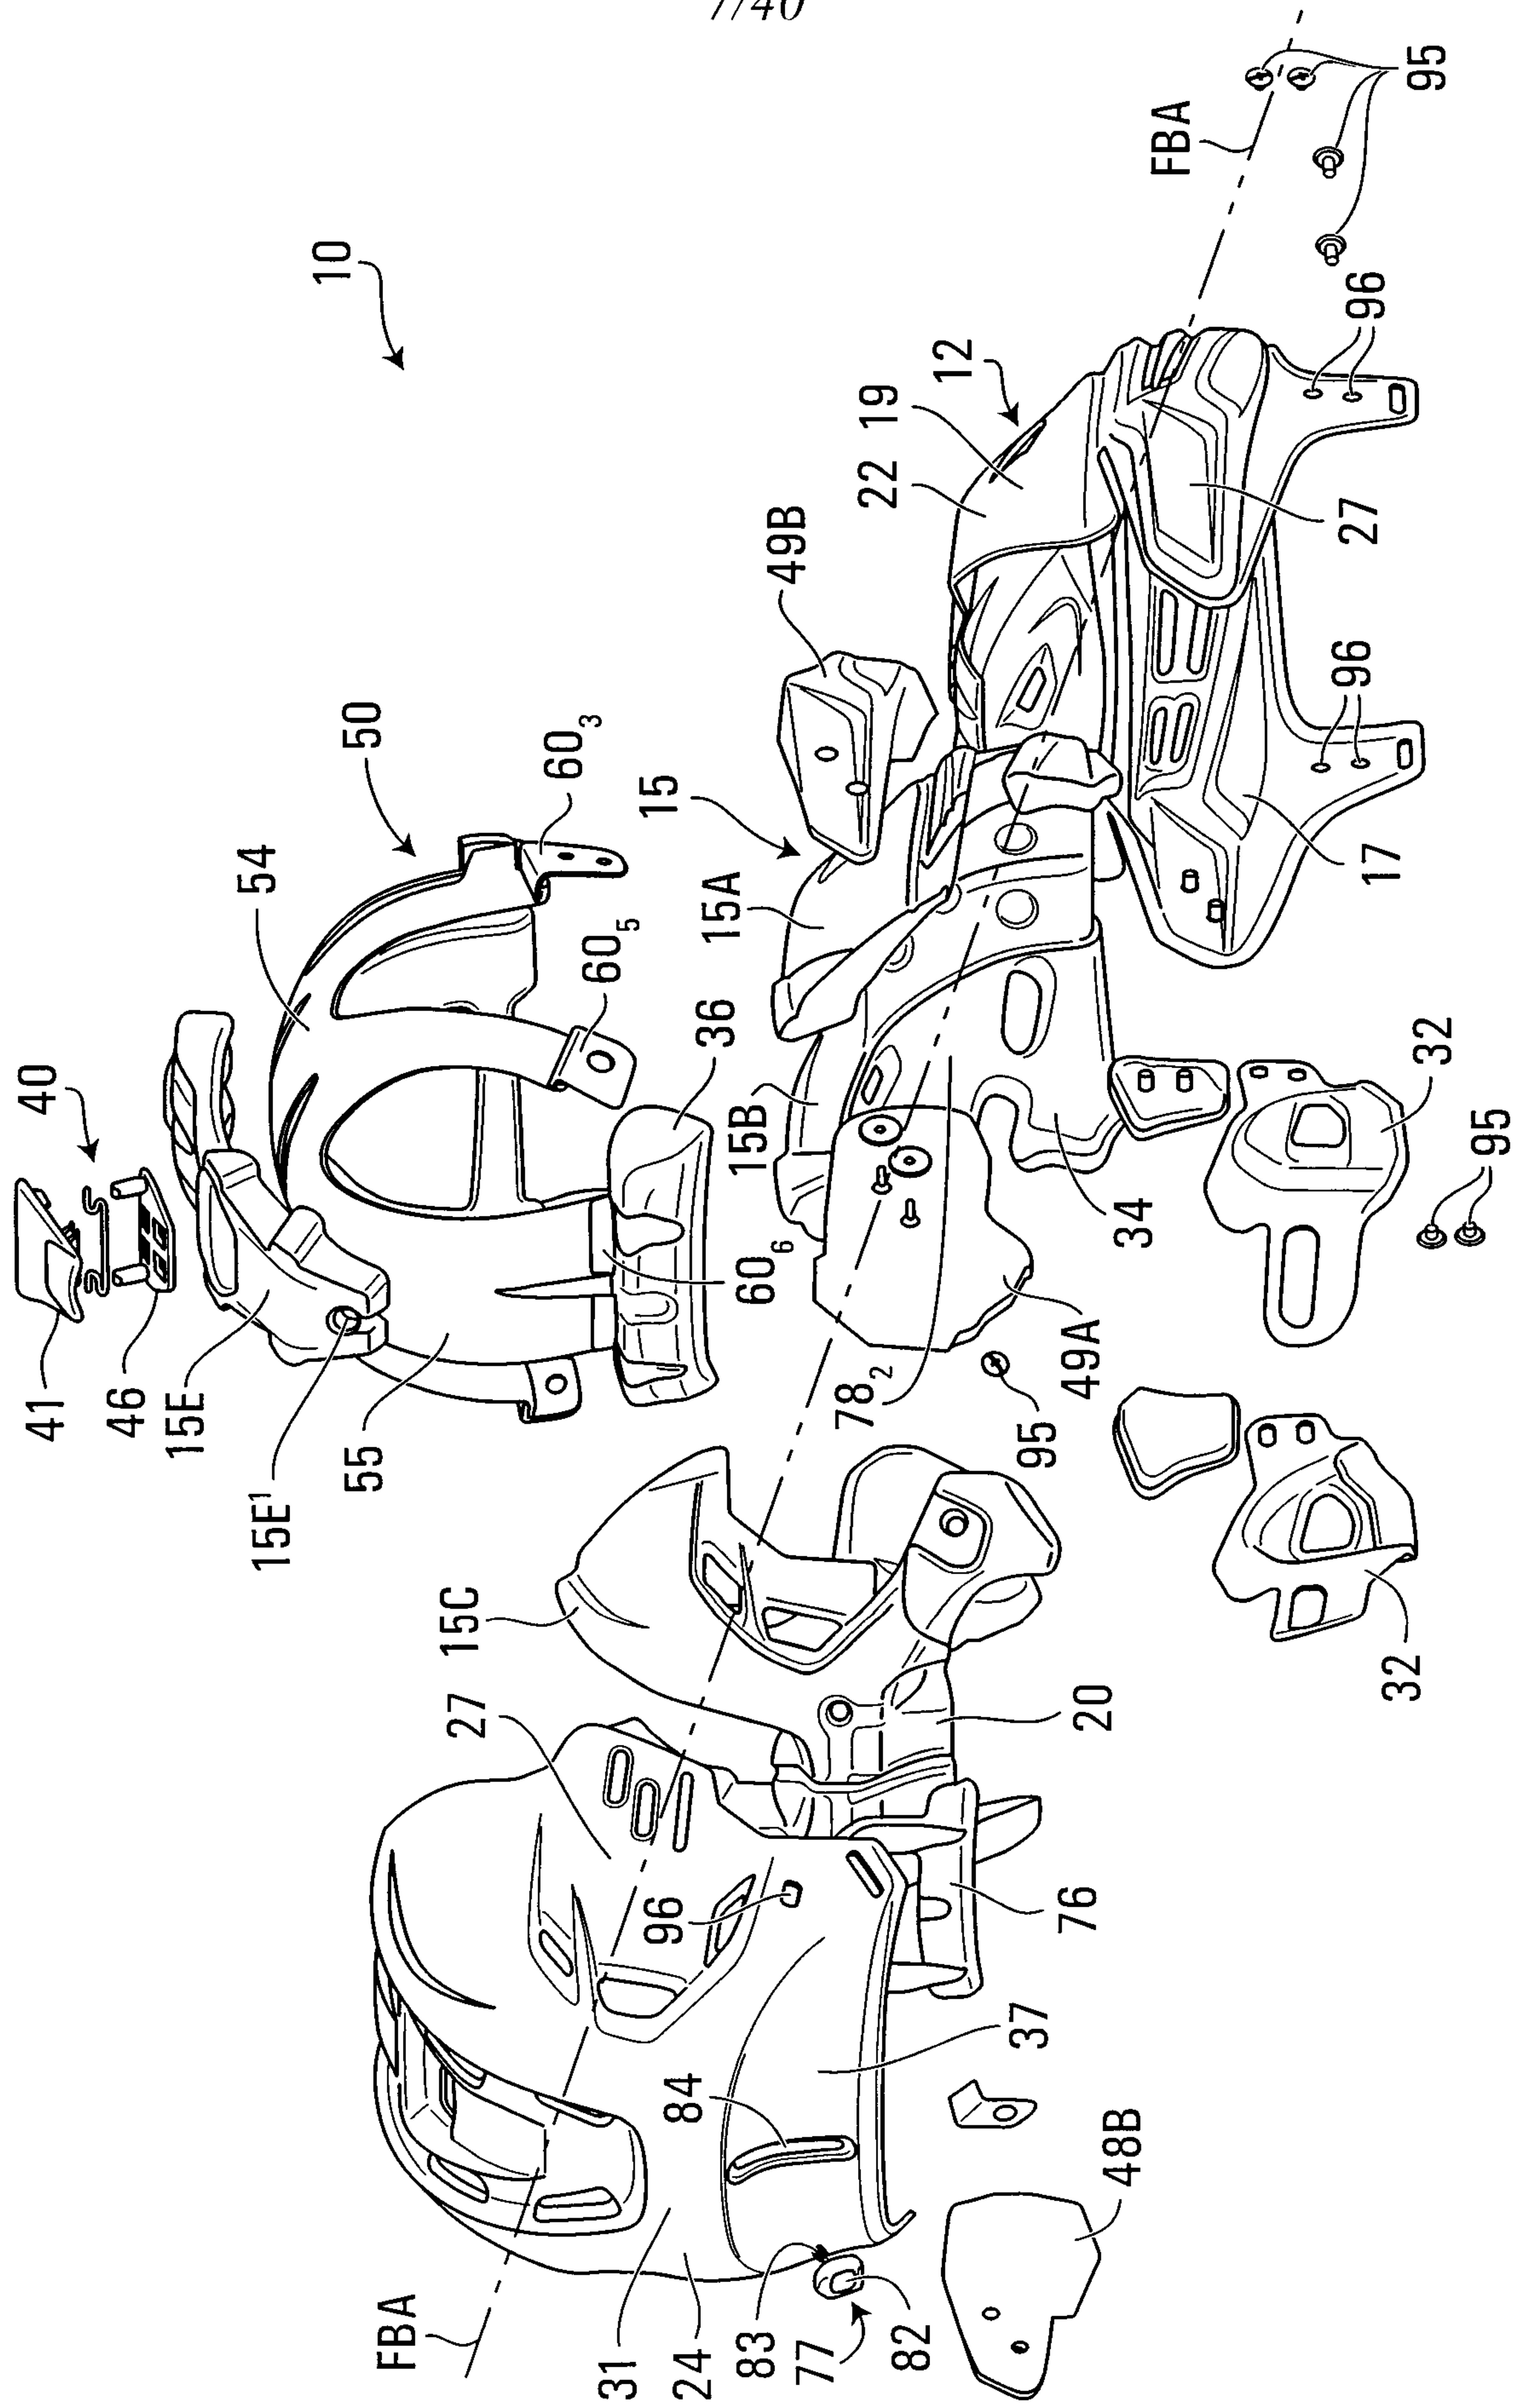
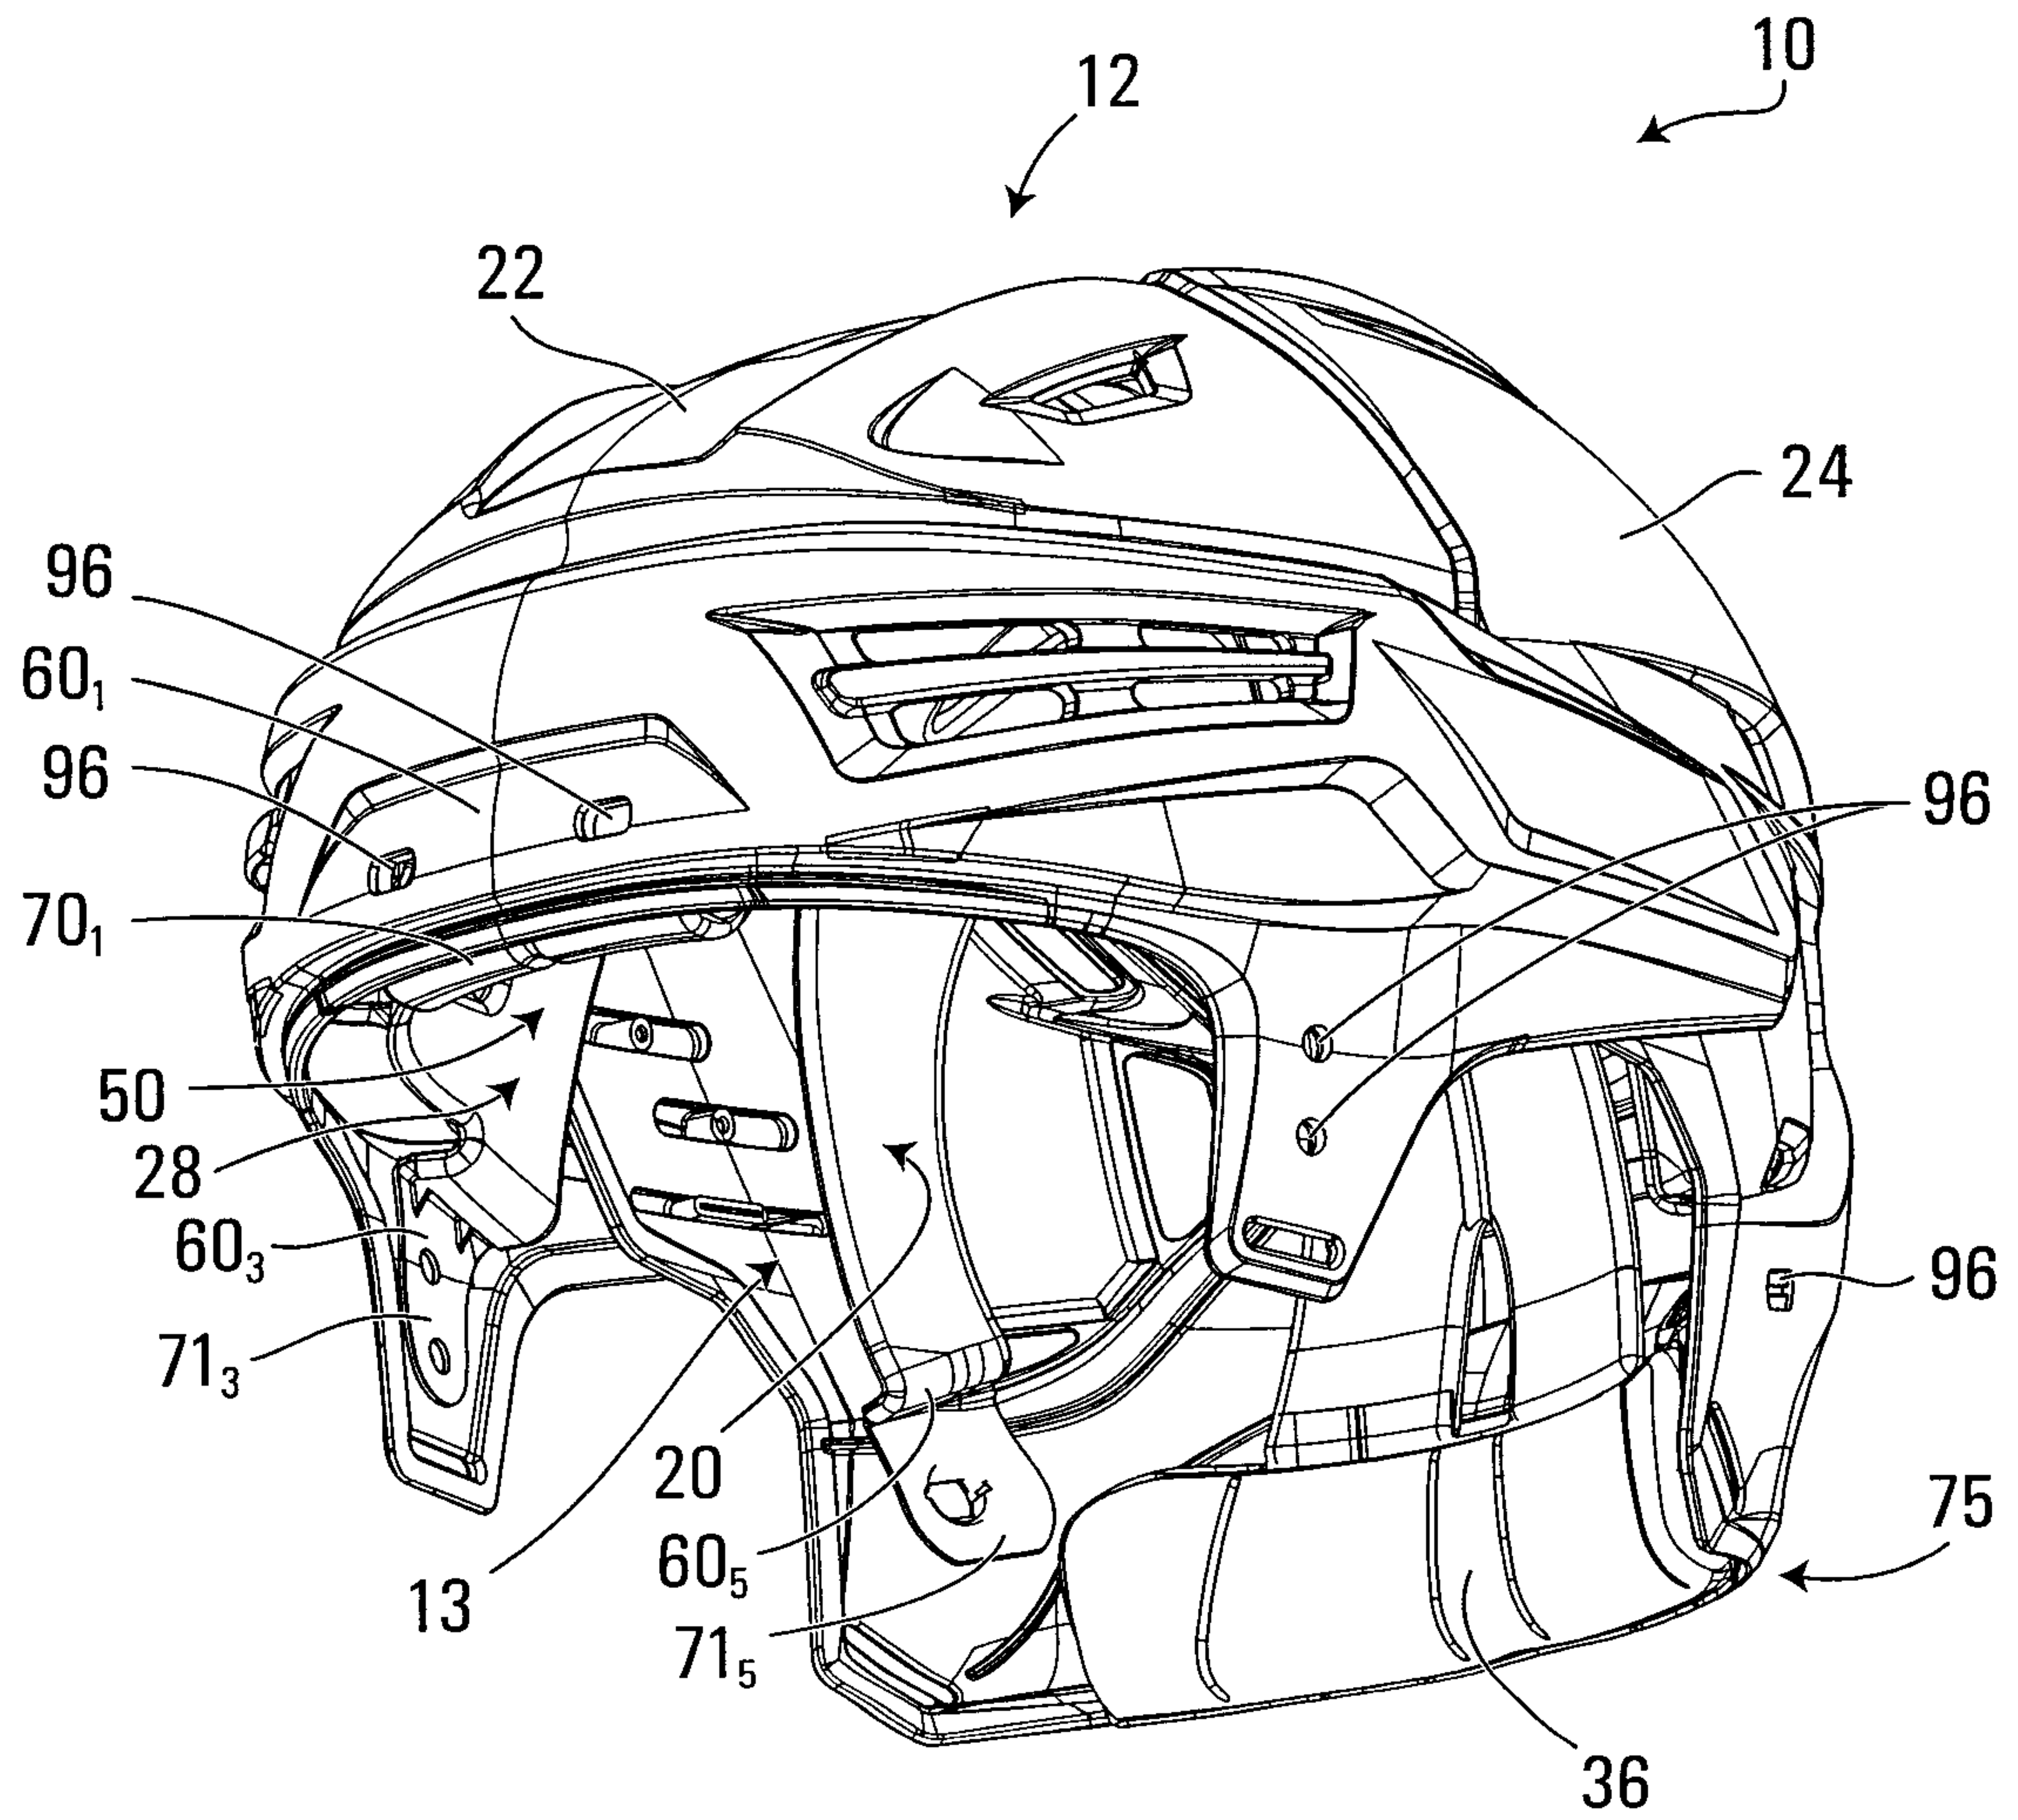


FIG. 10

8/40

**FIG. 11**

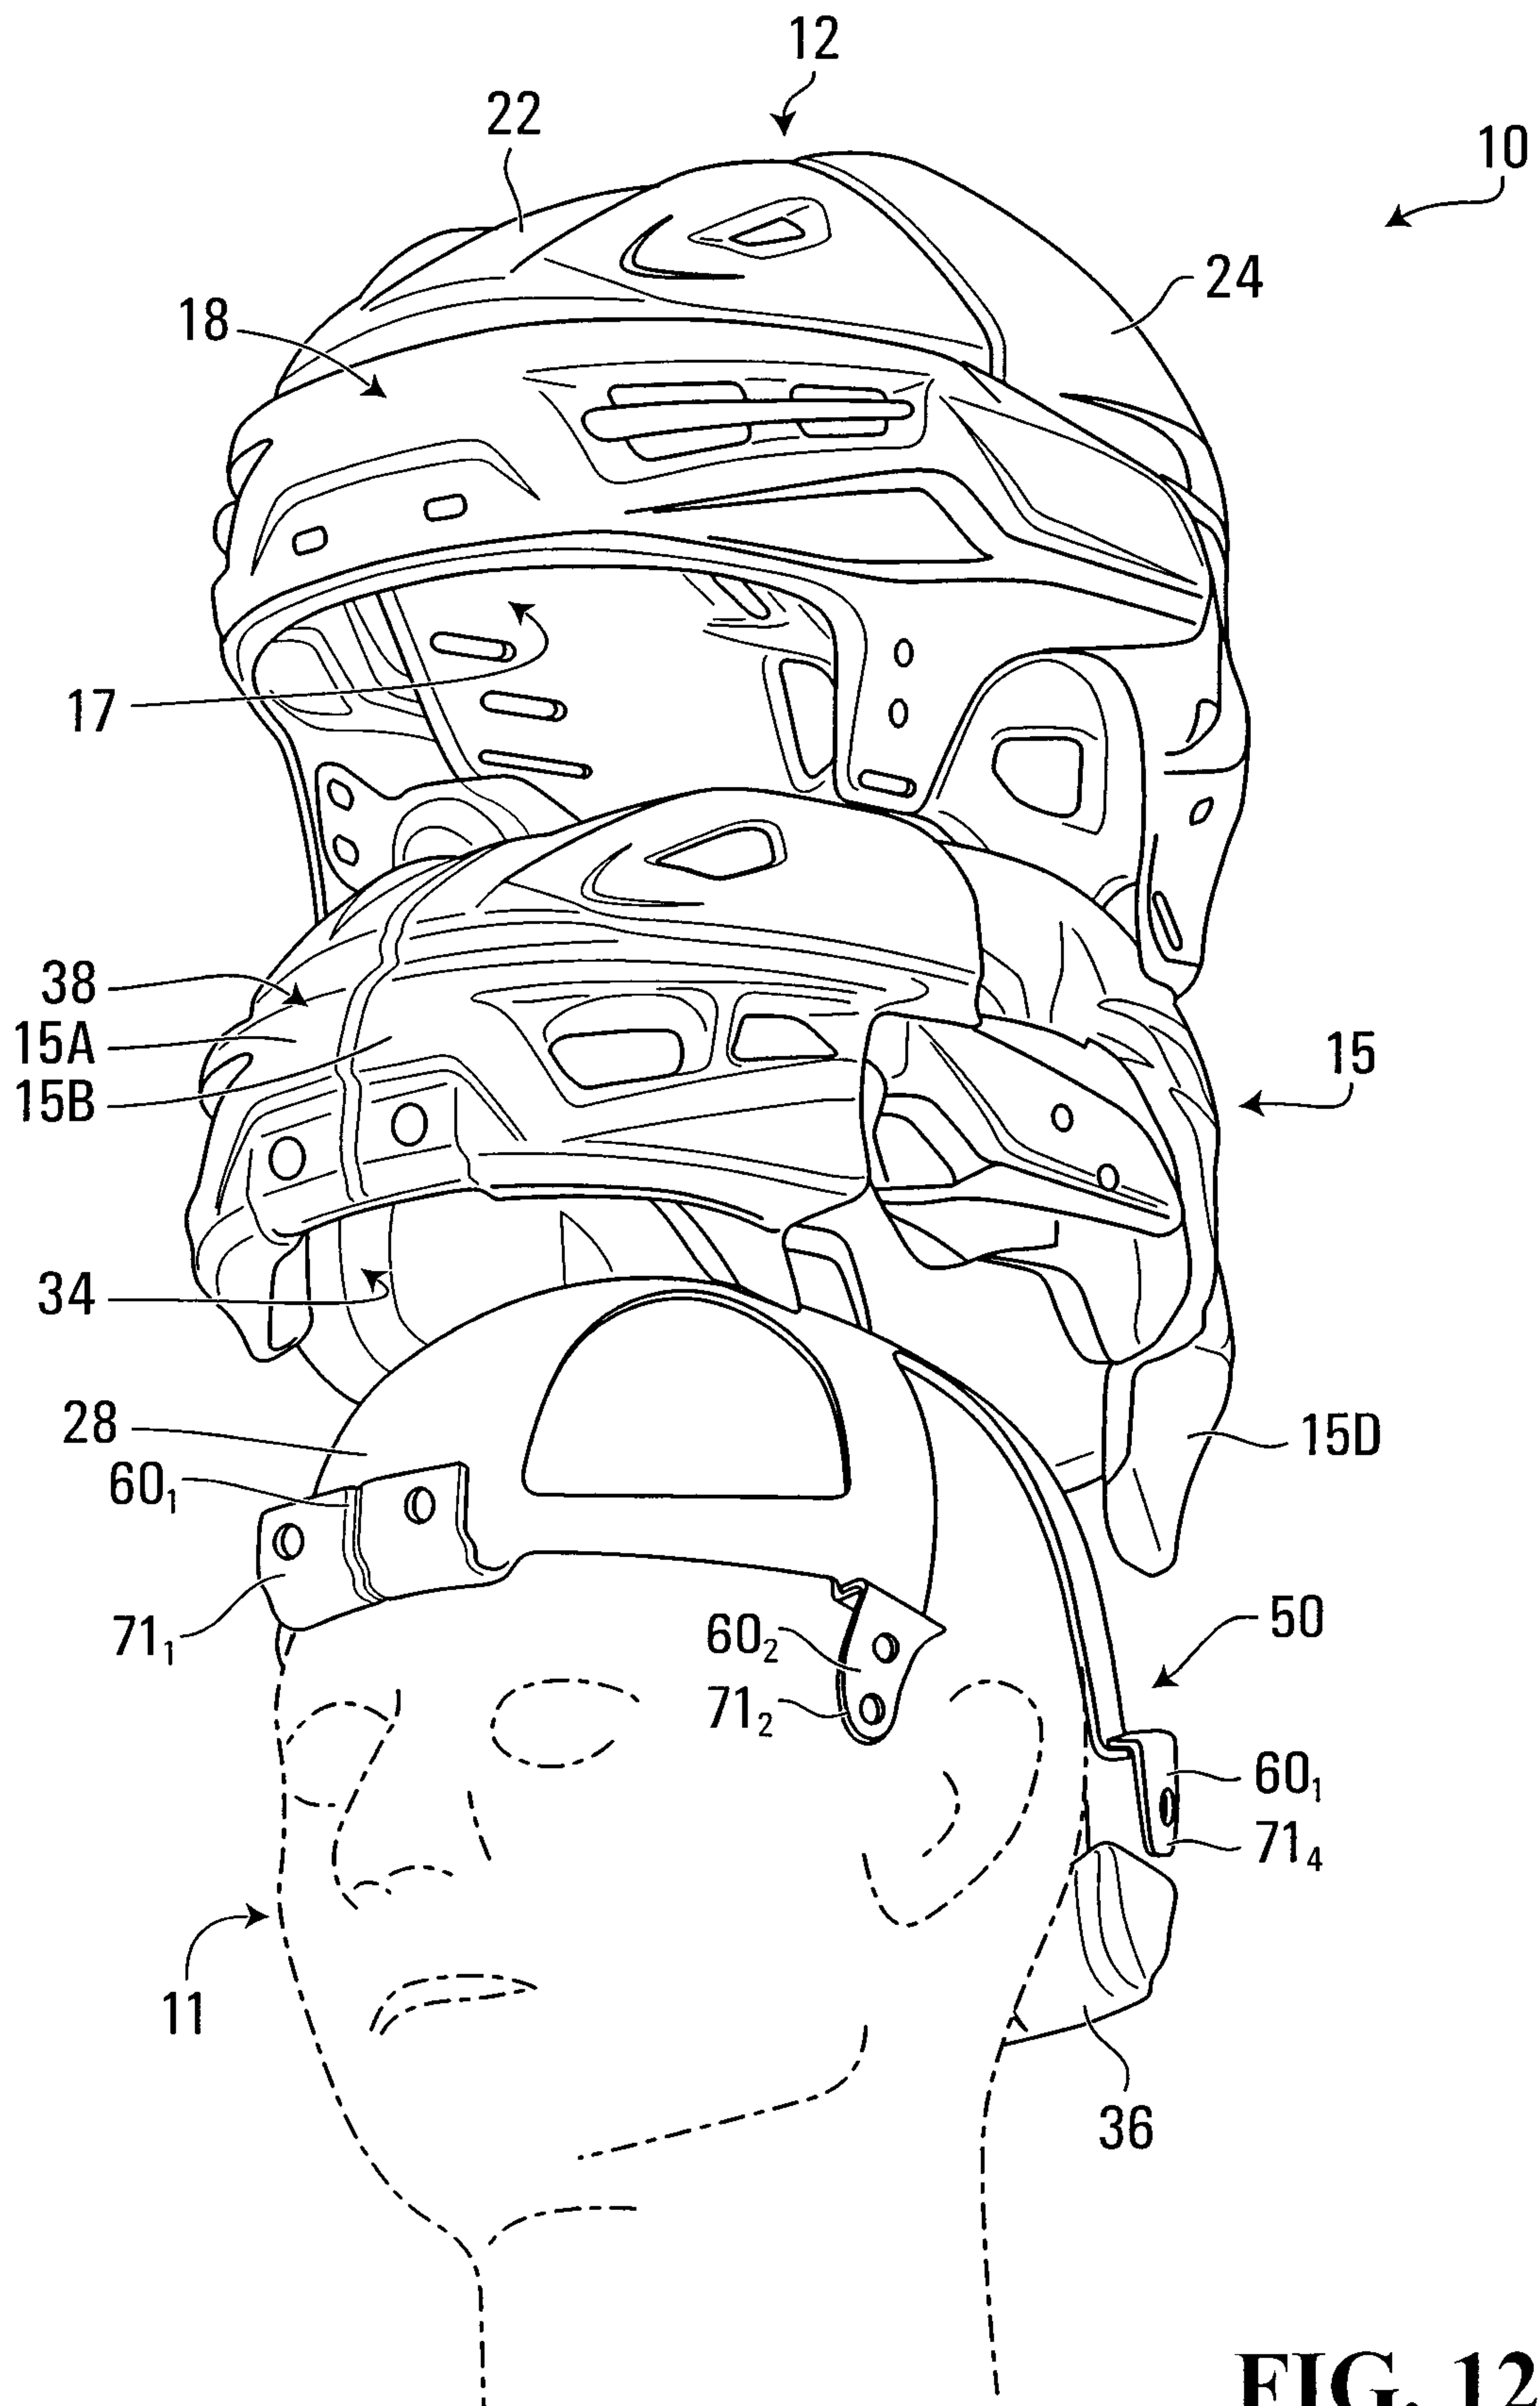
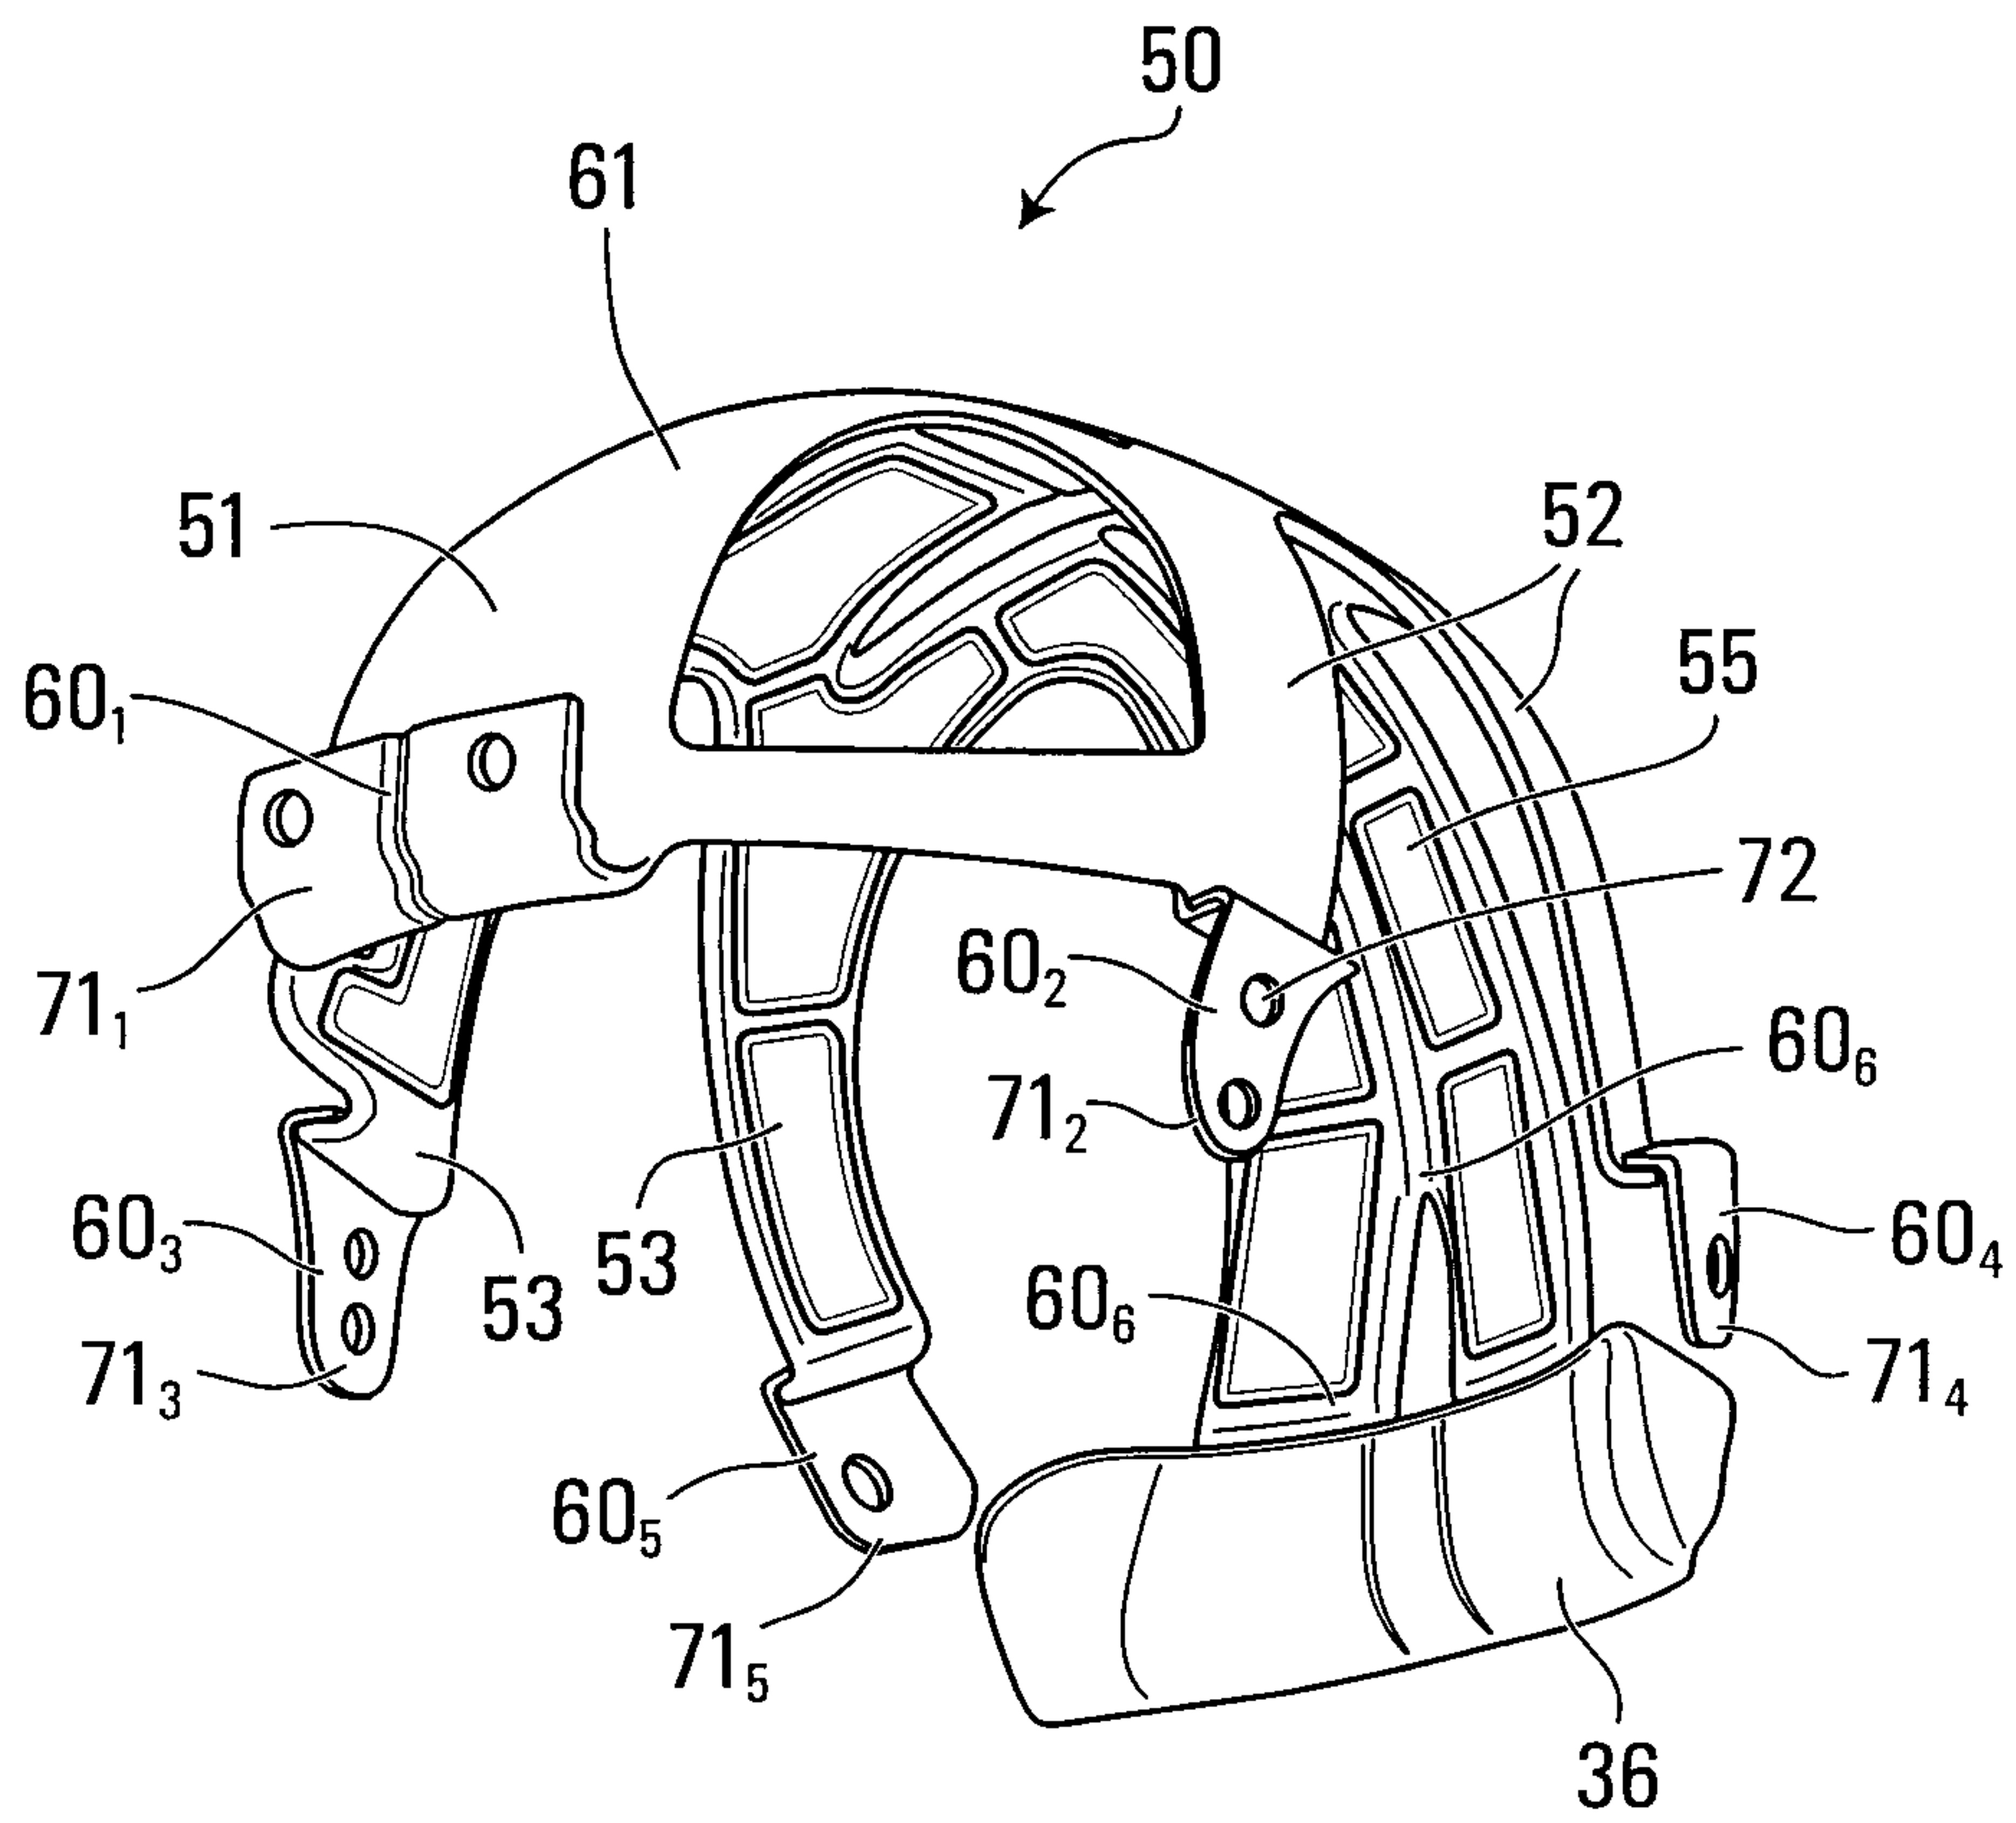
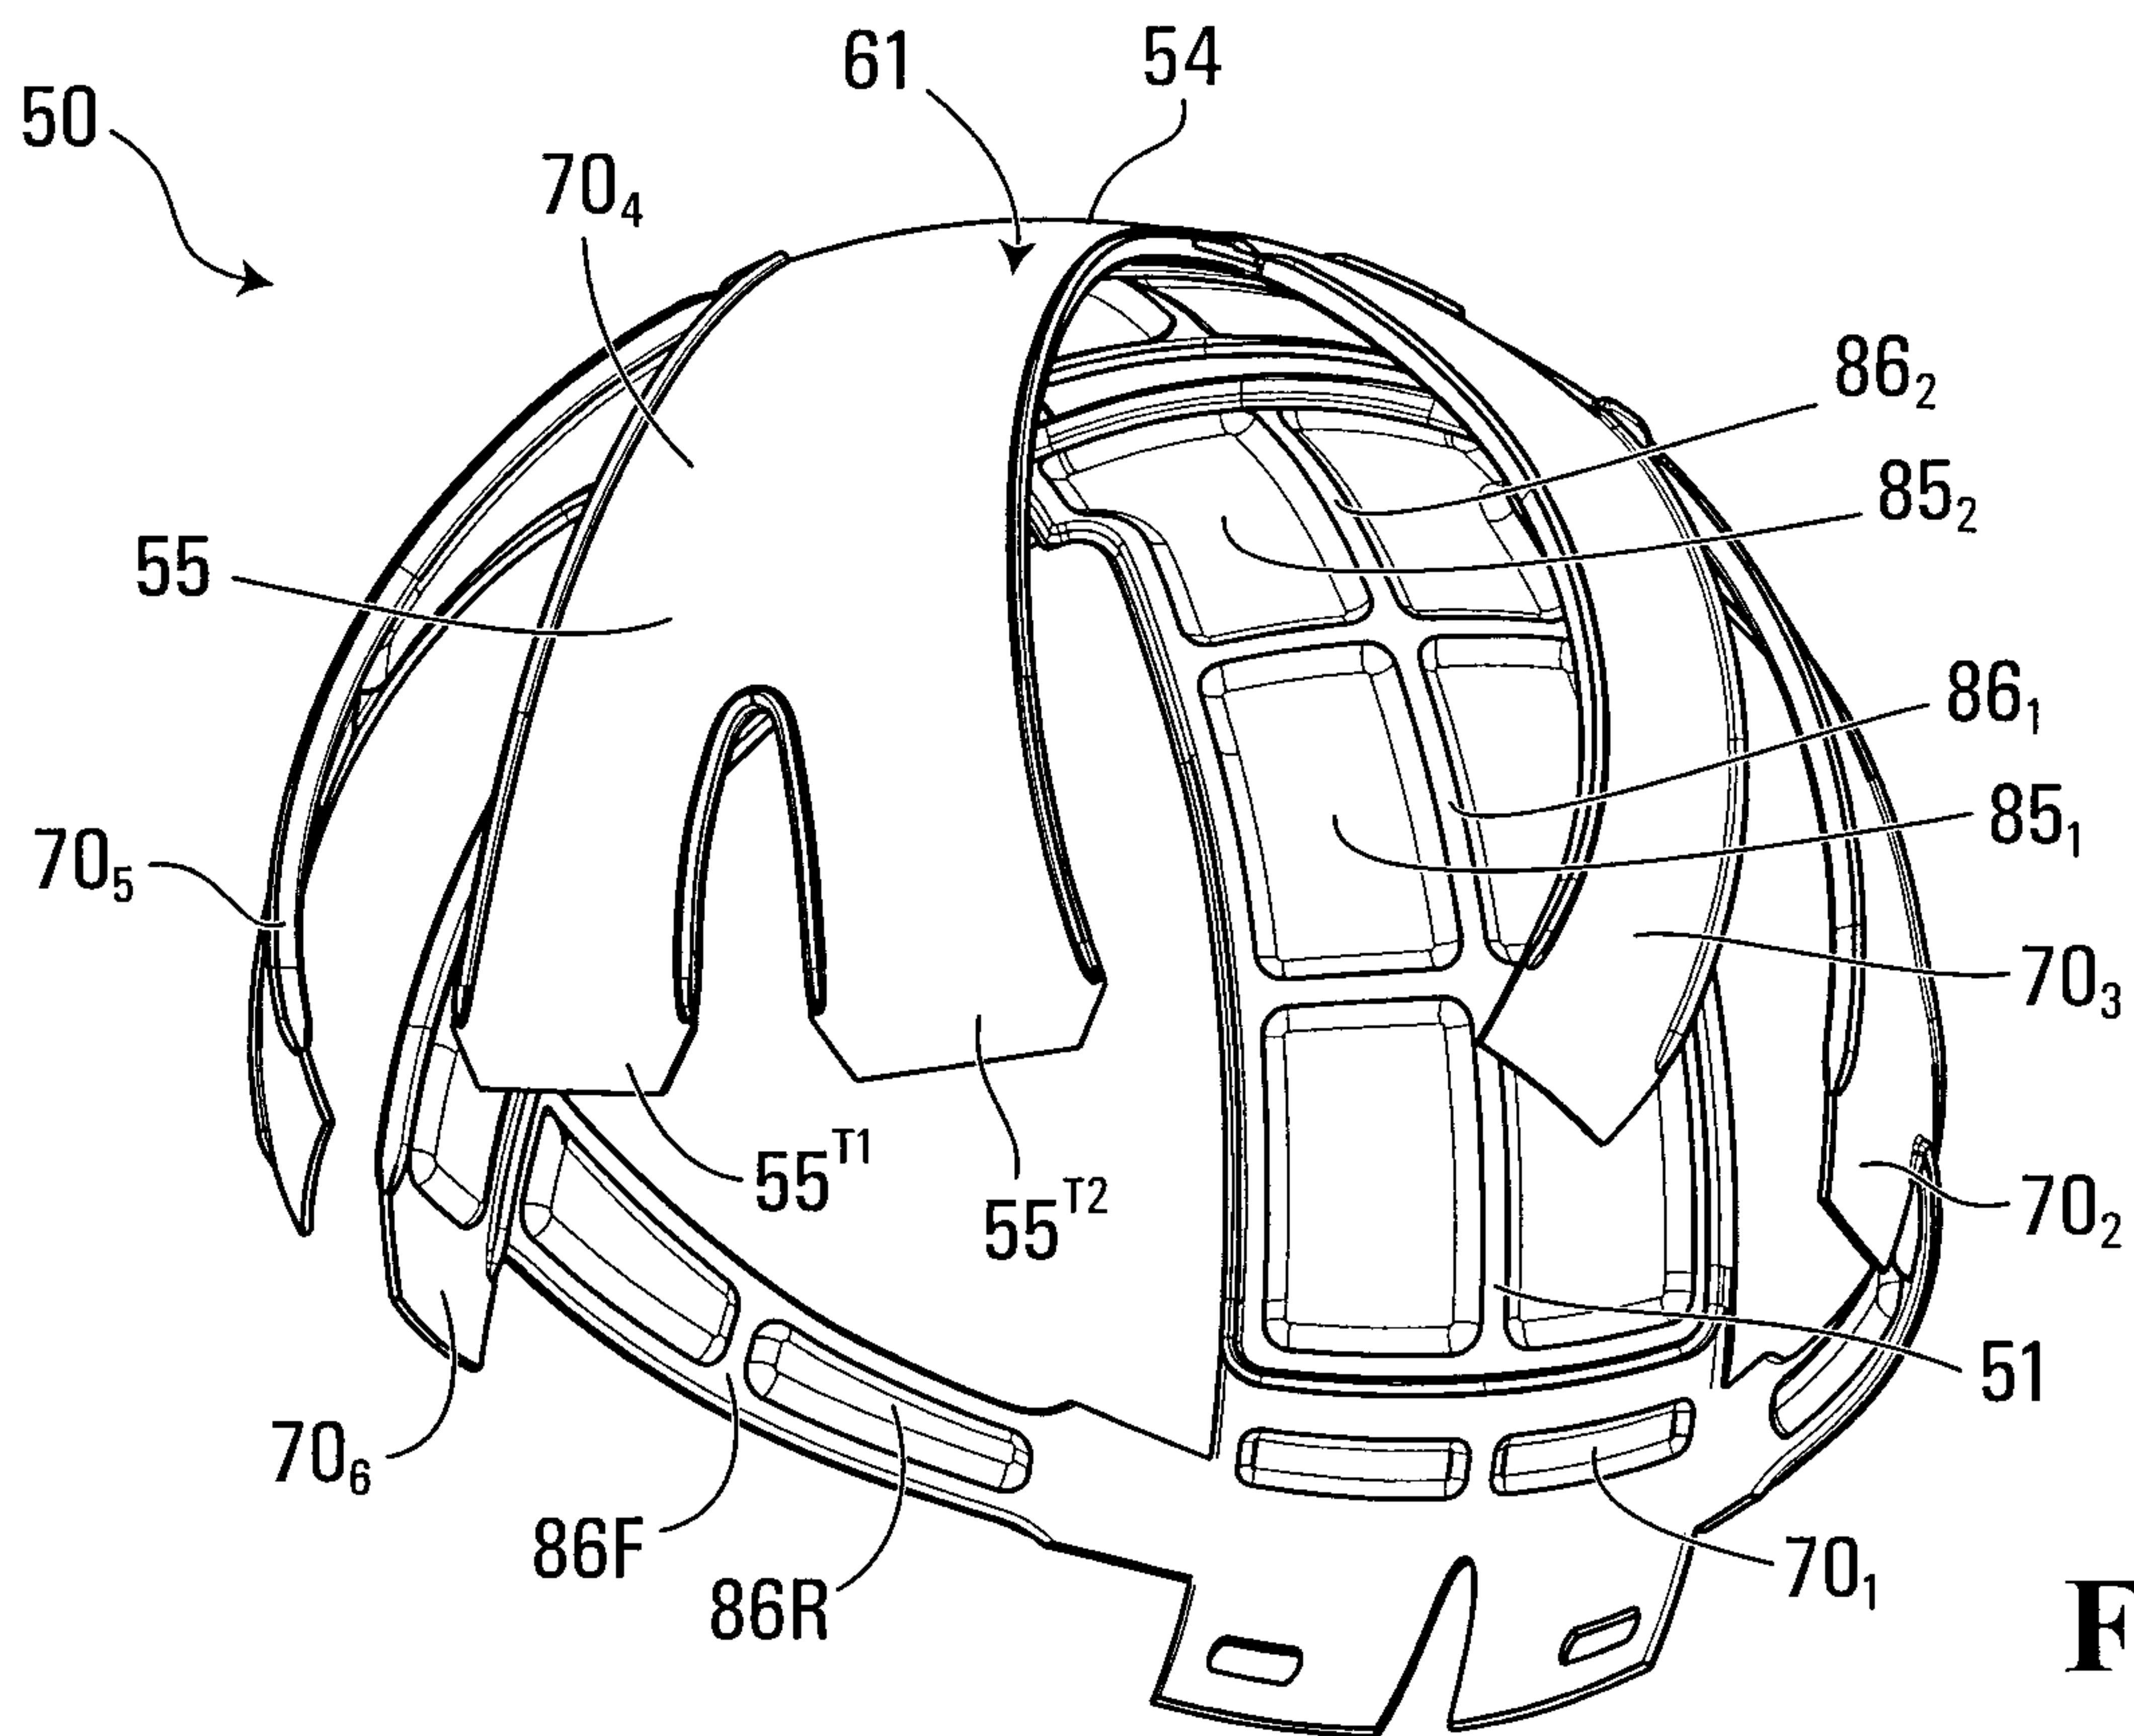
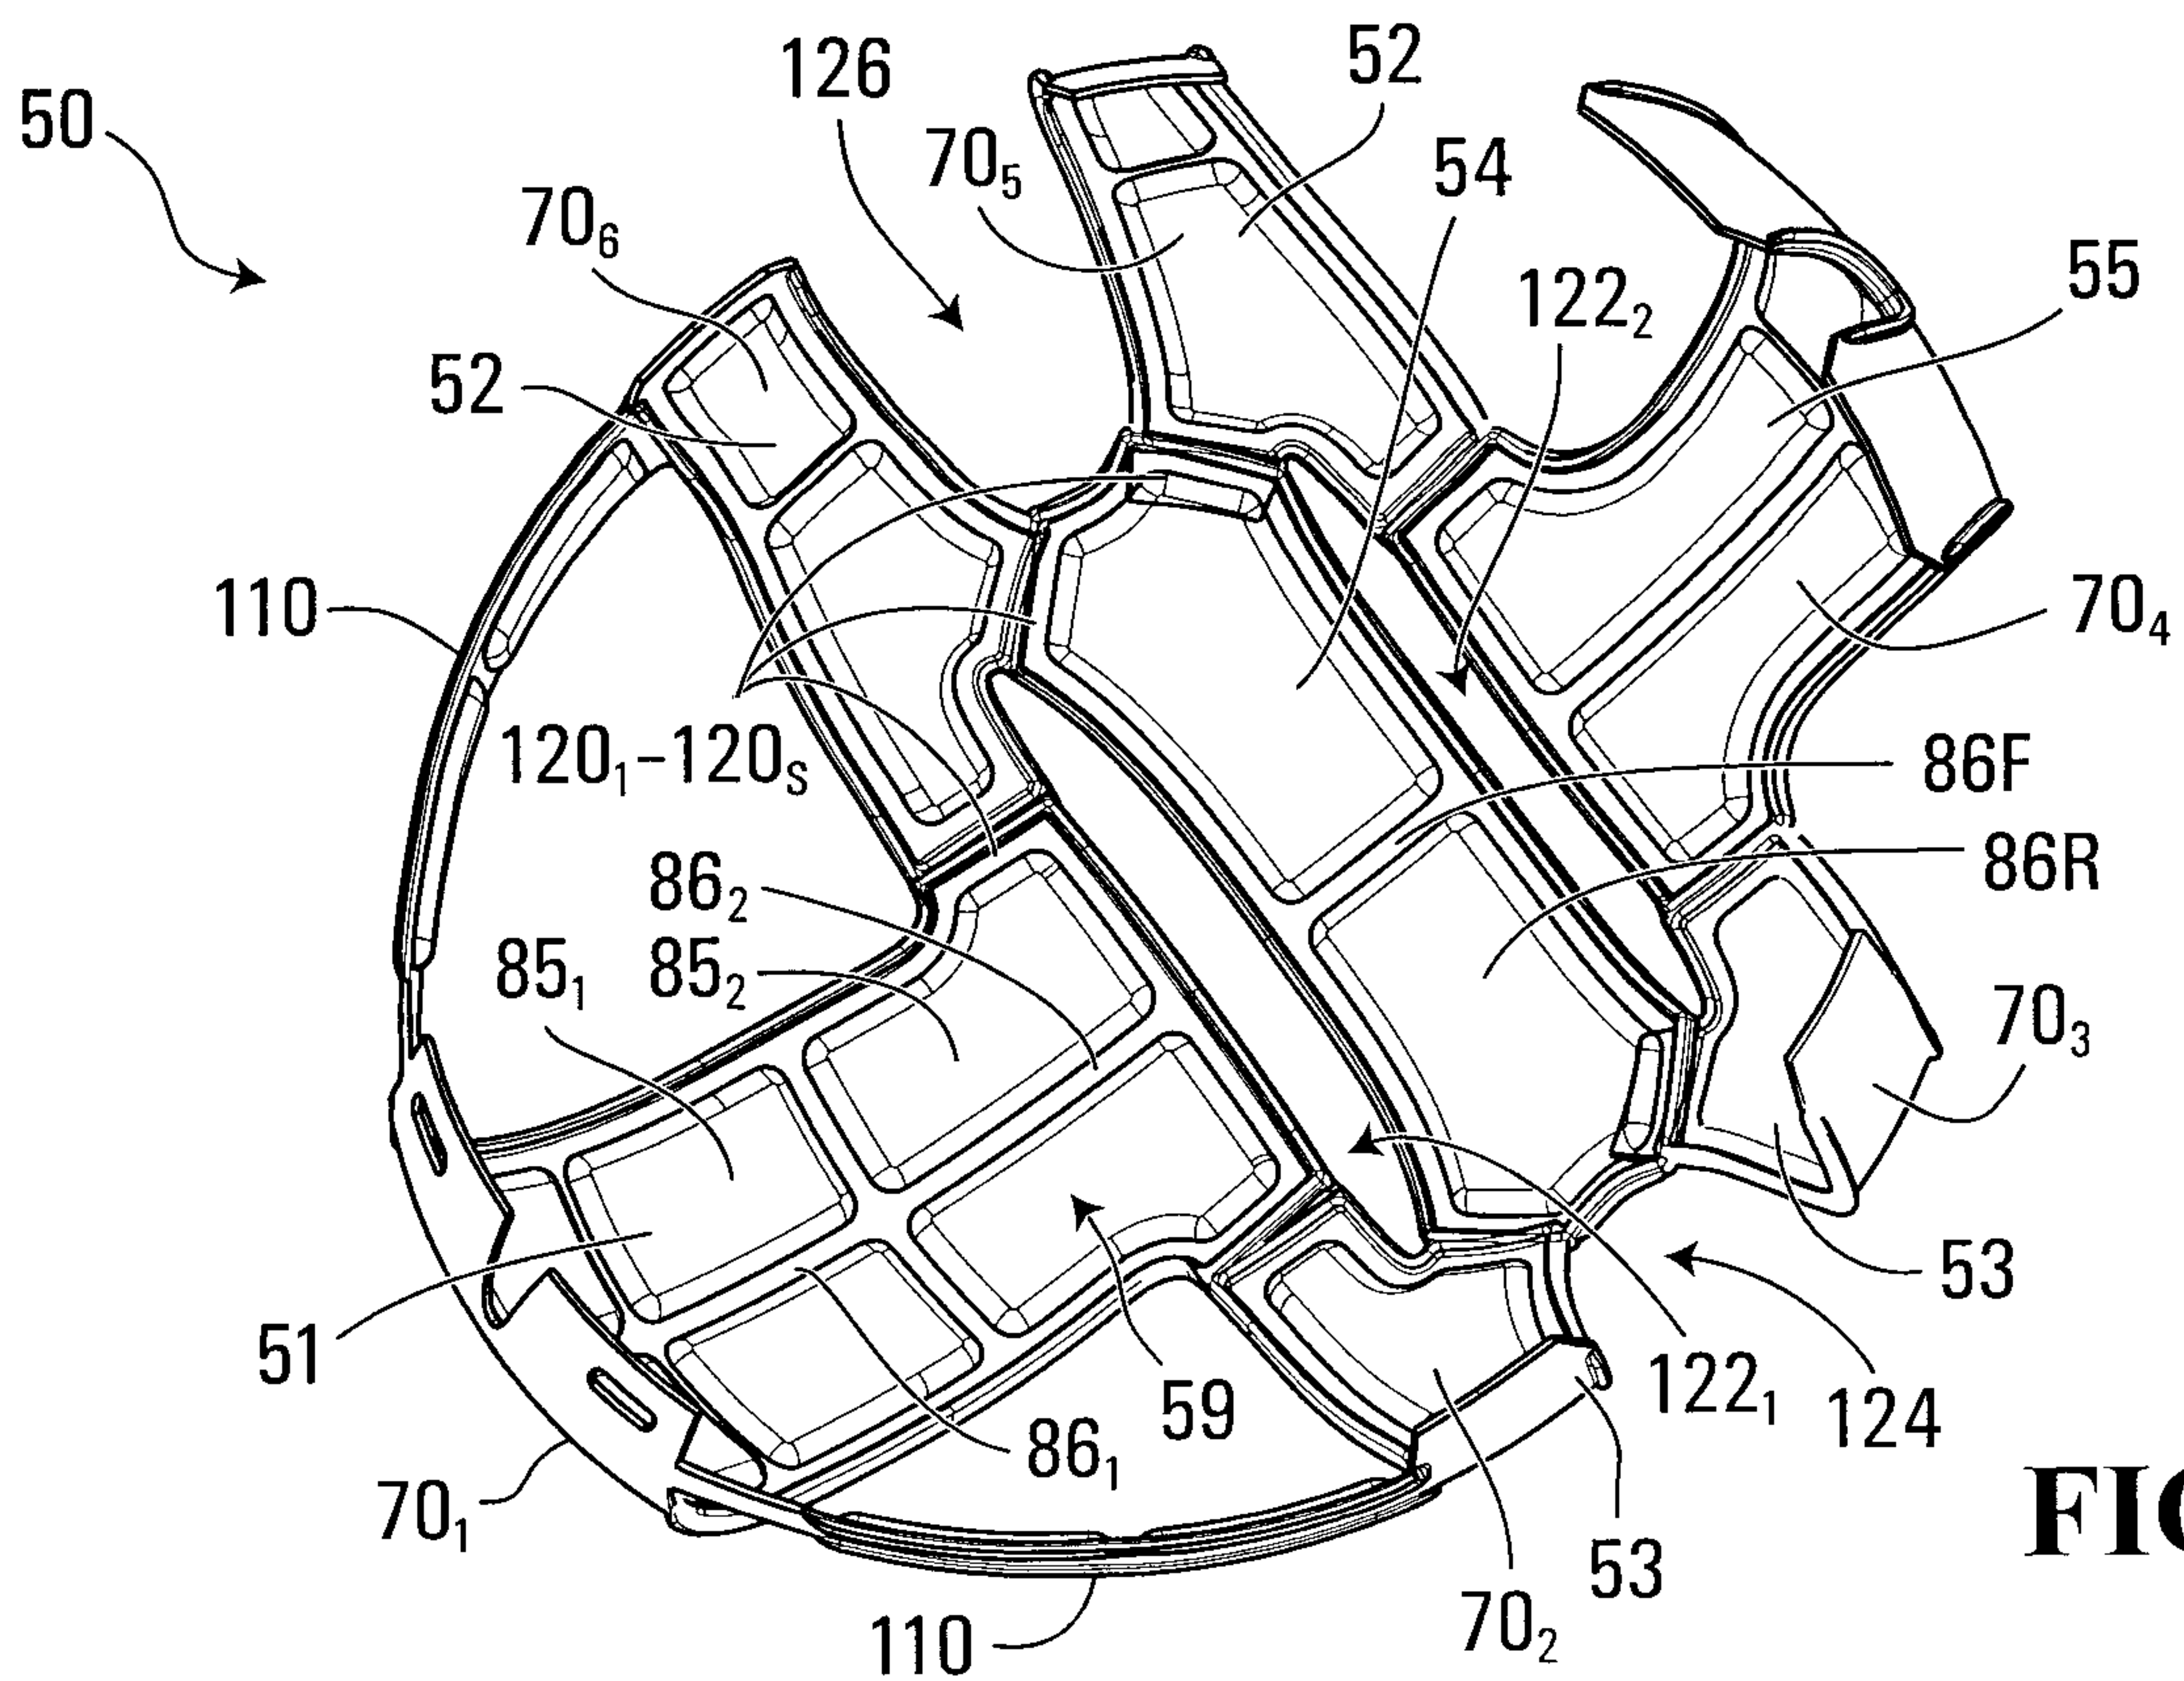


FIG. 12

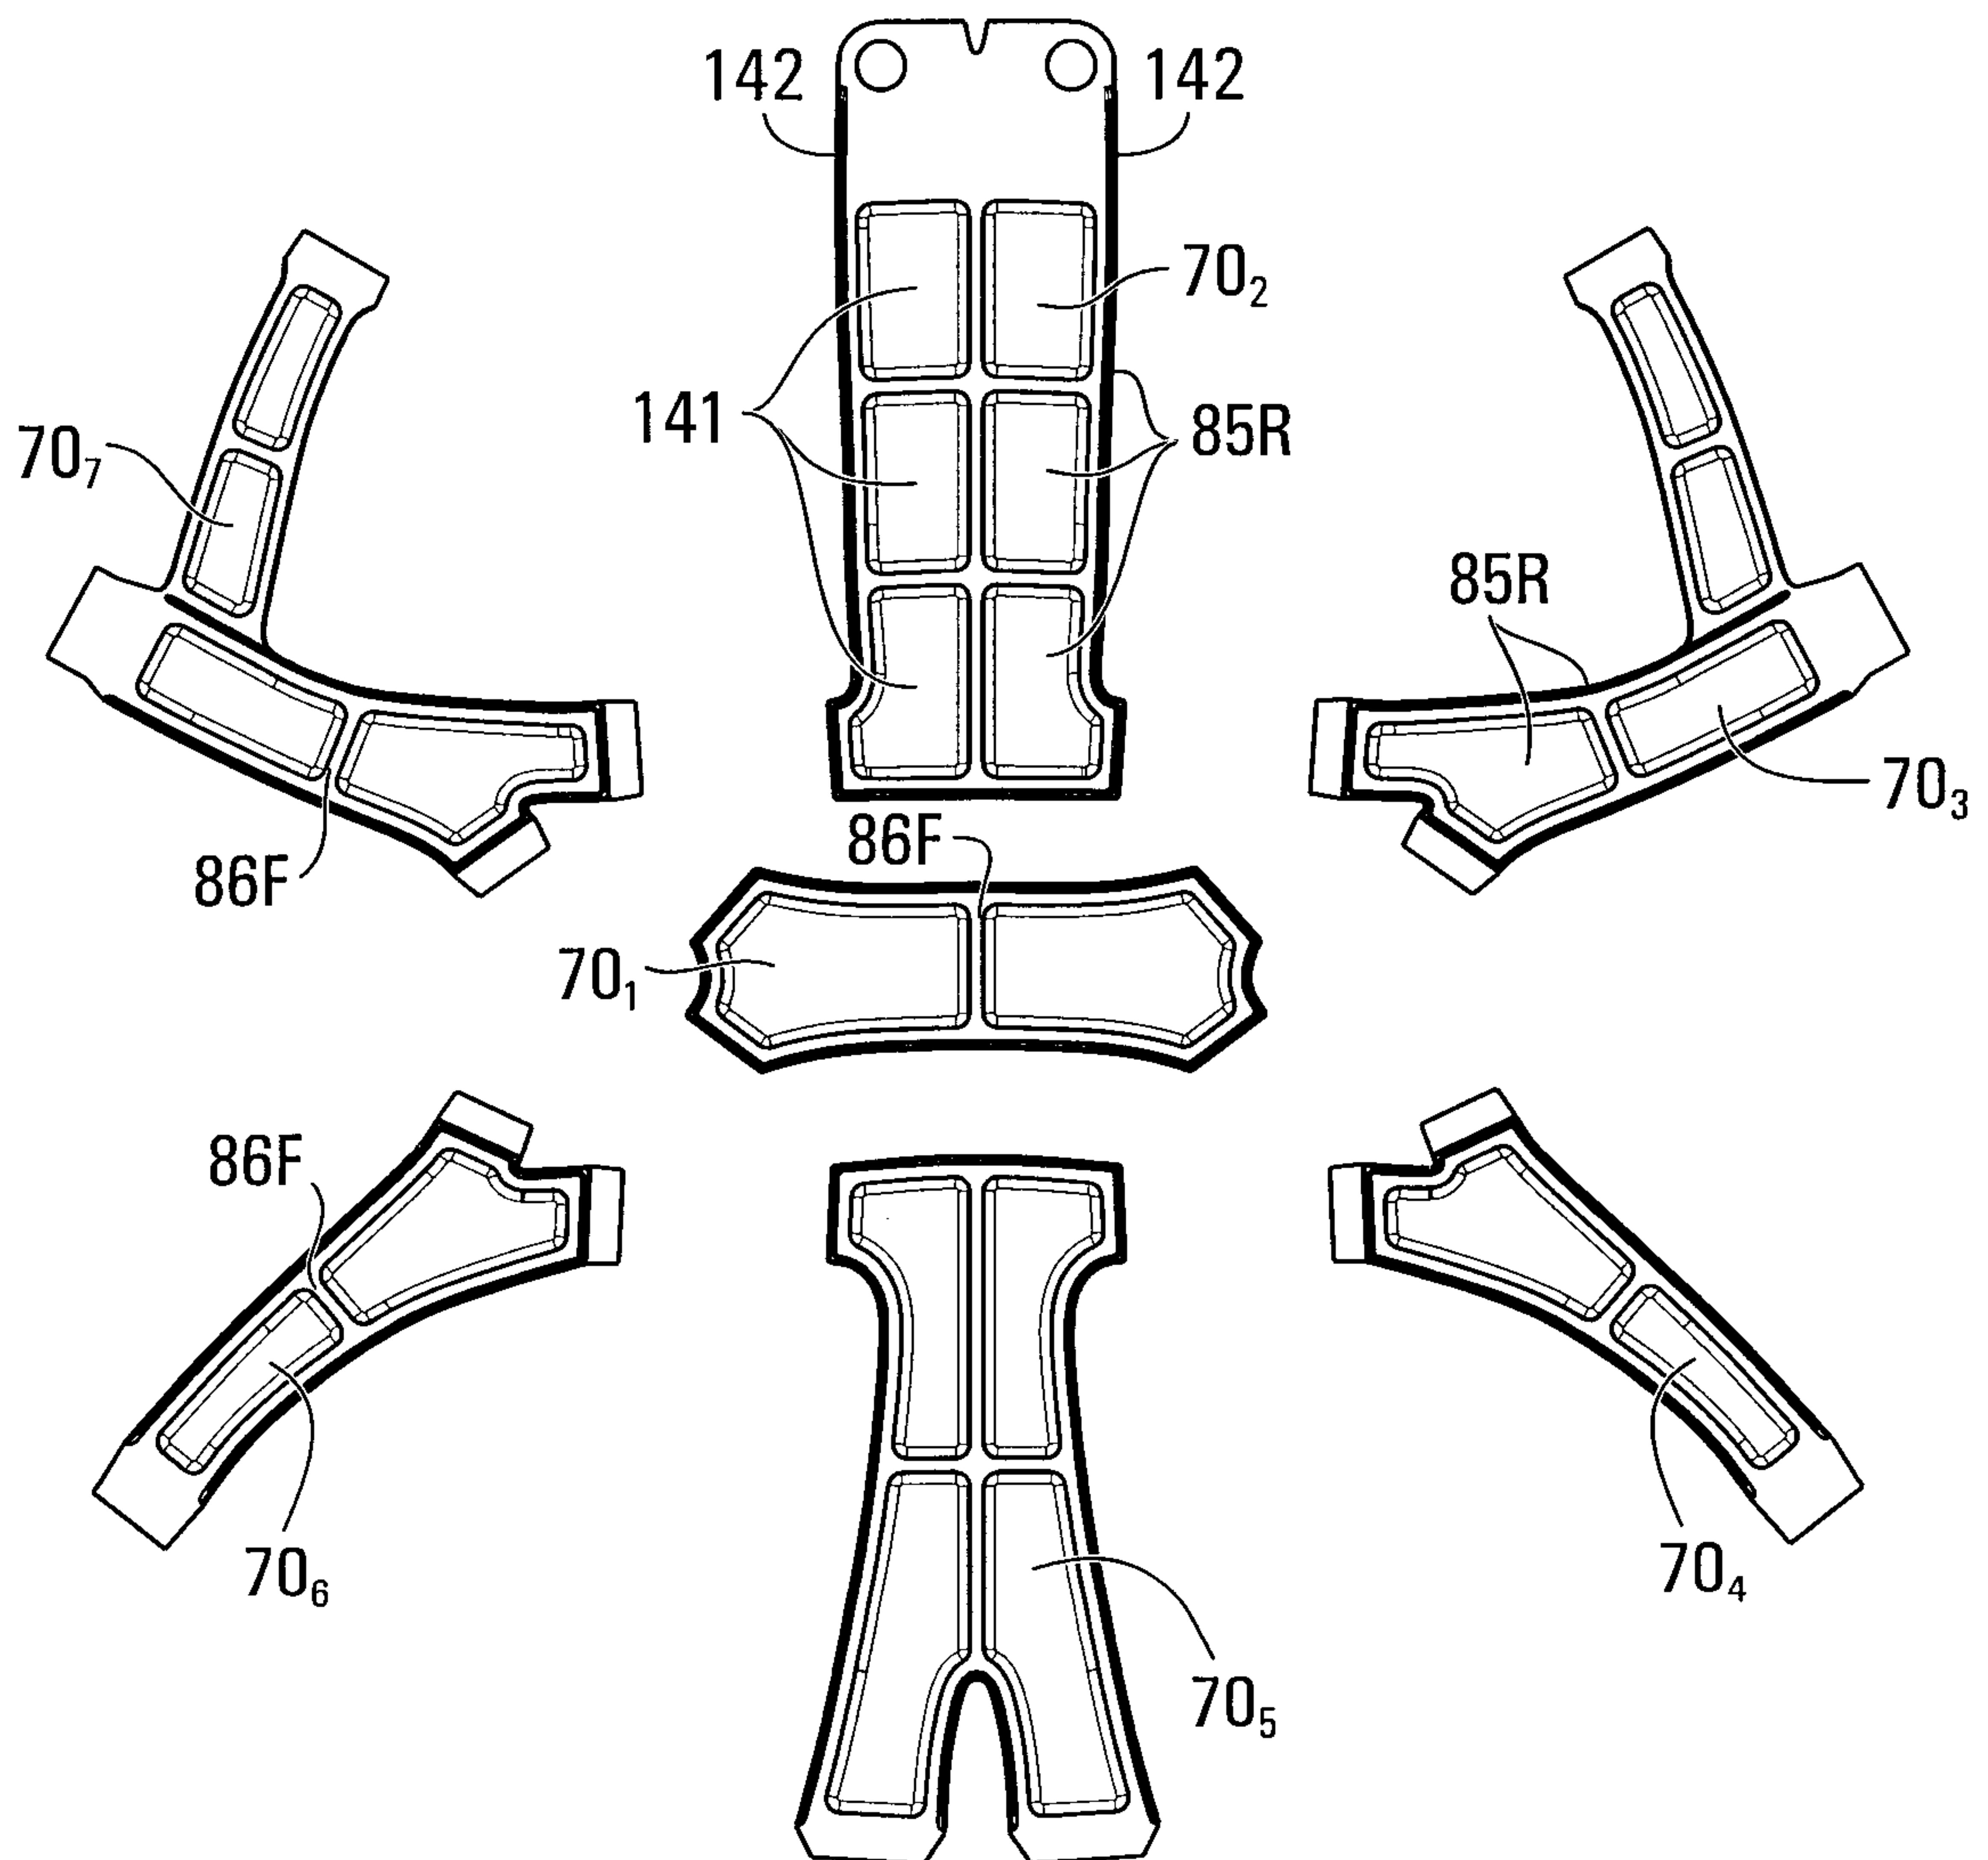
10/40

**FIG. 13**

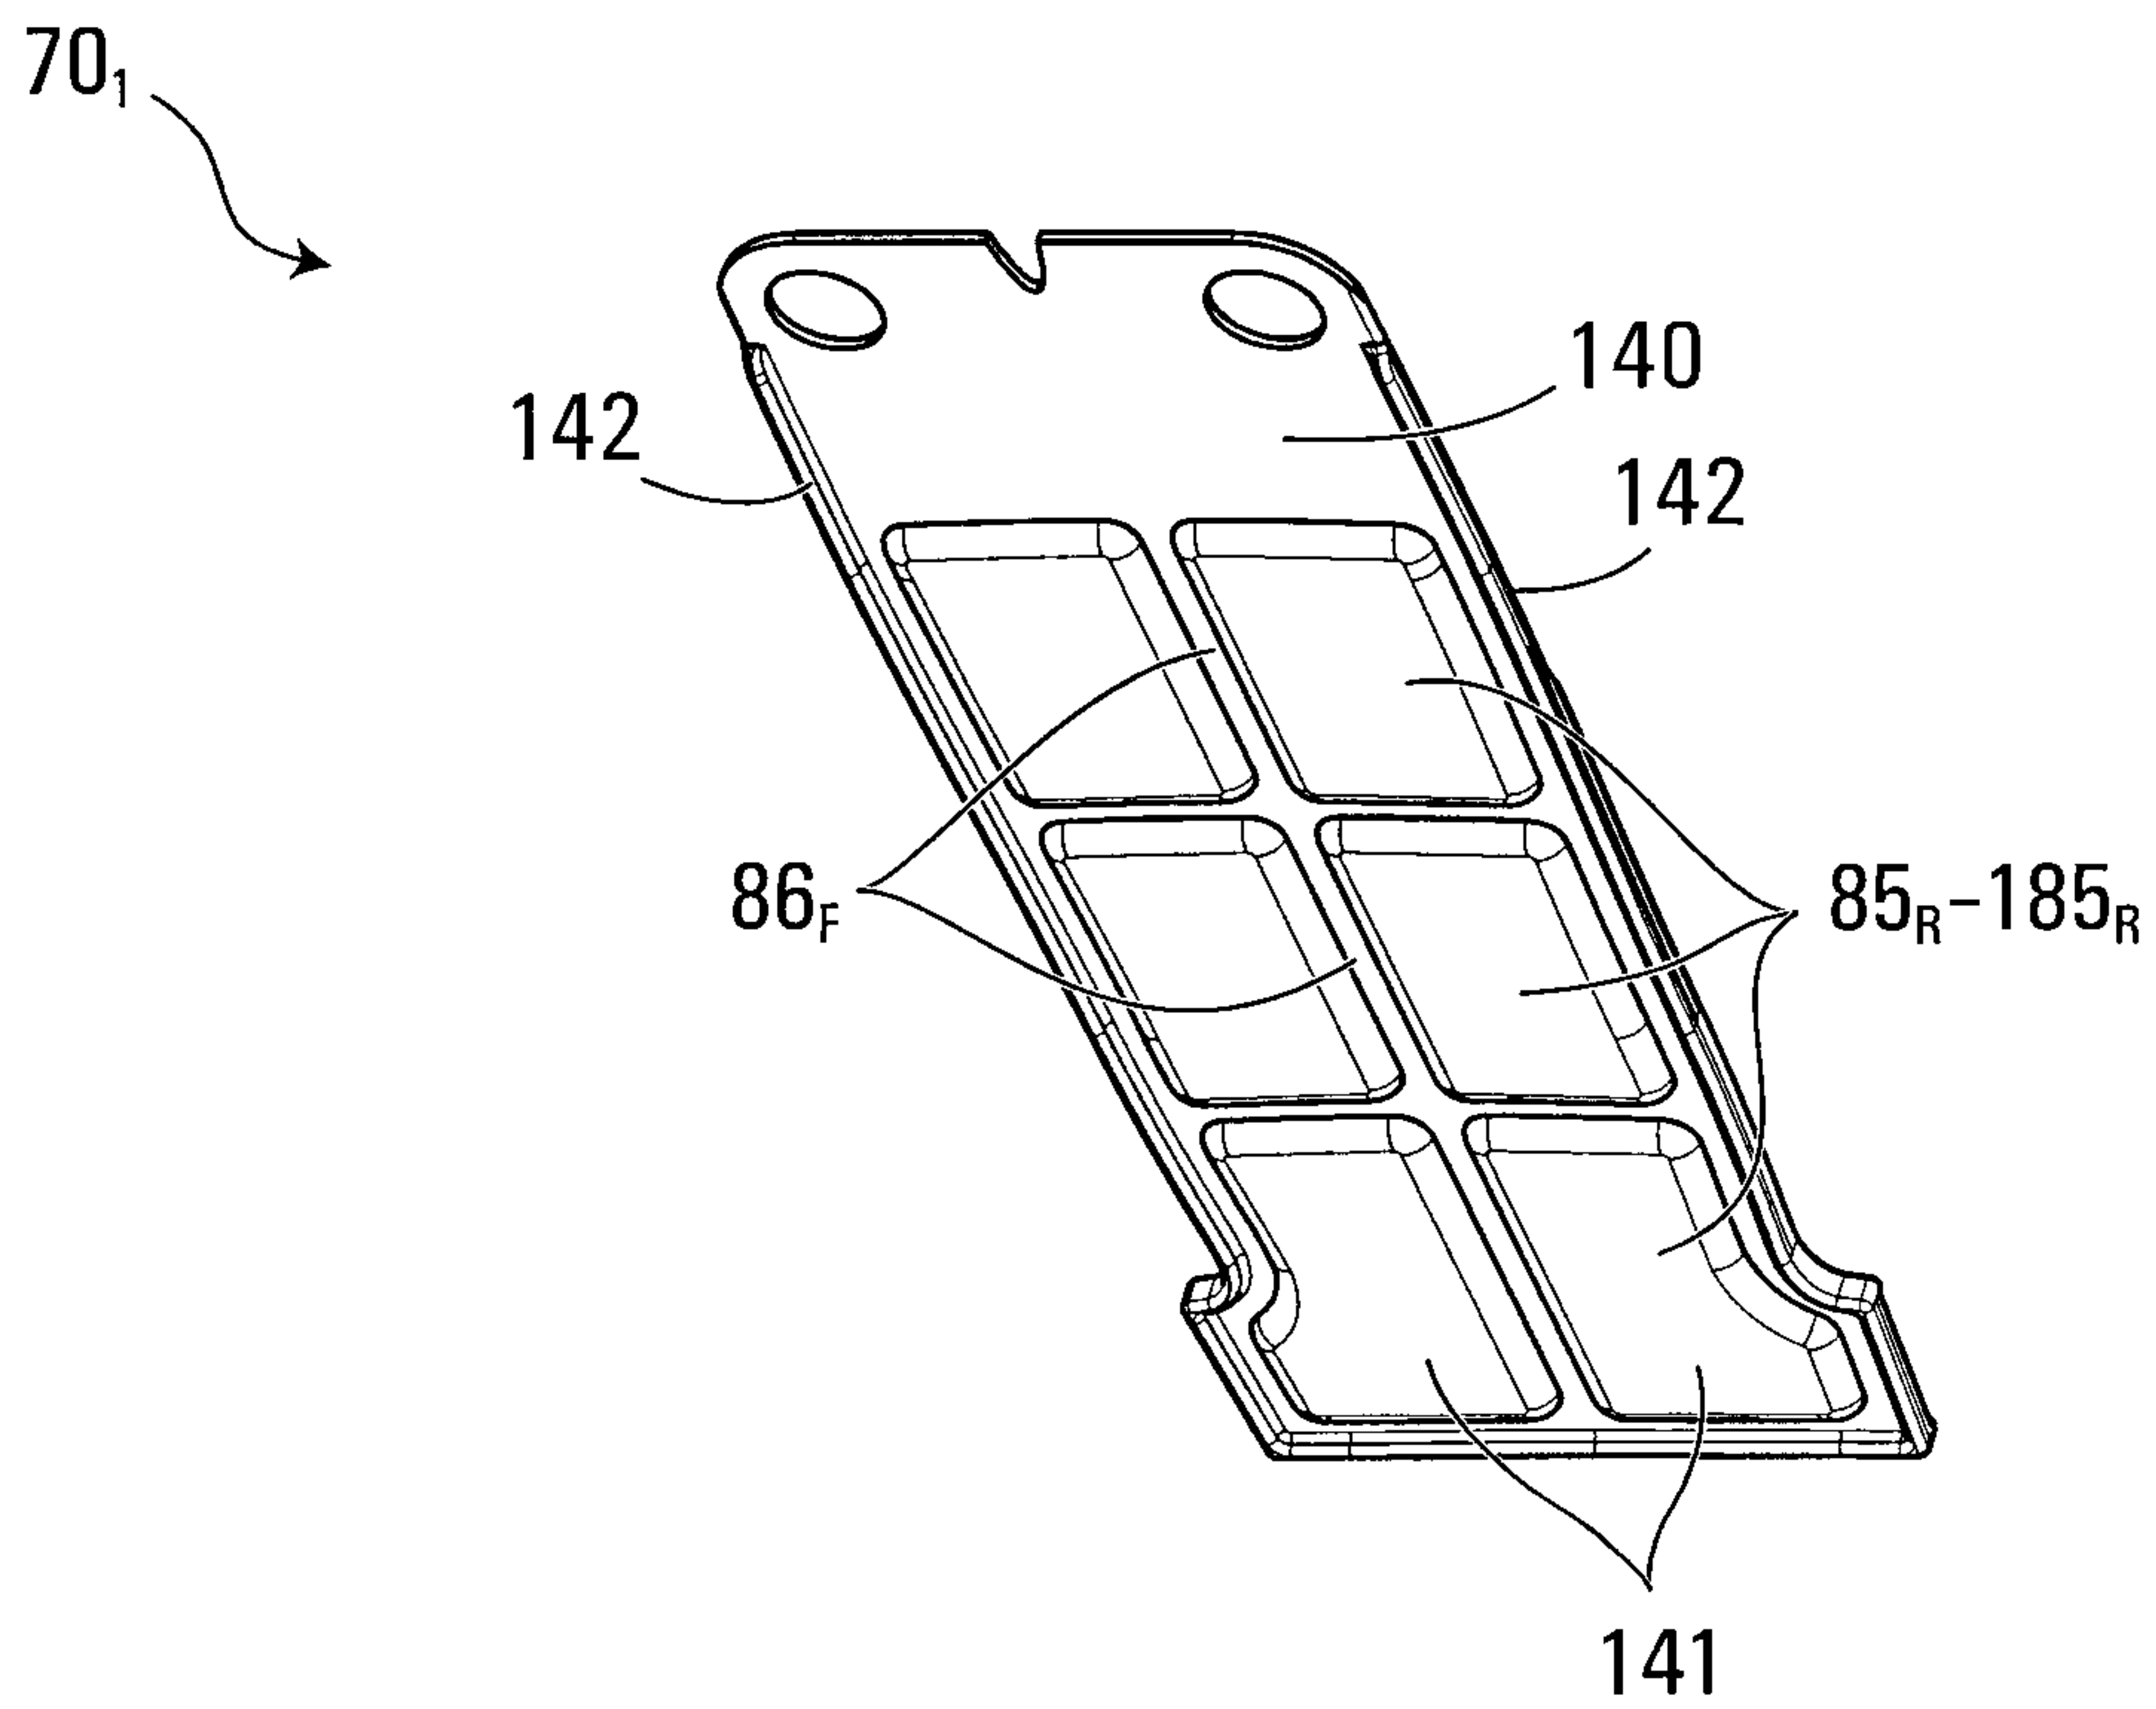
11/40

**FIG. 14****FIG. 15**

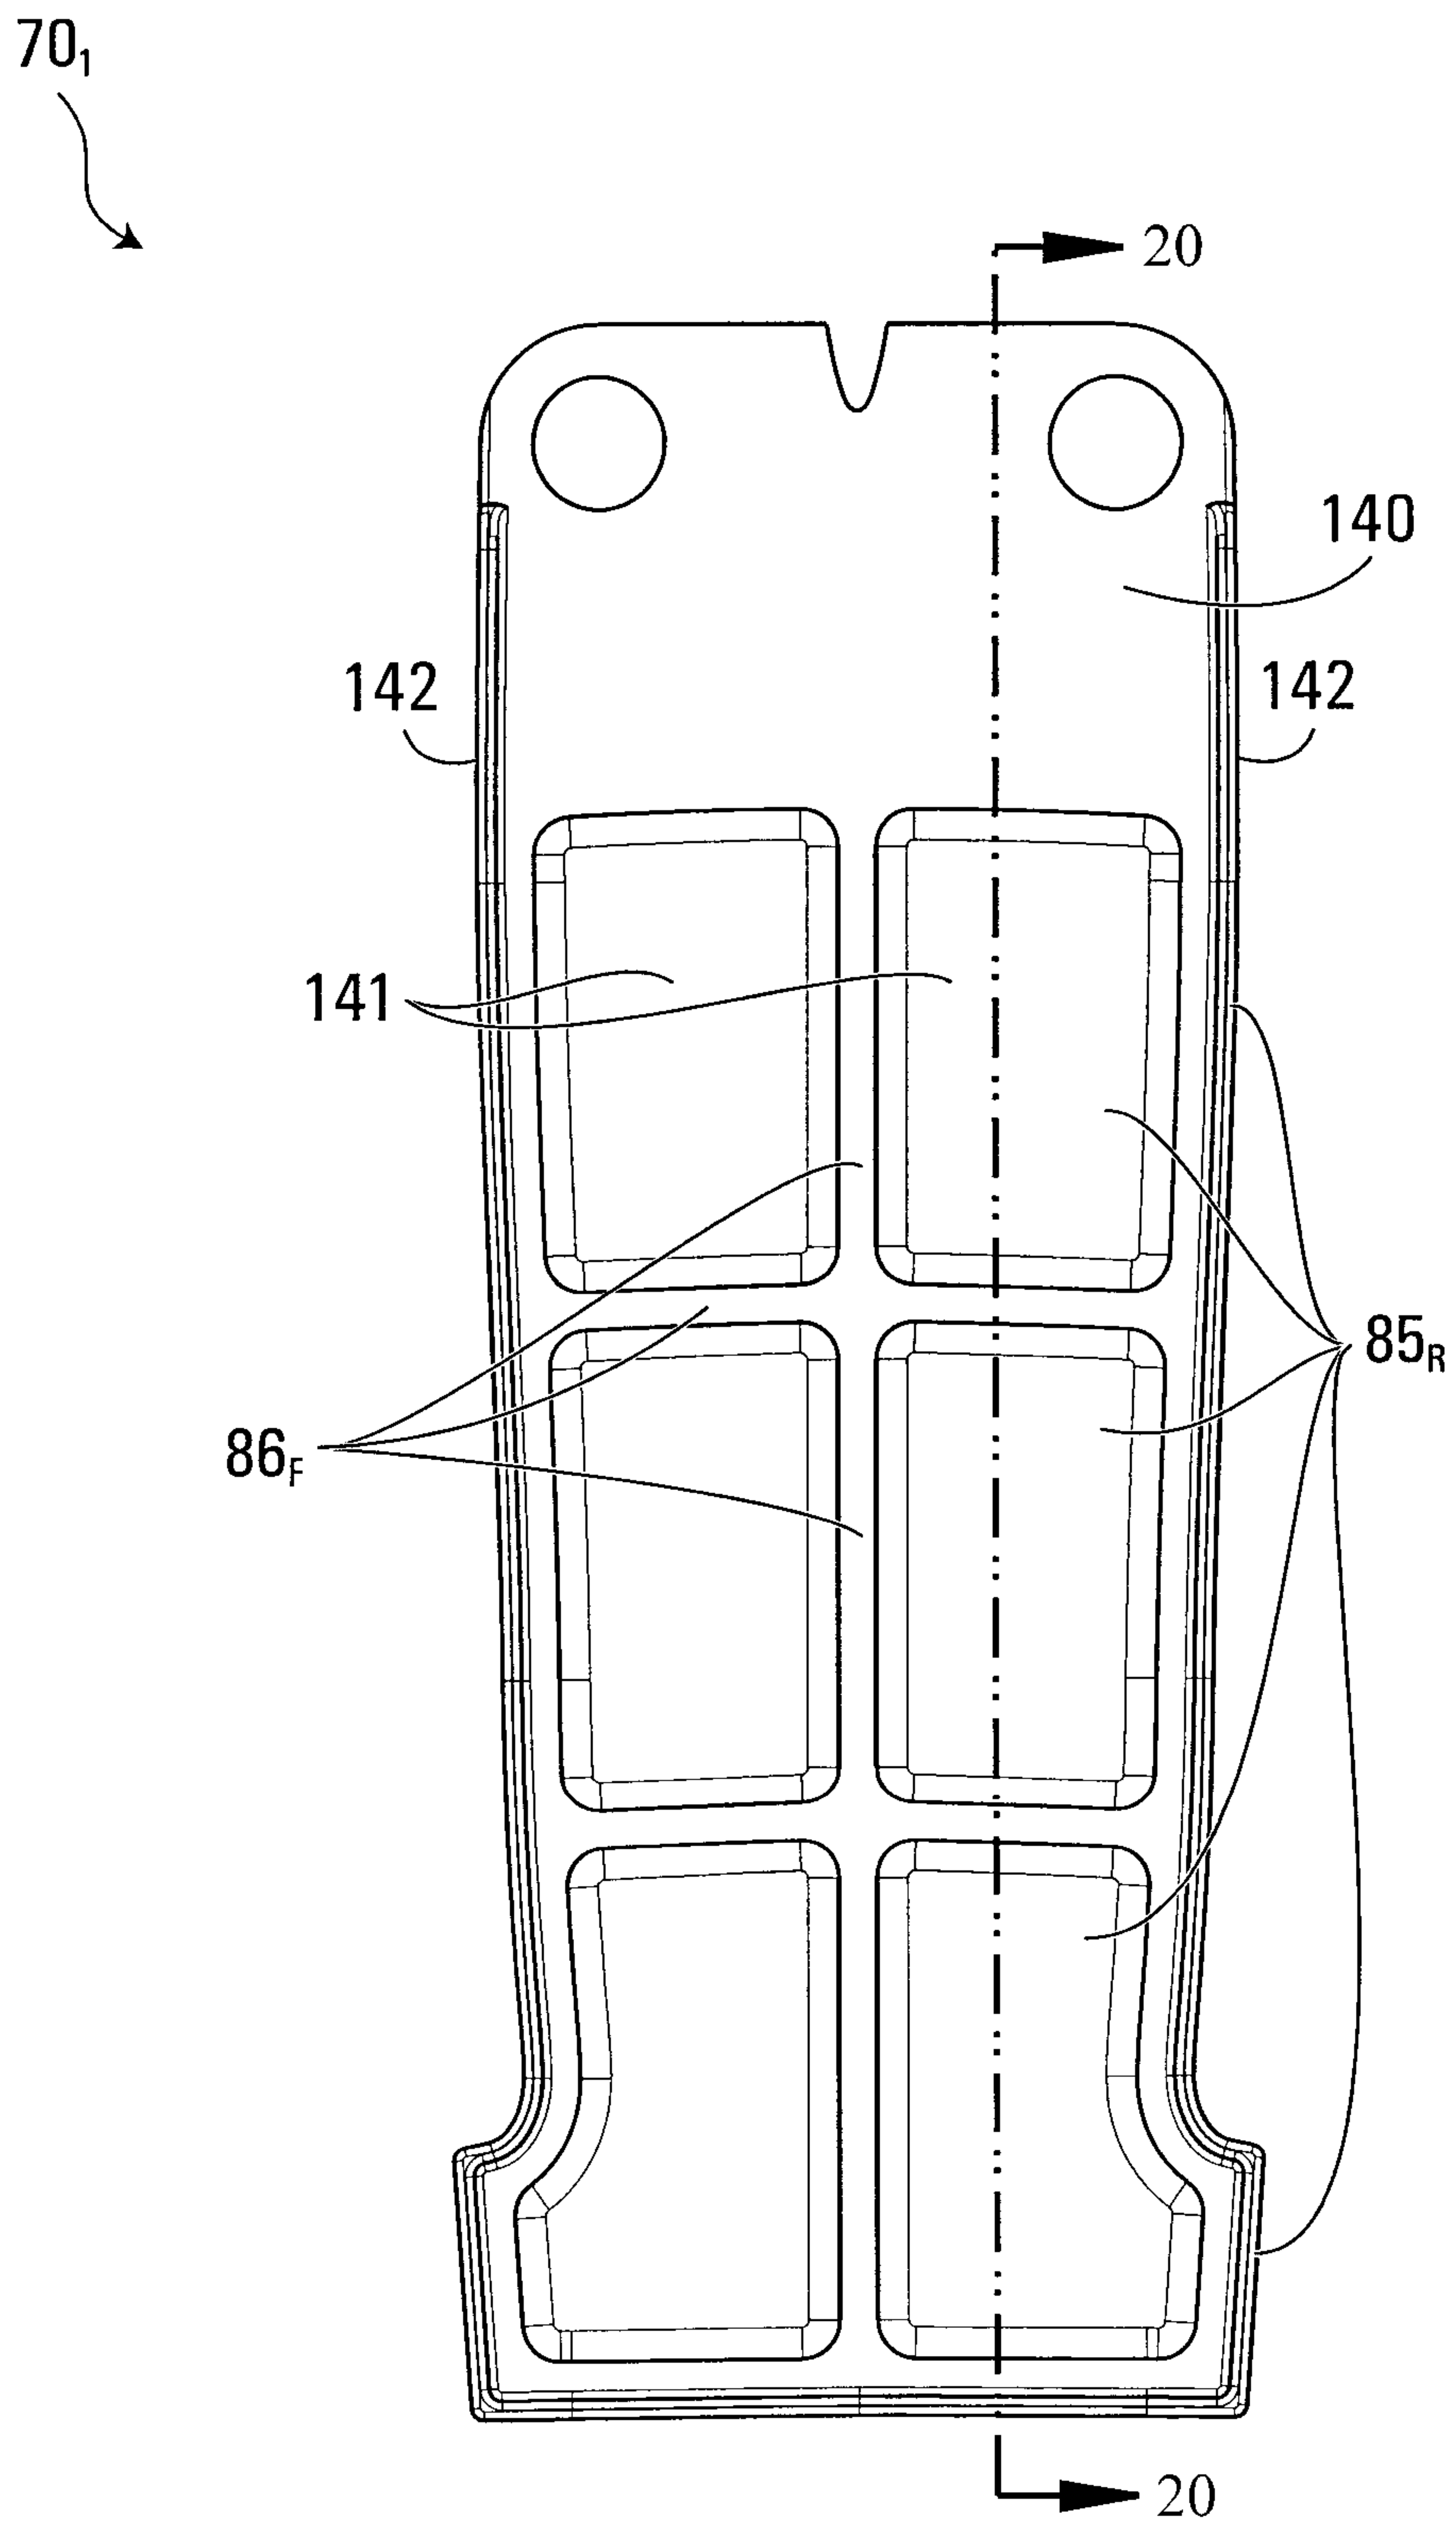
12/40

**FIG. 16**

13/40

**FIG. 17**

14/40

**FIG. 18**

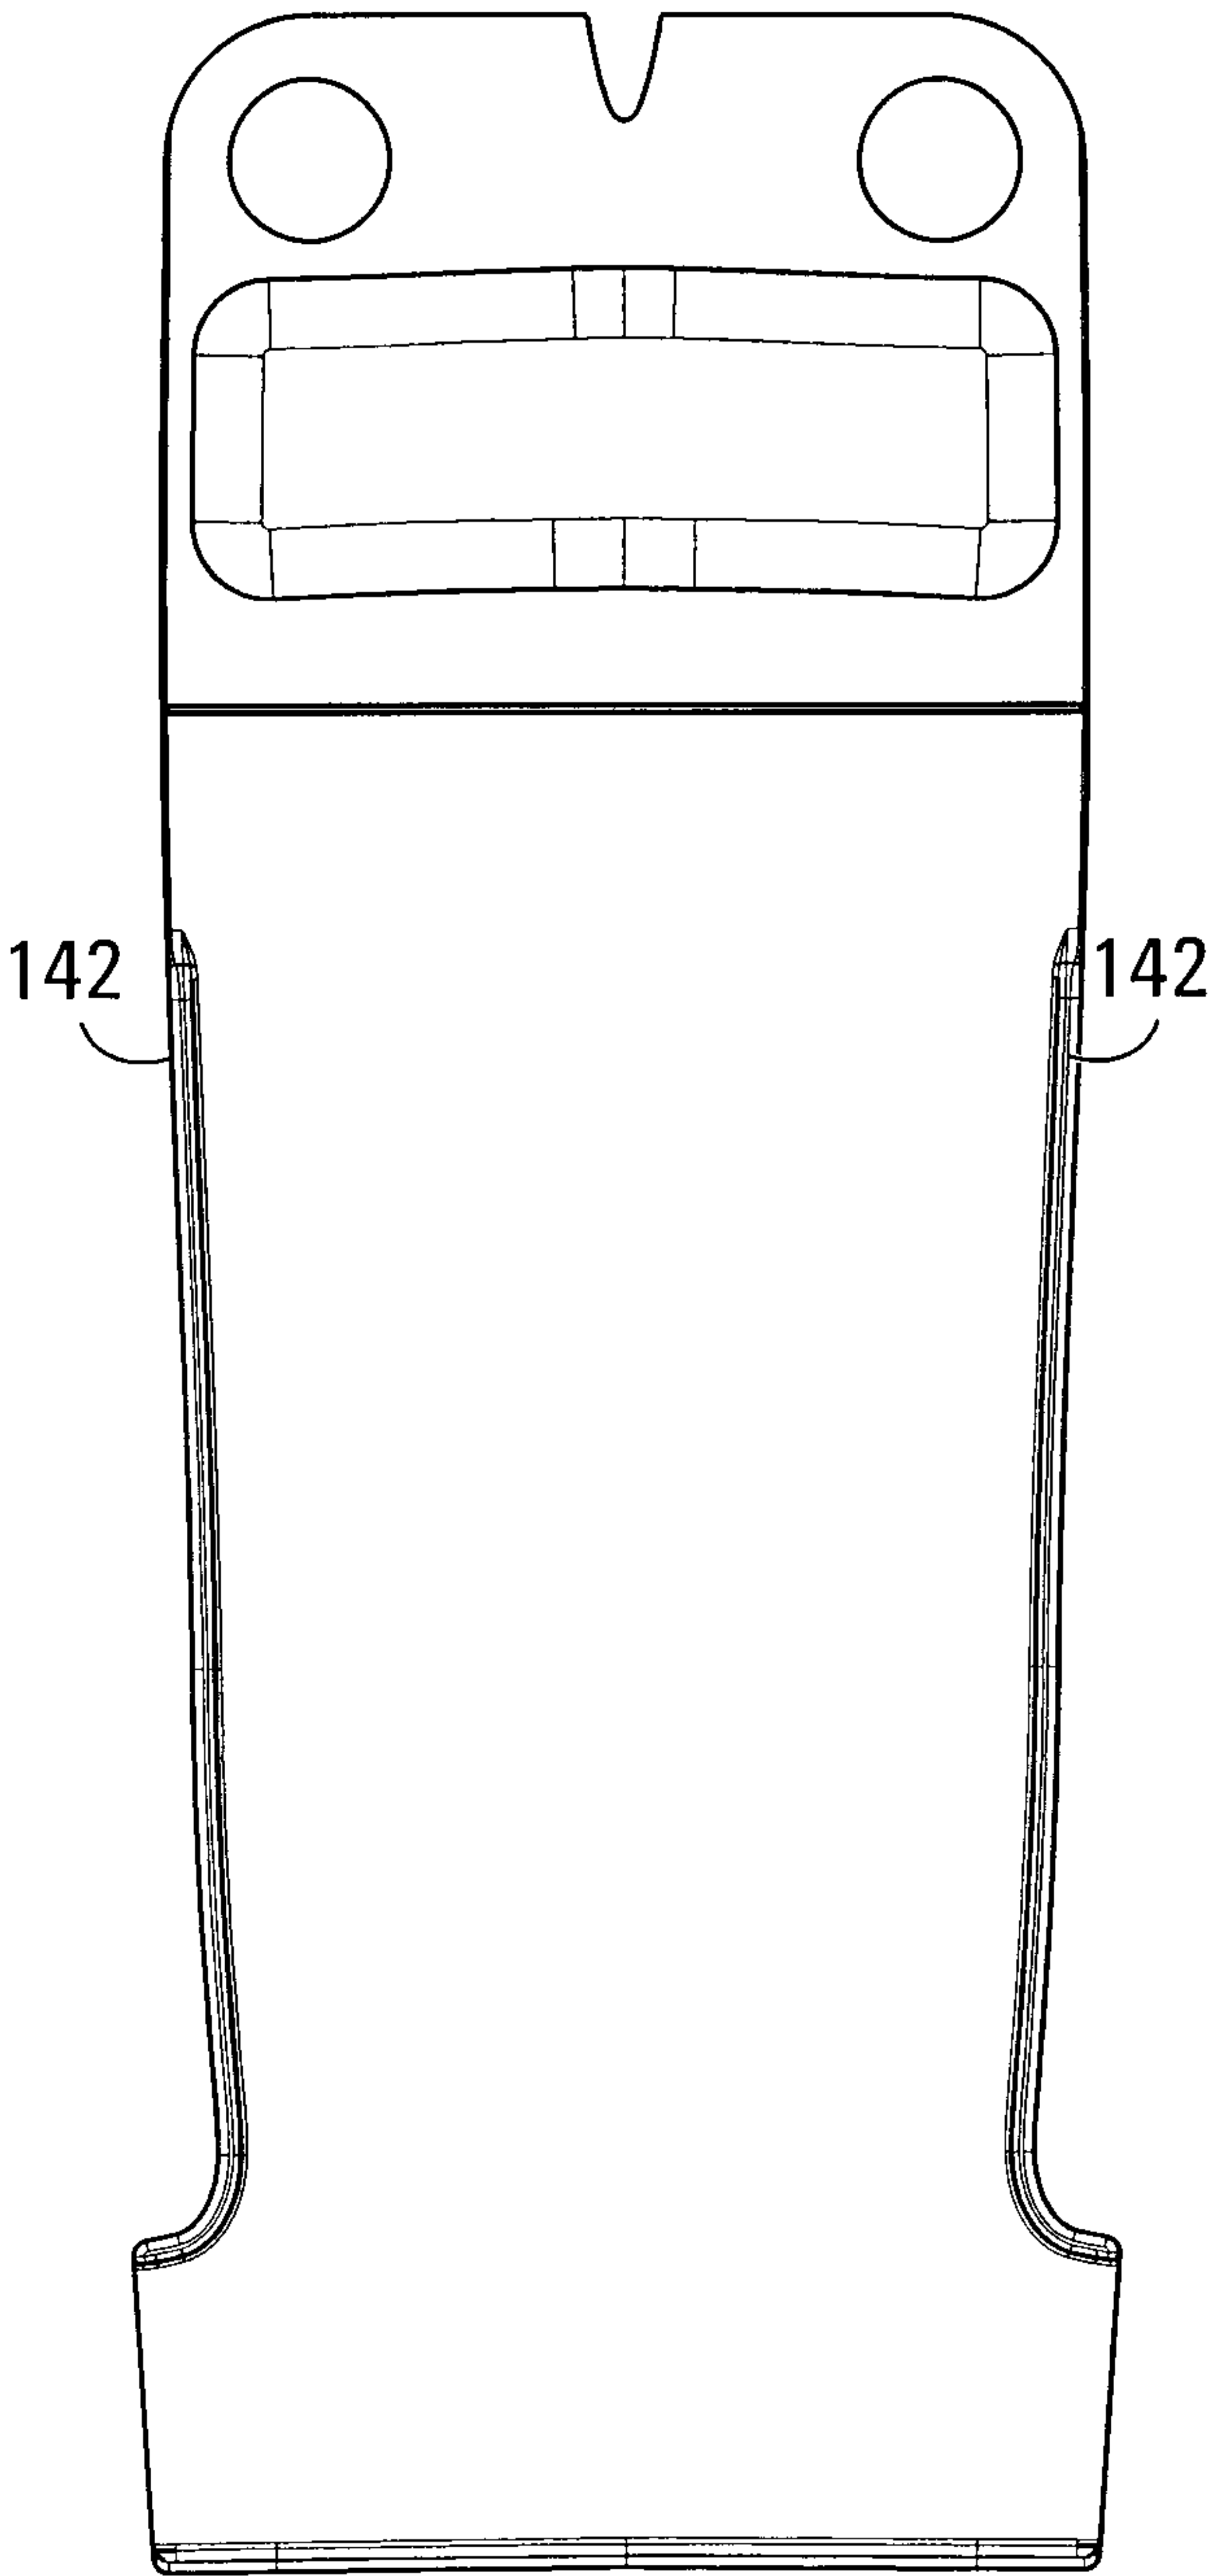


FIG. 19

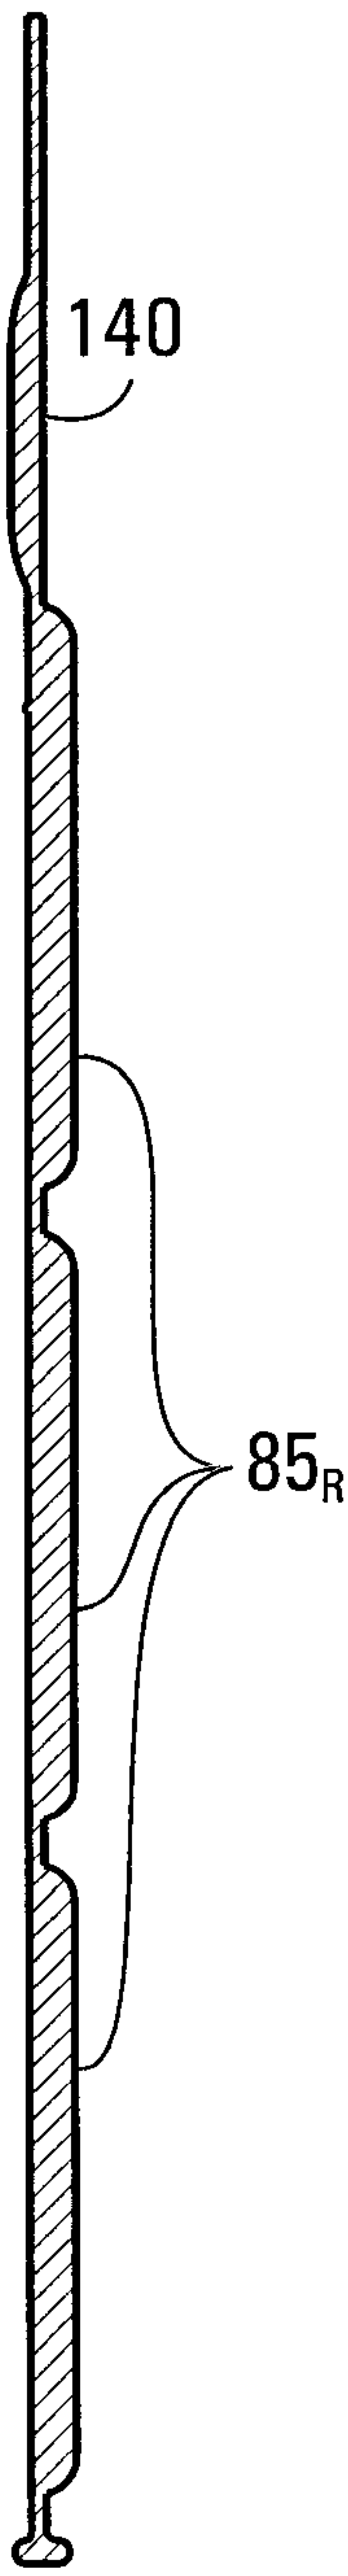


FIG. 20

16/40

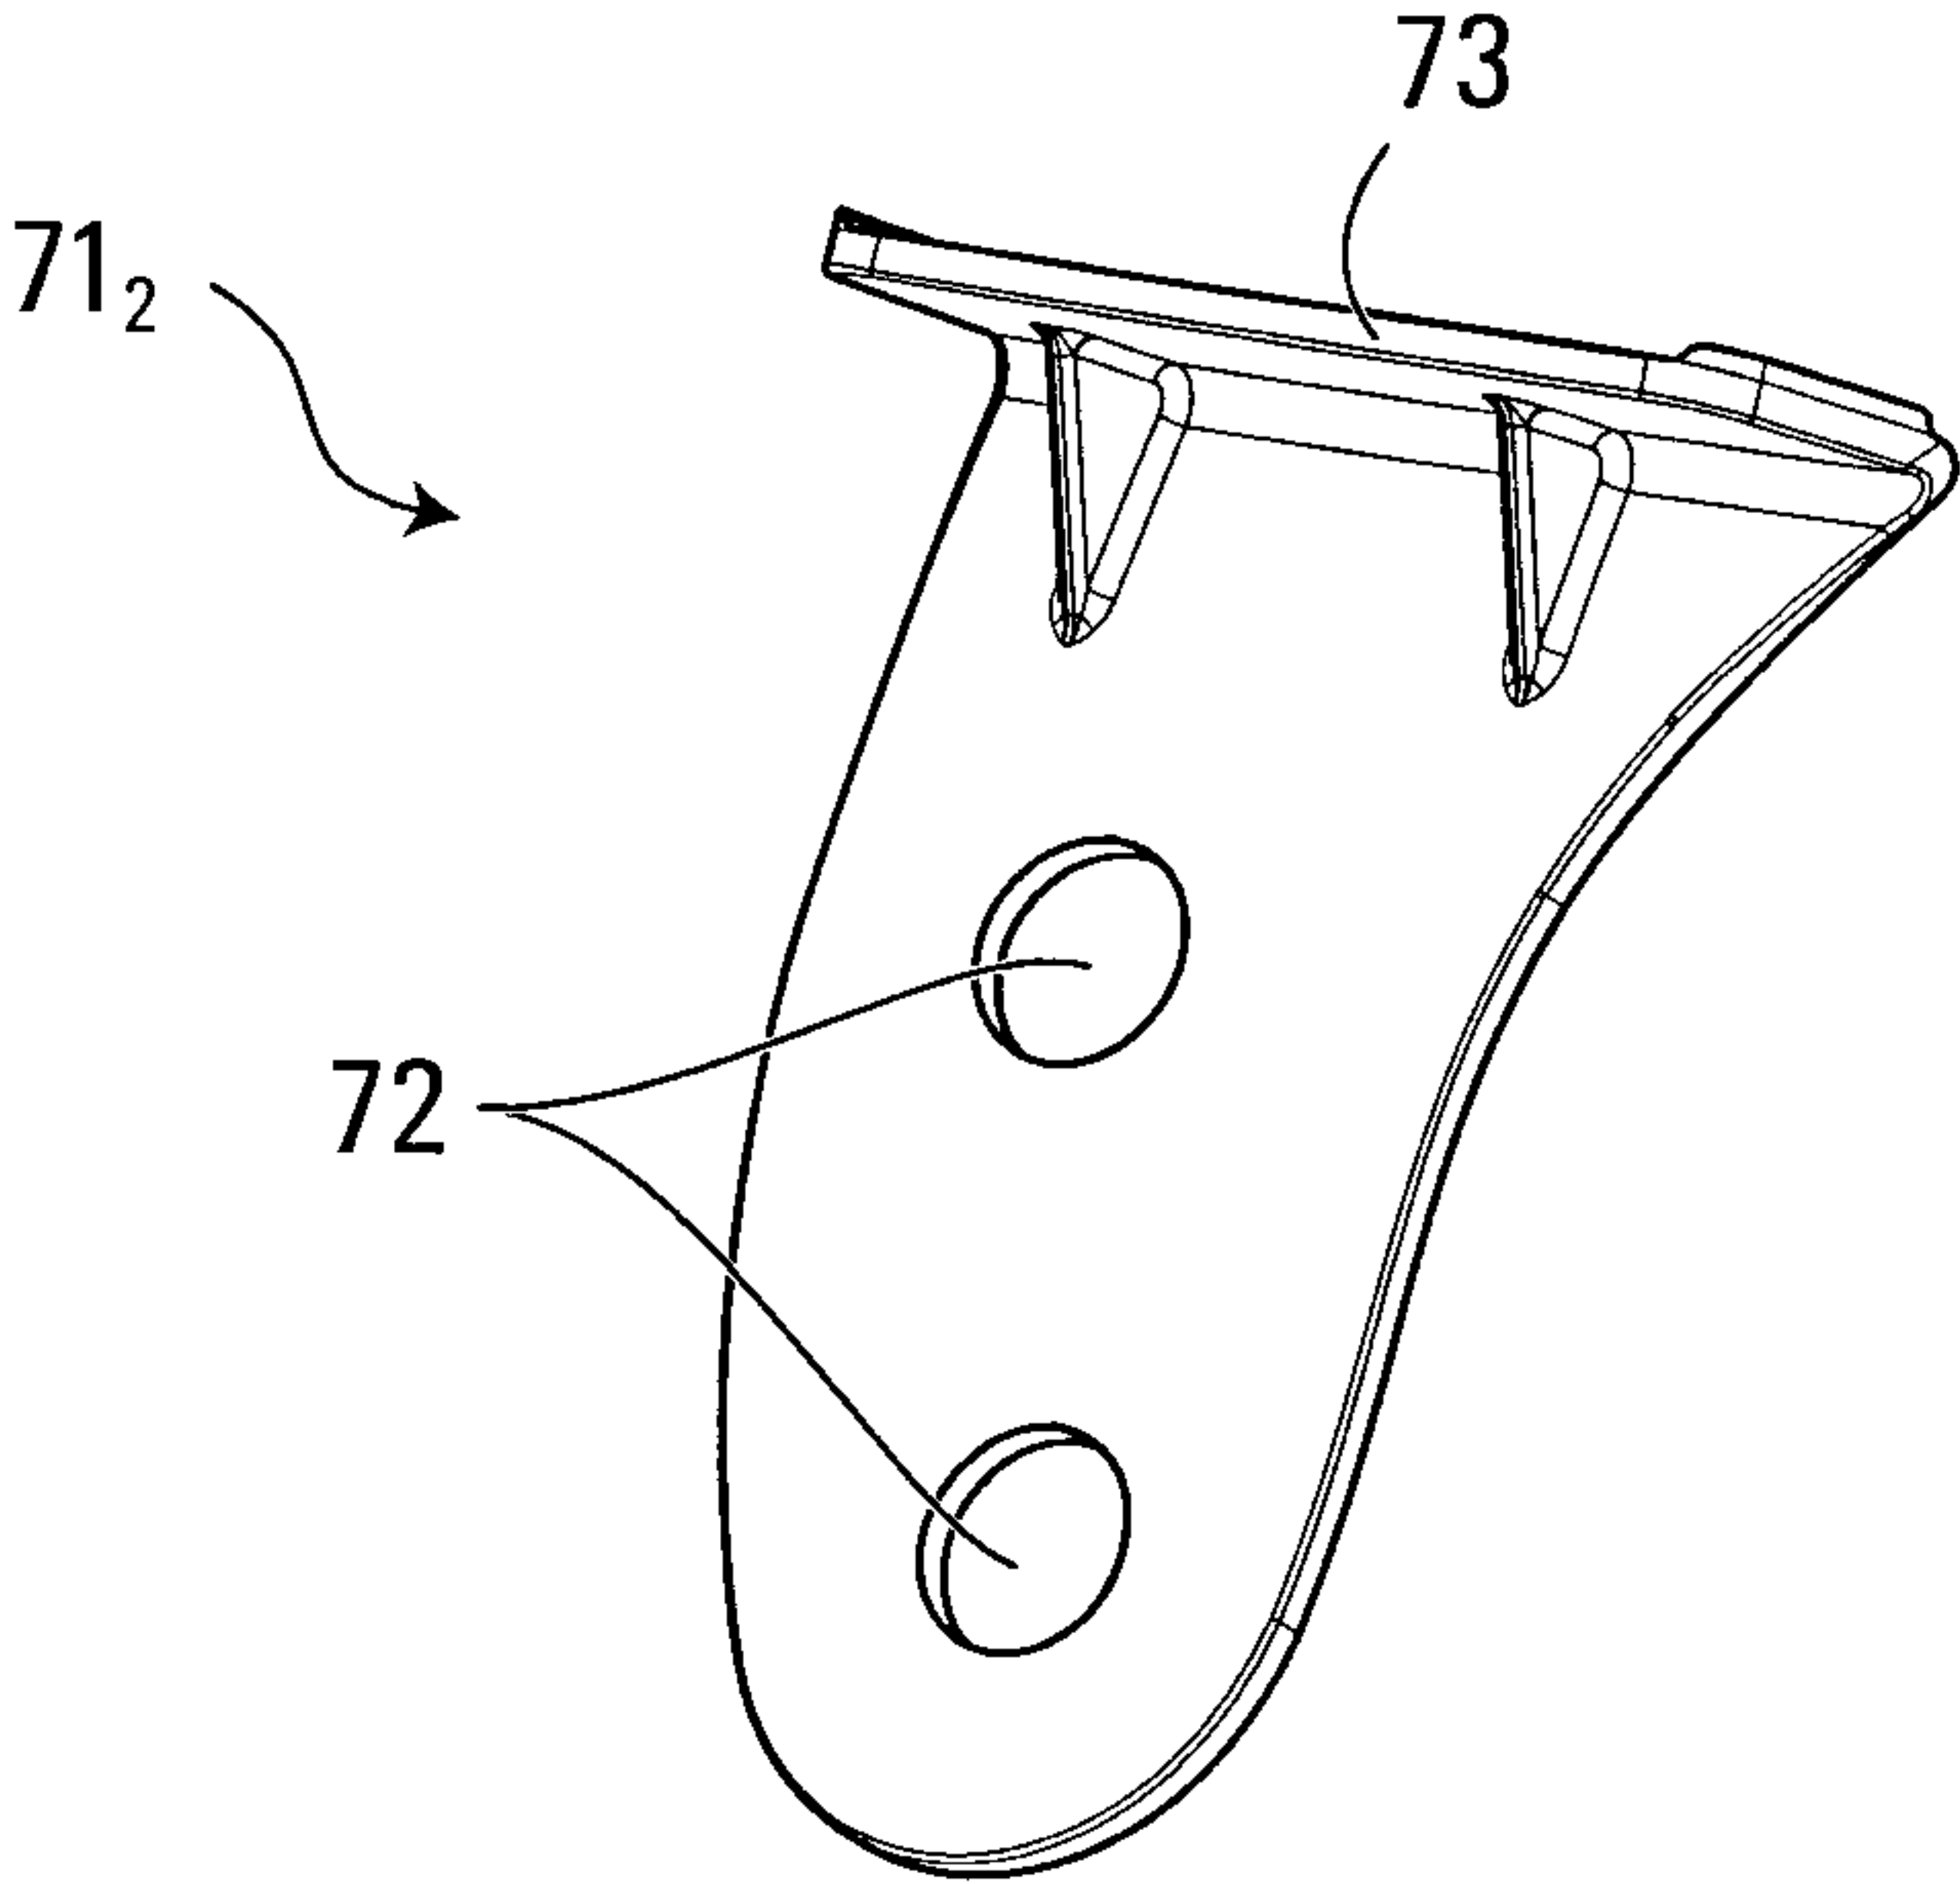


FIG. 21

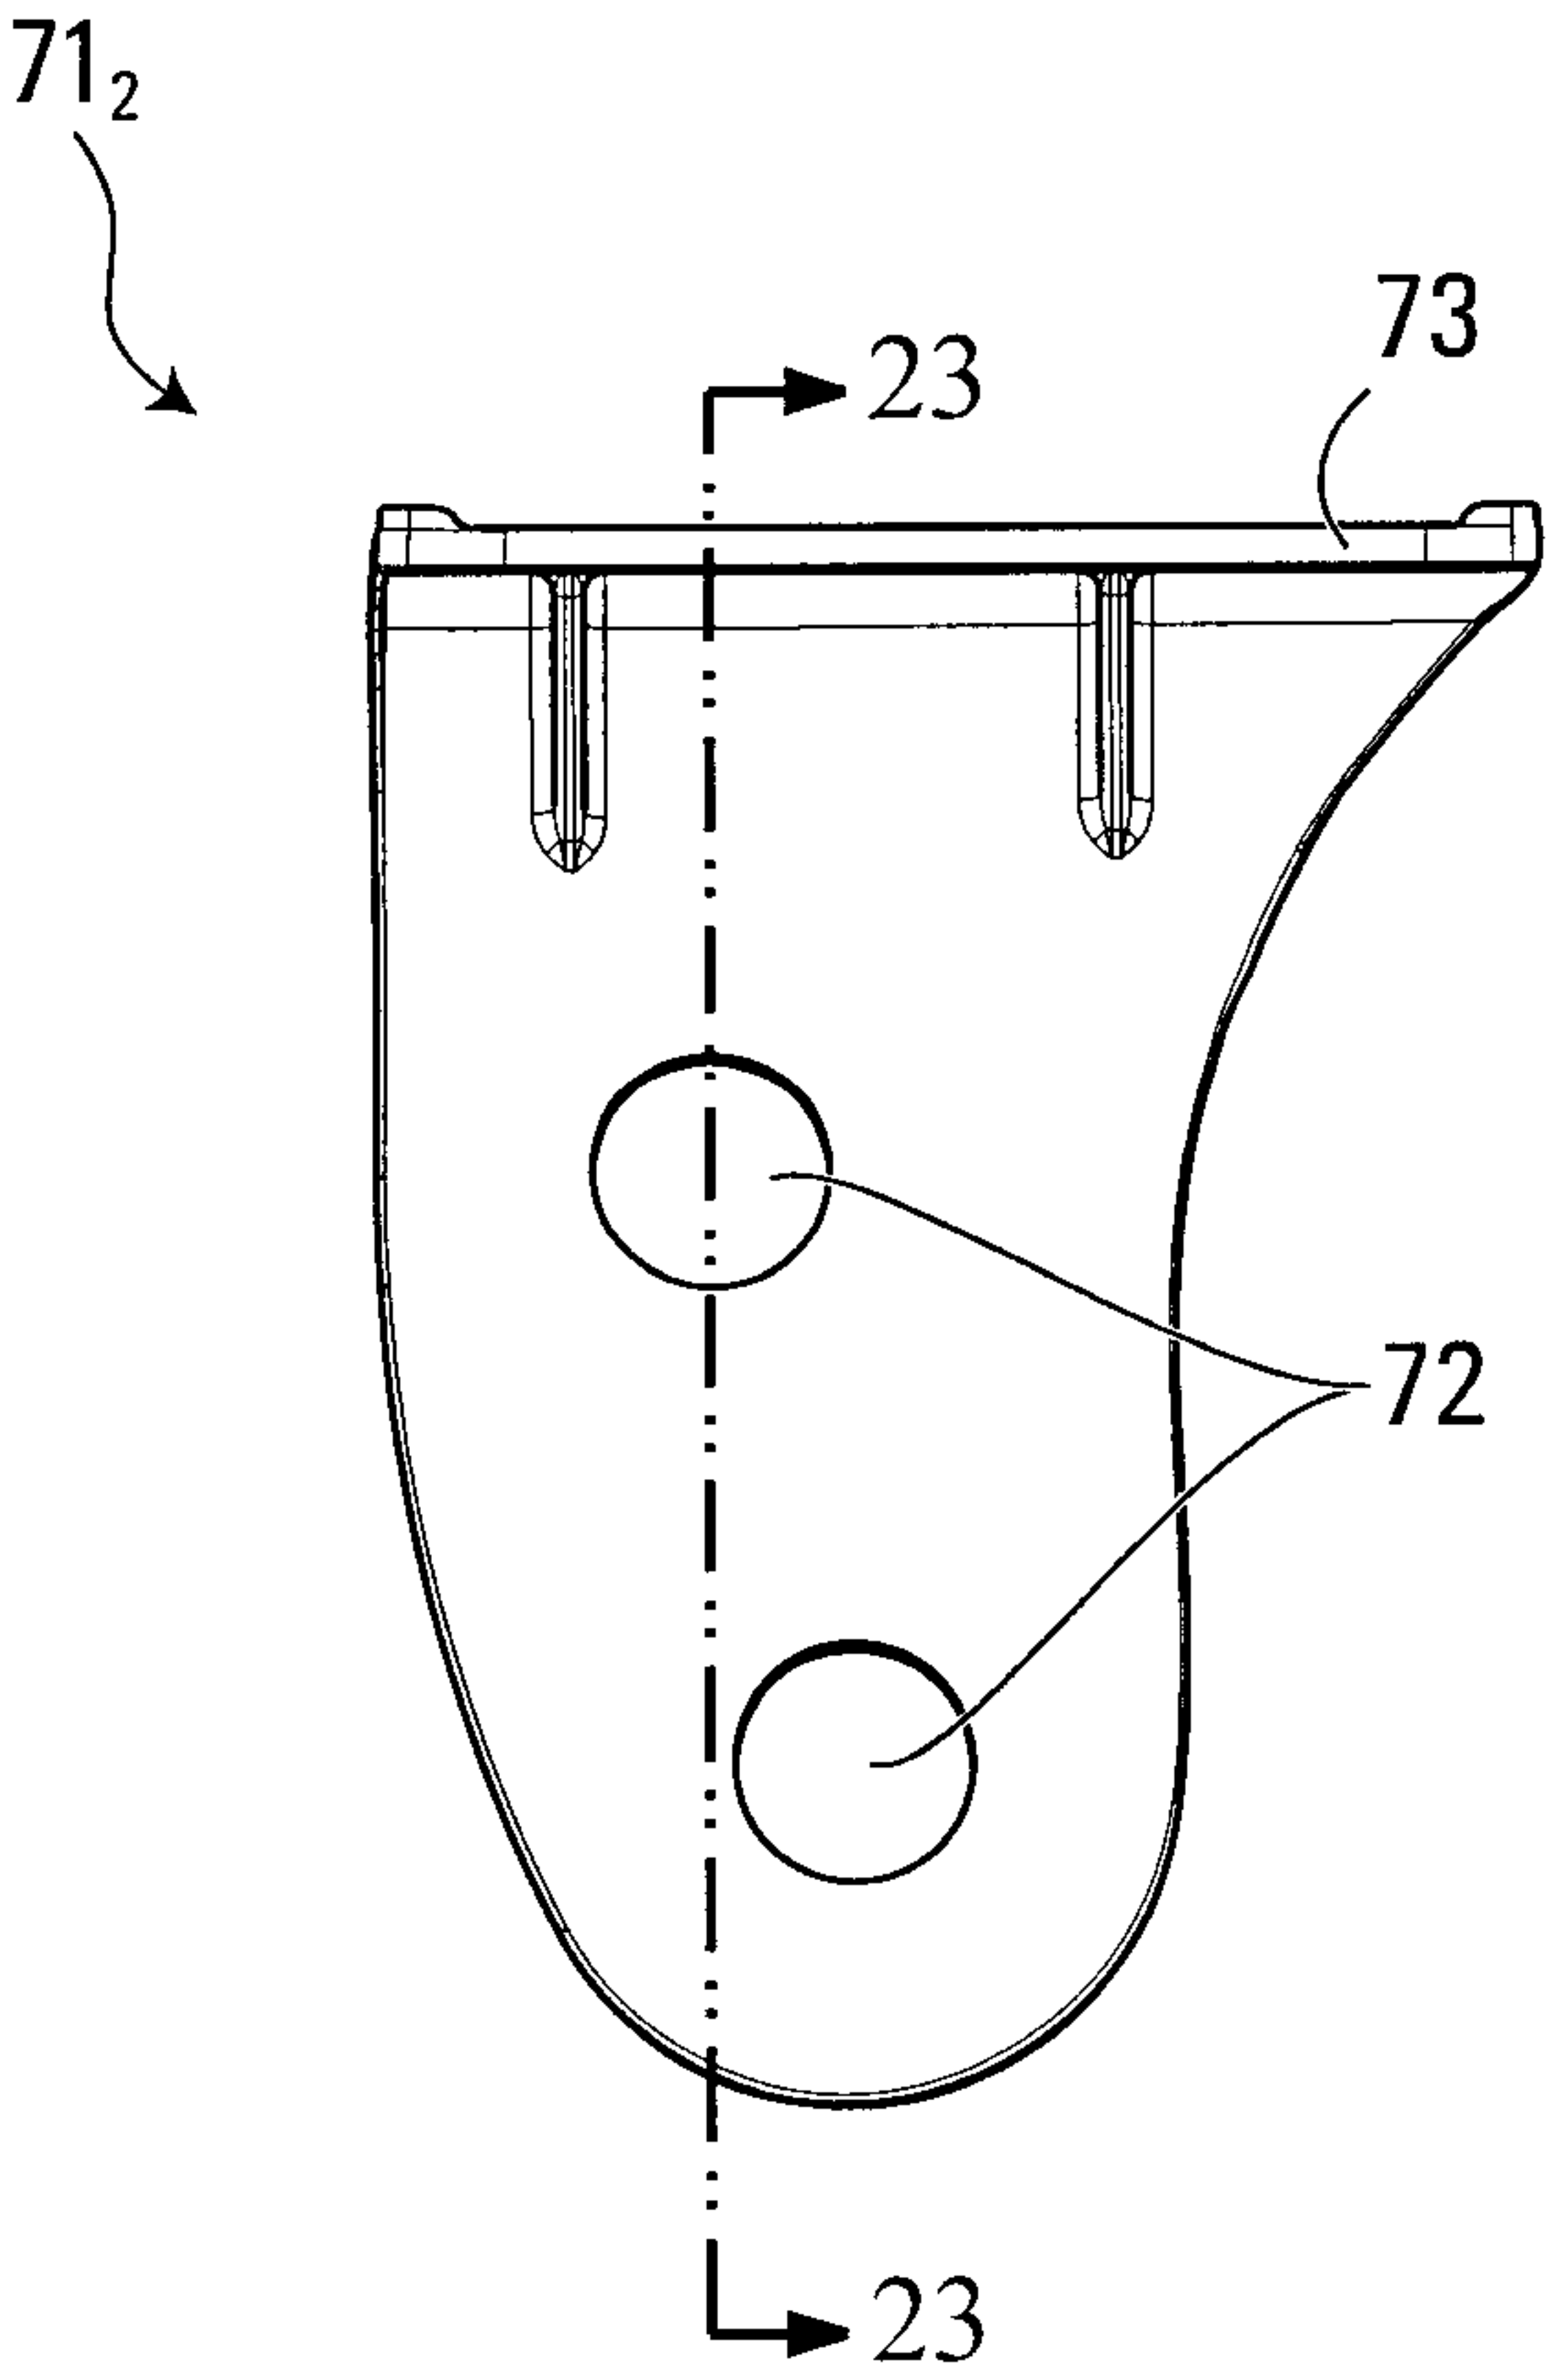


FIG. 22

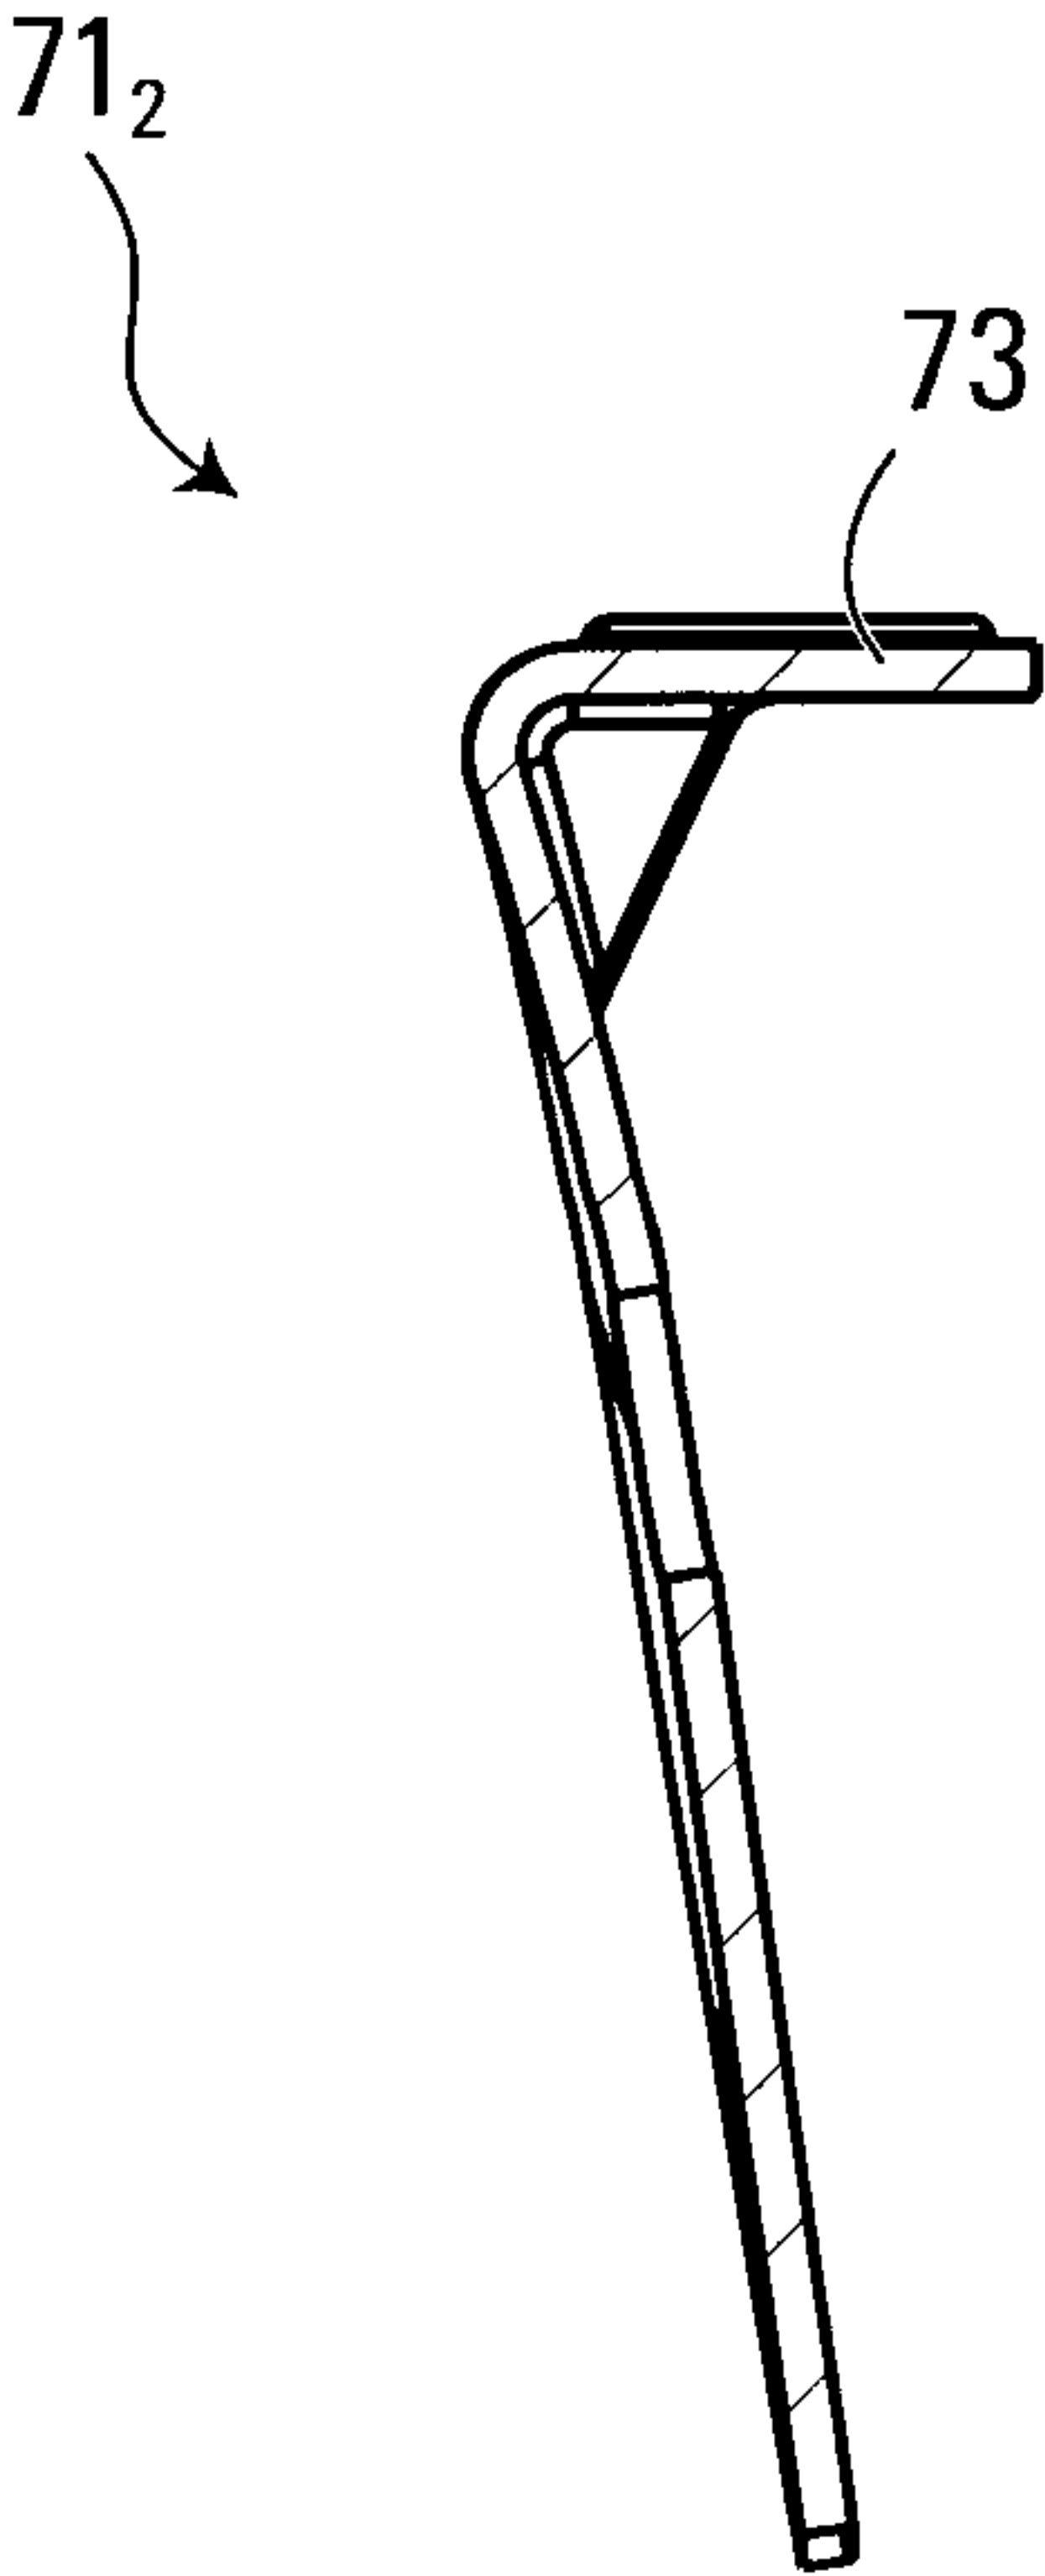


FIG. 23

17/40

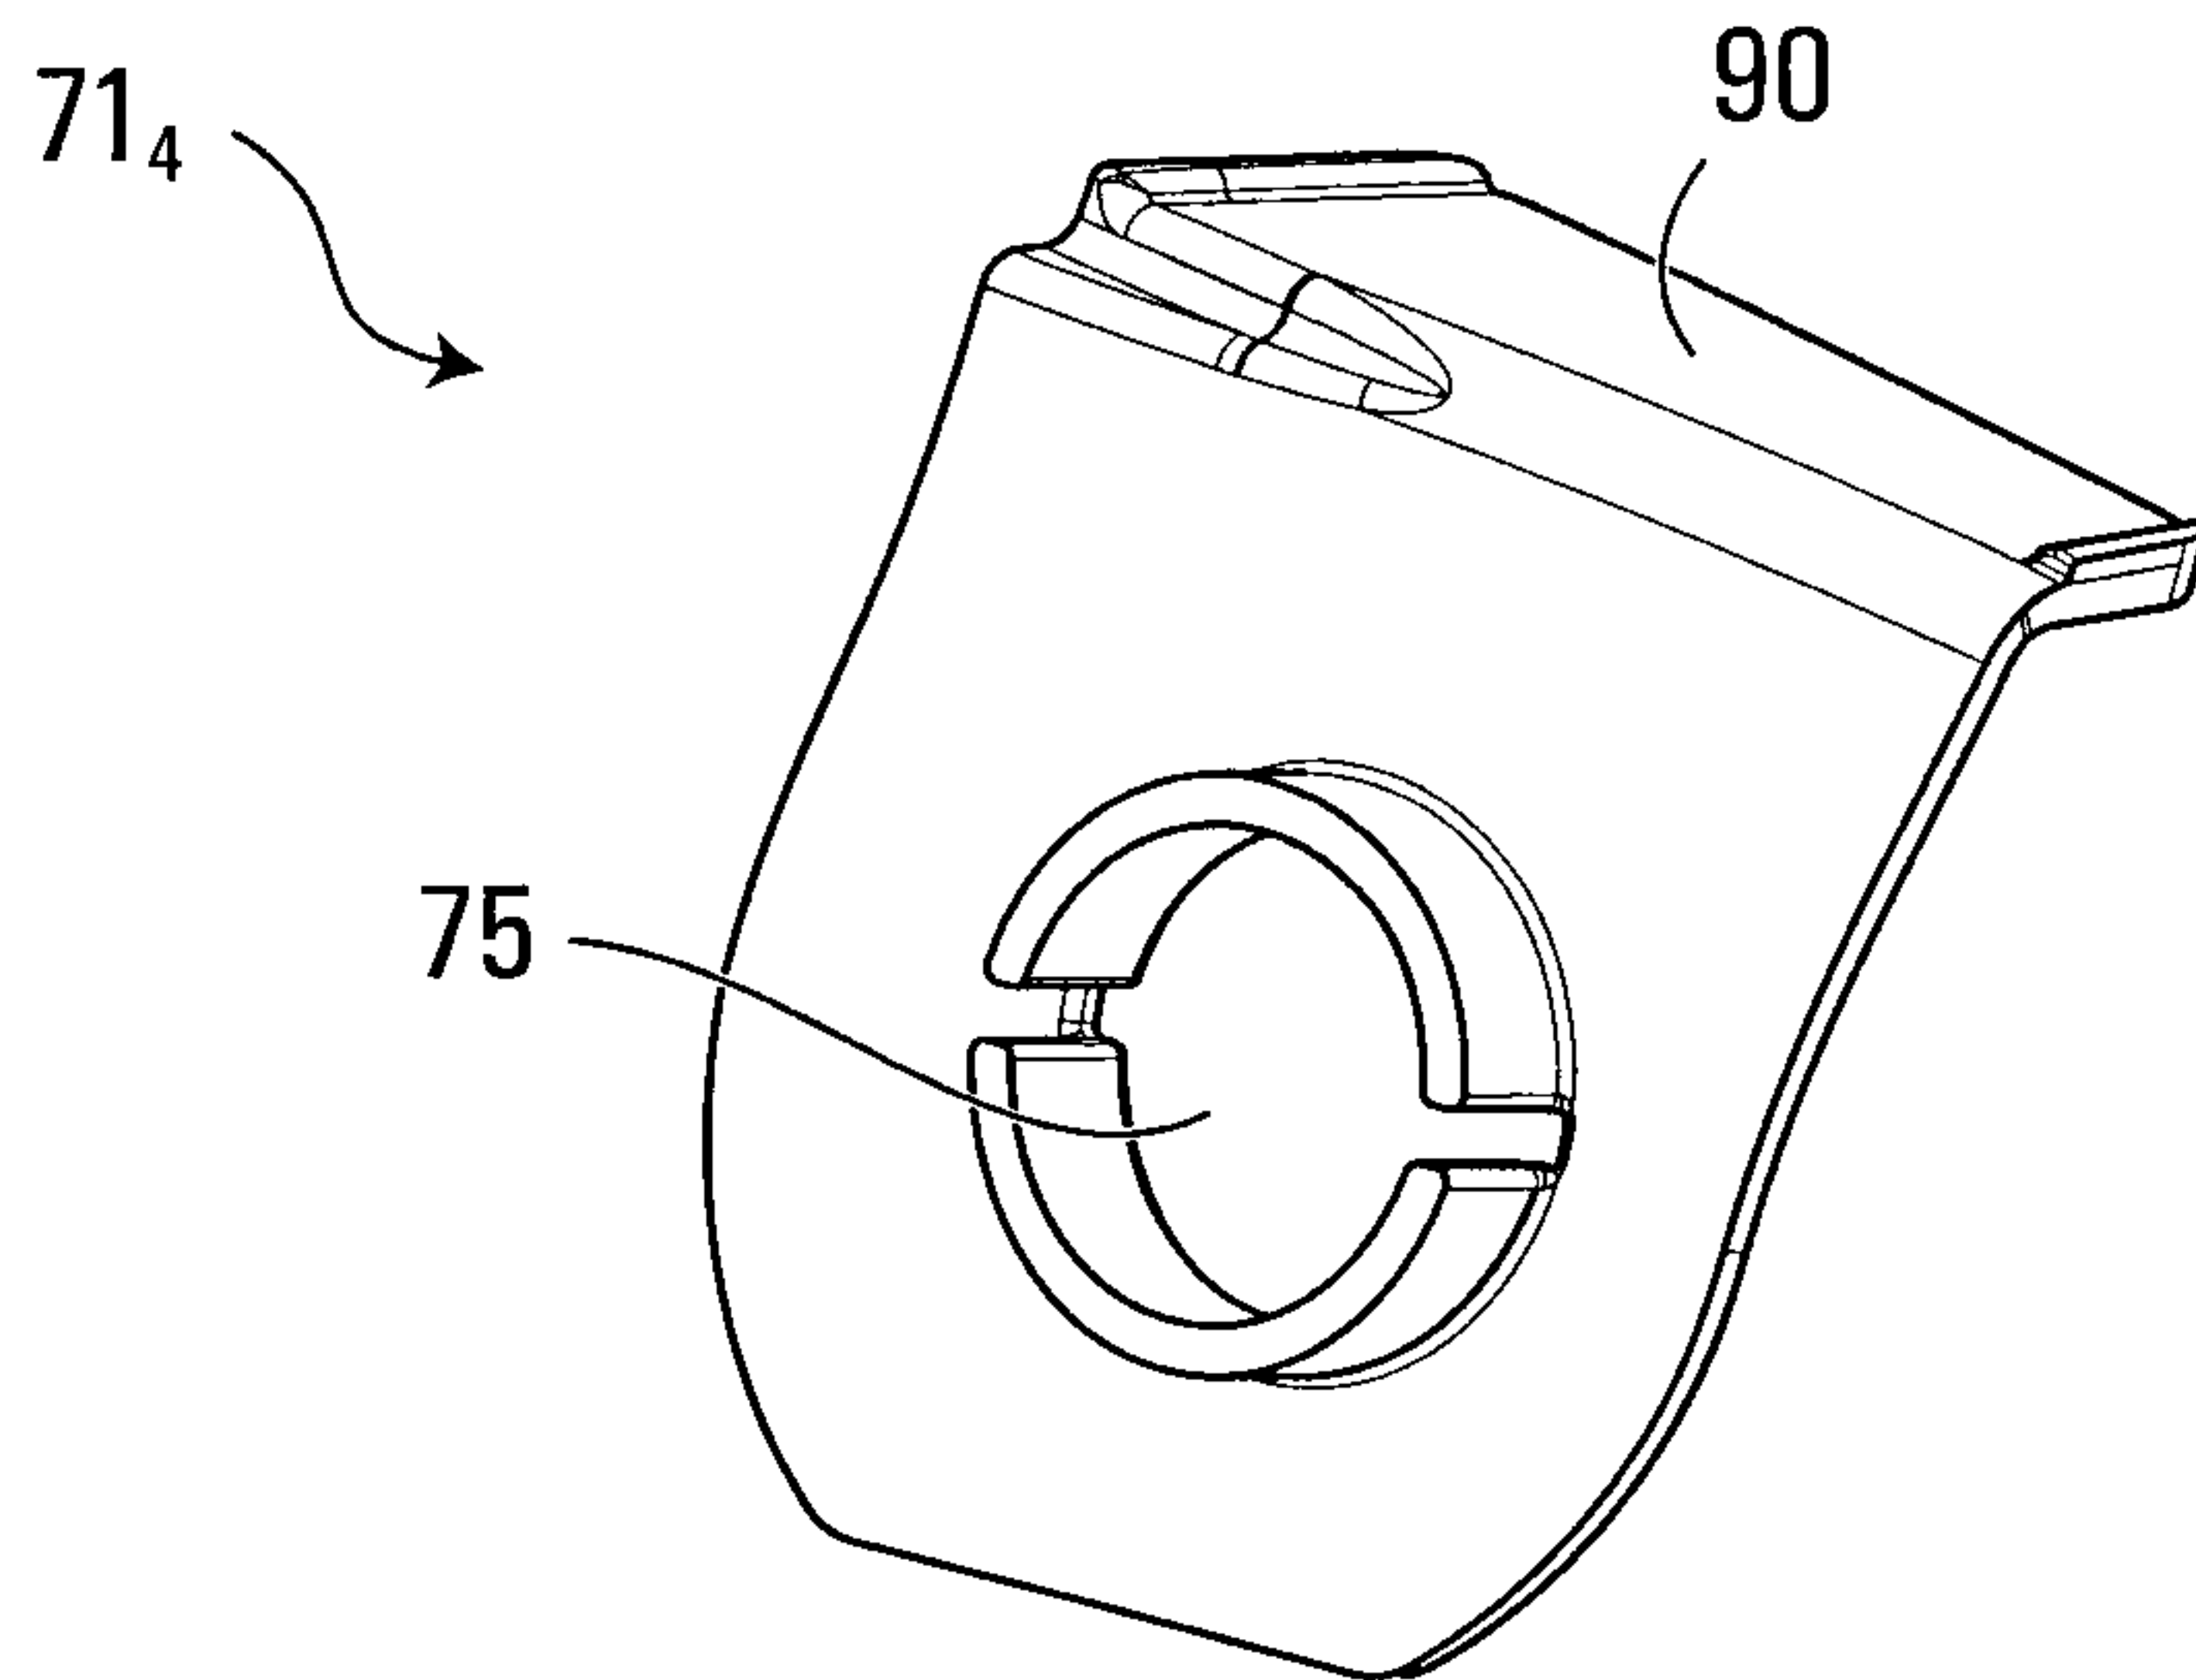


FIG. 24

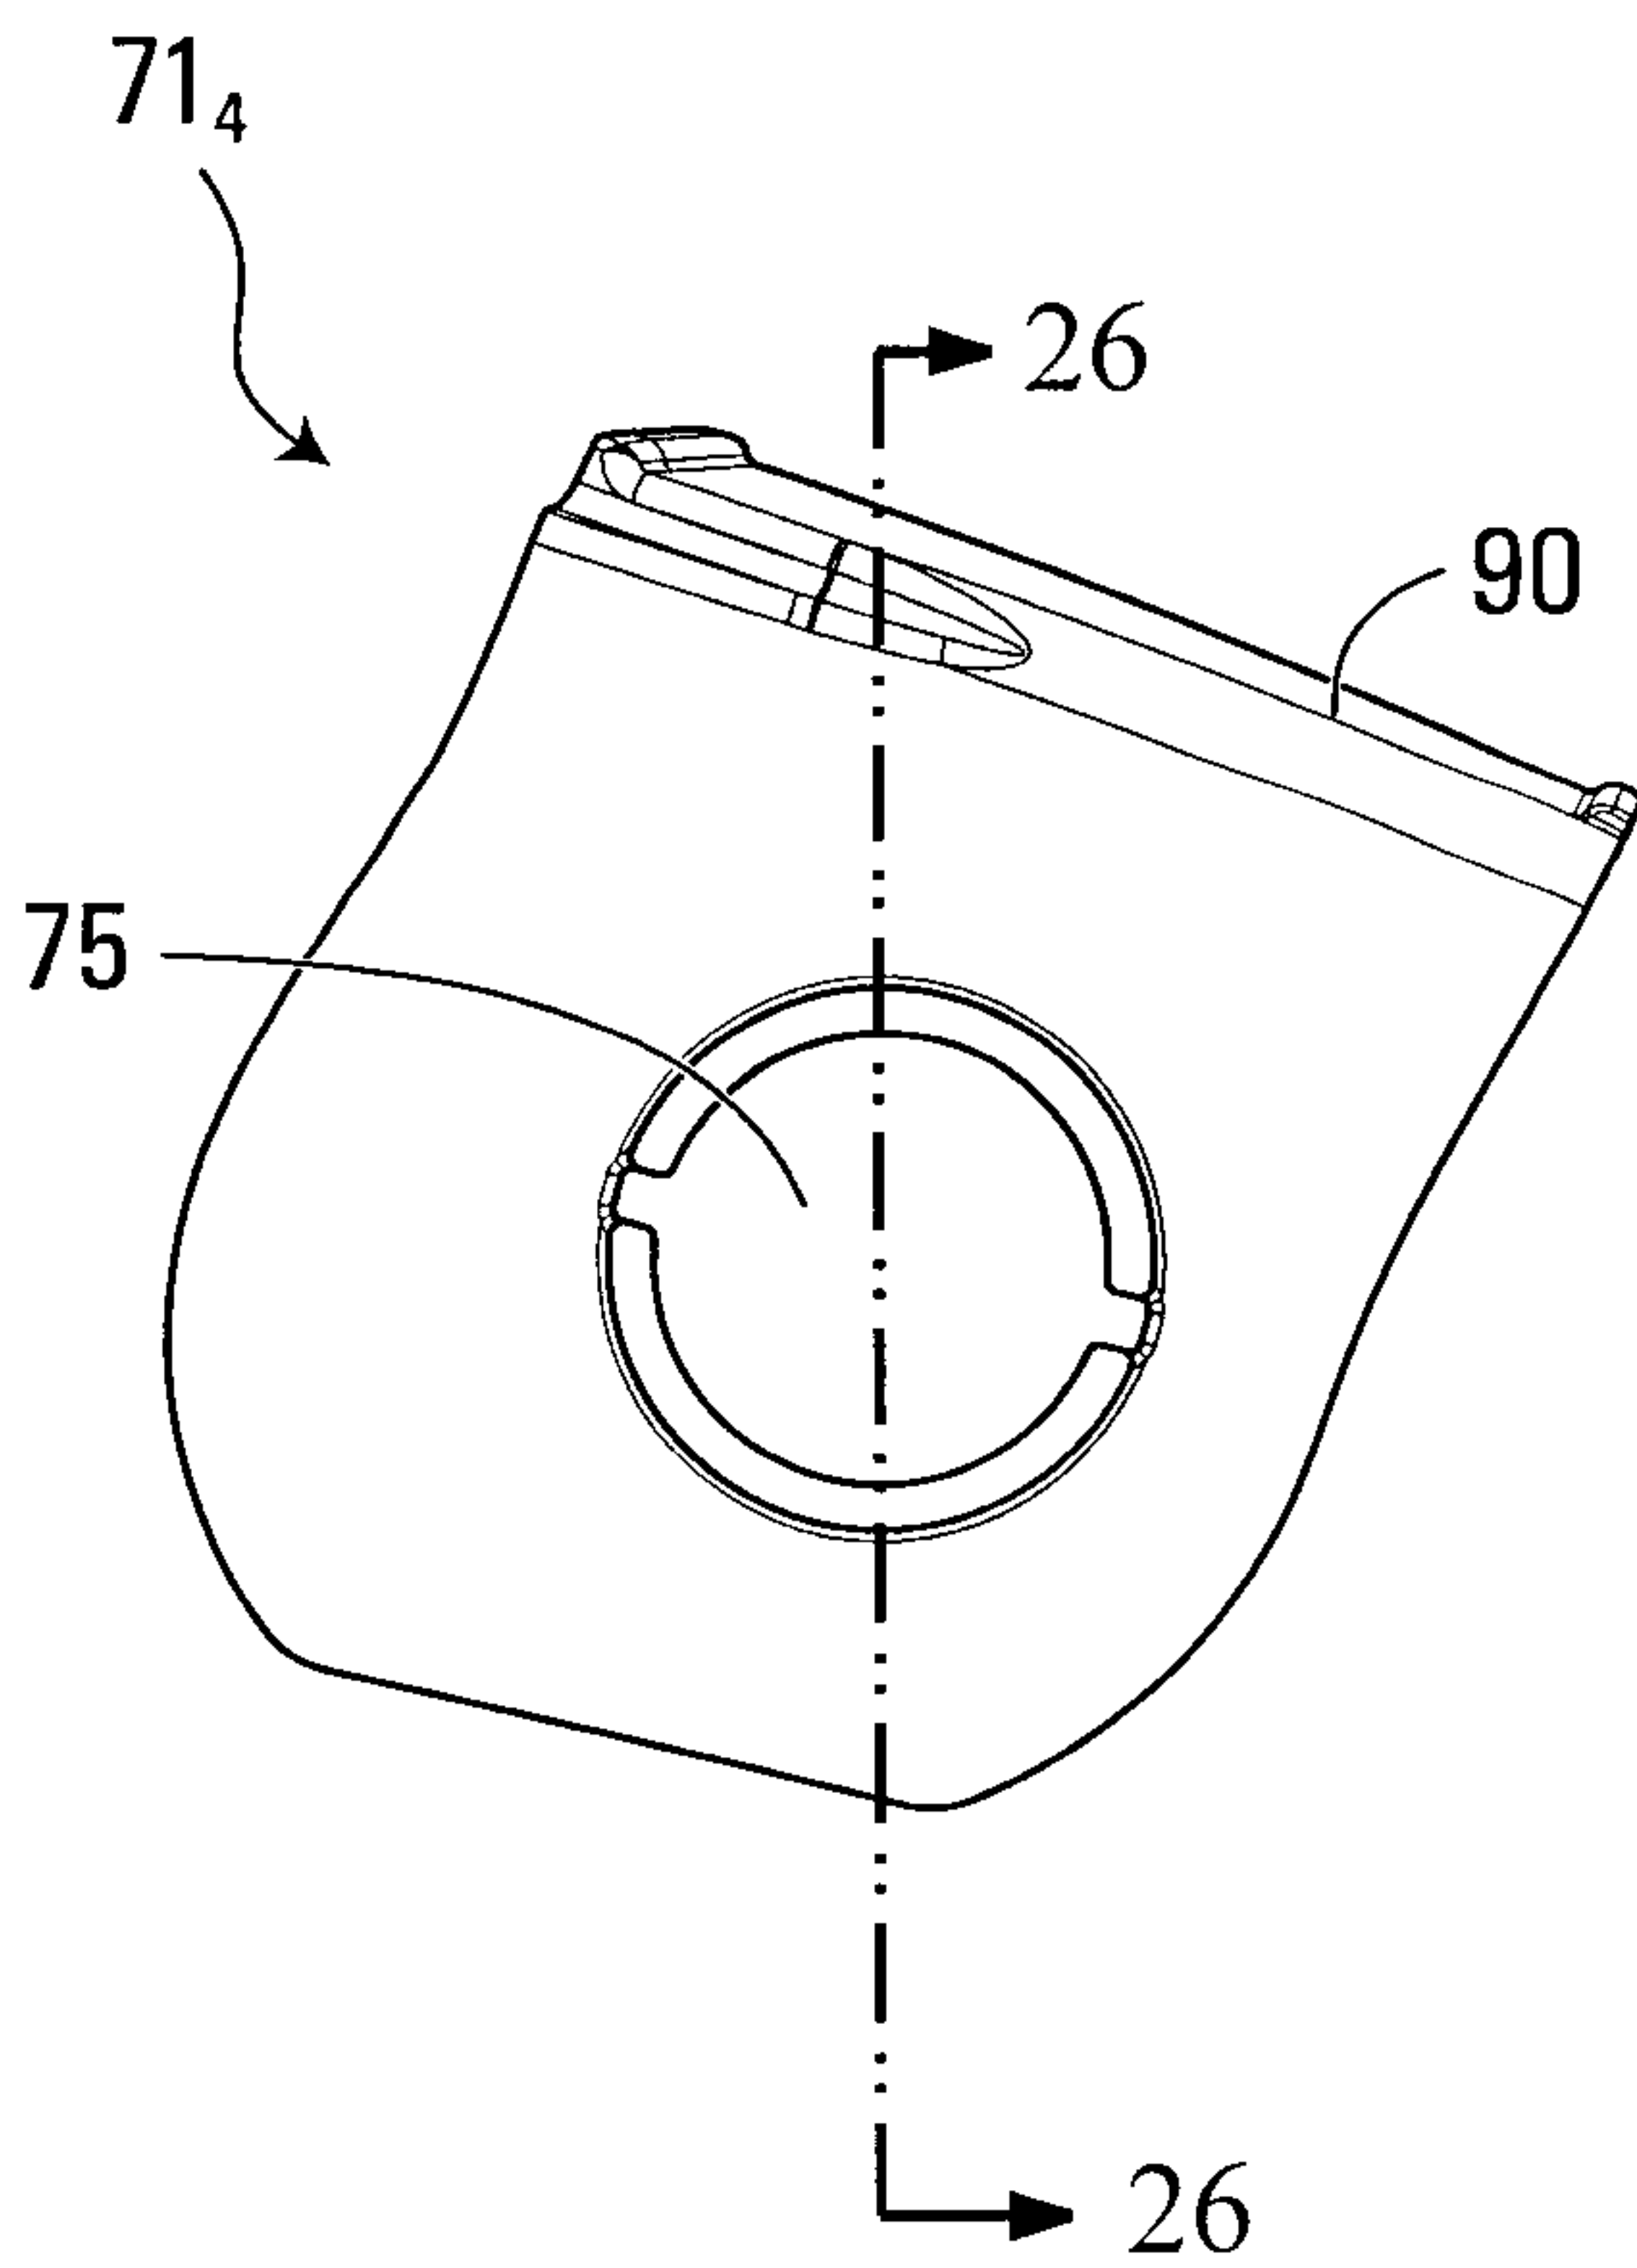


FIG. 25

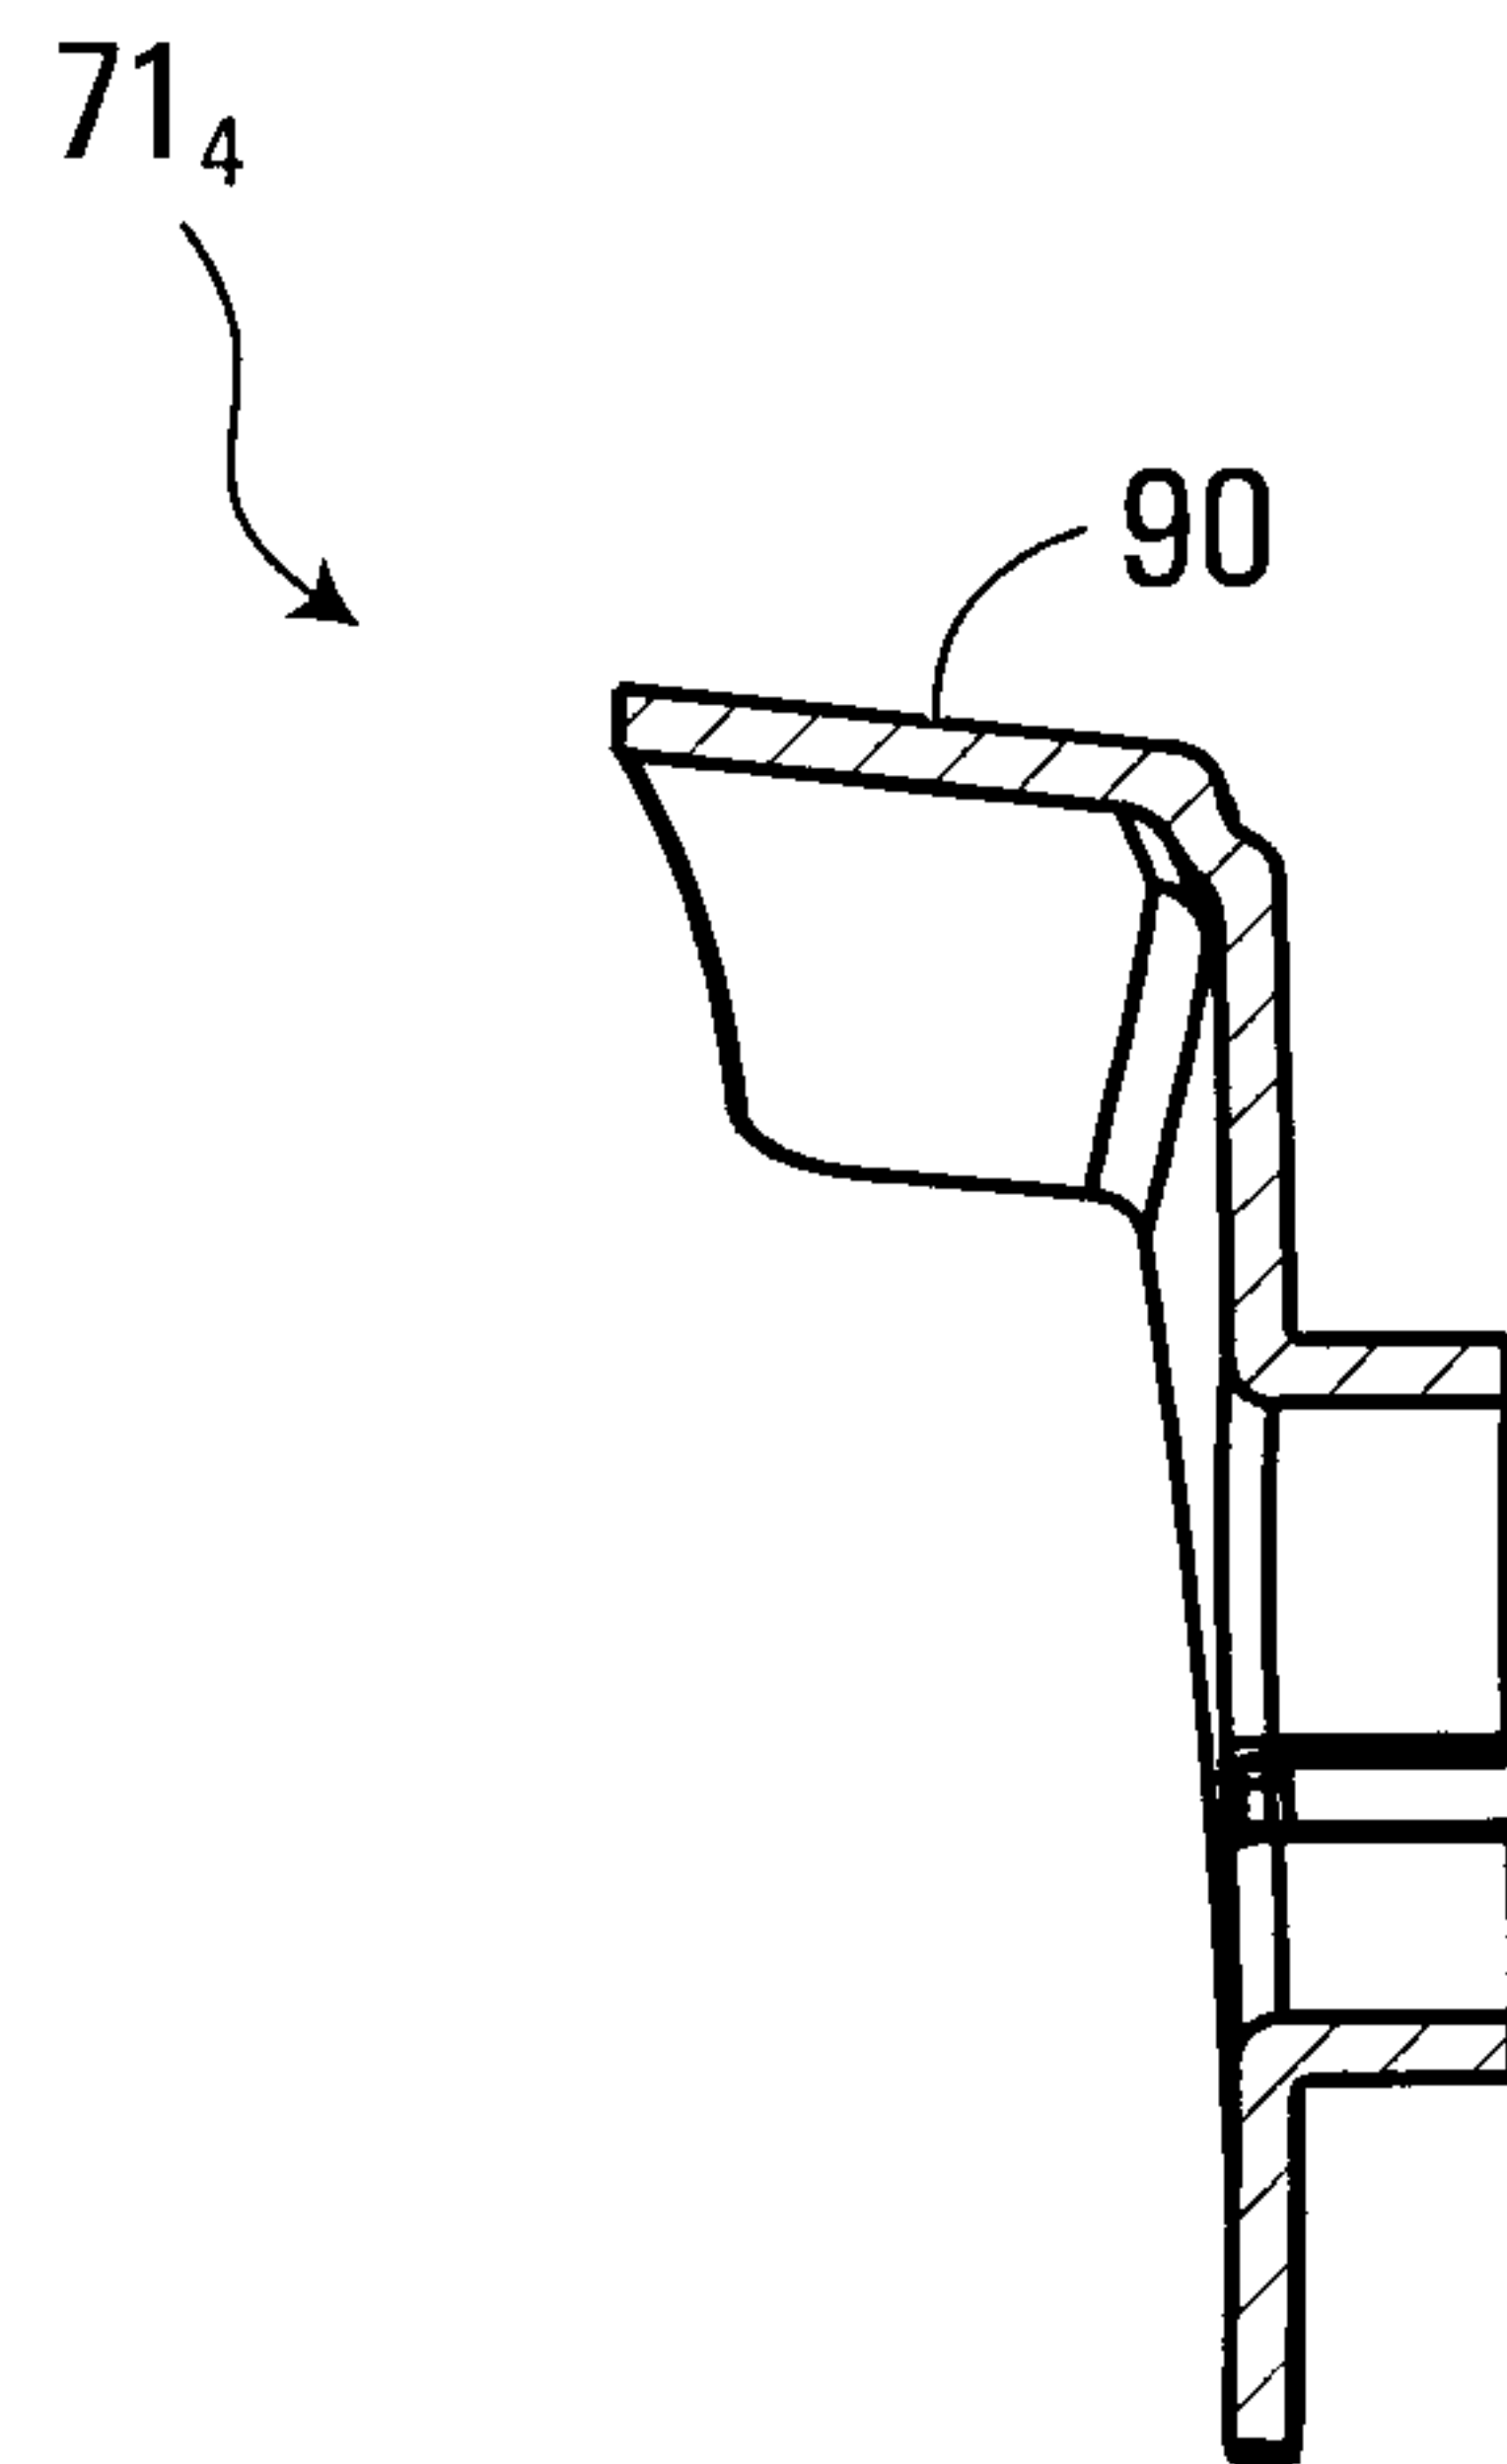
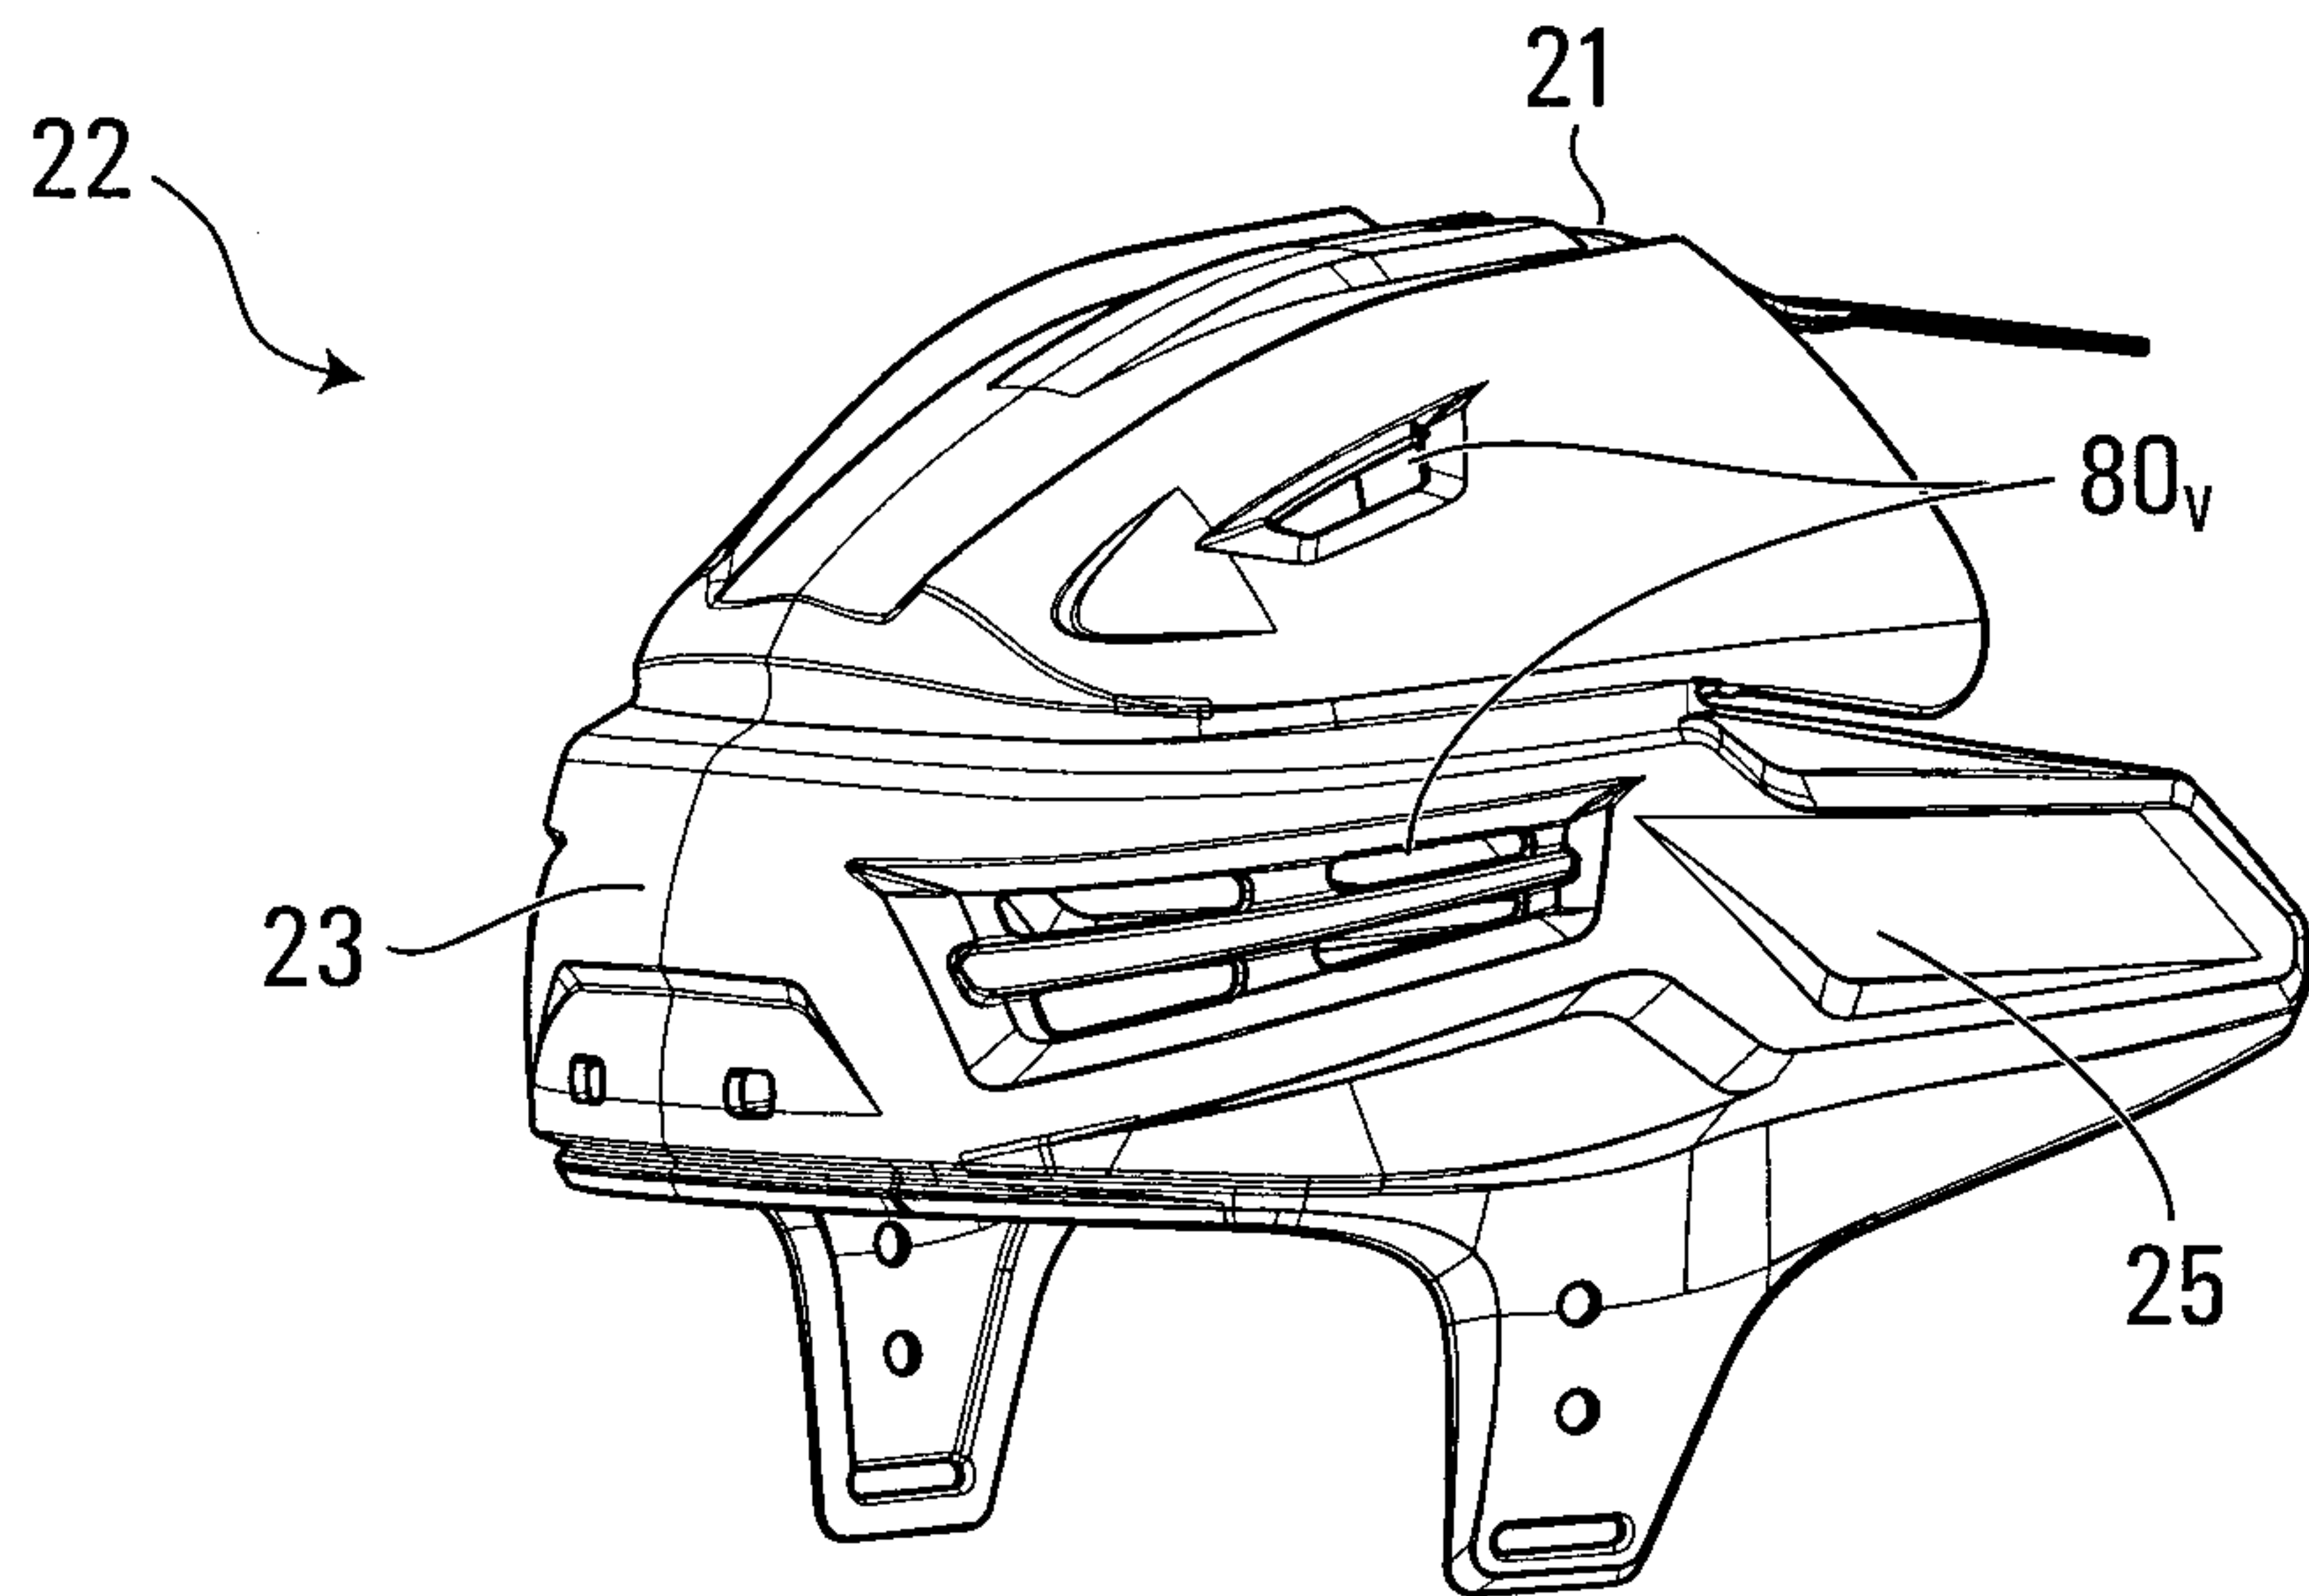
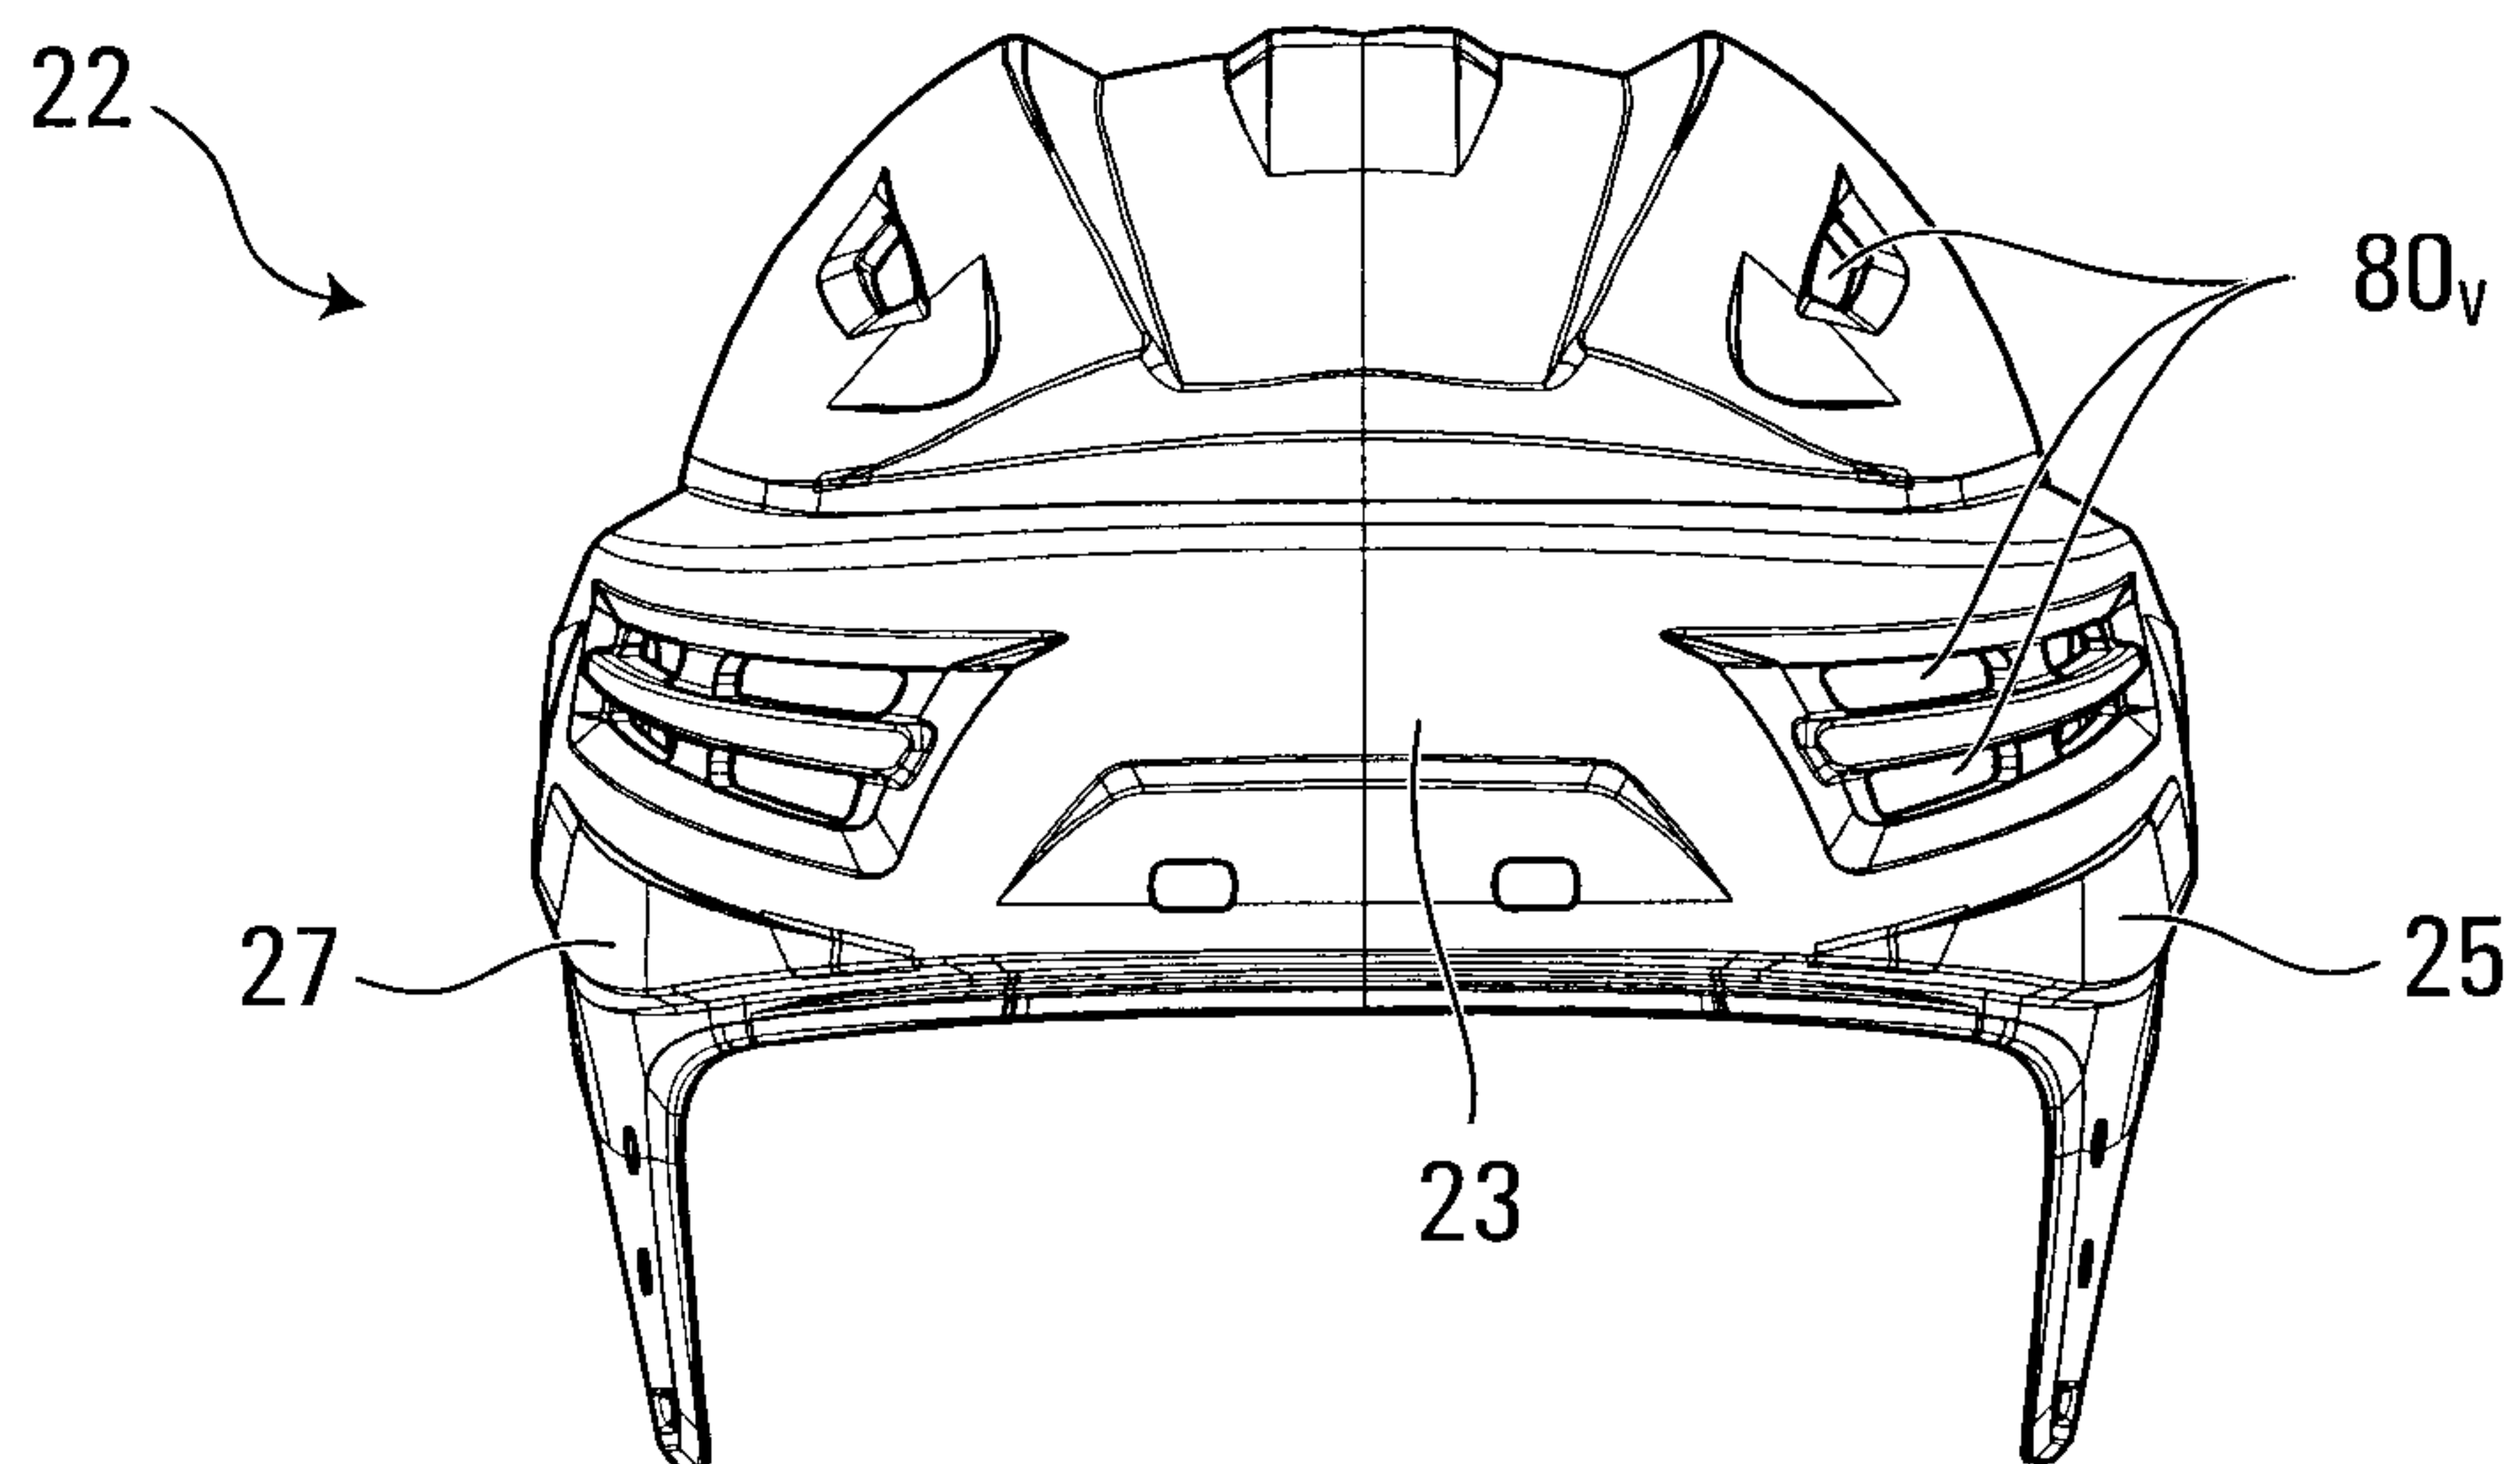


FIG. 26

18/40

**FIG. 27****FIG. 28**

19/40

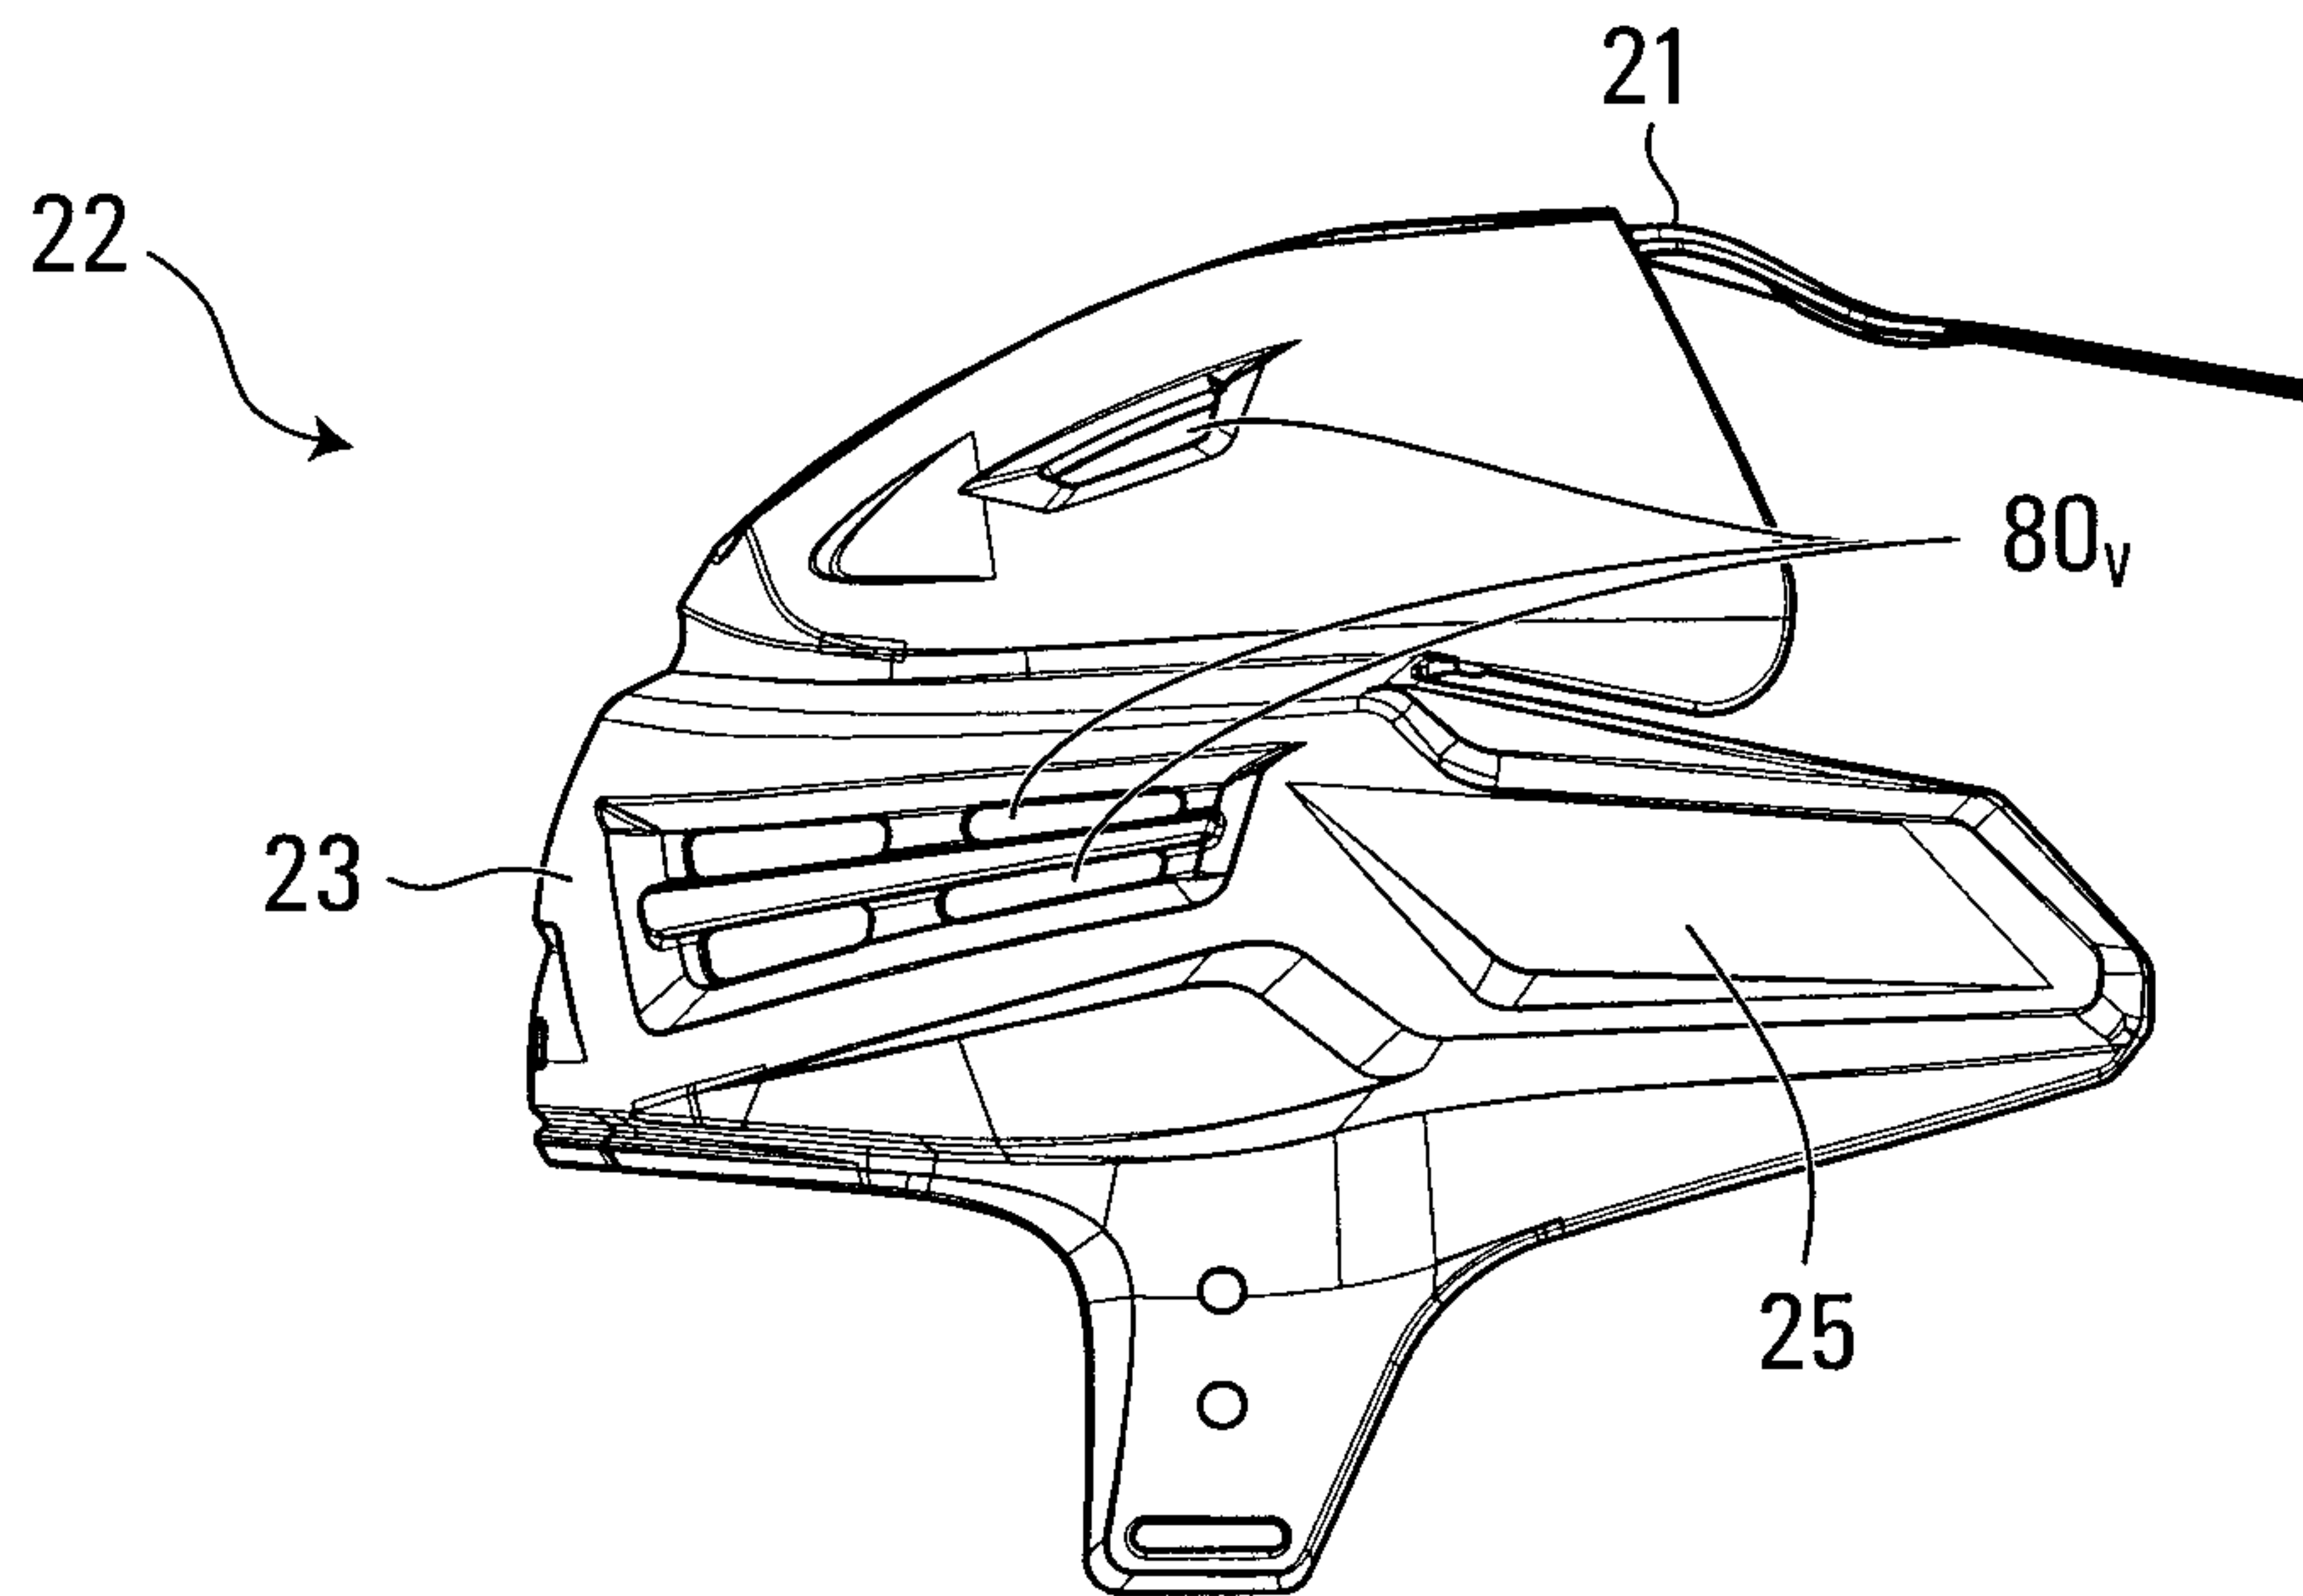
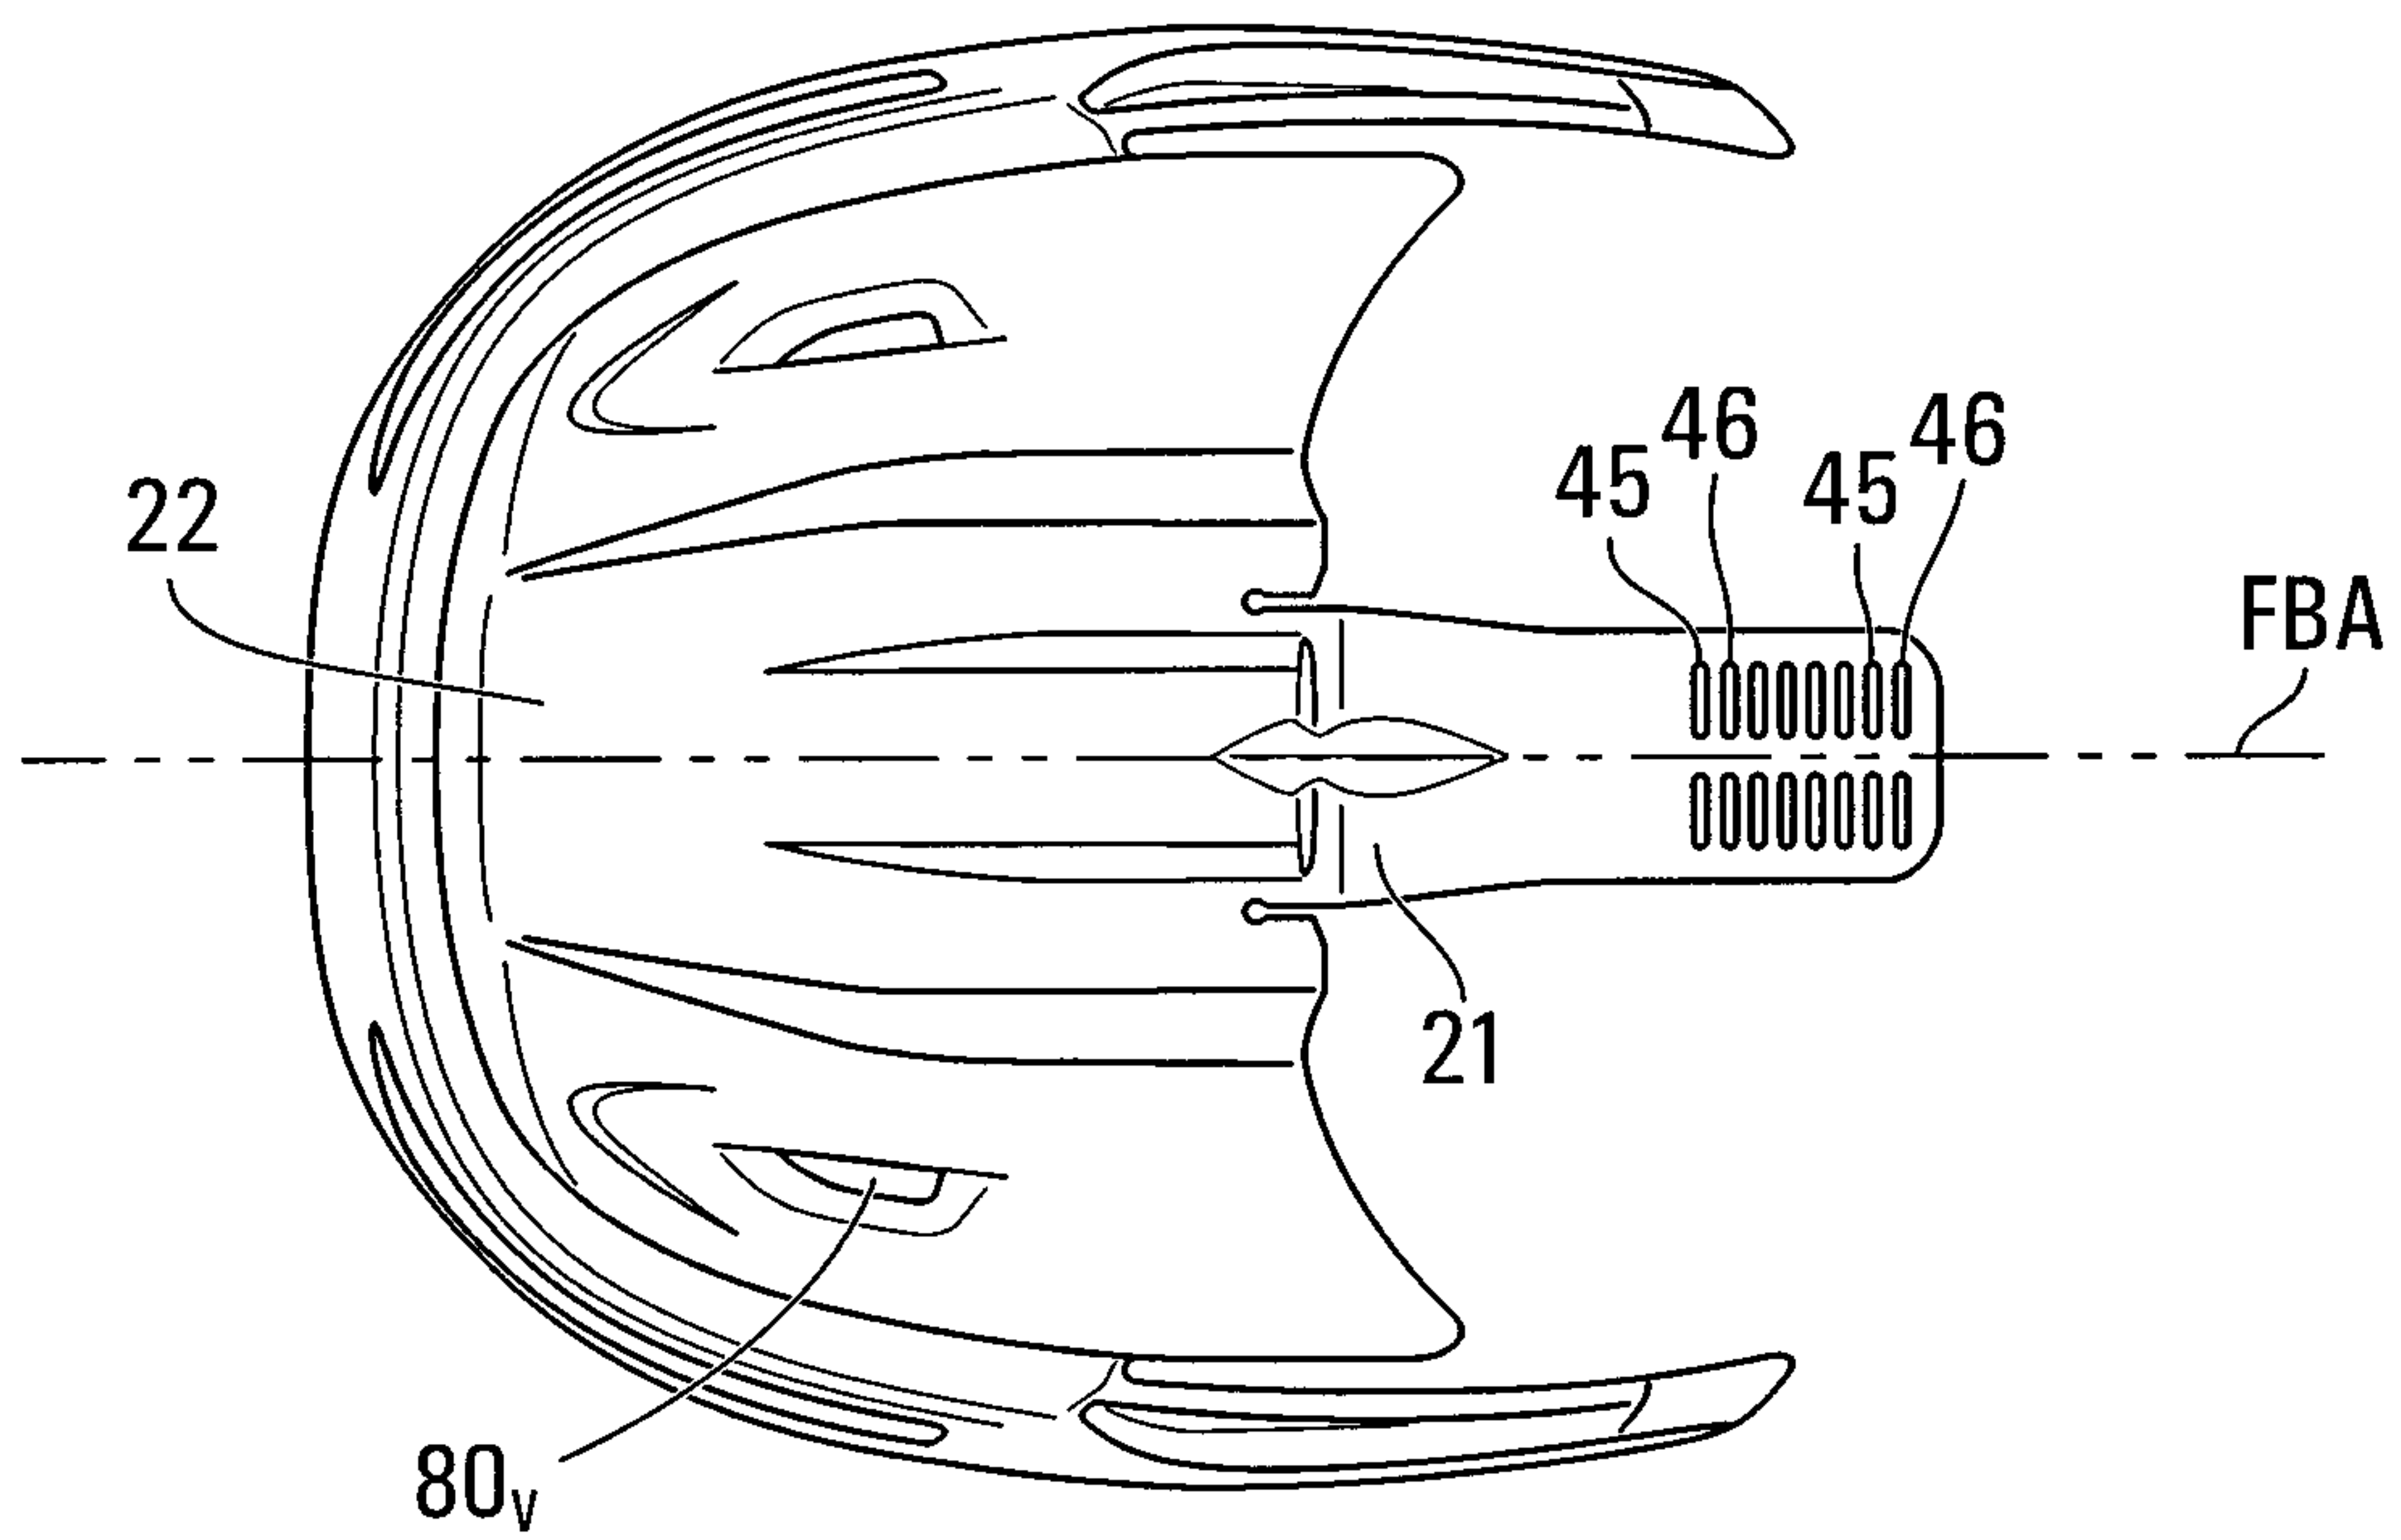
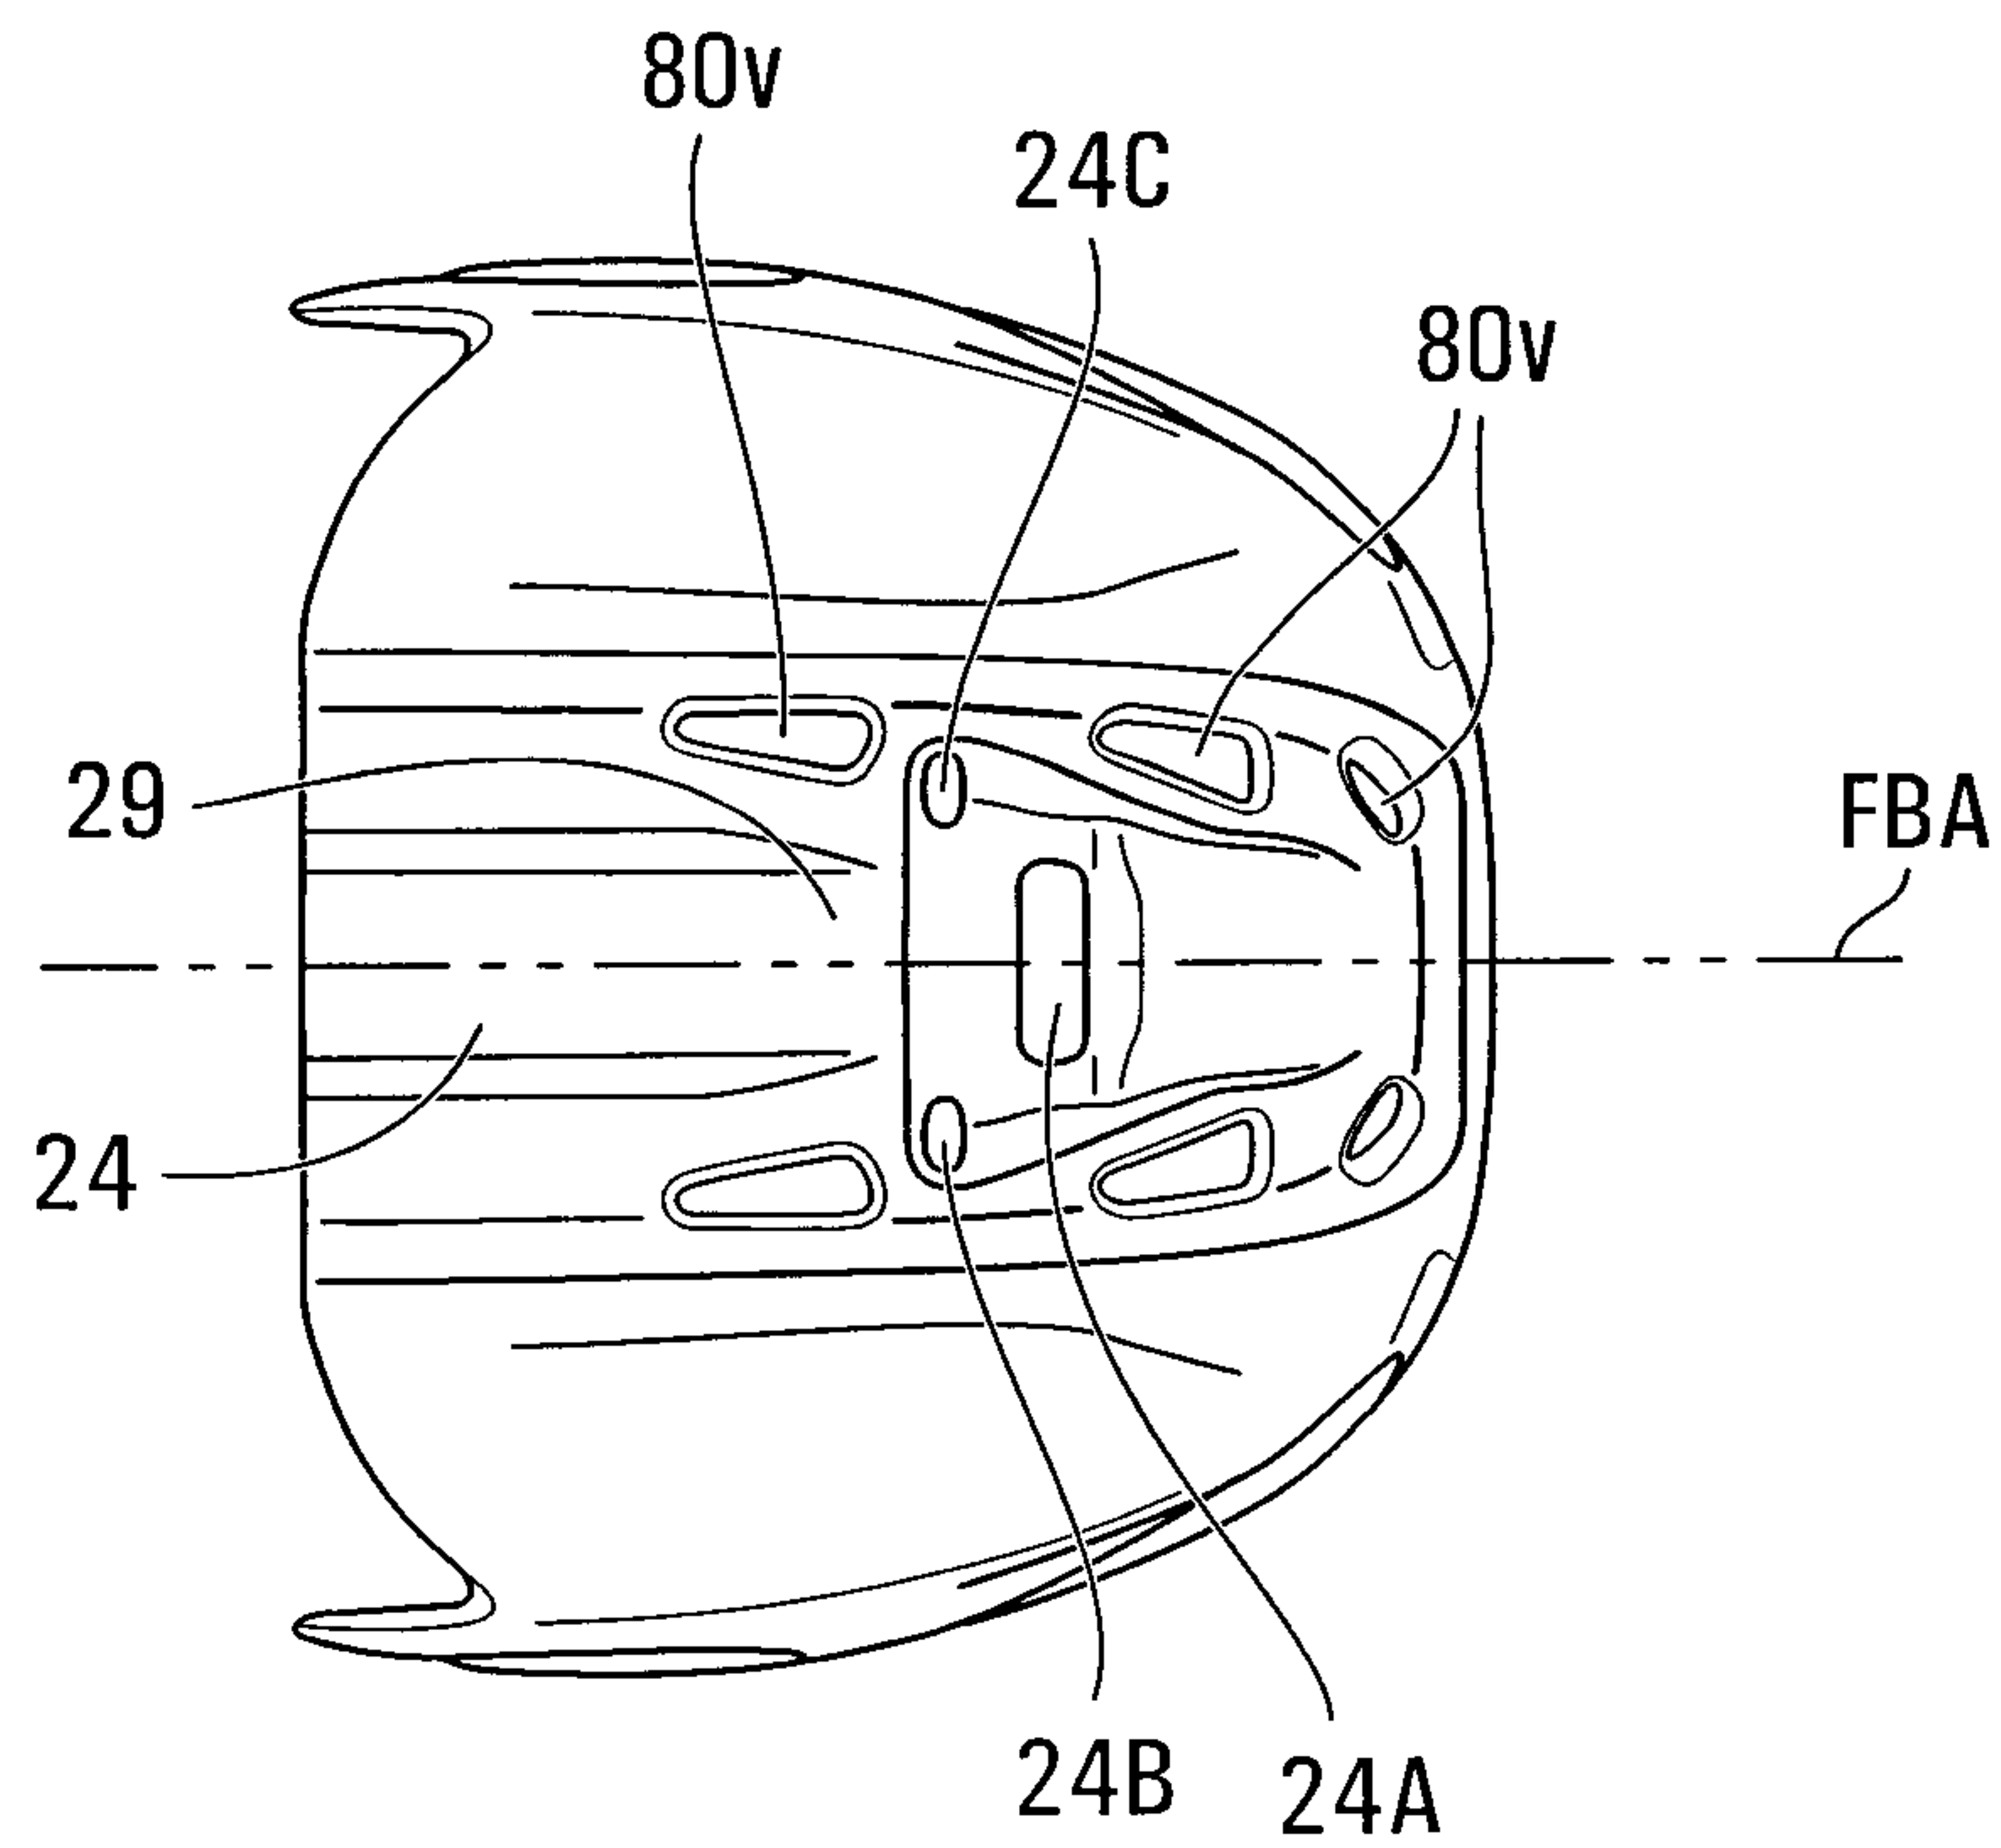


FIG. 29

20/40

**FIG. 30****FIG. 31**

21/40

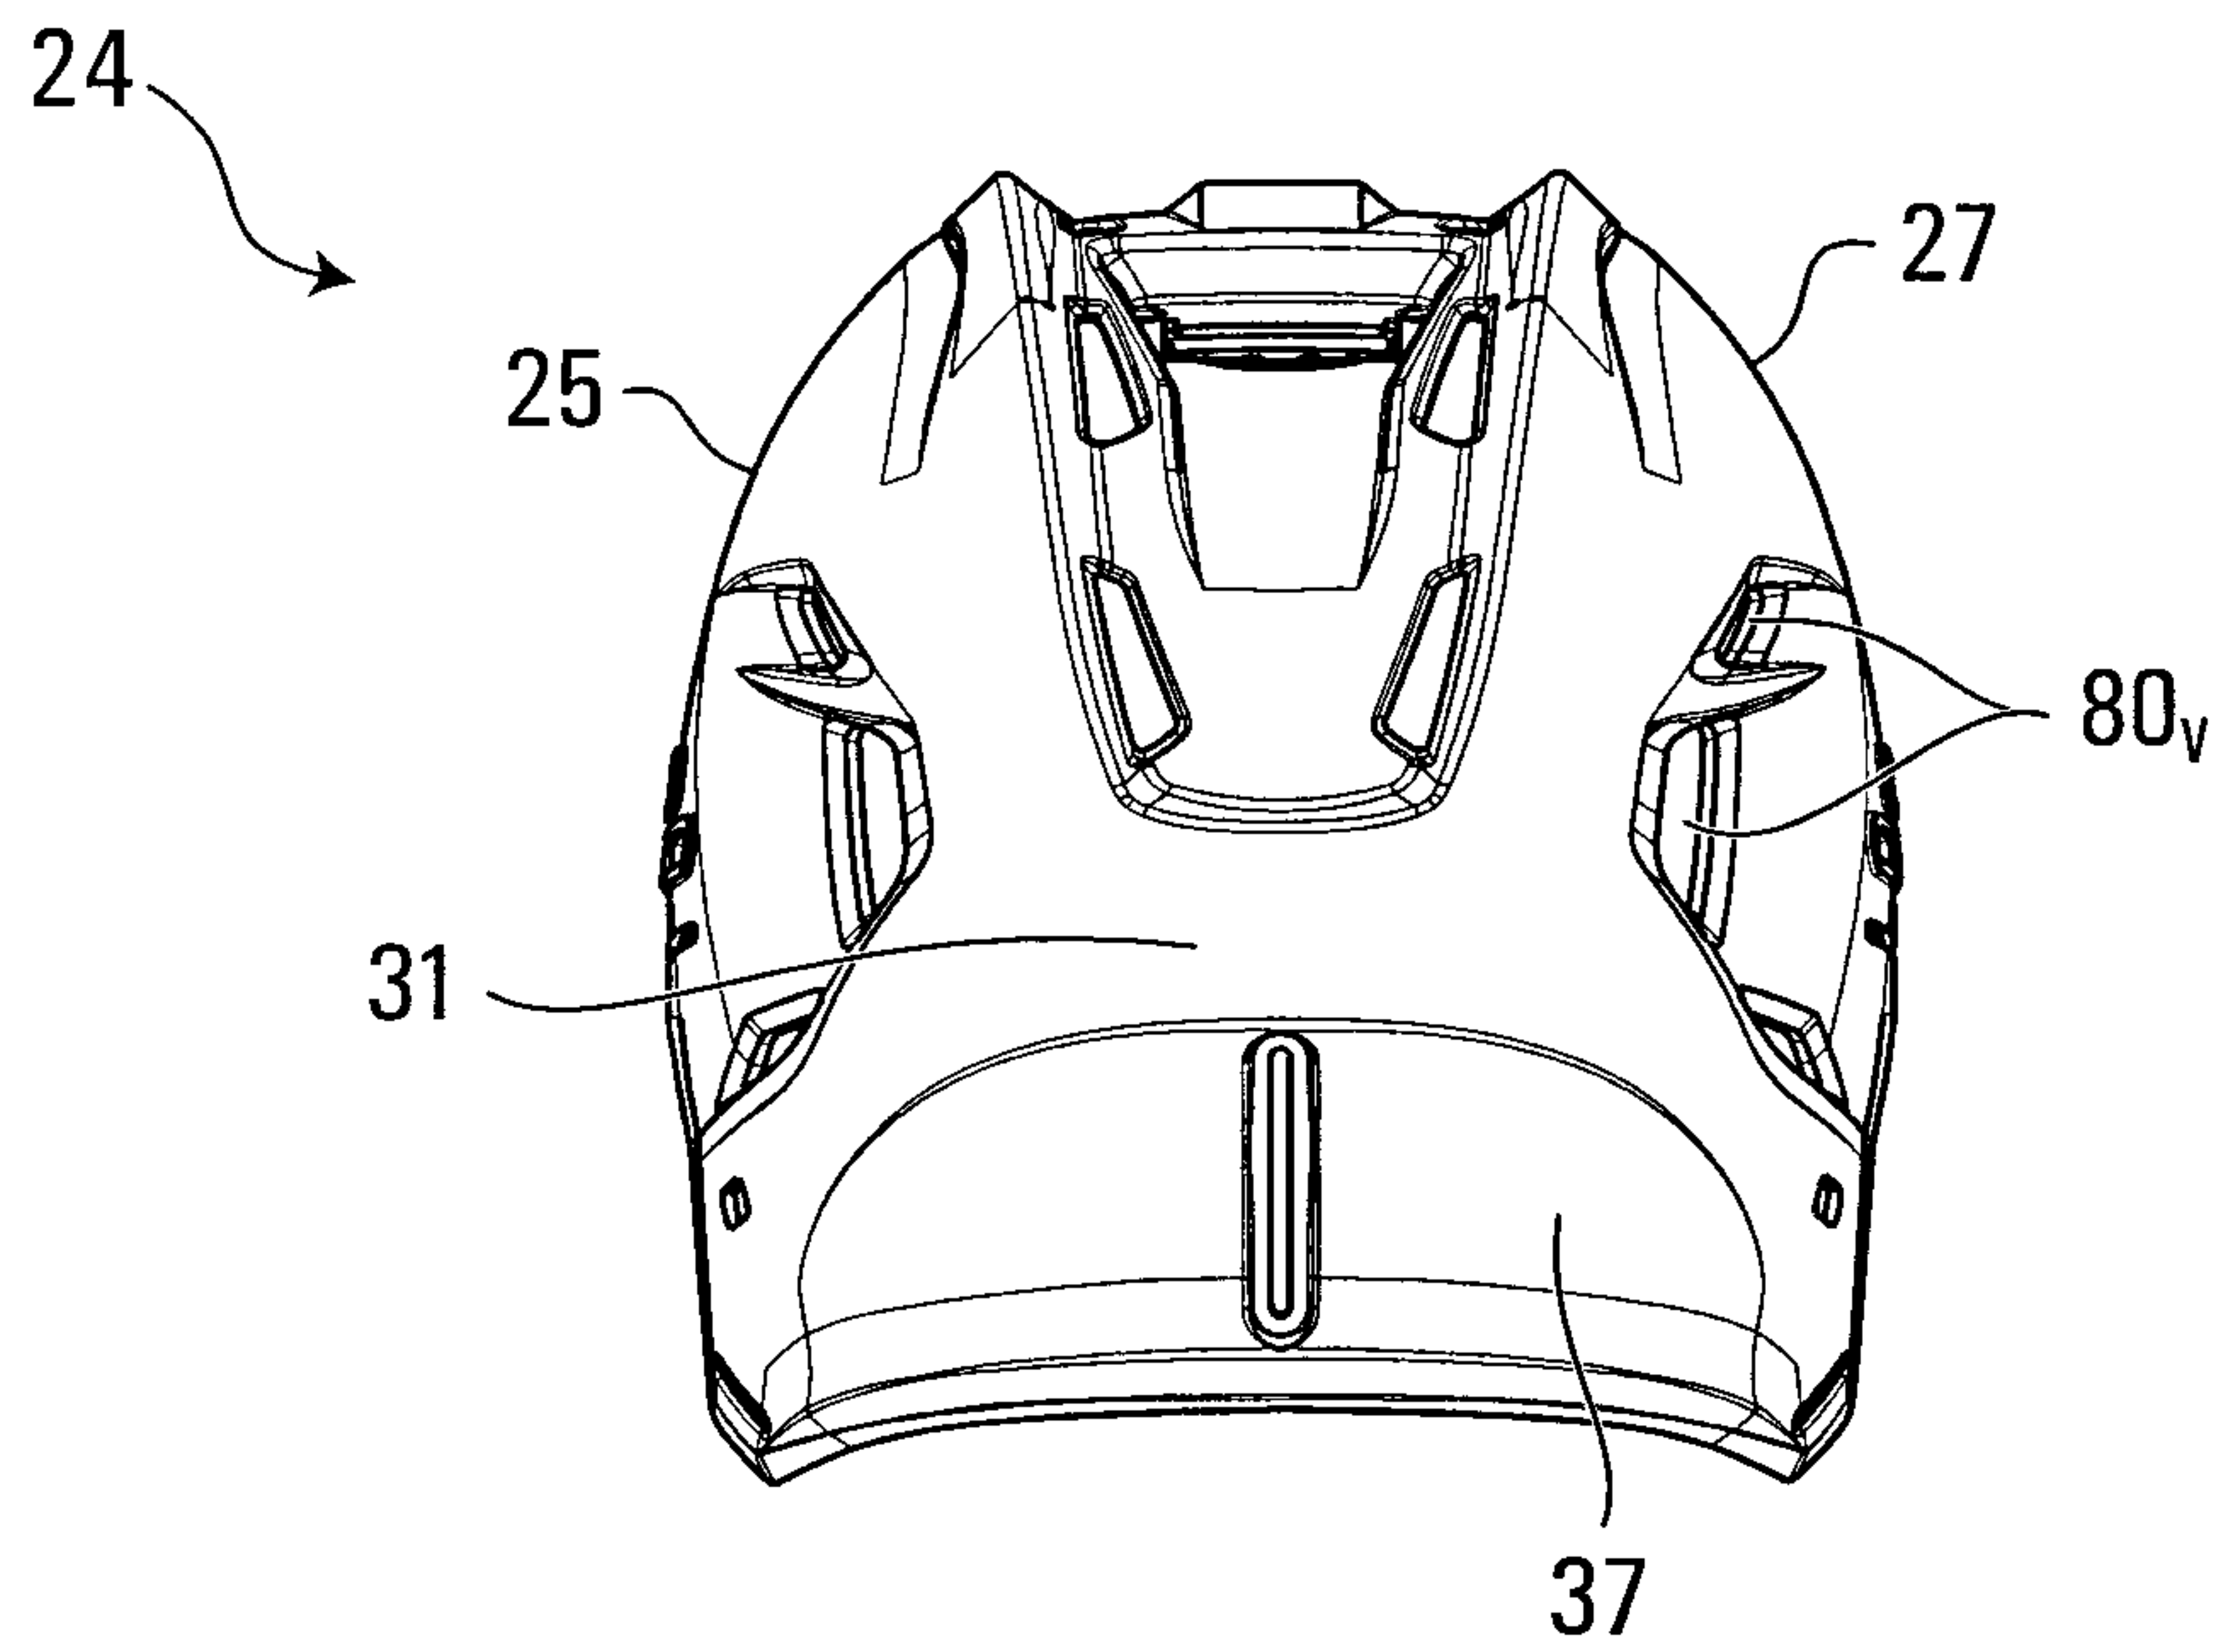


FIG. 32

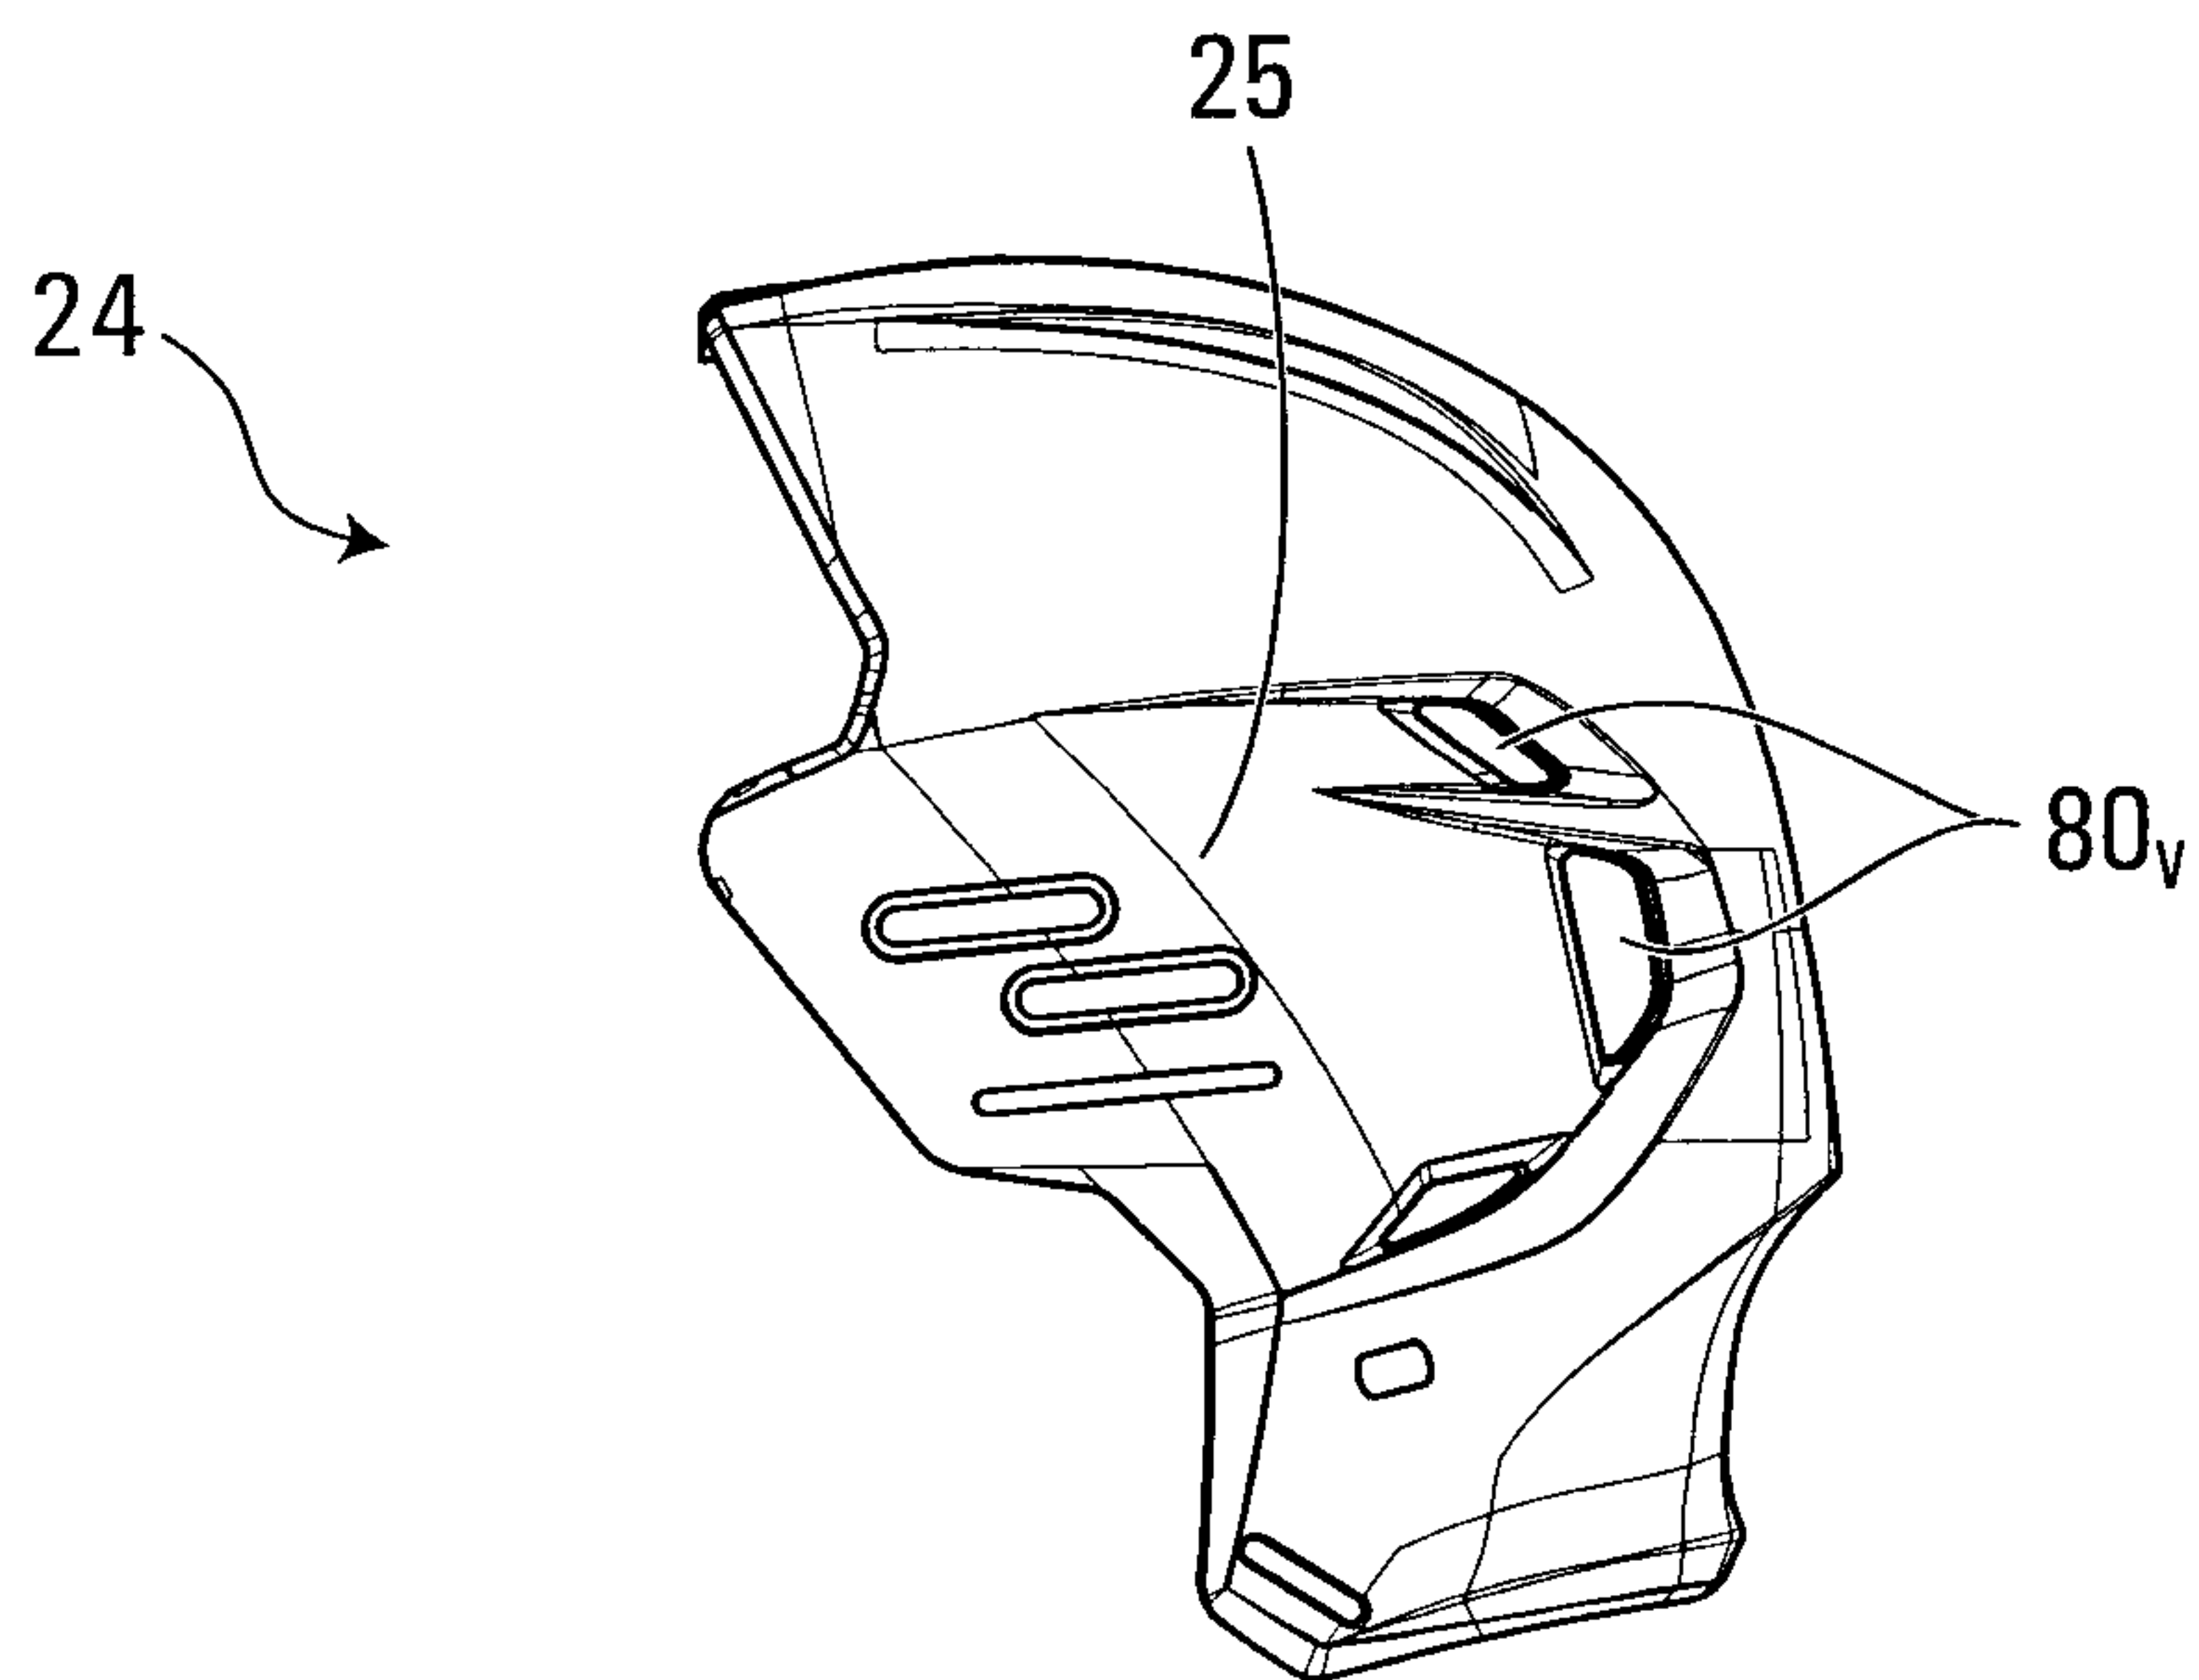
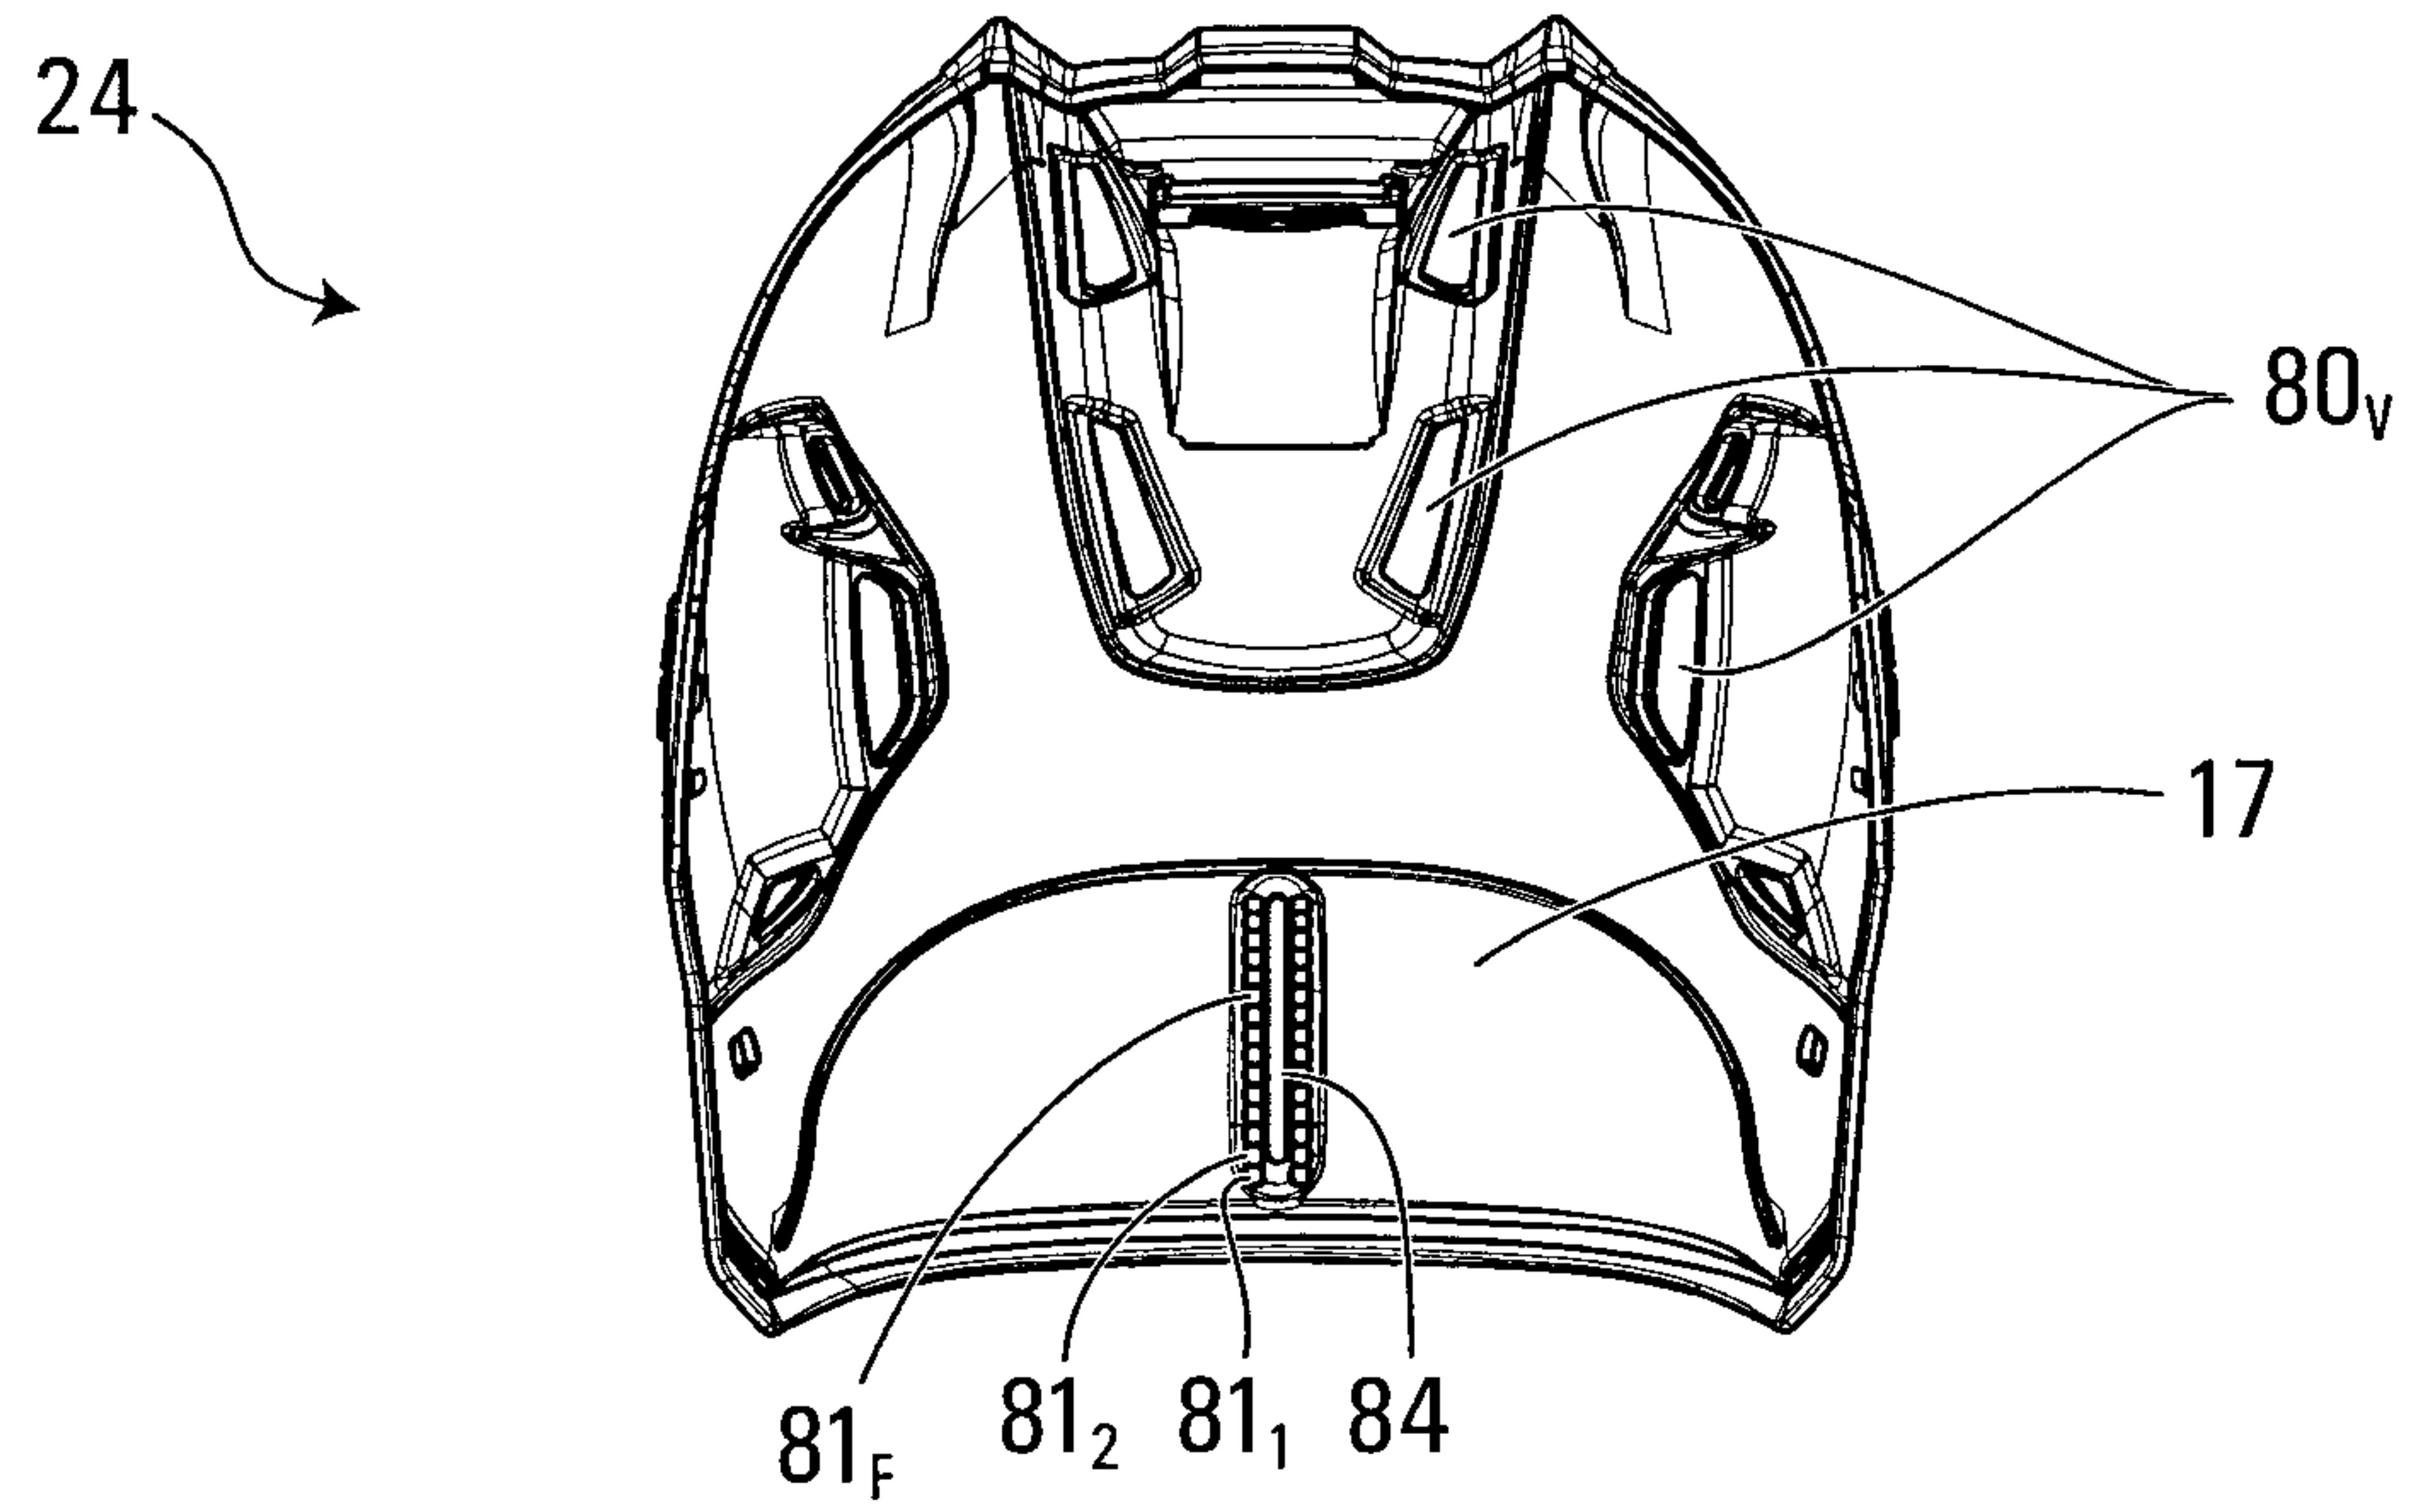


FIG. 33

22/40

**FIG. 34**

23/40

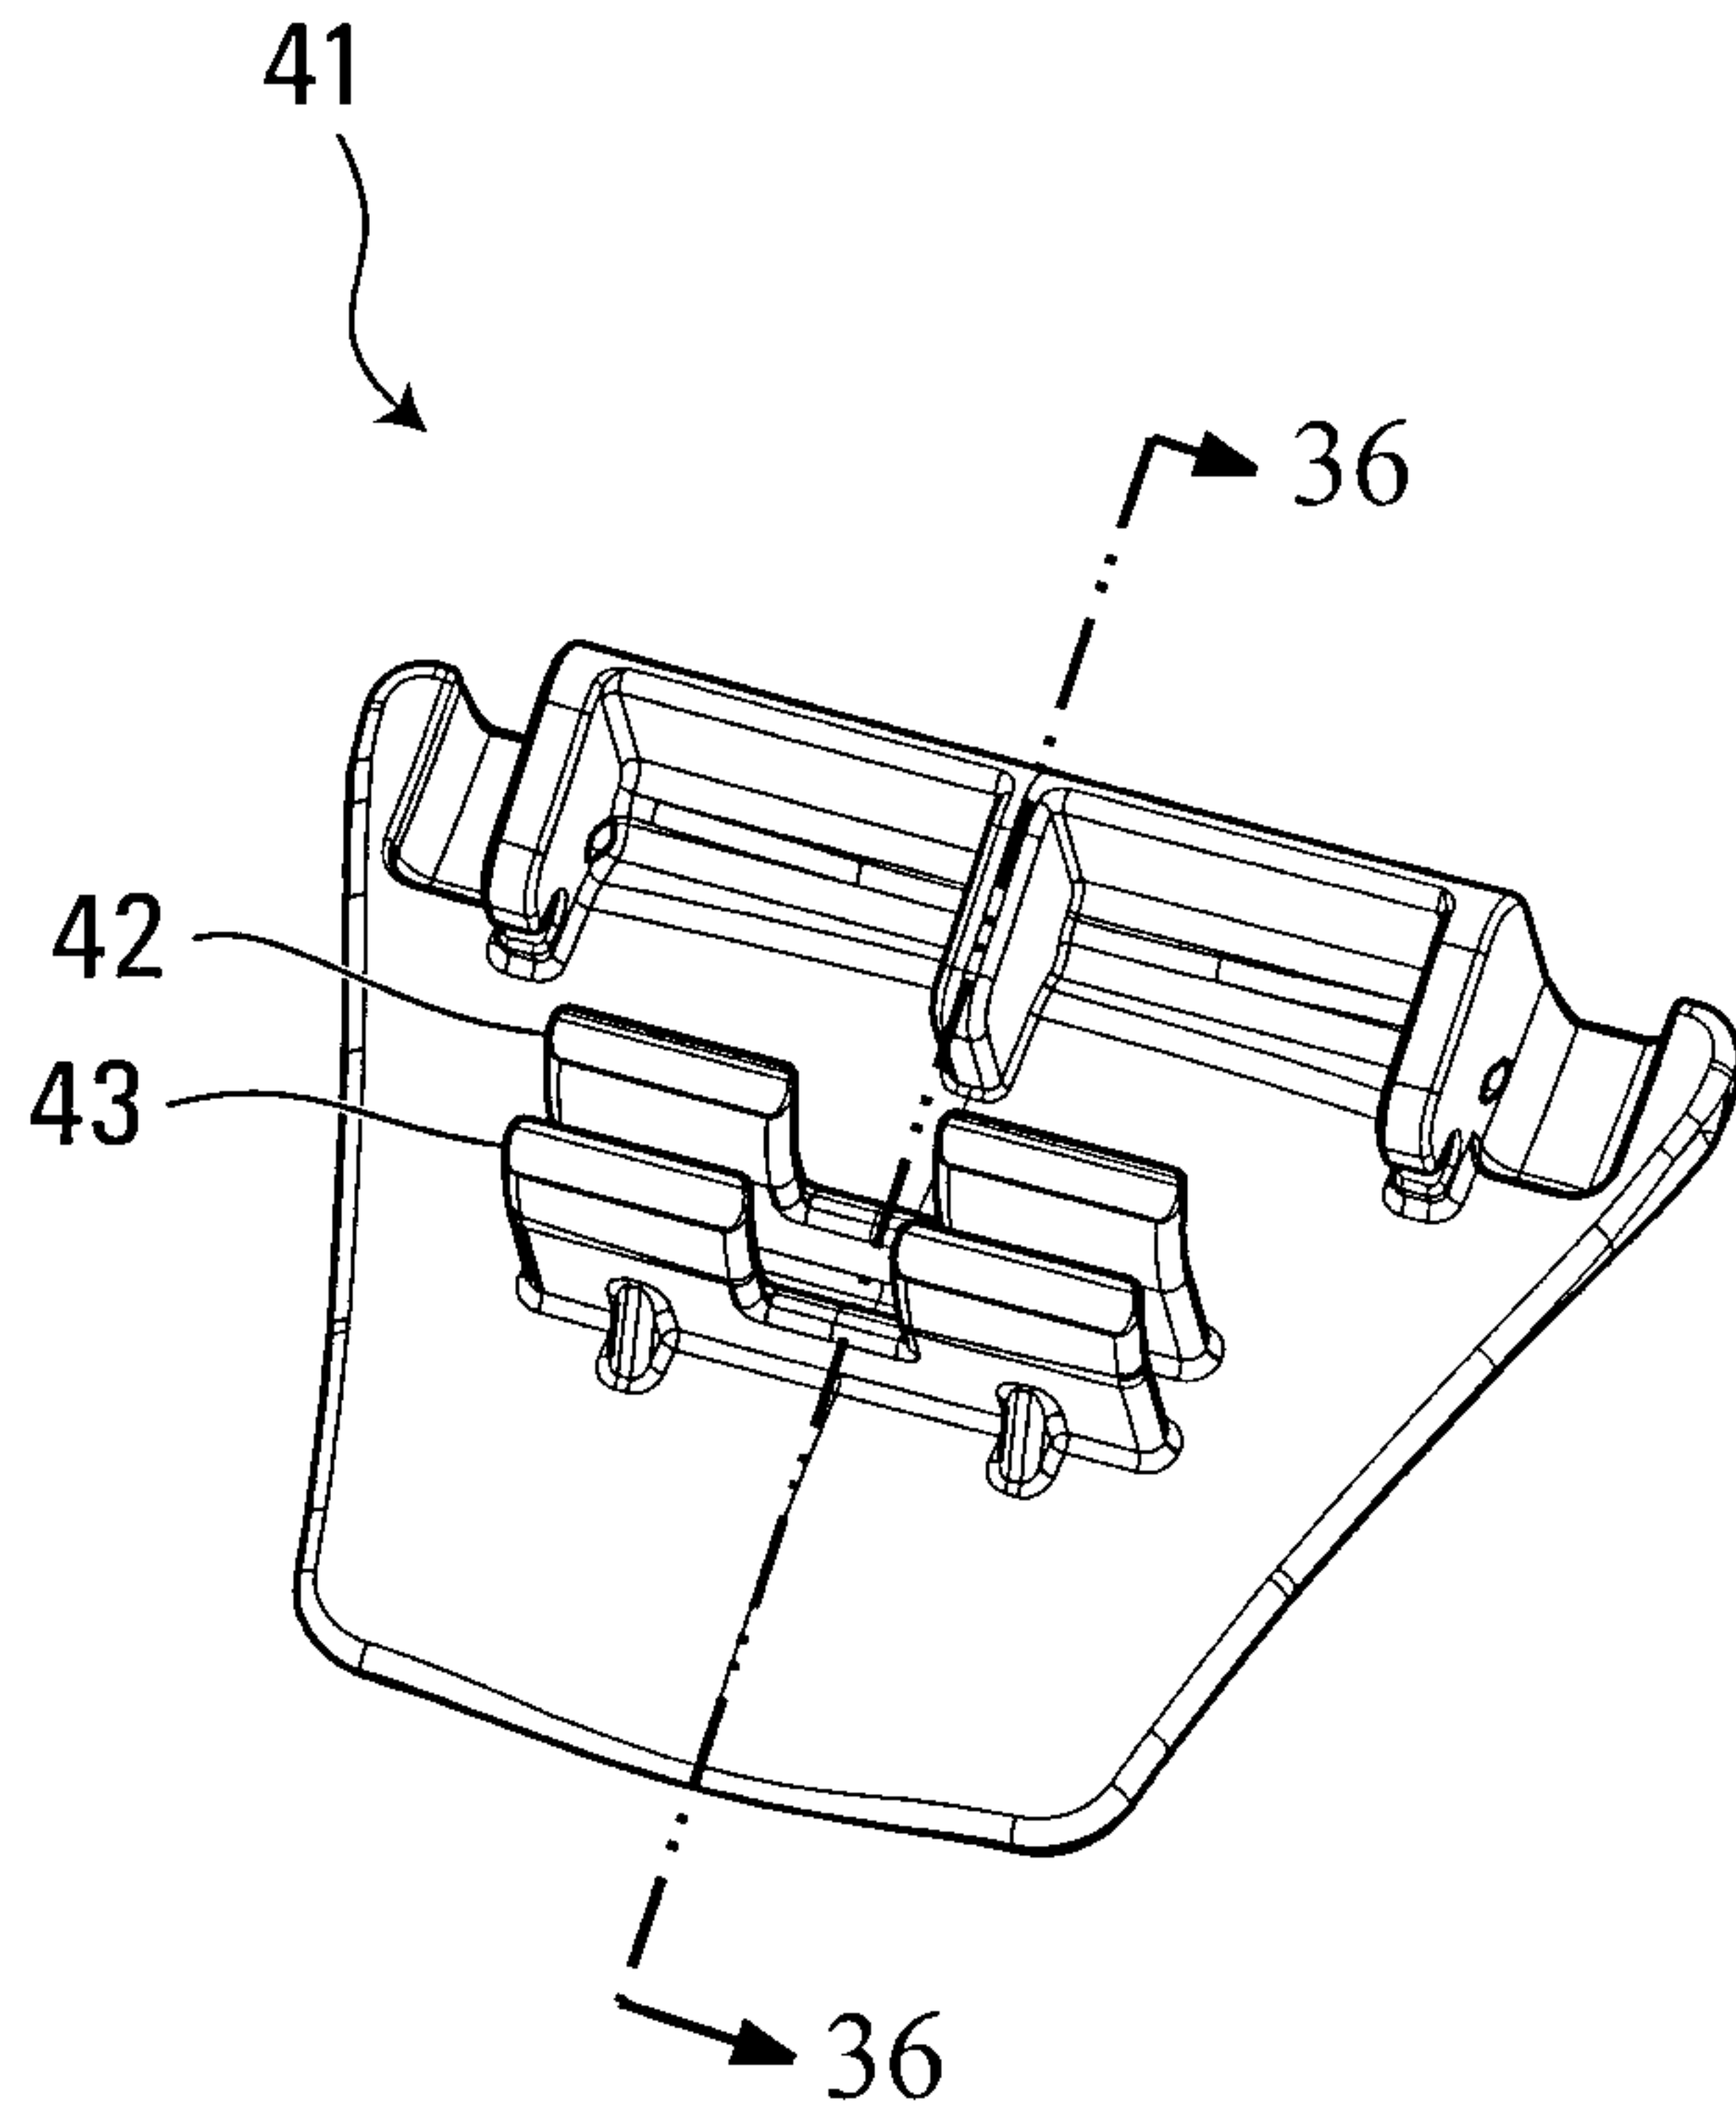


FIG. 35

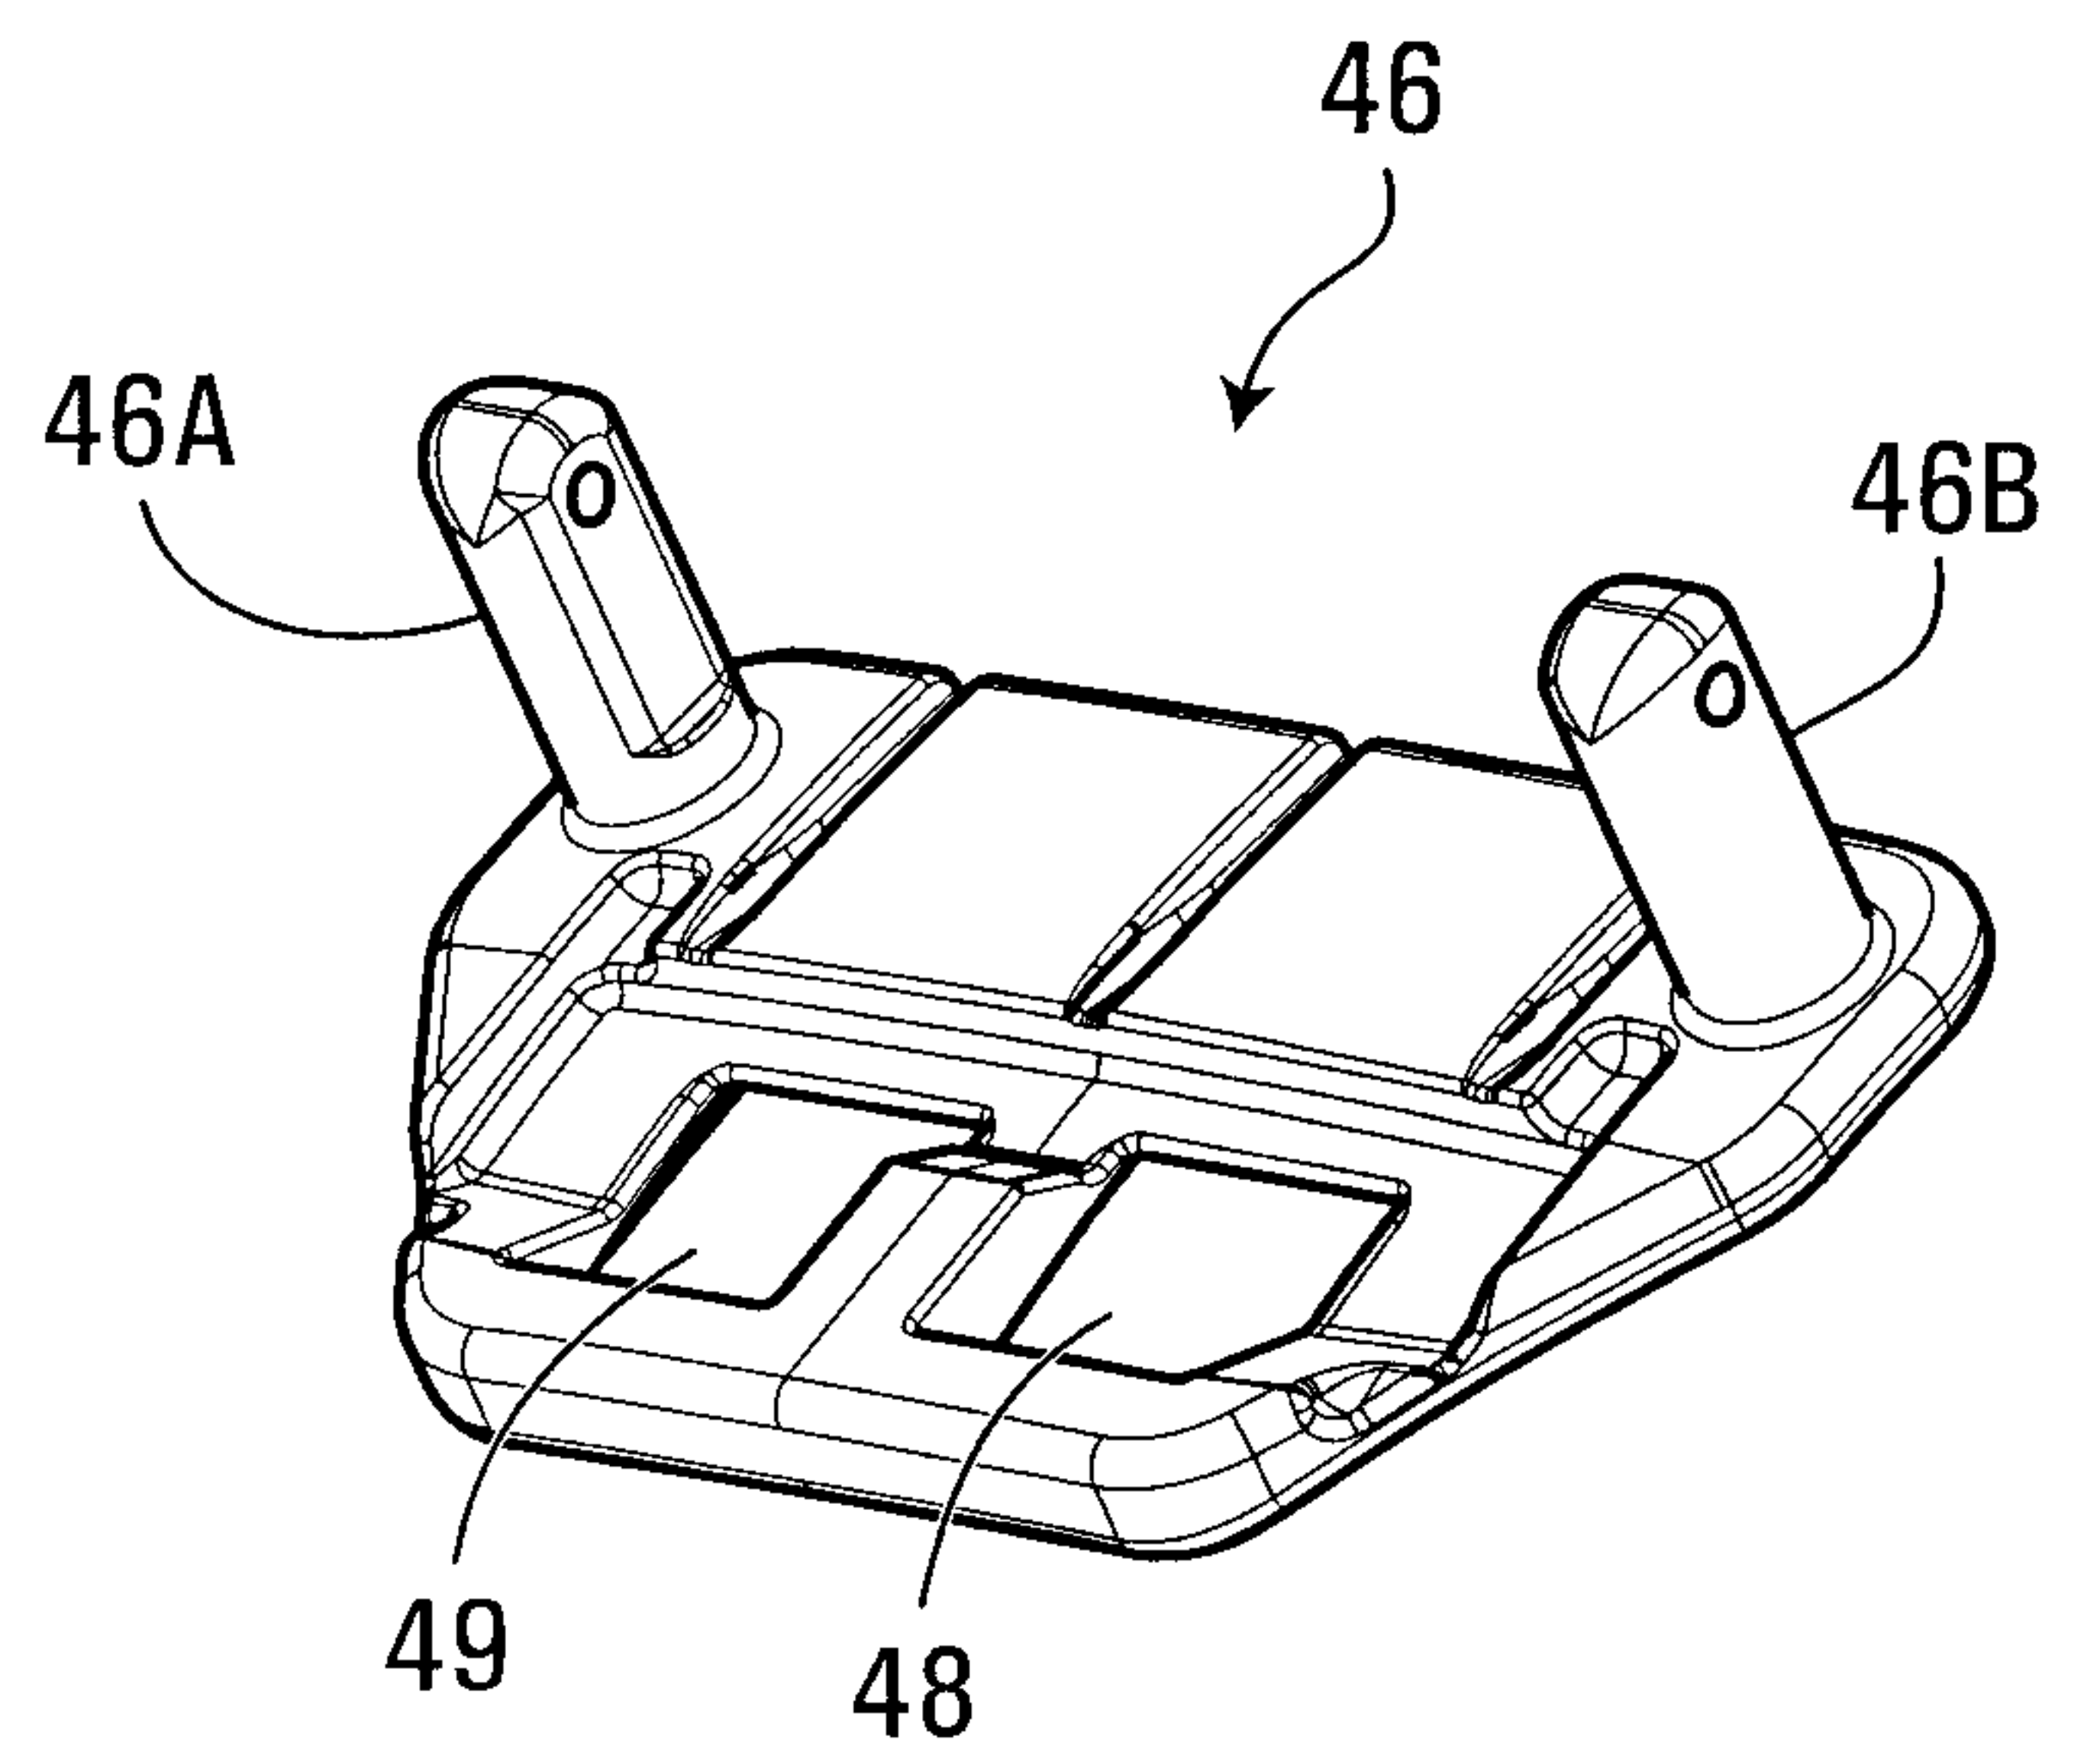


FIG. 37

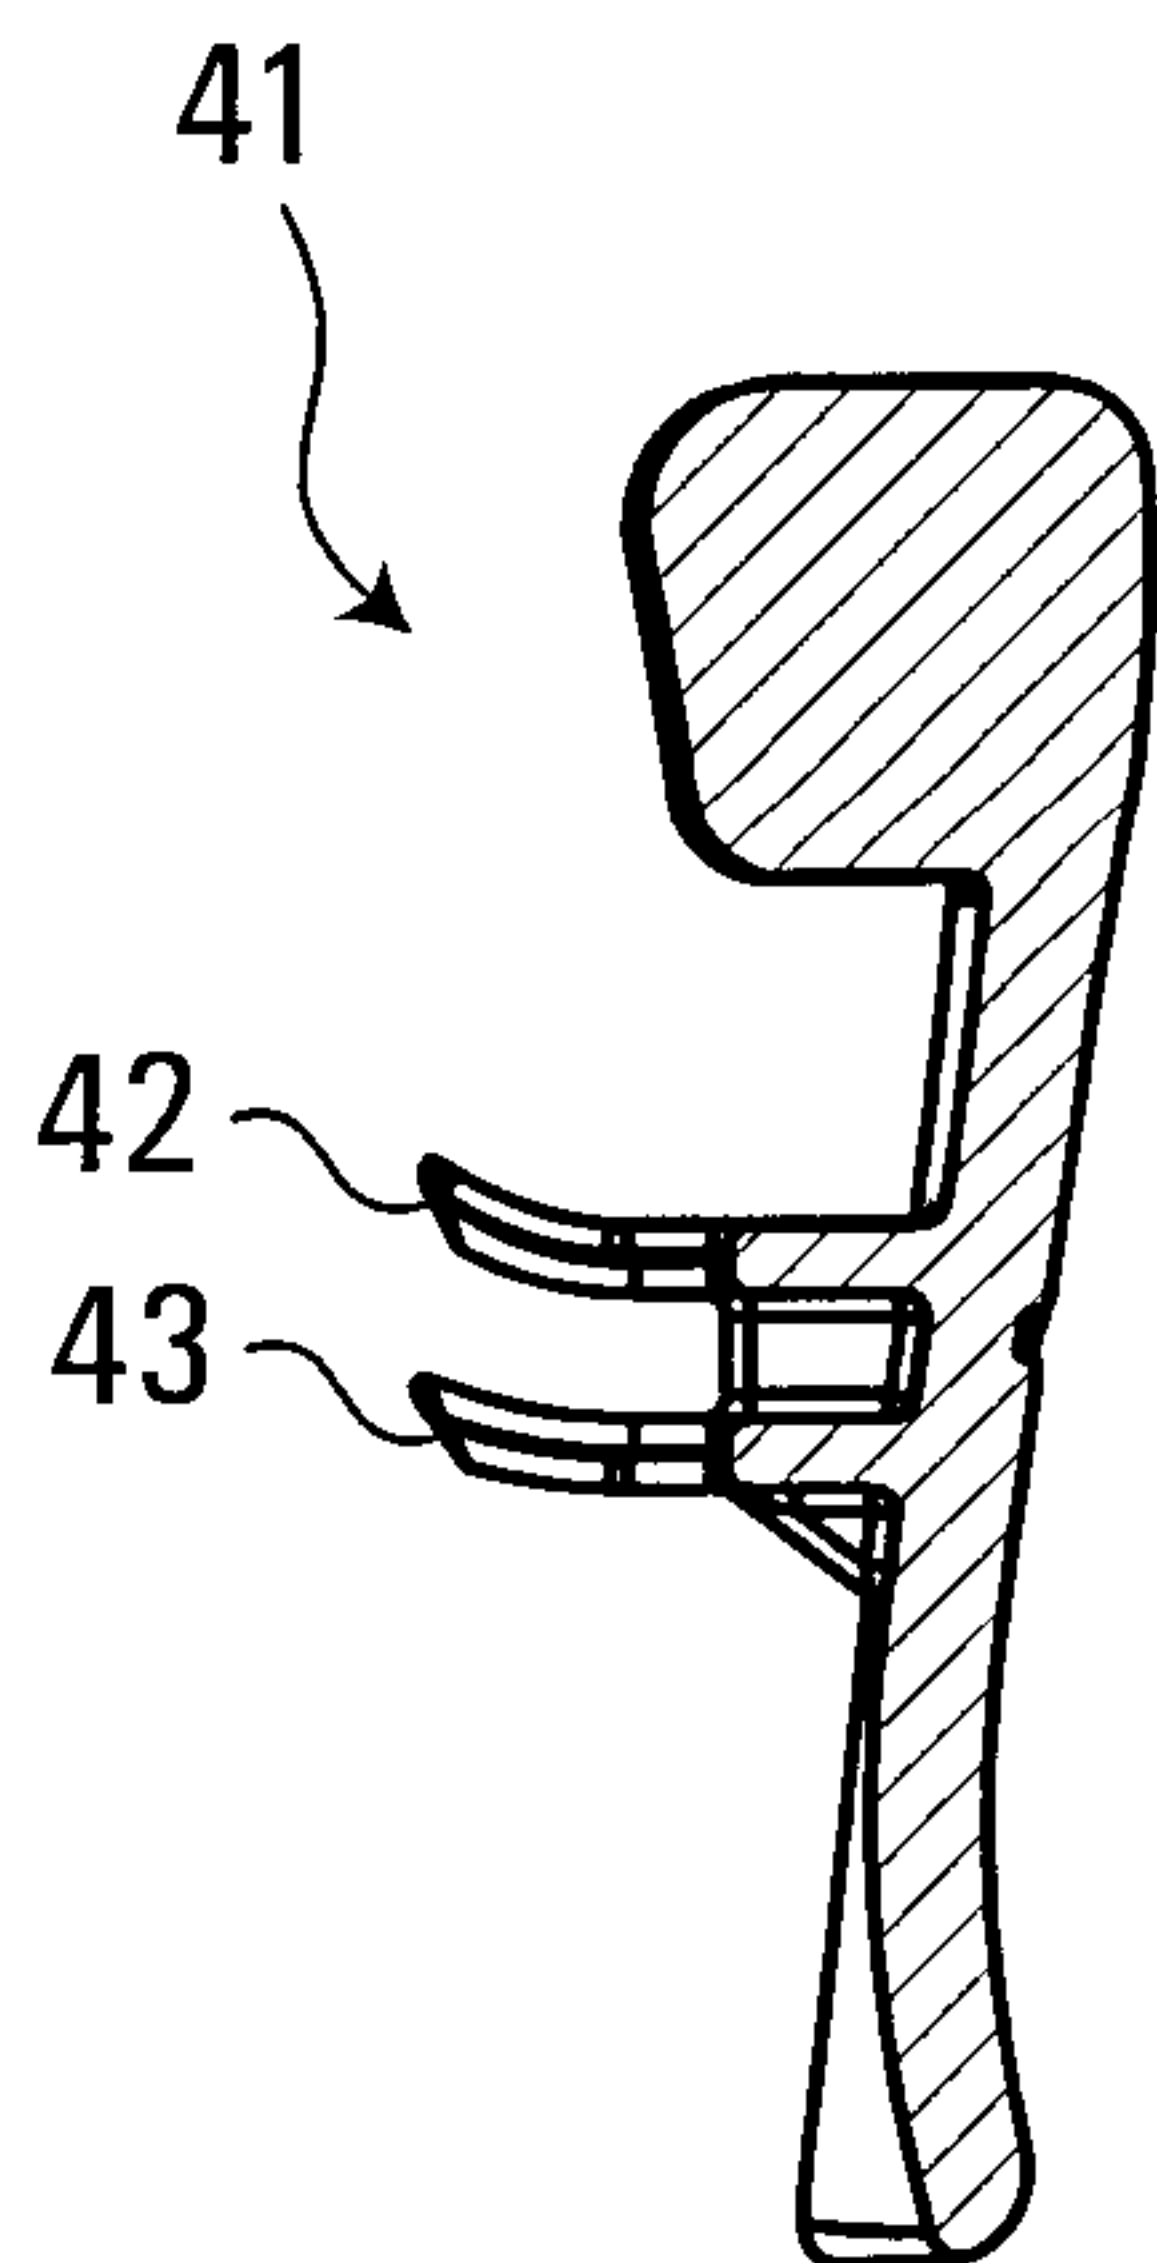


FIG. 36

24/40

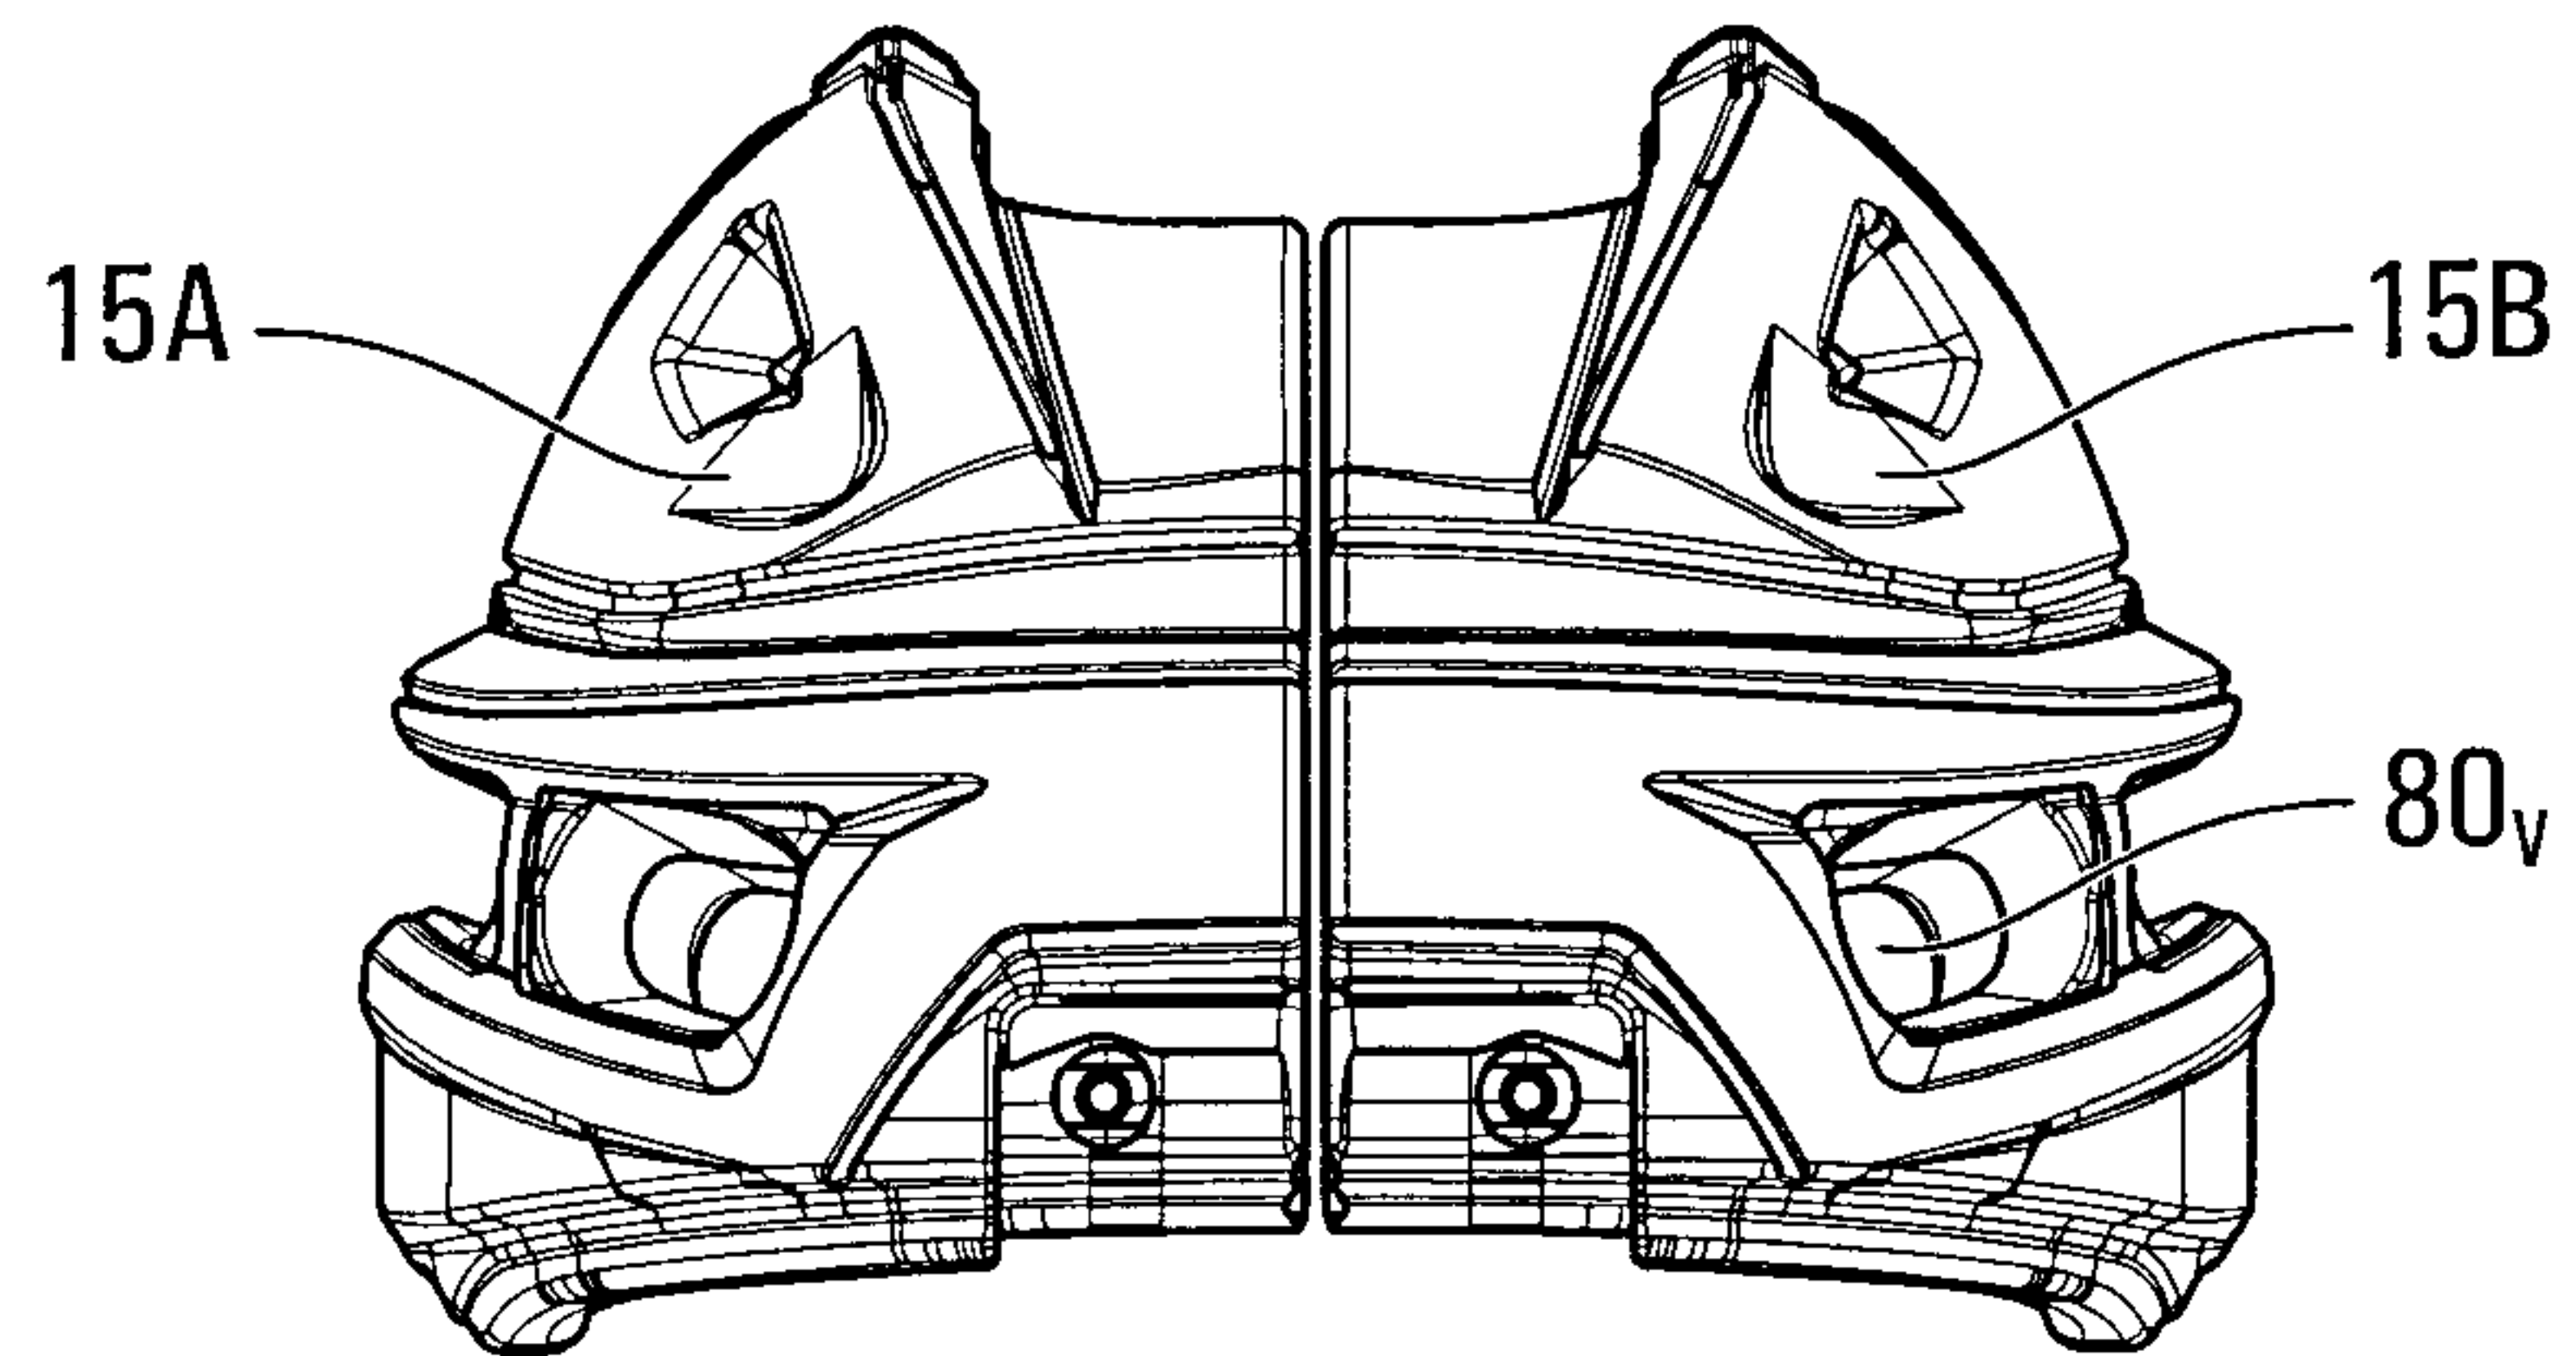


FIG. 38

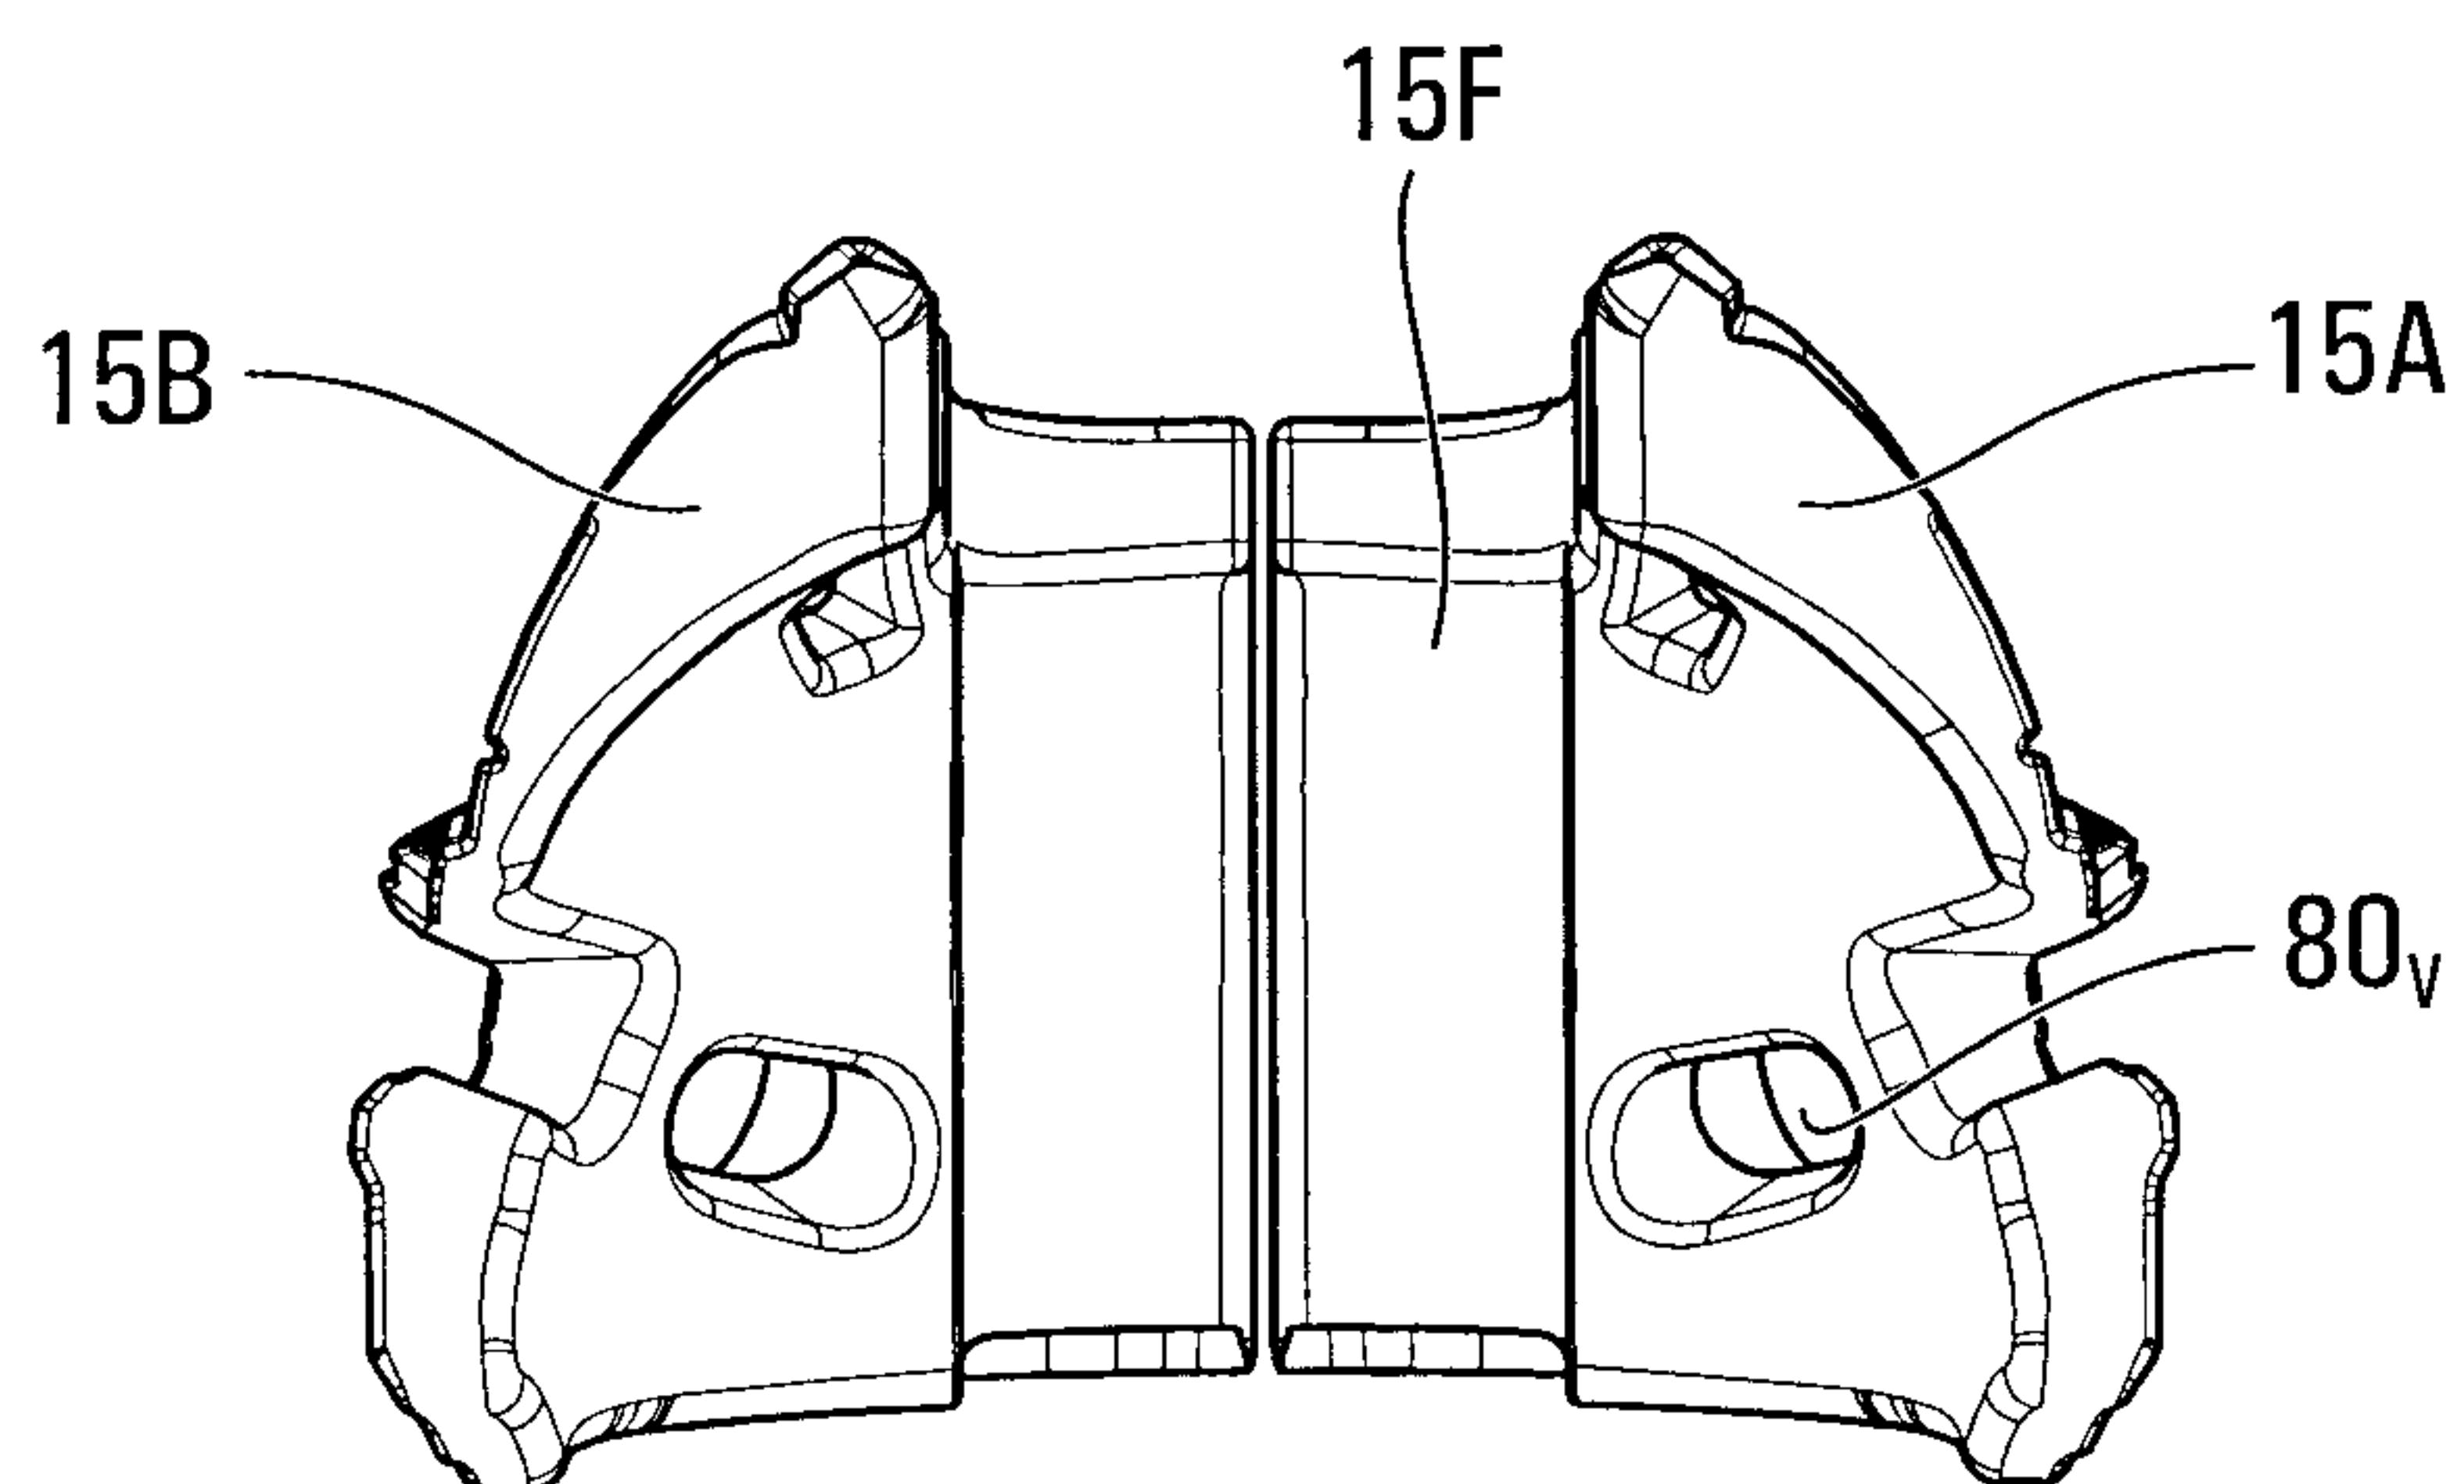


FIG. 39

25/40

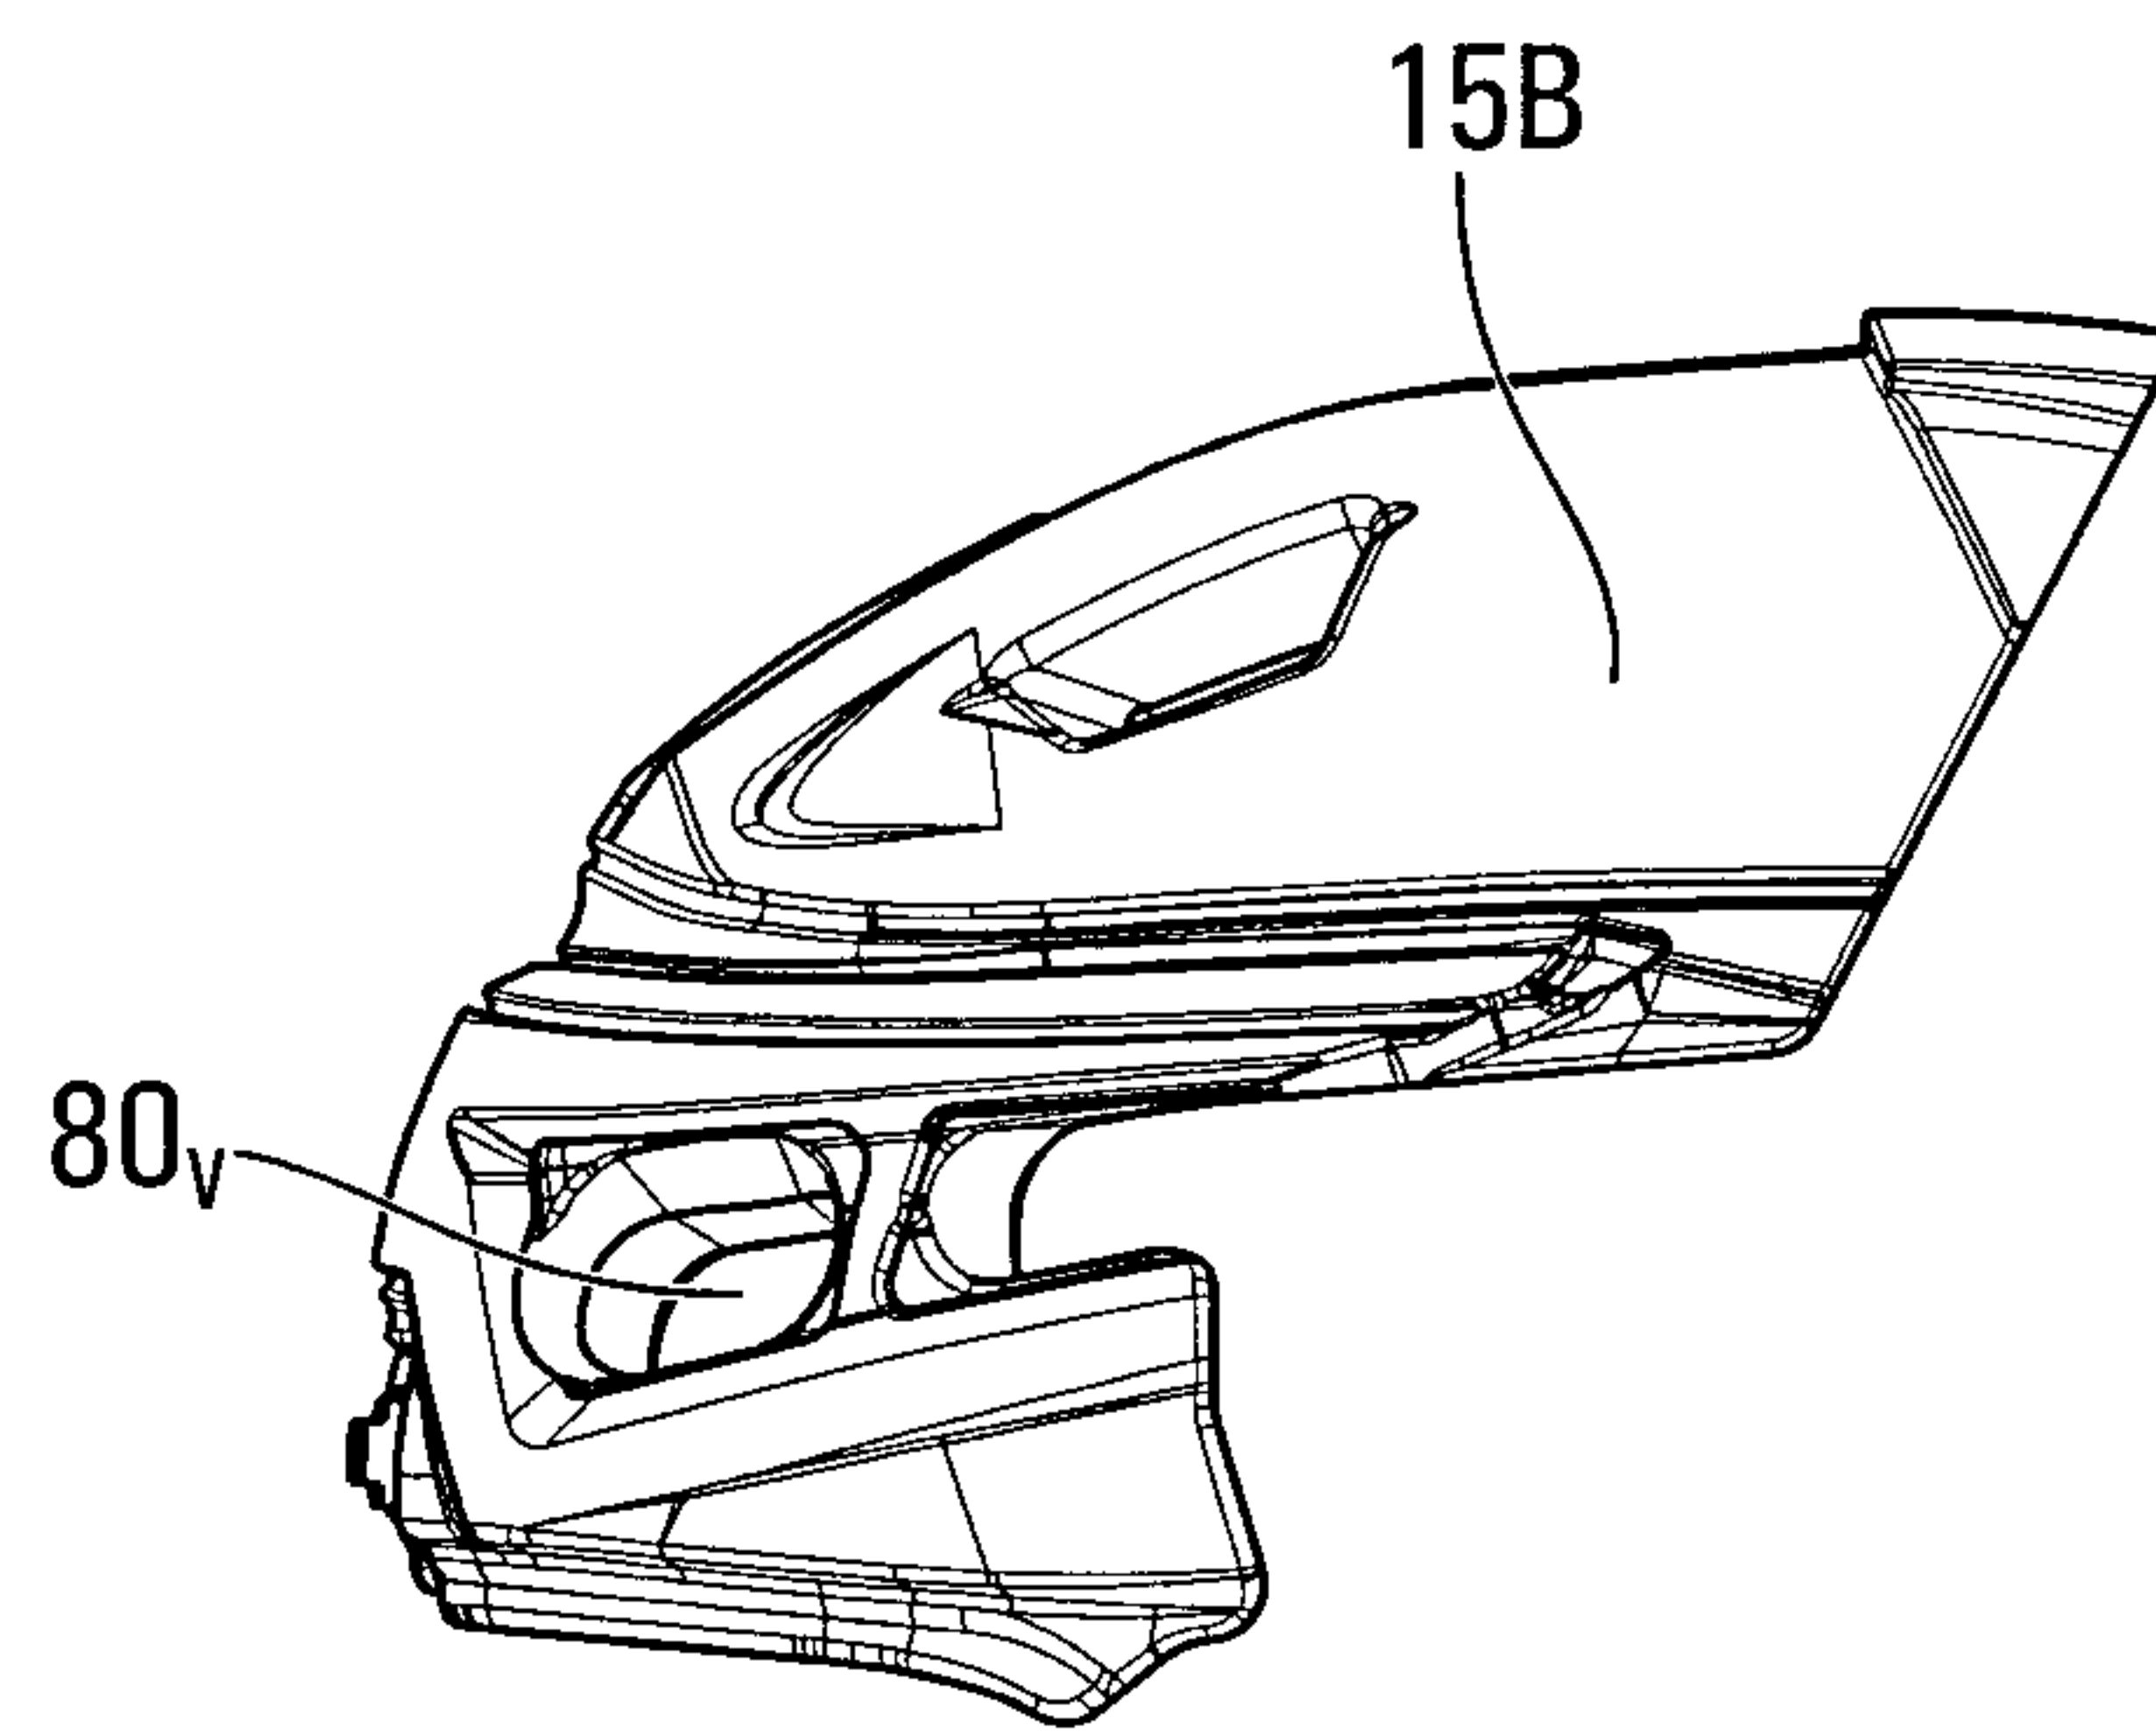


FIG. 40

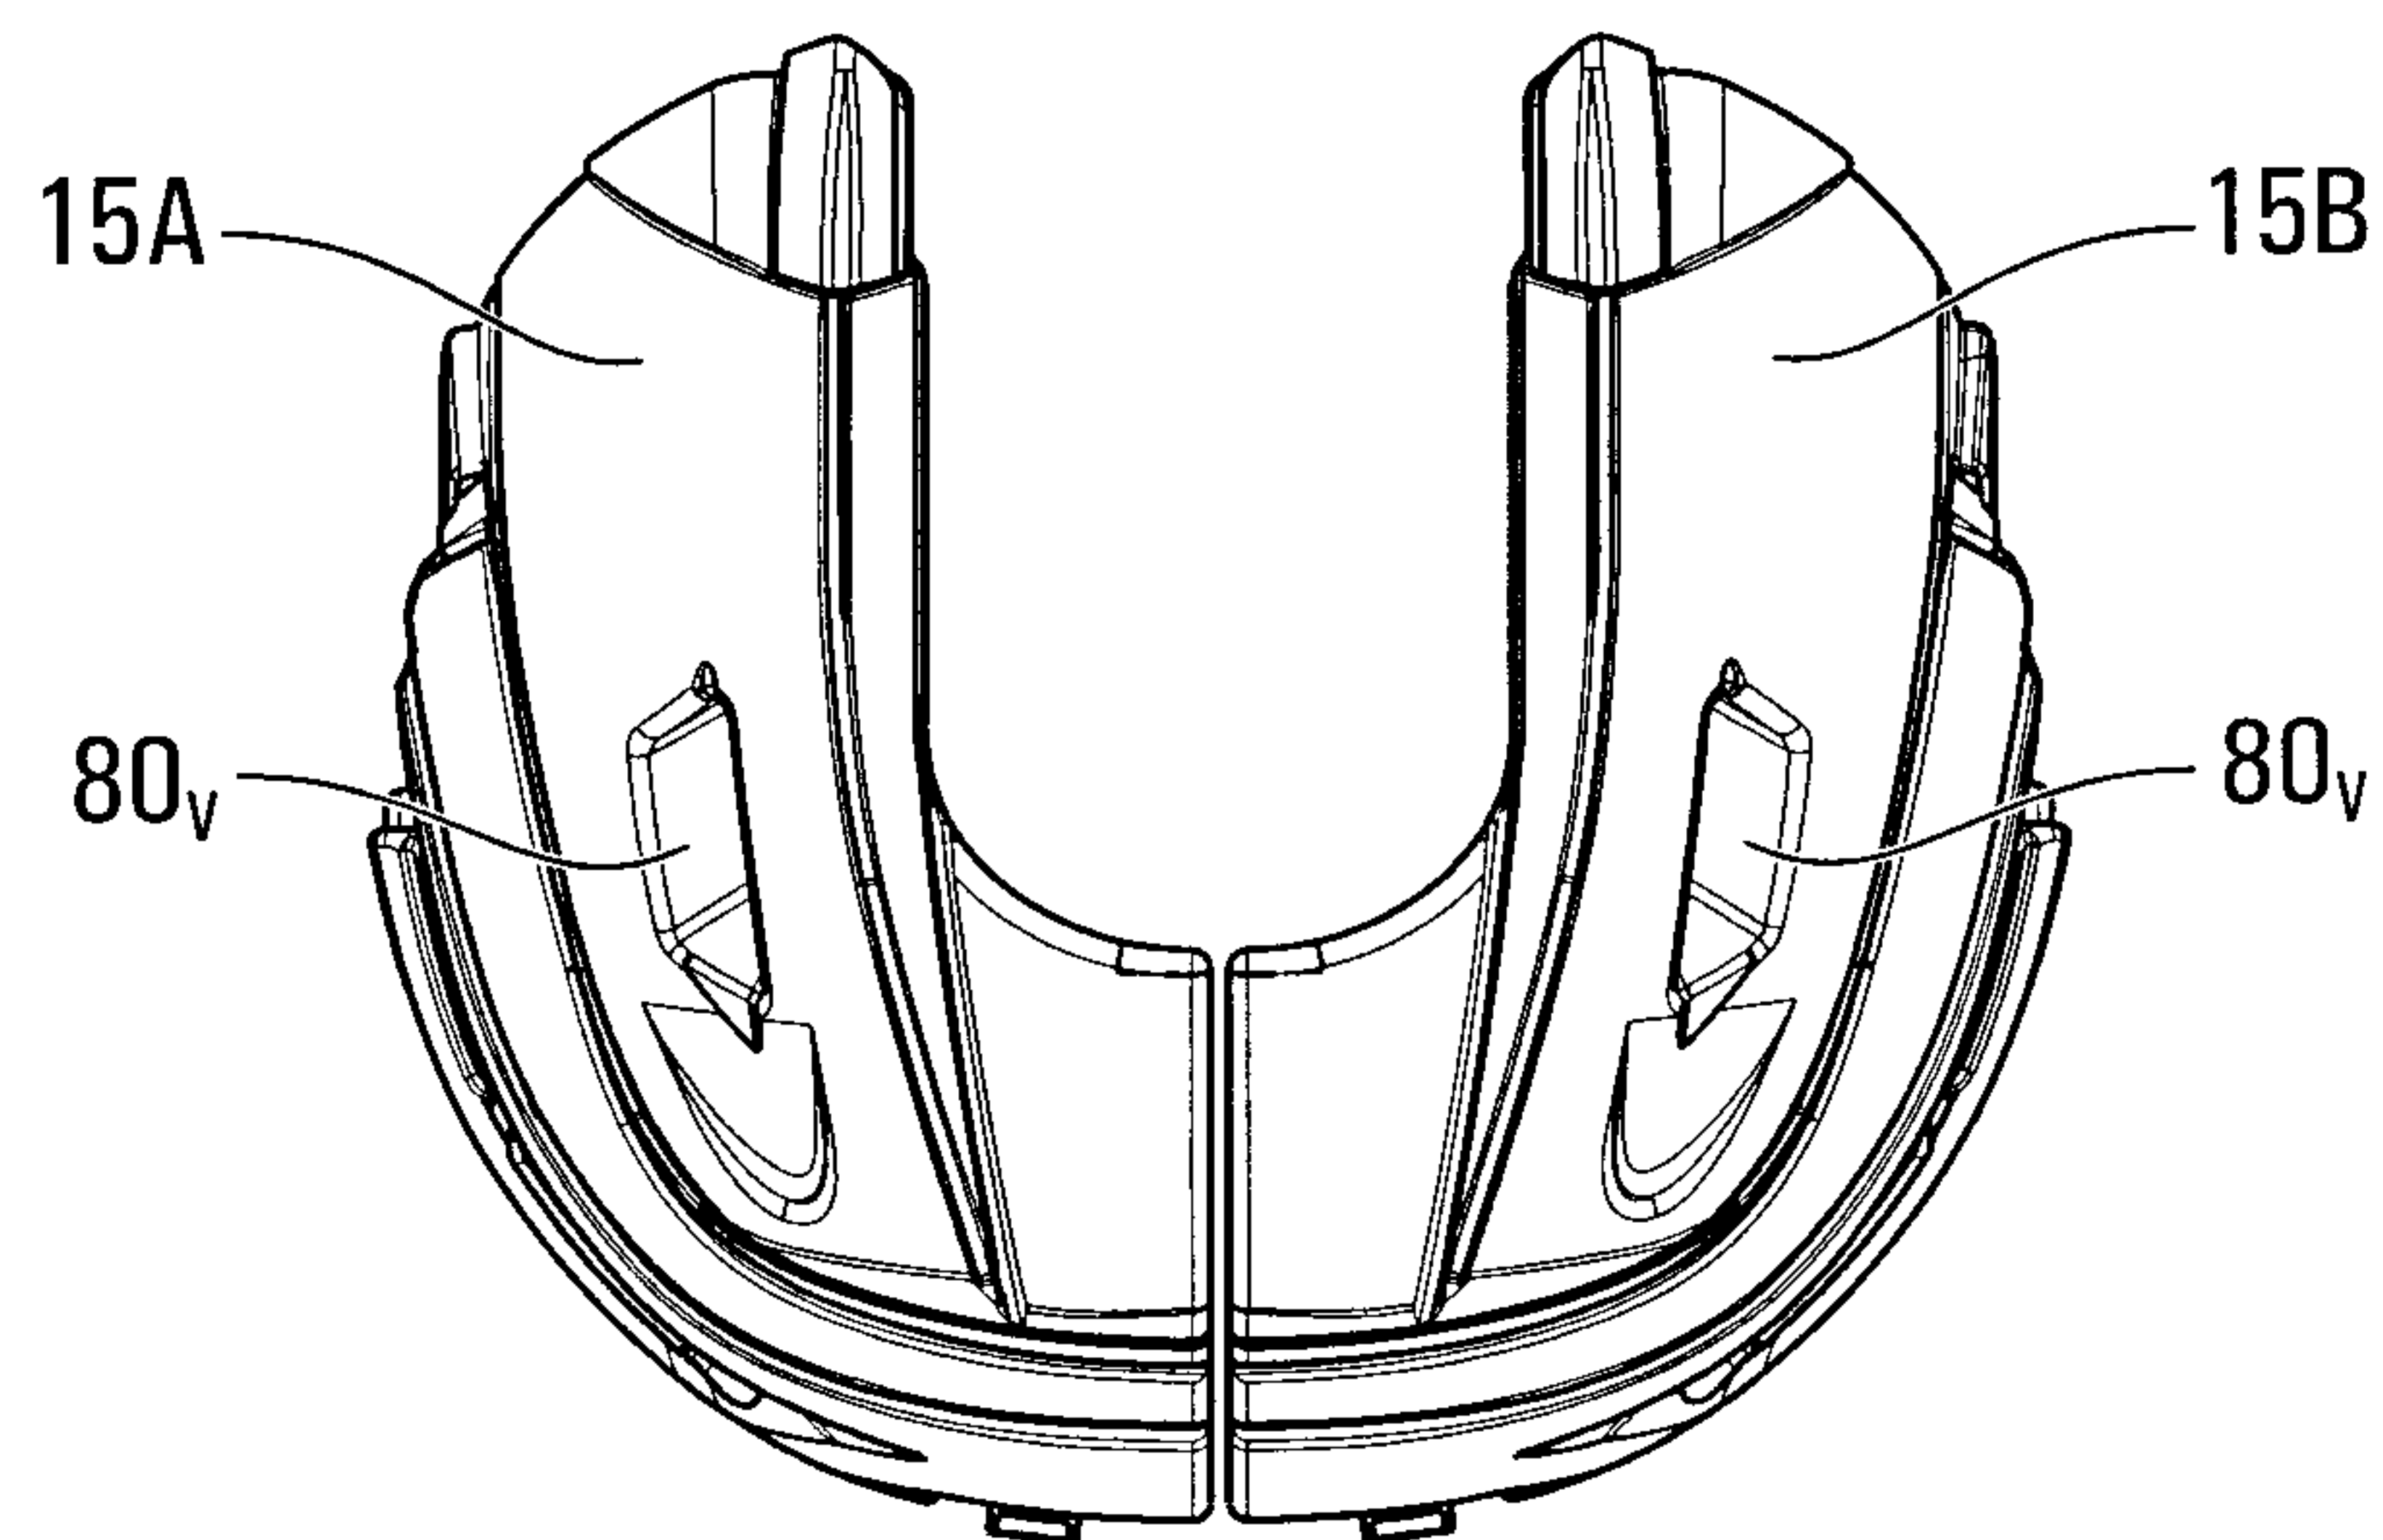


FIG. 41

26/40

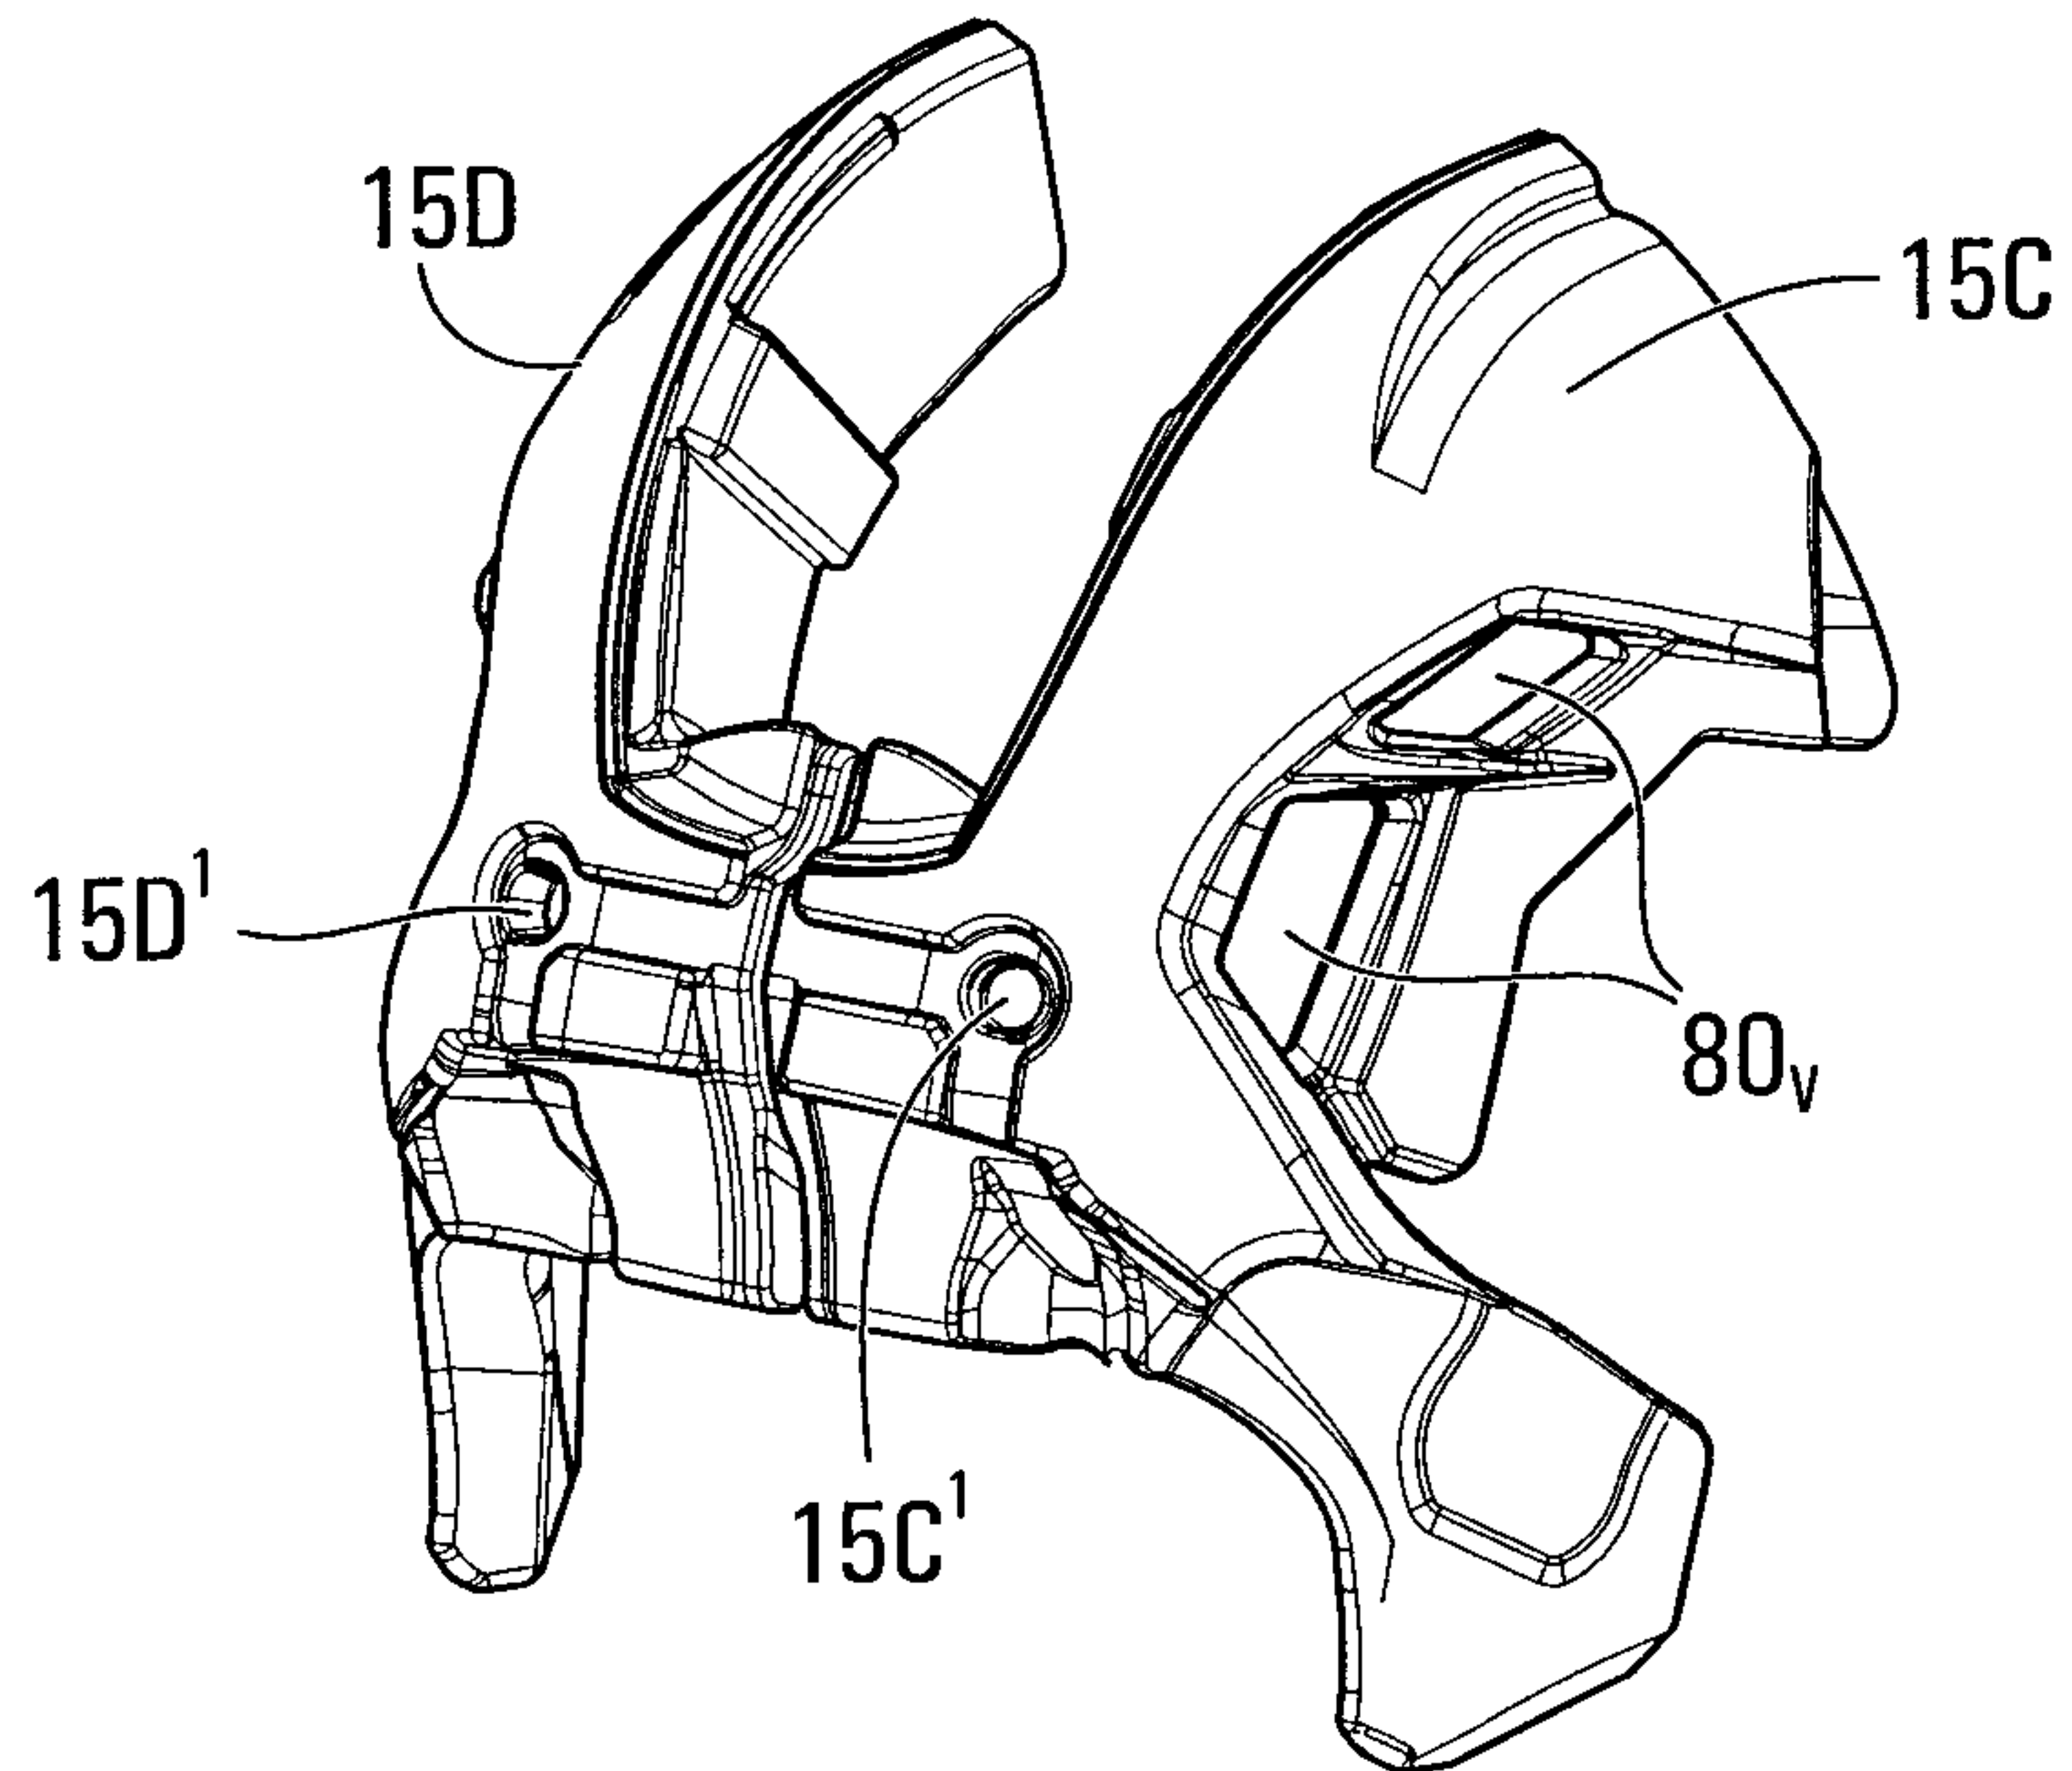


FIG. 42

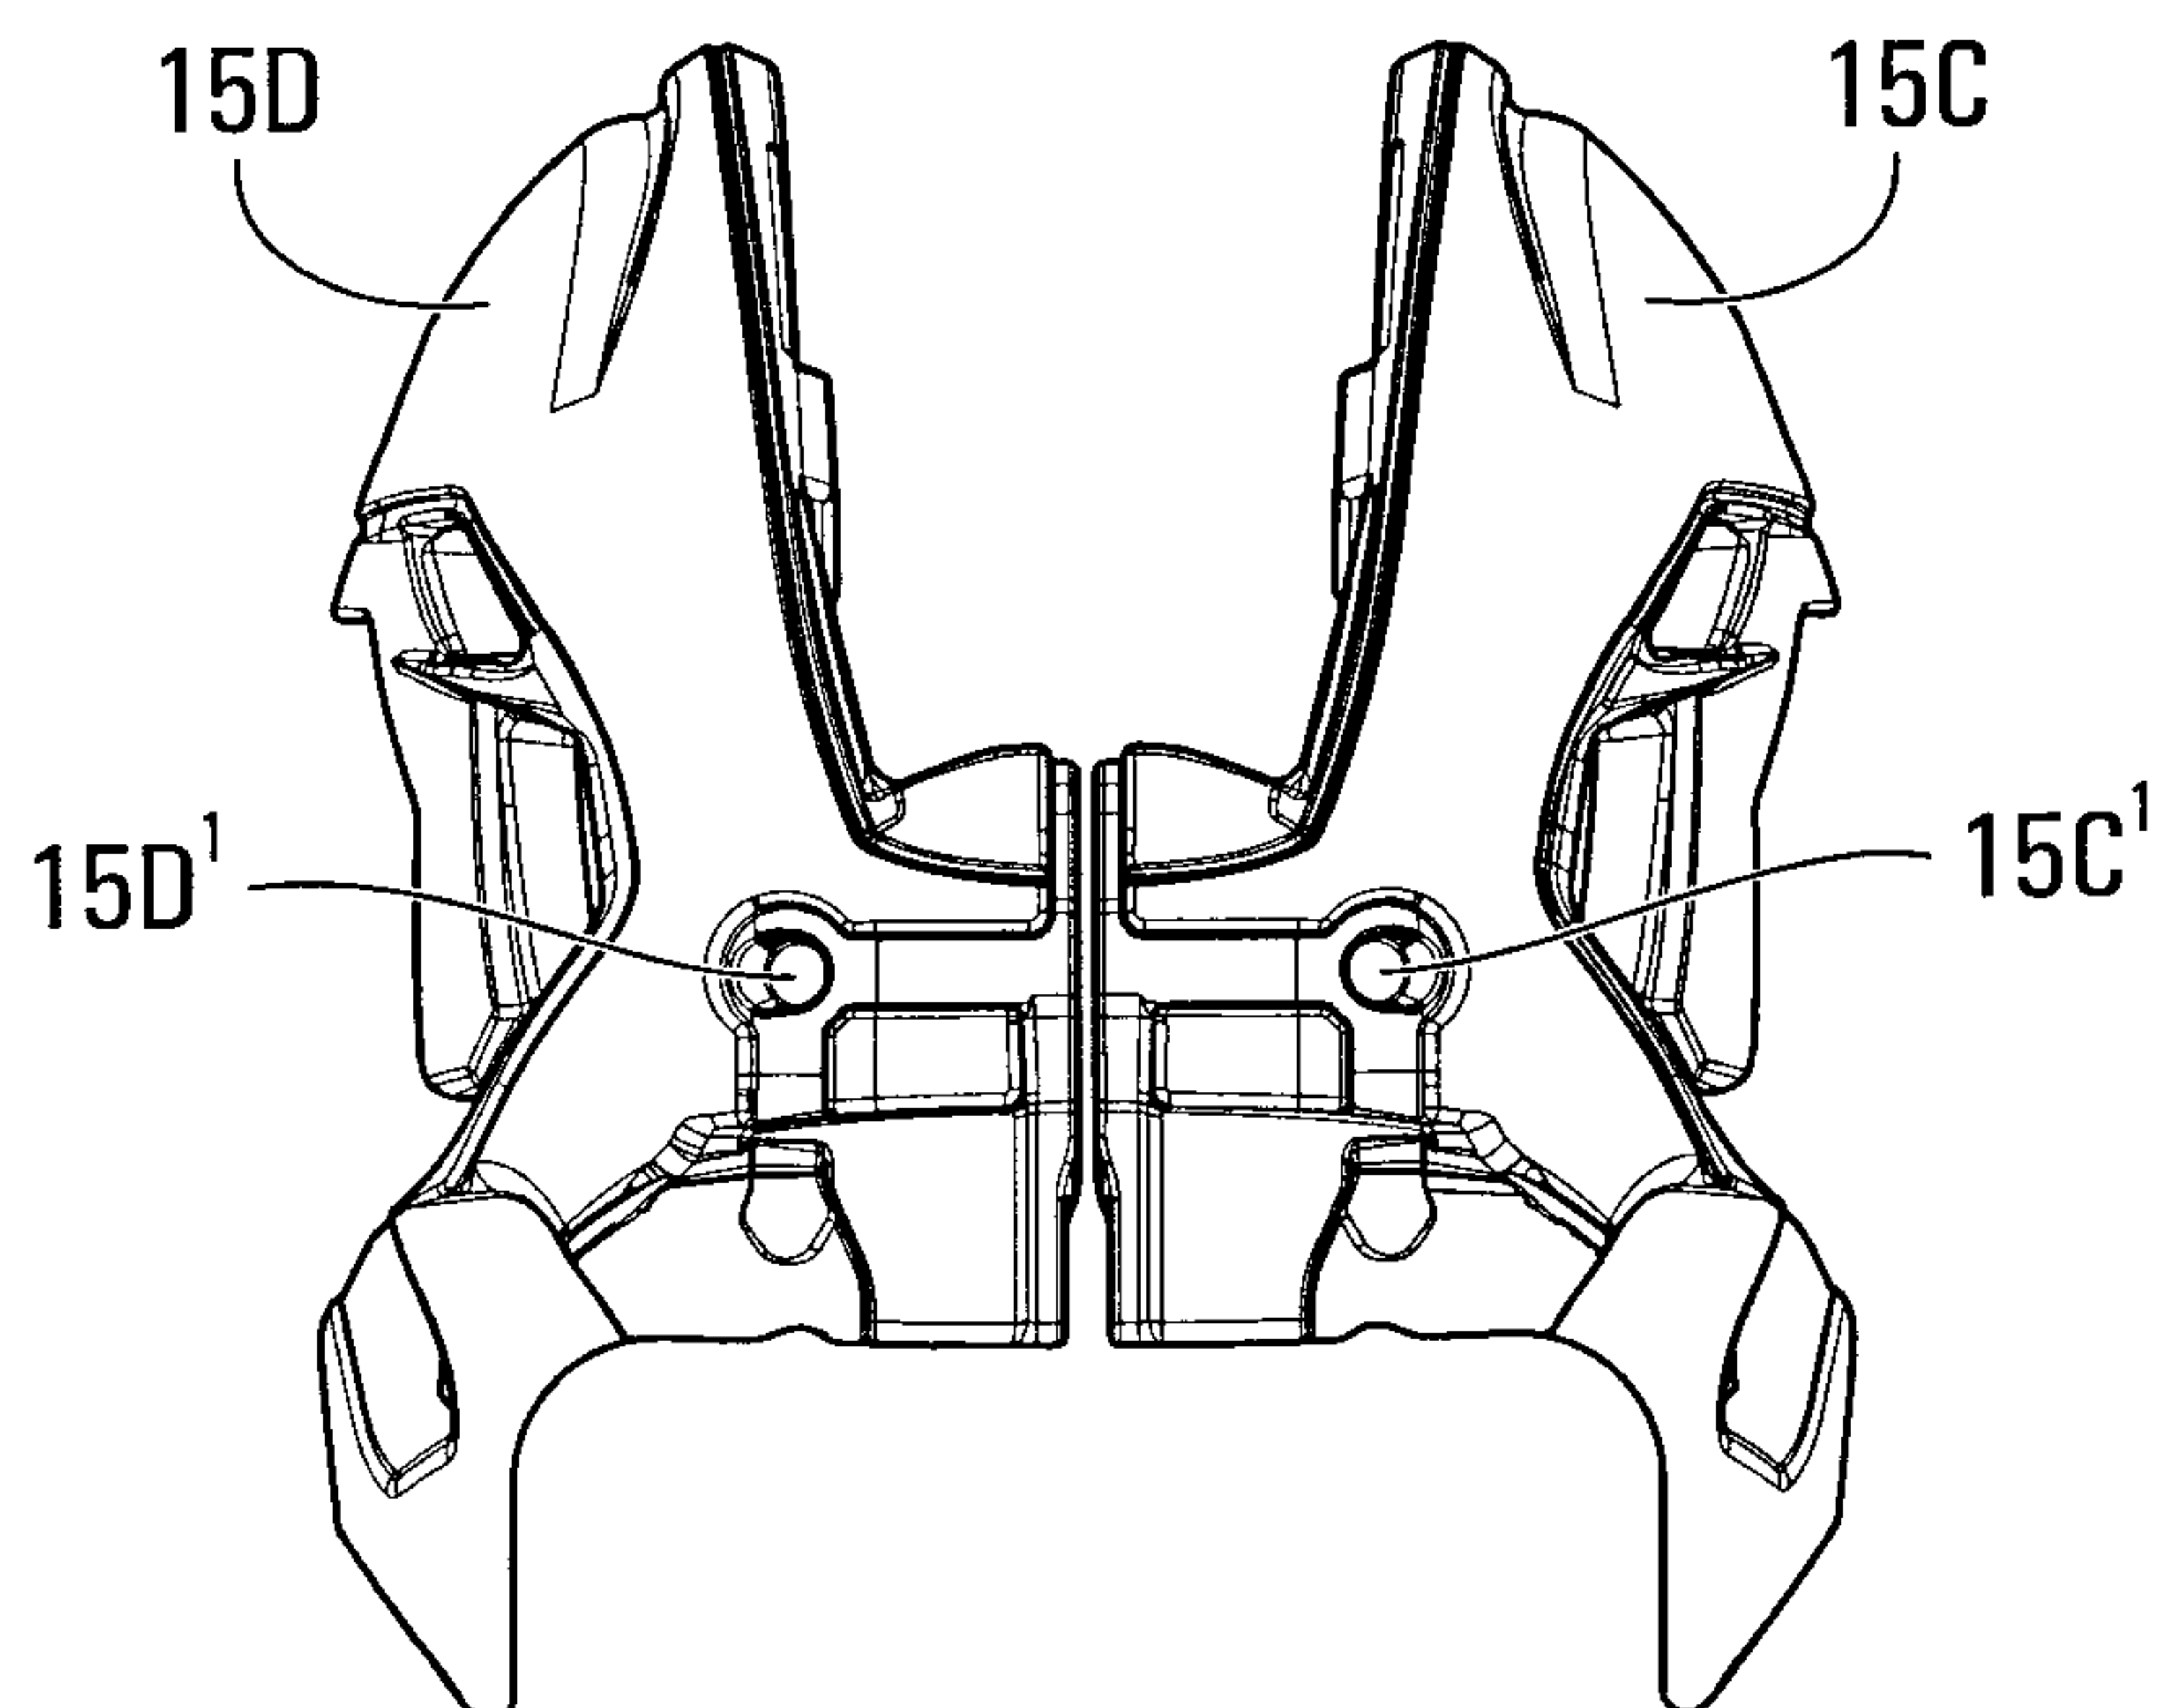


FIG. 43

27/40

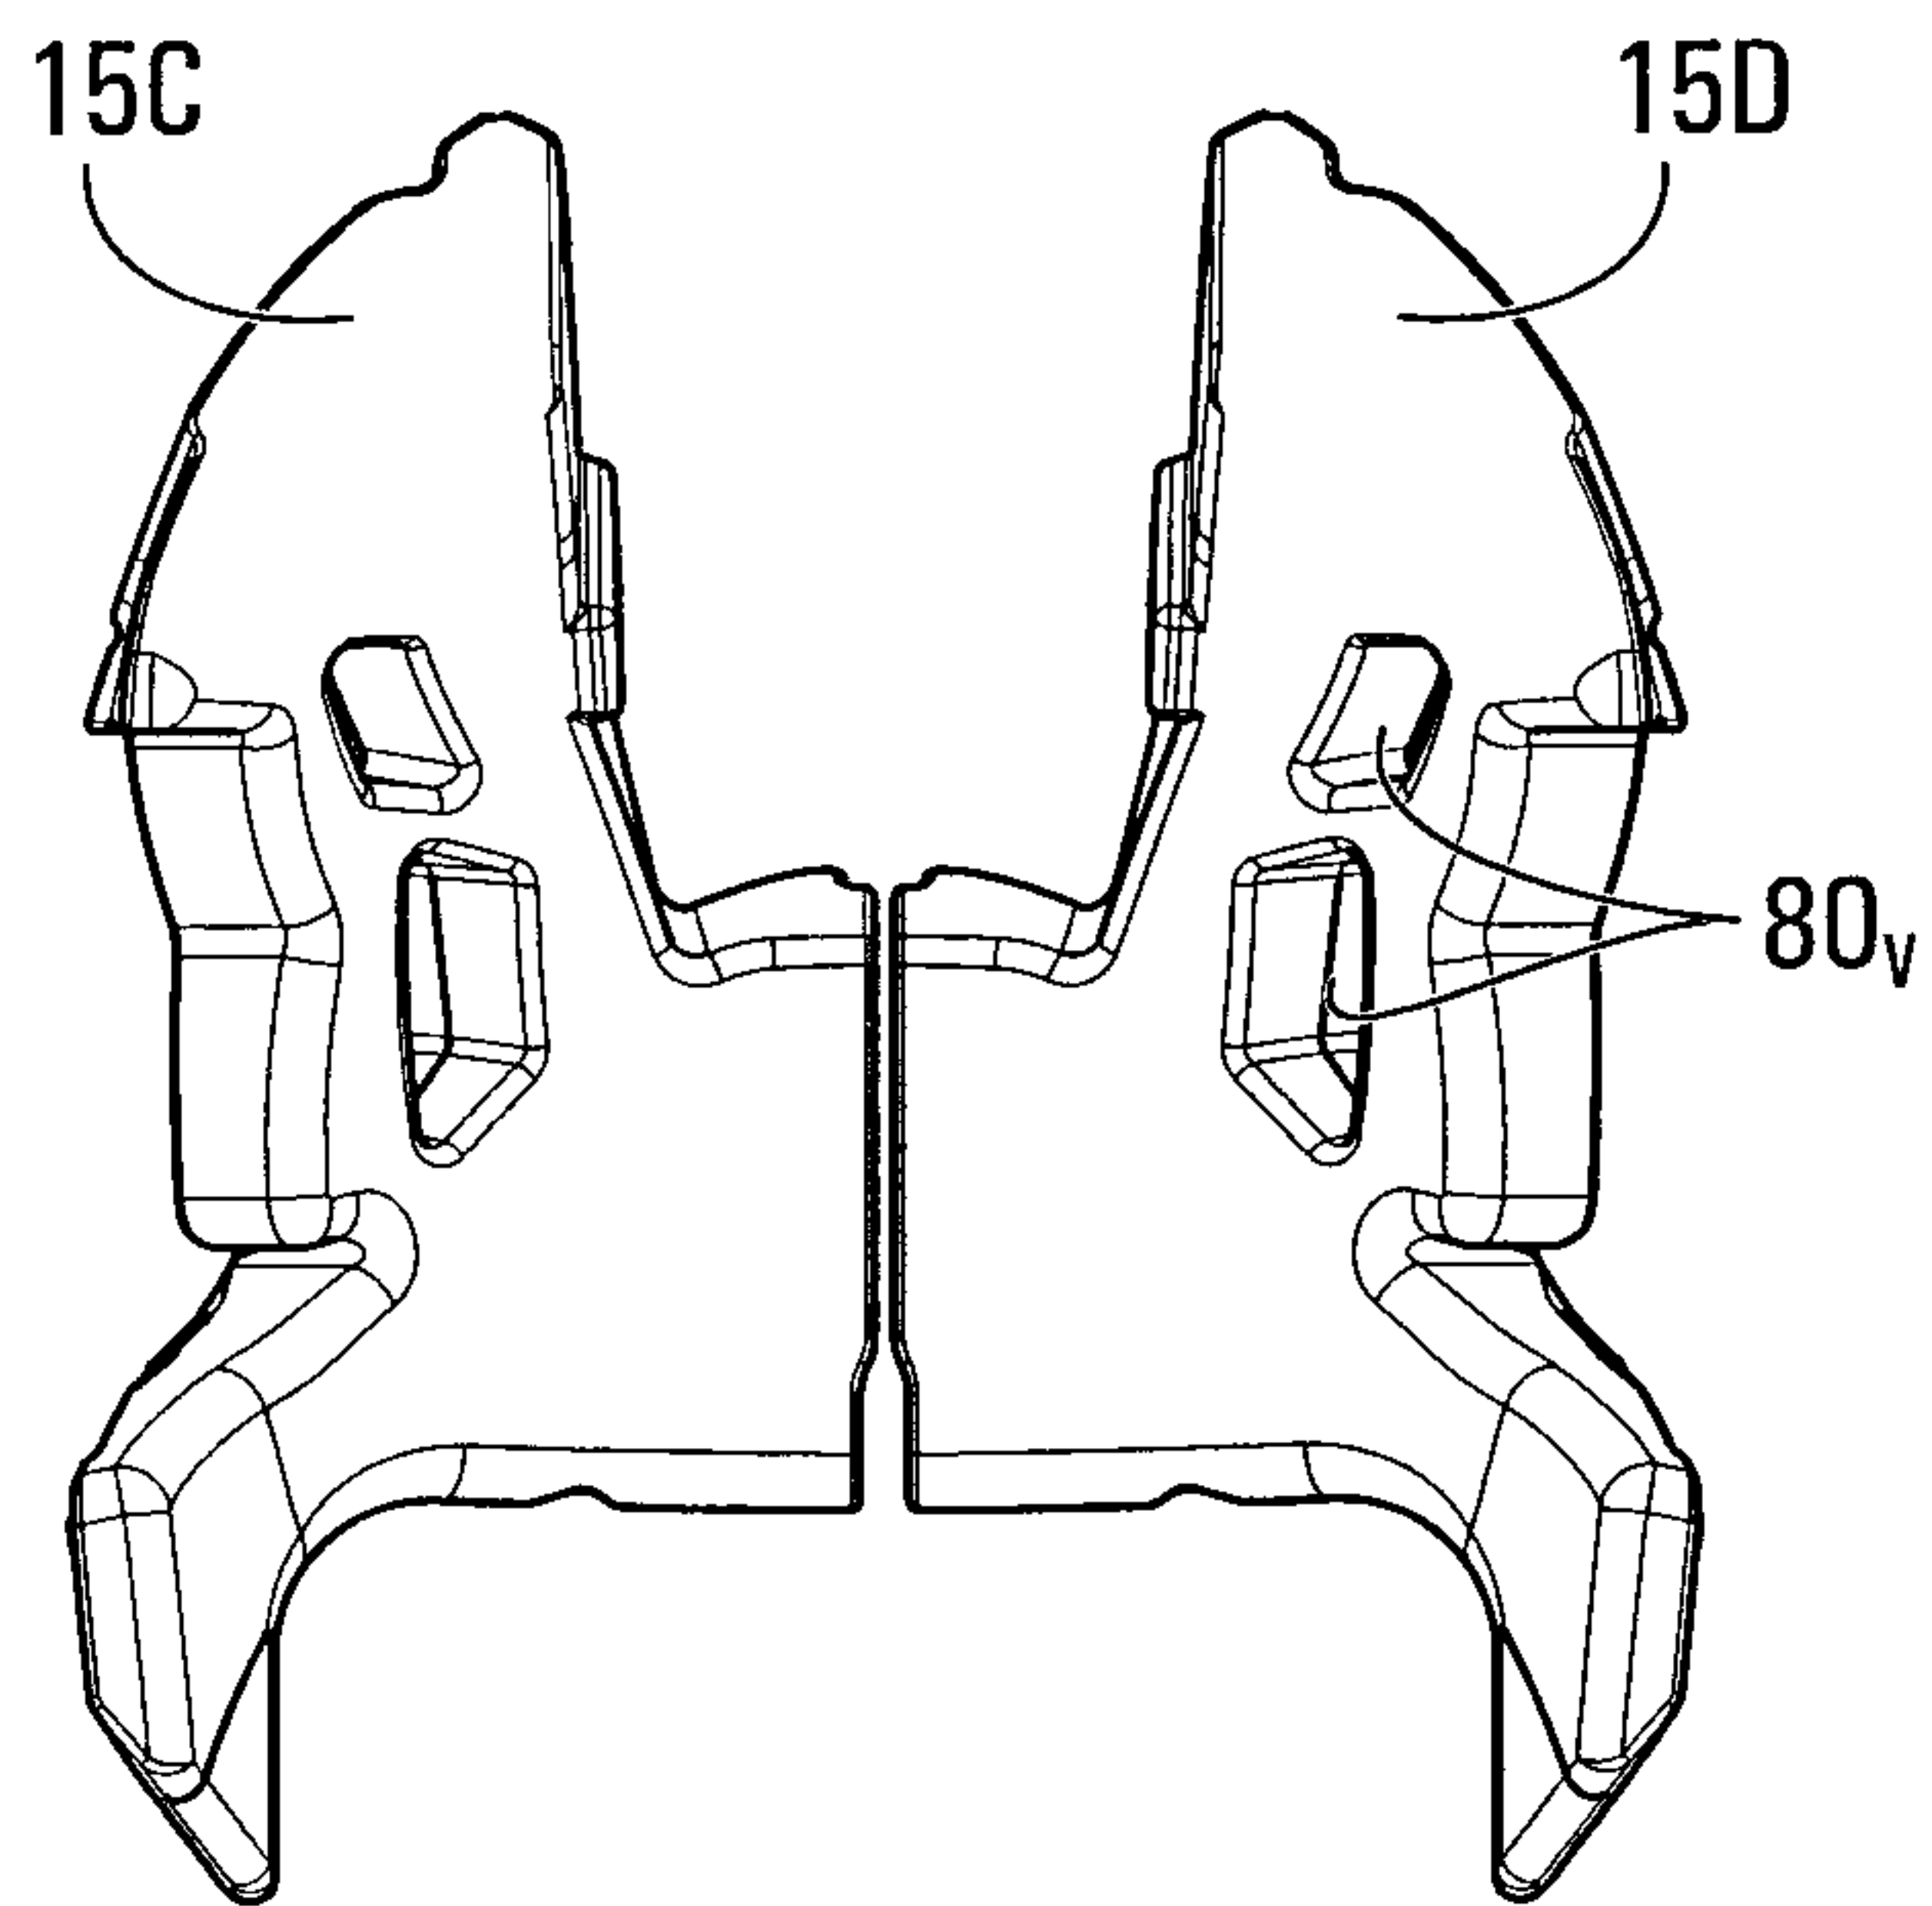


FIG. 44

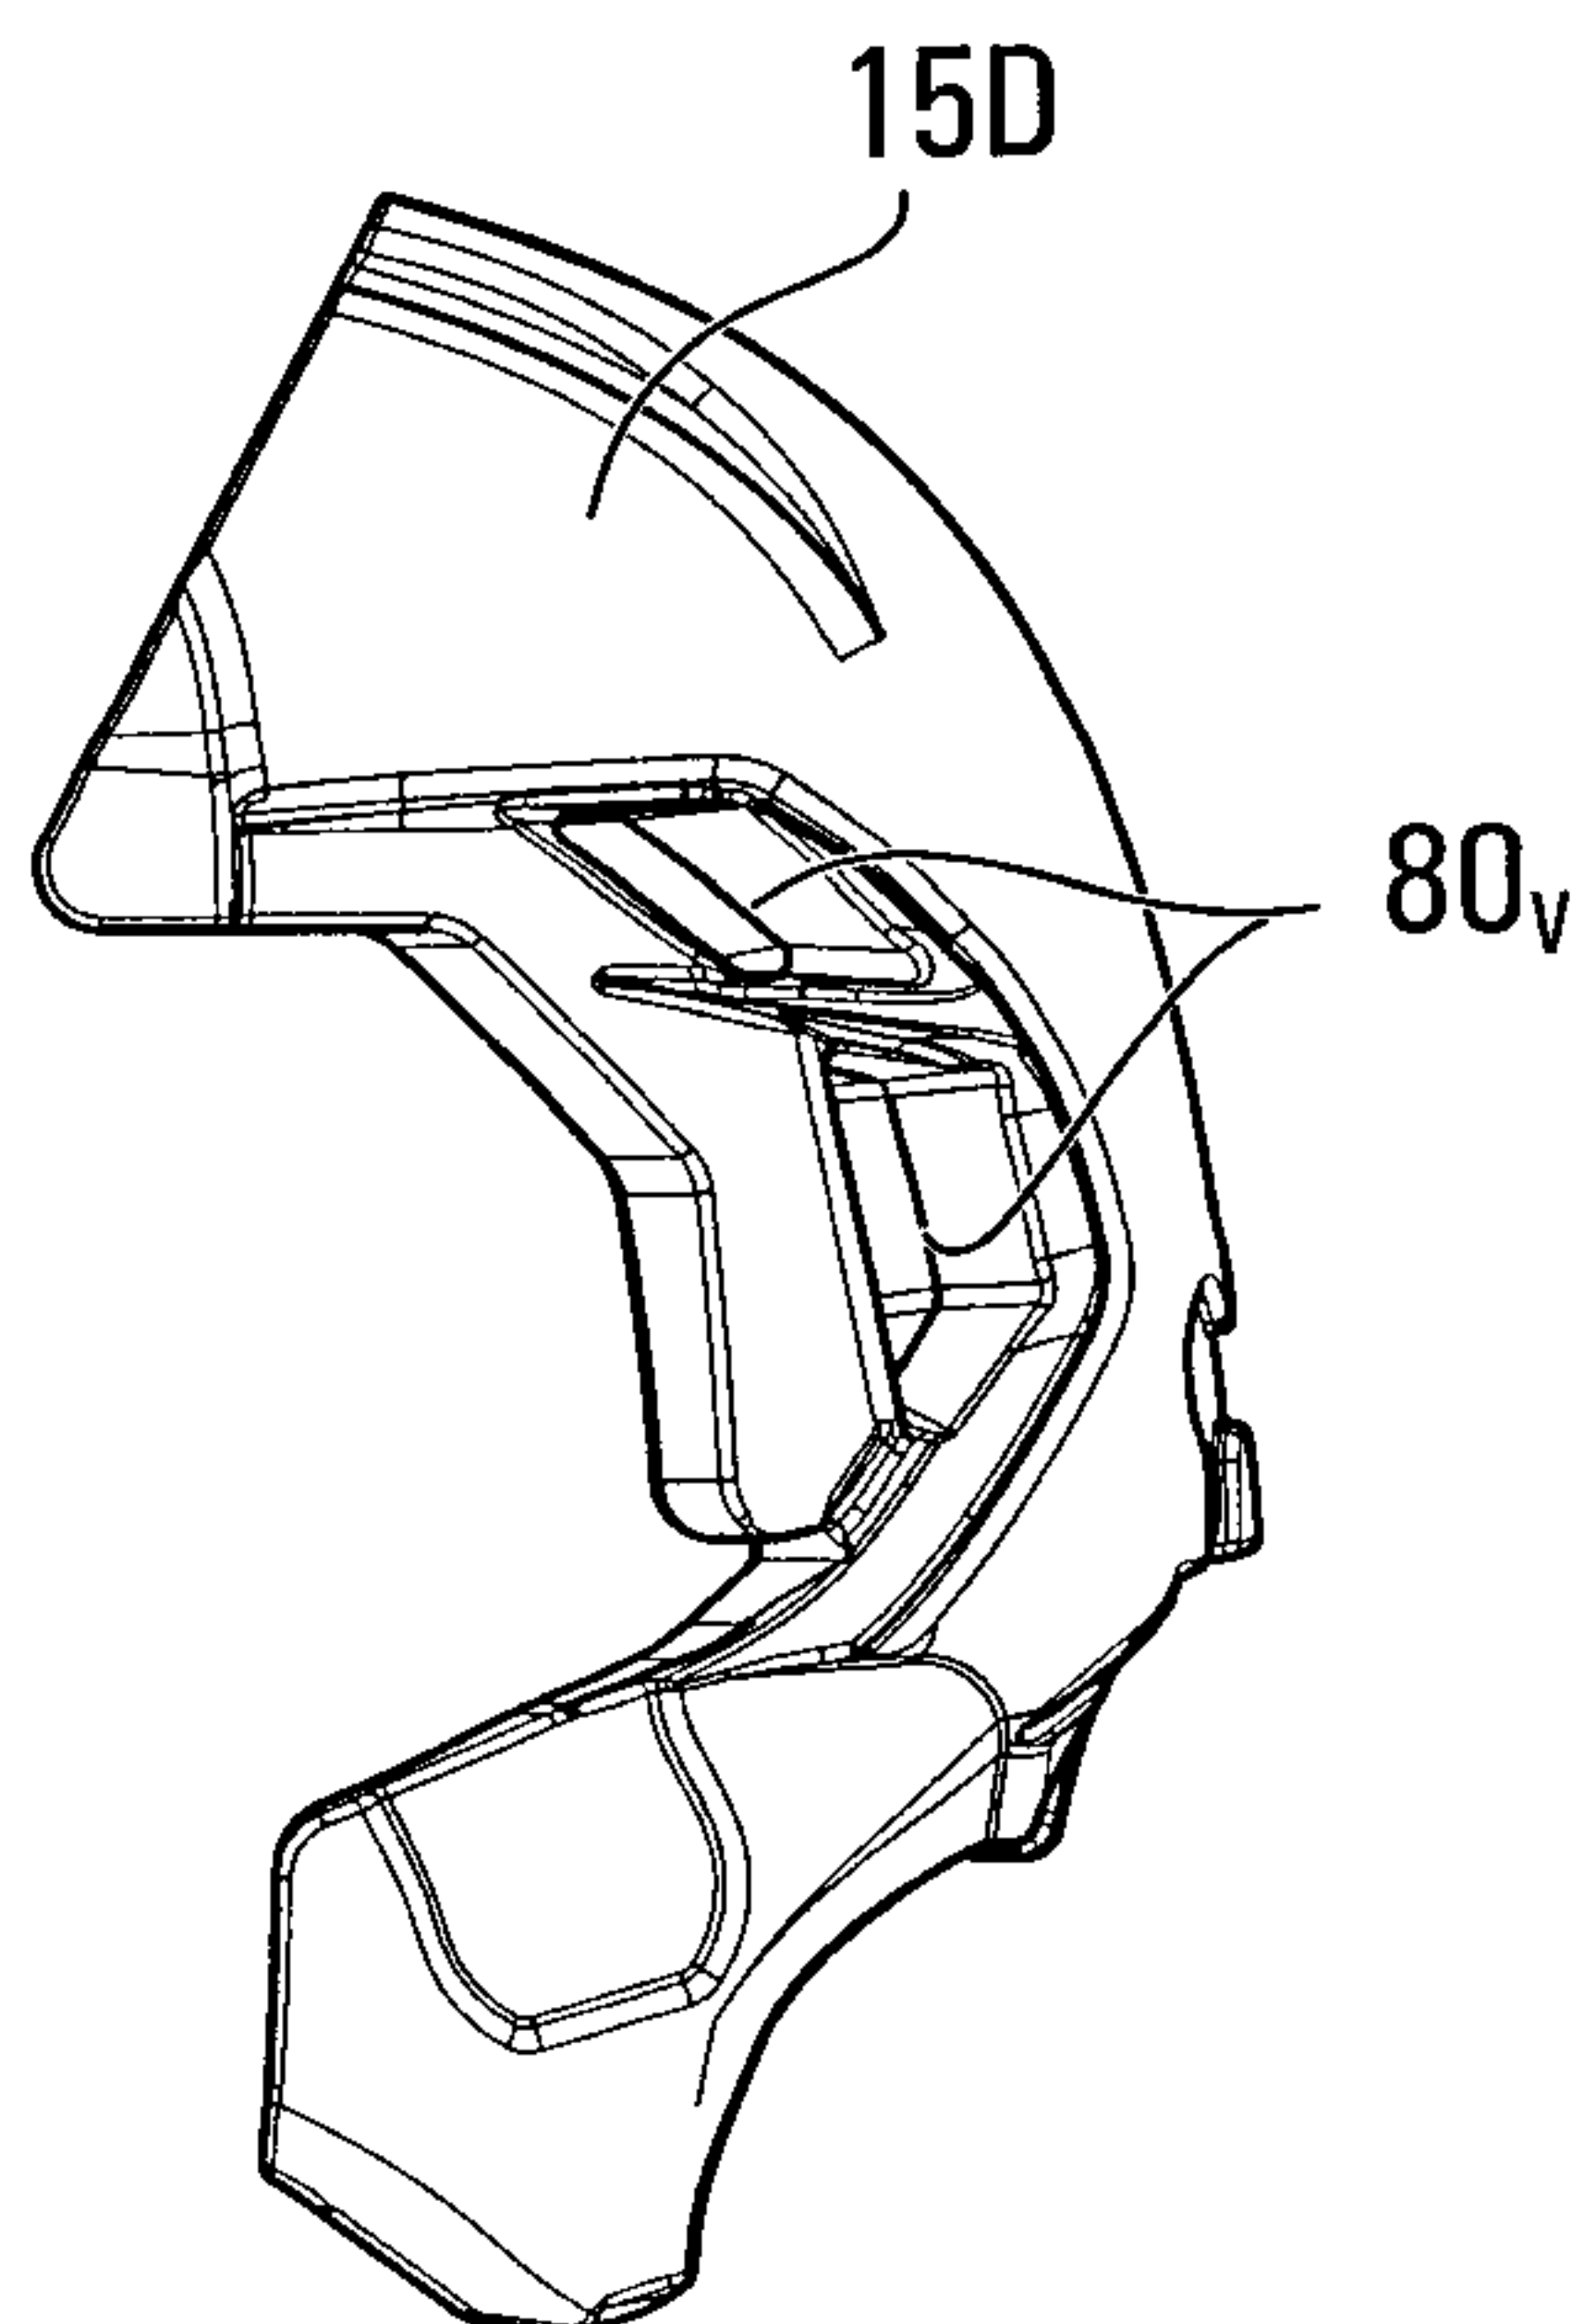


FIG. 45

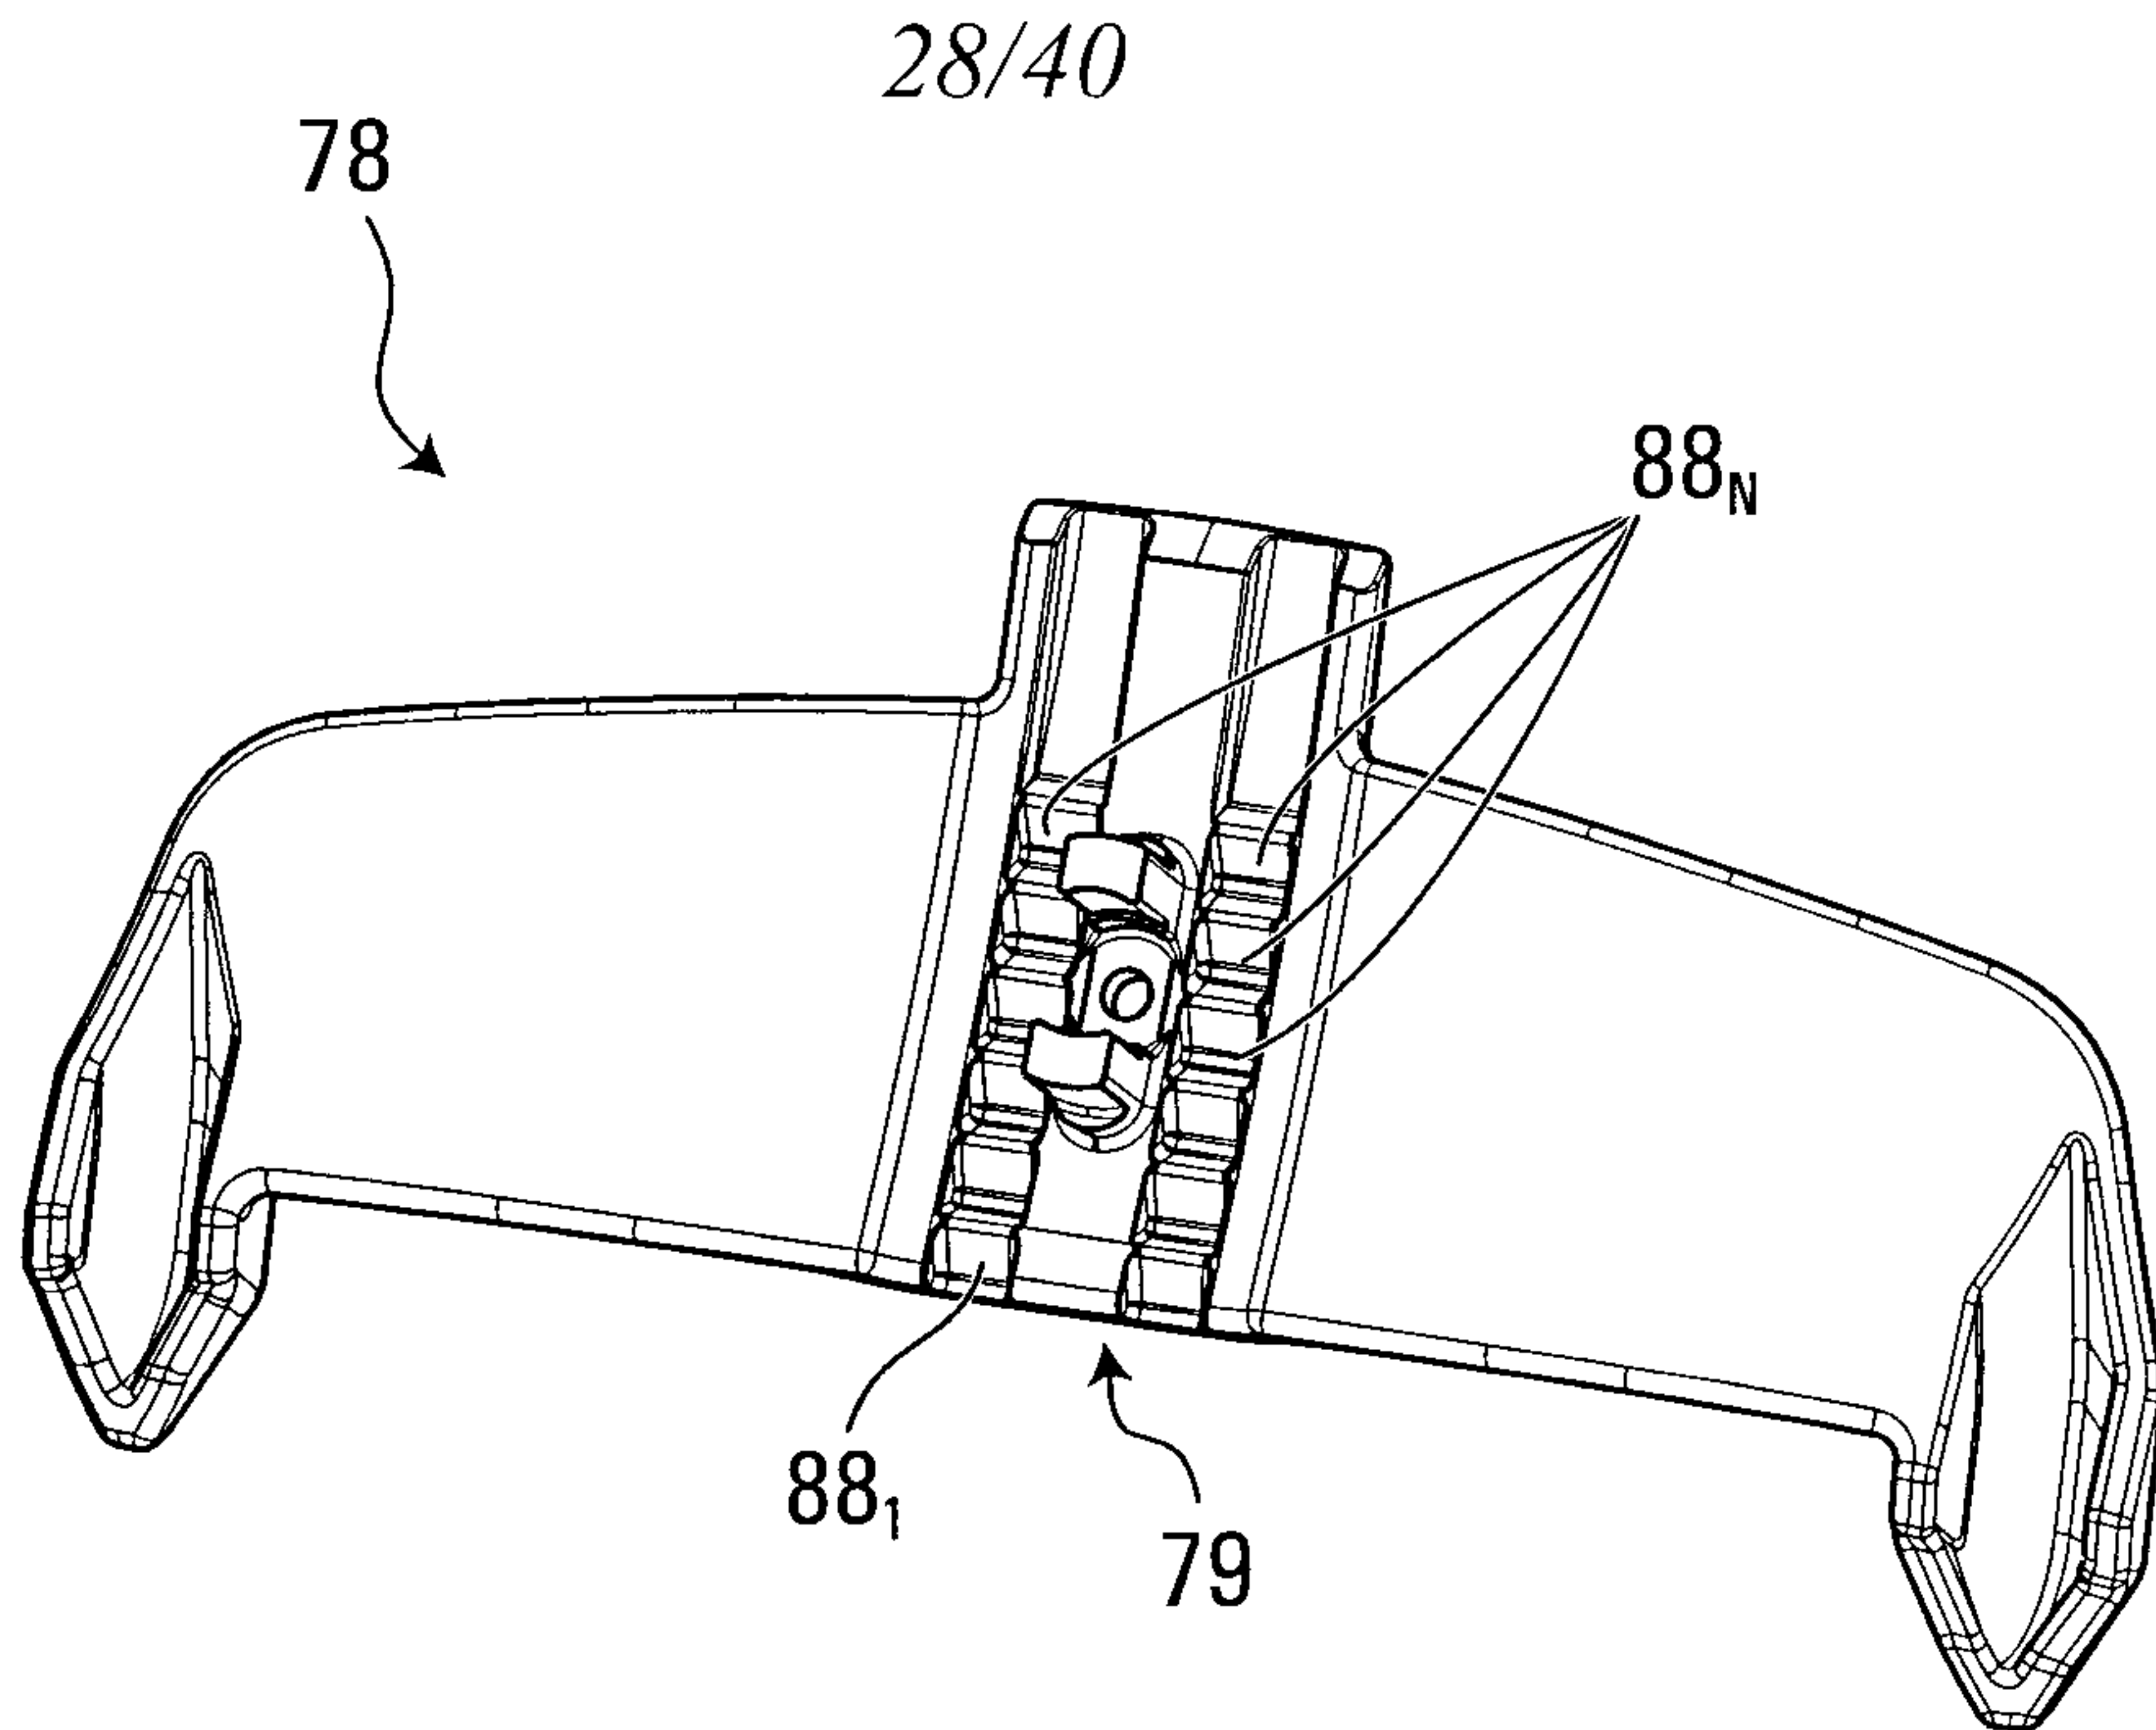


FIG. 46

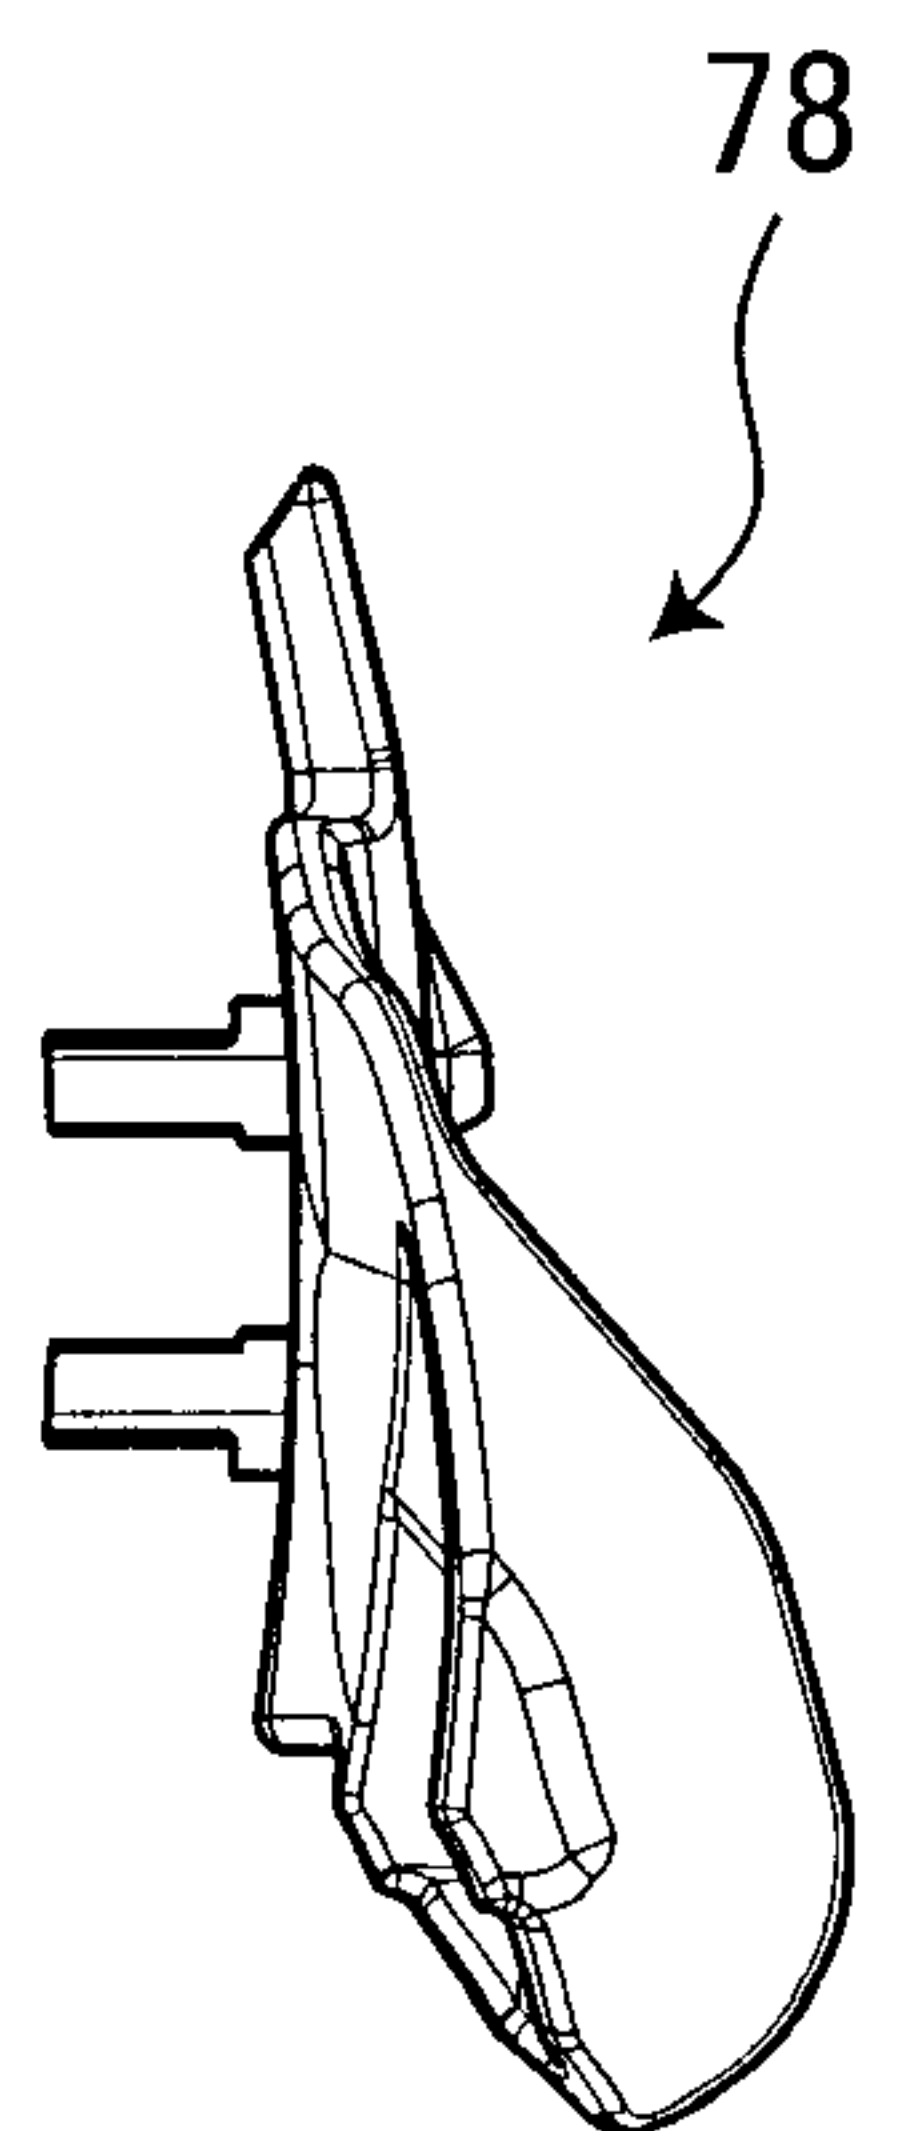


FIG. 48

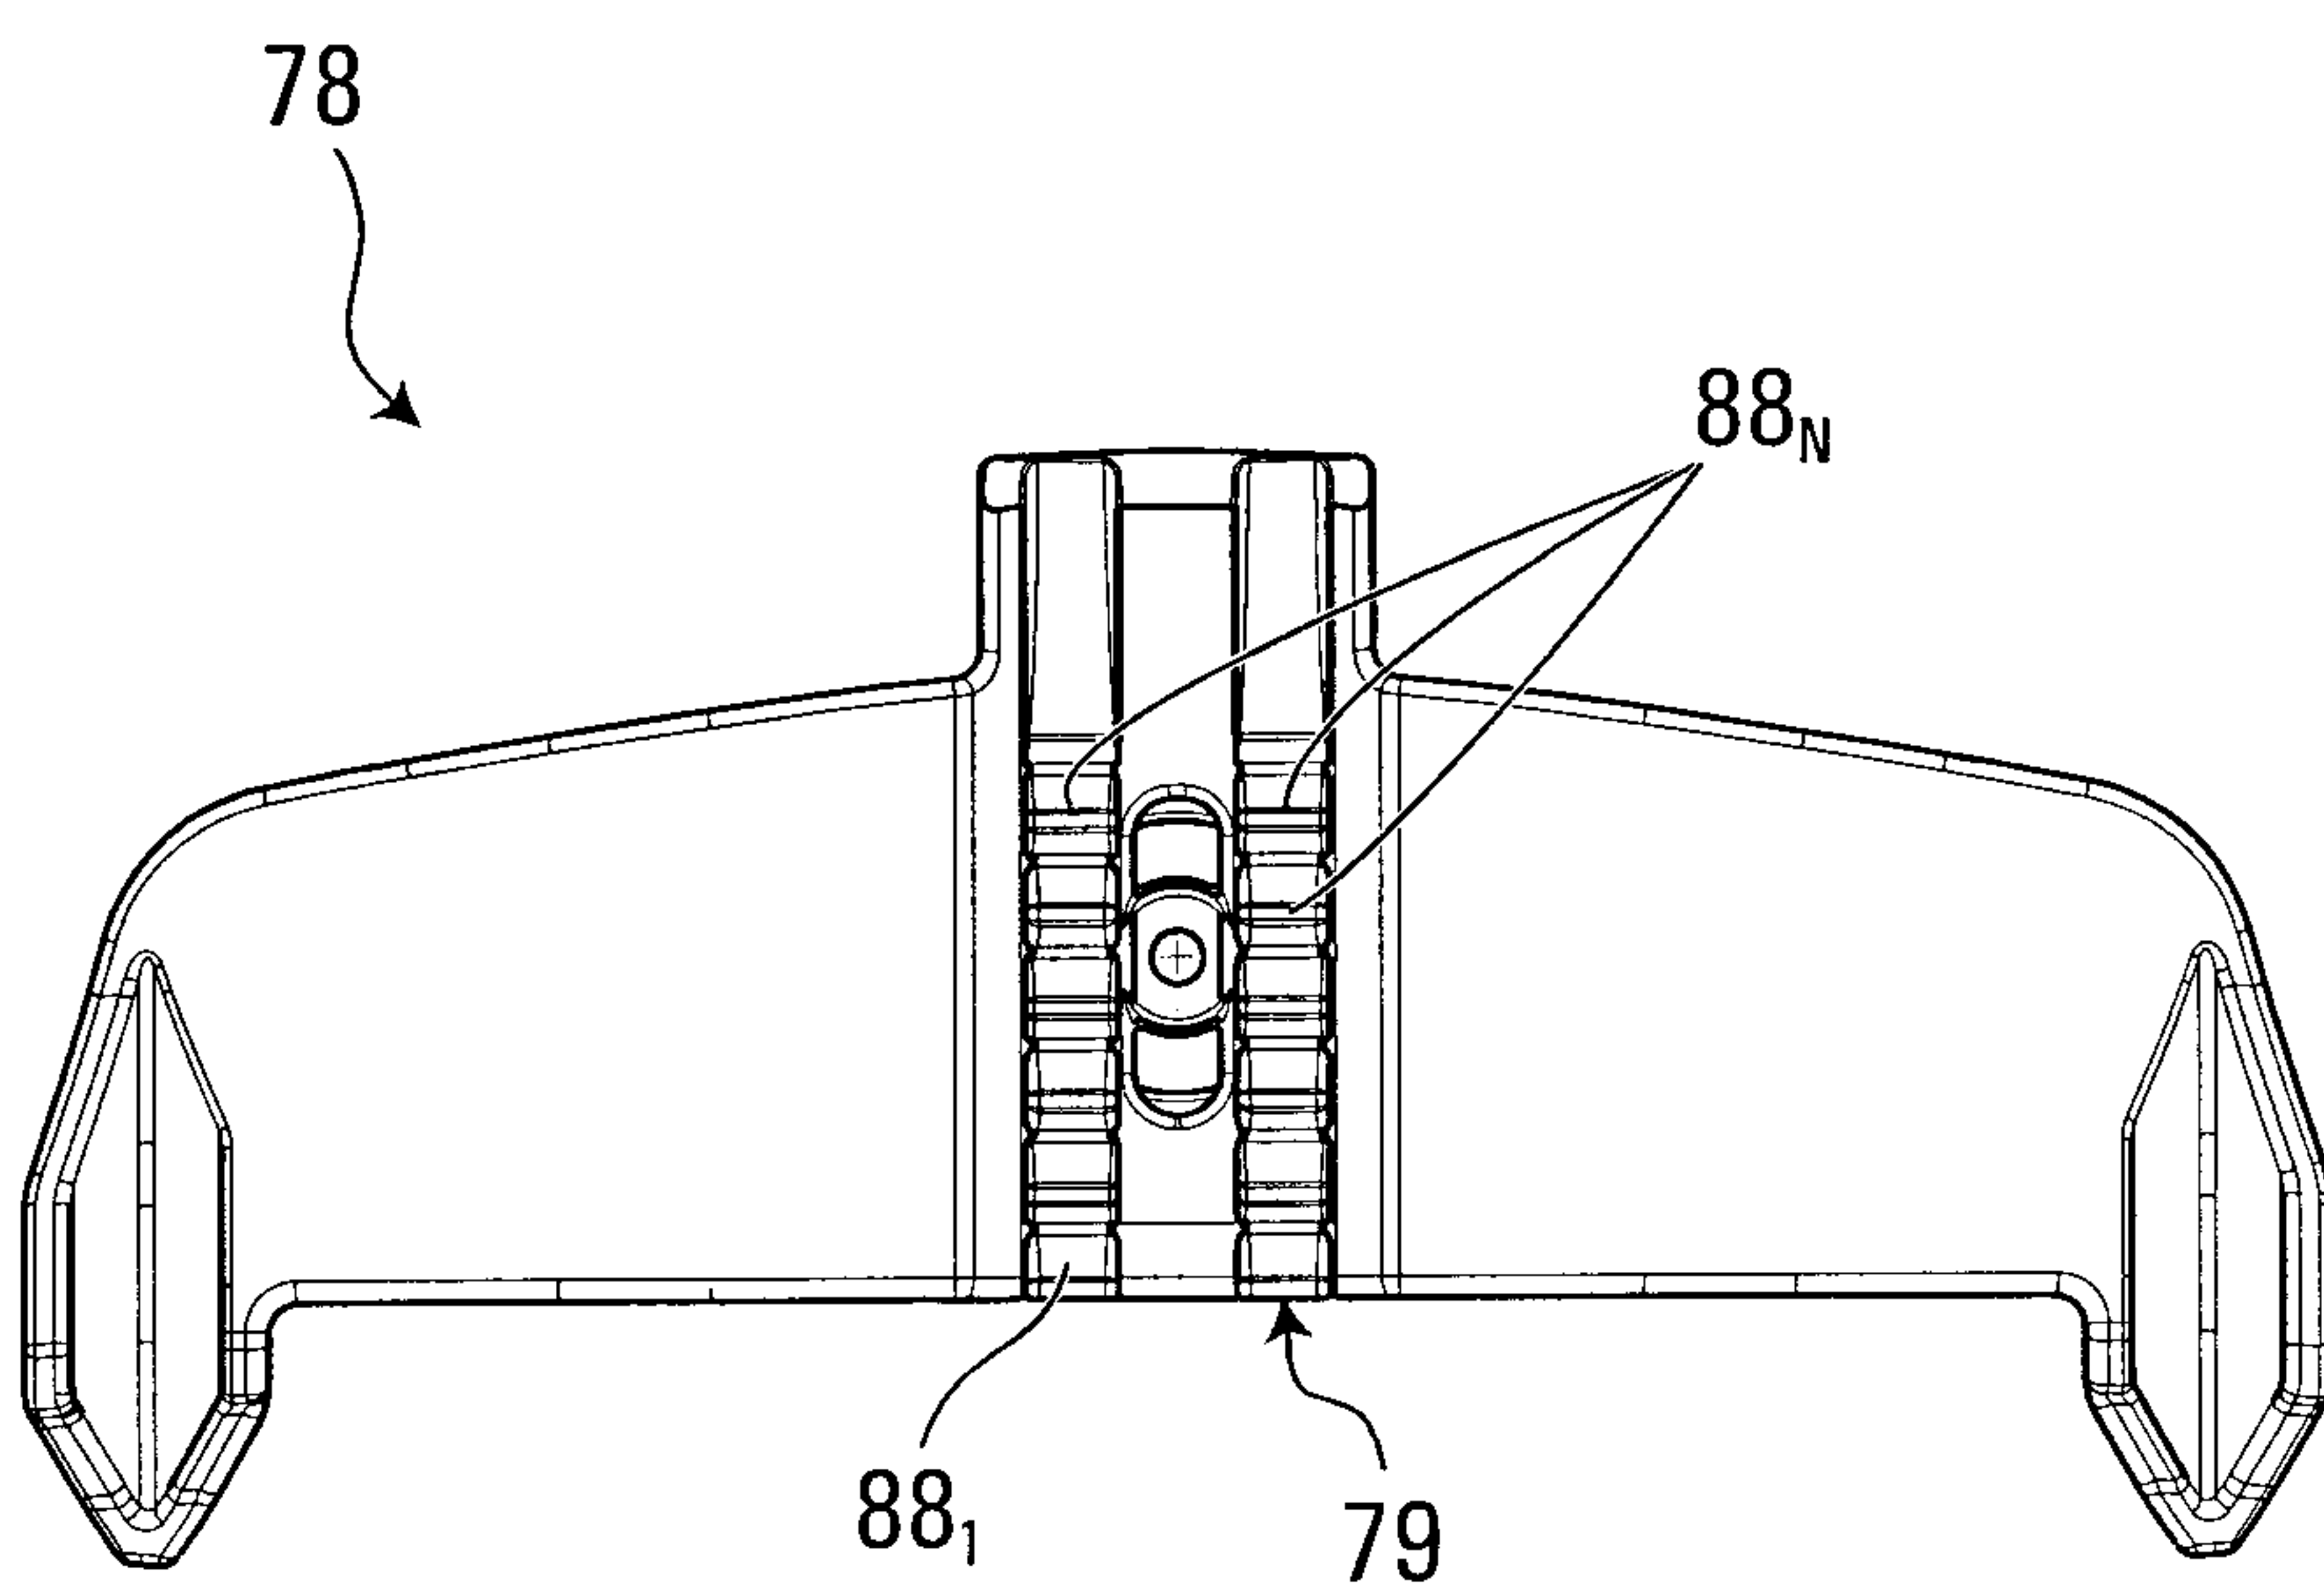


FIG. 47

29/40

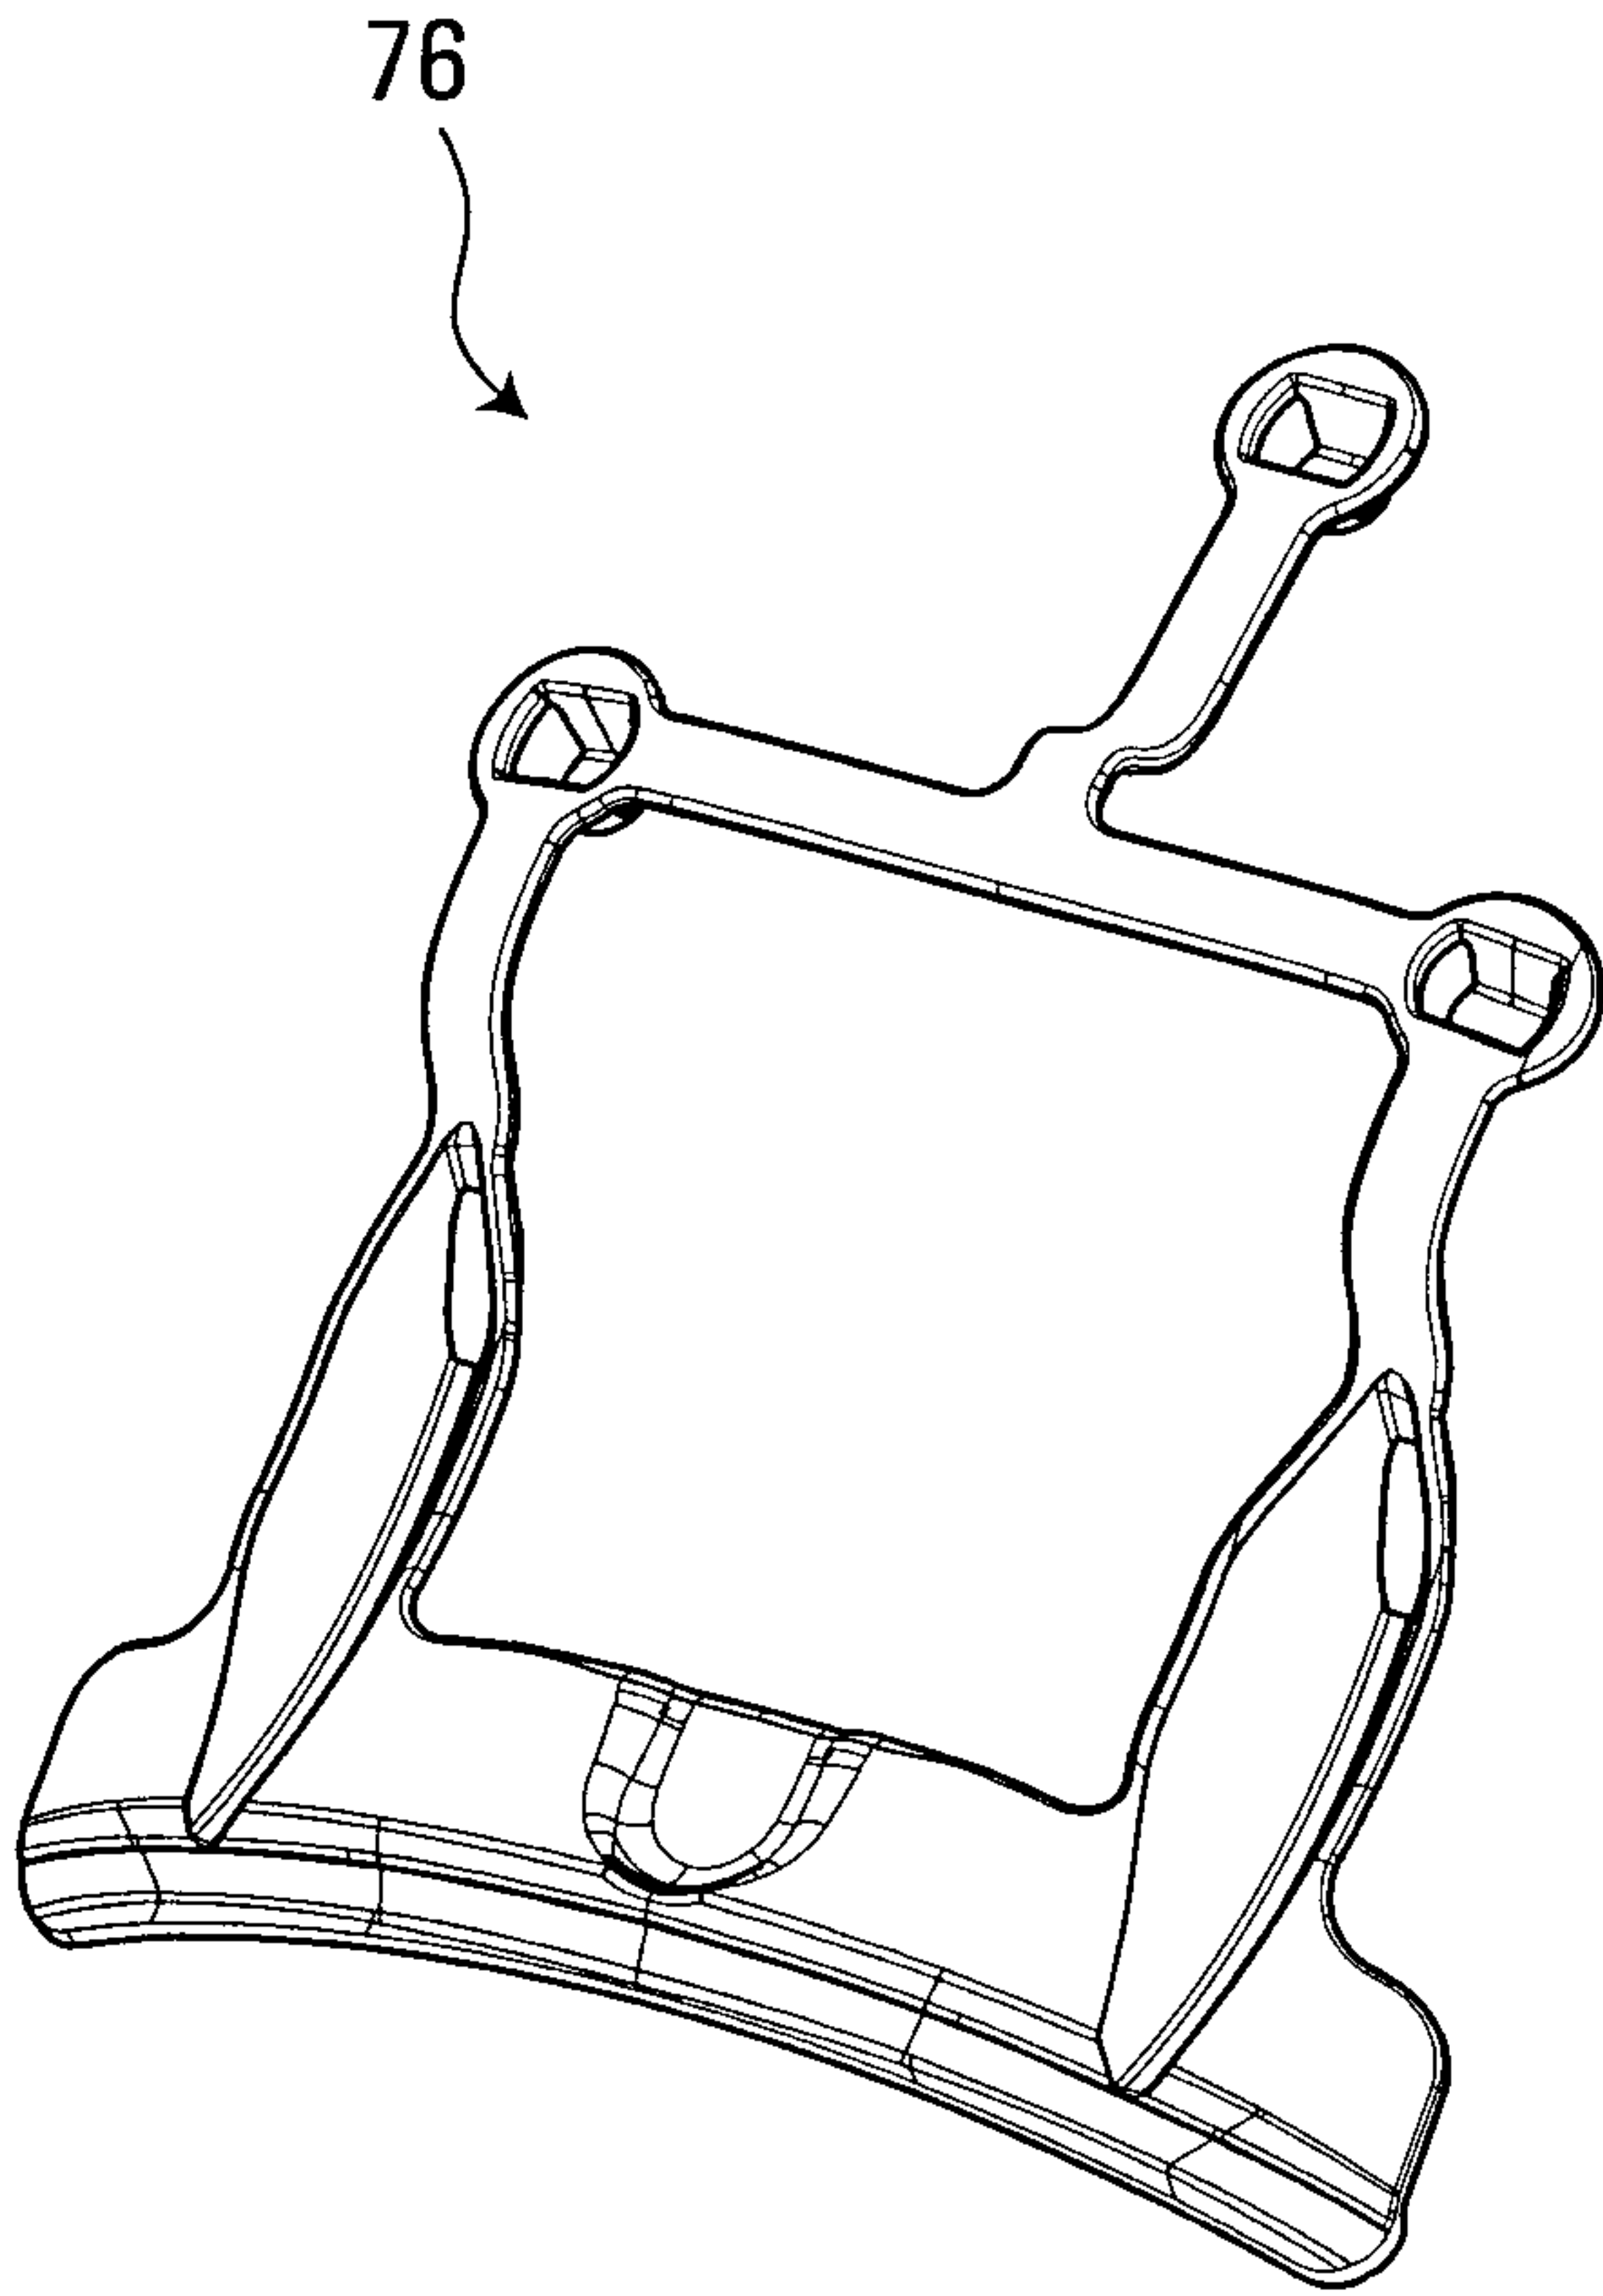


FIG. 49

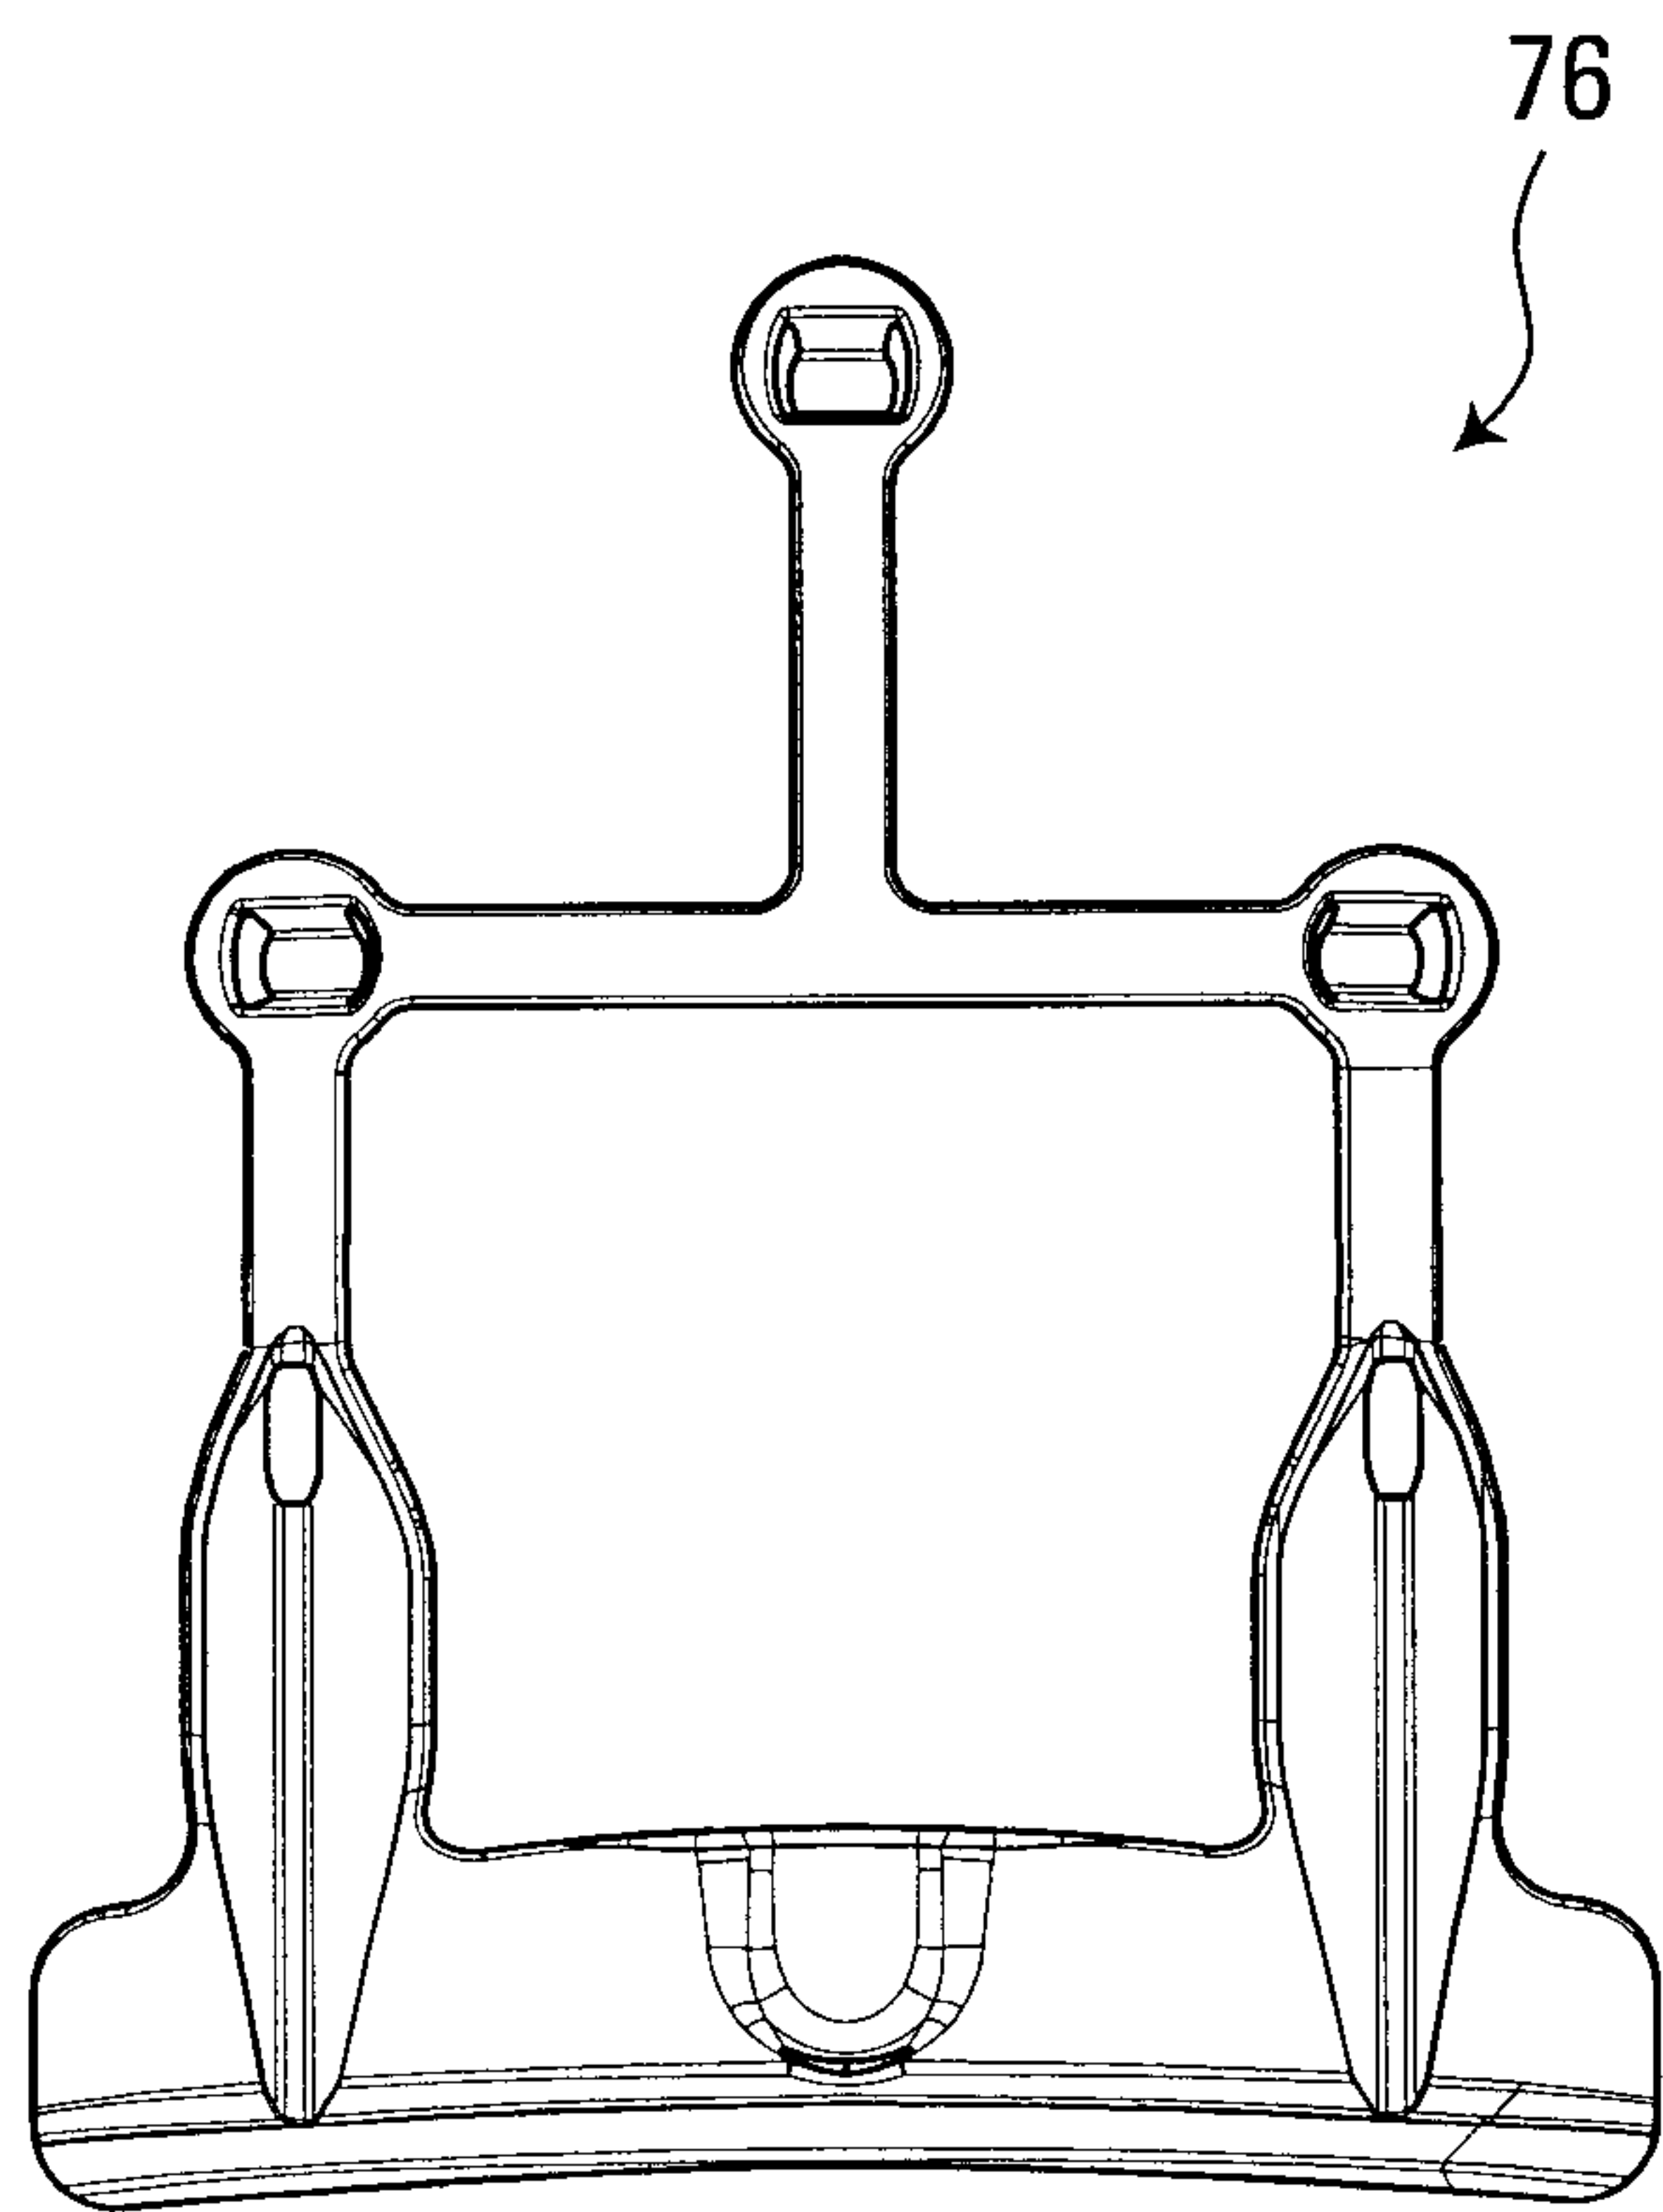


FIG. 50

30/40

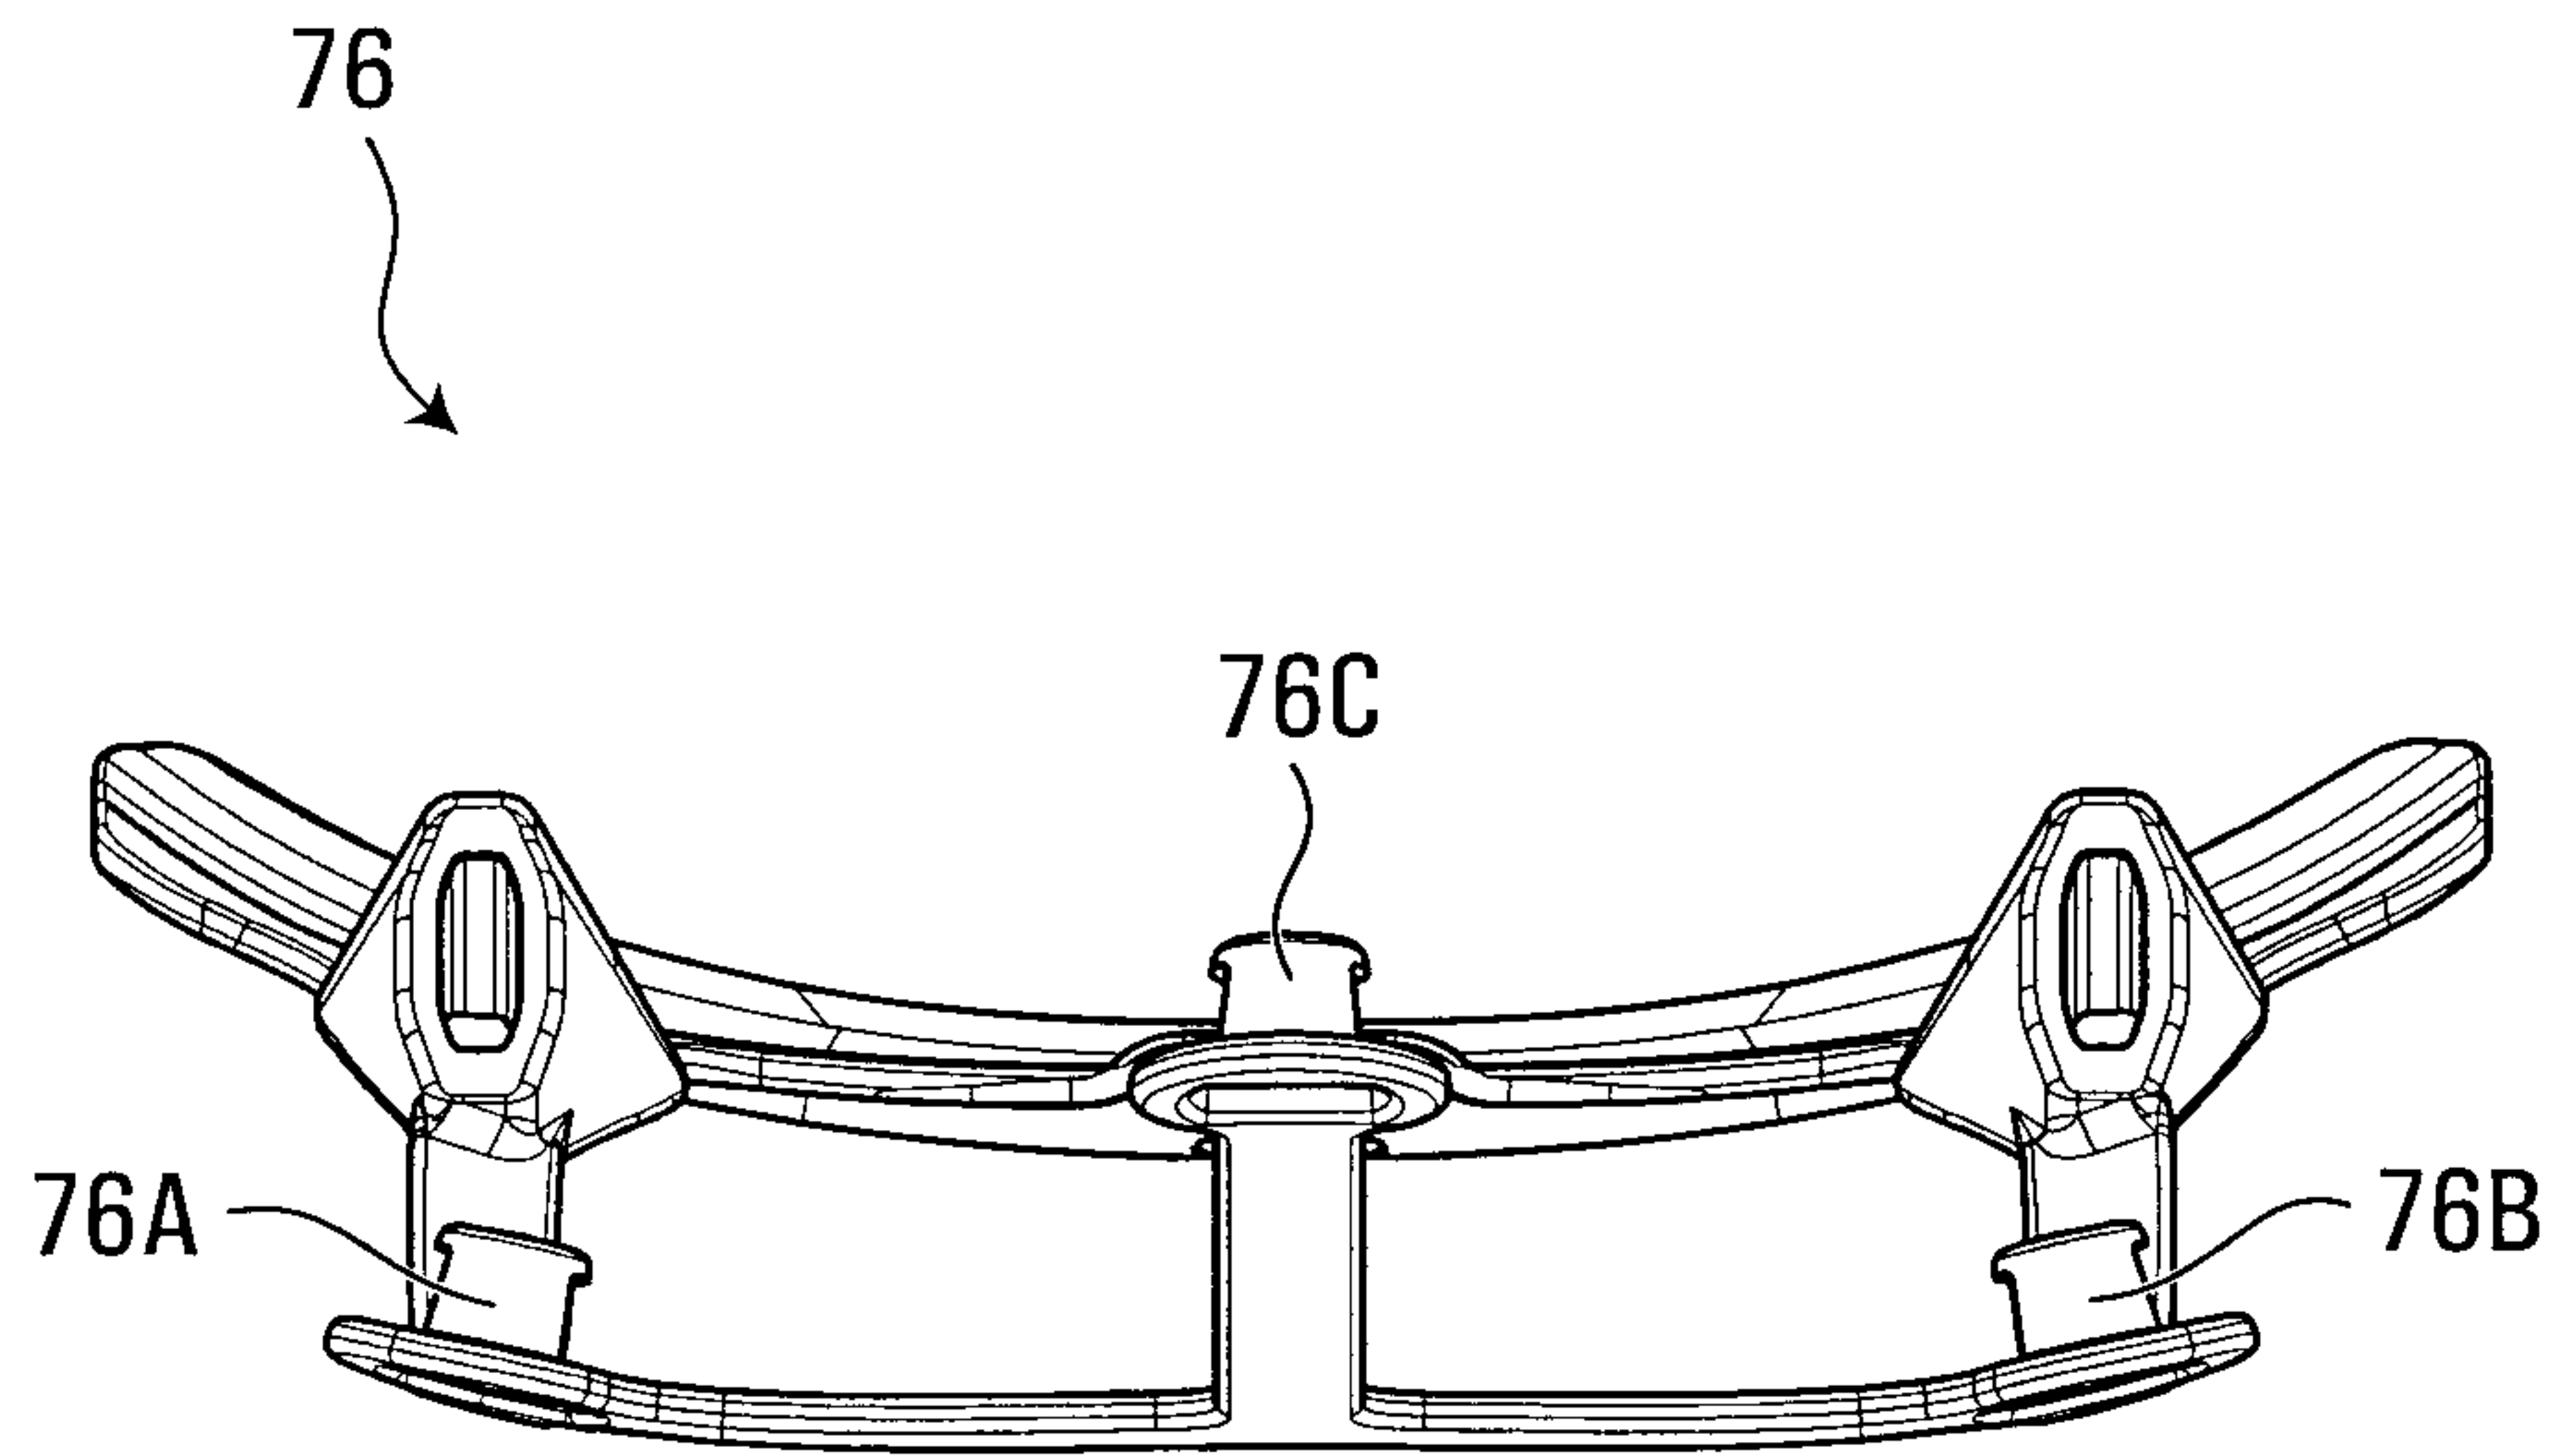


FIG. 51

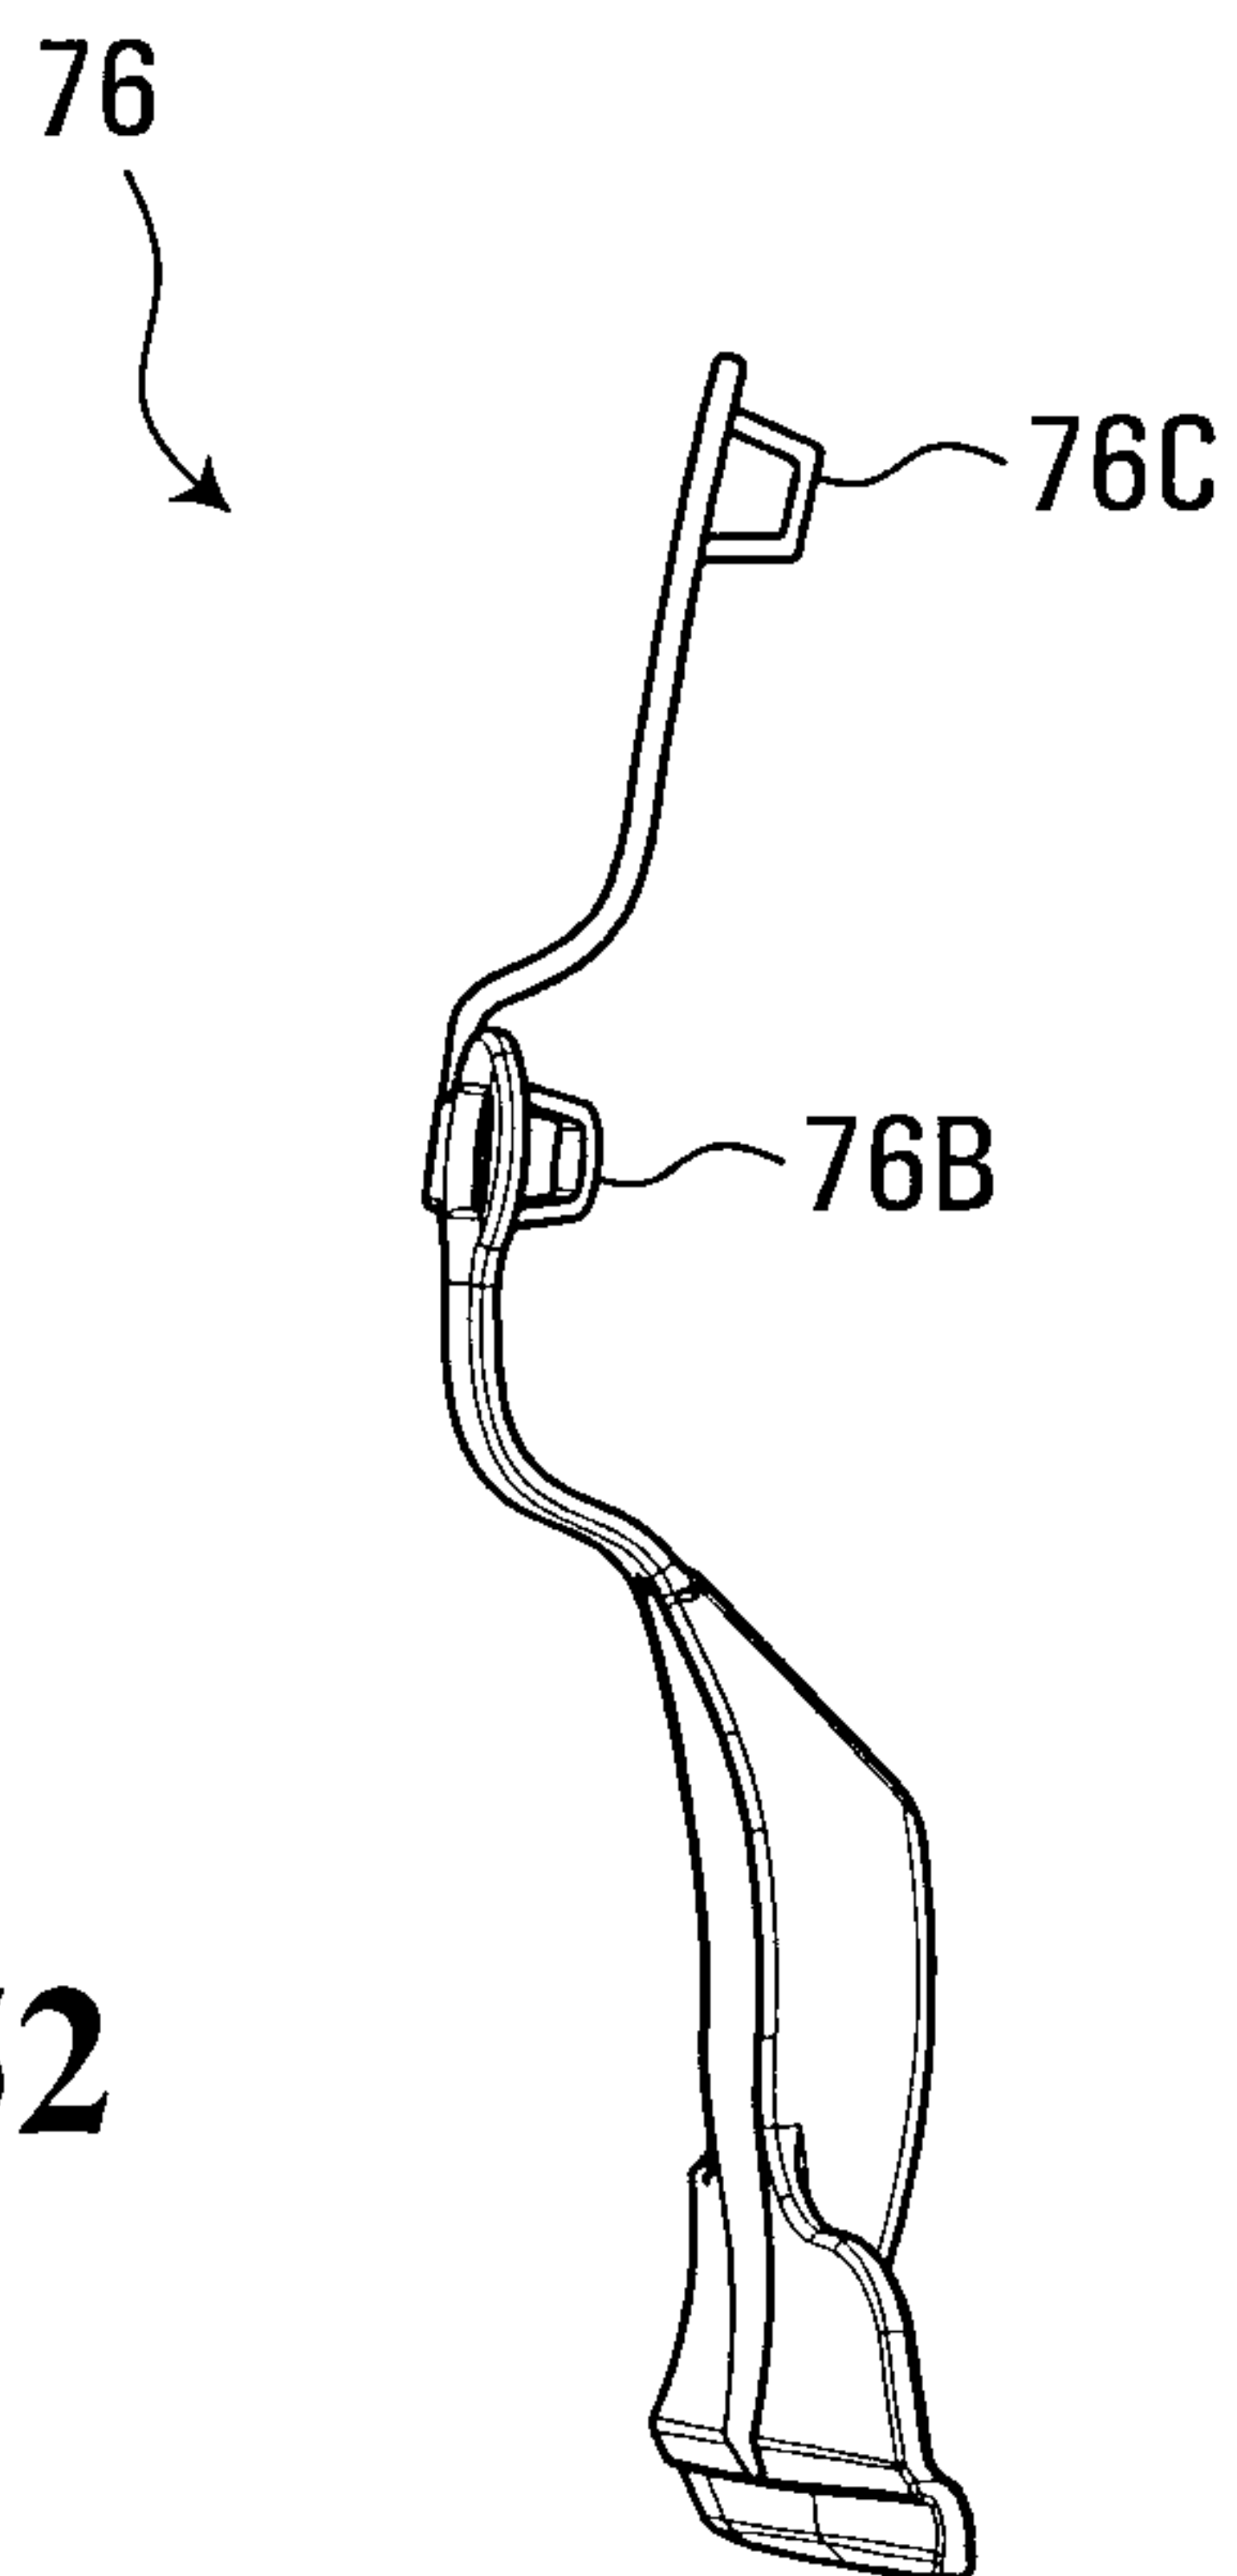


FIG. 52

31/40

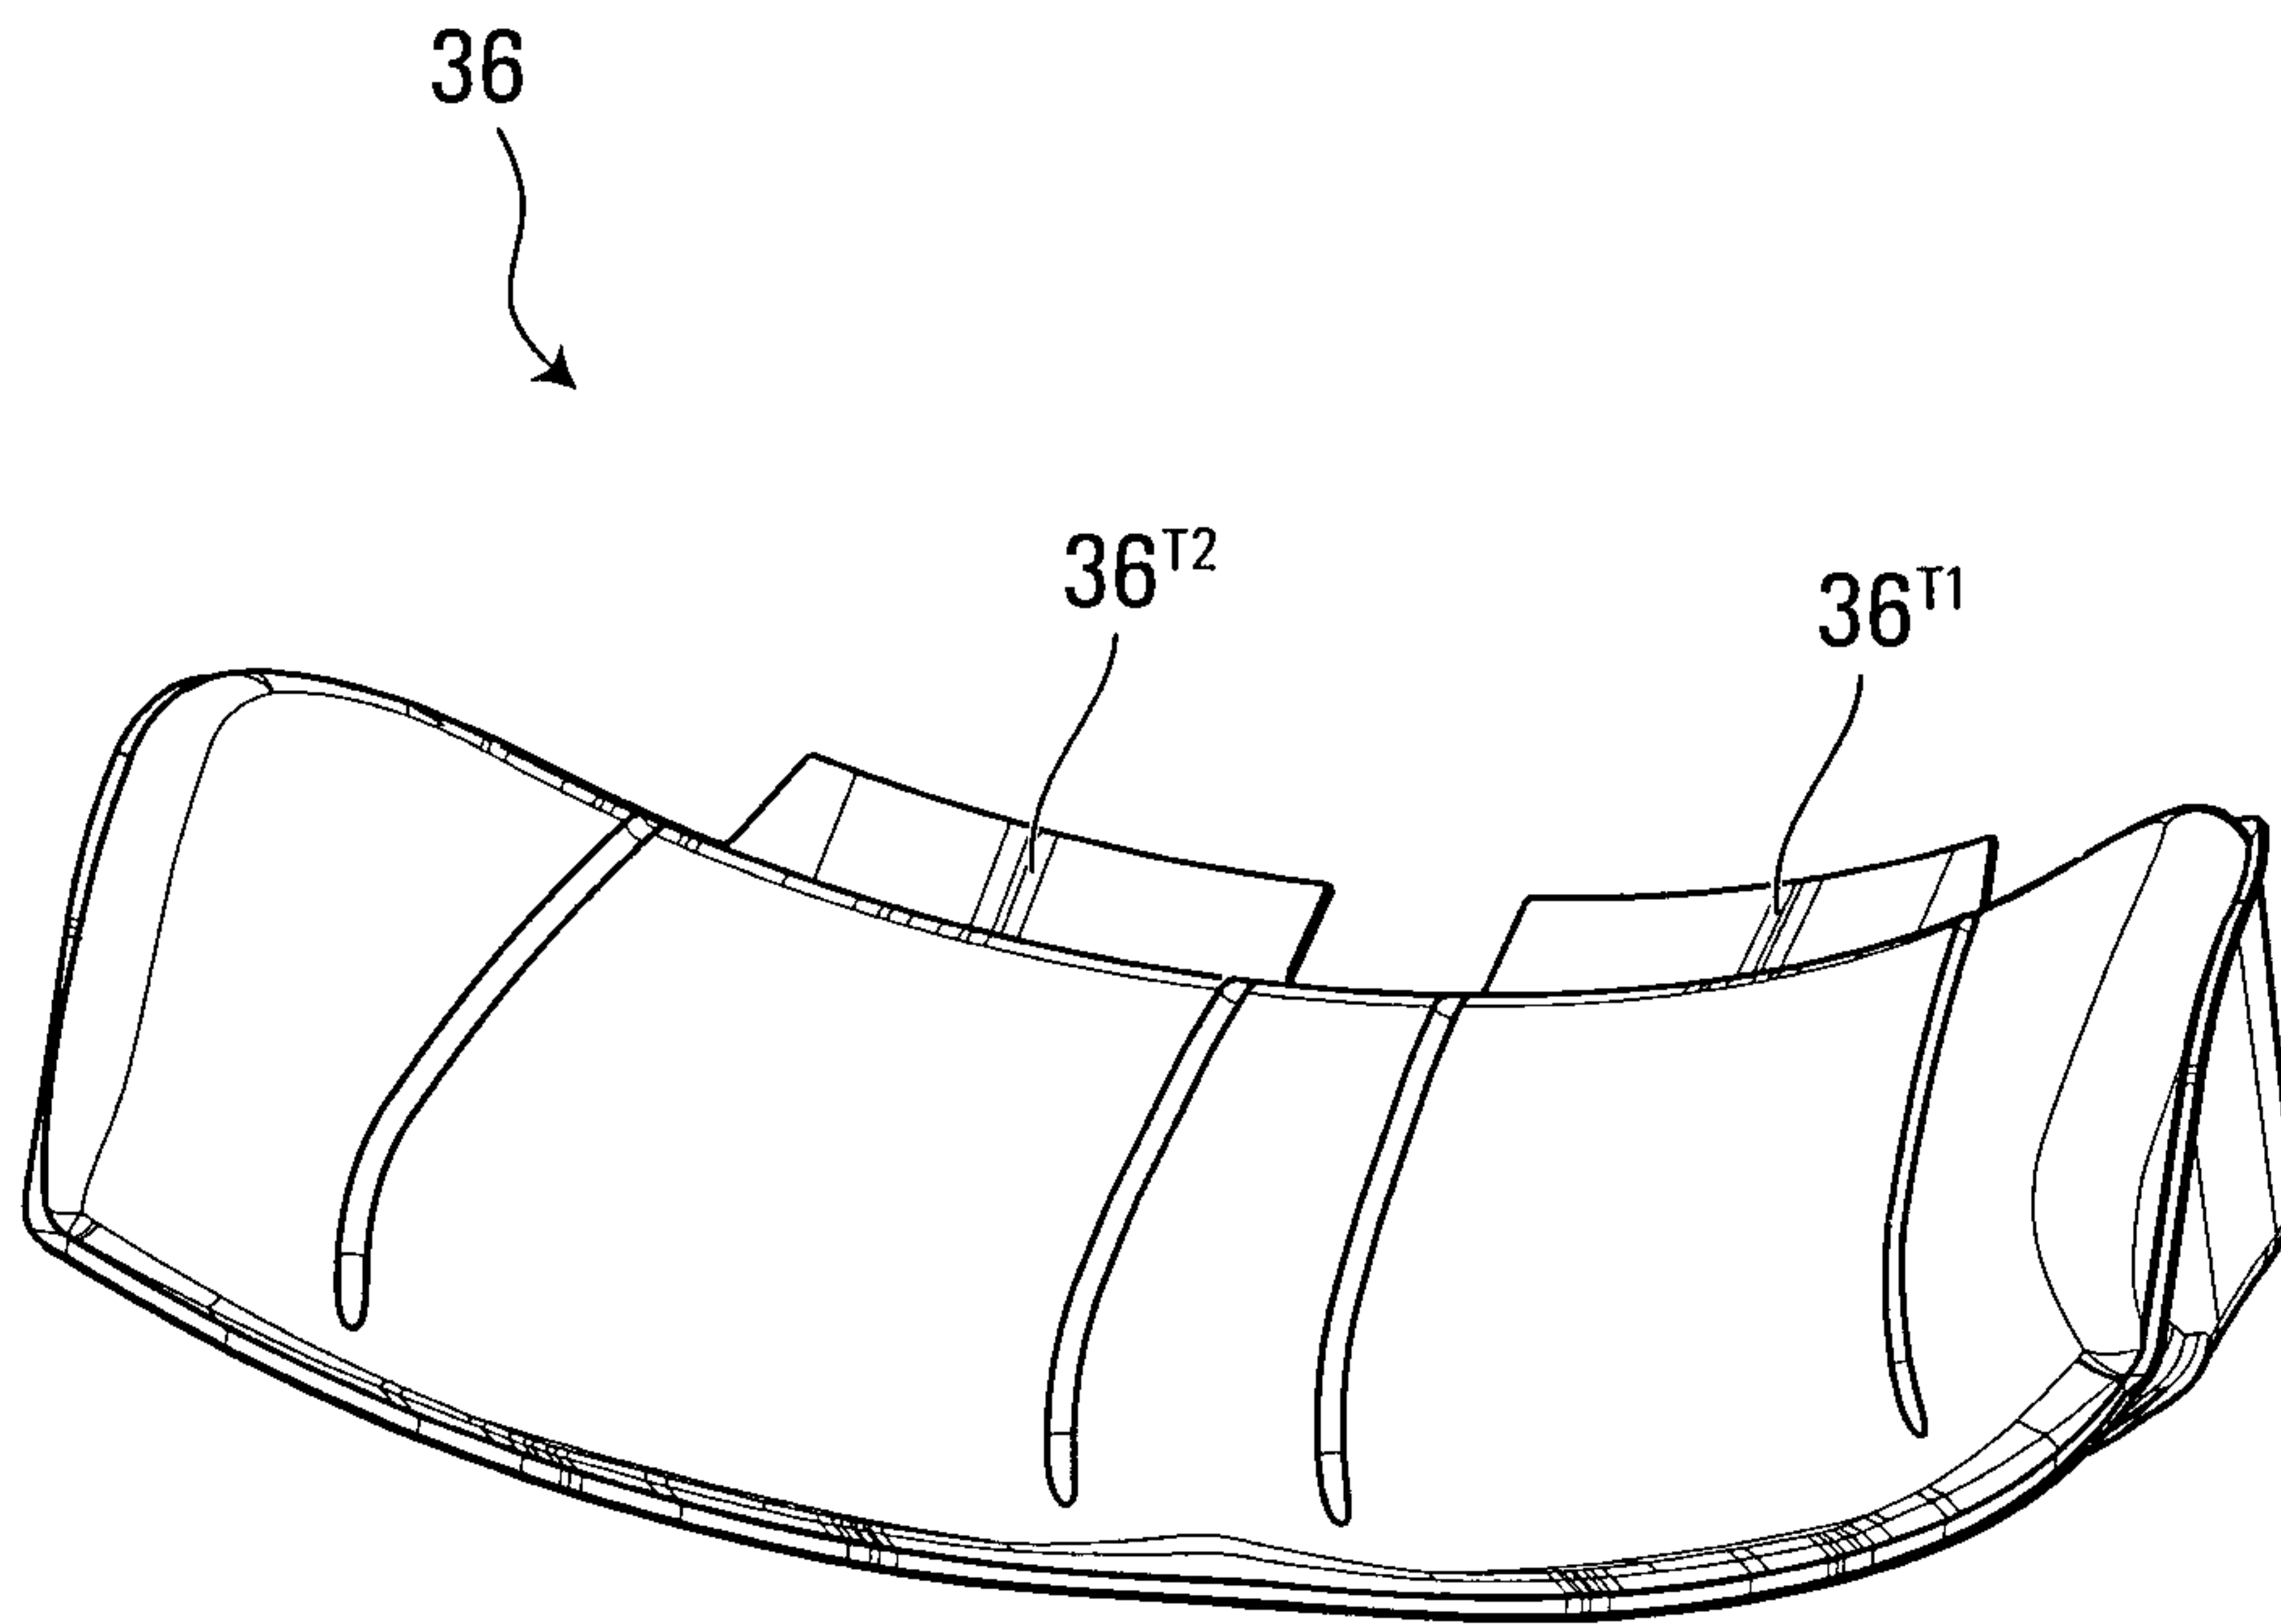


FIG. 53

32/40

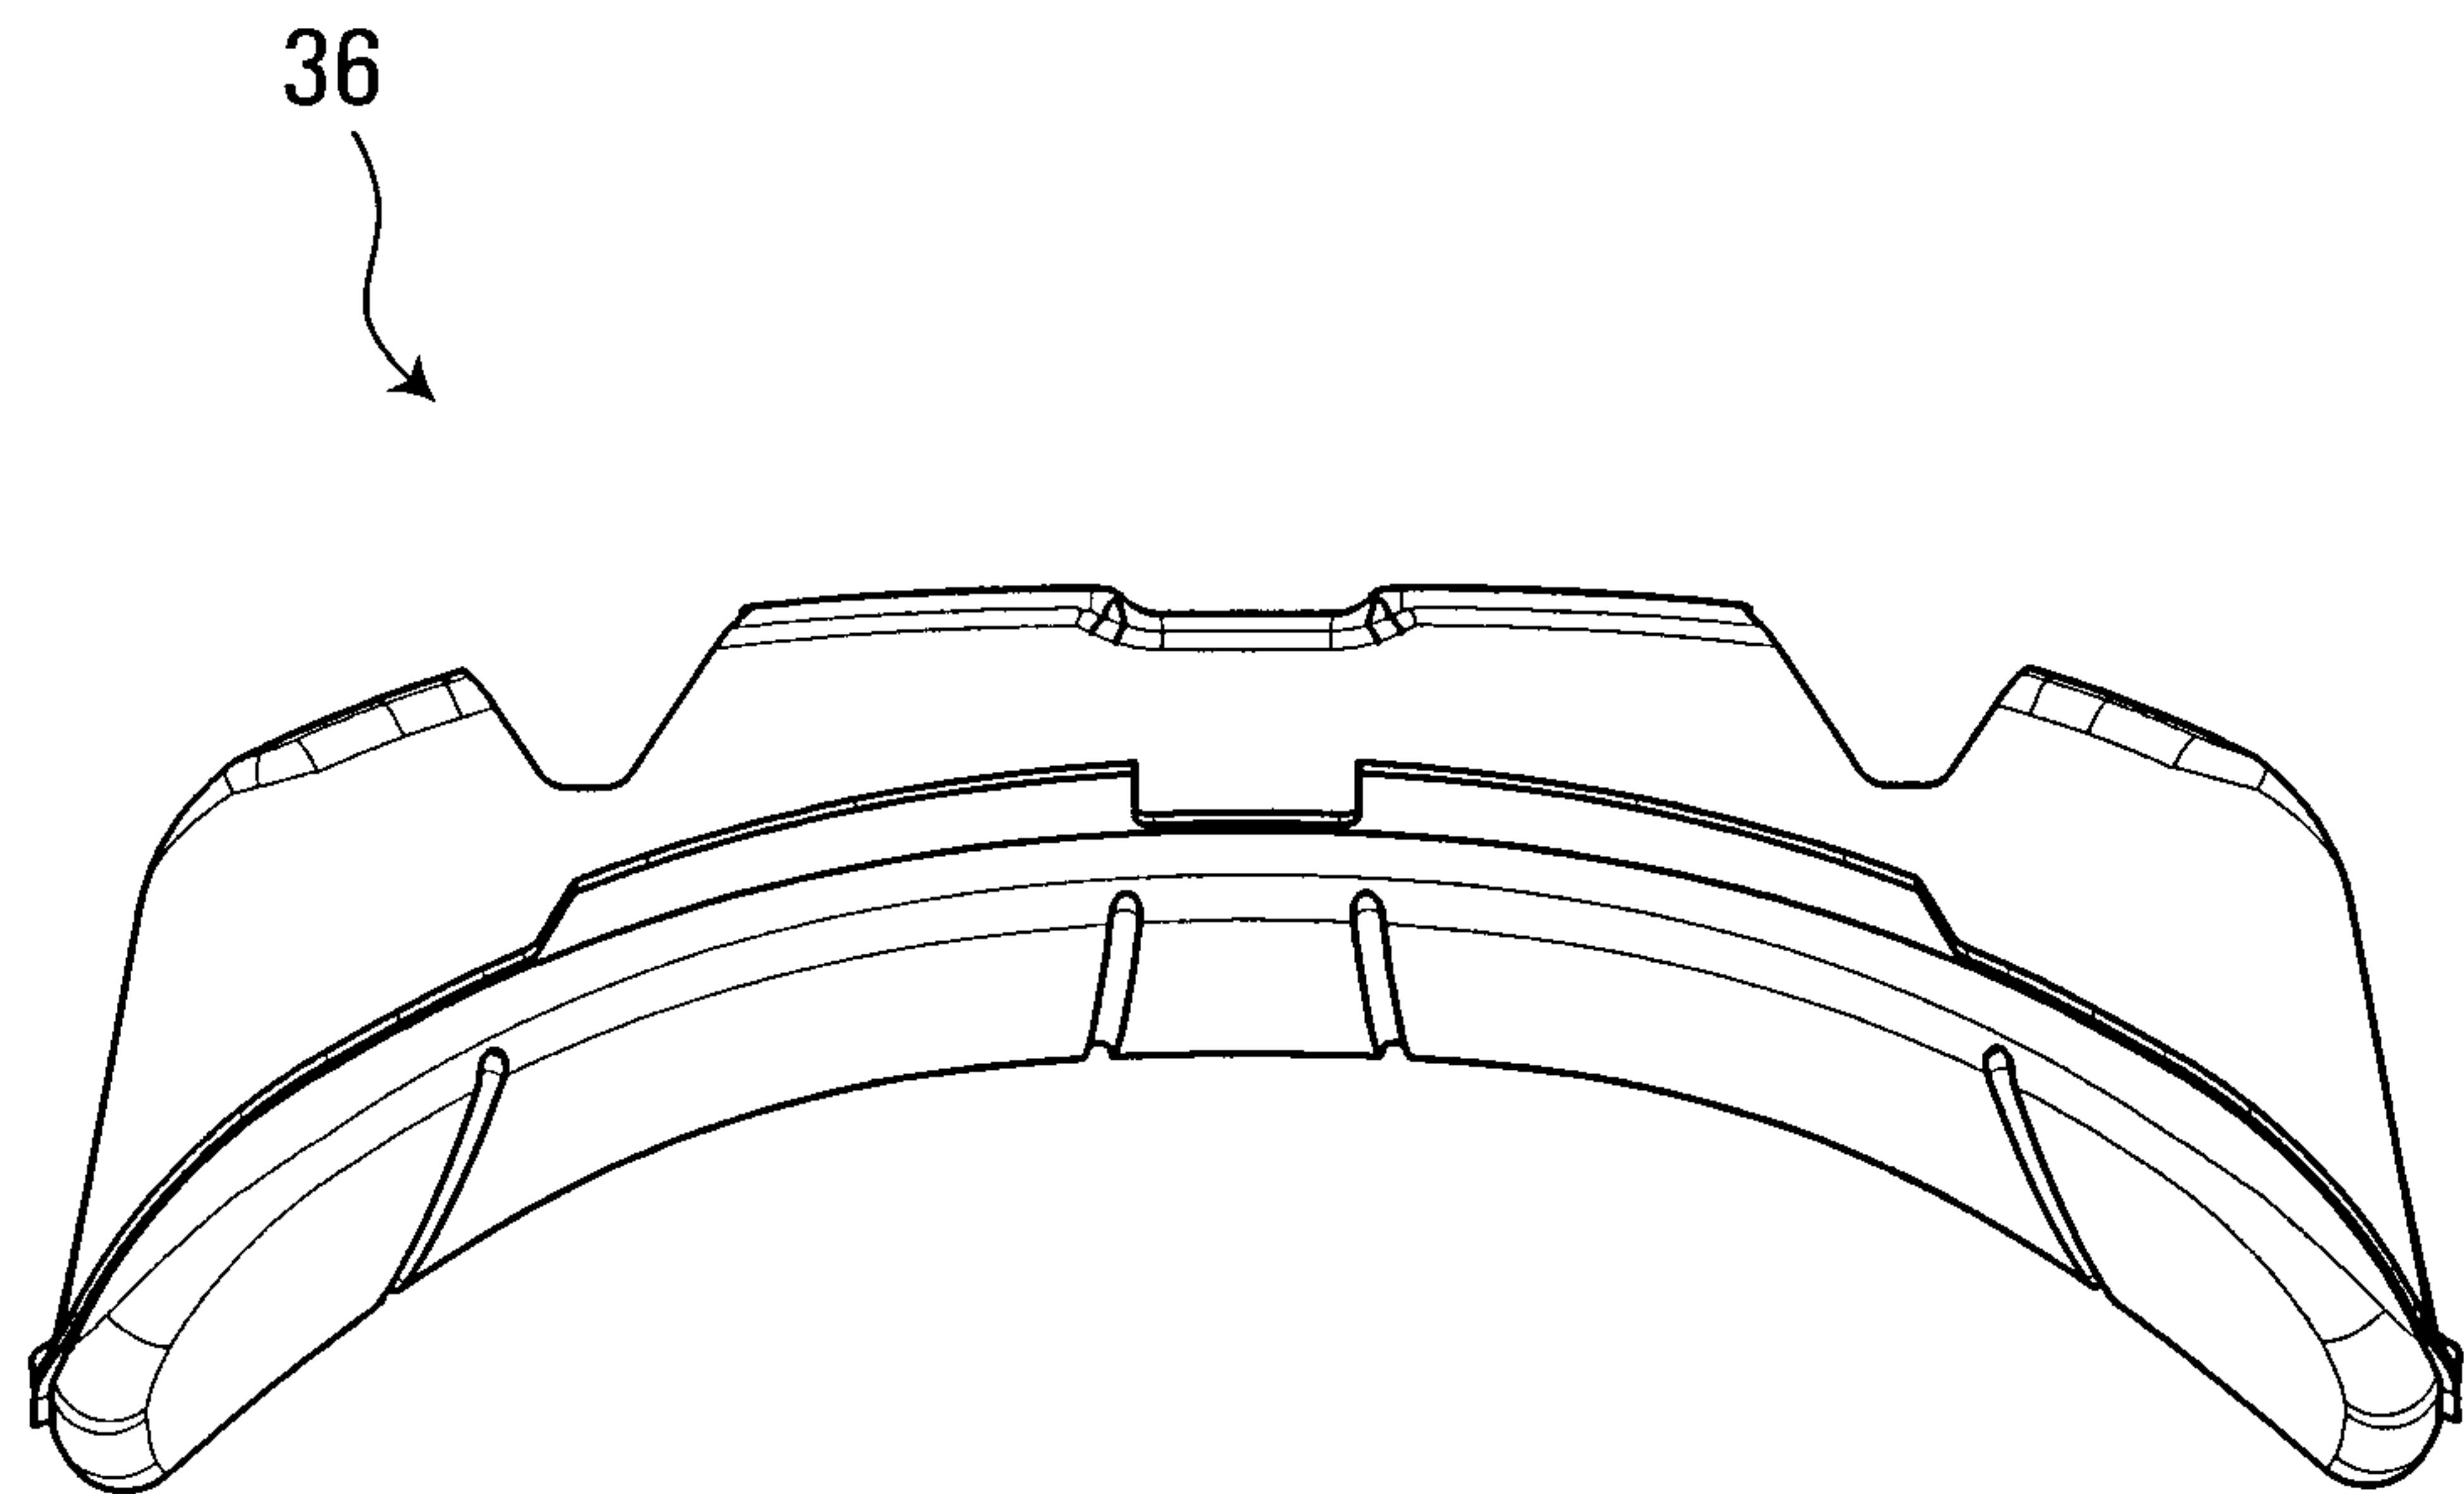


FIG. 54

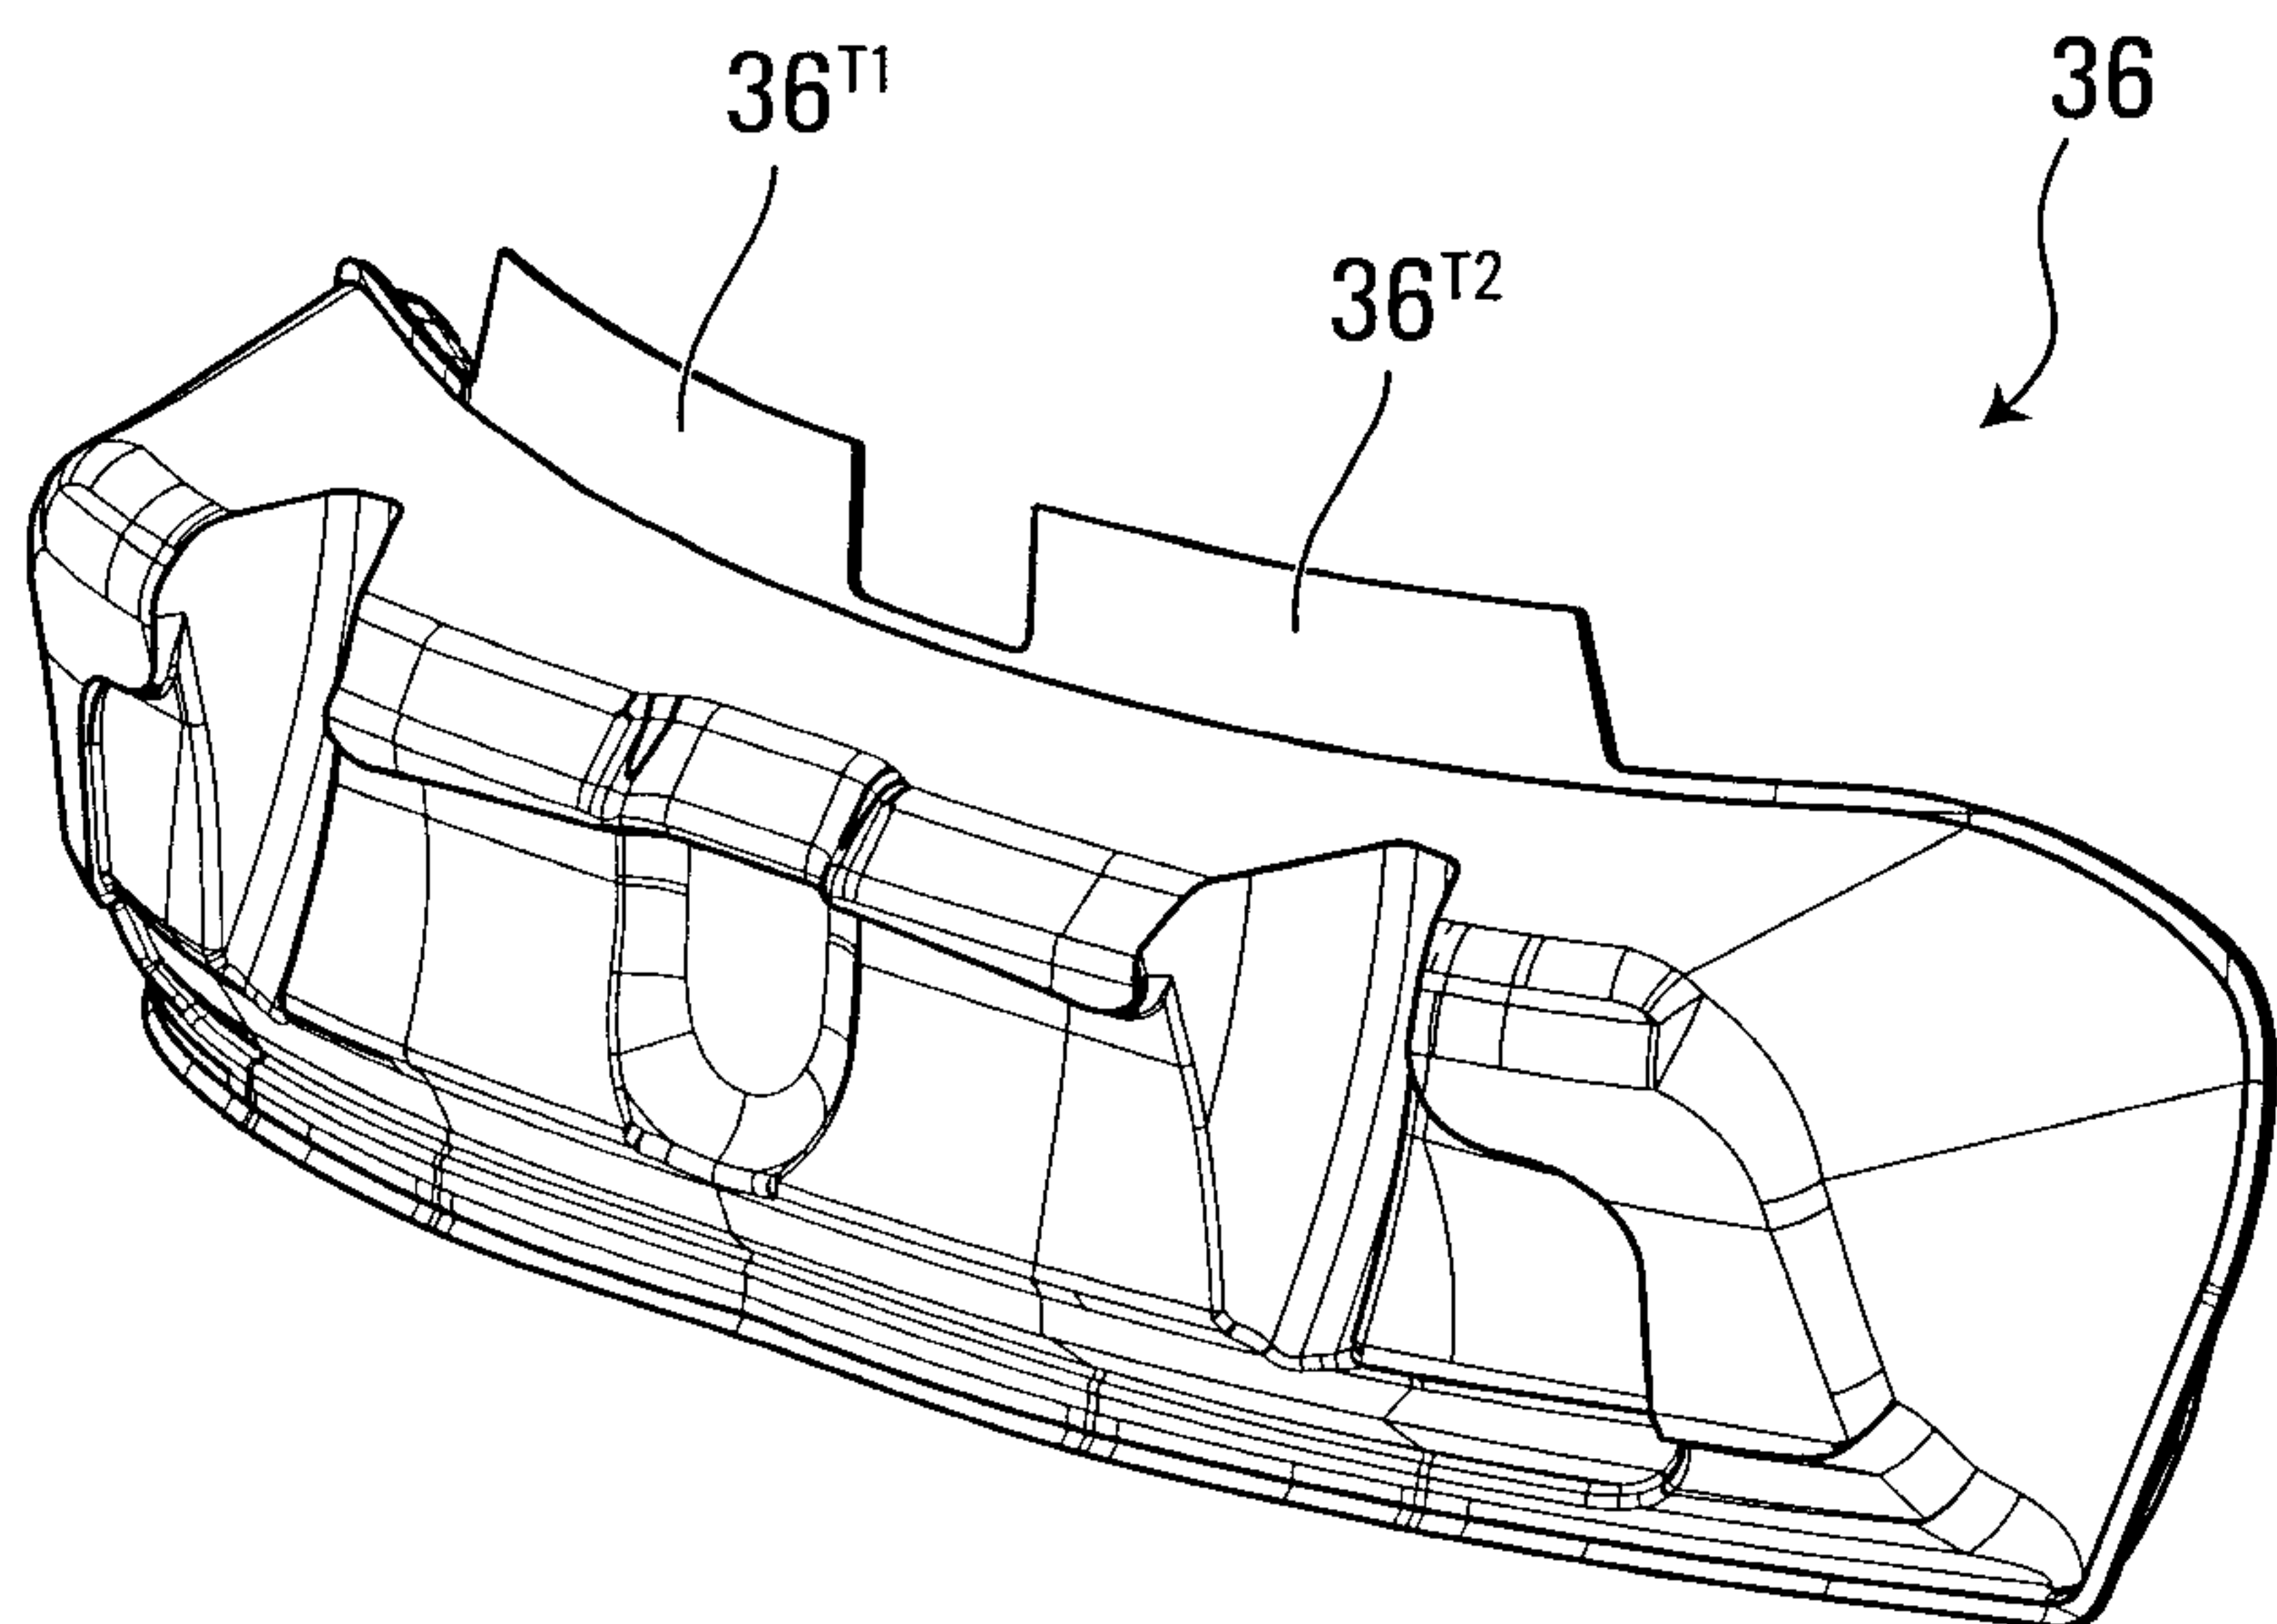


FIG. 55

33/40

FIG. 56

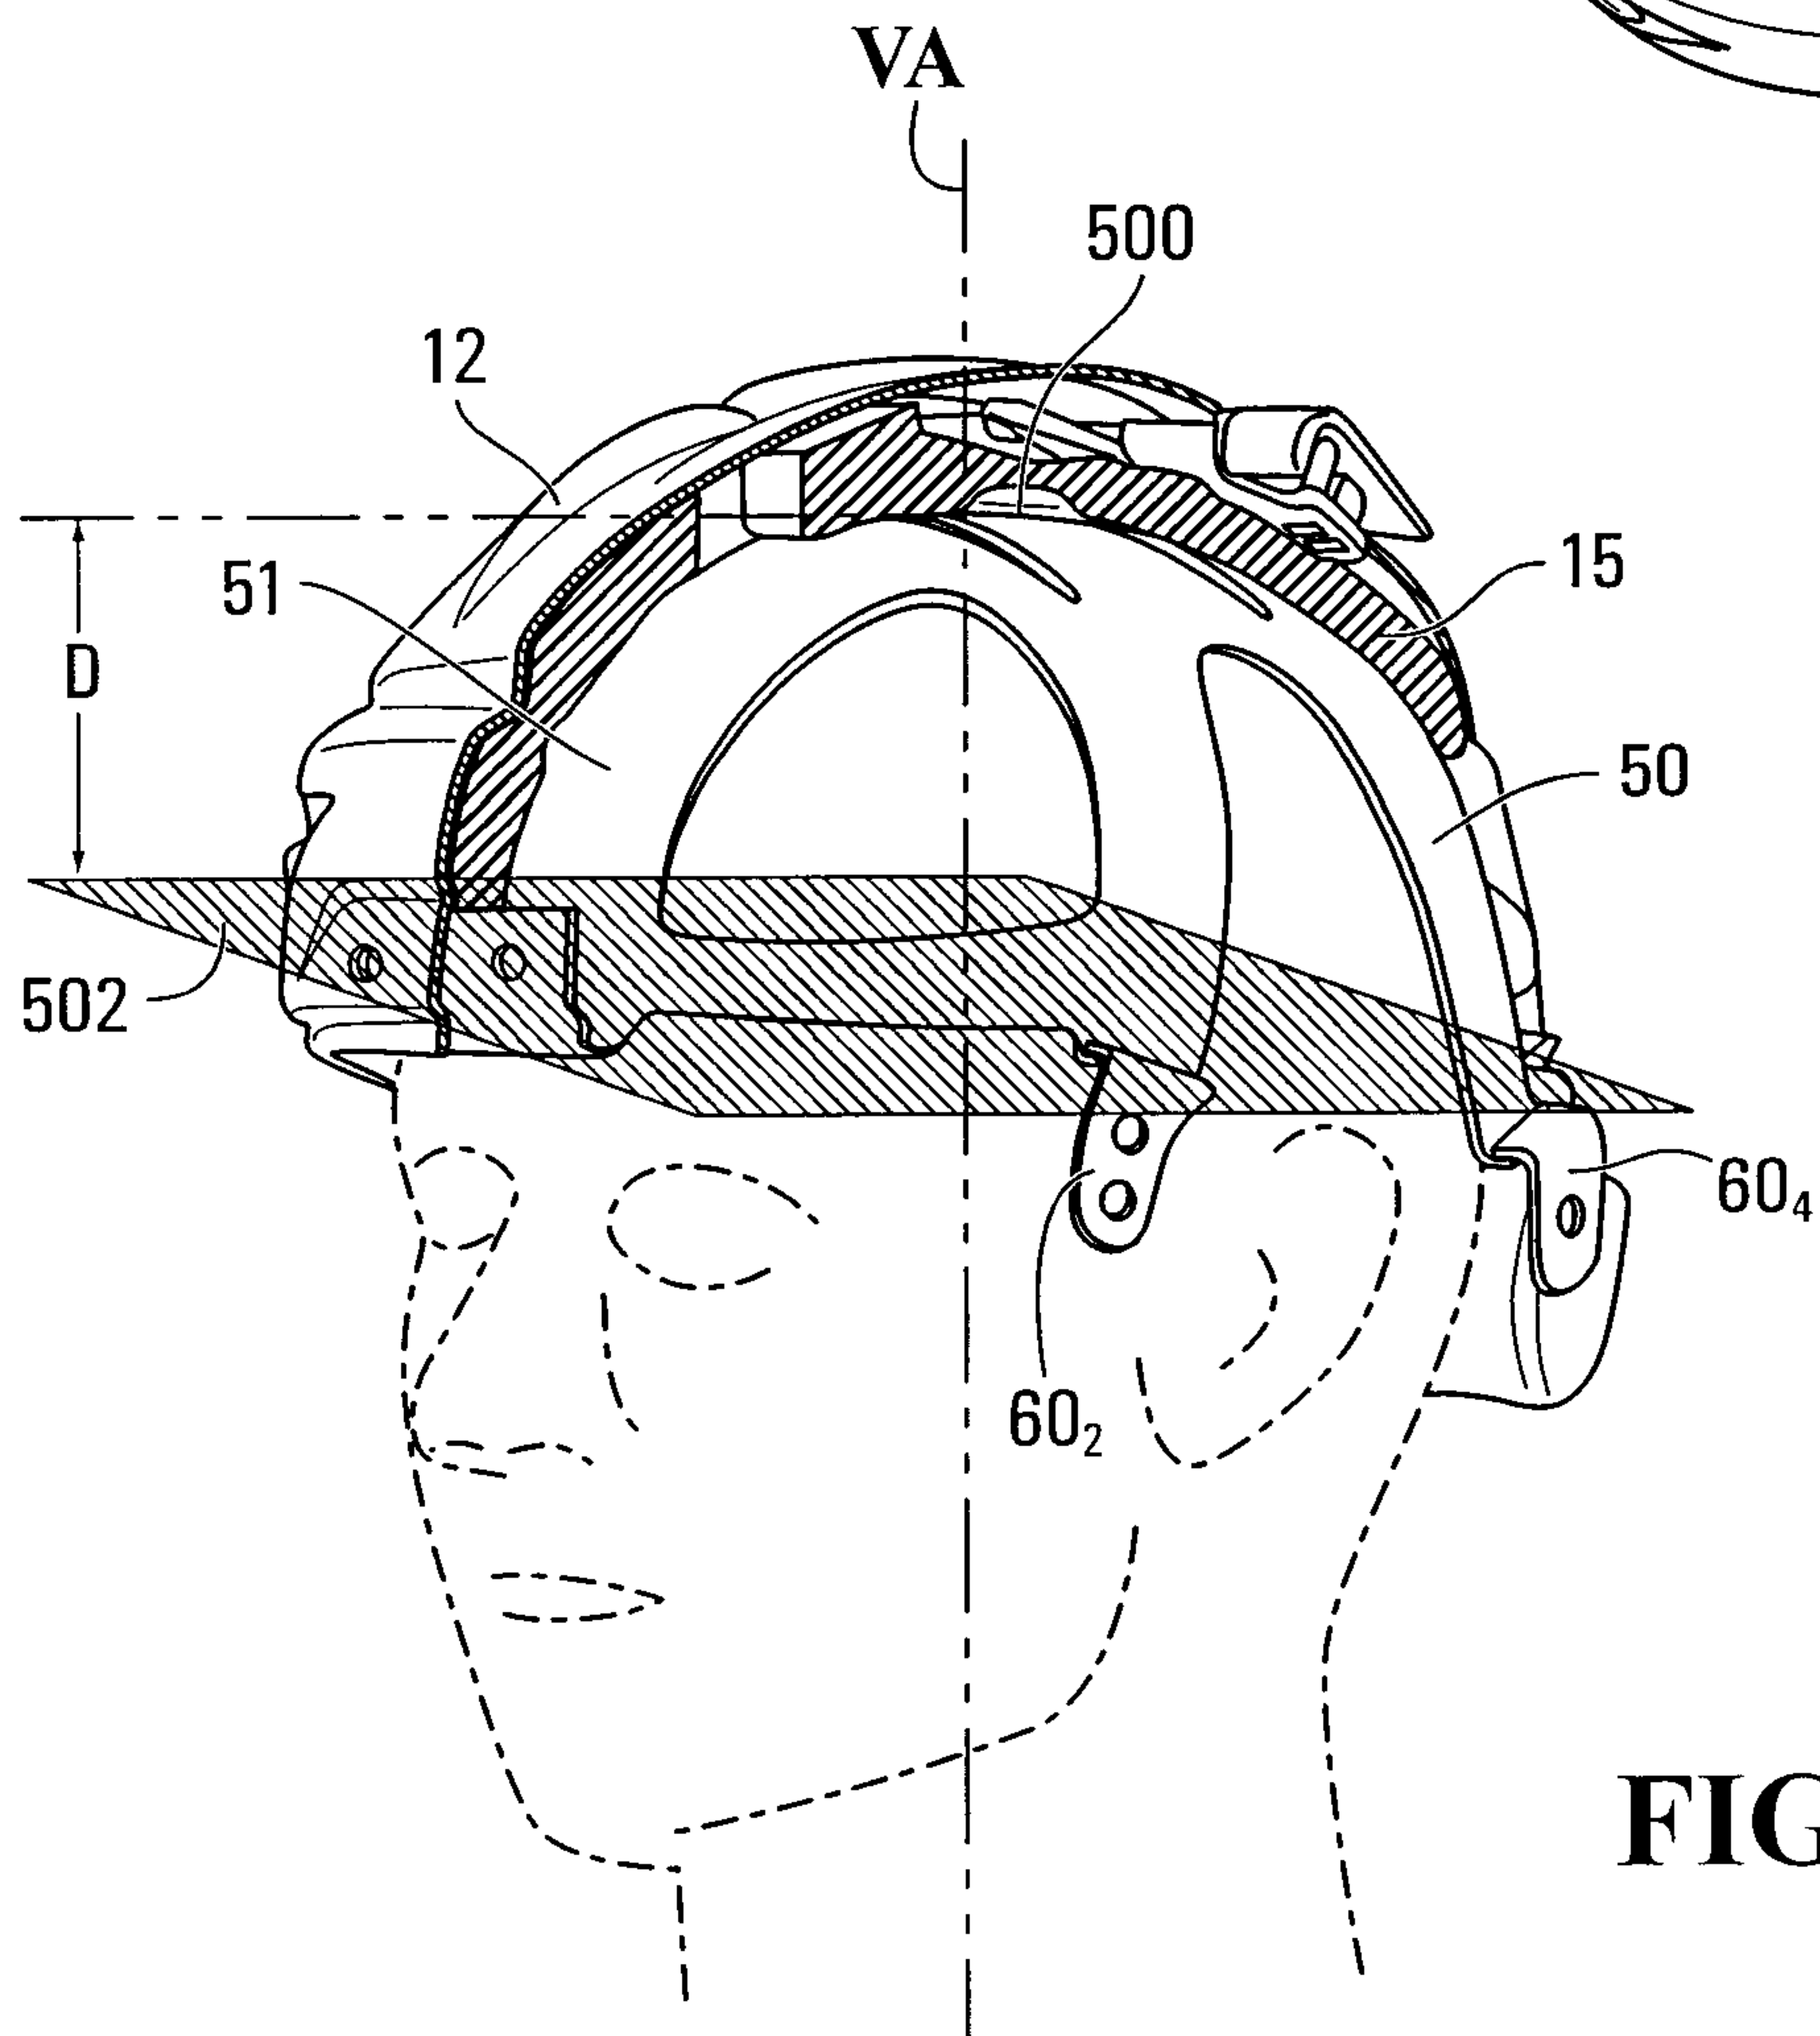
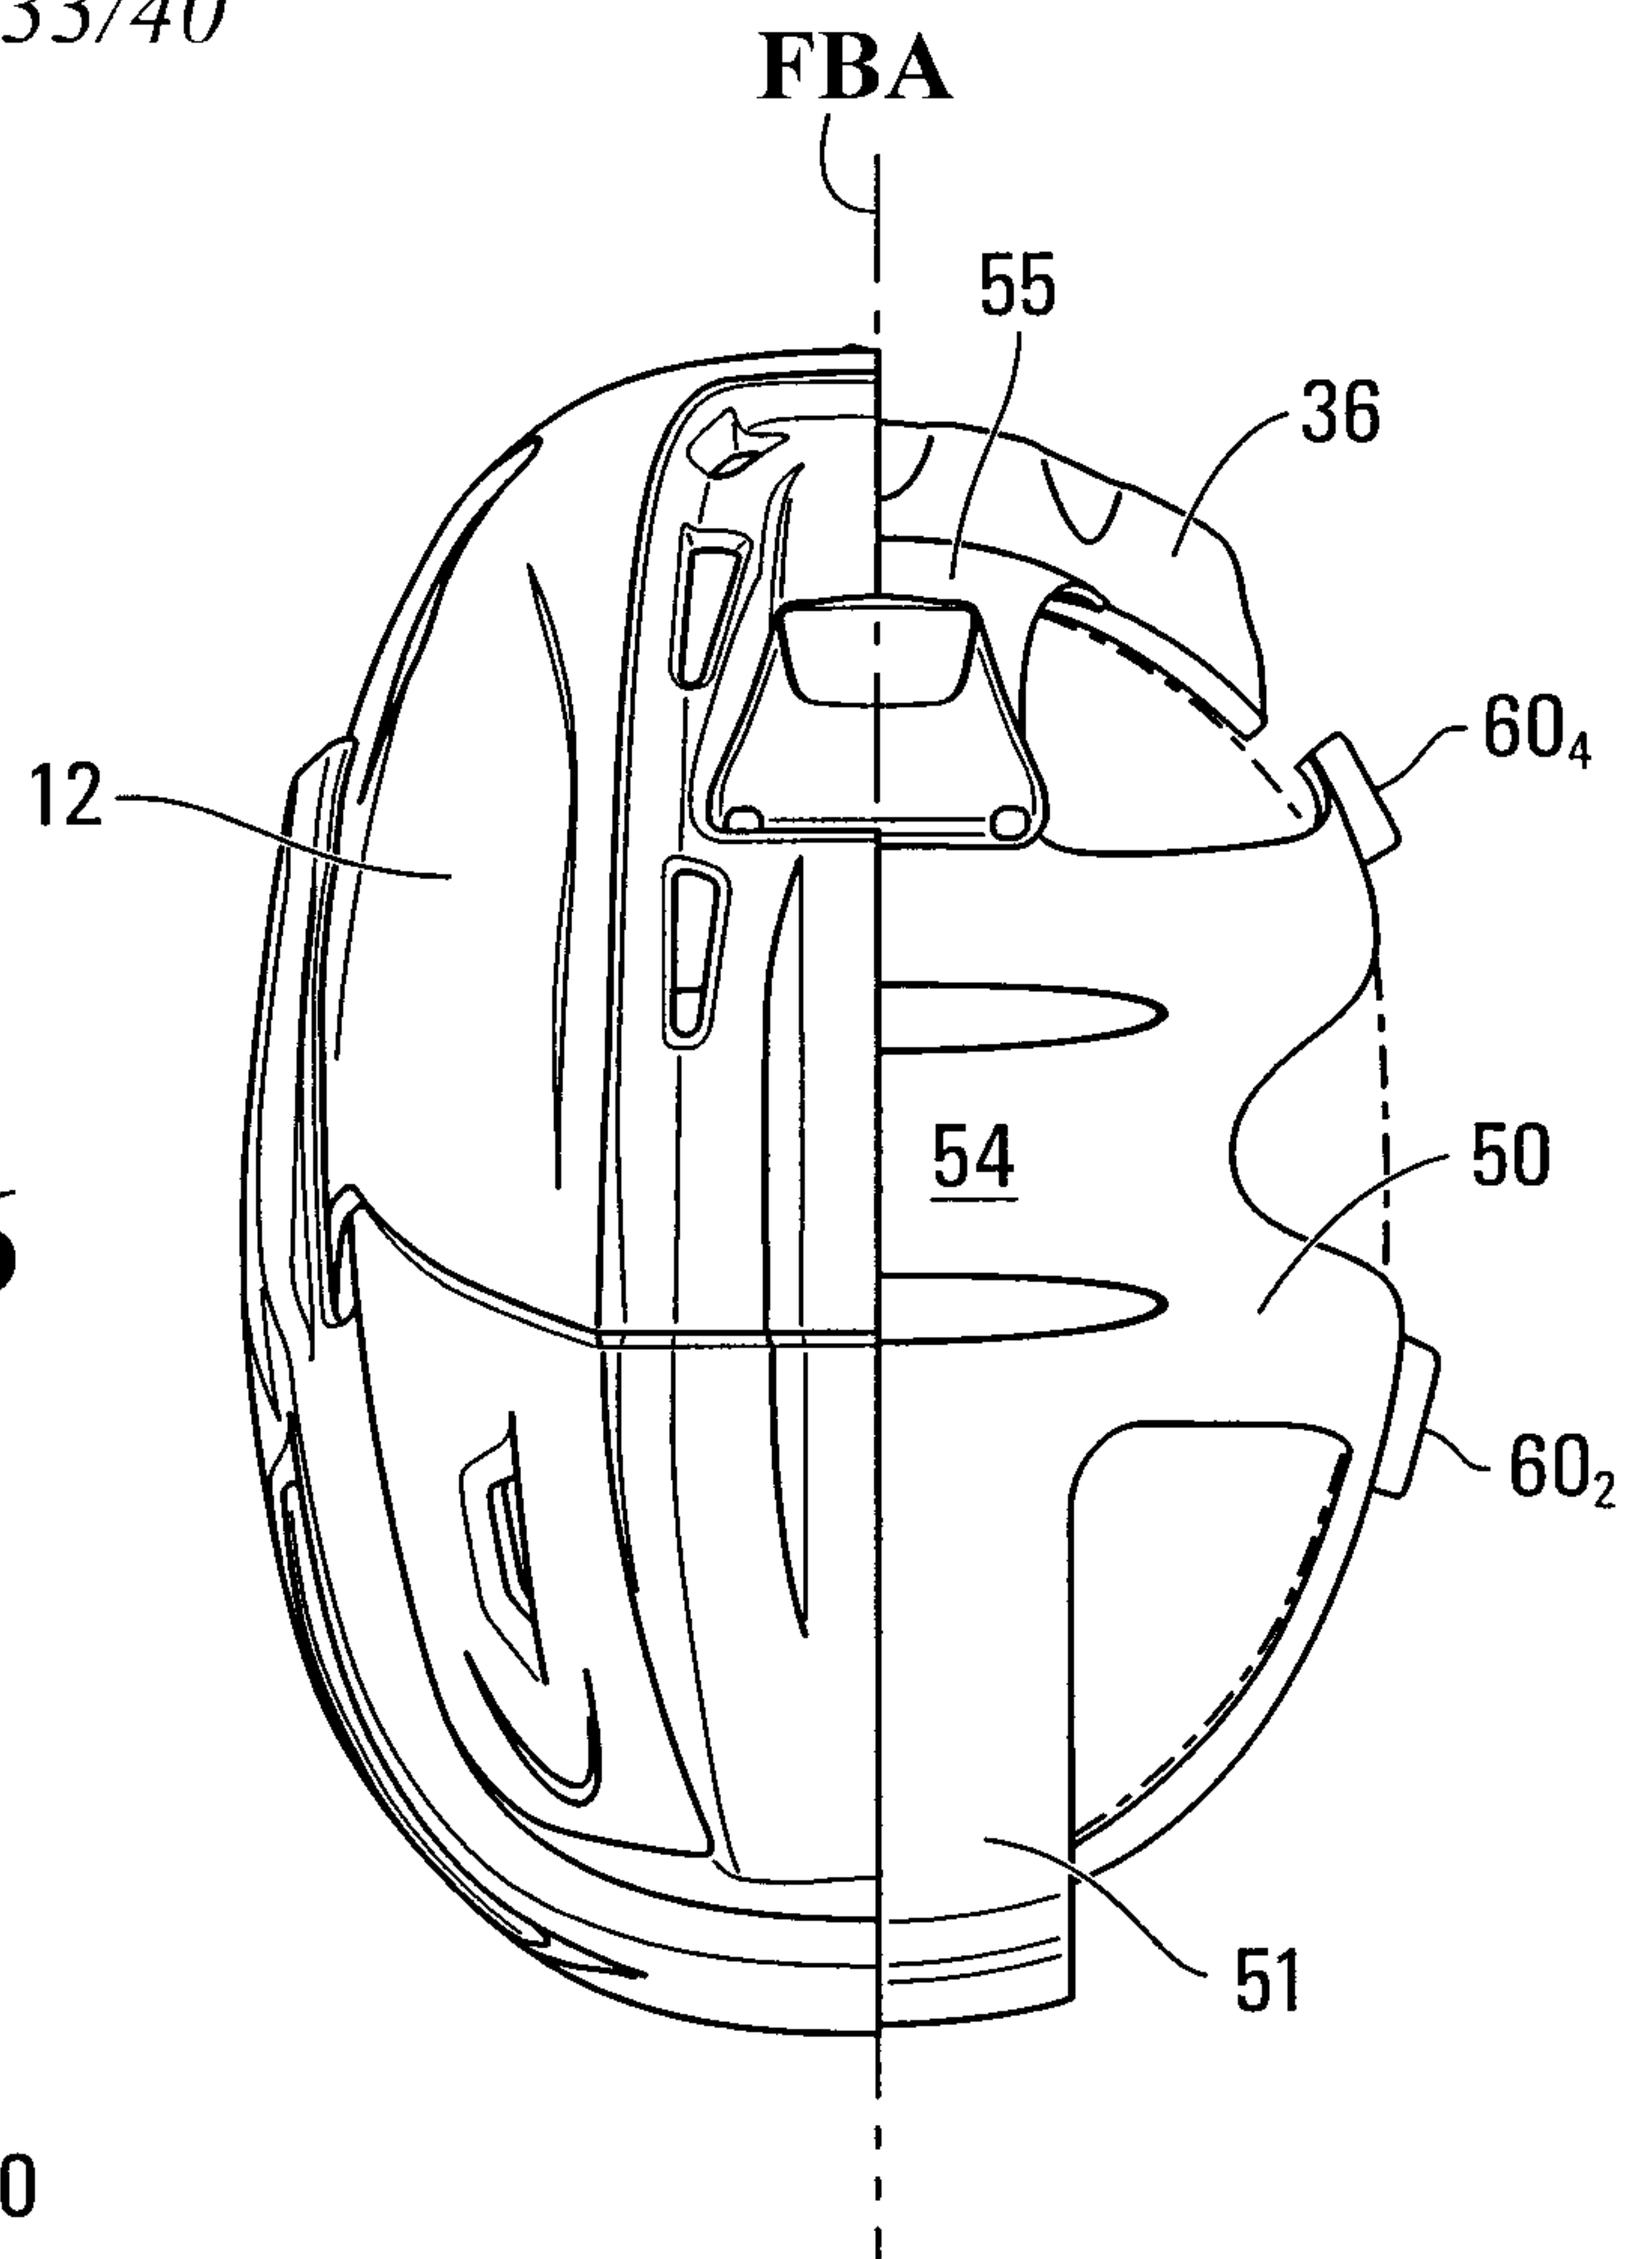


FIG. 57

34/40

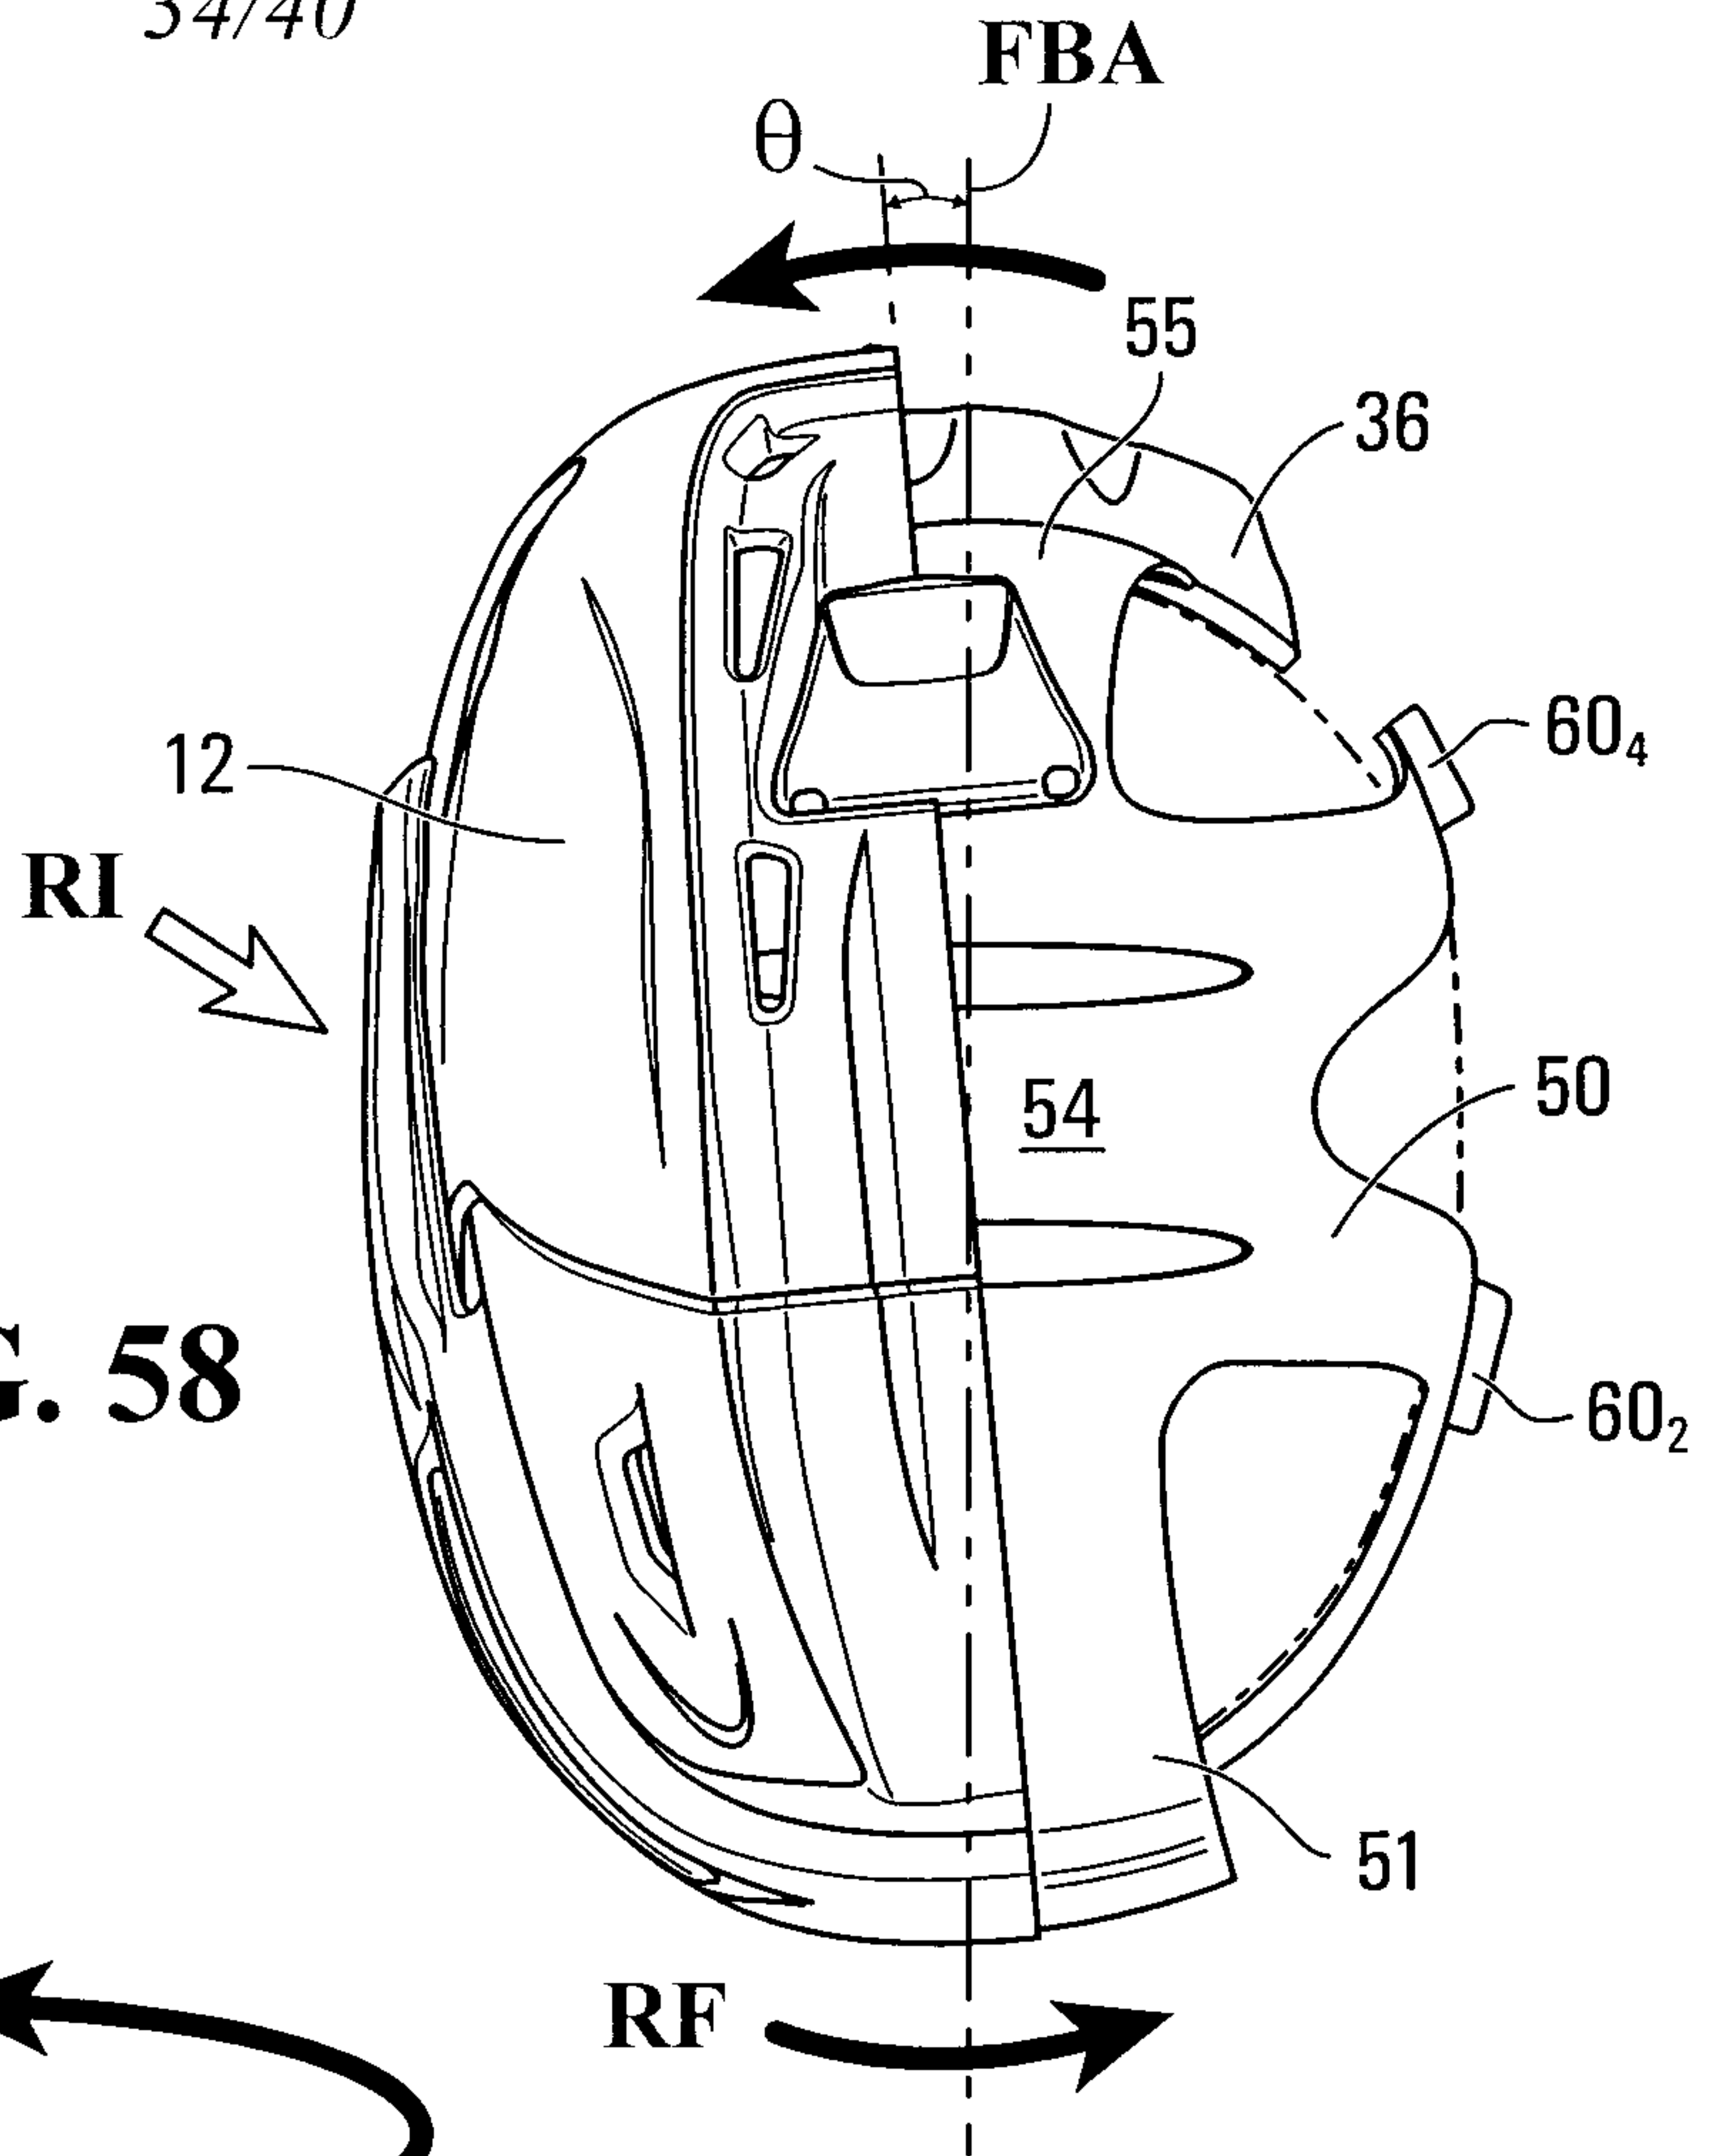


FIG. 58

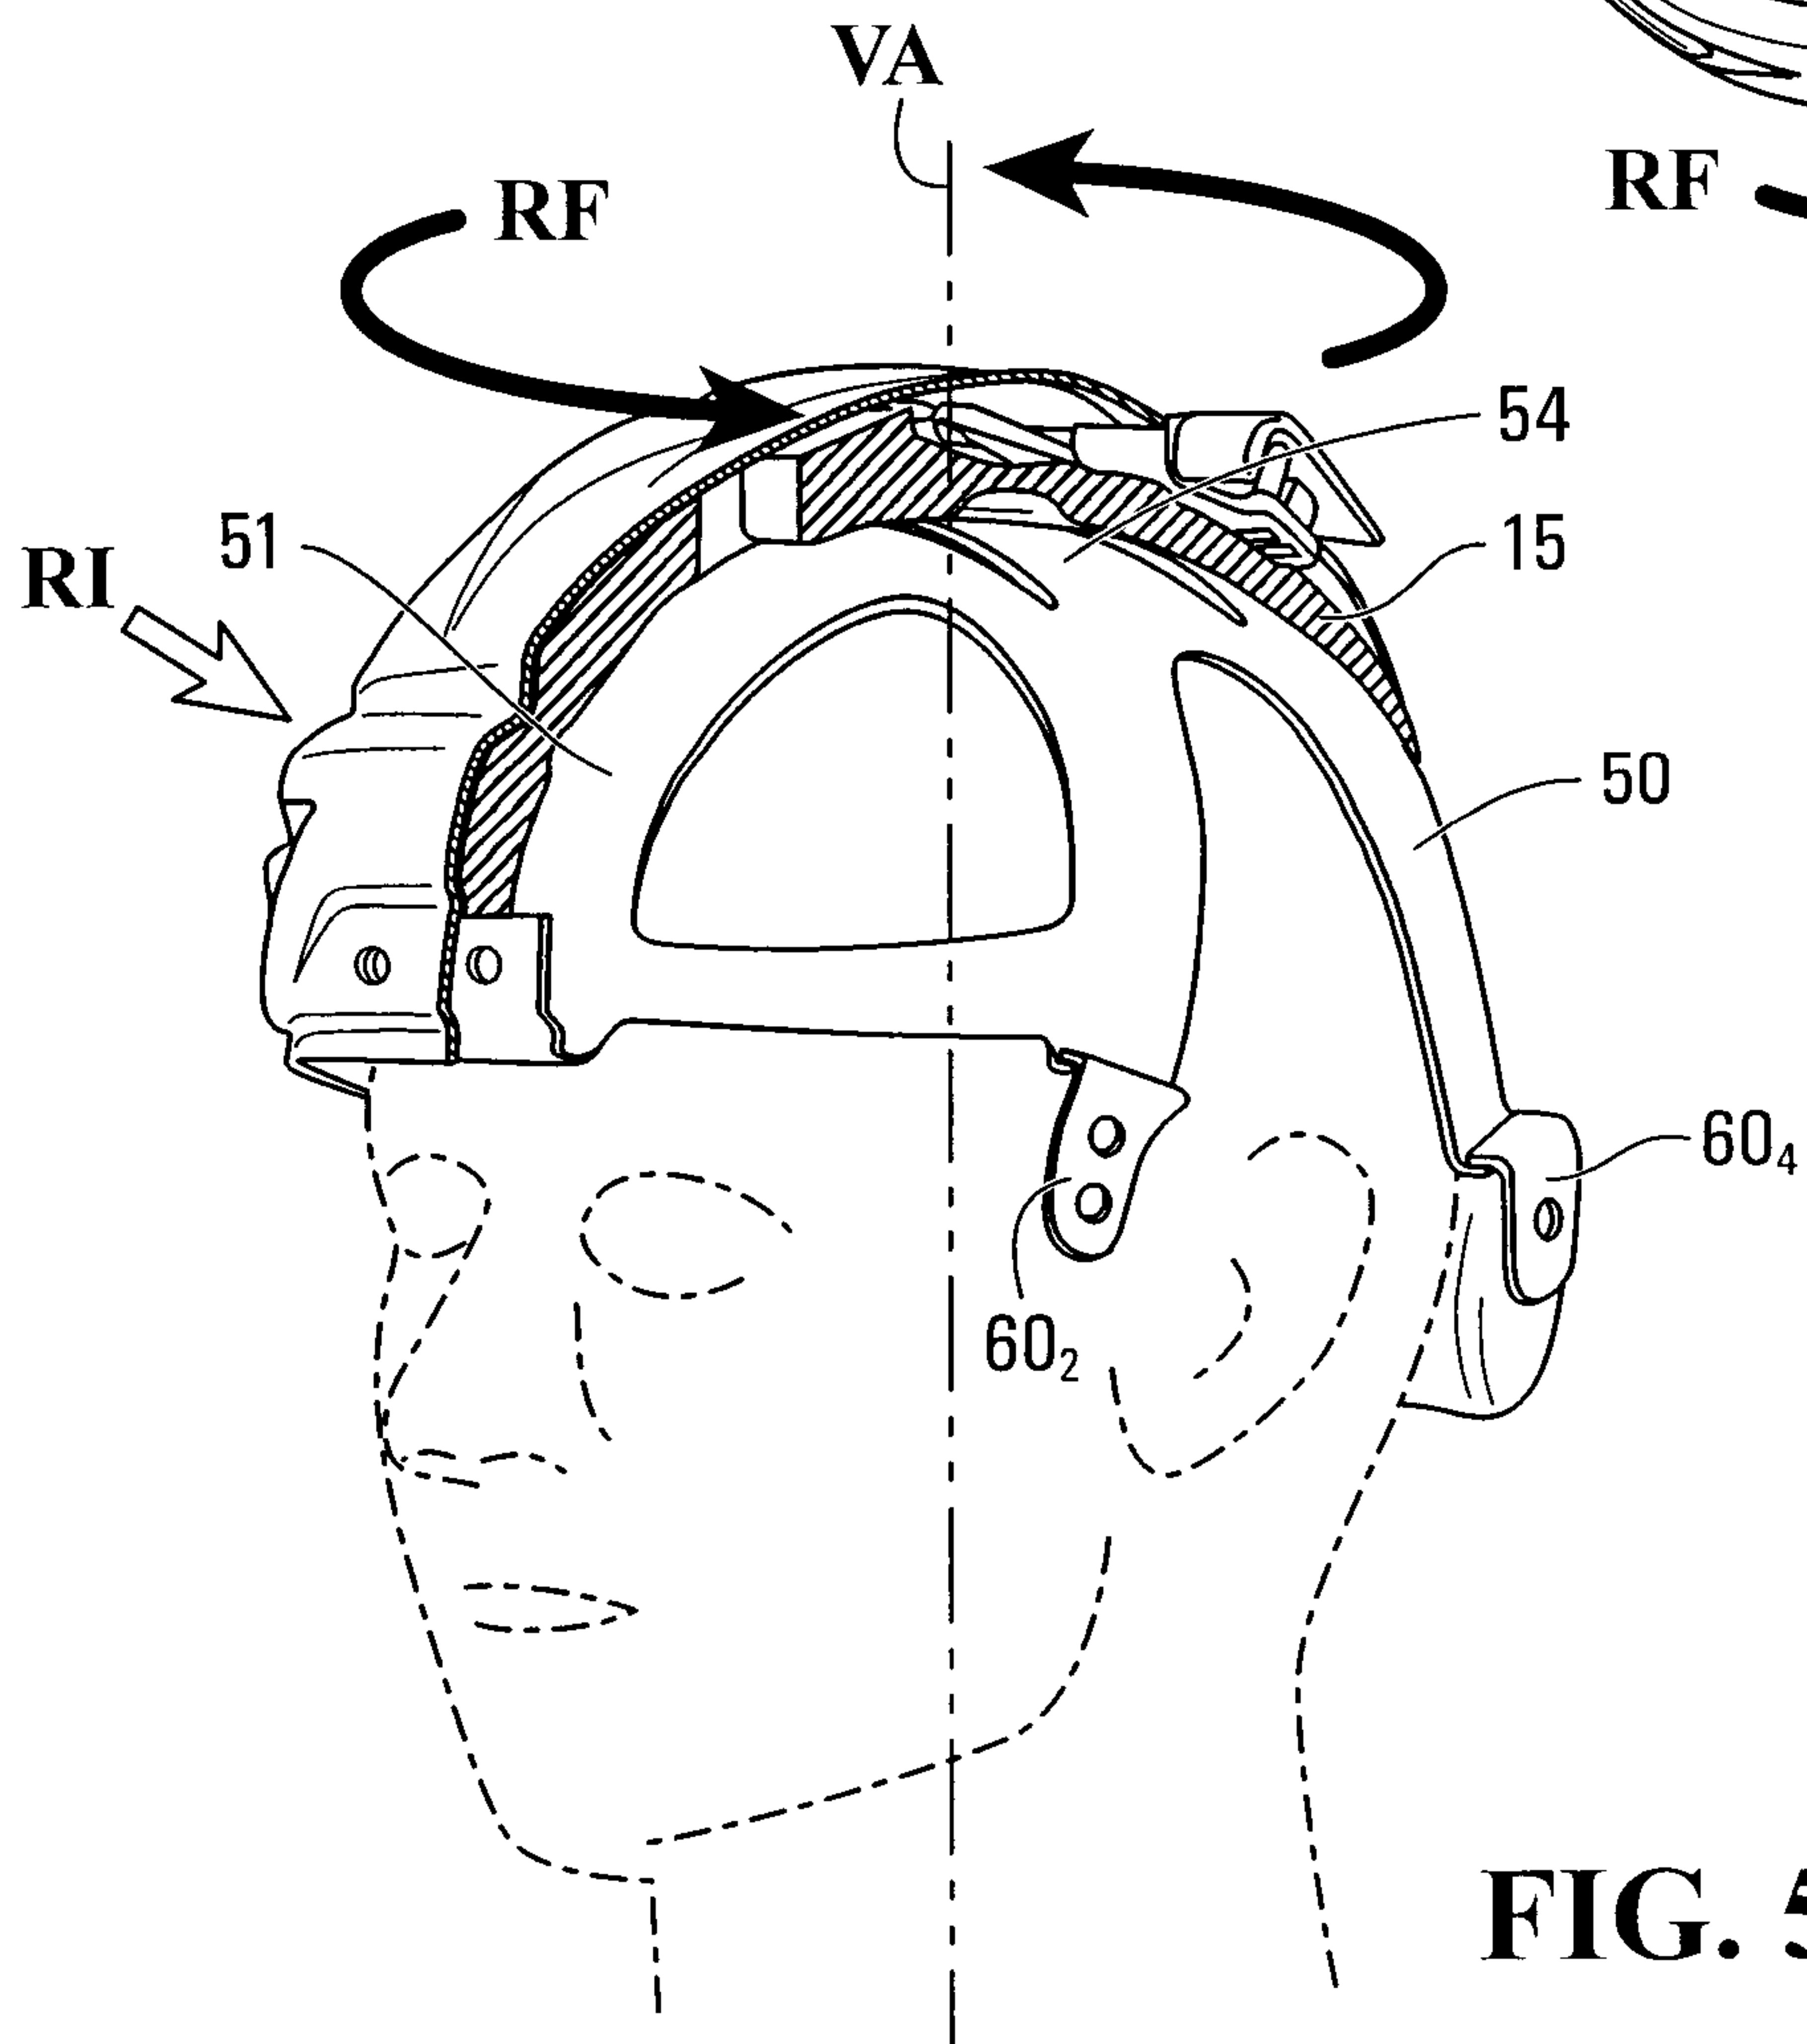


FIG. 59

39/40

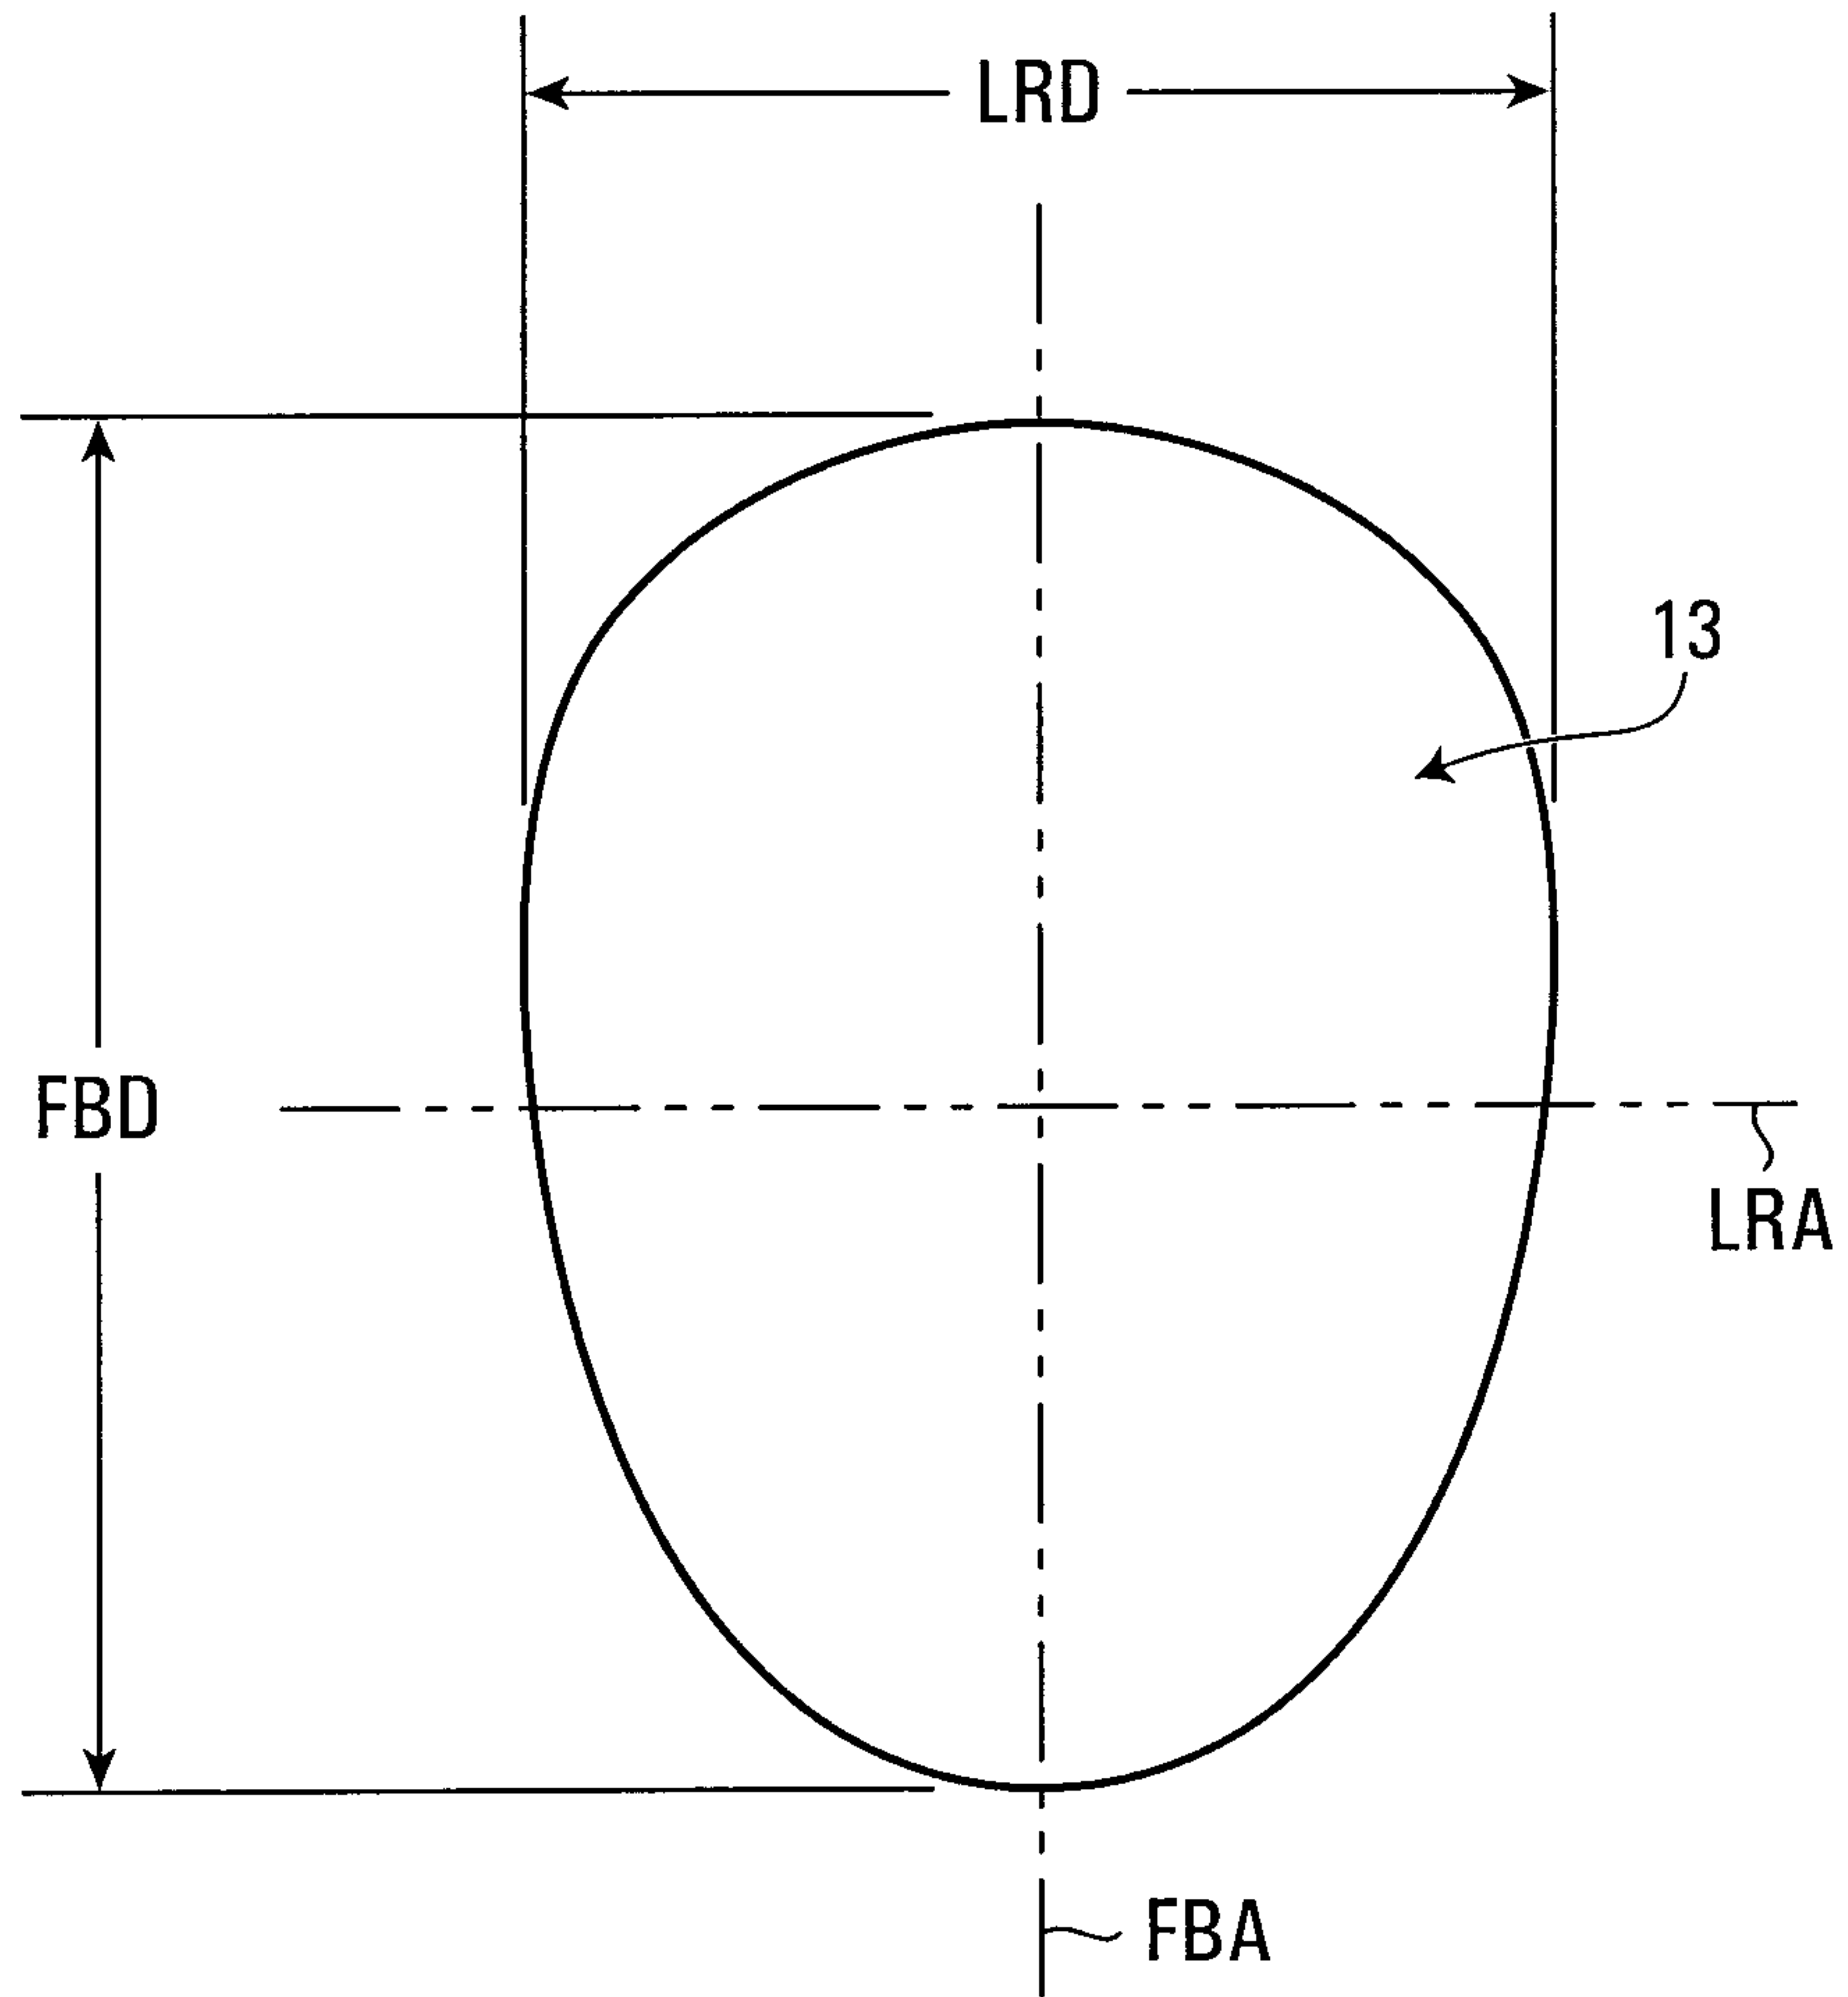


FIG. 64

40/40

