

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number

WO 2017/222650 A1

(43) International Publication Date
28 December 2017 (28.12.2017)

(51) International Patent Classification:

C23C 10/02 (2006.01) *C23C 10/48* (2006.01)
C23C 10/04 (2006.01) *C23C 10/60* (2006.01)
C23C 10/30 (2006.01) *F01D 5/28* (2006.01)
C23C 10/32 (2006.01)

HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:

PCT/US2017/030487

(22) International Filing Date:

02 May 2017 (02.05.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/189,854 22 June 2016 (22.06.2016) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(71) Applicant: GENERAL ELECTRIC COMPANY
[US/US]; 1 River Road, Schenectady, NY 12345 (US).

(72) Inventors: ZHANG, Liming; 300 Garlington Road, Greenville, SC 29615 (US). THOMPSON, Christopher, Edward; 300 Garlington Road, Greenville, SC 29615 (US). WANG, Limin; 1 Research Circle, Niskayuna, NY 12309 (US).

(74) Agent: MIDGLEY, Stephen, G. et al.; General Electric Company, Global Patent Operation, 901 Main Avenue, 3rd Floor, Norwalk, CT 06851 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,

(54) Title: COATING PROCESS FOR APPLYING A BIFURCATED COATING

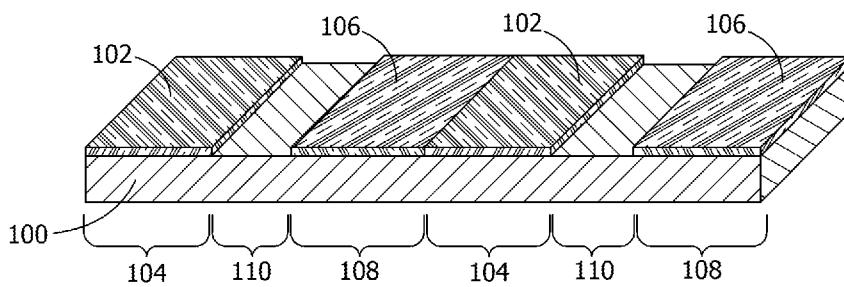


FIG. 1

(57) Abstract: A coating process for applying a bifurcated coating to an article is disclosed including applying an aluminizing slurry to a first portion of the article, applying a chromizing slurry to a second portion of the article, and simultaneously heat treating the article, the aluminizing slurry, and the chromizing slurry. Heat treating the aluminizing slurry forms an aluminide coating on the first portion of the article and an aluminide diffusion zone between the article and the aluminide coating. Heat treating the chromizing slurry forms a chromide coating on the second portion of the article and a chromide diffusion zone between the article and the chromide coating. The first portion and the second portion are both maintained in an unmasked state while applying the aluminizing slurry and the chromizing slurry and during the heat treating.

COATING PROCESS FOR APPLYING A BIFURCATED COATING

FIELD OF THE INVENTION

[0001] The present invention is directed to coating processes for applying a bifurcated coating to an article. More particularly, the present invention is directed to applying a bifurcated coating to an article including an aluminide coating and a chromide coating.

BACKGROUND OF THE INVENTION

[0002] Gas turbines include components, such as buckets (blades), nozzles (vanes), combustors, shrouds, and other hot gas path components which are coated to protect the components from the extreme temperatures, chemical environments and physical conditions found within the gas turbines. Different coating systems may be applied to different locations of the same turbine components to meet the local conditions which vary across the turbine components.

[0003] In one example, the airfoil and shank of a turbine bucket (blade) experience different conditions, and whereas the airfoil may be subjected to conditions which lead to oxidation, the shank may be more susceptible to conditions which lead to pitting. Providing coatings to address oxidative conditions and pitting conditions typically requires multiple coating processes which lead to long coating cycles, multi-step masking procedures, and sequential furnace runs, particularly in instances where the separate coating systems are incompatible with one another.

BRIEF DESCRIPTION OF THE INVENTION

[0004] In an exemplary embodiment, a coating process for applying a bifurcated coating to an article includes applying an aluminizing slurry to a first portion of the article, applying a chromizing slurry to a second portion of the article, and simultaneously heat treating the article, the aluminizing slurry, and the chromizing slurry. Heat treating the aluminizing slurry forms an aluminide coating on the first portion of the article and an aluminide diffusion zone between the article and the aluminide coating. Heat treating the chromizing slurry forms a chromide coating on the second portion of the article and a chromide diffusion zone between the article and the chromide coating. The first portion and the second portion are both maintained in an unmasked state while applying the aluminizing slurry and the chromizing slurry and during the

heat treating.

[0005] Other features and advantages of the present invention will be apparent from the following more detailed description of the preferred embodiment, taken in conjunction with the accompanying drawings, which illustrate, by way of example, the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] FIG. 1 is a schematic view of an article undergoing a coating process, according to an embodiment of the present disclosure.

[0007] FIG. 2 is a schematic view of a coated article, according to an embodiment of the present disclosure.

[0008] FIG. 3 is a perspective view of a coated turbine component, according to an embodiment of the present disclosure.

[0009] Wherever possible, the same reference numbers will be used throughout the drawings to represent the same parts.

DETAILED DESCRIPTION OF THE INVENTION

[0010] Provided are processes for applying a bifurcated coating to an article. Embodiments of the present disclosure, in comparison to processes not utilizing one or more features disclosed herein, decrease costs, increase process efficiency, decrease masking for each separated coating, decrease coating times, decrease furnace runs, increase production capacity, or a combination thereof.

[0011] Referring to FIG. 1, in one embodiment, a coating process includes applying an aluminizing slurry 102 to a first portion 104 of an article 100, applying a chromizing slurry 106 to a second portion 108 of the article 100, and simultaneously heat treating the article 100, the aluminizing slurry 102, and the chromizing slurry 106.

[0012] In a further embodiment, the coating process includes masking a third portion 110 of the article prior to the application of the aluminizing slurry 102 and the chromizing slurry 106. Any suitable masking process may be employed to prevent the third portion 110 from being coated by the aluminizing slurry 102 and the chromizing slurry 106.

[0013] The coating process may include a pre-coating cleaning prior to applying either of the aluminizing slurry 102 and the chromizing slurry 106. The cleaning may include any suitable cleaning process, including, but not limited to, steam cleaning, ultrasonic cleaning, solvent treatment, grit blasting, and combinations thereof.

[0014] The first portion 104 may be a contiguous area (as shown in FIG. 3) or may include a plurality of isolated regions (as shown in FIGS. 1 and 2), the second portion 108 may be a contiguous area (as shown in FIG. 3) or may include a plurality of isolated regions (as shown in FIGS. 1 and 2), and if a third portion 110 is present, the third portion 110 may be a contiguous area (as shown in FIG. 3) or may include a plurality of isolated regions (as shown in FIGS. 1 and 2).

[0015] Referring again to FIG. 1, the aluminizing slurry 102 and the chromizing slurry 106 may be applied directly to any suitable surface, including, but not limited to, a metallic surface. In one embodiment, the aluminizing slurry 102 and the chromizing slurry 106 are applied directly to a substrate of the article 100. The substrate may be any suitable material, including, but not limited to an iron-based superalloy, a nickel-based superalloy, a cobalt-based superalloy, or a combination thereof. In another embodiment, the article 100 includes a bond coat, and the aluminizing slurry 102 and the chromizing slurry 106 are applied directly to the bond coat. The bond coat may be any suitable material, including, but not limited to a MCrAlY, an aluminide diffusion coating, or a combination thereof.

[0016] In one embodiment, the aluminizing slurry 102 includes a donor powder, an activator powder, and a binder, the donor powder including a metallic aluminum alloy having a melting temperature higher than aluminum, and the binder including at least one organic polymer gel. The aluminizing slurry 102 may include any suitable composition, including, but not limited to, a composition having, by weight, about 35 to about 65% of the donor powder, about 1 to about 25% of the activator powder, and about 25 to about 60% of the binder.

[0017] The donor powder of the aluminizing slurry 102 may include a metallic aluminum alloy having a melting temperature higher than aluminum (melting point of about 1,221 °F). In one embodiment, the donor powder includes metallic aluminum alloyed with chromium, iron, another aluminum alloying agent, or a combination thereof, provided that the alloying agent does not deposit during the diffusion aluminizing process, but instead serves as an inert carrier for the aluminum of the donor material. In a further embodiment, the donor powder includes a

chromium-aluminum alloy such as, but not limited to, by weight, 44% aluminum, balance chromium and incidental impurities. In another embodiment, the donor powder has a particle size of up to 100 mesh (149 μm), alternatively up to -200 mesh (74 μm). Without being bound by theory, it is believed that the donor powder being a fine powder reduces the likelihood that the donor powder will be lodged or entrapped within the article 100.

[0018] The activator powder of the aluminizing slurry 102 may include any suitable material, including, but not limited to, ammonium chloride, ammonium fluoride, ammonium bromide, another halide activator or combinations thereof. Suitable materials for the activator powder react with aluminum in the donor material to form a volatile aluminum halide, such as, but not limited to, AlCl_3 or AlF_3 , which reacts at the article 100 to deposit aluminum, which diffuses into the article 100.

[0019] The binder of the aluminizing slurry 102 may include at least one organic polymer gel. Suitable binders include, but are not limited to, a polymeric gel available under the name Vitta Braz-Binder Gel from the Vitta Corporation, and low molecular weight polyols such as polyvinyl alcohol. In one embodiment, the binder further includes a cure catalyst, an accelerant, or both, such as, but not limited to, sodium hypophosphite.

[0020] In one embodiment, the aluminizing slurry 102 is free of inert fillers and inorganic binders. The absence of inert fillers and inorganic binders prevents such materials from sintering and becoming entrapped in the article 100.

[0021] In one embodiment, the chromizing slurry 106 includes a donor powder, an inorganic salt having a melting point that is less than or equal to about 800 $^{\circ}\text{C}$, an activator, and a binder, wherein the donor powder includes chromium. The donor powder may include chromium in the form for chromium powder, and may further include an aluminum powder. In one embodiment, the chromium powder includes an additive such as aluminum, cobalt, nickel, silicon, or mixtures thereof. In another embodiment, if aluminum powder is present, the aluminum powder includes an additive such as cobalt, nickel, silicon, or mixtures thereof.

[0022] The chromizing slurry 106 includes donor powder particles having any suitable size, including, but not limited to, particles having a mean diameter of about 1 to about 10 microns (i.e., micrometers (μm)) as measured using a conventional particle size analyzer. The purity of the donor powder particles may be at least about 95% by weight, and in one embodiment is at least about 99% by weight.

[0023] The inorganic salt of the chromizing slurry 106 may be any suitable inorganic salt having a melting point that is less than or equal to about 800 °C, including, but not limited to, KCl, LiF, LiCl, CaCl₂, MgCl₂, KOH, or combinations thereof. In one embodiment, the inorganic salt is a binary mixture of two inorganic salts. Typically, the salts in the binary mixture are in a well-mixed solid powder form. Such binary mixtures of two inorganic salts may include, but are not limited to, KCl-BaCl₂, NaCl-KCl, NaCl-CaCl₂, NaCl-BaCl₂, NaCl-MgCl₂, MgCl₂-BaCl₂, MgCl₂ CaCl₂, NaCl-Na₂CO₃, and mixtures thereof. The binary mixtures may have various molar ratios of the component salts. In one embodiment, the salt is KCl-BaCl₂ in a 0.555:0.445 molar ratio. In another embodiment, the salt is NaCl-BaCl₂ in a 0.6:0.4 molar ratio. The molar ratio of the salts in a binary mixture affects the melting point of the binary mixture. Accordingly, the molar ratio of the binary mixture may be controlled to select a melting point of the binary mixture that is less than or equal to about 800 °C. In another embodiment, the inorganic salt is a ternary mixture of three inorganic salts. Typically, the salts in the ternary mixture are in a well-mixed solid powder form. Such ternary mixtures of two inorganic salts may include, but are not limited to, LiF-NaF-MgF₂, LiCl-KCl-CaCl₂, LiF-PuF₃-ThF₄, and mixtures thereof. The ternary mixtures may have various molar ratios of the component salts. As with the binary mixtures, the molar ratio of the salts in a ternary mixture affects the melting point of the ternary mixture. Accordingly, the melting point of the ternary mixture may be adjusted by altering the molar ration of the three salts so that the melting point is less than or equal to about 800 °C.

[0024] The activator of the chromizing slurry 106 may be any suitable activator, including, but not limited to, ammonium halides, chromium halides, aluminum halides, and mixtures thereof. In one embodiment, the activator is NH₄Cl, NH₄F, NH₄Br, CrCl₂, CrCl₃, AlCl₃, or a combination thereof.

[0025] The binder of the chromizing slurry 106 may be any suitable binder which promotes cohesiveness of the chromizing slurry 106 and which decomposes when exposed to a predetermined temperature. In one embodiment, the predetermined temperature is a temperature within the range from about 600 °C to about 1300 °C, alternatively the temperature range from about 800 °C to about 950 °C. The binder may imbue the chromizing slurry 106 with the physical properties of a paste or a viscous liquid at room temperature. The binder may include one component or a combination of components. In one embodiment, the binder is a waterborne acrylic resin based binder, at least one organofunctional silane based binder, at least

one cellulose-derived water-soluble polymer based binder, at least one polyvinyl alcohol based binder, at least one epoxy resin based binder, at least one alcohol soluble resin based binder, or a combination thereof. In a further embodiment, the binder is “BINDER B-200”, which is commercially available from APV Engineered Coatings. As used herein, “BINDER B-200” refers to a composition including, by weight, about 69% water, about 20% to about 30% ethanol, about 1% to about 5% polyvinyl alcohol, about 1% to about 5% isopropanol, and about 0.1% to about 1% 4-methyl-2-pentanone.

[0026] In one embodiment, the chromizing slurry 106 includes, by weight, about 1% to about 60% of the donor powder, about 1% to about 70% of the inorganic salt, about 1% to about 30% of the activator, and at least about 1% of the binder.

[0027] In another embodiment, the chromizing slurry 106 includes: a chromium powder; a binary mixture of two inorganic salts selected from the group consisting of KCl-BaCl₂, NaCl-KCl, NaCl-CaCl₂, NaCl-BaCl₂, NaCl-MgCl₂, MgCl₂-BaCl₂, MgCl₂ CaCl₂, NaCl-Na₂CO₃, and mixtures thereof, wherein the binary mixture has a melting point that is less than or equal to about 800 °C; an activator selected from the group consisting of NH₄Cl, NH₄F, NH₄Br, CrCl₂, CrCl₃, AlCl₃, and mixtures thereof; and a binder. In a further embodiment, the binary mixture of two inorganic salts is KCl-BaCl₂ and the activator is NH₄Cl. In an alternate further embodiment, the binary mixture of two inorganic salts is NaCl-BaCl₂ and the activator is NH₄Cl.

[0028] The aluminizing slurry 102 and the chromizing slurry 106 may be applied, independently, by any suitable application technique, including, but not limited to, high-velocity oxygen fuel deposition, vacuum plasma spray deposition, painting, and combinations thereof.

[0029] Referring to FIGS. 1 and 2, in one embodiment, heat treating the aluminizing slurry 102 (as shown in FIG. 1) forms an aluminide coating 200 (as shown in FIG. 2) on the first portion 104 of the article 100 and an aluminide diffusion zone 202 between the article 100 and the aluminide coating 200. Heat treating the chromizing slurry (as shown in FIG. 1) forms a chromide coating 204 (as shown in FIG. 2) on the second portion 108 of the article 100 and a chromide diffusion zone 206 between the article 100 and the chromide coating 204. The first portion 104 and the second portion 108 are both maintained in an unmasked state while applying the aluminizing slurry 102 and the chromizing slurry 106 and during the heat treating.

The aluminide coating 200 and the chromide coating 204 define a bifurcated coating 208. Forming the aluminide coating 200 may include forming the aluminide coating 200 as an outward-type coating.

[0030] The heat treating of the article 100, the aluminizing slurry 102, and the chromizing slurry 106 may include any suitable temperature, including, but not limited to a temperature within a range of about 1,750 °F to about 2,100 °F, alternatively between about 1,800 °F to about 2,075 °F, alternatively between about 1,850 °F to about 2,050 °F. In one embodiment, the heat treating of the article 100, the aluminizing slurry 102, and the chromizing slurry 106 includes heating the article 100, the aluminizing slurry 102, and the chromizing slurry 106 to a temperature which is at or above the solution temperature for the aluminizing slurry 102 and the chromizing slurry 106. The heat treatment may include any suitable duration, including, but not limited to a duration from about 2 hours to about 8 hours, alternatively between about 3 hours to about 7 hours, alternatively between about 4 hours to about 6 hours, alternatively between about 4.5 hours to about 5.5 hours, alternatively about 5 hours.

[0031] In one embodiment, heat treating the article 100, the aluminizing slurry 102, and the chromizing slurry 106 consists of a single furnace cycle. In a further embodiment, applying the bifurcated coating 208 to the article 100 further includes aging the aluminide coating 200, the aluminide diffusion zone 202, the chromide coating 204, and the chromide diffusion zone 206. As used herein, “aging” is distinct from a “furnace cycle” in that the aging process is carried out at a lower temperature than the furnace cycle, and may be conducted in a separate heating environment from the furnace of the furnace cycle.

[0032] In one embodiment, following application of the aluminizing slurry 102 and the chromizing slurry 106 to the article 100, the article 100 is placed immediately in a coating chamber to perform the diffusion process. The coating chamber is evacuated, and may be backfilled with an inert or vacuum (with partial pressure) atmosphere (such as argon or hydrogen, respectively). The temperature within the coating chamber is raised to a temperature sufficient to burn off the binder (e.g. about 300 °F to about 400 °F), with further heating being performed to attain the desired diffusion temperature, during which time the activator is decomposed, the aluminum halide is formed, and aluminum is deposited on the article 100, forming the bifurcated coating 208 having the aluminide coating 200, the aluminide diffusion zone 202, the chromide coating 204, and the chromide diffusion zone 206.

[0033] Heating the aluminizing slurry 102 and the chromizing slurry 106 may form a residue on the bifurcated coating 208. The bifurcated coating 208 may be subjected to a post-coating cleaning following the heat treating. The post-coating cleaning may include any suitable technique, including, but not limited to, directed forced gas flow, grit blasting, glass bean blasting, solvent treatment, ultrasonic treatment, and combinations thereof.

[0034] Referring to FIG. 3, the article 100 may be any suitable article, including, but not limited to a turbine component 300. Suitable turbine components include, but are not limited to, a hot gas path component, a bucket (blade) 302, a nozzle (vane), a shroud, a combustor, a combustion component, or a combination thereof. In one embodiment, wherein the turbine component 300 is a bucket (blade) 302, the first portion 104 is an airfoil 304, the second portion 108 is a shank 306, and the third portion 110 is a root 308.

[0035] While the invention has been described with reference to a preferred embodiment, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out this invention, but that the invention will include all embodiments falling within the scope of the appended claims.

Claims

What is claimed is:

1. A coating process for applying a bifurcated coating to an article, comprising:
 - applying an aluminizing slurry to a first portion of the article;
 - applying a chromizing slurry to a second portion of the article; and
 - simultaneously heat treating the article, the aluminizing slurry, and the chromizing slurry, heat treating the aluminizing slurry forming an aluminide coating on the first portion of the article and an aluminide diffusion zone between the article and the aluminide coating, heat treating the chromizing slurry forming a chromide coating on the second portion of the article and a chromide diffusion zone between the article and the chromide coating,
wherein the first portion and the second portion are both maintained in an unmasked state while applying the aluminizing slurry and the chromizing slurry and during the heat treating.
2. The coating process of claim 1, further including a pre-coating cleaning prior to applying either of the aluminizing slurry and the chromizing slurry.
3. The coating process of claim 1, further including masking a third portion of the article.
4. The coating process of claim 1, further including aging the aluminide coating, the aluminide diffusion zone, the chromide coating, and the chromide diffusion zone.
5. The coating process of claim 1, further including a post-coating cleaning after the heat treating.
6. The coating process of claim 1, wherein heat treating the article, the aluminizing slurry, and the chromizing slurry consists of a single furnace cycle.
7. The coating process of claim 1, wherein the article is a turbine component.
8. The coating process of claim 7, wherein the turbine component is selected from the group consisting of a hot gas path component, a bucket (blade), a nozzle (vane), a shroud, a combustor, a combustion component, and combinations thereof.
9. The coating process of claim 8, wherein the turbine component is a bucket (blade), the first portion is an airfoil, and the second portion is a shank.
10. The coating process of claim 1, wherein the first portion includes a plurality of isolated regions.

11. The coating process of claim 1, wherein the second portion includes a plurality of isolated regions.
12. The coating process of claim 1, wherein the chromizing slurry includes a donor powder, an inorganic salt having a melting point that is less than or equal to about 800 °C, an activator powder, and a binder, the donor powder including chromium.
13. The coating process of claim 1, wherein the aluminizing slurry includes, by weight, about 35% to about 65% of a donor powder, about 1% to about 25% of an activator powder, and about 25% to about 60% of a binder, the donor powder including a metallic aluminum alloy having a melting temperature higher than aluminum, and the binder including at least one organic polymer gel.
14. The coating process of claim 13, wherein the donor powder includes a chromium-aluminum alloy.
15. The coating process of claim 13, wherein the donor powder has a particle size of up to 100 mesh.
16. The coating process of claim 13, wherein the activator powder is selected from the group consisting of ammonium chloride, ammonium fluoride, ammonium bromide, and combinations thereof.
17. The coating process of claim 13, wherein forming the aluminide coating includes forming the aluminide coating as an outward-type coating.
18. The coating process of claim 1, wherein heat treating the article, the aluminizing slurry, and the chromizing slurry includes a heat treating temperature within a range of about 1,750 °F to about 2,100 °F.
19. The coating process of claim 1, wherein heat treating the article, the aluminizing slurry, and the chromizing slurry includes a duration of from about 2 hours to about 8 hours.
20. The coating process of claim 1, wherein applying the aluminizing slurry and the chromizing slurry includes a technique selected from the group consisting of high-velocity oxygen fuel, vacuum plasma spray, painting, and combinations thereof.

1/1

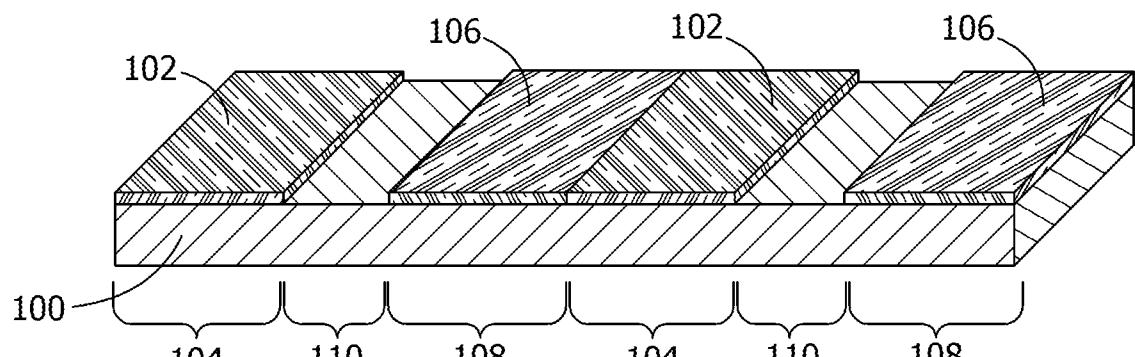


FIG. 1

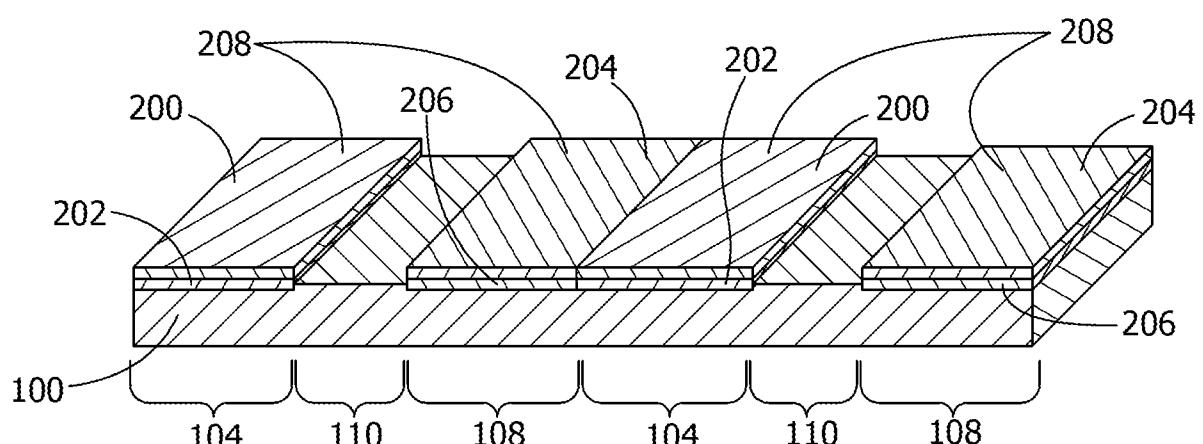


FIG. 2

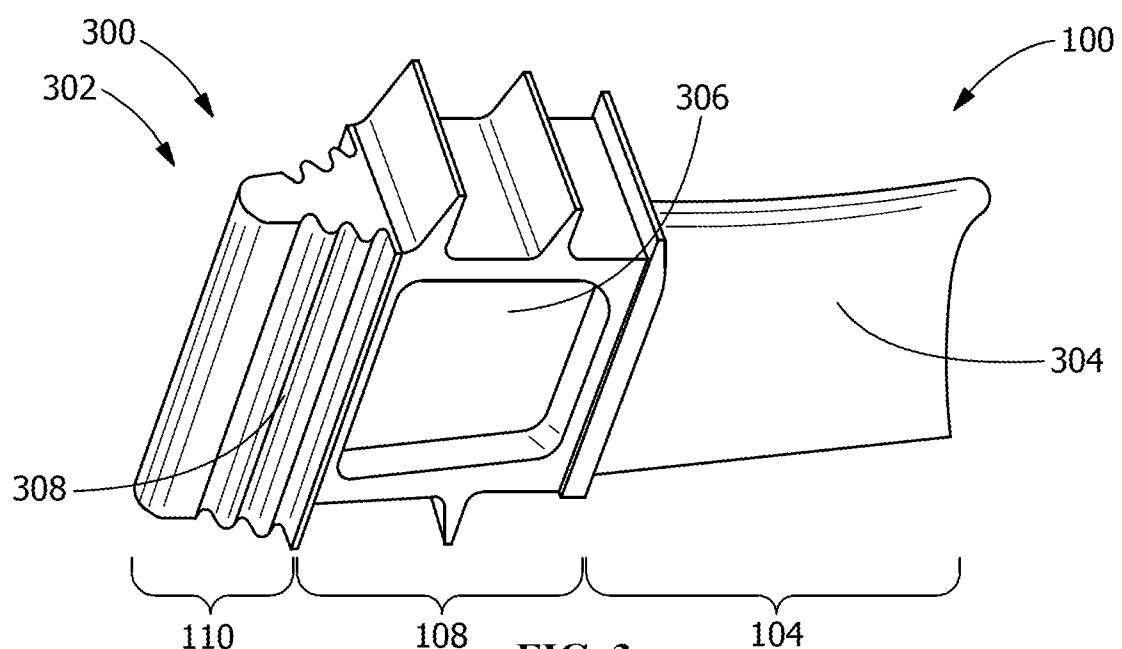


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/030487

A. CLASSIFICATION OF SUBJECT MATTER					
INV.	C23C10/02	C23C10/04	C23C10/30	C23C10/32	C23C10/48
	C23C10/60	F01D5/28			

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C23C F01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2015/197841 A1 (TANG ZHIHONG [US] ET AL) 16 July 2015 (2015-07-16) paragraph [0014] - paragraph [0017] paragraph [0029] - paragraph [0033] paragraph [0035] - paragraph [0039] paragraph [0041] - paragraph [0048] figures 1-2,6a,6b claims 7-16	1,4-20
Y	----- WO 2010/134918 A1 (GEN ELECTRIC [US]; WILKINS MELVIN HOWARD [US]; THOLKE BRENT ROSS [US];) 25 November 2010 (2010-11-25) paragraph [0042] - paragraph [0044]; figures 1,3	2,3
A	----- WO 2015/047783 A1 (UNITED TECHNOLOGIES CORP [US]) 2 April 2015 (2015-04-02) claims 12-20	1-20
Y	-----	2,3



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
6 September 2017	13/09/2017

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Ovejero, Elena

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2017/030487

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 2015197841	A1 16-07-2015	CA 2934321 A1 CN 105899707 A EP 3094759 A1 JP 2017504727 A KR 20160111410 A SG 11201604885Q A US 2015197841 A1 US 2017198382 A1 WO 2015108766 A1		23-07-2015 24-08-2016 23-11-2016 09-02-2017 26-09-2016 28-07-2016 16-07-2015 13-07-2017 23-07-2015

WO 2010134918	A1 25-11-2010	CA 2761697 A1 DE 112009004789 T5 GB 2482460 A JP 2012527537 A WO 2010134918 A1		25-11-2010 21-06-2012 01-02-2012 08-11-2012 25-11-2010

WO 2015047783	A1 02-04-2015	EP 3049547 A1 US 2016222803 A1 WO 2015047783 A1		03-08-2016 04-08-2016 02-04-2015
