



- (51) International Patent Classification:
G06F 9/38 (2006.01) *G06F 12/08* (2006.01)
- (21) International Application Number:
PCT/US2016/051040
- (22) International Filing Date:
09 September 2016 (09.09.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
15/252,168 30 August 2016 (30.08.2016) US
- (71) Applicant: **ADVANCED MICRO DEVICES, INC.**
[US/US]; One AMD Place, Sunnyvale, California 94085 (US).
- (72) Inventor: **HAVLIR, Steven R.**; 7171 Southwest Pkwy, Austin, Texas 78735 (US).
- (74) Agent: **HIRSCH, Mitchell D.**; Volpe and Koenig, P.C., 30 S. 17th Street, United Plaza, Suite 1800, Philadelphia, Pennsylvania 19103 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: METHOD AND DEVICE FOR DETERMINING BRANCH HISTORY FOR BRANCH PREDICTION

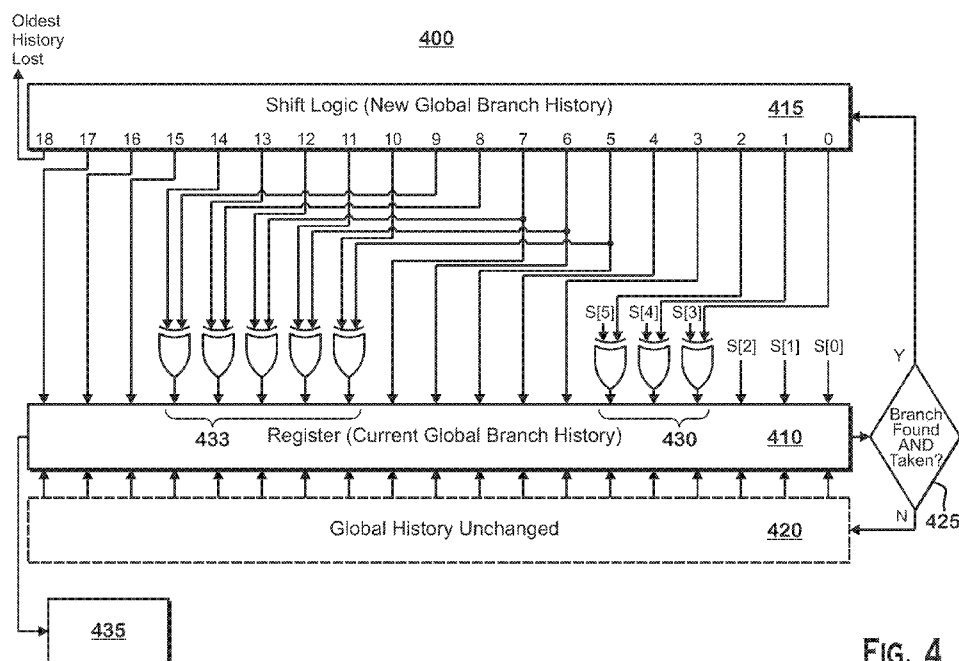


FIG. 4

(57) Abstract: Disclosed are a method and a processing device directed to determining global branch history for branch prediction. The method includes shifting first bits of a branch signature into a current global branch history and performing a bitwise exclusive-or (XOR) function on second bits of the branch signature and shifted bits of the current global branch history. In this way, the current global branch history is updated. The processing device implements the method using a shift logic configured to store and shift bits representing a current global branch history, a register configured to store the current global branch history, decision circuitry configured to determine whether or not a branch is taken, and XOR gates.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

METHOD AND DEVICE FOR DETERMINING BRANCH HISTORY FOR BRANCH PREDICTION

BACKGROUND

[0001] In computer architecture, a branch predictor is a digital circuit that tries to guess which way a branch, such as an if-then-else structure in a program or code, will go before this is known for sure. A branch predictor implements a method of branch prediction. Branch prediction improves the flow in an instruction pipeline and plays a role in achieving high effective performance in many microprocessor architectures.

[0002] Branch prediction is based on branch history, that is, a record of how often a given branch is taken and not taken. In a global branch history, the branch histories of multiple branches are stored in one set of bits.

[0003] FIG. 2 shows a traditional type of processing device and method used to update a global branch history. Circuitry determines whether or not a branch has been found (step 225). When a branch has not been found, a current global history is unchanged (step 220). When a branch is found, the current global branch history is shifted by one bit (step 215; shown as a left shift) and the oldest history bit (bit 3) is lost. The rightmost bit in the current global branch history is replaced by a bit indicating whether or not the branch has been taken (step 230) – for example, a 0 for not taken and a 1 for taken. In this manner, the current global branch history is updated. The current branch history is used in a branch predictor to predict whether a branch will be taken or not taken in the future.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] A more detailed understanding may be had from the following description, given by way of example in conjunction with the accompanying drawings wherein:

[0005] FIG. 1 is a block diagram of an example device in which one or more disclosed aspects may be implemented;

[0006] FIG. 2 shows a processing device configured to update a global branch history;

[0007] FIG. 3 shows another processing device configured to update a global branch history;

[0008] FIG. 4 shows another processing device configured to update a global branch history;

[0009] FIG. 5 shows a method for determining and updating a global branch history; and

[0010] FIG. 6 shows another method for determining and updating a global branch history.

DETAILED DESCRIPTION

[0011] In contrast to traditional global branch history methods and devices, such as previously described, the disclosed method and device improves timing and avoids loss of previous branch predictor training when a new branch is discovered. The disclosed method and device also provide benefit of being able to differentiate between identical taken/not taken (T/NT) patterns at different code locations. If the computer code being executed contains discovered NT branches, the disclosed method and device is able to track longer sequences than traditional global history updating methods and devices.

[0012] The method includes shifting first bits of a branch signature into a current global branch history and performing a bitwise exclusive-or (XOR) function on second bits of the branch signature and shifted bits of the current global branch history. The second bits are distinct from the first bits. The branch signature includes bits that identify a particular branch whose branch history is being updated. The shifting includes discarding one or more of the oldest bits in the current global branch history. The shifting and the performing of the bitwise XOR function are executed when a branch identified by the branch signature is taken. The current global branch history is not changed when a branch identified by the branch signature is not taken.

[0013] In an implementation, the method also includes shifting one or more newest bits in the current global branch history by a first number of places, shifting one or more oldest bits in the current global branch history by a second number of places different from the first number of places, and performing a bitwise XOR

function between bits shifted by the second number of places and newer bits in the current global branch history. These parts of the method are executed when a branch identified by the branch signature is taken, and the current global branch history does not change when a branch identified by the branch signature is not taken. For example, the second number of places is less than the first number of places (e.g., the first number of places is three and the second number of places is one).

[0014] In an implementation, the method is implemented such that the updated current global branch history is included in a first level of a two-level adaptive predictor.

[0015] In an implementation, the processing device, configured to determine and update global branch history for branch prediction, includes shift logic configured to shift bits representing a current global branch history, a register configured to store the current global branch history, decision circuitry configured to determine whether or not a branch is taken, and a first plurality of exclusive-or (XOR) gates.

[0016] In an implementation, the determining and updating of global branch history include the shift logic shifting bits representing a current global branch history and storing one or more of the shifted bits in the register, the register receiving and storing first bits of a branch signature, the first plurality of XOR gates performing a bitwise XOR function on second bits of the branch signature and shifted bits of the current global branch history, and storing a result of the bitwise XOR function in the register.

[0017] In an implementation, the processing device is configured to determine and update global branch history when the decision circuitry determines that a branch identified by the branch signature has been taken. In an implementation, the processing device is configured to not change the current global branch history when the decision circuitry determines that a branch identified by the branch signature is not taken.

[0018] In an implementation the processing device is further configured to execute compression of branch history information and branch signature information. In this implementation the processing device is configured to shift one

or more of the newest bits in the current global branch history by a first number of places, and shift one or more of the oldest bits in the current global branch history by a second number of places different from the first number of places. The processing device further includes a second plurality of XOR gates configured to perform a bitwise XOR function between bits shifted by the second number of places and newer bits in the current global branch history. This implementation of the processing device is also configured to execute compression of branch history information and branch signature information when the decision circuitry determines that a branch identified by the branch signature has been taken. The processing device does not change the current global branch history when the decision circuitry determines that a branch identified by the branch signature is not taken.

[0019] In a particular implementation of the processing device configured to execute compression, the second number of places may be less than the first number of places. The first number of places may be three and the second number of places may be one. Another particular implementation may include multiple levels of compression. As one example, newer bits in the current global branch history may be shifted by three places, older bits by two places, and still older bits by one place. For effective compression, the amount of shifting tends to decrease as the historical age of the bit increases.

[0020] The processing device includes a two-level adaptive predictor apparatus configured to receive the updated current global branch history in a first level.

[0021] Figure 1 is a block diagram of an example device 100 in which one or more disclosed embodiments are implemented. Examples of the device 100 include a computer, a gaming device, a handheld device, a set-top box, a television, a mobile phone, or a tablet computer. The device 100 includes a processor 102, a memory 104, a storage 106, one or more input devices 108, and one or more output devices 110. Optionally, the device 100 includes an input driver 112 and an output driver 114. It is understood that the device 100 may include additional components not shown in Figure 1.

[0022] The processor 102 includes a central processing unit (CPU), a graphics processing unit (GPU), a CPU and GPU located on the same die, or one or more processor cores, wherein each processor core may be a CPU or a GPU. The memory 104 is located on the same die as the processor 102, or the memory 104 is located separately from the processor 102. The memory 104 includes a volatile or non-volatile memory, for example, random access memory (RAM), dynamic RAM, or a cache.

[0023] The storage 106 includes a fixed or removable storage, for example, a hard disk drive, a solid state drive, an optical disk, or a flash drive. The input devices 108 include a keyboard, a keypad, a touch screen, a touch pad, a detector, a microphone, an accelerometer, a gyroscope, a biometric scanner, or a network connection (e.g., a wireless local area network card for transmission and/or reception of wireless IEEE 802 signals). The output devices 110 include a display, a speaker, a printer, a haptic feedback device, one or more lights, an antenna, or a network connection (e.g., a wireless local area network card for transmission and/or reception of wireless IEEE 802 signals).

[0024] The input driver 112 communicates with the processor 102 and the input devices 108, and permits the processor 102 to receive input from the input devices 108. The output driver 114 communicates with the processor 102 and the output devices 110, and permits the processor 102 to send output to the output devices 110. It is noted that the input driver 112 and the output driver 114 are optional components, and that the device 100 will operate in the same manner if the input driver 112 and the output driver 114 are not present.

[0025] FIG. 3 shows an example implementation of an electronic processing device 300 configured to determine and update global branch history for branch prediction. Specifics of electronic processing device 300 such as exact numbers of bits are not to be considered as limiting.

[0026] A current global branch history is stored as a bit sequence in a register 310. In FIG. 3, the current global branch history is shown as having eight bits, but this number is not to be considered limiting. When a branch is found, a determination is made by decision circuitry 325 whether the branch has been taken or not taken. If the branch has not been taken, the current global history is not

changed 320 and is re-stored in register 310. If the branch has been taken, the current global branch history is updated, as in the following example, which is not to be considered limiting.

[0027] The updating begins with shift logic 315 shifting bits representing a current global branch history, and storing the shifted bits in register 310. As shown in FIG. 3, for example, bits 0 through 5 are shifted to the left by two places. In this process, older bits 6 and 7 of this branch history are discarded. One or more of the shifted bits, such as bits 2-5, are stored directly into register 310. Register 310 receives and stores first bits S[1] and S[0] of a branch signature, which identifies a particular branch whose branch history is being updated. As non-limiting examples, a branch signature could be as simple as the least significant bits of a linear address, or it could be as complicated as (a first linear address portion) XOR (a second linear address portion) XOR (bits representing branch type) XOR (bits representing other attributes of the branch). If a 4 bit branch signature is needed, for example, the 12 least significant bits of a linear address (LINAD) can be XOR'ed with four bits representing branch type, as follows:

[0028] LINAD [11:8] XOR

[0029] LINAD[7:4] XOR

[0030] LINAD[3:0] XOR

[0031] TYPE[3:0].

[0032] Updating of current global branch history continues with a plurality of XOR gates 330 performing a bitwise XOR function on second bits of the branch signature – such as S[3] and S[2] – and shifted bits of the current global branch history, such as bits 0 and 1. Bits resulting from this performance of bitwise XOR function are stored in register 310, thereby updating the current global branch history stored in register 310.

[0033] Global branch history stored in register 310 is passed to a branch predictor 335, an electronic circuit that predicts a likelihood that a branch will be taken, using the current branch history. In an implementation, the branch predictor 335 is a two-level adaptive predictor apparatus that is configured to receive updated current global branch history in its first level. Alternative implementations may include other types of branch predictors.

[0034] FIG. 4 shows an alternative example implementation of an electronic processing device 400 configured to determine and update global branch history for branch prediction. Specifics of electronic processing device 400 such as exact numbers of bits are not to be considered as limiting. The implementation of FIG. 4 includes compression of branch history information and branch signature information through variable shifting and additional XOR functions.

[0035] Similar to the example of FIG. 3, a current global branch history is stored as a bit sequence in a register 410. In FIG. 4, the current global branch history is shown as having 19 bits, but this number is not to be considered limiting.

[0036] When a branch is found, a determination is made by decision circuitry 425 whether the branch has been taken or not taken. If the branch has not been taken, the current global history is not changed 420 and is re-stored in register 410. If the branch has been taken, the current global branch history is updated, as in the following example, which is not to be considered limiting.

[0037] In the implementation shown in FIG. 4, the updating begins with shift logic 415 shifting bits representing a current global branch history, and storing the shifted bits in register 410. In contrast to FIG. 3, however, one or more of the newest bits of the current global branch history are shifted by a first number of places, and one or more of the oldest bits are shifted by a second number of places, the first number of places and the second number of places being not equal. In particular, the second number of places is less than the first number of places. As shown in FIG. 4, bits 0 through 7 are shifted to the left by three places, while bits 10 through 16 are shifted to the left by one place. One or more of the shifted bits are stored directly into register 410. In the example of FIG. 4, these bits are 3-7, 15, 16, and 17. In this process, oldest bit 18 of this branch history is discarded.

[0038] Similar to FIG. 3, register 410 receives and stores first bits S[2], S[1] and S[0] of a branch signature. Similar to FIG. 3, updating of current global branch history continues with a first plurality of XOR gates 430 performing a bitwise XOR function on second bits of the branch signature – S[5], S[4] and S[3] in the example of FIG. 4 – and shifted bits of the current global branch history, bits 0, 1, and 2 in the example of FIG. 4. Bits resulting from this performance of the bitwise XOR function are stored in register 410 as part of the updated current branch history.

[0039] In contrast to FIG. 3, the device of FIG. 4 performs a compression using a second plurality of XOR gates 433. The XOR gates 433 are configured to perform a bitwise XOR function between current global branch history bits shifted by the second number of places and newer bits of the current global branch history. Bits resulting from this performance of bitwise XOR function are stored in register 410 to complete updating of current global branch history. In the particular example of FIG. 4, the following XOR functions are performed: 10 XOR 5, 11 XOR 6, 12 XOR 7, 13 XOR 8, and 14 XOR 9.

[0040] In an implementation, global branch history stored in register 410 is passed to a branch predictor 435 that predicts a likelihood that a branch will be taken using the current global branch history. In an implementation, the branch predictor 435 is a two-level adaptive predictor apparatus that is configured to receive updated current global branch history in its first level. Alternative implementations may include other types of branch predictors.

[0041] FIG. 5 shows a method 500 of determining global branch history for branch prediction. The exact order of steps shown is not necessarily to be construed as limiting. During execution of code, a branch is encountered (step 510). A determination is made whether or not this branch is taken (step 515). When the branch is not taken, a current global branch history is not changed (step 520) and the method returns to wait for a next encountered branch (step 510).

[0042] When the branch is taken, the current global branch history is updated. Updating begins by shifting first bits of a branch signature into a current global branch history (step 525). The shifting includes discarding one or more of the oldest bits in the current global branch history. A bit-wise XOR function is performed on second bits of the branch signature and shifted bits of the current global branch history (step 530). The current global branch history is now updated and stored in a register, as described above. The method returns to wait for a next encountered branch (step 510).

[0043] FIG. 6 shows another implementation 600 of a method of determining global branch history for branch prediction. The exact order of steps shown is not necessarily to be construed as limiting. In addition to the method shown in FIG. 5, the implementation shown in FIG. 6 includes compression of branch history

information and branch signature information through variable shifting and additional XOR functions. As in FIG. 5, a branch is encountered (step 610) and a determination is made (step 615) whether or not this branch has been taken. If it has not been taken then, as in FIG. 5, the current global branch history is not changed (step 620) and the method returns to wait for the next branch to be encountered (step 610).

[0044] When the branch is taken, one or more the newest bits in the current global branch history are shifted by a first number of places (step 625). First bits of a branch signature are shifted into the current global branch history (step 627). An exclusive XOR function is performed on second bits of the branch signature and bits of the current global branch history shifted by the first number of places (step 630).

[0045] One or more of the oldest bits in the current global branch history are shifted by a second number of places different from the first number of places (step 635). In a particular implementation, the second number of places is less than the first number of places. As an example, the first number of places is three and the second number of places is one. As a result of the two shifts, one or more of the oldest bits in current global branch history are discarded.

[0046] A bitwise XOR function is performed between bits of the current global branch history shifted by the second number of places and newer bits in the current global branch history (step 640). One or more of the shifted bits of the current global branch history become bits of the updated branch history without further processing.

[0047] The current global branch history is now updated. In an implementation, the updated global branch history is stored in a register, as described above. The method returns to wait for a next encountered branch (step 610).

[0048] It should be understood that many variations are possible based on the disclosure herein. Although features and elements are described above in particular combinations, each feature or element can be used alone without the other features and elements or in various combinations with or without other features and elements.

[0049] The methods provided are implemented in a general purpose computer, a processor, or a processor core. Suitable processors include, by way of example, a general purpose processor, a special purpose processor, a conventional processor, a digital signal processor (DSP), a plurality of microprocessors, one or more microprocessors in association with a DSP core, a controller, a microcontroller, Application Specific Integrated Circuits (ASICs), Field Programmable Gate Arrays (FPGAs) circuits, any other type of integrated circuit (IC), and/or a state machine. Such processors can be manufactured by configuring a manufacturing process using the results of processed hardware description language (HDL) instructions and other intermediary data including netlists (such instructions capable of being stored on a computer readable media). The results of such processing can be maskworks that are then used in a semiconductor manufacturing process to manufacture a processor which implements aspects of the embodiments.

[0050] The methods or flow charts provided herein are implemented in a computer program, software, or firmware incorporated in a non-transitory computer-readable storage medium for execution by a general purpose computer or a processor. Examples of non-transitory computer-readable storage mediums include a read only memory (ROM), a random access memory (RAM), a register, cache memory, semiconductor memory devices, magnetic media such as internal hard disks and removable disks, magneto-optical media, and optical media such as CD-ROM disks, and digital versatile disks (DVDs).

*

*

*

CLAIMS

What is claimed is:

1. A method of determining global branch history for branch prediction, the method comprising:
shifting first bits of a branch signature into a current global branch history;
and
performing a bitwise exclusive-or (XOR) function on second bits of the branch signature and shifted bits of the current global branch history to update the current global branch history, wherein the second bits are distinct from the first bits.
2. The method of claim 1, wherein the branch signature comprises bits that identify a particular branch whose branch history is being updated.
3. The method of claim 1, further comprising discarding one or more oldest bits in the current global branch history.
4. The method of claim 1, wherein the shifting and the performing of the bitwise XOR function are executed when a branch identified by the branch signature is taken.
5. The method of claim 1, wherein the current global branch history is not changed when a branch identified by the branch signature is not taken.
6. The method of claim 1, further comprising compression of branch history information and branch signature information, the compression comprising:
shifting one or more newest bits in the current global branch history by a first number of places;
shifting one or more oldest bits in the current global branch history by a second number of places different from the first number of places; and
performing a bitwise XOR function between bits shifted by the second number of places and newer bits in the current global branch history.

7. The method of claim 6, executed when a branch identified by the branch signature is taken.

8. The method of claim 6, wherein the current global branch history is not changed when a branch identified by the branch signature is not taken.

9. The method of claim 6, wherein the second number of places is less than the first number of places.

10. The method of claim 1, wherein the updated current global branch history is included in a first level of a two-level adaptive predictor.

11. A processing device configured to determine and update global branch history for branch prediction, the processing device comprising:

shift logic configured to shift bits representing a current global branch history;

a register configured to store the current global branch history;

decision circuitry configured to determine whether or not a branch is taken;

and

a first plurality of exclusive-or (XOR) gates;

wherein the determining and updating of global branch history comprises:

the shift logic shifting bits representing a current global branch history and storing one or more of the shifted bits in the register;

the register receiving and storing first bits of a branch signature, the branch signature comprising bits that identify a particular branch whose branch history is being updated;

the first plurality of XOR gates performing a bitwise XOR function on second bits of the branch signature and shifted bits of the current global branch history, wherein the second bits are distinct from the first bits; and

storing a result of the bitwise XOR function in the register to update the current global branch history.

12. The processing device of claim 11, further configured to determine and update global branch history for branch prediction when the decision circuitry determines that a branch identified by the branch signature has been taken.

13. The processing device of claim 11, further configured to not change the current global branch history when the decision circuitry determines that a branch identified by the branch signature is not taken.

14. The processing device of claim 11, further configured to execute compression of branch history information and branch signature information, wherein:

the shift logic is configured to shift one or more newest bits in the current global branch history by a first number of places;

the shift logic is configured to shift one or more oldest bits in the current global branch history by a second number of places different from the first number of places; and

the processing device further comprises a second plurality of XOR gates configured to perform a bitwise XOR function between bits shifted by the second number of places and newer bits in the current global branch history.

15. The processing device of claim 14, further configured to execute compression of branch history information and branch signature information when the decision circuitry determines that a branch identified by the branch signature has been taken.

16. The processing device of claim 14, further configured to not change the current global branch history when the decision circuitry determines that a branch identified by the branch signature is not taken.

17. The processing device of claim 14, wherein the second number of places is less than the first number of places.

18. The processing device of claim 14, further comprising a two-level adaptive predictor apparatus configured to receive the updated current global branch history in a first level.

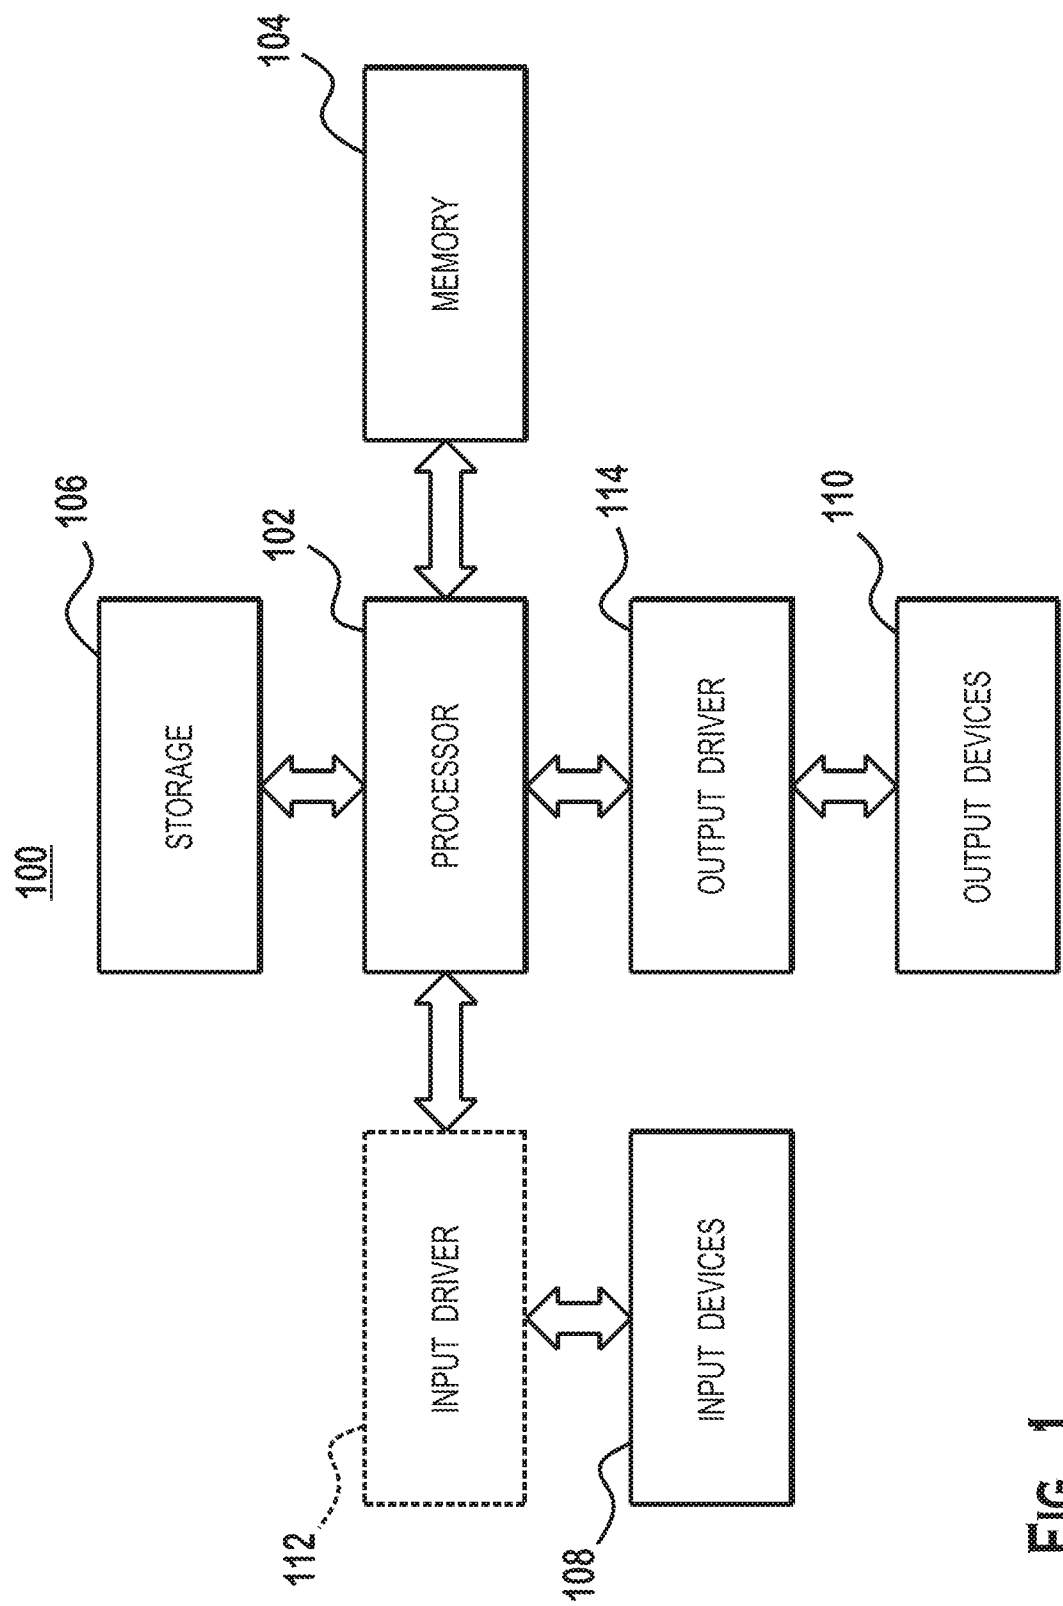


FIG. 1

2 / 6


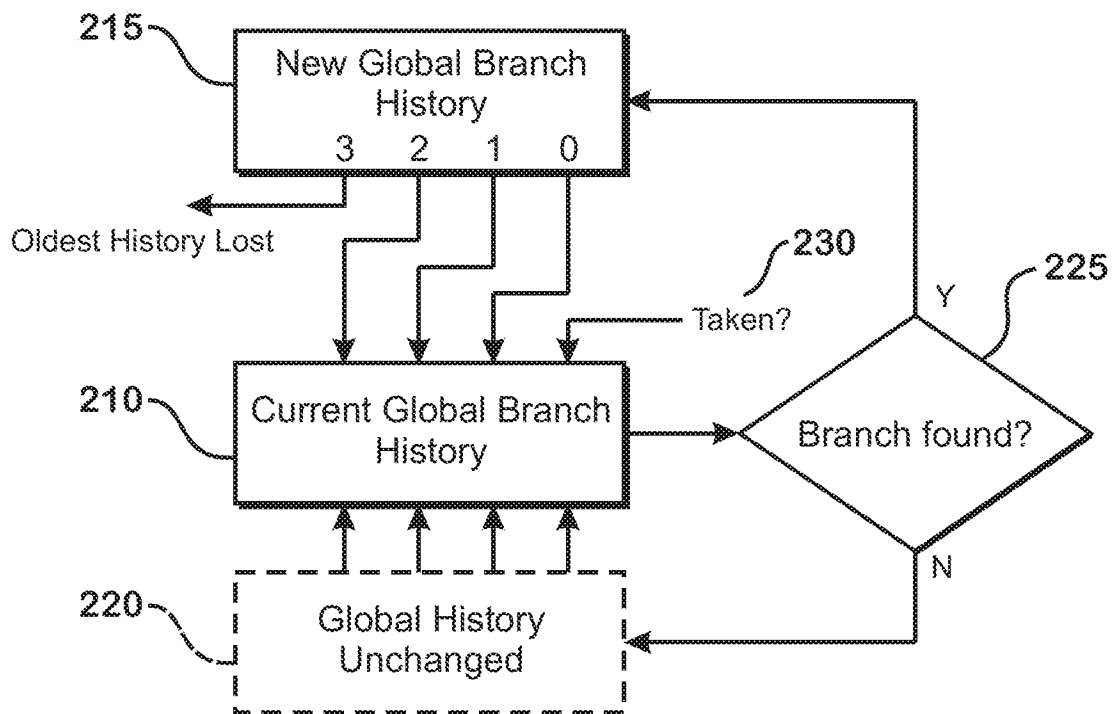
200

FIG. 2
(PRIOR ART)

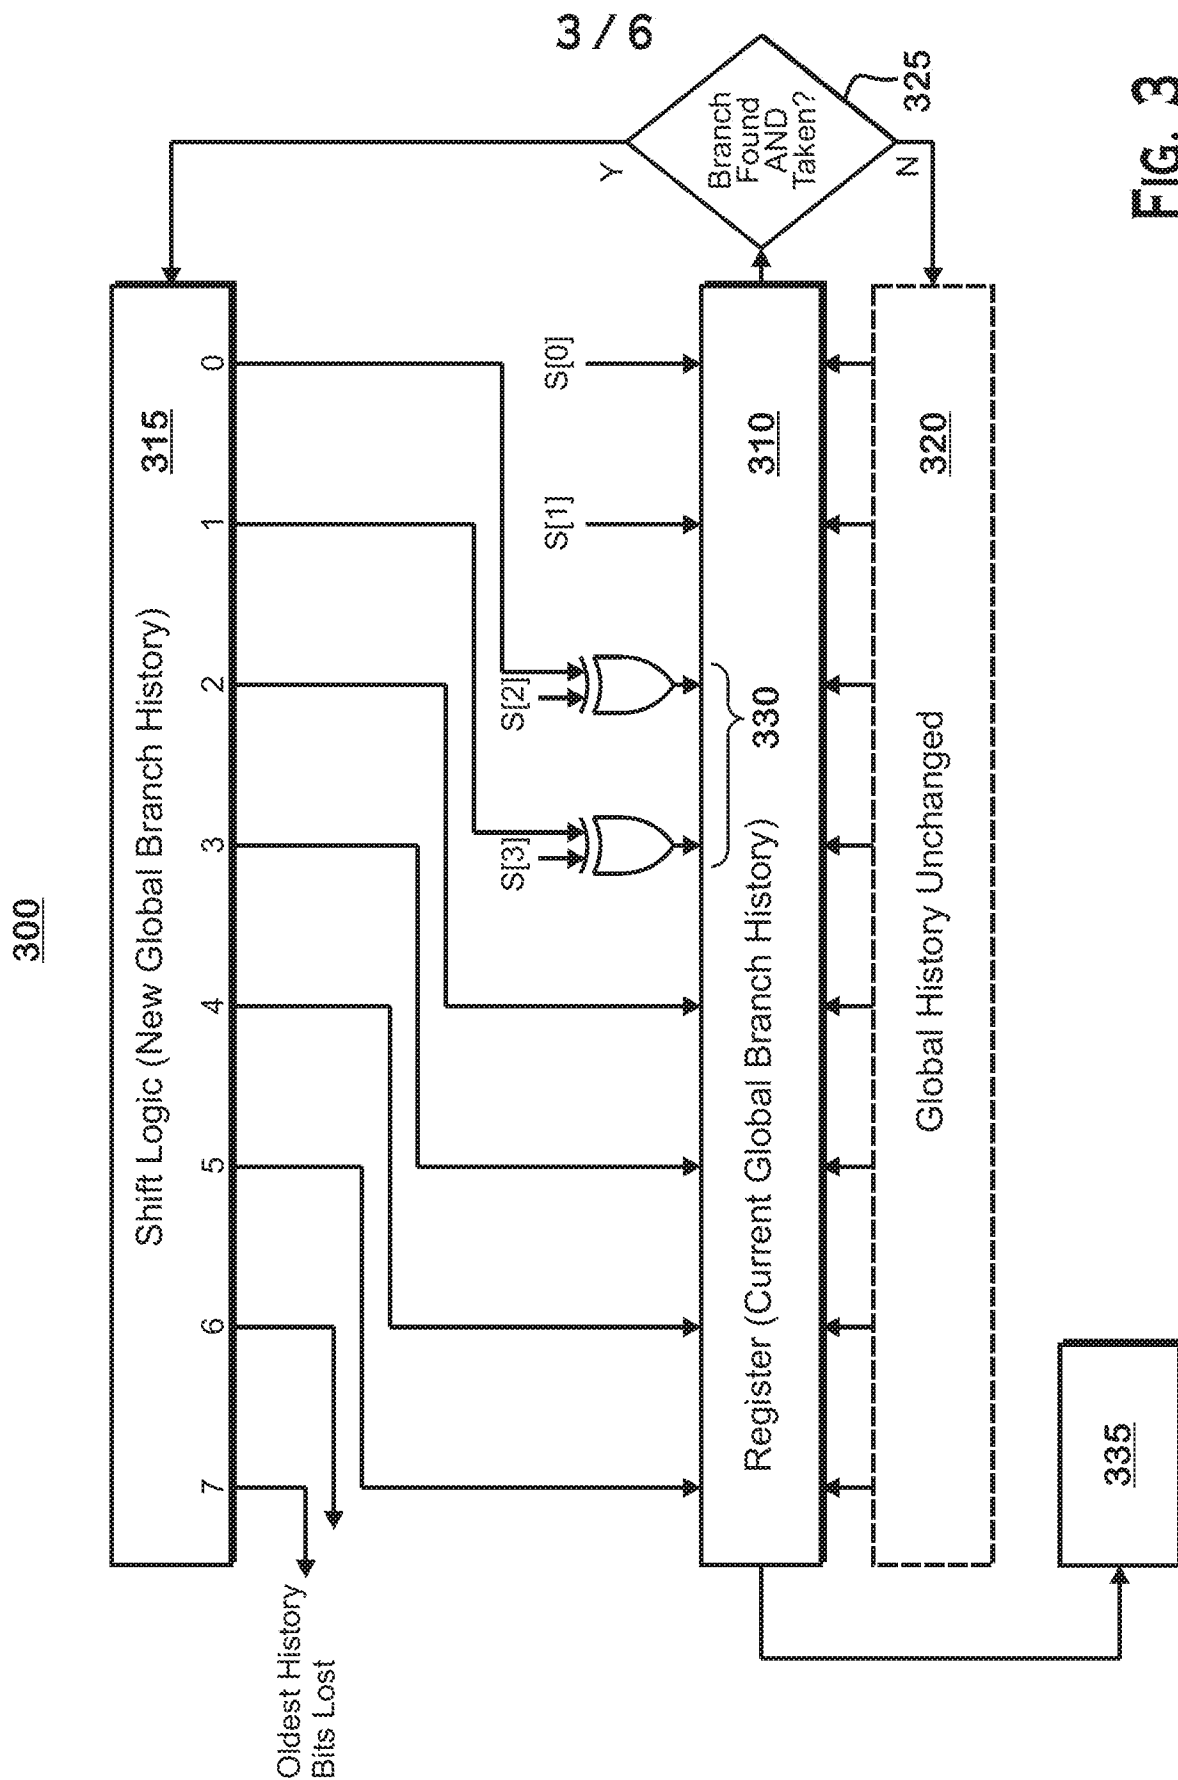

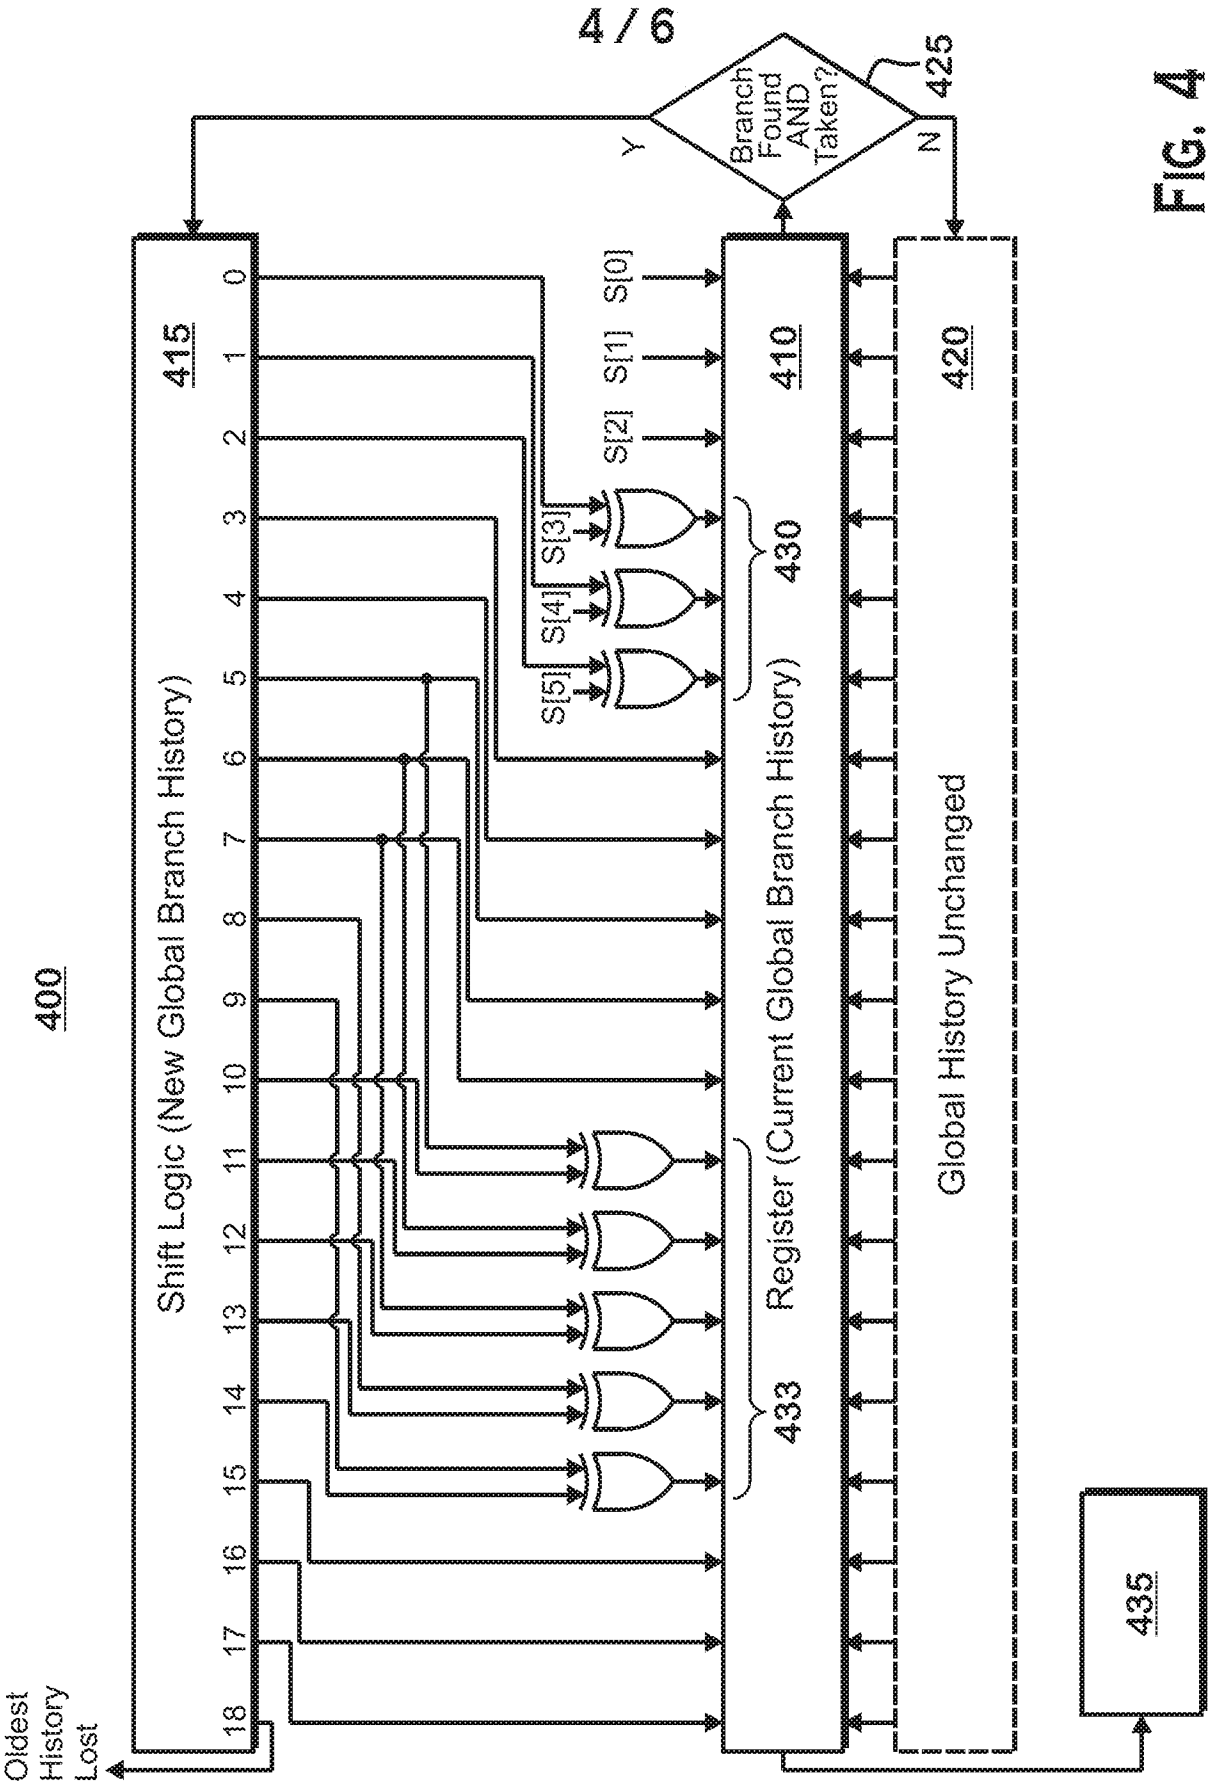


FIG. 4

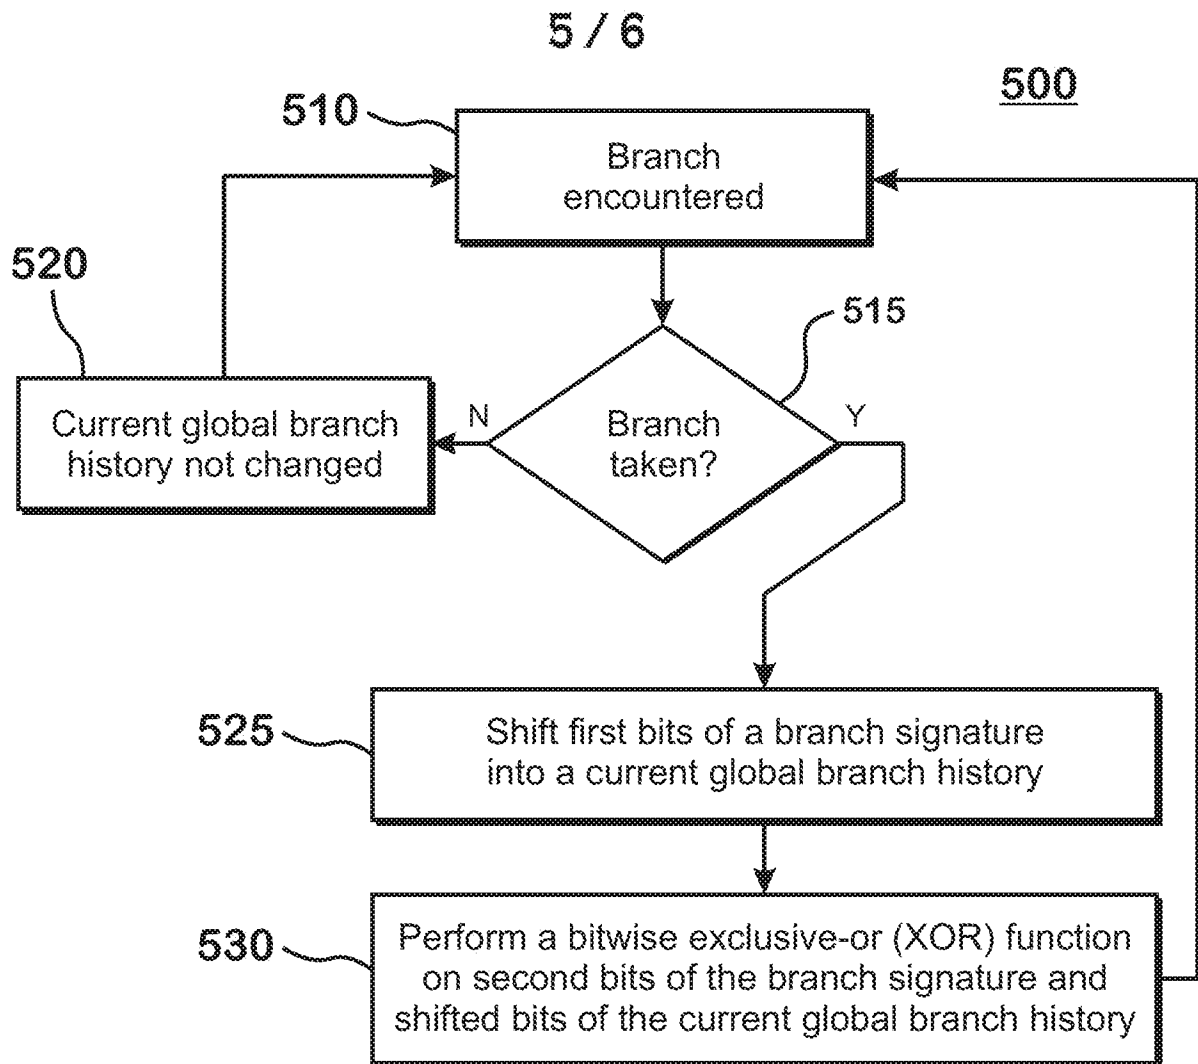


FIG. 5

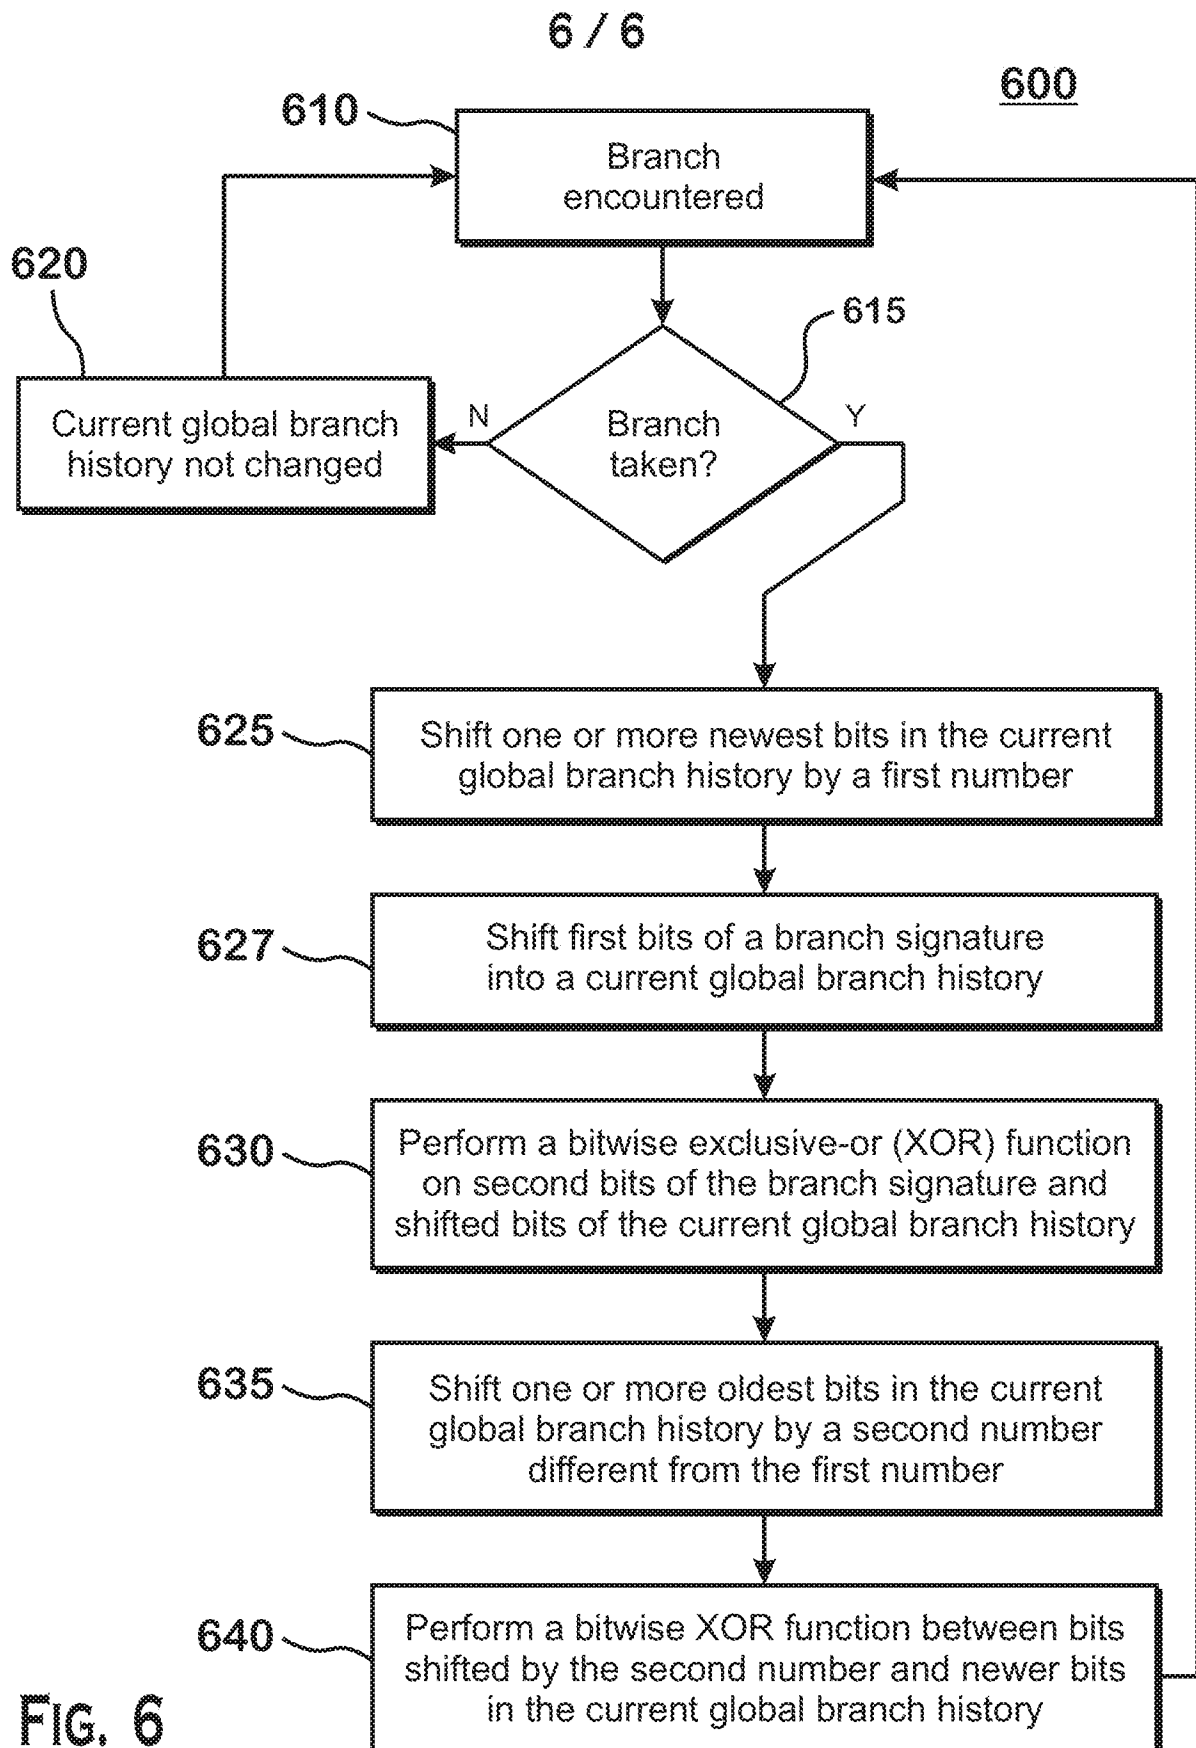


FIG. 6

A. CLASSIFICATION OF SUBJECT MATTER**G06F 9/38(2006.01)i, G06F 12/08(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F 9/38; G06F 9/30; G06F 9/00; G06F 12/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: global branch history, branch prediction, signature, shift, update, taken, bitwise exclusive-or (XOR) function

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009-0198984 A1 (JON A. LOSCHKE et al.) 06 August 2009 See paragraphs [0012]-[0048]; claims 1, 12; and figures 2-4A.	1-18
A	US 6721877 B1 (I-CHENG K. CHEN et al.) 13 April 2004 See column 13, line 28 - column 22, line 26; and figures 4-7.	1-18
A	US 7000096 B1 (BALARAM SINHARROY) 14 February 2006 See column 3, line 56 - column 8, line 6; and figures 1-3B.	1-18
A	US 2007-0150712 A1 (ABID ALI et al.) 28 June 2007 See paragraphs [0020]-[0036]; and figure 1.	1-18
A	US 2009-0125707 A1 (TIMOTHY A. OLSON et al.) 14 May 2009 See paragraphs [0030]-[0039]; and figure 3.	1-18



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 May 2017 (23.05.2017)

Date of mailing of the international search report

23 May 2017 (23.05.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office


189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

CHIN, Sang Bum

Telephone No. +82-42-481-8398



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/051040

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009-0198984 A1	06/08/2009	US 7844806 B2	30/11/2010
US 6721877 B1	13/04/2004	None	
US 7000096 B1	14/02/2006	None	
US 2007-0150712 A1	28/06/2007	US 7461243 B2	02/12/2008
US 2009-0125707 A1	14/05/2009	US 2010-0169627 A1	01/07/2010
		US 7707398 B2	27/04/2010
		US 7904705 B2	08/03/2011
		US 7975133 B1	05/07/2011