



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
26.10.2016 Bulletin 2016/43

(51) Int Cl.:
H01Q 1/27 (2006.01) H01Q 1/22 (2006.01)

(21) Application number: **15275123.6**

(22) Date of filing: **21.04.2015**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA

(72) Inventor: **The designation of the inventor has not yet been filed**

(74) Representative: **BAE SYSTEMS plc**
Group IP Department
Farnborough Aerospace Centre
Farnborough
Hampshire GU14 6YU (GB)

(71) Applicant: **BAE Systems PLC**
London SW1Y 5AD (GB)

(54) **FABRIC ANTENNA**

(57) A fabric antenna for telecommunications is disclosed. The fabric antenna comprises a host yarn, which is substantially electrically non-conducting, and an antenna yarn, which is substantially electrically conducting. The host yarn and antenna yarn are knitted together to

form a host fabric comprising an antenna grid. The antenna grid comprises a plurality of intersecting antenna tracks formed of antenna yarn. The tracks are separated by regions of the host fabric and are electrically coupled together at the regions where the tracks intersect.

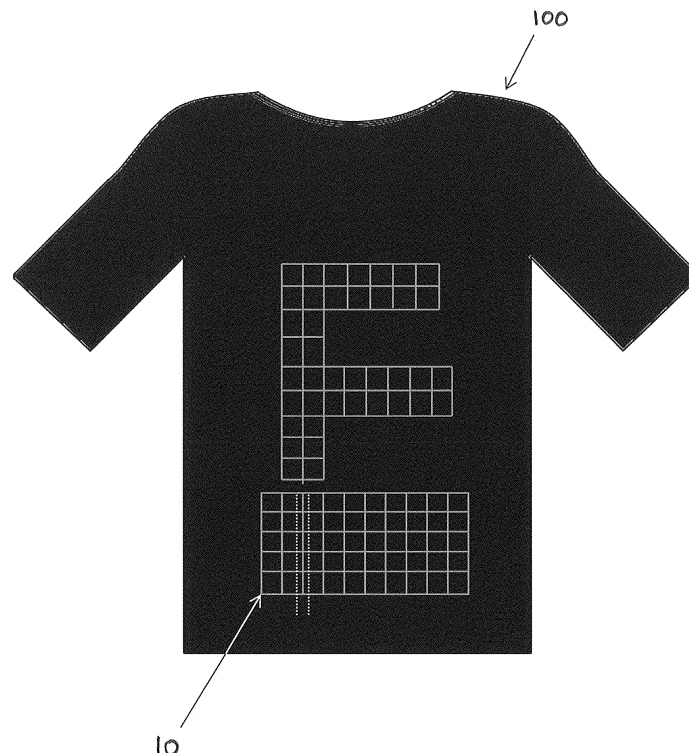


Figure 1

Description

[0001] The present invention relates to a fabric antenna.

[0002] It is known to provide a garment with an antenna, such that the antenna can be worn by a user. Such antennas include an electrically conductive sheet, such as a Nora Dell sheet material, which may be ironed onto the surface of a t-shirt, for example. However, it is often difficult to electrically couple the sheet with a communications cable for enabling communications using the antenna. In addition, the sheet material has a relatively high optical reflectivity, which reduces the covertness of the garment. It is also found that the sheet material lacks sufficient strength to be suitably sewn onto a garment and degrades during washing of the garment.

[0003] According to a first aspect of the present invention there is provided a fabric antenna for communications, the fabric antenna comprising a host yarn, which is substantially electrically non-conducting, and an antenna yarn, which is substantially electrically conducting, the host yarn and antenna yarn being knitted together to form a host fabric formed of host yarn comprising an antenna grid formed of antenna yarn, the antenna grid comprising a plurality of intersecting antenna tracks, the tracks being separated by regions of the host fabric, the tracks of the antenna grid being electrically coupled together at the regions where the tracks intersect.

[0004] Advantageously, the grid nature of the antenna provides for an increased flexibility in the fabric, whereas the knitted form of the antenna yarn with the host yarn provides for a secure coupling of the antenna with the host fabric which can be subsequently sewn onto a garment, for example.

[0005] In an embodiment, the antenna grid comprises a plurality of grid sections, each section comprising a first and second side track and a first and second end track which separately extend between opposite ends of the first and second side tracks to form a closed periphery of the grid section. Each section further comprises a central track which extends along a central axis of the respective grid section and a plurality of intermediate cross tracks which extend across the central track, between side tracks.

[0006] Preferably, the end tracks and cross tracks are electrically coupled to each side track and the central track, and the grid sections are electrically coupled to each other. It is envisaged that the electrical coupling may be formed by the intimate contact of the knitted antenna yarn at the intersecting points.

[0007] In an embodiment, each grid section comprises a rectangular periphery and the grid sections are configured within the host fabric to form an F-shaped antenna grid.

[0008] In an embodiment, the antenna tracks of the antenna grid comprise a square arrangement of intersecting tracks.

[0009] In an embodiment, the antenna tracks may comprise a course or wale of knitted stitches in the fabric. The number of knitted stitches of host yarn per unit length of the fabric is preferably greater than the number of knitted stitches of antenna yarn per unit length of fabric. The reduced number of stitches of antenna yarn provides for a more flexible fabric and reduces the length of antenna yarn required to create the antenna.

[0010] In an embodiment, one or more of the antenna tracks may be formed by two or more adjacent courses or wales of knitted stitches.

[0011] The fabric antenna further comprises an antenna ground, which comprises a ground grid formed of ground yarn which is substantially electrically conducting, the ground yarn and host yarn being knitted together to form a host fabric comprising the antenna ground.

[0012] In an embodiment, the ground grid is knitted adjacent the antenna grid and comprises a plurality of intersecting ground tracks, similar to the antenna grid.

[0013] The ground grid comprises a closed periphery of ground tracks and a plurality of longitudinal and lateral ground tracks which extend within the periphery to form a square arrangement of intersecting ground tracks. The peripherally extending ground tracks, longitudinal ground tracks and lateral ground tracks are preferably electrically coupled together at the regions of intersection.

[0014] In an embodiment, the ground tracks may comprise a course or wale of knitted stitches in the fabric. The number of knitted stitches of host yarn per unit length of the fabric is preferably greater than the number of knitted stitches of ground yarn per unit length of fabric. The reduced number of stitches of ground yarn similarly provides for a more flexible fabric and reduces the length of ground yarn required to create the antenna ground.

[0015] Preferably, the antenna grid and ground grid extend in substantially the same plane.

[0016] In an embodiment, one or more of the ground tracks may be formed by two or more adjacent courses or wales of knitted stitches.

[0017] In an embodiment, the antenna yarn and/or ground yarn comprises AmberStrand®.

[0018] The fabric antenna may comprise a lining to a garment, such as a jumper or t-shirt, such that the garment may form a body worn antenna.

[0019] At least one track of the antenna grid preferably extends beyond the periphery of the antenna grid and terminates at a connector for connecting the antenna grid to a communications cable, such as a coaxial cable. The coaxial cable may extend to a communications module held within a bag which may be carried by a wearer of the fabric antenna, for example.

[0020] According to a second aspect of the present invention there is provided a garment comprising an outer layer of fabric material and a lining comprising a fabric antenna of the first aspect.

[0021] In an embodiment, the garment further comprises a pocket for supporting a communications cable which is used for connecting the fabric antenna to a communi-

cations module.

[0022] In an embodiment, the pocket is disposed on an interior side of the garment, such as upon the lining.

[0023] Whilst the invention has been described above, it extends to any inventive combination of features set out above or in the following description. Although illustrative embodiments of the invention are described in detail herein with reference to the accompanying drawings, it is to be understood that the invention is not limited to these precise embodiments.

[0024] Furthermore, it is contemplated that a particular feature described either individually or as part of an embodiment can be combined with other individually described features, or parts of other embodiments, even if the other features and embodiments make no mention of the particular feature. Thus, the invention extends to such specific combinations not already described.

[0025] The invention may be performed in various ways, and, by way of example only, embodiments thereof will now be described, reference being made to the accompanying drawings in which:

Figure 1 is a front view of a t-shirt showing the location of a fabric antenna according to an embodiment of the present invention;

Figure 2 is schematic side view of the t-shirt illustrated in figure 1, as worn by a user;

Figure 3 is a view of the antenna grid and ground grid of the fabric antenna;

Figure 4a is a schematic illustration of the stitches associated with the host yarn and the antenna or ground yarn of the fabric antenna; and,

Figure 4b is a magnified view of a portion of the fabric antenna, illustrating the stitches of the host yarn and antenna yarn.

[0026] Referring to figures 1 and 2 of the drawings, there is illustrated a fabric antenna 10 according to an embodiment of the present invention secured upon a garment 100, according to an embodiment of the present invention, for enabling communication with a third party (not shown) over a VHF (very high frequency) or UHF (ultra high frequency) range. The fabric antenna 10 illustrated in figures 1 and 2 is disposed at an interior side of the garment so that the fabric antenna 10 is not readily visible and thus substantially concealed by the outer fabric 101 of the garment (the fabric antenna 10 has been shown in figure 1 to illustrate the location of the antenna upon the garment). In this respect, the fabric antenna 10 may be sewn along an interior of the garment 100 and thus form a lining thereof, or may be sandwiched between an inner and outer layer 101, 102 of the garment 100.

[0027] The fabric antenna 10 is formed by knitting together a host yarn 30, such as cotton which is substan-

tially electrically non-conductive and an antenna yarn 40, such as AmberStrand® (as provided by Syscom Advanced Materials Inc. of Columbus, Ohio) or Statex (as provided by Statex Engineering (P) Ltd of Tamilnadu, India), which is substantially electrically conductive, to form a fabric 50 comprising the antenna 11 (as illustrated in figure 4a of the drawings). The knitted structure is formed by feeding the host yarn 30 and antenna yarn 40 into needles 60 to create a series of knitted loops (as illustrated in figure 4b of the drawings). The loops which extend horizontally across the fabric form the so-called courses within the fabric 50, whereas the loops that extend vertically between adjacent courses form the wales within the fabric 50.

[0028] The antenna 11 formed within the fabric 50 comprises an antenna grid 12 having a plurality of antenna tracks formed of antenna yarn 40 which extend along courses and wales within the fabric 50. The antenna grid 12 is illustrated in figure 3 of the drawings and comprises three rectangular grid sections 13, 14, 15 which are orientated to form an F-shaped antenna 11.

[0029] The grid sections 13, 14, 15 separately comprise opposite side and end tracks 13a, 13b, 14a, 14b, 15a, 15b which are electrically coupled to form a substantially rectangular shaped periphery. In an embodiment, the outer periphery of the grid section 13 which forms the vertical portion of the F-shape comprises the largest (length x width) dimension of approximately 250x60mm. In contrast, the outer periphery of the upper horizontal grid section 14 of the F-shape comprises a dimension of approximately 160x60mm, whereas the outer periphery of the lower horizontal grid section 15 comprises a dimension of approximately 180x60mm.

[0030] Each grid section 13, 14, 15 further comprises a central track 13c, 14c, 15c which extends along a central axis, such as the longitudinal axis of the grid section 13, 14, 15, and a plurality of cross tracks 13d, 14d, 15d which extend across the grid section 13, 14, 15 between opposite side tracks 13a, 14a, 15a. The end tracks 13b, 14b, 15b and cross tracks 13d, 14d, 15d are electrically coupled to each side track 13a, 14a, 15a and central track 13c, 14c, 15c by virtue of the intimate contact of the antenna yarn 30 at the intersections thereof. Moreover, the tracks 13a-d, 14a-d, 15a-d associated with each grid section 13, 14, 15 are electrically coupled together, such that an electrical signal which is to be communicated from the antenna 11 or received at the antenna 11, can access all of the tracks 13a-d, 14a-d, 15a-d of the antenna grid 12. However, the skilled reader will recognise that other antenna grids 12 forming other shapes may alternatively be used.

[0031] The electrical resistance of the antenna grid 12 is found to be different along the courses as opposed to along the wales of the fabric 50. This is because the resistance along a single course of antenna yarn 40 within the fabric 50 is determined by the resistance of the antenna yarn alone, whereas the resistance along a wale will also be influenced by the electrical coupling between

adjacent courses of the antenna yarn 40. To improve the performance of the antenna 11, it is found that a lower resistance is required in the vertical direction, and so the F-shaped antenna grid is formed in a rotated configuration, namely a $\frac{1}{4}$ anticlockwise turn, so that the courses in the fabric 50 extend between the top and bottom of the F-shape.

[0032] The fabric antenna 10 further comprises an antenna ground 16 which is formed by knitting ground yarn (not shown), which may be the same as the antenna yarn 40, with the host yarn 30. The antenna ground 16 formed within the fabric 50 comprises a ground grid 17 having a periphery of ground tracks 18 and a plurality of longitudinal and lateral ground tracks 19, 20 which extend within the periphery 18 to form a square arrangement of intersecting ground tracks 18, 19, 20. The ground tracks 18, 19, 20 are formed of ground yarn (not shown) which extend along courses and wales within the fabric 50 and the peripherally extending ground tracks 18, longitudinal ground tracks 19 and lateral ground tracks 20 are preferably electrically coupled together at the regions of intersection.

[0033] The antenna ground 16 is knitted into the host fabric such that the ground 16 is disposed below the antenna 11 when in use, and thus in substantially the same plane. The central track 13c of the vertically orientated grid section 13 of the antenna grid 12 is arranged to extend beyond the periphery of the respective grid section 13 at the lower region thereof to form a tail 13e.

[0034] The tail 13e from the antenna grid 12 is coupled to a communications cable 70, such as a coaxial cable. In this respect, the tail 13e may be electrically coupled, such as via soldering to a proximal end of an inner conductor (not shown) of the coaxial cable. At least a portion of the outer conductor (not shown) of the coaxial cable is electrically coupled, such as via soldering and/or gluing directly to the one of the tracks of the ground grid. The distal end of the cable terminates at a connector 80, such as an SMA (sub-miniature A) connector for electrically connecting the antenna 11 to a communications module (not shown), which may be disposed in a bag (not shown) carried by a user, for example. The fabric antenna 10 may further comprise a pocket 90 for supporting the cable 70 and minimising any snagging of the cable 70 during use.

[0035] In the illustrated embodiment, the intersecting tracks 13a-d, 14a-d, 15a-d of the antenna 11 and ground 16 are configured to a square grid, but the skilled reader will again recognise that other grid configurations may be used. Referring to figure 4a and 4b of the drawings, the tracks of each grid 12, 17 may be separately formed by one or more adjacent courses or wales of antenna/ground yarn, such that the width of each track may be sized accordingly. The antenna yarn 40 and ground yarn (not shown) are knitted with the host yarn 30 according to a $\frac{1}{3}$ knitting gauge whereby the antenna yarn 40 and ground yarn (not shown) are respectively looped around every fourth needle 60, in contrast with the host

yarn 30 which is looped around every needle 60. In this respect, the antenna yarn 40 and ground yarn (not shown) are drooped between every fourth needle 60 and provide for a more flexible and thus wearable fabric 50. Moreover, the reduced number of needle loops associated with the antenna yarn 40 and ground yarn (not shown) reduces the length of antenna yarn 40 and ground yarn (not shown) required and reduces distortion in the fabric 50 caused by the antenna yarn 40 and ground yarn (not shown).

Claims

1. A fabric antenna for telecommunications, the fabric antenna comprising a host yarn, which is substantially electrically non-conducting, and an antenna yarn, which is substantially electrically conducting, the host yarn and antenna yarn being knitted together to form a host fabric formed of host yarn comprising an antenna grid formed of antenna yarn, the antenna grid comprising a plurality of intersecting antenna tracks formed of antenna yarn, the tracks being separated by regions of the host fabric, the tracks of the antenna grid being electrically coupled together at the regions where the tracks intersect.
2. A fabric antenna according to claim 1, wherein the antenna grid comprises a plurality of grid sections, each section comprising a first and second side track and a first and second end track which separately extend between opposite ends of the first and second side tracks to form a closed periphery of the grid section.
3. A fabric antenna according to any of claims 2, wherein the grid sections are electrically coupled to each other.
4. A fabric antenna according to any preceding claim, wherein the antenna grid comprises an F-shape.
5. A fabric antenna according to any preceding claim, wherein the antenna tracks may comprise a course or wale of knitted stitches in the fabric.
6. A fabric antenna according to claim 5, wherein the number of knitted stitches of host yarn per unit length of the fabric is greater than the number of knitted stitches of antenna yarn per unit length of fabric.
7. A fabric antenna according to claim 5 or 6, wherein one or more of the antenna tracks may be formed by two or more adjacent courses or wales of knitted stitches.
8. A fabric antenna according to any preceding claim further comprising an antenna ground, which com-

prises a ground grid formed of ground yarn which is substantially electrically conducting, the ground yarn and host yarn being knitted together to form a host fabric comprising the antenna grid.

5

9. A fabric antenna according to claim 8, wherein the ground grid is knitted adjacent the antenna grid and comprises a plurality of intersecting ground tracks.

10. A fabric antenna according to claim 8 or 9, wherein the ground grid comprises a closed periphery of ground tracks and a plurality of longitudinal and lateral ground tracks which extend within the periphery to form a square arrangement of intersecting ground tracks.

10

15

11. A fabric antenna according to claim 9 or 10, wherein the ground tracks comprise a course or wale of knitted stitches in the fabric.

20

12. A fabric antenna according to claim 11, wherein the number of knitted stitches of host yarn per unit length of the fabric is greater than the number of knitted stitches of ground yarn per unit length of fabric.

25

13. A fabric antenna according to claim 11 or 12, wherein one or more of the ground tracks may be formed by two or more adjacent courses or wales of knitted stitches.

30

14. A garment comprising an outer layer of fabric material and a lining comprising a fabric antenna according to any preceding claim.

15. A garment according to claim 23, further comprising a pocket for supporting a communications cable which is used for connecting the fabric antenna to a communications module.

35

40

45

50

55

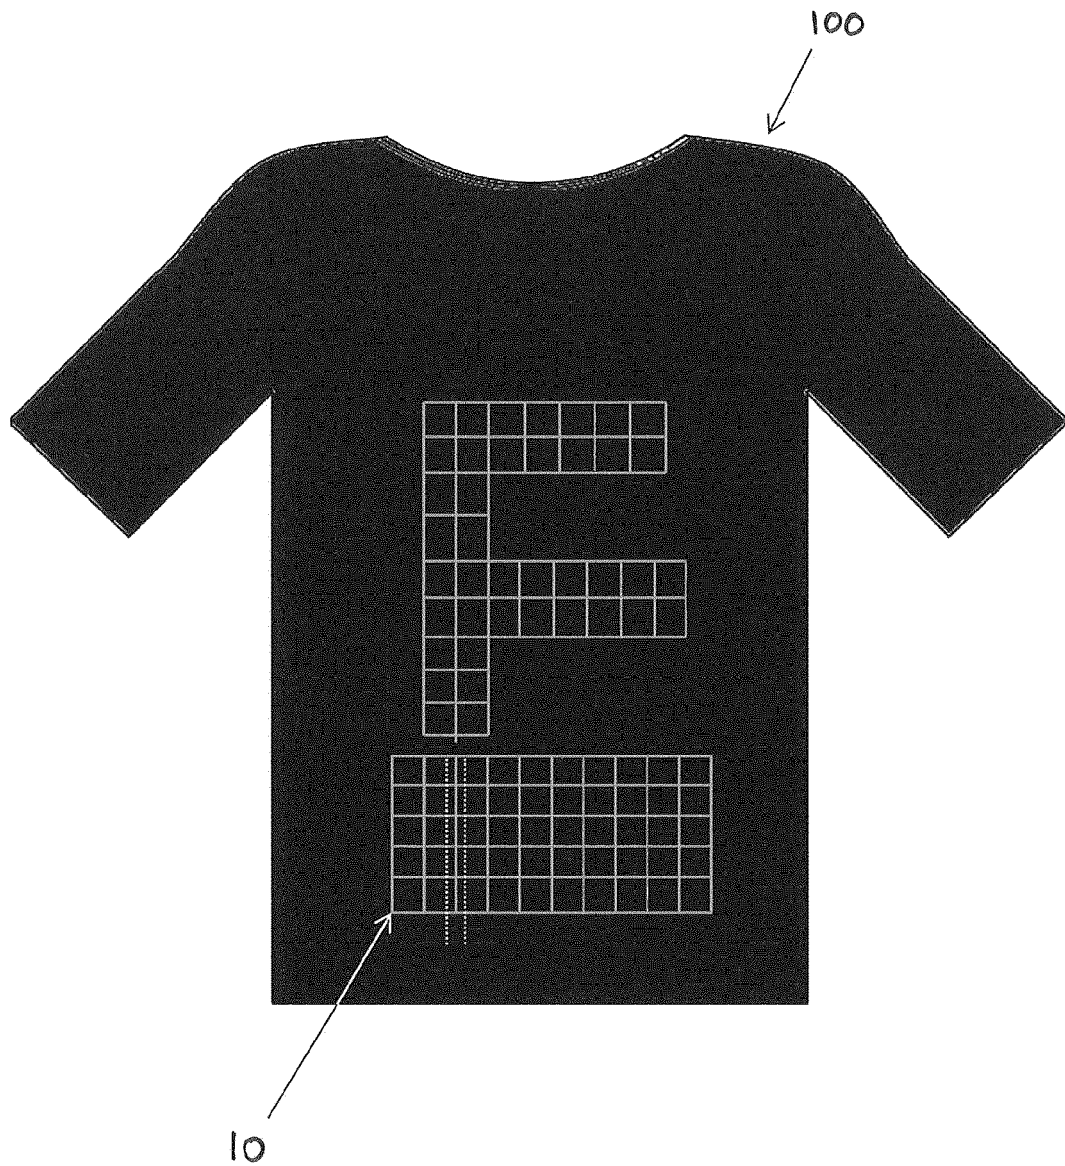


Figure 1

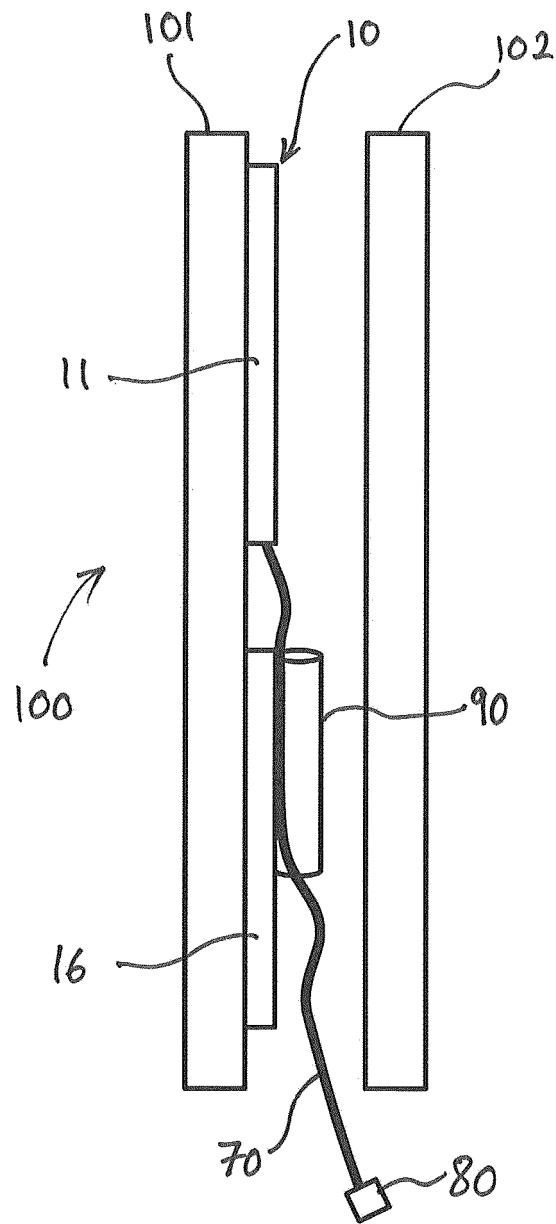


Figure 2



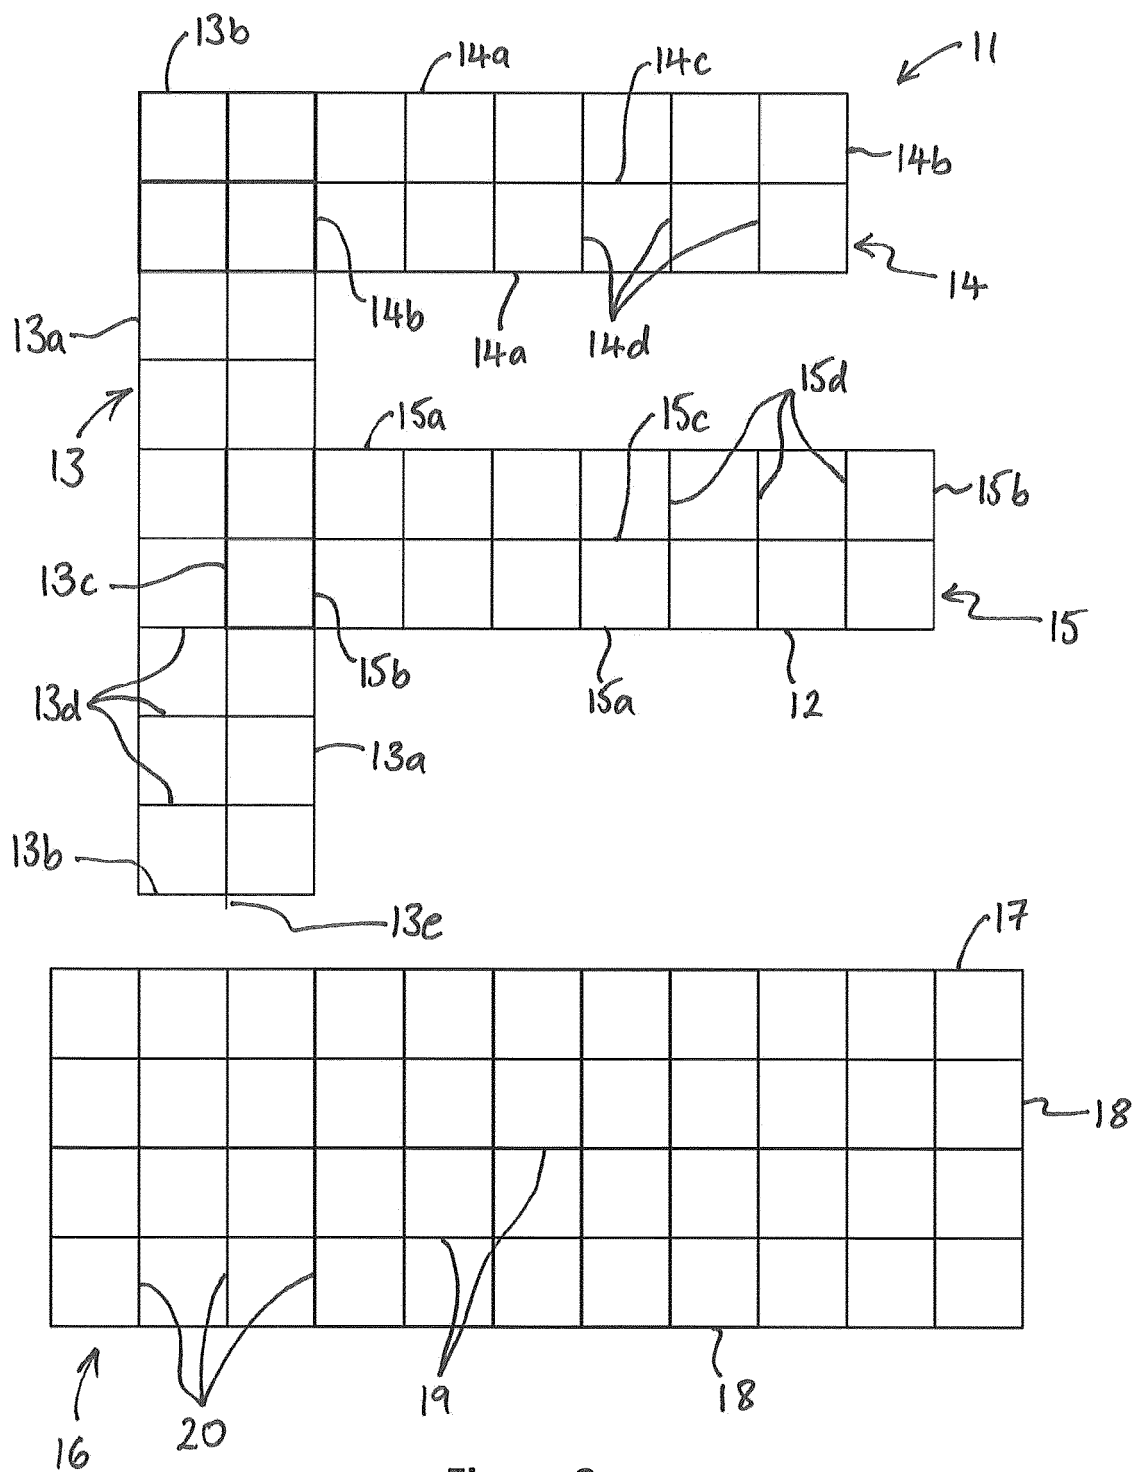


Figure 3

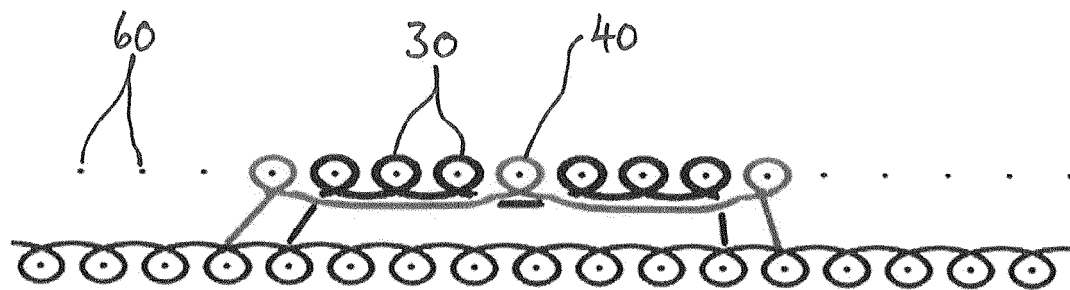

(a)

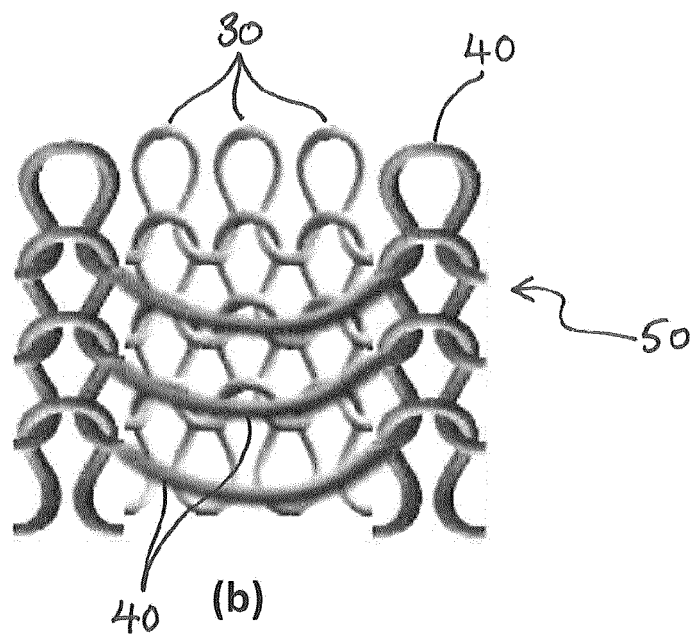

(b)

Figure 4



EUROPEAN SEARCH REPORT

Application Number
EP 15 27 5123

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2005/235482 A1 (DEAETT MICHAEL A [US] ET AL) 27 October 2005 (2005-10-27)	1-5, 7-11, 13-15	INV. H01Q1/27 H01Q1/22
Y	* paragraphs [0016], [0025], [0051], [0059]; figures 4,11 *	6,12	
Y	US 2011/214711 A1 (HAUSER OTTO [DE] ET AL) 8 September 2011 (2011-09-08) * paragraph [0047] - paragraph [0050]; figure 2 *	6,12	
X	US 2006/281382 A1 (KARAYIANNI ELENI [CH] ET AL) 14 December 2006 (2006-12-14) * paragraphs [0119], [0141] - paragraphs [0144], [0158], [0234]; figures 3I-3N *	1-15	
A	JUNG-SIM ROH ET AL: "Embroidered Wearable Multiresonant Folded Dipole Antenna for FM Reception", IEEE ANTENNAS AND WIRELESS PROPAGATION LETTERS, IEEE, PISCATAWAY, NJ, US, vol. 9, 1 January 2010 (2010-01-01), pages 803-806, XP011316208, ISSN: 1536-1225 * Section II; figures 1,3,4,5 *	1-15	TECHNICAL FIELDS SEARCHED (IPC) H01Q
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 16 October 2015	Examiner Sípál, Vít
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 15 27 5123

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-10-2015

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005235482 A1	27-10-2005	US 2005235482 A1	27-10-2005
		US 2008291093 A1	27-11-2008
-----		-----	
US 2011214711 A1	08-09-2011	CN 102160176 A	17-08-2011
		DE 102008033217 A1	21-01-2010
		EP 2308086 A1	13-04-2011
		KR 20110050453 A	13-05-2011
		US 2011214711 A1	08-09-2011
		WO 2010006988 A1	21-01-2010
-----		-----	
US 2006281382 A1	14-12-2006	CA 2608976 A1	14-12-2006
		EP 1891255 A2	27-02-2008
		JP 2008546209 A	18-12-2008
		US 2006281382 A1	14-12-2006
		US 2009159149 A1	25-06-2009
		WO 2006131810 A2	14-12-2006
-----		-----	