



(22) Date de dépôt/Filing Date: 2017/04/05

(41) Mise à la disp. pub./Open to Public Insp.: 2017/10/26

(45) Date de délivrance/Issue Date: 2022/04/26

(30) Priorité/Priority: 2016/04/26 (ATA 50367/2016)

(51) Cl.Int./Int.Cl. *B04B 5/12* (2006.01)


(72) Inventeurs/Inventors:
KLIMENTA, STEFAN, DE;
FRANC, JOHANN, DE

(73) Propriétaire/Owner:
ANDRITZ TECHNOLOGY AND ASSET MANAGEMENT
GMBH, AT

(74) Agent: MARKS & CLERK

(54) Titre : VIS CENTRIFUGE DESTINEE A LA SEPARATION MECANIQUE HUMIDE DE SOLIDES

(54) Title: SCREW CENTRIFUGE FOR WET MECHANICAL SEPARATION OF SOLIDS

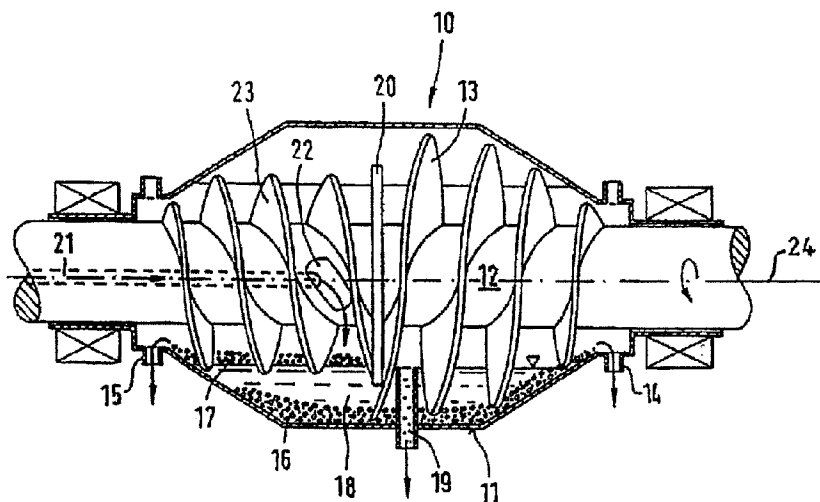

(57) Abrégé/Abstract:

The invention relates to a screw centrifuge for wet mechanical separation of solids according to their density by means of a rotating, cylindrical drum (11) with two conical drums connected to it, with openings (14, 15) for discharge of the separated material as settleable solids (16) and floating solids (17) and of the separating liquid (18), and with a rotating shaft (12), with openings (22) for infeed of the solids to be separated, where the shaft (12) has two screw flights (13, 13', 13'', 23, 23') working in opposite directions, where a baffle disc (20) is arranged on the shaft in axial direction between the infeed opening (22) for the substances to be separated and the discharge opening (14) for the settleable solids (16), where the outer flight (13', 13'') of the screw for the settleable solids (16) surrounds the inner flight (23, 23') of the screw for the floating solids (17), where the flights (13, 13', 13'', 23, 23') work in opposite directions. It is mainly characterized in that the screw for the floating solids (17) is designed as a multi-channel screw. The outer flight (13', 13'') of the screw for the settleable solids (16) can also have several channels. This enables a particularly high throughput with continuing, high selective separation and the same low residual moisture content. The invention also relates to a screw conveyor for a screw centrifuge of this kind.

Abstract

The invention relates to a screw centrifuge for wet mechanical separation of solids according to their density by means of a rotating, cylindrical drum (11) with two conical drums connected to it, with openings (14, 15) for discharge of the separated material as settleable solids (16) and floating solids (17) and of the separating liquid (18), and with a rotating shaft (12), with openings (22) for infeed of the solids to be separated, where the shaft (12) has two screw flights (13, 13', 13'', 23, 23') working in opposite directions, where a baffle disc (20) is arranged on the shaft in axial direction between the infeed opening (22) for the substances to be separated and the discharge opening (14) for the settleable solids (16), where the outer flight (13', 13'') of the screw for the settleable solids (16) surrounds the inner flight (23, 23') of the screw for the floating solids (17), where the flights (13, 13', 13'', 23, 23') work in opposite directions. It is mainly characterized in that the screw for the floating solids (17) is designed as a multi-channel screw. The outer flight (13', 13'') of the screw for the settleable solids (16) can also have several channels. This enables a particularly high throughput with continuing, high selective separation and the same low residual moisture content. The invention also relates to a screw conveyor for a screw centrifuge of this kind.

SCREW CENTRIFUGE FOR WET MECHANICAL SEPARATION OF SOLIDS

The invention relates to a screw centrifuge for wet mechanical separation of solids according to their density by means of a rotating, cylindrical drum with two conical drums connected to it and openings for discharge of the separated material as settleable solids and floating solids and of the separating liquid, and with a rotating shaft with openings for infeed of the solids to be separated, where the shaft has two screw flights working in opposite directions, where a baffle disc is arranged on the shaft in axial direction between the infeed opening for the substances to be separated and the discharge opening for the settleable solids, where the outer flight of the screw for the settleable solids surrounds the inner flight of the screw for the floating solids, and where the flights work in opposite directions.

Screw centrifuges of this kind are known from EP 0 553 793 B1. Machines of this type have a limited throughput for the light or floating fraction. If the established throughput is increased, the machine becomes blocked with the product. Other similar machines are known from DE 195 16 636 A1 or EP 1485 205 B1. These types of machine are used for 3-phase separation of substance mixtures, e.g. different plastic fractions and a separating liquid. By choosing suitable densities of separating liquid, it is also possible to separate into several different fractions in multi-stage processes. In addition, DE 3134935 A1 describes a decanter centrifuge for separating a solids phase and two liquid phases. In this case, it is not possible to separate a light or floating fraction. The decanter centrifuge in DE 2612696 also cannot separate floating solids. It separates floating and heavy solids that are deposited on or carried by gravity onto the inner circumference of the centrifugal drum. US 2528974 describes a centrifugal separator for separating solids and liquids, but three-phase separation is not possible here either. The spiral separator in US 4781822 separates two kinds of particles according to density or size.

The goal of the invention is thus to achieve better separation and higher throughput in three-phase separation.

Thus, the invention is characterized in that the screw for the floating solids is designed as a multi-channel screw. With this design, the throughput can be increased substantially while maintaining the same separation result and residual moisture in the product, and there is also a significant reduction in plugging/blocking of the machine in spite of the higher throughputs.

A favourable embodiment of the invention is characterized in that the screw flight for the settleable solids extends as far as the drum and the screw flight for the floating solids has a smaller outer diameter than the inner diameter of the screw flight for the settleable solids. With this measure and

the two flights working in opposite directions, the light fraction that floats on the separating liquid can be transported from the inner flight to the light fraction discharge while the heavy fraction sinks, collects on the wall of the drum, and is transported by the outer flight to the discharge point at the opposite end. The separating liquid is discharged separately here through nozzles.

- 5 A favourable development of the invention is characterized in that the part of the screw flight for the settleable solids that surrounds the flight for the floating solids is also connected to it, preferably by welding. Thus, there are no additional supports required that could obstruct the path of the separated material.

- 10 An advantageous development of the invention is characterized in that the screw for the settleable solids is designed as a multi-channel screw. The total capacity of a screw can be increased by selecting suitable channels and pitch.

- The quantity of product (the aggregate material in front of the flight) conveyed through the respective flight channel is significantly less than with a single-channel flight. This makes the process more stable as well as helping to separate the product fractions, transport the respective fraction,
15 and separate it from the separating medium at significantly higher throughputs.

According to an aspect of the present invention there is provided a screw centrifuge for wet mechanical separation of solids according to density comprising:

- 20 a drum with a cylindrical portion, two tapered end portions and respective discharge openings for separated material as settleable solids, floating solids and separating liquid, and at least one nozzle defining another discharge opening for discharging the separating liquid;

a rotating shaft in the drum with at least one infeed opening for infeed of the solids to be separated, and two screw flights working in opposite directions;

a baffle disc arranged on the shaft and axially positioned between the at least one infeed opening for the substances to be separated and the discharge opening for the settleable solids defining a heavy fraction side of the baffle disc in the drum;

wherein the at least one nozzle for discharging the separating liquid is on the heavy
5 fraction side of the baffle disc, and

wherein an outer flight of the screw for the settleable solids surrounds an inner flight of the screw for the floating solids, the inner and outer flights work in opposite directions, and the screw for the floating solids is a multi-channel screw.

10 According to another aspect of the present invention there is provided a screw centrifuge for wet mechanical separation of solids according to density, comprising:

a rotatable drum having a wall that includes a cylindrical wall portion and axially opposed, inwardly tapered wall portions, a first of said tapered portions having a first discharge opening for discharge of the separated material as settleable solids, a second of
15 said tapered portions having a second discharge opening for floating solids, and a third discharge opening in the cylindrical portion for discharging the separating liquid;

a rotatable shaft extending axially within the drum with an internal passageway and associated infeed opening for delivering the solids to be separated between the shaft and the drum wall, wherein the shaft has a first screw section with flights for transporting
20 settleable solids toward the first discharge opening and a second screw section with flights working in opposite direction for transporting floating solids toward the second discharge opening;

a baffle disc arranged on the shaft between the infeed opening and the first discharge opening;

wherein the third discharge opening is positioned on a side of the baffle disc that is common with the first discharge opening which defines a heavy fraction side of the baffle disc in the drum, and

wherein the second screw section for the floating solids is a multi-channel screw and an auxiliary outer flight of the first screw section surrounds some of the flights in the second screw section.

According to a further aspect of the present invention there is provided a screw conveyor and drum for separating solids in a screw centrifuge, comprising:

a drum defining an inner wall enclosing an interior, the drum having at least one nozzle for discharging separating liquid from the interior;

a rotatable shaft including an internal passageway and associated infeed opening for the solids to be separated;

a first flight for transporting settleable solids in a first axial direction defining a heavy fraction side of the drum and a second flight working in a second direction opposite from the first flight for transporting floating solids in a second axial direction opposite from the first axial direction;

a baffle disc arranged on the shaft between the first flight and the second flight; wherein the second flight for the floating solids is multi-channelled, and the first flight includes an auxiliary outer flight that extends over the baffle disc and surrounds a portion of the second flight adjacent to the baffle disc, wherein

the at least one nozzle is positioned on the heavy fraction side of the drum.

The invention will now be described in the following in examples and referring to the drawings, where

Fig. 1 shows a screw centrifuge according to the state of the art,

5 Fig. 2 shows a screw centrifuge according to the invention,

Fig. 3 shows a sectional view along the line marked III-III in Fig. 2.

The separating device 10 in Figure 1 consists of a cylindrical drum 11 that is tapered at each end. Inside the drum 11 there is a bipartite screw conveyor 12 with screw flights 13 for discharging the settleable solids 16 and screw flights 23 for discharging the floating solids 17. Due to the different arrangements of the screw flights, e.g. outer diameter, flights working in opposite directions, the settleable solids 16 and the floating solids 17 are conveyed to discharge openings 14, 15 at opposite ends of the device: the settleable solids 16 to one or several discharge openings 14 and the floating solids to one or several discharge openings 15. The separating liquid 18 removed from the settleable

10

15

solids and the floating solids is discharged through one or several nozzles 19 on the heavy fraction side of the separating device 10. A baffle disc 20 prevents the floating solids 17 from being swept along by the flights 13 for the settleable solids 16 during the separation process and thus reaching the settleable solids discharge 14. The mixture of solids to be separated and separating liquid is fed
5 into the inner part of the vessel via an axially arranged feed pipe 21 through one or several feed openings 22. By rotating the drum 11 and the screw conveyor 12, the mixture, for example a suspension, is set in rotation and a centrifugal field is created in the suspension. The screw conveyor 12 is usually driven at a different speed to the drum. Due to the difference in density of the solids and the separating liquid, the solids are separated quickly, where the light solids (floating
10 solids 17) float to the surface of the separating liquid 18 and the heavy solids (settleable solids 16) settle on the inner shell surface of the drum 11. The floating solids are then swept along by the screw flight 23 and conveyed to the discharge opening 15, the settleable solids 16 are swept along by the screw flight 13, conveyed to the discharge opening 14, then lifted out of the separating liquid and conveyed through the discharge opening 14 out of the drum 11 due to the tapered shape of the
15 drum shell surface 11. The tapered part of the drum 11 at the discharge opening 15 facilitates separation of the floating solids 17 from the separating liquid 18.

Figure 2 now shows a screw centrifuge according to the invention, where the illustration is along the same lines as Figure 1. The same parts are assigned the same reference numerals as in Figure 1. In order to improve the throughput while maintaining the same separation selectivity and residual
20 moisture content, additional parallel flights 13' are added to the flights 13 for transporting the settleable solids 16 to the discharge opening 14. This extension consists of one or several additional narrow (strip) flight(s) 13' arranged parallel to flight 13 and surrounding flight 23 (and 23') for the floating solids 17. The solids are separated more efficiently due to the flights working in opposite directions. The flight(s) 13, 13' is/are connected to flights 23, 23', for example welded, at various
25 points. This provides support for the flights 13, 13', and there is no need for any separate supports, which could make the flight channels of the screw narrower and cause the machine to become plugged/blocked. According to the invention, the screw flight 23, 23' for the floating solids 17 is designed with two channels, which means that better conveying and thus a higher throughput can be achieved. The product to be processed (feed material) is often a mixture of plastics with different
30 densities that are to be separated into floating and settleable solids. Depending on the application, fractionation results in separation selectivity that is significantly higher than 99% in the individual fractions. In addition to mixtures of different lumps of plastics or films, fibre materials such as carpet scraps and similar made of polypropylene, polyamide, and latex, can be separated in a two-stage process and thus recycled. In addition, the separated fibres undergo a certain degree of washing

during the separation process before being discharged. To achieve even more effective separation, the two groups of screw flights for the settleable and floating solids can also be installed with the different pitches necessary for the process, depending on the specific requirements, which allows the machine to be tuned perfectly to suit the process.

- 5 Figure 3 contains a sectional view along the line marked III-III in Fig. 2. It shows a sectional view here through the individual screw flights. The sectional view through the first flight 23 of the screw 12 for separating the floating solids 17 is shown in the top part. The bottom part depicts a sectional view through the second flight 23' for the floating solids. However, additional screw flights can also be used so that it then has three or more screw channels if necessary. The flight 13' for the settleable
10 solids 16 is shown at the outer circumference. If the flight for the settleable solids 16 has a single channel, only the flight 13' as shown in the top section is present. If the flight has two channels, the channel 13'' as shown in the lower part of the drawing is also present.

The invention is not limited by the examples in the drawings. The edges of the flights can also be protected against excessive wear by means of wear pieces.

- 15 To summarize, the invention relates to a screw centrifuge for wet mechanical separation of solids according to their density that has a rotating, cylindrical drum with two conical drums connected to it, with openings for discharge of the separated material as settleable solids and floating solids and of the separating liquid, and a rotating shaft with openings for infeed of the solids to be separated, where the shaft has two screw flights working in opposite directions, where a baffle disc is arranged
20 on the shaft in axial direction between the infeed opening for the substances to be separated and the discharge opening for the settleable solids. In addition, the outer flight of the screw for the settleable solids surrounds the inner single- or multi-channel screw flight for the floating solids, where the flights work in opposite directions. The outer flight of the screw for the settleable solids can also have several channels. This enables a particularly high throughput with continuing, high
25 selective separation and the same low residual moisture content. The invention also relates to a screw conveyor for a screw centrifuge of this kind.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A screw centrifuge for wet mechanical separation of solids according to density comprising:

a drum with a cylindrical portion, two tapered end portions and respective discharge openings for separated material as settleable solids, floating solids and separating liquid, and at least one nozzle defining another discharge opening for discharging the separating liquid;

a rotating shaft in the drum with at least one infeed opening for infeed of the solids to be separated, and two screw flights working in opposite directions;

a baffle disc arranged on the shaft and axially positioned between the at least one infeed opening for the substances to be separated and the discharge opening for the settleable solids defining a heavy fraction side of the baffle disc in the drum;

wherein the at least one nozzle for discharging the separating liquid is on the heavy fraction side of the baffle disc, and

wherein an outer flight of the screw for the settleable solids surrounds an inner flight of the screw for the floating solids, the inner and outer flights work in opposite directions, and the screw for the floating solids is a multi-channel screw.

2. The screw centrifuge according to claim 1, wherein the screw flight for the settleable solids extends radially to drum and the screw flight for the floating solids has a smaller outer diameter than the inner diameter of the screw flight for the settleable solids.

3. The screw centrifuge according to claim 1, wherein the screw flight for the settleable solids that surrounds the flight for the floating solids is directly connected to the surrounded flight.

4. A screw centrifuge for wet mechanical separation of solids according to density, comprising:

a rotatable drum having a wall that includes a cylindrical wall portion and axially opposed, inwardly tapered wall portions, a first of said tapered portions having a first discharge opening for discharge of the separated material as settleable solids, a second of said tapered portions having a second discharge opening for floating solids, and a third discharge opening in the cylindrical portion for discharging the separating liquid;

a rotatable shaft extending axially within the drum with an internal passageway and associated infeed opening for delivering the solids to be separated between the shaft and the drum wall, wherein the shaft has a first screw section with flights for transporting settleable solids toward the first discharge opening and a second screw section with flights working in opposite direction for transporting floating solids toward the second discharge opening;

a baffle disc arranged on the shaft between the infeed opening and the first discharge opening;

wherein the third discharge opening is positioned on a side of the baffle disc that is common with the first discharge opening which defines a heavy fraction side of the baffle disc in the drum, and

wherein the second screw section for the floating solids is a multi-channel screw and an auxiliary outer flight of the first screw section surrounds some of the flights in the second screw section.

5. The screw centrifuge according to claim 4, wherein the auxiliary outer flight for the settleable solids extends radially beyond the baffle disc to the wall of the drum and the surrounded flights of second screw section for the floating solids have a smaller outer diameter than the inner diameter of the auxiliary outer flight.

6. The screw centrifuge according to claim 5, wherein the auxiliary outer flight is directly connected to the surrounded flight.
7. The screw centrifuge according to claim 4, wherein the auxiliary outer flight is directly connected to the surrounded flight.
8. The screw centrifuge according to claim 4, wherein the auxiliary outer flight of the screw section for the settleable solids is multi-channelled.
9. The screw centrifuge according to claim 4, wherein the auxiliary outer flight is situated entirely between the baffle and the second discharge opening.
10. A screw conveyor and drum for separating solids in a screw centrifuge, comprising:
 - a drum defining an inner wall enclosing an interior, the drum having at least one nozzle for discharging separating liquid from the interior;
 - a rotatable shaft including an internal passageway and associated infeed opening for the solids to be separated;
 - a first flight for transporting settleable solids in a first axial direction defining a heavy fraction side of the drum and a second flight working in a second direction opposite from the first flight for transporting floating solids in a second axial direction opposite from the first axial direction;
 - a baffle disc arranged on the shaft between the first flight and the second flight; wherein the second flight for the floating solids is multi-channelled, and the first flight includes an auxiliary outer flight that extends over the baffle disc and surrounds a portion of the second flight adjacent to the baffle disc, wherein
 - the at least one nozzle is positioned on the heavy fraction side of the drum.

11. The screw conveyor according to claim 10, wherein the auxiliary outer flight is directly connected to the surrounded flight.
12. The screw conveyor according to claim 10, wherein the auxiliary outer flight is multi-channelled.
13. The screw conveyor according to claim 10, wherein the auxiliary outer flight extends beyond the feed opening.

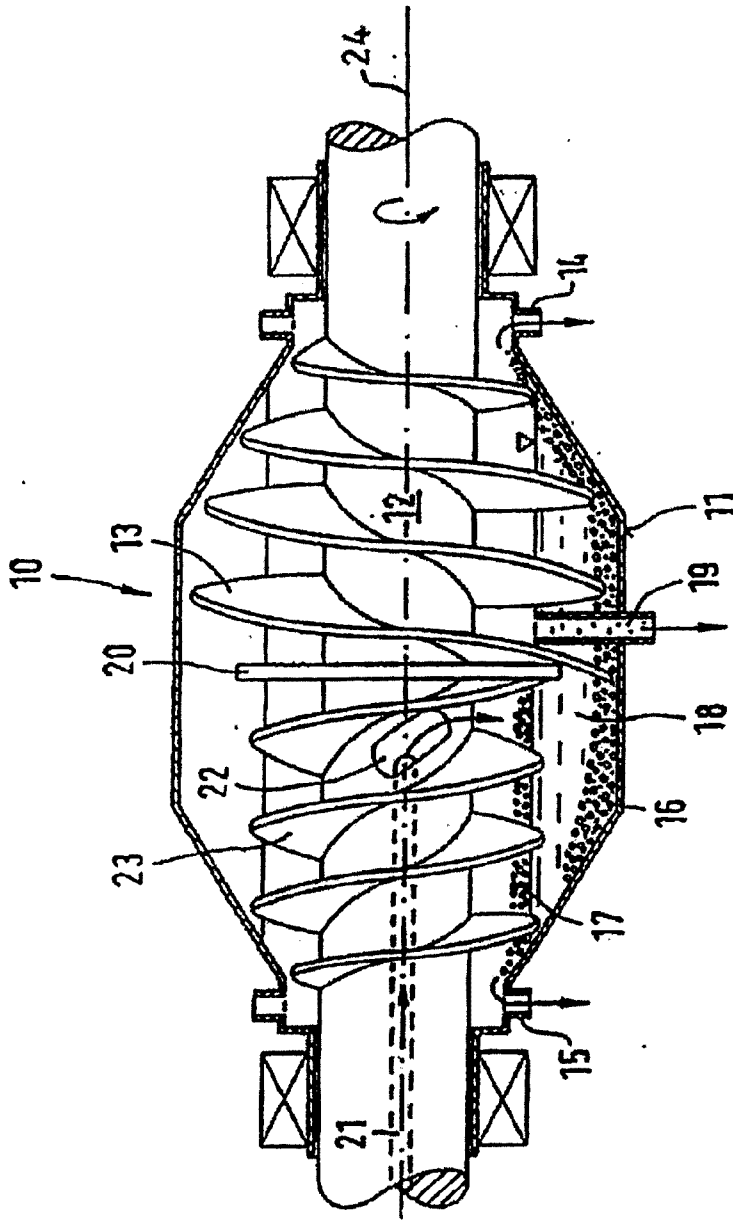


Fig. 1

Prior Art

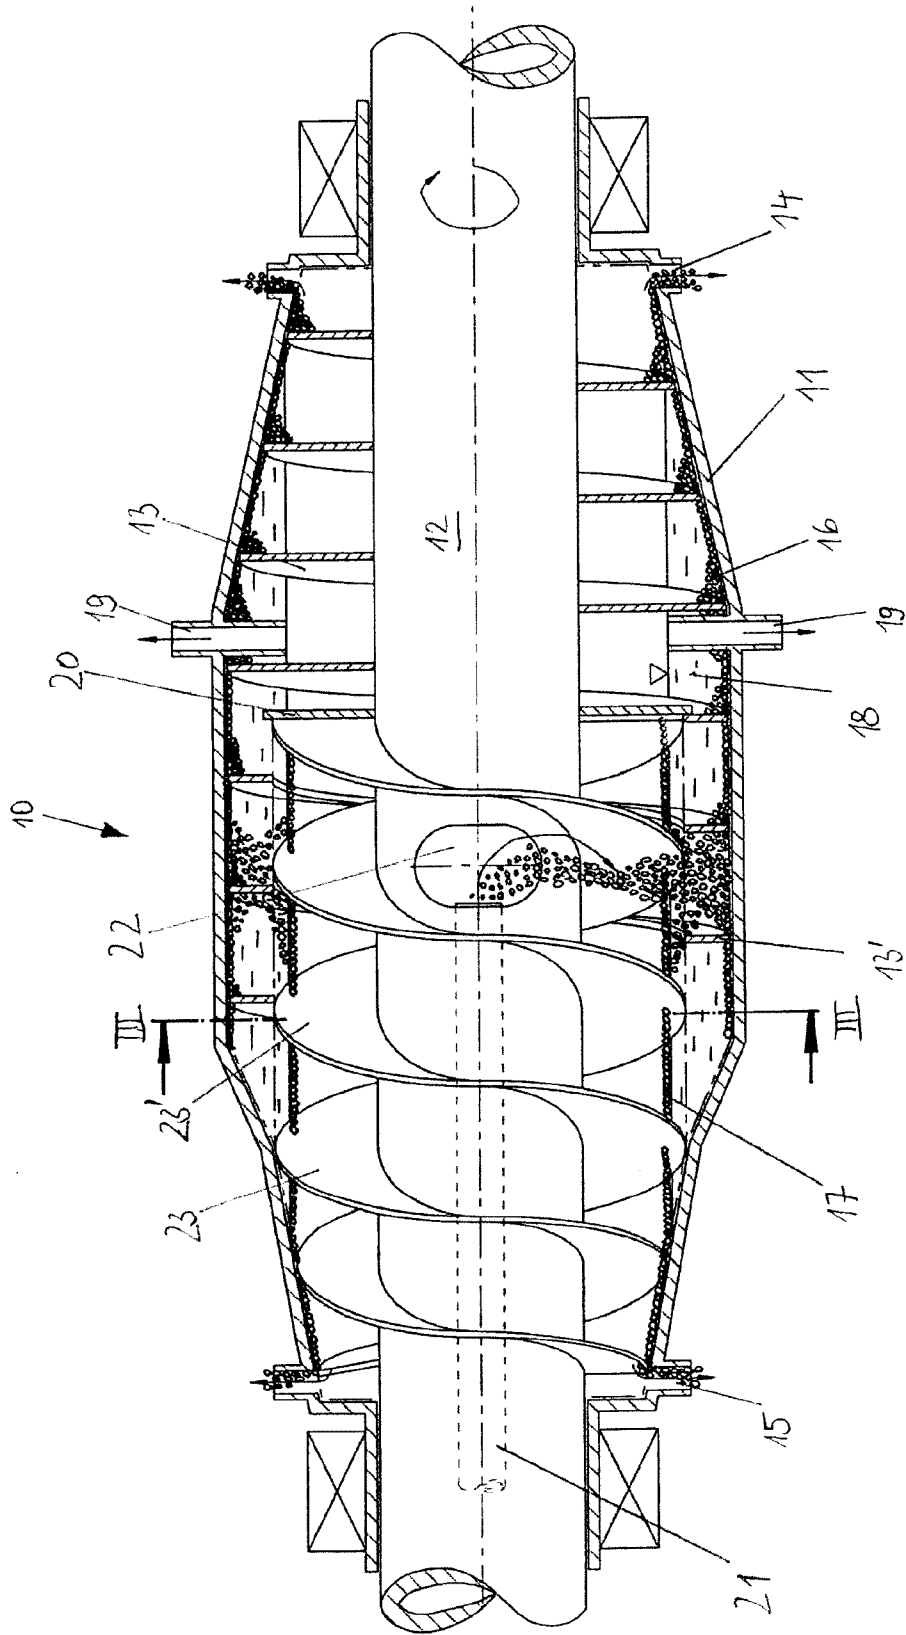


Fig. 2

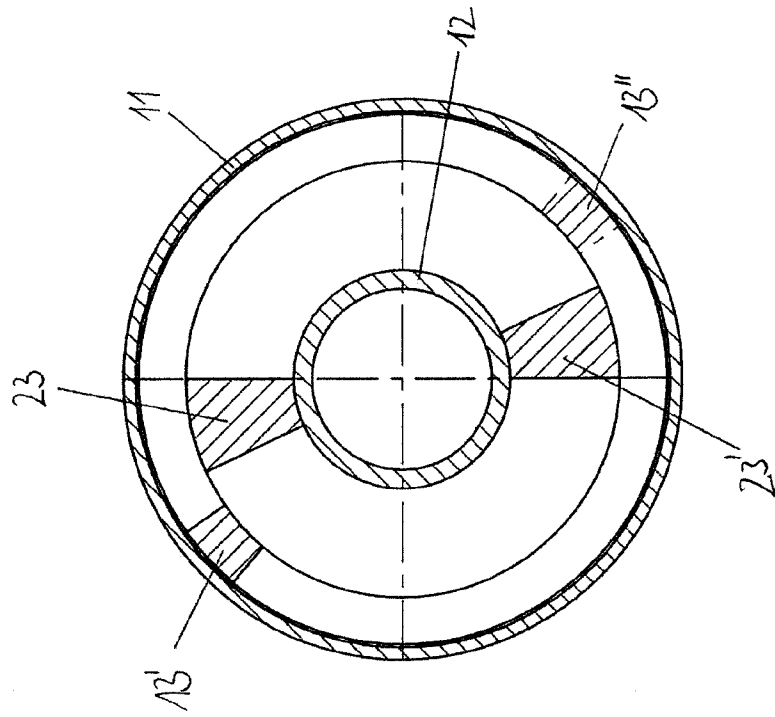


Fig.3

