



(51) International Patent Classification:

A22C 25/04 (2006.01) B65G 37/00 (2006.01)
A22C 25/06 (2006.01) B65G 43/08 (2006.01)
A22C 25/08 (2006.01) B65G 47/14 (2006.01)
B65G 15/20 (2006.01) B65G 47/50 (2006.01)
B65G 15/22 (2006.01) B65G 15/14 (2006.01)

(21) International Application Number:

PCT/IS2016/050004

(22) International Filing Date:

26 February 2016 (26.02.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

050102 26 February 2015 (26.02.2015) IS

(71) Applicant: SKAGINN HF. [IS/IS]; Bakkatun 26, 300 Akranes (IS).

(72) Inventor: ARNASON, Ingolfur; Soleyjargata 14, 300 Akranes (IS).

(74) Agent: ARNASON FAKTOR; Gudridarstig 2-4, IS-113 Reykjavik (IS).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: AN IN-FEEDING AND OBJECT RELEASE APPARATUS

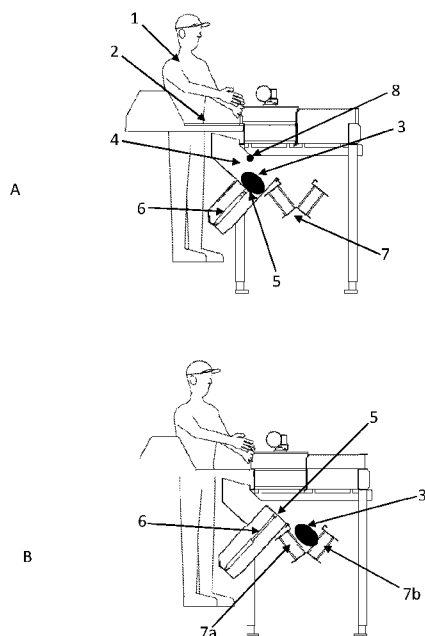


Fig. 1

(57) Abstract: The present invention relates to a method and a device for individual feeding of fish into a processing line. Such method and device may, for instance, be used for receiving, gilling and gutting freshly caught fish in a processing line on board a fishing vessel. For instance, the in-feeding apparatus and method may be used to increase the value of the fish by speeding up the time until the fish is chilled for storing.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, —
GW, KM, ML, MR, NE, SN, TD, TG).

*before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

AN IN-FEEDING AND OBJECT RELEASE APPARATUS

Field of the invention

The invention relates to a method and a device for individual feeding of fish into a processing line. Such method and device may, for instance, be used for receiving,
5 gilling and gutting freshly caught fish in a processing line on board a fishing vessel. For instance, the in-feeding apparatus and method may be used to increase the value of the fish by speeding up the time until the fish is chilled for storing.

Background

10 A continuous development of food processing, such as processing of fish products is always on demand with the focus on for instance to increase utilization and value of products as well as meeting demands for quality after processing. When handling a large quantity of fresh food products, speed is of major importance.

In many cases the processing is done on land, which requires storing the fish at
15 sea and during transport to the factory. In this case the time period from when a caught fish ends up on the deck of fishing ship and to the time the fish starts cooling process needs to be as short as possible as all handling and transport has effect on the quality of the fish.

WO 2014/174535 provides an improved method where whole fish is brought to
20 an under-cooled state by super-chilling before processing. Freshly caught fish is gilled and gutted at a workstation and then each fish is individually transported to a screw blade tank filled with sea water to facilitate the bleeding of the fish and to prevent the meat to be coloured by the blood. During transport to the bleeding tank the fish passes image means to determine the size of the fish. In this
25 manner the fish can be directed into three different lanes for rinsing and subsequently cooling to bring the fish to an undercooled state by a stepwise cooling process.

US 5,702,295 discloses an apparatus for automatically positioning fish with
respect to their plane of symmetry and for the periodic transfer of the fish to a
30 fish processing machine is proposed. The apparatus uses a supply conveyor in the form of a trough conveyor and a feed conveyor arranged below and perpendicular to the supply conveyor for feeding the fish into a processing machine. The feed conveyor includes a support conveyor with support elements onto which each fish

is placed where the support elements protrude into the belly cavity. This is achieved by a holding element which is arranged between the supply conveyor and the feed conveyor and is controlled by a signal to open and release the temporarily held fish.

- 5 In order to efficiently pre-process, such as bleeding and gutting whole fish, and sorting fish prior to cooling it for storage until it is processed in factories on land, a large amount of fish needs to be handled in a short time to preserve freshness and quality of the fish. One of the drawbacks of pre-processing and delivering individual fish onto a processing line in a time efficient manner is the
- 10 management of a time-efficient in-feeding mechanism and in some instances a horizontal drop of the fish onto the next apparatus of a processing line.

Summary of the Invention

- It is an object of the present invention to overcome and/or ameliorate the aforementioned drawbacks of the prior art and to provide an improved and/or
- 15 alternative and/or additional method or device for feeding fish after slaughtering and/or gutting and/or gilling into a processing line. It is one preferred object of the present invention to provide a device in order to facilitate individual in-feeding of fish into a processing line in a continuous manner reducing gaps in the processing line. Moreover, it is a preferred object of the present invention to
- 20 provide a fast method and device, preferably designed as a conveyor device to transport fish from a slaughtering and/or gutting station to a conveyor which facilitates bleeding of fish where a horizontal drop of each fish from the in-feeding apparatus may be desired. Another preferred object of the present invention is to provide a device having a design where a fish is transported as a single item from
- 25 a slaughtering and/or gutting station to bleeding apparatus. It is also a preferred object of the present invention to provide a device with an improved operability and/or an increased ease of use during operation of the device.

- The object(s) underlying the present invention is (are) particularly solved by the features defined in the independent claims. The dependent claims relate to
- 30 preferred embodiments of the present invention. Further additional and/or alternative aspects are discussed below.

- Thus, at least one of the preferred objects of the present invention is solved by an apparatus for feeding objects to a process line. Preferably the apparatus comprises one or more object receivers having a sensing means for sensing an
- 35 object in the object receiver and releasing means for releasing objects from the

object receiver. Preferably the apparatus also comprises a V-shaped conveyor for feeding the objects said to a process line. Preferably the V-shaped conveyor comprises two individual continuous conveyor belts and slide resisting means on the surface of the two individual continuous conveyor belts. Preferably, one of the
5 two belts forming the v-shaped conveyor is longer than the other belt at the out feed end of the belt. The apparatus further comprises computing means for determining item spaces on the belt and determine the time for the releasing mechanism to eject the object onto designated object space on the v-shaped conveyor. Preferably the apparatus provides the ability to feed objects from the
10 apparatus to a process line, one object at the time, at high speed. In order to give such fast performance, the computing means divides the V-shaped belt into object spaces and as soon as an object space is free it assigns an object in a object receiver to that object space. When the assigned object space is in line with the object receiver holding the object assigned to that particular object
15 space, the releasing mechanism ejects the object out of the object receiver and onto the v-shaped belt.

Another preferred object of the present invention is solved by a method for feeding objects to a process line. Preferably the method comprises the steps of feeding a objects in an object receiver, detecting the object by a sensing means
20 in object receiver, determining an object space on a v-shaped conveyor consisting of two individual continuous conveyor belts by a computing means, releasing the object from the object receiver by a releasing means onto the v-shaped conveyor, the conveyor belts of said v-shaped conveyor further comprising slide resisting means on the surface of the belt to prevent the object
25 from sliding as they are released onto a moving v-shaped conveyor belt, and releasing the objects from the v-shaped conveyor by dropping the object from the out-feed end by means of one of the two belts forming the v-shaped conveyor.

The device is preferably designed to use in combination with a processing line, where each fish is handled individually from the time it is first picked up by a
30 worker on an in-feeding mechanism and slaughtered or gilled. The problems to be solved in such a system is the combination of an individual handling of each fish until it has been batched for storing and to do it at a speed fast enough to maintain the best quality of the fish. Therefore, the combination of an object receiver with an ejection mechanism, a v-shaped conveyor belt with a slide
35 resisting surface and an out-feed end of the v-shaped conveyor belt with a one of the belts being longer than the other in combination with sensors and imaginary object spaces on the v-shaped belt determined by the computer provides the

solution of a fast in-feeding system where each fish is handled individually and delivered onto the next mechanism in the processing line with a horizontal drop.

An object receiver could be understood as a chamber for holding an object until it is ready to be ejected onto a moving conveyor. Preferably, the object receiver is provided with an ejection mechanism for quick release from the chamber and onto the next step in the processing line.

The term "sensing means" is to be understood as a sensor for detecting the presence of an object in the object receiver or on a conveyor belt.

The term "slide resisting means" as a part of a conveyor belt is to be understood as the material at the surface of belt itself is such material that objects do not slide when they are dropped or ejected onto the belt, particularly when the belt is in motion. As an object such as fish is dropped onto a moving conveyor the fish may slide on the belt when it lands. In order to maintain a fast method and provide such fast apparatus with imaginary object spaces on the belt it is important that the objects maintain the position they are dropped onto although the belt is moving. Therefore this term relates to clammy, sticky, and rubbery or non-slip material to prevent objects such as fish to slide on the belt when they are ejected onto the belt and to pull the items off the belt with the longer belt at the out-feed end.

20

The term "object space" is to be understood as an imaginary slot on a conveyor belt. A conveyor belt that is not divided by physical barriers such as cleats or the kind, can be divided by means of a computer and sensors into imaginary spaces to fit an object.

Accordingly, the set-up of the in-feeding apparatus may involve a plurality of workstations with an object receiver for each work station. Preferably the number of workstations is sufficient to be constantly feeding where the v-shaped belt to minimize the number of free object spaces on the v-shaped at any given time. Preferably, the apparatus and the method of the present invention provides a high speed method of feeding fish onto a process line, where each fish is processed individually and is characterized and batched into batches as single fish.

The method and the apparatus is preferably adapted to facilitate in-feeding of single whole fish onto a processing line after pre-processing on a fishing ship or

at a site near fish farm where farmed fish is being slaughtered. The fish is brought out of water to workstations, where the fish is gutted and/or gilled. Preferably, a worker at a workstation receives the fish from an in-feeding mechanism and after the worker has finished processing the fish, such as gilling and/or gutting or bleeding the fish the worker releases the fish into an object receiver. Preferably the access to the object receiver is simple and fast. The object receiver is preferably a chamber below the work station. Preferably the object receiver has a sensor above or in one of the sides of the chamber to detect the presence of a fish being placed in the object receiver by the worker. The object receiver is implemented with a releasing mechanism for releasing objects from the object receiver. Preferably, the bottom of the chamber is a plate and a piston behind the plate pushes the plate and thereby the object out of the chamber and onto a v-shaped conveyor belt. The v-shaped conveyor consists of two individual continuous conveyor belts. Preferably the two individual continuous conveyor belts of the v-shaped conveyor have slide resisting means on the surface of the belts. The material of the belt itself or used as a surface layer is preferably, clammy, sticky, rubbery or non-slip material. The slide-resisting material implemented on the surface or the surface is used in order for the determined item space on the moving belt to catch the fish as it is released onto the belt and carry the fish away from the object receiver without the fish sliding over to other item spaces. A computer calculates and determines empty and full item spaces on the v-shaped conveyor belt. Therefore, when a fish has been released onto an object receiver, it is kept there until the computer has assigned the next free object space on the v-shaped conveyor belt to the fish and when that free space is positioned below the object receiver the object is released from the object receiver and onto the belt. Preferably the mechanism implemented to take away each fish from the in-feeding belt is positioned below the out-feed end of the v-shaped belt. As one of the two belts forming the v-shaped conveyor may be provided as longer than the other belt at the out feed end of the belt, the longer belt with the non-slip surface pulls the fish off the V-shaped belt and may facilitate a substantially horizontal drop of the fish from the in-feed device and onto the take-away mechanism.

Preferably the in-feeding apparatus of the present invention is positioned next to a take-away conveyor belt to facilitate bleeding of the fish. Preferably a plurality of workers are positioned at an equal number of workstations. When the worker has finished processing the fish, such as gilling and/or gutting or bleeding the fish the worker releases the object into an object receiver. A continuous transport and

distribution conveyor is implemented for transporting objects to workstations and between the workstations. Preferably the continuous transport and distribution conveyor consists of two belts running in opposite directions and diverting means divert the items between the conveyor belts for circulating the fish until a worker
5 picks up a fish for processing. The v-shaped conveyor belt is positioned under the continuous transport and distribution conveyor.

All embodiments listed below relate to both the apparatus and the method of the present invention.

In one preferred embodiment the v-shaped conveyor, comprising two individual
10 continuous conveyor belts, comprises two endless flank conveyors being arranged in a V-shape and running synchronously in an outfeed direction to feed the objects further in a processing line. The flank conveyors comprise slide resisting means or gripping active surfaces having gripping properties on the surface of the two individual continuous conveyor belts in the direction of movement.

15 In one preferred embodiment one of the two belts forming the v-shaped conveyor is longer than the other belt at the out feed end of the belt.

In one preferred embodiment the apparatus further comprises one or more working stations.

In one preferred embodiment the apparatus further comprises a continuous
20 conveyor for transporting objects to workstations.

In one preferred embodiment the object receiver is positioned below each of the one or more workstations.

In one preferred embodiment the object is whole fish.

In one preferred embodiment the objects are feed from the apparatus to a
25 process line, one object at the time, preferably at high speed.

In one preferred embodiment the objects are pre-processed at one or more working stations. Such pre-processing step refers to one or more, but is not limited to, sorting, slaughtering, gilling, gutting whole fish.

In one preferred embodiment the worker releases the object into the object
30 receiver, which is positioned below each of the one or more workstations.

In one preferred embodiment the computing means assigns a next free object space to the nearest object in an object receiver.

In one preferred embodiment the computing means calculates and assigns free object spaces to items in the one or more workstations to minimize the number of
5 free object spaces at any time on the v-shaped conveyor belt.

The present invention will become more fully understood from the detailed description given hereinafter and the accompanying drawings which are given by way of illustration only, and thus, are not limitative of the present invention, and wherein:

10 FIG. 1 is a side view and a cross section of the apparatus of the present invention,

FIG. 2 is a top view of the apparatus of the present invention.

Figure 1 shows a side view and a cross section of the apparatus of the present invention. It is an apparatus for feeding objects such as fish onto to a process
15 line. The figure shows an embodiment of a worker 1 at a workstation 2. When the worker 1 has finished processing the fish 3, such as gilling and/or gutting the fish the worker releases the object into an object receiver 4. The object receiver is a chamber below the work station and it has a sensor 8 above or in one of the sides of the chamber to detect the presence of an object/fish being placed in the object
20 receiver by the worker 1. In fig. 1A, an object/fish 3 is shown on the workstation 2 and in the object receiver 4. The object receiver further comprises a releasing means for releasing objects from the object receiver. In the embodiment shown in fig. 1, the bottom of the chamber is a plate 5 and a piston 6 behind the plate 5 pushes the plate and thereby the object out of the chamber and onto a v-shaped
25 conveyor belt 7. In fig. 1B, the object has been released from the object receiver 4 and onto the v-shaped conveyor belt 7. The v-shaped conveyor consists of two individual continuous conveyor belts 7a and 7b. The two individual continuous conveyor belts of the v-shaped conveyor 7 have slide resisting means on the surface of the belts. This is a rough material implemented on the surface or the
30 surface is made from such a material in order for the determined item space on the moving belt to catch the fish as it is released onto the belt and carry the fish away from the object receiver without the fish sliding over to other item spaces. One of the two belts forming the v-shaped conveyor is longer than the other belt at the out feed end of the belt (not shown in the drawing). A computer calculates
35 and determines empty and full item spaces on the v-shaped conveyor belt.

Therefore, when a fish has been released onto an object receiver, it is kept there until the computer has assigned the next free object space on the v-shaped conveyor belt to the fish and when that free space is positioned below the object receiver the object is released from the object receiver and onto the belt.

- 5 Figure 2 shows a top view of the apparatus of the present invention. The figure shows an embodiment of workers 1 at seven workstations 2. When the worker 1 has finished processing the fish 3, such as gilling and/or gutting the fish the worker releases the object into an object receiver (not shown in the drawing). The object receiver is a chamber below the work station and it has a sensor (not
- 10 shown in the drawing). A continuous transport and distribution conveyor 9 is implemented for transporting objects to workstations is shown consisting of two belts running in opposite directions. The arrows indicate the direction of transport and diverting means 10 divert the items between the conveyor belts for circulating the fish until a worker 1 picks up a fish for processing. The v-shaped
- 15 conveyor belt 7 is positioned under the continuous transport and distribution conveyor 10 and only the longer belt 7b of the v-shaped conveyor belt 7 is shown at the out-feed end of the belt extending over the take-away conveyor belt 11.

Claims

1. An apparatus for feeding objects (3) to a process line, the apparatus comprising:
 - 5 – one or more object receiver (4), said object receiver comprising:
 - sensing means (8) in each object receiver (4),
 - releasing means (5 and 6) for releasing objects from the object receiver
 - 10 – V-shaped conveyor (7), said V-shaped conveyor comprising
 - two individual continuous conveyor belts (7a and 7b),
 - slide resisting means on the surface of the two individual continuous conveyor belts, and
 - 15 – computing means for determining item spaces on the belt.
2. The apparatus according to claim 1, wherein one of the two belts (7a and 7b) forming the V-shaped conveyor is longer than the other belt at the out feed end of the belt.
- 20 3. The apparatus according to claim 1 or 2, wherein the apparatus further comprises one or more working stations 2.
4. The apparatus according to claim 3, wherein the apparatus further comprises
 - 25 a continuous conveyor 12 for transporting objects to workstations.
5. The apparatus according to claims 3 - 4, wherein the object receiver (4) is positioned below each of the one or more workstations.
- 30 6. The apparatus according to claims 3 - 5, wherein the one or more workstations comprises an opening or release means to release the object into the object receiver.
- 35 7. The apparatus according to claims 3 - 6, wherein the object receiver is a chamber having a bottom plate and a piston to push the plate to the outfeed end of the chamber.

8. The apparatus according to any of the preceding claims, the object receiver has a sensor (8) above or in one of the sides of the chamber.
9. A method for feeding objects to a process line, the method comprising:
- 5 – feeding a objects in an object receiver,
 - detecting the object by a sensing means in object receiver,
 - determining an object space on a v-shaped conveyor consisting of two individual continuous conveyor belts by a computing means,
 - 10 – releasing the object from the object receiver by a releasing means onto the v-shaped conveyor, the conveyor belts of said v-shaped conveyor further comprising slide resisting means on the surface of the belt to prevent the object from sliding as they are released onto a moving v-shaped conveyor belt, and
 - 15 – releasing the objects from the v-shaped conveyor by dropping the object from the out-feed end.
- to feed objects from the apparatus to a process line, one object at the time, at high speed.
10. The method according to claim 9, wherein the objects are feed from the apparatus to a process line, one object at the time.
- 20
11. The method according to claim 9, wherein the step of releasing the objects from the v-shaped conveyor comprises dropping the object in a relatively horizontal position from the out-feed end by means of one of the two belts
- 25 forming the v-shaped conveyor being longer than the other belt.
12. The method according to claim 9, further comprising the step of pre-processing objects at one or more working stations.
- 30
13. The method according to claim 12, further comprising the step of a worker releasing the object into the object receiver, said object receiver is positioned below each of the one or more workstations.
14. The method according to claims 9-13, wherein the computing means assigns
- 35 a next free object space to the nearest object in an object receiver.
15. The method according to claim 14, wherein the computing means calculates and assigns free object spaces to items in the one or more workstations to

minimize the number of free object spaces at any time on the v-shaped conveyor belt.

5 16. The method according to claims 9-15, wherein a sensor above or in one of the sides of the object receiver detects the presence of a fish being placed in the object receiver by the worker.

17. The method according to claims 9-16, wherein the object is whole fish.

10 18. The method according to claims 12-17, wherein the pre-processing step refers to one or more of sorting, slaughtering, gilling, gutting whole fish.

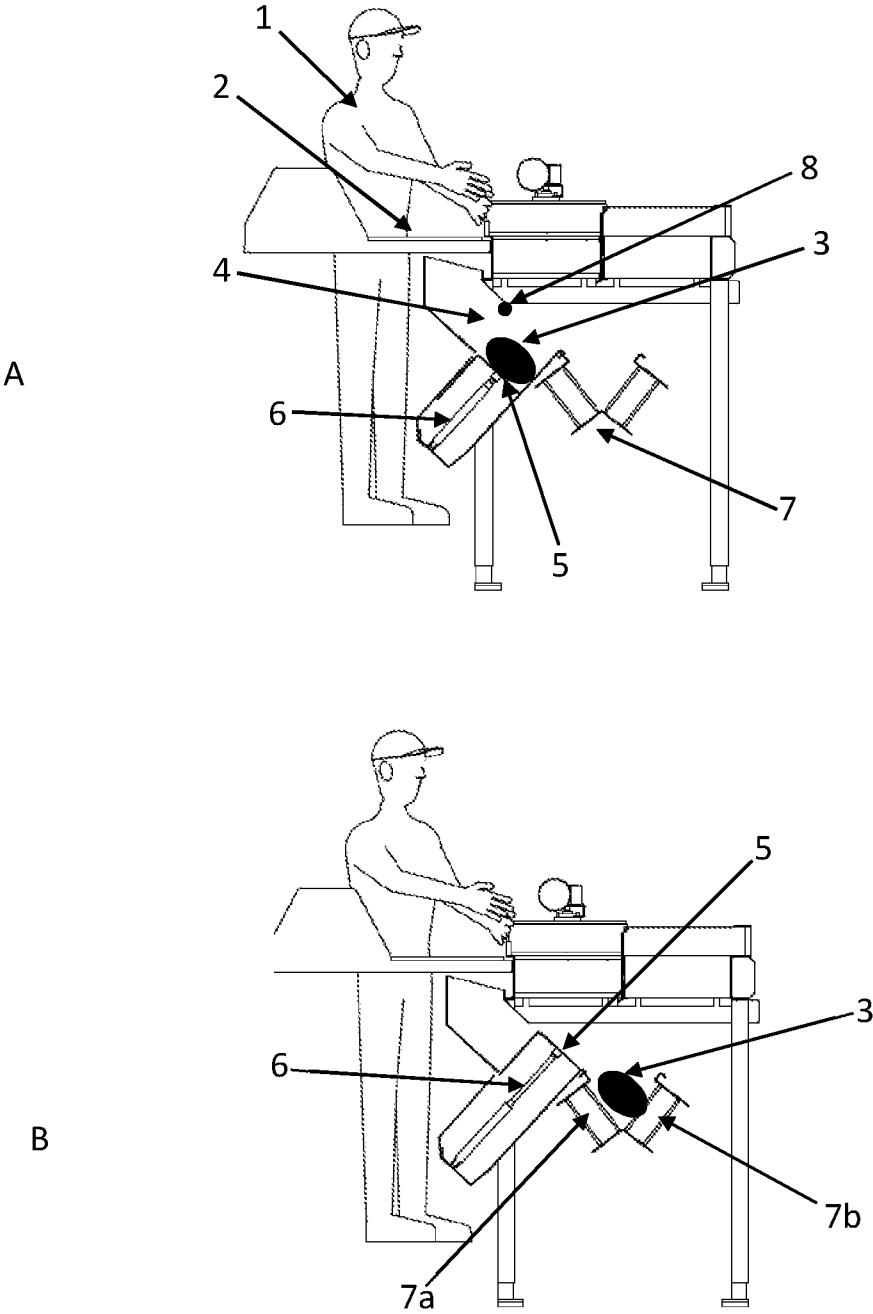


Fig. 1

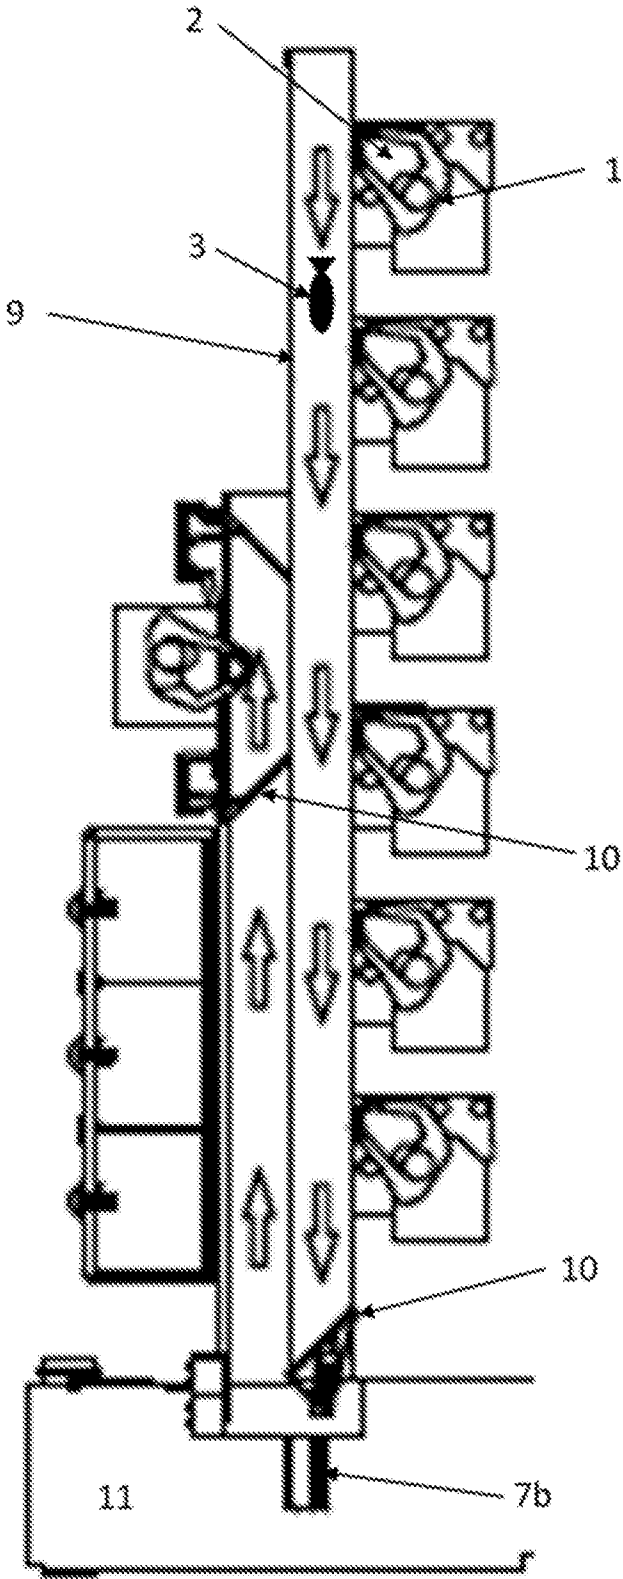


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No
PCT/IS2016/050004

A. CLASSIFICATION OF SUBJECT MATTER

INV. A22C25/04 A22C25/06 A22C25/08 B65G15/20 B65G15/22
B65G37/00 B65G43/08 B65G47/14 B65G47/50 B65G15/14

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A22C B65G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 702 295 A (KETELS DIETER [DE]) 30 December 1997 (1997-12-30) column 3, line 51 - column 5, line 15; figures 1-3	1-18
X	----- US 2006/154587 A1 (MIKKELSEN PETER [DK] ET AL) 13 July 2006 (2006-07-13)	1-6,8
A	paragraphs [0032], [0033], [0034], [0040]; figures 1,4	7,9-18
A	----- WO 95/31391 A1 (MAREL SEATTLE INC [US]) 23 November 1995 (1995-11-23) page 4, line 1 - page 6, line 31; figure 1	1-18
A	----- WO 03/009237 A1 (SKAGINN HF [IS]; ARNASON INGOLFUR [IS]) 30 January 2003 (2003-01-30) page 7, lines 14-25; figure 1	1-18
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 June 2016

Date of mailing of the international search report

27/06/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Pacevicius, Matthias

INTERNATIONAL SEARCH REPORT

International application No
PCT/IS2016/050004

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02/069722 A1 (SCANVAEGT INT AS [DK]; NIELSEN ULRICH CARLIN [DK]) 12 September 2002 (2002-09-12) page 8, line 7 - page 9, line 27; figures 1-4 -----	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IS2016/050004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5702295	A	30-12-1997	CA 2179428 A1	21-12-1996
			DE 19522238 A1	02-01-1997
			ES 2134106 A1	16-09-1999
			IS 4354 A	21-12-1996
			JP H09147 A	07-01-1997
			JP 2800142 B2	21-09-1998
			NO 962393 A	23-12-1996
			RU 2104647 C1	20-02-1998
			US 5702295 A	30-12-1997

US 2006154587	A1	13-07-2006	AT 326853 T	15-06-2006
			AU 2003273771 A1	04-05-2004
			CA 2502373 A1	29-04-2004
			DE 60305523 T2	30-08-2007
			DK 1555882 T3	11-09-2006
			EP 1555882 A1	27-07-2005
			ES 2263021 T3	01-12-2006
			IS 7850 A	19-05-2005
			US 2006154587 A1	13-07-2006
			WO 2004034794 A1	29-04-2004

WO 9531391	A1	23-11-1995	AU 2428695 A	05-12-1995
			CA 2190453 A1	23-11-1995
			DE 69533440 D1	07-10-2004
			DK 0759881 T3	10-01-2005
			EP 0759881 A1	05-03-1997
			IS 4388 A	15-11-1996
			NO 964814 A	13-11-1996
			US 5582283 A	10-12-1996
			WO 9531391 A1	23-11-1995

WO 03009237	A1	30-01-2003	IS 7108 A	12-01-2004
			WO 03009237 A1	30-01-2003

WO 02069722	A1	12-09-2002	AT 328486 T	15-06-2006
			BR 0206465 A	03-02-2004
			DE 60212067 T2	30-11-2006
			DK 1351577 T3	17-07-2006
			EP 1351577 A1	15-10-2003
			ES 2262818 T3	01-12-2006
			US 2004077302 A1	22-04-2004
			US 2005120848 A1	09-06-2005
			WO 02069722 A1	12-09-2002
