

(19) **DANMARK**

(10) **DK/EP 1995167 T3**



(12)

Oversættelse af europæisk patentskrift

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **B 63 B 21/50 (2006.01)** **B 63 B 22/02 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2015-03-09**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2014-12-31**
- (86) Europæisk ansøgning nr.: **08103742.6**
- (86) Europæisk indleveringsdag: **2008-04-28**
- (87) Den europæiske ansøgnings publiceringsdag: **2008-11-26**
- (30) Prioritet: **2007-05-24 GB 0710031**
- (84) Designerede stater: **AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR**
- (73) Patenthaver: **Bluewater Energy Services B.V., Marsstraat 33, 2132 HR Hoofddorp, Holland**
- (72) Opfinder: **de Baan, Jacob, Kamerlingh Onneslaan 8, 3146 BH Maassluis, Holland**
- (74) Fuldmægtig i Danmark: **PATRADE A/S, Fredens Torv 3A, 8000 Århus C, Danmark**
- (54) Benævnelse: **Frakobleligt tårnfortøjningssystem til et fartøj**
- (56) Fremdragne publikationer:
WO-A1-02/34616
WO-A1-98/24686
WO-A1-98/26976
JP-A- 61 155 086
US-A- 5 782 197

[0001] The invention relates to a disconnectable turret mooring system for a vessel. Vessels (such as tankers) fitted with a disconnectable turret mooring system are frequently employed in the offshore oil industry. A disconnectable turret mooring system typically allows a buoy to be released from the remaining turret part when environmental conditions may pose an unacceptable hazard to the vessel in which the mooring system is fitted. The buoy is the part of the mooring system that is anchored to the seabed and which supports all risers. Typically, upon release from the remaining turret part, the buoy sinks to a pre-determined level. For again connecting the buoy to the remaining turret part, it is picked up by appropriate lifting means and again connected with the remaining turret part.

[0002] Vessels with disconnectable turret mooring systems are increasingly being employed in deeper water and need to carry an increasing number of risers. This requires a buoy with increasingly large dimensions in order to support the weight of the anchor lines and risers. This in turn also requires the turret structure to be large to be able to receive such a large buoy.

[0003] US patent application 2004/0261682 discloses a disconnectable turret mooring system for a vessel, comprising a turret positioned in the moonpool of the vessel and having an upper part cooperating with a first upper bearing assembly positioned between the turret and the vessel, and a lower disconnectable buoy part cooperating with a second lower bearing assembly positioned between the turret and the vessel. The lower bearing assembly according to this document comprises a bearing ring positioned between the buoy and the vessel. This known disconnectable turret mooring system however is not suitable for buoys with large diameter because relatively tight tolerances are required to obtain a reasonable fit between the buoy and the bearing ring. Moreover, to prevent a relative rotation between the buoy and a reaction ring engaging the bearing ring it is suggested to provide means such as pins cooperating with corresponding slots. This makes the structure complicated. Further for ensuring a proper cooperation between such pins and corresponding slots a good alignment during hook up of the buoy is required. Finally, it is a disadvantage of this known mooring system that mounting the lower bearing assembly is complicated.

[0004] The document WO 02/34616 is considered to be the closest prior art and discloses a turret mooring system where a combination of flexible elements and a sharp angle achieves a semi-permanent system able to transmit larger mooring forces.

[0005] It is an object of the present invention to provide an improved disconnectable turret mooring system for a vessel.

5 **[0006]** Thus, in accordance with the present invention, a disconnectable turret mooring system for a vessel is provided comprising a turret positioned in a moonpool of the vessel and having an upper part cooperating with a first upper bearing assembly positioned between the turret and the vessel, and a lower disconnectable buoy part cooperating with a second lower bearing assembly positioned between the turret and the vessel, wherein the lower bearing assembly
10 comprises a number of discrete circumferentially spaced bearing members which are attached to and extend radially inwards from the vessel for engaging the lower disconnectable buoy part of the turret, and which bearing members are displaceable radially between an inner operative position for engaging the lower disconnectable buoy part and an outer inoperative position for disengaging the lower
15 disconnectable buoy part.

[0007] As a result of the provision of a number of discrete circumferentially spaced bearing members which are displaceable radially as stated above, a lower
20 bearing assembly is provided that is much simpler to adjust to tight tolerances and of which the mounting is much simpler. In the outer inoperative position of the bearing members the lower bearing assembly does not define a contact between the buoy and vessel, such that the disconnect or hook-up operation of the buoy can be carried out in an easy manner.

25 **[0008]** The disconnectable turret mooring system in accordance with the present invention is particularly suitable in cases where a very large disconnectable buoy is needed, typically requiring a diameter of the lower bearing assembly of eight meters or more.

30 **[0009]** Preferably, the lower disconnectable buoy part is provided with an outer bearing ring for cooperation with the bearing members. Such a bearing ring not only protects the buoy against wear, but also can reinforce the buoy at the location where the bearing members engage. Such a bearing ring may be replaced
35 when needed.

[0010] Preferably, the bearing ring has an upper inwardly sloping part, making entrance of such a bearing ring between the bearing members very easy.

5 [0011] In accordance with another embodiment of the disconnectable turret mooring system it comprises eighteen bearing members which are regularly spaced at 20° intervals. However, it is noted that also any other number of discrete bearing members may be applied.

10 [0012] According to yet another preferred embodiment, each bearing member comprises a longitudinal member having an inner end defining a bearing surface for cooperation with the lower disconnectable buoy part and a shaft part extending outwardly from said inner end and cooperating with a stationary guide connected to the vessel, and further comprises driving means for displacing the shaft part relative to the stationary guide between the inner operative position and the outer inoperative position. The bearing surface will cooperate with the buoy, for example the bearing ring if applied. The shaft part not only carries said bearing surface, but also serves as part for cooperating with the stationary guide.

20 [0013] Although is it possible, that each bearing member is operated manually, it is preferred that the driving means comprise remotely operated automated driving means, such as for example electrically, hydraulically or pneumatically operated driving means. Then, for example, the shaft part could comprise the piston rod of a cylinder-piston assembly.

25 [0014] According to another preferred embodiment, the moonpool has a lower end in which fender members are provided for cooperation with the turret. Such fender members, which may comprise a number of circumferentially spaced fender strips, may be made of rubber or plastic material. The objective of such fender members is to prevent damage to the bearing surface of the turret at the location of the lower bearing (such as the bearing ring mentioned before).

30 [0015] Finally an embodiment is mentioned, in which the moonpool has a lower end at the keel of the vessel and wherein the second lower bearing assembly is positioned at a distance above said lower end of the moonpool. Such a position of the second lower bearing assembly prevents it from being subjected to hogging and sagging deformations of the vessel.

35 [0016] Hereinafter the invention will be elucidated while referring to the drawing, in which an embodiment of a disconnectable turret mooring system for a vessel is illustrated. Herein

figure 1 shows, schematically and in cross section an embodiment of a disconnectable turret mooring system according to the present invention;
figure 2 illustrates, on a larger scale, a detail of the mooring system of figure 1;
figures 3 and 4 show the operation of bearing members.

5

[0017] Firstly referring to figure 1 an overall layout of a disconnectable turret mooring system according to the present invention is shown. In the hull 1 of a vessel a moonpool 2 is defined in which a first upper bearing assembly 3 and second lower bearing assembly 4 are provided. The moonpool 2 receives, as is known per se, a turret comprising an upper part 5 and a lower disconnectable buoy part 6.

10

[0018] The first upper bearing assembly 3 is positioned between the upper part of the turret 5 and the inner wall of the moonpool 2, whereas the second lower bearing assembly is positioned between the lower disconnectable buoy part 6 of the turret and the inner wall of the moonpool 2.

15

[0019] The lower disconnectable buoy part 6 of the turret is supported from the upper part 5 by a suitable disconnectable arrangement 7, the details of which are known from the state of the art and thus are not any further elaborated here. Further, as is known per se, the lower disconnectable buoy part 6, which typically is located largely below the waterline, consists mainly of a plurality of buoyancy tanks (not indicated). Anchoring means, such as anchor chains 8, are attached near the lower end of the disconnectable buoy part 6. Further, risers (not indicated) will extend from the lower buoy part 6 downwardly and upwardly.

20

25

[0020] For disconnecting and connecting the disconnectable buoy part 6 to the upper part 5 of the turret hoisting means and latching means may be provided, which also are known from the state of the art and thus are not elucidated here.

30

[0021] The lower bearing assembly 4 comprises a number of discrete circumferentially spaced bearing members 11 which are attached to and extend radially inwards from the vessel 1 for engaging the lower disconnectable buoy part 6 of the turret.

35

[0022] As shown, for example, in figures 3 and 4 the lower bearing assembly 4 comprises eighteen bearing members 11 which are regularly spaced at 20° intervals.

5 [0023] Referring to figure 2, part of the disconnectable turret mooring system of figure 1 is shown on a larger scale, illustrating a bearing member 4. The lower disconnectable buoy part 6 is provided with an outer bearing ring 12 for cooperation with the bearing members 11. In the illustrated embodiment the bearing ring has an upper and lower inwardly sloping part 12' and 12", respectively.

10 [0024] Each bearing member 11 comprises a longitudinal member 13 having an inner end 14 defining a bearing surface for cooperation with the bearing ring 12 of the lower disconnectable buoy part 6. The longitudinal member 13 further comprises a shaft part 15 extending outwardly from said inner end 14 and cooperating with a stationary guide 16 which is connected to the vessel 1.

15 [0025] As a result the inner end 14 of each bearing member is displaceable radially between an inner operative position for engaging the lower disconnectable buoy part 6 and an outer inoperative position for disengaging said buoy part 6. The operative position is illustrated in figure 4, whereas the inoperative position is illustrated in figure 3.

20 [0026] Not illustrated are driving means for displacing the bearing members 11 (or, specifically, the shaft parts 15 thereof) between the operative and inoperative positions. Such driving means may comprise remotely operated automated driving means, such as for example electrically, hydraulically or pneumatically operated driving means. However, it is conceivable too that driving the bearing members is effected manually.

25 [0027] It is noted, that all bearing members may be displaced individually, such that the displacement among these bearing members may differ one from the other.

30 [0028] When the disconnectable buoy part 6 has to be disconnected from the upper part 5 of the turret, the bearing members 11 are retracted outwardly to the inoperative position. When, however, the disconnectable buoy part 6 is connected to the upper part of the turret, the bearing members are displaced towards to the operative position, in which the bearing surface 14 thereof engages the bearing ring 12 of the buoy part 9.

35 [0029] In the illustrated embodiment of the disconnectable turret mooring sys-

tem the moonpool 2 has a lower end (which, in the illustrated embodiment, widens in a downward direction) in which fender members 9 are provided for cooperation with the turret. Such fender members 9 may comprise a number of circumferentially spaced fender strips which may be made of rubber or a plastic material.

5 The objective of these fender strips is to prevent any damage of the bearing surface of the bearing ring 12, which surface preferably is made of stainless steel.

[0030] Further, referring to figure 2, it appears that the moonpool 2 has a lower end at the keel 15 of the vessel 1, wherein the second lower bearing assembly 4

10 is positioned at a distance above said lower end of the moonpool.


[0031] The invention is not limited to the embodiment described before which may be varied widely within the scope of the invention as defined by the appending claims.

15

Patentkrav

1. Frakobleligt tårnfortøjningssystem til et fartøj, omfattende et tårn placeret i en moonpool i fartøjet og med en øvre del (5), der samvirker med en første øvre lejesamling (3) placeret mellem tårnet og fartøjet, og en nedre frakoblelig bøjedel (6), der samvirker med en anden nedre lejesamling (4) placeret mellem tårnet og fartøjet, **kendetegnet ved, at** den nedre lejesamling omfatter et antal diskrete, langs omkredsen fordelte lejeelementer (11), som er fastgjort til og forløber indad fra fartøjet for indgreb med den nedre frakoblelige bøjedel af tårnet (6), og hvilke lejeelementer kan forskydes radielt mellem en indre virksom position for indgreb med den nedre frakoblelige bøjedel og en ydre uvirksom position for at bringe den nedre frakoblelige bøjedel ud af indgreb.
2. Frakobleligt tårnfortøjningssystem ifølge krav 1, hvori den nedre frakoblelige bøjedel er forsynet med en ydre lejerings til samvirken med lejeelementerne.
3. Frakobleligt tårnfortøjningssystem ifølge krav 2, hvori lejeringsen har en øvre, indad skrånende del.
4. Frakobleligt tårnfortøjningssystem ifølge ethvert af de foregående krav, omfattende atten lejeelementer, som er regelmæssigt fordelt med 20° mellemrum.
5. Frakobleligt tårnfortøjningssystem ifølge ethvert af de foregående krav, hvori hvert lejeelement omfatter en langsgående del med en indre ende, som definerer en lejeplade for samvirken med den nedre frakoblelige bøjedel, og en akseldel, der strækker sig udad fra den indre ende og samvirker med en stationær føring forbundet med fartøjet, og yderligere omfatter drivorganer til at forskyde akseldelen i forhold til den stationære føring mellem den indre virksomme position og den ydre uvirksomme position.
6. Frakobleligt tårnfortøjningssystem ifølge krav 5, hvori drivorganerne omfatter fjernbetjente automatiserede drivorganer, såsom for eksempel elektrisk, hydraulisk eller pneumatisk drevne drivorganer.
7. Frakobleligt tårnfortøjningssystem ifølge ethvert af de foregående krav, hvori moonpoolen har en nedre ende, i hvilken fenderoelementer er tilvejebragt for samvirken med tårnet.

8. Frakobleligt tårnfortøjningssystem ifølge krav 7, hvori fenderelementerne omfatter et antal fenderlister fordelt langs omkredsen.
- 5 9. Frakobleligt tårnfortøjningssystem ifølge ethvert af de foregående krav, hvori moonpoolen har en nedre ende ved fartøjets køl, og hvori den anden nedre lejesamling er placeret i en afstand over den nedre ende af moonpoolen.

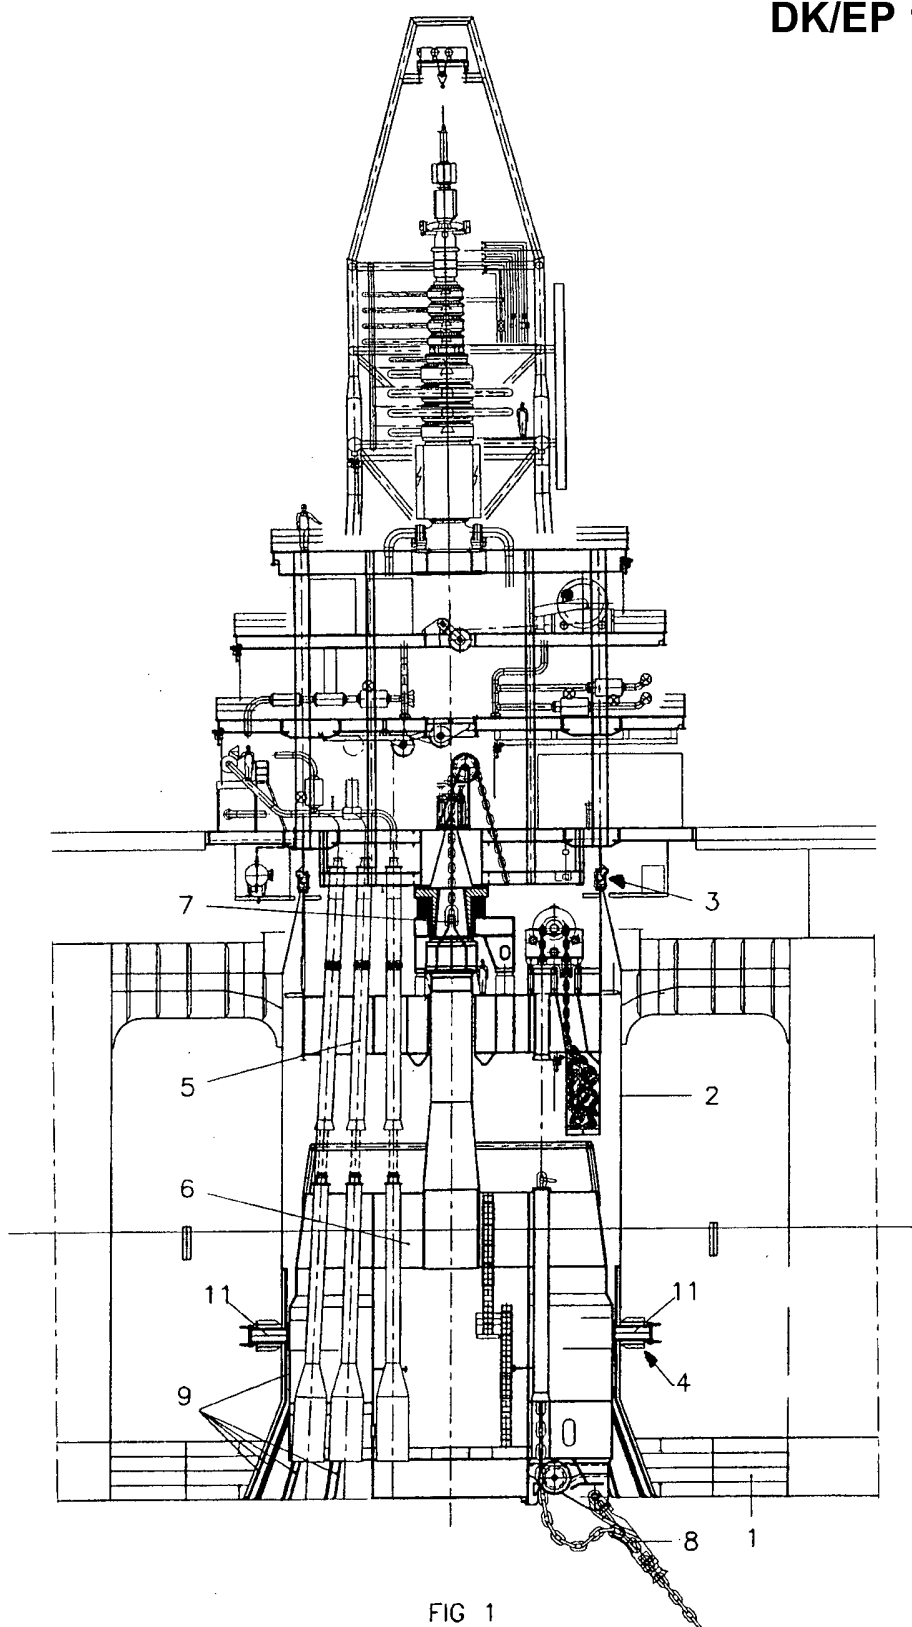

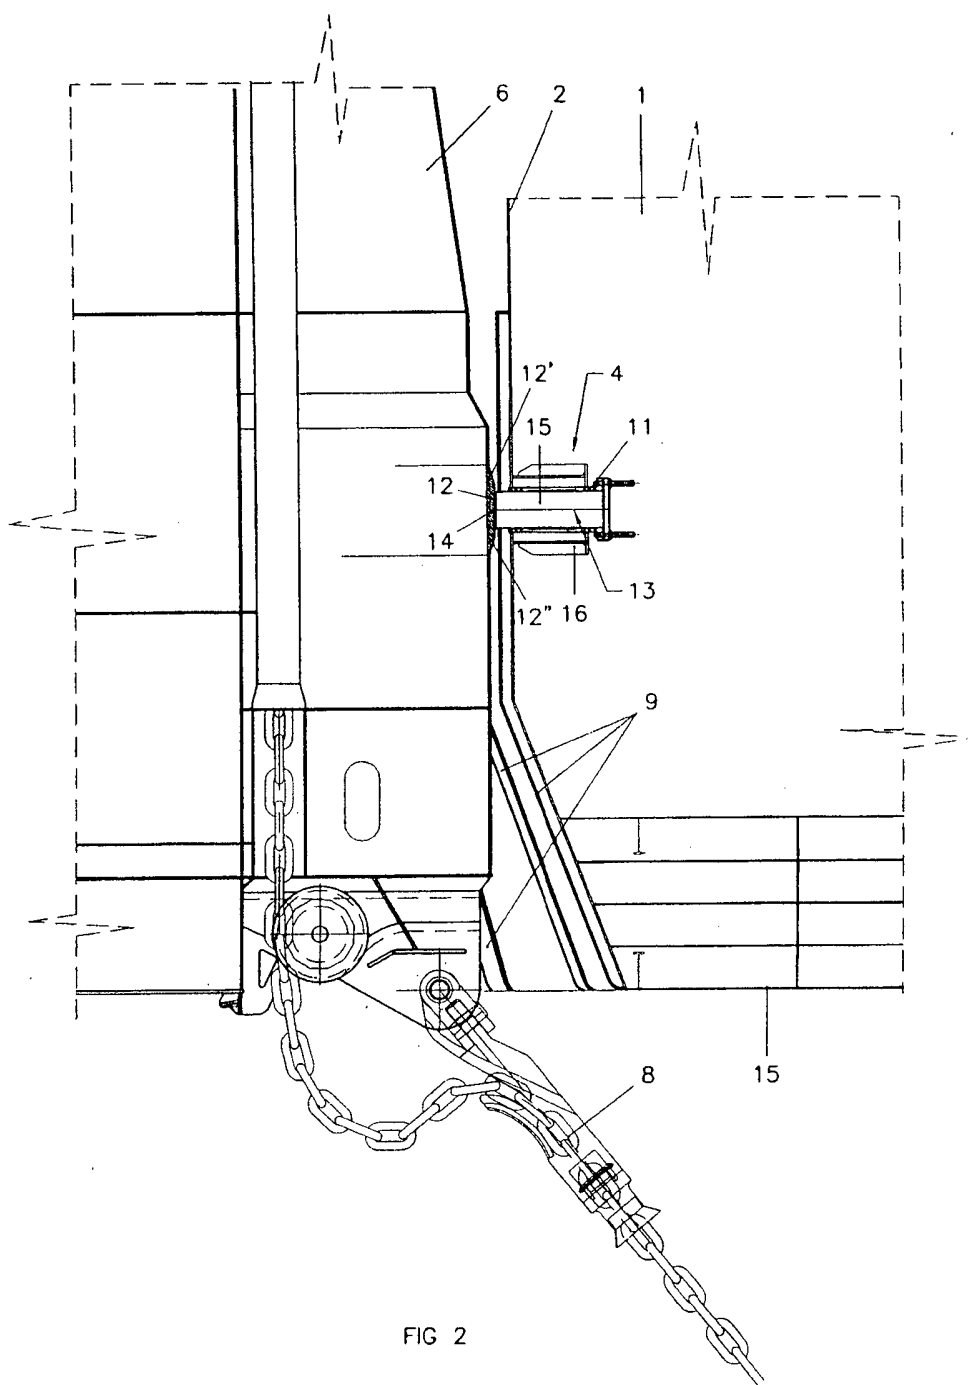


FIG 2

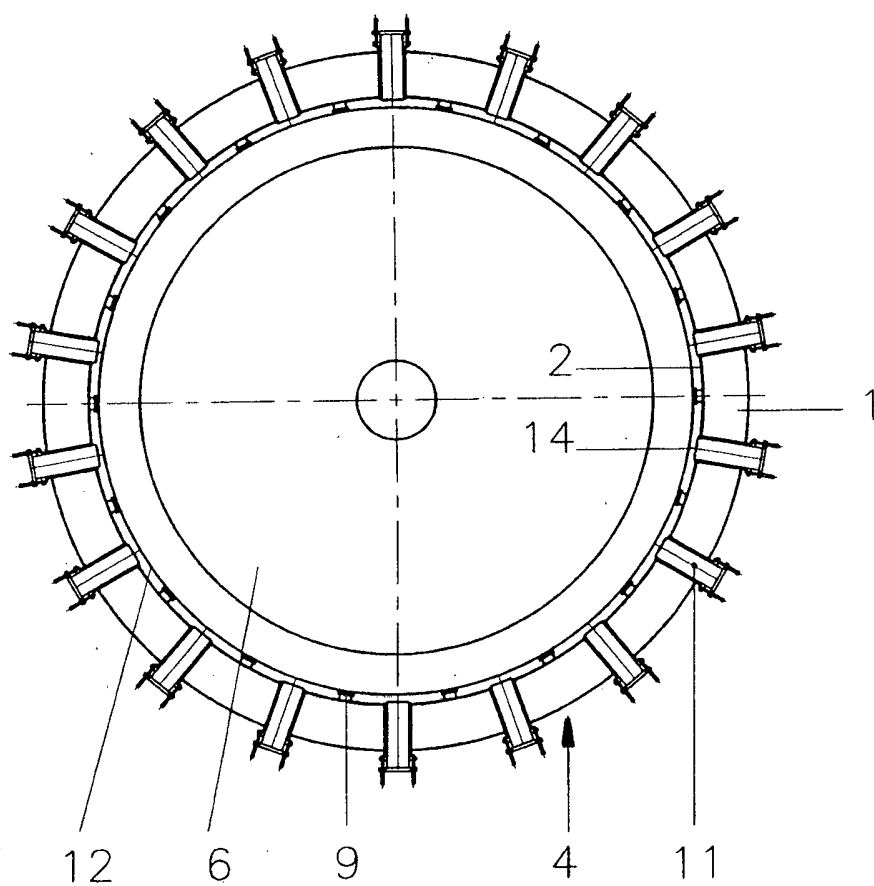


FIG 3

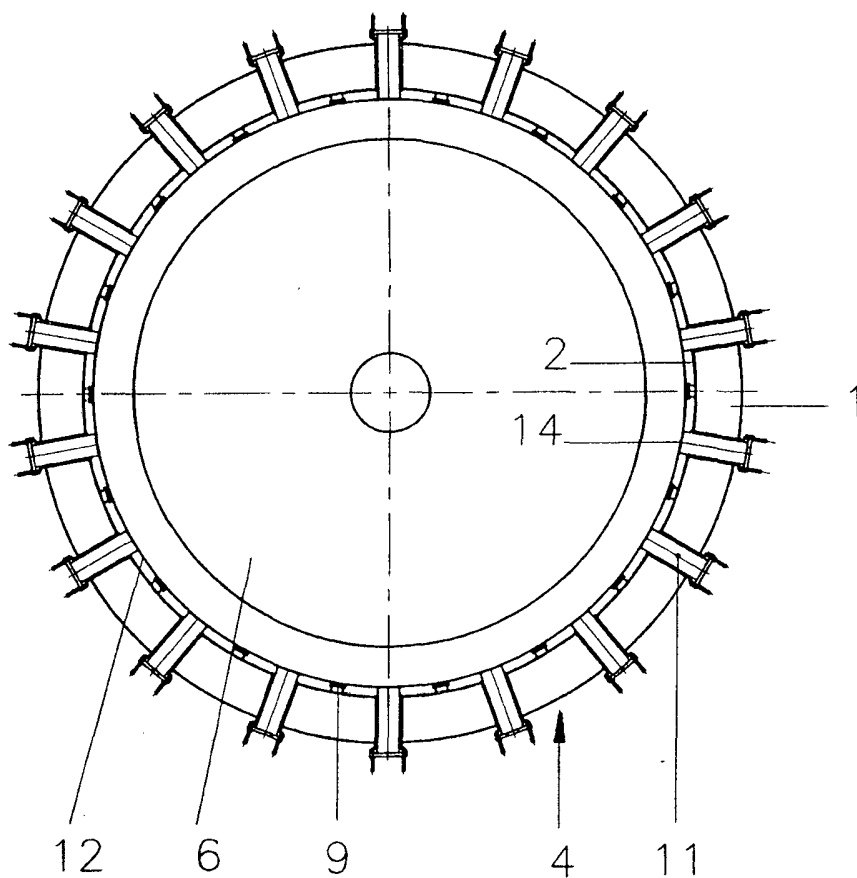


FIG 4