



(86) Date de dépôt PCT/PCT Filing Date: 2012/04/18
(87) Date publication PCT/PCT Publication Date: 2012/11/08
(85) Entrée phase nationale/National Entry: 2013/10/29
(86) N° demande PCT/PCT Application No.: CA 2012/000355
(87) N° publication PCT/PCT Publication No.: 2012/149630
(30) Priorité/Priority: 2011/05/02 (US61/481,681)

(51) Cl.Int./Int.Cl. *E04F 13/14* (2006.01),
E04F 13/21 (2006.01)
(71) Demandeur/Applicant:
PACIFIC PREBENCHED LTD., CA
(72) Inventeurs/Inventors:
MCINTOSH, ROBERT GORDON, CA;
NEMEZ, BRIAN PHILIP, CA
(74) Agent: SMART & BIGGAR

(54) Titre : PANNEAU EN ROCHE NATURELLE, PANNEAU DE PLACAGE EN ROCHE NATURELLE ET APPAREIL DE
SUPPORT DE PANNEAU
(54) Title: NATURAL ROCK PANEL, NATURAL ROCK VENEER PANEL AND PANEL SUPPORT APPARATUS

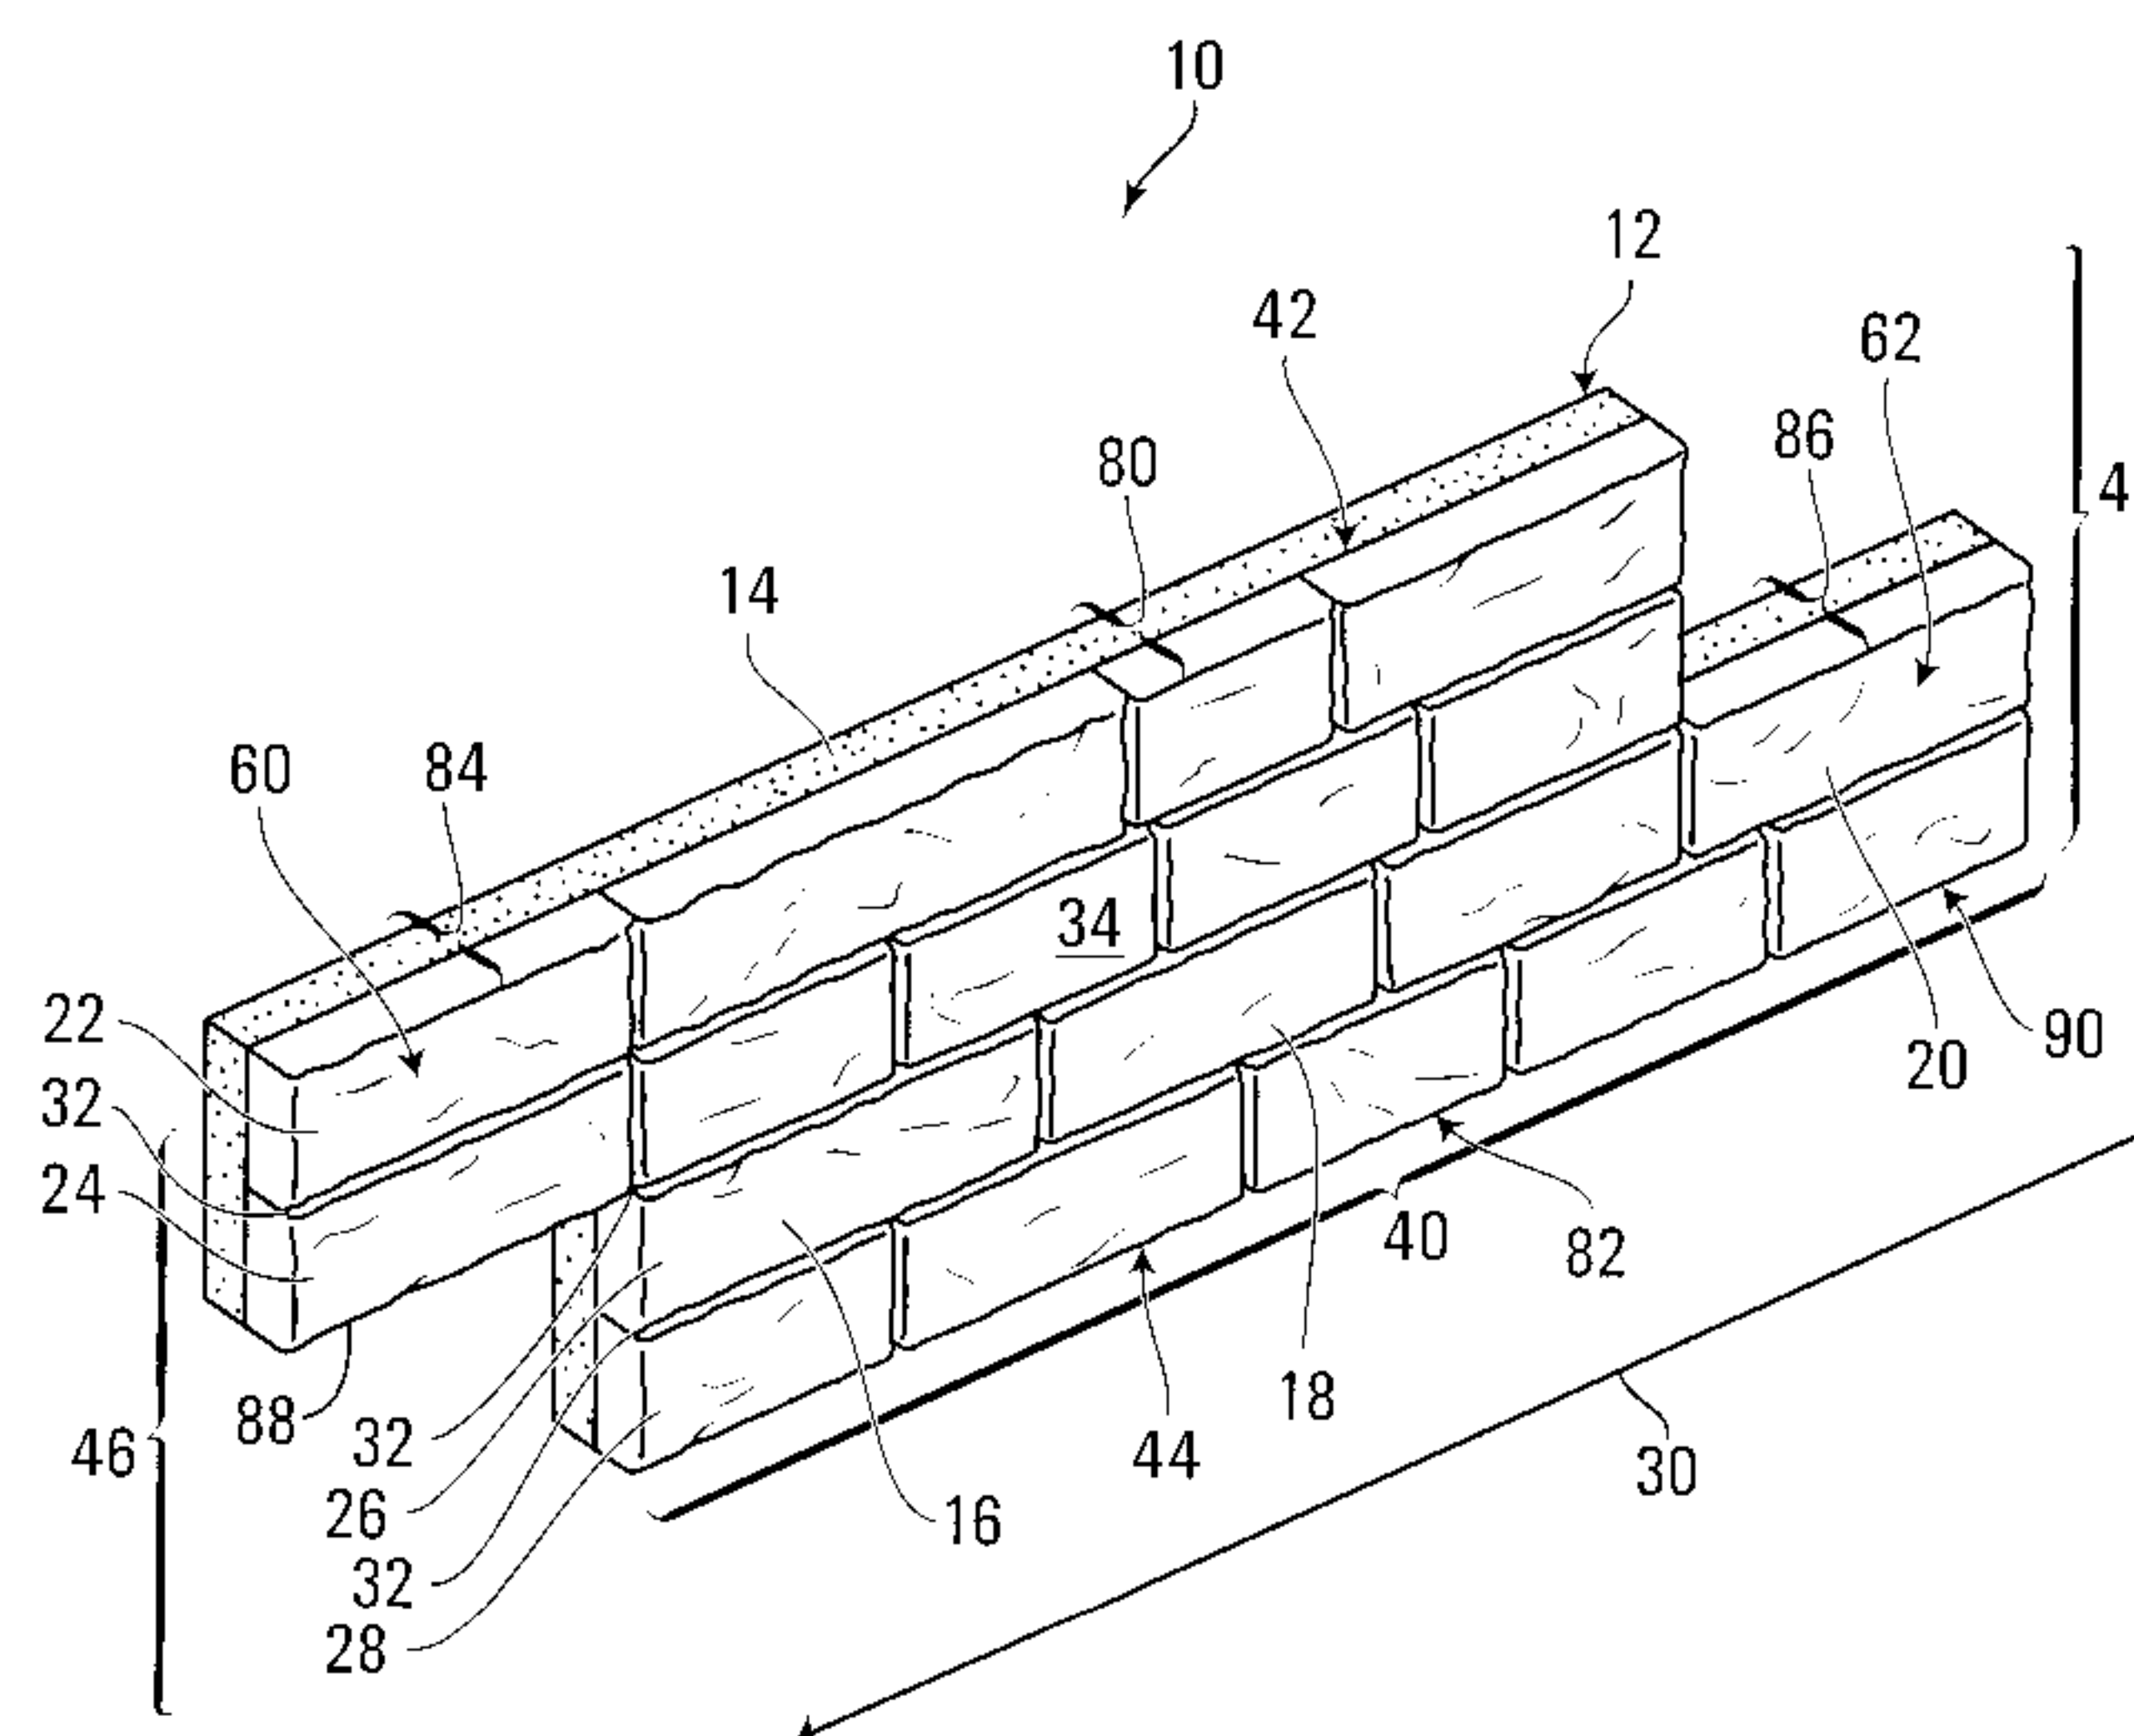


FIG. 1

(57) **Abrégé/Abstract:**

An architectural finish element operable to be placed adjacent similar architectural finish elements to form a finished surface on an architectural structure includes a body formed of a rock-based composite material comprising a low density solid particle additive, a plurality of unitary real stone veneer elements bonded to said body in courses extending in a first direction and in a random non-repetitive pattern, the real stone veneer elements having respective face surfaces generally lying in a plane to form an overall face surface of the architectural finish element. The low density solid particle additive is provided in an amount suitable to cause said architectural finish element to have a density of between about 10 pounds per square foot to about 15 pounds per square foot. The architectural finishing element may be mounted by mounting a mounting portion of a body of at least one dual architectural finish element support to a surface of an architectural structure, causing a first holder on the body to hold a portion of a bottom edge of a first architectural finish element in a first holder, causing a second holder on the body to hold a portion of a top edge of a second architectural finish element adjacent to the bottom edge of the first architectural finish element and in alignment with the bottom



(57) **Abrégé(suite)/Abstract(continued):**

edge of the first architectural finish element such that finish surfaces of the first and second architectural finish elements are generally coplanar and causing the body to absorb mechanical forces between the first and second architectural finish elements and the architectural structure.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2012/149630 A1

(43) International Publication Date
8 November 2012 (08.11.2012)

- (51) International Patent Classification:
E04F 13/14 (2006.01) *E04F 13/21* (2006.01)
- (21) International Application Number:
PCT/CA2012/000355
- (22) International Filing Date:
18 April 2012 (18.04.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/481,681 2 May 2011 (02.05.2011) US
- (71) Applicant (for all designated States except US): **PACIFIC PREBENCHED LTD.** [CA/CA]; 26076 31B Avenue, Aldergrove, British Columbia V4W 2Z6 (CA).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **MCINTOSH, Robert Gordon** [CA/CA]; 18-35537 Eagle Mountain Drive, Abbotsford, British Columbia V3G 2Z4 (CA). **NE-MEZ, Brian Philip** [CA/CA]; 2104-290 Newport Drive, Port Moody, British Columbia V3H 5N2 (CA).
- (74) Agents: **KNOX, John W.** et al.; SMART & BIGGAR, 2300-1055 West Georgia Street, PO Box 11115, Vancouver, British Columbia, V6E 3P3 (CA).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: NATURAL ROCK PANEL, NATURAL ROCK VENEER PANEL AND PANEL SUPPORT APPARATUS

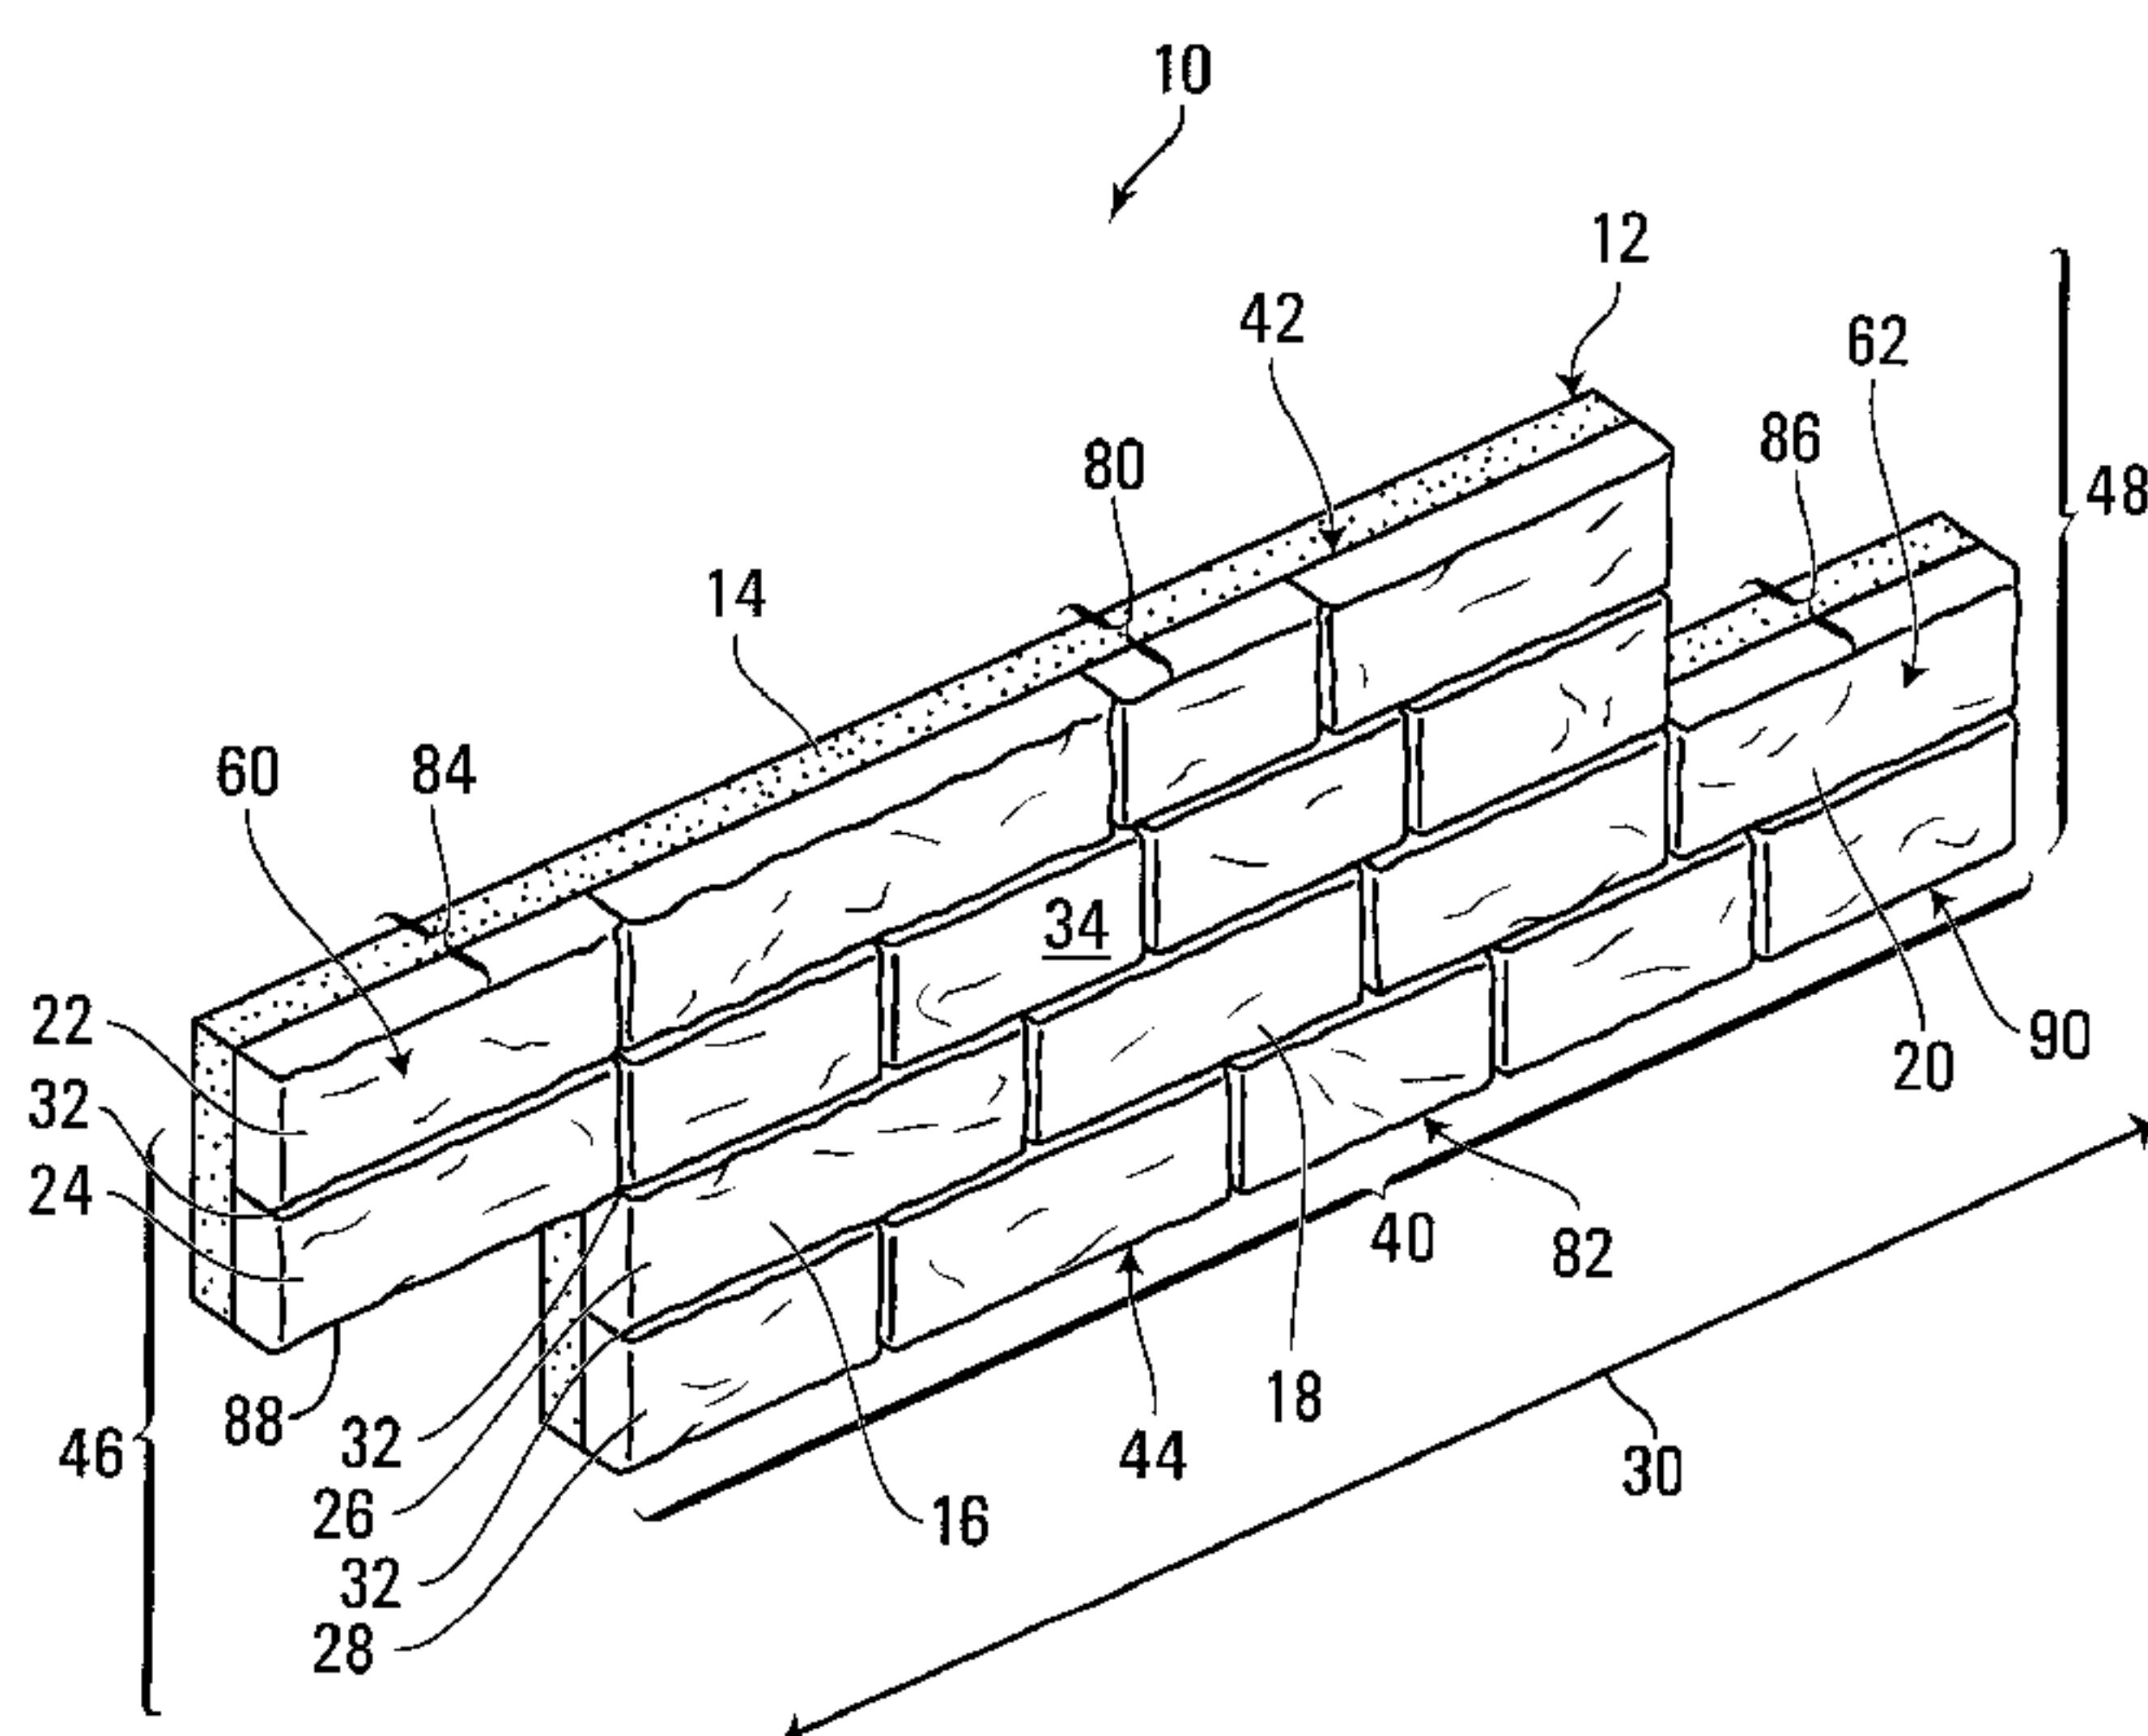


FIG. 1

(57) Abstract: An architectural finish element operable to be placed adjacent similar architectural finish elements to form a finished surface on an architectural structure includes a body formed of a rock-based composite material comprising a low density solid particle additive, a plurality of unitary real stone veneer elements bonded to said body in courses extending in a first direction and in a random non-repetitive pattern, the real stone veneer elements having respective face surfaces generally lying in a plane to form an overall face surface of the architectural finish element. The low density solid particle additive is provided in an amount suitable to cause said architectural finish element to have a density of between about 10 pounds per square foot to about 15 pounds per square foot. The architectural finishing element may be mounted by mounting a mounting portion of a body of at least one dual architectural finish element support to a surface of an architectural structure, causing a first holder on the body to hold a portion of a bottom edge of a first architectural finish element in a first holder, causing a second holder on the body to hold a portion of a top edge of a second architectural finish element adjacent to the bottom edge of the first architectural finish element and in alignment with the bottom edge of the first architectural finish element such that finish surfaces of the first and second architectural finish elements are generally coplanar and causing the body to absorb

mechanical forces between the first and second architectural finish elements and the architectural structure.

WO 2012/149630 A1



Published:

— *with international search report (Art. 21(3))*

NATURAL ROCK PANEL, NATURAL ROCK VENEER PANEL AND PANEL SUPPORT APPARATUS

This application claims the benefit of United States provisional patent application no. 61/481,681 filed May 2, 2011, the entire contents of which are incorporated by
5 reference herein in their entirety.

BACKGROUND OF THE INVENTION

1. Field of Invention

This invention relates to architectural finish elements and supporting apparatus therefor, and more particularly to architectural finish elements that employ real rock
10 configured in a lightweight panel form. The invention also relates to apparatus for supporting architectural finish panels including the type that employ real rock configured in a lightweight panel form.

2. Description of Related Art

Various architectural finish elements have been used over the years to clad
15 architectural structures such as buildings. Some of these architectural finish elements involve individual stone elements, individually secured to the architectural structure. Installation of this type of element is time-consuming, and such elements can be susceptible to release from the surface due to thermal expansion and contraction, which can loosen mortar adhesion systems that secure such elements
20 to an architectural structure for example. Further, such individually secured stone elements are often joined by mortar joints having thicknesses of about $\frac{3}{8}$ inches or more, and such mortar joints may have an undesirable appearance.

Some inventors have overcome the mortar adhesion problem by cutting grooves into the individual stone elements and using a support clip that cooperates with the
25 groove to support the individual stone element, but this tends to secure the stone

elements rather rigidly to the surface of the architectural structure, which can still be a problem due to wind loading and seismic loading. Forces due to these conditions can result in displacement of the individual stone elements from the clips, resulting in release of one or more of the stone elements from the structure.

- 5 The appearance of dry-stacked individual stone elements (i.e. where there are no readily apparent joint lines between adjacent stone elements) is a highly desirable and attractive finish and is generally achieved only by actually dry stacking individual stone elements. Generally, individual stone elements are not aggregated together into unitary collections to form an architectural finish element because the stone elements themselves are generally relatively heavy such that any unitary collection of stone elements is generally too heavy to be lifted by a single person and would be too heavy to meet many building codes. To reduce weight, individual stone elements may sometimes be secured to a foam backing for example, but the foam can deform over time if subjected to point loading and can be susceptible to ultraviolet radiation degradation and can present challenges for fire proofing.

Artificially formed surfaces comprised of concrete painted and molded to look like a dry-stacked arrangement of individual stone elements have been used on foam to form building blocks but are still too heavy and therefore not suitable for cladding a building. Patio and walkway surfaces have been paved by masonry panels comprising a reinforced series of masonry elements such as stone or brick pavers bound together by a cement or mortar-like material, but these too are too heavy for cladding an architectural structure.

SUMMARY OF THE INVENTION

In accordance with one aspect of the invention, there is provided an architectural finish element operable to be placed adjacent similar architectural finish elements to form a finished surface on an architectural structure. The architectural finish element includes a body formed of a rock-based composite material including a low density

solid particle additive. The architectural finish element also includes a plurality of unitary real stone veneer elements bonded to the body in courses extending in a first direction and in a random non-repetitive pattern, the real stone veneer elements having respective face surfaces generally lying in a plane to form an overall face surface of the architectural finish element. The low density solid particle additive is provided in an amount suitable to cause the architectural finish element to have a density of between about **10** pounds per square foot to about **15** pounds per square foot.

The real stone veneer elements may have a density of between about **8** pounds per square foot to about **11** pounds per square foot.

The solid particle additive may include at least one of recycled waste, non-toxic waste, post manufacturing waste, and post consumer waste.

The solid particle additive may include lightweight synthetic particles.

The lightweight synthetic particles may include polymer particles.

The body may include about **25%** to about **50%** of the low density solid particle additive by volume.

The rock-based composite material may include pumice and cement.

The rock-based composite material may have a density of no more than about **4** pounds per square foot.

The body may have top, bottom and left and right edges and the left and right edges may have complementary shapes for engaging with corresponding right and left edges of left and right adjacent similar architectural finish elements respectively.

The left and right edges of the body may have a complementary stepped-shape.

The plurality of unitary real stone veneer elements may be bonded to the body such that a spacing between adjacent courses is generally between 0 inches to about 1/4 inches to cause the real stone veneer elements forming the overall face surface to have a dry-stacked appearance.

- 5 The body may have a bottom edge and the courses of the unitary real stone veneer elements may be bonded to the body such that upper and lower edges of left side veneer elements adjacent the left edge of the body are generally the same distance from the bottom edge of the body as corresponding upper and lower edges of right side veneer elements adjacent the right edge of the body such that when a left edge
- 10 of a first similarly configured adjacent architectural finish element is engaged with the right edge of the architectural finish element, corresponding courses of real stone veneer elements are aligned to create the appearance of continuous courses of the real stone veneer elements across the architectural finish element and the similarly configured adjacent architectural finish element and such that when a right
- 15 edge of a second similarly configured adjacent architectural finish element is engaged with the left edge of the architectural finish element corresponding courses of real stone veneer elements are aligned to create the appearance of continuous courses of the real stone veneer elements across the architectural finish element and the second architectural finish element.
- 20 The top and bottom edges may have top and bottom profiles respectively for cooperating with support apparatus to secure the architectural finish element to the architectural structure.

- The body may have a rear portion disposed opposite the face surface and the rear portion may include an integral moisture path interference structure operably
- 25 configured to interfere with seepage of moisture from between adjacent such architectural finish elements toward the architectural structure.

The moisture path interference structure may include a rear surface opposite the face surface, on the body, the rear surface including generally planar portions and a plurality of parallel spaced apart spacers extending between the top and bottom edges of the body.

5 The spacers may include dovetailed tenons.

At least some of the dovetailed tenons may have a recess to receive a portion of a mounting element.

At least some of the dovetailed tenons may be spaced apart between the top and bottom edges to form air passageways that may permit air to move in a direction
10 generally parallel to the direction of the courses of the real stone veneer.

In accordance with another aspect of the invention, there is provided an architectural finishing method. The method involves mounting a mounting portion of a body of at least one dual architectural finish element support to a surface of an architectural structure, and causing a first holder on the body to hold a portion of a bottom edge of
15 a first architectural finish element in a first holder. The method also involves causing a second holder on the body to hold a portion of a top edge of a second architectural finish element adjacent to the bottom edge of the first architectural finish element and in alignment with the bottom edge of the first architectural finish element such that finish surfaces of the first and second architectural finish elements are generally
20 coplanar. The method also involves causing the body to absorb mechanical forces between the first and second architectural finish elements and the architectural structure.

The first and second holders may hold the bottom edge of the first architectural finish element and the top edge of the second architectural finish element within about $\frac{1}{4}$
25 inches of each other.

Mounting may involve causing a flat surface of a sheet portion of the body to rest against the surface of the architectural structure.

Absorbing mechanical forces may involve causing a force absorbing member to be held by a holder on the body, in a position to absorb the mechanical loads between
5 the body and the surface of the architectural structure.

Causing a force absorbing member to be held may involve causing a portion of the force absorbing member to be held in an opening in the sheet portion and between the guides on opposite sides of the opening.

Causing the force absorbing member to be held may involve aligning the force
10 absorbing member in the opening and aligning the force absorbing member between the guides.

Aligning the force absorbing member may involve causing a flat outer surface of a projection on the force absorbing member, having a shape complementary to a shape of the opening to bear against the surface of the architectural structure and a
15 holding portion of the force absorbing member, adjacent the projection and having first and second opposite end portions extending outwardly on opposite sides of the projection to overlap with corresponding margins of the sheet portion on opposite sides of the opening when the projection is received in the opening.

Absorbing the forces may involve causing a fastening bar having a bearing surface
20 having a shape corresponding to a shape of the holding portion of the force absorbing portion and an opening for receiving a fastener to receive a fastener through the opening and through the force absorbing member such that the fastener bears against the fastening bar to cause the bearing surface of the fastening bar to bear against the holding portion to press the opposite ends of the holding portion
25 against the margins of the sheet portion, while holding the projection in contact with the surface of the architectural structure, such that differences in forces between the

sheet portions and the surface of the architectural structure are absorbed by the force absorbing member.

Absorbing the force may involve causing a resilient body acting as the force absorbing member to resiliently deform in response to forces between the surface of
5 the architectural structure and the mounting portion.

The resilient body may be comprised of Neoprene®.

Causing the first holder on the body to hold a portion of a bottom edge of the first architectural finish element may involve causing a first projection on the first holder to be received in a groove in a bottom edge of the first architectural finish element.

10 The method may further involve causing the first holder to hold the edge of the first architectural finish element in a position spaced apart from the surface of the architectural structure.

The method may further involve receiving the edge of the first architectural finish element in a first receptacle defined by a first set of bent portions in a unitary piece
15 of sheet metal acting as the body.

The method may further involve causing coplanar distal edges of the guides to touch a cooperating surface on a back side of the architectural finish element to position the first architectural finish element.

The method may further involve causing a second projection on the body to bear
20 against a portion of the top edge of the second architectural finish element.

In accordance with another aspect of the invention, there is provided a dual architectural finish element support apparatus including a body. The body includes a mounting portion facilitating mounting the second body to a surface of an architectural structure, a first holder operably configured to hold a portion of a bottom

edge of a first architectural finish element, a second holder operably configured to hold a portion of a top edge of a second architectural finish element adjacent to the bottom edge of the first architectural finish element and in alignment with the bottom edge of the first architectural finish element such that finish surfaces of the first and
5 second architectural finish elements are generally coplanar, and a load absorber operably configured to absorb mechanical forces between the mounting portion and the architectural structure.

The first and second holders may hold the bottom edge of the first architectural finish element and the top edge of the second architectural finish element within about $1/4$
10 inches of each other.

The mounting portion may include a sheet portion having a flat surface for resting against the surface of the architectural structure.

The load absorber may include a force absorbing member, and the sheet portion may have a force absorbing member holder for holding the force absorbing member
15 in a position to absorb the mechanical loads between the body and the surface of the architectural structure.

The force absorbing member holder may include a wall defining an opening in the sheet portion and guides extending from the wall and disposed adjacent the opening for holding a portion of the force absorbing member in the opening and between the
20 guides.

The force absorbing member may include a first aligner operably configured to align the force absorbing member in the opening and a second aligner operably configured to align the force absorbing member against the guides.

The first aligner may include a projection on the force absorbing member. The
25 projection may have a flat outer surface for bearing against the surface of the

architectural structure and may have a shape complementary to a shape of the opening. The second aligner may include a holding portion on the force absorbing member adjacent the projection and having first and second opposite end portions extending outwardly on opposite sides of the projection such that the first and
5 second opposite ends overlap with corresponding margins of the sheet portion on opposite sides of the opening when the projection is received in the opening.

The load absorber may further include a fastening bar having a bearing surface having a shape corresponding to a shape of the holding portion of the force absorbing portion, and the fastening bar may have an opening for receiving a
10 fastener operable to extend through the fastening bar and through the force absorbing member such that the fastener bears against the fastening bar to cause the bearing surface of the fastening bar to bear against the holding portion to press the opposite ends of the holding portion against the margins of the sheet portion, while holding the projection in contact with the surface of the architectural structure,
15 such that differences in forces between the sheet portions and the surface of the architectural structure may be absorbed by the force absorbing member.

The force absorbing member may include a resilient body resiliently deformable in response to forces between the surface of the architectural structure and the mounting portion.

20 The resilient body may be comprised of Neoprene®.

The body of the architectural finish element support apparatus may be formed of a unitary piece of sheet metal bent into a form defining the mounting portion, the first holder and the second holder.

The first holder may include a first projection operably configured to be received in a
25 groove in a bottom edge of the first architectural finish element.

The first holder may include a first receptacle spaced apart from the mounting portion, for holding the edge of the first architectural finish element in a position spaced apart from the surface of the architectural structure.

5 The first receptacle may be defined by a first set of bent portions of the unitary piece of sheet metal.

The guides may have coplanar distal edges lying in a plane spaced apart from the first projection by a distance enabling the coplanar distal edges to touch a cooperating surface on a back side of the first architectural finish element.

10 The second holder may include a second projection operably configured to bear against a portion of a top edge of the second architectural finish element.

In accordance with another aspect of the invention, there is provided an architectural finishing system. The system includes first and second architectural finish elements of the type described above, and at least one dual architectural finish element support system including a second body. The second body includes a mounting
15 portion facilitating mounting the second body to a surface of an architectural structure, a first holder operably configured to hold a portion of a bottom edge of the first architectural finish element, and a second holder operably configured to hold a portion of a top edge of the second architectural finish element adjacent to the bottom edge of the first architectural finish element and in alignment with the bottom
20 edge of the first architectural finish element such that finish surfaces of the first and second architectural finish elements are generally coplanar. The at least one dual architectural finish element support system also includes a load absorber operably configured to absorb mechanical forces between the mounting portion and the architectural structure.

The first and second holders may hold the bottom edge of the first architectural finish element and the top edge of the second architectural finish element within about $1/4$ inches of each other.

5 The mounting portion may include a sheet portion having a flat surface for resting against the surface of the architectural structure.

The load absorber may include a force absorbing member, and the sheet portion may have a force absorbing member holder for holding the force absorbing member in a position to absorb the mechanical loads between the mounting portion and the surface of the architectural structure.

10 The force absorbing member holder may include a wall defining an opening in the sheet portion and guides extending from the wall and disposed adjacent the opening for holding a portion of the force absorbing member in the opening and between the guides.

15 The force absorbing member may include a first aligner operably configured to align the force absorbing member in the opening and a second aligner operably configured to align the force absorbing member against the guides.

20 The first aligner may include a projection on the force absorbing member. The projection may have a flat outer surface for bearing against the surface of the architectural structure and may have a shape complementary to a shape of the opening. The second aligner may include a holding portion on the force absorbing member adjacent the projection and having first and second opposite end portions extending outwardly on opposite sides of the projection such that the first and second opposite ends overlap with corresponding margins of the sheet portion on opposite sides of the opening when the projection is received in the opening.

The load absorber may further include a fastening bar having a bearing surface having a shape corresponding to a shape of the holding portion of the force absorbing portion, and the fastening bar may have an opening for receiving a fastener operable to extend through the fastening bar and through the force absorbing member such that the fastener bears against the fastening bar to cause the bearing surface of the fastening bar to bear against the holding portion to press the opposite ends of the holding portion against the margins of the sheet portion, while holding the projection in contact with the surface of the architectural structure, such that differences in forces between the sheet portions and the surface of the architectural structure are absorbed by the force absorbing member.

The force absorbing member may include a resilient body resiliently deformable in response to forces between the surface of the architectural structure and the mounting portion.

The resilient body may be comprised of Neoprene®.

15 The body of the architectural finish element support system may be formed of a unitary piece of sheet metal bent into a form defining the mounting portion, the first holder and the second holder.

The first holder may include a first projection operably configured to be received in a groove in a bottom edge of the first architectural finish element.

20 The first holder may include a first receptacle spaced apart from the mounting portion, for holding the edge of the first architectural finish element in a position spaced apart from the surface of the architectural structure.

The first receptacle may be defined by a first set of bent portions of the unitary piece of sheet metal.

The guides may have generally coplanar distal edges lying in a plane spaced apart from the first projection by a distance enabling the coplanar distal edges to touch a cooperating surface on a back side of the architectural finish element.

5 The second holder may include a second projection operably configured to bear against a portion of a top edge of the second architectural finish element.

10 In accordance with another aspect of the invention, there is provided an architectural finish element operable to be placed adjacent similar architectural finish elements to form a finished surface on an architectural structure. The architectural finish element includes a body formed of a plurality of unitary real stone elements adhesively
10 secured together in courses, the real stone elements having respective face surfaces generally lying in a front plane to form an overall face surface of the architectural finish element and having respective rear surfaces generally lying in a rear plane facing in a direction opposite the face surface. The plurality of unitary real stone elements are arranged to form left and right edges each having
15 complementary stepped-shapes and generally parallel top and bottom edges. The courses are parallel with the top and bottom edges and the stone elements at the left edge are of similar thickness and are disposed at the same distance from the bottom edge as corresponding stone elements at the right edge so that courses on left and right adjacently placed similar architectural finish elements are aligned with the
20 courses of the real stone elements of the body.

The body may have a density of no more than about **15** pounds per square foot.

The rear surface may be flat planar, and may support a mesh backing or have grooves cut therein to cooperate with mortar to secure the architectural finish element to said architectural structure.

Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

5 In drawings which illustrate embodiments of the invention:

Figure 1 is a perspective view of an architectural finish element according to a first embodiment of the invention;

10 Figure 2 is a perspective of the architectural finish element of Figure 1, shown with left and right adjacent similar architectural finish elements engaged therewith;

Figure 3 is a left side view of the architectural finish element shown in Figure 1;

Figure 4 is an oblique view of the architectural finish element shown in Figure 1 with adjacent left and right and top and bottom similar architectural finish elements to form an overall cladding on an architectural structure;

15 Figure 5 is an oblique view of the architectural finish element of the type shown in Figure 1, with an alternate rear surface;

Figure 6 is an oblique view of an architectural finish element according to a second embodiment of the invention;

Figure 7 is a left side view of the architectural finish element shown in Figure 6;

20 Figure 8 is a rear perspective of the architectural finish element shown in Figure 6;

Figure 9 is a perspective view of a dual architectural finish element support apparatus according to another embodiment of the invention;

Figure 10 is a cross-sectional view of the dual architectural finish element of Figure 9, shown fastened to an architectural structure and supporting first and second architectural finish elements;

5 Figure 11 is a cross-sectional top view of the architectural finish element shown in Figure 8, secured to an architectural structure;

Figure 12 is a perspective view of an architectural finish element according to a third embodiment of the invention comprising a plurality of glued real stone and veneer elements;

10 Figure 13 is a rear perspective view of the architectural finish element shown in Figure 12;

Figure 14 is a rear view of the architectural finish element of Figure 12 with a mesh material on the rear surface thereof; and

Figure 15 is a rear view of an alternate rear surface of the architectural finish element of Figure 12.

15 DETAILED DESCRIPTION

Referring to Figure 1, an architectural finish element operable to be placed adjacent similar architectural finish elements to form a finished surface on an architectural structure is shown generally at 10. The architectural finish element 10 is in the form of a panel and comprises a body 12 formed of a rock-based composite material comprising a low density solid particle additive 14 and a plurality of unitary real stone veneer elements, such as shown at 16, 18 and 20 for example, bonded to the body.

In this embodiment, the rock-based composite material forming the body 12 is comprised of Portland cement mixed with water and an aggregate comprised of pumice in a ratio of 1.5:1:2. In this embodiment, the veneer elements, such as

shown at **16**, **18** and **20** for example, may be bonded to the body **12** by casting the body adjacent the veneer elements.

The solid particle additive **14** may be recycled waste, non-toxic waste, post manufacturing waste, or post consumer waste, for example, such as is available
5 under the trade name Re-Ad from CLP Technologies, LLC of Seattle, Washington, USA.

Alternatively, or in addition, the solid particle additive **14** may comprise lightweight synthetic particles such as polymer particles available from Syntheon Inc. of Moon Township, PA, USA under the trade name Elemix.

10 The body **12** is formed such that it comprises about **25%** to about **50%** of the low density solid particle additive **14** by volume and such that the rock-based composite material and the low density solid particle additive are provided in amounts suitable to cause the body to have a density of no more than about **4** pounds per square foot. The real stone veneer elements **16**, **18**, **20** are cut thinly such that they add no more
15 than about **6** to **11** pounds per square foot so that the completed architectural finish element will have a density of between about **10** pounds per square foot to about **15** pounds per square foot. This provides a panel of a weight suitable for manipulation by most persons and one that complies with most building codes.

At the time of manufacture, the unitary real stone veneer elements **16**, **18**, **20** are
20 bonded to the body **12** in courses **22**, **24**, **26**, **28**, for example, extending in a first direction **30** and in a random non-repetitive pattern. The real stone veneer elements **16**, **18**, **20** are bonded to the body **12** such that a spacing **32** between adjacent courses is generally between **0** inches to about **1/4** inches and such that respective face surfaces of the unitary real stone veneer elements generally lie in a common
25 plane to form an overall face surface **34** of the architectural finish element, causing it to have a dry-stacked appearance. A dry-stacked appearance is one in which the individual stone veneer elements **16**, **18**, **20** are arranged so closely together that

there are no “mortar” lines or “mortar joints”, i.e. gaps between adjacent such elements.

Still referring to Figure 1, the body 12 has a main portion 40 and top, bottom, and left and right edges 42, 44, 46 and 48. Referring to Figure 2, the left and right edges 46, 48 have complementary shapes for engaging with corresponding right and left edges 50 and 52 of left and right adjacent similar architectural finish elements 54, 56 respectively. In the embodiment shown, the left and right edges 46, 48 of the body 12 have a complementary stepped-shape, wherein the left edge has an upper projection 60 and the right edge has a lower projection 62, both projecting from opposite ends of the main portion 40 by the same distance, so as to form a lower receptacle 64 on the left side of the main portion and an upper receptacle 66 on the right side of the main portion. This permits a lower projection 68 of the adjacent left element 54 to be received in the lower receptacle 64, while the upper projection 60 of the left edge 46 is received in an upper receptacle 70 of the adjacent left element 54. Similarly, an upper projection 72 of the adjacent right element 56 is received in the upper receptacle 66, while the lower projection 62 of the right edge is received in the lower receptacle 74 of the adjacent right element 56.

Referring to Figure 3, which is an end view of the left edge 46, the top and bottom edges 42 and 44 have top and bottom edge profiles 80 and 82 respectively. Referring back to Figure 1, the top edge profile 80 extends along the main portion of the body 12 and along a top portion 84 of the upper projection 60 on the left edge 46 of the body 12 and along a top portion 86 of the lower projection 62 on the right edge 48 of the body. The bottom edge profile 82 extends along the main portion 40 of the body 12 and along a bottom portion 88 of the upper projection 60 on the left edge 46 of the body and along a bottom portion 90 of the lower projection 62 on the right edge 48 of the body. In the embodiment shown, the top and bottom edge profiles 80 and 82 are flat planar surfaces that permit the top and bottom edges of adjacent

architectural finish elements to be butted up against each with no readily visible joint line.

Referring back to Figure 3, the body **12** further has a rear portion **99** disposed opposite the face surface. The rear portion faces the architectural structure on which the architectural finish element is to be mounted. The rear portion has a rear surface opposite the face surface of the body. The rear surface is generally flat planar.

The architectural finish element may be directly secured to a flat surface of the architectural structure by placing wet mortar on the flat surface and then setting the architectural finish element into the mortar, like a wall tile.

10 The above-described architectural finish element provides a body **12** with an overall face surface **34** provided by a unitary collection of real stone veneer elements **16**, **18**, **20** having a dry-stacked appearance. In the embodiment shown, the overall length of the architectural finish element is about **30** inches and the height is about **8** inches. Each projection **60** and **62** extends about **4** inches from the main body and
15 has a height of about **4** inches. The use of an architectural finish element according to the specific embodiment described provides about **1.33** square feet of coverage to the architectural structure and can be applied as a unit, avoiding individual placement of real stone veneer directly on the architectural structure. This enables rapid application of a finishing surface or outer cladding to an architectural structure
20 **1.33** square feet at a time, rather than direct application of real stone veneer elements that cover only a few square inches at a time, while still achieving a dry-stacked appearance.

The courses of the unitary real stone veneer elements **16**, **18**, **20** are bonded to the body **12** such that upper and lower edges **100** and **102** of left side veneer elements, one of which is shown at **16** adjacent the left edge **46** of the body **12**, are generally
25 the same distances from the bottom edge **44** of the body as corresponding upper and lower edges **104** and **106** of veneer elements adjacent the right edge **48** of the

body such that when the left edge **52** of a first similarly configured adjacent architectural finish element **56** is engaged with the right edge **50** of the architectural finish element **10**, corresponding courses of real stone veneer elements **16**, **18**, **20** are aligned to create the appearance of continuous courses of the real stone veneer elements across the architectural finish element **10** and the similarly configured adjacent architectural finish element **56**. Similarly, when a right edge **50** of a second similarly configured adjacent architectural finish element **54** is engaged with the left edge **46** of the architectural finish element **10**, corresponding courses of real stone veneer elements are aligned to create the appearance of continuous courses of the real stone veneer elements across the architectural finish element and the second architectural finish element **54**. In addition, referring to Figure 4, due to the engagement of the stepped left and right edges **46** and **48** with left and right adjacent architectural finish elements **110** and **112** and due to the abutment of the top and bottom edges **42** and **44** with adjacent upper and lower architectural finish elements, and due to the consistent placement of the real stone veneer elements in courses aligned at each edge, when a plurality of such architectural finish elements are engaged as shown to form an overall surface on the architectural structure, the resulting overall surface has a consistent, uniform dry-stacked appearance with the randomness of stones in respective courses, but with the regularity of courses along the entire length of the finished surface.

In the embodiment shown in Figures 1 to 4, the rear surface is flat planar. Referring to Figure 5, in an alternative embodiment, there is provided an architectural finish element as shown at **120**, which is the same as the architectural finish element shown in Figures 1 to 4 but has a body **123** having a rear surface that is formed to have a plurality of generally coplanar portions **124** and a plurality of parallel spaced apart spacers **126** extending between top and bottom edges **128** and **130** of the body. In the embodiment shown, the spacers **126** comprise dovetailed tenons each having an outer surface **132** operable to contact a surface the architectural structure to which the associated architectural finish element **120** is to be secured.

The architectural finish element **120** may be directly secured to a flat surface of the architectural structure by placing wet mortar on the flat surface and then setting the architectural finish element into the mortar such that the mortar becomes disposed between adjacent tenons and in contact therewith. When the mortar sets, it takes the
5 shape of a complementary dovetail engaged with the dovetailed tenons of the architectural finish element and thus the dovetailed tenons of the architectural finish element are held securely by the mortar, which causes the architectural finish element to be secured to the surface of the architectural structure.

Referring to Figure 6 an architectural finish element according to a third embodiment
10 is shown generally at **140**. Referring to Figures 6 and 7 the architectural finish element **140** according to this embodiment is the same as that of the second embodiment with the exception that it has, a top edge **142** having a profile that includes first, second and third flat top surfaces **144**, **146**, **148** arranged in a step pattern and has a bottom edge **150** having a profile that includes generally
15 rectangular outer and inner projections **152** and **154** spaced apart by a generally rectangular groove **156**. These profiles of the top and bottom edges **142** and **150** enable the use of a dual architectural finish element support apparatus, such as shown at **160** in Figures 9 and 10 according to another aspect of the invention, to be used to secure the architectural finish element **140** to the surface of the architectural
20 structure. Also, to facilitate the use of the dual architectural finish element support apparatus **160**, the dovetailed tenons **158** have recesses **159** as shown in Figure 8.

Referring to Figures 9 and 10, the dual architectural finish element support apparatus **160** comprises a second body **162** having a mounting portion **164** facilitating mounting the second body to the surface of the architectural structure, a
25 first holder **166** operably configured to hold a portion of a bottom edge **167** of the first architectural finish element shown at **140** in Figure 6 and a second holder **168** operably configured to hold a portion of the top edge **169** of a second architectural finish element **170** of the type shown in Figure 6, adjacent to the bottom edge **167** of

the first architectural finish element **140** and in alignment with the bottom edge of the first architectural finish element such that finish surfaces **172** and **174** of the first and second architectural finish elements **140** and **170** are generally coplanar. The first and second holders **166** and **168** hold the bottom edge **167** of the first architectural
5 finish element **140** and the top edge **169** of the second architectural finish element **170** within about $1/4$ inches of each other. Referring to Figure **9**, in the embodiment shown, the body of the architectural finish element support apparatus is formed of a unitary piece of sheet metal bent into a form defining the mounting portion **164**, the first holder **166** and the second holder **168**.

- 10 The mounting portion **164** comprises a generally planar sheet portion **180** of the sheet metal body having a flat surface **182**, which in some embodiments may rest against the surface of the architectural structure, although in other embodiments the flat surface **182** may be spaced apart from the surface of the architectural structure. The mounting portion **164** cooperates with a load absorber shown generally at **183**
15 that is operably configured to absorb mechanical forces between the mounting portion **164** and the architectural structure **11**. The load absorber **183** includes a load absorbing member **184**, a fastening bar **186** and a fastener **188** to secure the body **162** to the architectural structure.

Force Absorbing Member Holder

- 20 The mounting portion **164** includes a force absorbing member holder **190** formed into the mounting portion of the sheet metal body.

- The force absorbing member holder **190** has a wall **192** defining an opening **194** in the mounting portion **164**, such that portions of the sheet portion about the opening define margins **196** and **198** around the opening. In the embodiment shown the
25 opening **194** has a rectangular shape with first and second long side portions **197** and **199** and first and second short side portions **200** and **202**. The force absorbing member holder **190** also has first and second guides **204** and **206** extending in

parallel spaced apart relation from the wall **192** and disposed adjacent the first and second long side portions **197** and **199** of the opening **194** for holding a portion of the force absorbing member **184** in the opening and for holding another portion thereof between the guides. The guides **204** and **206** may be formed by cutting an
5 'h' form having a center cut into the planar mounting portion **164** of the body **162** and then bending solid portions on opposite sides of the "h" form to extend parallel to each other, perpendicularly to the plane of the mounting portion.

Force absorbing member

In this embodiment, the force absorbing member **184** comprises a resilient body **210**
10 comprised of Neoprene[®]. The resilient body is formed to include a first aligner **212** operably configured to align the force absorbing member **184** in the opening **194** and a second aligner **214** operably configured to align the force absorbing member **184** against the guides **204** and **206**. The first aligner **212** includes a projection **216** on the force absorbing member **184**, the projection **216** having a flat outer surface **218**
15 for bearing against the surface of the architectural structure and having a shape complementary to the shape of the opening **194** which, in the embodiment shown, is rectangular. The second aligner **214** comprises a rectangular holding portion **220** on the force absorbing member adjacent the projection **216** and having first and second opposite end portions **222** and **224** extending outwardly on opposite sides of the
20 projection **216** such that the first and second opposite end portions overlap with corresponding margins **196** and **198** of the sheet portion on opposite short side portions **200** and **202** of the opening **194** when the projection **216** is received in the opening **194**.

The load absorber fastening bar **186** has a bearing surface **230** having a shape
25 corresponding to the shape of the holding portion **220** of the force absorbing member (i.e. rectangular). The fastening bar **186** also has an opening **232** for receiving the fastener **188**. The fastener **188** is operable to extend through the

fastening bar **186** and through the force absorbing member **184** and into the surface of the architectural structure as shown in Figure **10** such that the fastener engages with the architectural structure and, when tightened, bears against the fastening bar **186** to cause the bearing surface **230** of the fastening bar **186** to bear against the holding portion **220** of the force absorbing member **184** to press the opposite end portions **222** and **224** of the holding portion **220** against the margins **196** and **198** on opposite sides of the opening **194**, while holding the flat surface **218** of the projection **216** in contact with the surface of the architectural structure.

First Holder

10 The first holder **166** includes a first projection **250** operably configured to project upwardly when in use and operable to be received in the groove **156** in the bottom edge **150** of the architectural finish element.

The first holder **166** also includes a first receptacle **252** spaced apart from the mounting portion **164** and terminated in the first projection **250**. The first receptacle **252** holds a portion of the bottom edge **150** of the architectural finish element **140** in a position spaced apart from the surface of the architectural structure. More particularly, the first receptacle **252** holds the inner projection **154** on the bottom edge **150** of the architectural finish element, while the first projection **250** is received in the groove **156** between the inner and outer projections **154** and **152** on the bottom edge **150**.

To facilitate use of the dual architectural finish element support apparatus **160** in areas of the architectural finish element **140** which have dovetailed tenons, at least some of the dovetailed tenons **158** are configured with a recess **159** to receive the guides **204** and **206** extending from the mounting portion **164**. In this case, the tenons **158** are configured to extend from the top edge **142** of the architectural finish element **140** to near the bottom edge **150** but not completely to the bottom edge. Rather, lower end portions **270** of the tenons **158** are spaced apart from the bottom

edge **150** by the distance between the first receptacle **252** and a top **272** of the mounting portion **164**, leaving only a planar surface portion **274** of the rear surface of the architectural finish element exposed in this area. The enables the entire mounting portion **164** to be received in the space defined by the lower end portion
5 **270** of the tenon **158**, and the planar surface portion **274** between the lower end portion of the tenon and the bottom edge **150** of the architectural finish element. In addition, the guides **204** and **206** on the dual architectural finish element support apparatus **160** are configured such that their distal surfaces **260** and **262** touch the flat planar surface **274** between the lower end portion **270** of the tenon **158** and the
10 bottom edge **167** of the architectural finish element **140**. In addition, distal flat surfaces **280** of the tenons **158** touch the flat surface **282** of the architectural structure. This provides for additional support.

The second holder **168** includes a second projection **290** operably configured to project downwardly when in use, in a direction opposite to the first projection **250**
15 and operably configured to bear against a portion of a top edge **169** of the second architectural finish element **170**. In particular, in this embodiment, the second projection **290** is configured to bear against the second flat top surface **146** and a vertical surface **292** between the first and second flat top surfaces **144** and **146** of the second architectural finish element **170** such that the top edge **169** of the second
20 architectural finish element is aligned with the bottom edge **167** of the architectural finish element **140** held by the first receptacle **252** and first projection **250**.

When architectural finish elements **140** and **170** of the type described are secured to the architectural structure in the above manner, adjacent tenons **158** and the planar surface portions **274** between adjacent tenons form air passageways **300** that
25 extend parallel to the tenons and permit air to move therein, in a direction generally parallel to the orientation of the tenons. This enables moisture that may ingress between adjacent architectural finish elements **140** and **170** to reach an air passageway **300**. Such air passageways **300** formed by respective vertically

adjacent architectural finish elements **140** and **170** are in communication with each other and facilitate airflow vertically along the passageways, which facilitates drying of moisture therein, thereby impeding moisture from reaching the architectural structure to which the architectural finish elements are attached. Thus, the tenons
5 **158** act as integral moisture path interference structures operably configured to interfere with seepage of moisture from between adjacent architectural finish elements toward the architectural structure.

Referring to Figures **9** and **10**, in the event of any movement of the architectural finish elements **140** and **170** relative to the surface of the architectural structure to
10 which they are attached, the force absorbing member **184** resiliently deforms in response to such movement between the mounting portion **164** and the surface of the architectural structure and more particularly, absorbs differences in forces between the margins **196** and **198** adjacent the opening **194** in the mounting portion
15 **164** of the dual architectural finish element support apparatus **160** and the surface of the architectural structure. This provides for a non-rigid connection between the architectural finish elements **140** and **170** and the architectural structure to which they are attached and such connection is operable to absorb at least some seismic forces and/or wind loading forces that can be experienced in some areas. Further,
20 the force absorbing member **184** may resiliently deform to accommodate for different thermal expansions or contractions of the architectural finish element **140** and the architectural structure.

A plurality of architectural finish elements as described in connection with Figures **6** to **8** and at least one dual architectural finish element support apparatus as described in connection with Figures **9** and **10** can be arranged according to an
25 architectural finishing method according to an embodiment of the invention to cooperate to create an architectural finishing system. Generally, the architectural finishing method comprises mounting the mounting portion **164** of the body **162** of at least one dual architectural finish element support **160** to a surface **111** of an

architectural structure **11**, causing the first holder **166** to hold a portion of the bottom edge **167** of the first architectural finish element **140** in the first holder **166**, causing the second holder **168** on the body **162** to hold a portion of the top edge **169** of the second architectural finish element **170** adjacent to the bottom edge **167** of the first architectural finish element **140** and in alignment with the bottom edge of the first architectural finish element such that finish surfaces **172** and **174** of the first and second architectural finish elements **140** and **170** are generally coplanar and the method further involves absorbing mechanical forces between the first and second architectural finish elements and the architectural structure.

- 10 The first and second holders **166** and **168** hold the bottom edge **167** of the first architectural finish element **140** and the top edge **169** of the second architectural finish element **170** within about $1/4$ inches of each other.

Mounting involves causing the flat surface **182** of the body **162** to rest against the surface **111** of the architectural structure **11** and absorbing mechanical forces comprises causing the force absorbing member **184** to be held by the force absorbing member holder **190**, in a position to absorb the mechanical loads between the body **162** and the surface **111** of the architectural structure **11**.

Causing the force absorbing member **184** to be held comprises causing a portion of the force absorbing member to be held in the opening **194** in the mounting portion **164** and between the guides **204** and **206** on opposite sides of the opening **194**.

Causing the force absorbing member **184** to be held also comprises aligning the force absorbing member **184** in the opening **194** and aligning the force absorbing member between the guides **204** and **206** as shown.

Aligning the force absorbing member **184** comprises causing the flat outer surface **218** of the first projection **216** on the force absorbing member **184** to project through the opening **194** and bear against the surface **111** of the architectural structure **11**

and causing the first and second end portions **222** and **224** of the holding portion **220** of the force absorbing member **184** to overlap with corresponding margins **196** and **198** on opposite sides of the opening **194** when the first projection **216** is received in the opening **194**.

- 5 Absorbing forces comprises causing the fastening bar **186** to receive the fastener **188** through the opening **232** therein and through the force absorbing member **184** such that the fastener bears **188** against the fastening bar **186** to cause the bearing surface **230** of the fastening bar **186** to bear against the holding portion **220** to press the opposite end portions **222** and **224** of the holding portion **220** against the
10 margins **196** and **198** of the mounting portion **164**, while holding the projection **216** in contact with the surface **111** of the architectural structure **11**, such that differences in forces between the margins **196** and **198** and the surface **111** of the architectural structure **11** are absorbed by the force absorbing member **184**.

- Absorbing forces also comprises causing the resilient body of the force absorbing
15 member **184** to resiliently deform in response to forces between the surface **111** of the architectural structure **11** and the mounting portion **164**.

- Causing the first holder **166** on the body **162** to hold a portion of a bottom edge **167** of the first architectural finish element **140** comprises causing the first projection **250** on the first holder **166** to be received in the groove **156** in the bottom edge **167** of
20 the first architectural finish element **140** and holding the bottom edge **167** of the first architectural finish element **140** in a position spaced apart from the surface **111** of the architectural structure **11**.

- The method further involves causing coplanar distal surfaces **260** and **262** of the guides **204** and **206** to touch the planar surface portion **274** on a back side of the
25 first architectural finish element **140** to position the first architectural finish element on the surface **111**.

The method further involves causing the second projection **290** on the body **162** to bear against a portion of the top edge **169** of the second architectural finish element **170**.

Although the method described above involves a dual architectural finish element support apparatus **160**, in alternative embodiments, architectural finish element such as those illustrated in Figures **6** to **11**, for example, may be secured to a surface of an architectural structure by placing wet mortar on the surface of the architectural structure and then setting the architectural finish element into the mortar. In such embodiments, the mortar is admitted into dovetailed recesses (such as the air passageways **300** shown in Figure **11**). Such admitted mortar hardens and contacts inward-facing surfaces of the dovetailed recesses, and may thus transmit a securing force to the inward-facing surfaces of the dovetailed recesses to secure the architectural finish element mechanically to the architectural structure. Such mechanical securing (in addition to securing from bonding of the mortar against the rear surface) may advantageously strengthen the securing of the architectural finish element to the architectural structure.

Glued Veneer elements

Referring to Figure **12** an architectural finish element in accordance with another embodiment of the invention, is shown generally at **400**. In this embodiment individual unitary real stone elements **402** are lightweight stone elements that are pre-cut and glued together to form a body **404** having the basic form described above such that the overall architectural finish element has a density of more than about **8** pounds per square foot and no more than about **11** pounds per square foot. The unitary real stone veneer elements are glued, such as by epoxy for example, in courses **406** extending in a first direction **408** in a random non-repetitive pattern. The plurality of unitary real stone elements **402** are glued together such that a spacing between adjacent courses is generally between **0** inches to about **1/4** inches and

such that respective face surfaces **410** of the unitary real stone veneer elements generally lie in a common plane to form an overall face surface **411** of the architectural finish element having a dry-stacked appearance.

Thus, in this embodiment, like the earlier embodiment, the body **404** has main
5 portion **412** and top, bottom and left and right edges **414**, **416**, **418** and **420**. The left
and right edges **418** and **420** have complementary shapes for engaging with
corresponding right and left edges of left and right adjacent similar architectural
finish elements respectively as described above. In the embodiment shown, the left
and right edges **418** and **420** of the body **404** have a complementary stepped-shape,
10 wherein the left edge has an upper projection **422** and the right edge has a lower
projection **424**, both projecting from the main portion **412** by the same distance, to
as to form a lower receptacle **426** on the left side of the main portion **412** and an
upper receptacle **428** on the right side of the main portion **412**. As above, this
permits a lower projection of an adjacent left element (not shown) to be received in
15 the lower receptacle **426**, while the upper projection **422** of the left edge is received
in an upper receptacle (not shown) of the adjacent left element. Similarly an upper
projection (not shown) of the adjacent right element (not shown) is received in the
upper receptacle **428**, while the lower projection **424** of the right edge **420** is
received in the lower receptacle (not shown) of the adjacent right element.

20 Referring to Figure 3, the top and bottom edges **414** and **416** have top and bottom
profiles respectively. The top edge profile extends along the main portion **412** of the
body **404** and along a top portion of the upper projection **422** on the left side of the
body and along a top portion of the lower projection **424** on the right side of the
body. In the embodiment shown, the top and bottom edge profiles are flat planar
25 surfaces such as shown in Figure 3 that permit the top and bottom edges of adjacent
architectural finish elements to be butted up against each with no readily visible joint
line.

The courses of the unitary real stone elements **402** are glued together such that upper and lower edges of left side stone elements **402** adjacent the left edge **418** of the body **404** are generally the same distance from the bottom edge **416** of the body as corresponding upper and lower edges of right side veneer elements adjacent the right edge **420** of the body such that when a left edge (not shown) of a first similarly configured adjacent architectural finish element (not shown) is engaged with the right edge **420** of the architectural finish element **400**, corresponding courses **406** of real stone veneer elements are aligned to create the appearance of continuous courses of the real stone veneer elements across the architectural finish element **400** and the similarly configured adjacent architectural finish element and such that when a right edge (not shown) of a second similarly configured adjacent architectural finish element (not shown) is engaged with the left edge **418** of the architectural finish element **400**, corresponding courses of real stone veneer elements are aligned to create the appearance of continuous courses of the real stone veneer elements across the architectural finish element and the second architectural finish element. In addition, due to the engagement of the stepped left and right edges **418** and **420** and the engagement of the top and bottom edges **414** and **416** with adjacent architectural finish elements, and due to the consistent placement of the real stone elements **402** in courses aligned at each edge, as described above, when a plurality of such architectural finish elements are engaged as described to form an overall surface on the architectural structure, the resulting overall surface has a consistent, uniform dry-stacked appearance with the randomness of stones in respective courses, but with the regularity of courses along the entire finished surface, in a manner similar to that described and shown in connection with Figure 4.

Referring to Figures 13, the body **404** has a rear portion **420** disposed opposite the face surface **411**. The rear portion **430** faces the architectural structure on which the architectural finish element is to be mounted. In the embodiment shown in Figure 13, the rear portion **430** has a rear surface **432** opposite the face surface **411** of the

body **404** and the rear surface **432** has no dovetailed tenons, but rather has only a generally flat planar portion operable to be directly glued or secured with mortar to the architectural structure.

Alternatively, referring to Figure **14** a mesh material **434** such as wire or plastic mesh, for example, may be glued to the planar rear surface **432**.

As a further alternative, referring to Figure **15**, a plurality of dovetail-shaped recesses **436** may be cut into the rear surface **432** from the top edge **414** to the bottom edge **416** to admit mortar therein. Once hardened, the mortar admitted into the dovetailed recesses **436** of the architectural finish element shown in Figure **15** contacts inward-facing surfaces of the dovetailed recesses **436**, and such admitted mortar may transmit a securing force to the inward-facing surfaces of the dovetailed recesses **436** to secure the architectural finish element mechanically to the architectural structure. Such mechanical securing (in addition to securing from bonding of the mortar against the rear surface **432**) may advantageously strengthen the securing of the architectural finish element **400** to the architectural structure.

In any of the embodiments shown in Figures **13**, **14**, and **15**, top and bottom edge profiles having single flat surfaces as shown, facilitating abutting adjacent similar surfaces such as described above, may be cut into the body or the body may be formed in a jig to automatically form these flat top surfaces when gluing the individual stone veneer elements together. An architectural finish element so formed would be used like the architectural finish element described in connection with Figures **1** to **4**, i.e. directly secured to the architectural structure using mortar, without the use of the dual architectural finish support apparatuses of the type described herein. In the embodiment shown in Figure **13**, mortar or glue alone would secure the architectural finish element to the architectural structure. In the embodiment shown in Figure **14**, the mesh material helps secure the architectural finish element to the mortar and in the embodiment shown in Figure **15**, the

dovetailed recesses **436** in the rear surface **432** of the architectural finish element admit mortar initially applied to the architectural structure when the architectural finish component is pressed into the mortar.

5 In alternative embodiments, the top and bottom edges **414** and **416** may have cut therein top and bottom edge profiles as shown in Figures **6** and **7**, whereupon the architectural finish element so formed can be used with dual architectural finish support apparatuses of the type described herein in connection with Figures **9** and **10**.

10 Like the architectural finish elements described in connection with Figures **1** to **8** and **11**, the architectural finish element formed by gluing individual stone veneer elements together, shown in Figures **12** to **15** provides a body **404** with a face surface **411** provided by a collection of real stone elements **402** arranged to have a dry-stacked appearance. An architectural finish element of this type can be made at least large enough, such as in the dimensions described above, to provide about
15 **1.33** square feet of coverage to the architectural structure and can be applied as a unit, avoiding individual placement of real stone veneer element directly on the architectural structure. Again, this enables rapid application of a finishing surface or outer cladding to an architectural structure **1.33** square feet at a time, rather than direct application of real stone veneer elements that cover only a few square inches
20 at a time, while still achieving a dry-stacked appearance.

While specific embodiments of the invention have been described and illustrated, such embodiments should be considered illustrative of the invention only and not as limiting the invention as construed in accordance with the accompanying claims.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. An architectural finish element operable to be placed adjacent similar architectural finish elements to form a finished surface on an architectural structure, the architectural finish element comprising:

a body formed of a rock-based composite material comprising a low density solid particle additive; and

a plurality of unitary real stone veneer elements bonded to said body in courses extending in a first direction and in a random non-repetitive pattern, said real stone veneer elements having respective face surfaces generally lying in a plane to form an overall face surface of said architectural finish element;

whereby said low density solid particle additive is provided in an amount suitable to cause said architectural finish element to have a density of between about **10** pounds per square foot to about **15** pounds per square foot.

2. The apparatus of claim 1 wherein said real stone veneer elements have a density of between about **8** pounds per square foot to about **11** pounds per square foot.

3. The apparatus of claim 1 wherein said solid particle additive comprises at least one of recycled waste, non-toxic waste, post manufacturing waste, and post consumer waste.

4. The apparatus of claim 3 wherein said solid particle additive comprises lightweight synthetic particles.

5. The apparatus of claim 1 wherein said lightweight synthetic particles comprise polymer particles.
6. The apparatus of claim 3 wherein said body comprises about **25%** to about **50%** of said low density solid particle additive by volume.
- 5 7. The apparatus of claim 6 wherein said rock-based composite material comprises pumice and cement.
8. The apparatus of claim 7 wherein said rock-based composite material has a density of no more than about **4** pounds per square foot.
9. The apparatus of claim 1 wherein said body has top, bottom and left and right
10 edges and wherein said left and right edges have complementary shapes for engaging with corresponding right and left edges of left and right adjacent similar architectural finish elements respectively.
10. The apparatus of claim 6 wherein said left and right edges of said body have a complementary stepped-shape.
- 15 11. The apparatus of claim 1 wherein said plurality of unitary real stone veneer elements are bonded to said body such that a spacing between adjacent courses is generally between **0** inches to about **1/4** inches to cause said real stone veneer elements forming said overall face surface to have a dry-stacked appearance.
- 20 12. The apparatus of claim 10 wherein said body has a bottom edge and wherein said courses of said unitary real stone veneer elements are bonded to said body such that upper and lower edges of left side veneer elements adjacent said left edge of said body are generally the same distance from said bottom edge of said body as corresponding upper and lower edges of right side
25 veneer elements adjacent said right edge of said body such that when a left

edge of a first similarly configured adjacent architectural finish element is engaged with said right edge of said architectural finish element, corresponding courses of real stone veneer elements are aligned to create the appearance of continuous courses of said real stone veneer elements across said architectural finish element and said similarly configured adjacent architectural finish element and such that when a right edge of a second similarly configured adjacent architectural finish element is engaged with said left edge of said architectural finish element corresponding courses of real stone veneer elements are aligned to create the appearance of continuous courses of said real stone veneer elements across said architectural finish element and said second architectural finish element.

13. The apparatus of claim **12** wherein said top and bottom edges have top and bottom profiles respectively for cooperating with support apparatus to secure said architectural finish element to said architectural structure.

14. The apparatus of claim **13** wherein said body has a rear portion disposed opposite said face surface and wherein said rear portion includes an integral moisture path interference structure operably configured to interfere with seepage of moisture from between adjacent said architectural finish elements toward said architectural structure.

15. The apparatus of claim **6** wherein said moisture path interference structure includes a rear surface opposite said face surface, on said body, said rear surface comprising generally planar portions and a plurality of parallel spaced apart spacers extending between said top and bottom edges of said body.

16. The apparatus of claim **15** wherein said spacers comprise dovetailed tenons.

17. The apparatus of claim **16** wherein at least some of said dovetailed tenons have a recess to receive a portion of a mounting element.

18. The apparatus of claim **17** wherein at least some of said dovetailed tenons are spaced apart between said top and bottom edges to form air passageways that permit air to move in a direction generally parallel to the direction of said courses of said real stone veneer.

5 **19.** An architectural finishing method comprising:

mounting a mounting portion of a body of at least one dual architectural finish element support to a surface of an architectural structure;

10 causing a first holder on said body to hold a portion of a bottom edge of a first architectural finish element in a first holder;

causing a second holder on said body to hold a portion of a top edge of a second architectural finish element adjacent to said bottom edge of said first architectural finish element and in alignment with said bottom edge of said first architectural finish element such that finish surfaces of said first and second architectural finish elements are generally coplanar; and

15

causing the body to absorb mechanical forces between said first and second architectural finish elements and said architectural structure.

20 **20.** The method of claim **19** wherein said first and second holders hold said bottom edge of said first architectural finish element and said top edge of said second architectural finish element within about **1/4** inches of each other.

21. The method of claim **20** wherein mounting comprises causing a flat surface of a sheet portion of said body to rest against said surface of said architectural structure.

- 22.** The method of claim **21** wherein absorbing mechanical forces comprises causing a force absorbing member to be held by a holder on said body, in a position to absorb said mechanical loads between said body and said surface of said architectural structure.
- 5 **23.** The method of claim **22** wherein causing a force absorbing member to be held comprises causing a portion of said force absorbing member to be held in an opening in said sheet portion and between said guides on opposite sides of said opening.
- 10 **24.** The method of claim **23** wherein causing said force absorbing member to be held comprises aligning said force absorbing member in said opening and aligning said force absorbing member between said guides.
- 15 **25.** The method of claim **24** wherein aligning said force absorbing member comprises causing a flat outer surface of a projection on said force absorbing member, having a shape complementary to a shape of said opening to bear against said surface of said architectural structure and a holding portion of said force absorbing member, adjacent said projection and having first and second opposite end portions extending outwardly on opposite sides of said projection to overlap with corresponding margins of said sheet portion on opposite sides of said opening when said projection is received in said opening.
- 20 **26.** The method of claim **25** wherein absorbing said forces comprises causing a fastening bar having a bearing surface having a shape corresponding to a shape of said holding portion of said force absorbing portion and an opening for receiving a fastener to receive a fastener through said opening and through said force absorbing member such that said fastener bears against said fastening bar to cause said bearing surface of said fastening bar to bear against said holding portion to press said opposite ends of said holding
- 25

portion against said margins of said sheet portion, while holding said projection in contact with said surface of said architectural structure, such that differences in forces between said sheet portions and said surface of said architectural structure are absorbed by said force absorbing member.

- 5 **27.** The method of claim **26** wherein absorbing said force comprises causing a resilient body acting as said force absorbing member to resiliently deform in response to forces between said surface of said architectural structure and said mounting portion.
- 10 **28.** The method of claim **27** wherein said resilient body is comprised of Neoprene[®].
- 15 **29.** The method of claim **28** wherein causing said first holder on said body to hold a portion of a bottom edge of said first architectural finish element comprises causing a first projection on said first holder to be received in a groove in a bottom edge of said first architectural finish element.
- 20 **30.** The method of claim **29** further comprising causing said first holder to hold said edge of said first architectural finish element in a position spaced apart from said surface of said architectural structure.
- 25 **31.** The method of claim **30** further comprising receiving said edge of said first architectural finish element in a first receptacle defined by a first set of bent portions in a unitary piece of sheet metal acting as said body.
- 30 **32.** The method of claim **30** further comprising causing coplanar distal edges of said guides to touch a cooperating surface on a back side of said architectural finish element to position said first architectural finish element.

33. The method of claim **32** further comprising causing a second projection on said body to bear against a portion of said top edge of said second architectural finish element.

34. A dual architectural finish element support apparatus comprising:

5 a body including:

a mounting portion facilitating mounting the second body to a surface of an architectural structure;

a first holder operably configured to hold a portion of a bottom edge of a first architectural finish element;

10 a second holder operably configured to hold a portion of a top edge of a second architectural finish element adjacent to said bottom edge of the first architectural finish element and in alignment with said bottom edge of the first architectural finish element such that finish surfaces of the first and second architectural finish elements are generally
15 coplanar; and

a load absorber operably configured to absorb mechanical forces between the mounting portion and the architectural structure.

35. The apparatus of claim **34** wherein said first and second holders hold said bottom edge of the first architectural finish element and said top edge of the
20 second architectural finish element within about $1/4$ inches of each other.

36. The apparatus of claim **35** wherein said mounting portion comprises a sheet portion having a flat surface for resting against said surface of the architectural structure.

- 5 **37.** The apparatus of claim **36** wherein said load absorber comprises a force absorbing member and wherein said sheet portion has a force absorbing member holder for holding said force absorbing member in a position to absorb said mechanical loads between said body and said surface of the architectural structure.
- 10 **38.** The apparatus of claim **37** wherein said force absorbing member holder comprises a wall defining an opening in said sheet portion and guides extending from said wall and disposed adjacent said opening for holding a portion of said force absorbing member in said opening and between said guides.
- 15 **39.** The apparatus of claim **38** wherein said force absorbing member comprises a first aligner operably configured to align said force absorbing member in said opening and a second aligner operably configured to align said force absorbing member against said guides.
- 20 **40.** The apparatus of claim **39** wherein said first aligner comprises a projection on said force absorbing member, said projection having a flat outer surface for bearing against said surface of the architectural structure and having a shape complementary to a shape of said opening and wherein said second aligner comprises a holding portion on said force absorbing member adjacent said projection and having first and second opposite end portions extending outwardly on opposite sides of said projection such that said first and second opposite ends overlap with corresponding margins of said sheet portion on opposite sides of said opening when said projection is received in said opening.
- 25 **41.** The apparatus of claim **40** wherein said load absorber further comprises a fastening bar having a bearing surface having a shape corresponding to a shape of said holding portion of said force absorbing portion, and said

fastening bar having an opening for receiving a fastener operable to extend through said fastening bar and through said force absorbing member such that said fastener bears against said fastening bar to cause said bearing surface of said fastening bar to bear against said holding portion to press said opposite ends of said holding portion against said margins of said sheet portion, while holding said projection in contact with said surface of the architectural structure, such that differences in forces between said sheet portions and said surface of the architectural structure are absorbed by said force absorbing member.

- 10 **42.** The apparatus of claim **41** wherein said force absorbing member comprises a resilient body resiliently deformable in response to forces between said surface of the architectural structure and said mounting portion.
- 43.** The apparatus of claim **42** wherein said resilient body is comprised of Neoprene[®].
- 15 **44.** The apparatus of any one of claims **34** to **43** wherein said body of the architectural finish element support apparatus is formed of a unitary piece of sheet metal bent into a form defining said mounting portion, the first holder and the second holder.
- 45.** The apparatus of claim **44** wherein said first holder includes a first projection operably configured to be received in a groove in a bottom edge of the first architectural finish element.
- 20 **46.** The apparatus of claim **45** wherein said first holder includes a first receptacle spaced apart from said mounting portion, for holding said edge of the first architectural finish element in a position spaced apart from said surface of the architectural structure.
- 25

47. The apparatus of claim **46** wherein said first receptacle is defined by a first set of bent portions of said unitary piece of sheet metal.

48. The apparatus of claim **47** wherein said guides have coplanar distal edges lying in a plane spaced apart from said first projection by a distance enabling said coplanar distal edges to touch a cooperating surface on a back side of the first architectural finish element.

49. The apparatus of claim **47** wherein said second holder includes a second projection operably configured to bear against a portion of a top edge of the second architectural finish element.

50. An architectural finishing system comprising:

first and second architectural finish elements of the type claimed in any one of claims **1** to **18**; and

at least one dual architectural finish element support system comprising:

a second body including:

a mounting portion facilitating mounting the second body to a surface of an architectural structure;

a first holder operably configured to hold a portion of a bottom edge of said first architectural finish element; and

a second holder operably configured to hold a portion of a top edge of said second architectural finish element adjacent to said bottom edge of said first architectural finish element and in alignment with said bottom edge of

said first architectural finish element such that finish surfaces of said first and second architectural finish elements are generally coplanar; and

5 a load absorber operably configured to absorb mechanical forces between said mounting portion and said architectural structure.

51. The system of claim **50** wherein said first and second holders hold said bottom edge of said first architectural finish element and said top edge of said second architectural finish element within about $1/4$ inches of each other.

10 **52.** The system of claim **51** wherein said mounting portion comprises a sheet portion having a flat surface for resting against said surface of said architectural structure.

15 **53.** The system of claim **52** wherein said load absorber comprises a force absorbing member and wherein said sheet portion has a force absorbing member holder for holding said force absorbing member in a position to absorb said mechanical loads between said mounting portion and said surface of said architectural structure.

20 **54.** The system of claim **53** wherein said force absorbing member holder comprises a wall defining an opening in said sheet portion and guides extending from said wall and disposed adjacent said opening for holding a portion of said force absorbing member in said opening and between said guides.

55. The system of claim **54** wherein said force absorbing member comprises a first aligner operably configured to align said force absorbing member in said

opening and a second aligner operably configured to align said force absorbing member against said guides.

5 **56.** The system of claim **55** wherein said first aligner comprises a projection on said force absorbing member, said projection having a flat outer surface for bearing against said surface of said architectural structure and having a shape complementary to a shape of said opening and wherein said second aligner comprises a holding portion on said force absorbing member adjacent said projection and having first and second opposite end portions extending outwardly on opposite sides of said projection such that said first and second
10 opposite ends overlap with corresponding margins of said sheet portion on opposite sides of said opening when said projection is received in said opening.

15 **57.** The system of claim **56** wherein said load absorber further comprises a fastening bar having a bearing surface having a shape corresponding to a shape of said holding portion of said force absorbing portion, and said fastening bar having an opening for receiving a fastener operable to extend through said fastening bar and through said force absorbing member such that said fastener bears against said fastening bar to cause said bearing surface of said fastening bar to bear against said holding portion to press said
20 opposite ends of said holding portion against said margins of said sheet portion, while holding said projection in contact with said surface of said architectural structure, such that differences in forces between said sheet portions and said surface of said architectural structure are absorbed by said force absorbing member.

25 **58.** The system of claim **57** wherein said force absorbing member comprises a resilient body resiliently deformable in response to forces between said surface of said architectural structure and said mounting portion.

59. The system of claim **58** wherein said resilient body is comprised of Neoprene[®].
- 5 60. The system of any one of claims **50** to **59** wherein said body of said architectural finish element support system is formed of a unitary piece of sheet metal bent into a form defining said mounting portion, said first holder and said second holder.
61. The system of claim **60** wherein said first holder includes a first projection operably configured to be received in a groove in a bottom edge of said first architectural finish element.
- 10 62. The system of claim **61** wherein said first holder includes a first receptacle spaced apart from said mounting portion, for holding said edge of said first architectural finish element in a position spaced apart from said surface of said architectural structure.
- 15 63. The system of claim **62** wherein said first receptacle is defined by a first set of bent portions of said unitary piece of sheet metal.
64. The system of claim **63** wherein said guides have generally coplanar distal edges lying in a plane spaced apart from said first projection by a distance enabling said coplanar distal edges to touch a cooperating surface on a back side of said architectural finish element.
- 20 65. The system of claim **63** wherein said second holder includes a second projection operably configured to bear against a portion of a top edge of said second architectural finish element.

66. An architectural finish element operable to be placed adjacent similar architectural finish elements to form a finished surface on an architectural structure, the architectural finish element comprising:

5 a body formed of a plurality of unitary real stone elements adhesively secured together in courses, said real stone elements having respective face surfaces generally lying in a front plane to form an overall face surface of said architectural finish element and having respective rear surfaces generally lying in a rear plane facing in a direction opposite said face surface;


10 said plurality of unitary real stone elements being arranged to form left and right edges each having complementary stepped-shapes and generally parallel top and bottom edges; and

15 wherein said courses are parallel with said top and bottom edges and said stone elements at said left edge are of similar thickness and are disposed at the same distance from the bottom edge as corresponding stone elements at said right edge so that courses on left and right adjacently placed similar architectural finish elements are aligned with said courses of said real stone elements of said body.

20 **67.** The apparatus of claim **66** wherein said body has a density of no more than about **15** pounds per square foot.

68. The apparatus of claim **66** or **67** wherein said rear surface is flat planar, supports a mesh backing or has grooves cut therein to cooperate with mortar to secure said architectural finish element to said architectural structure.

1/15

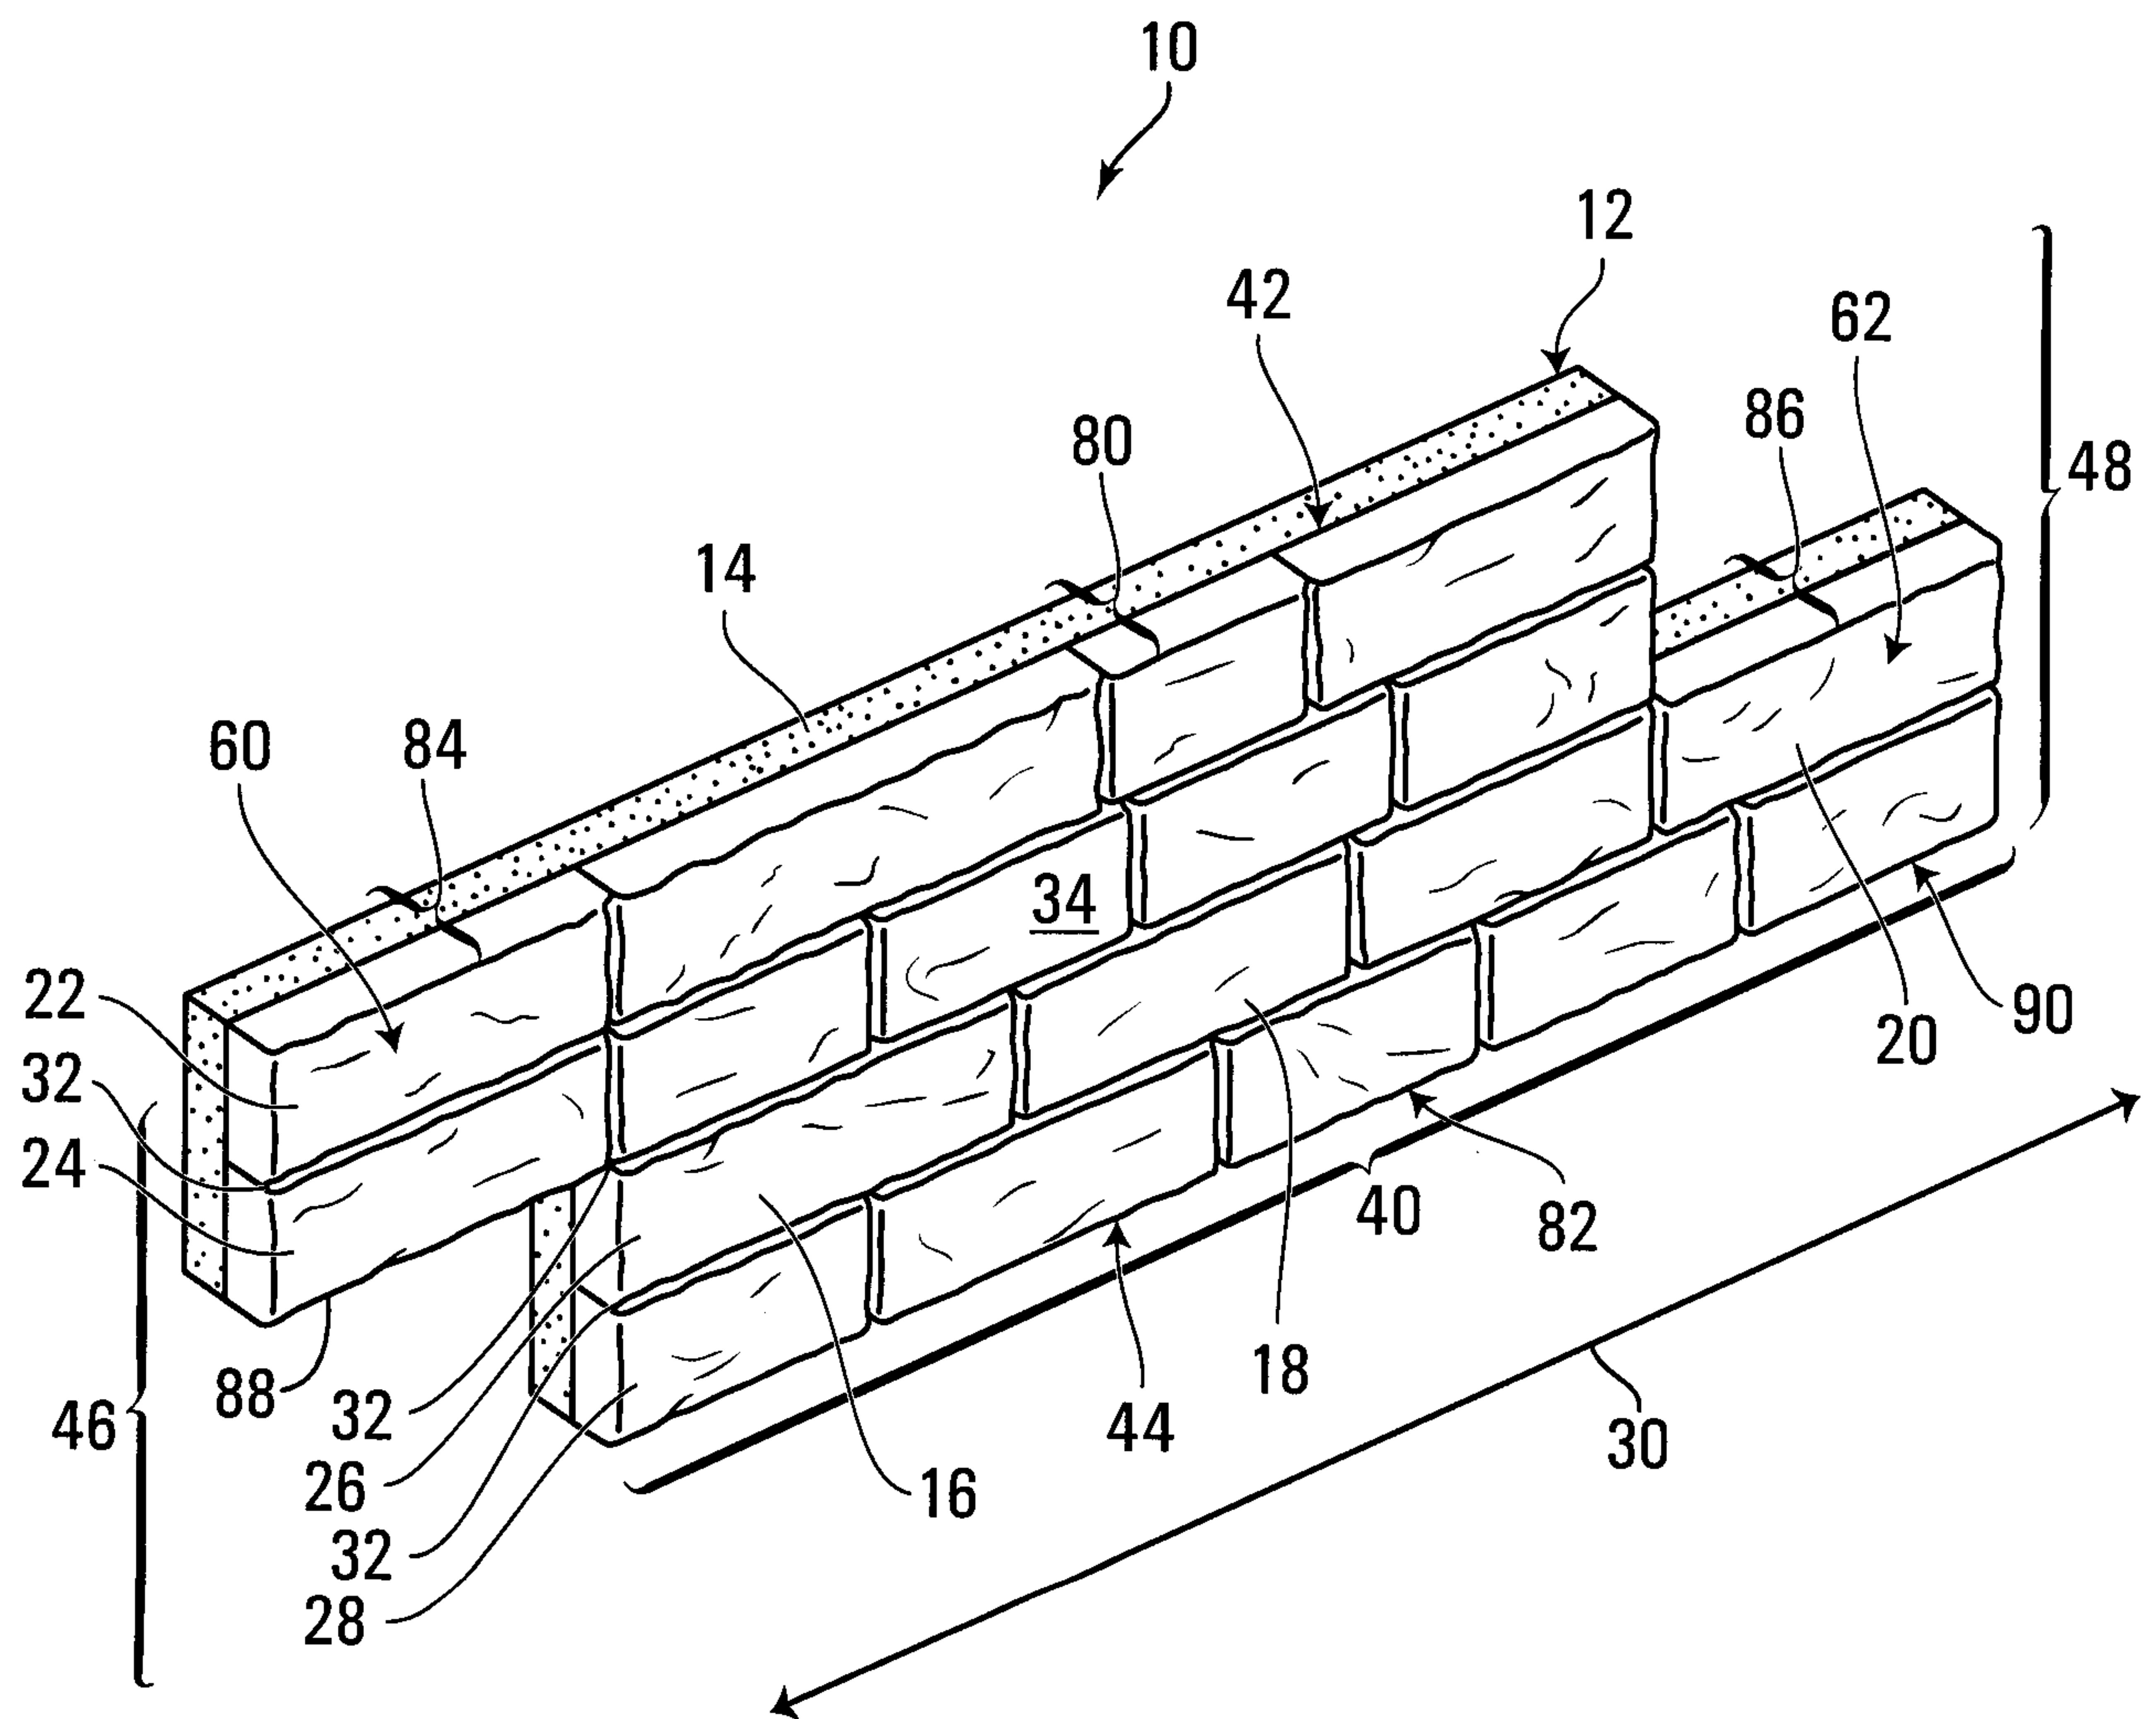**FIG. 1**

2/15



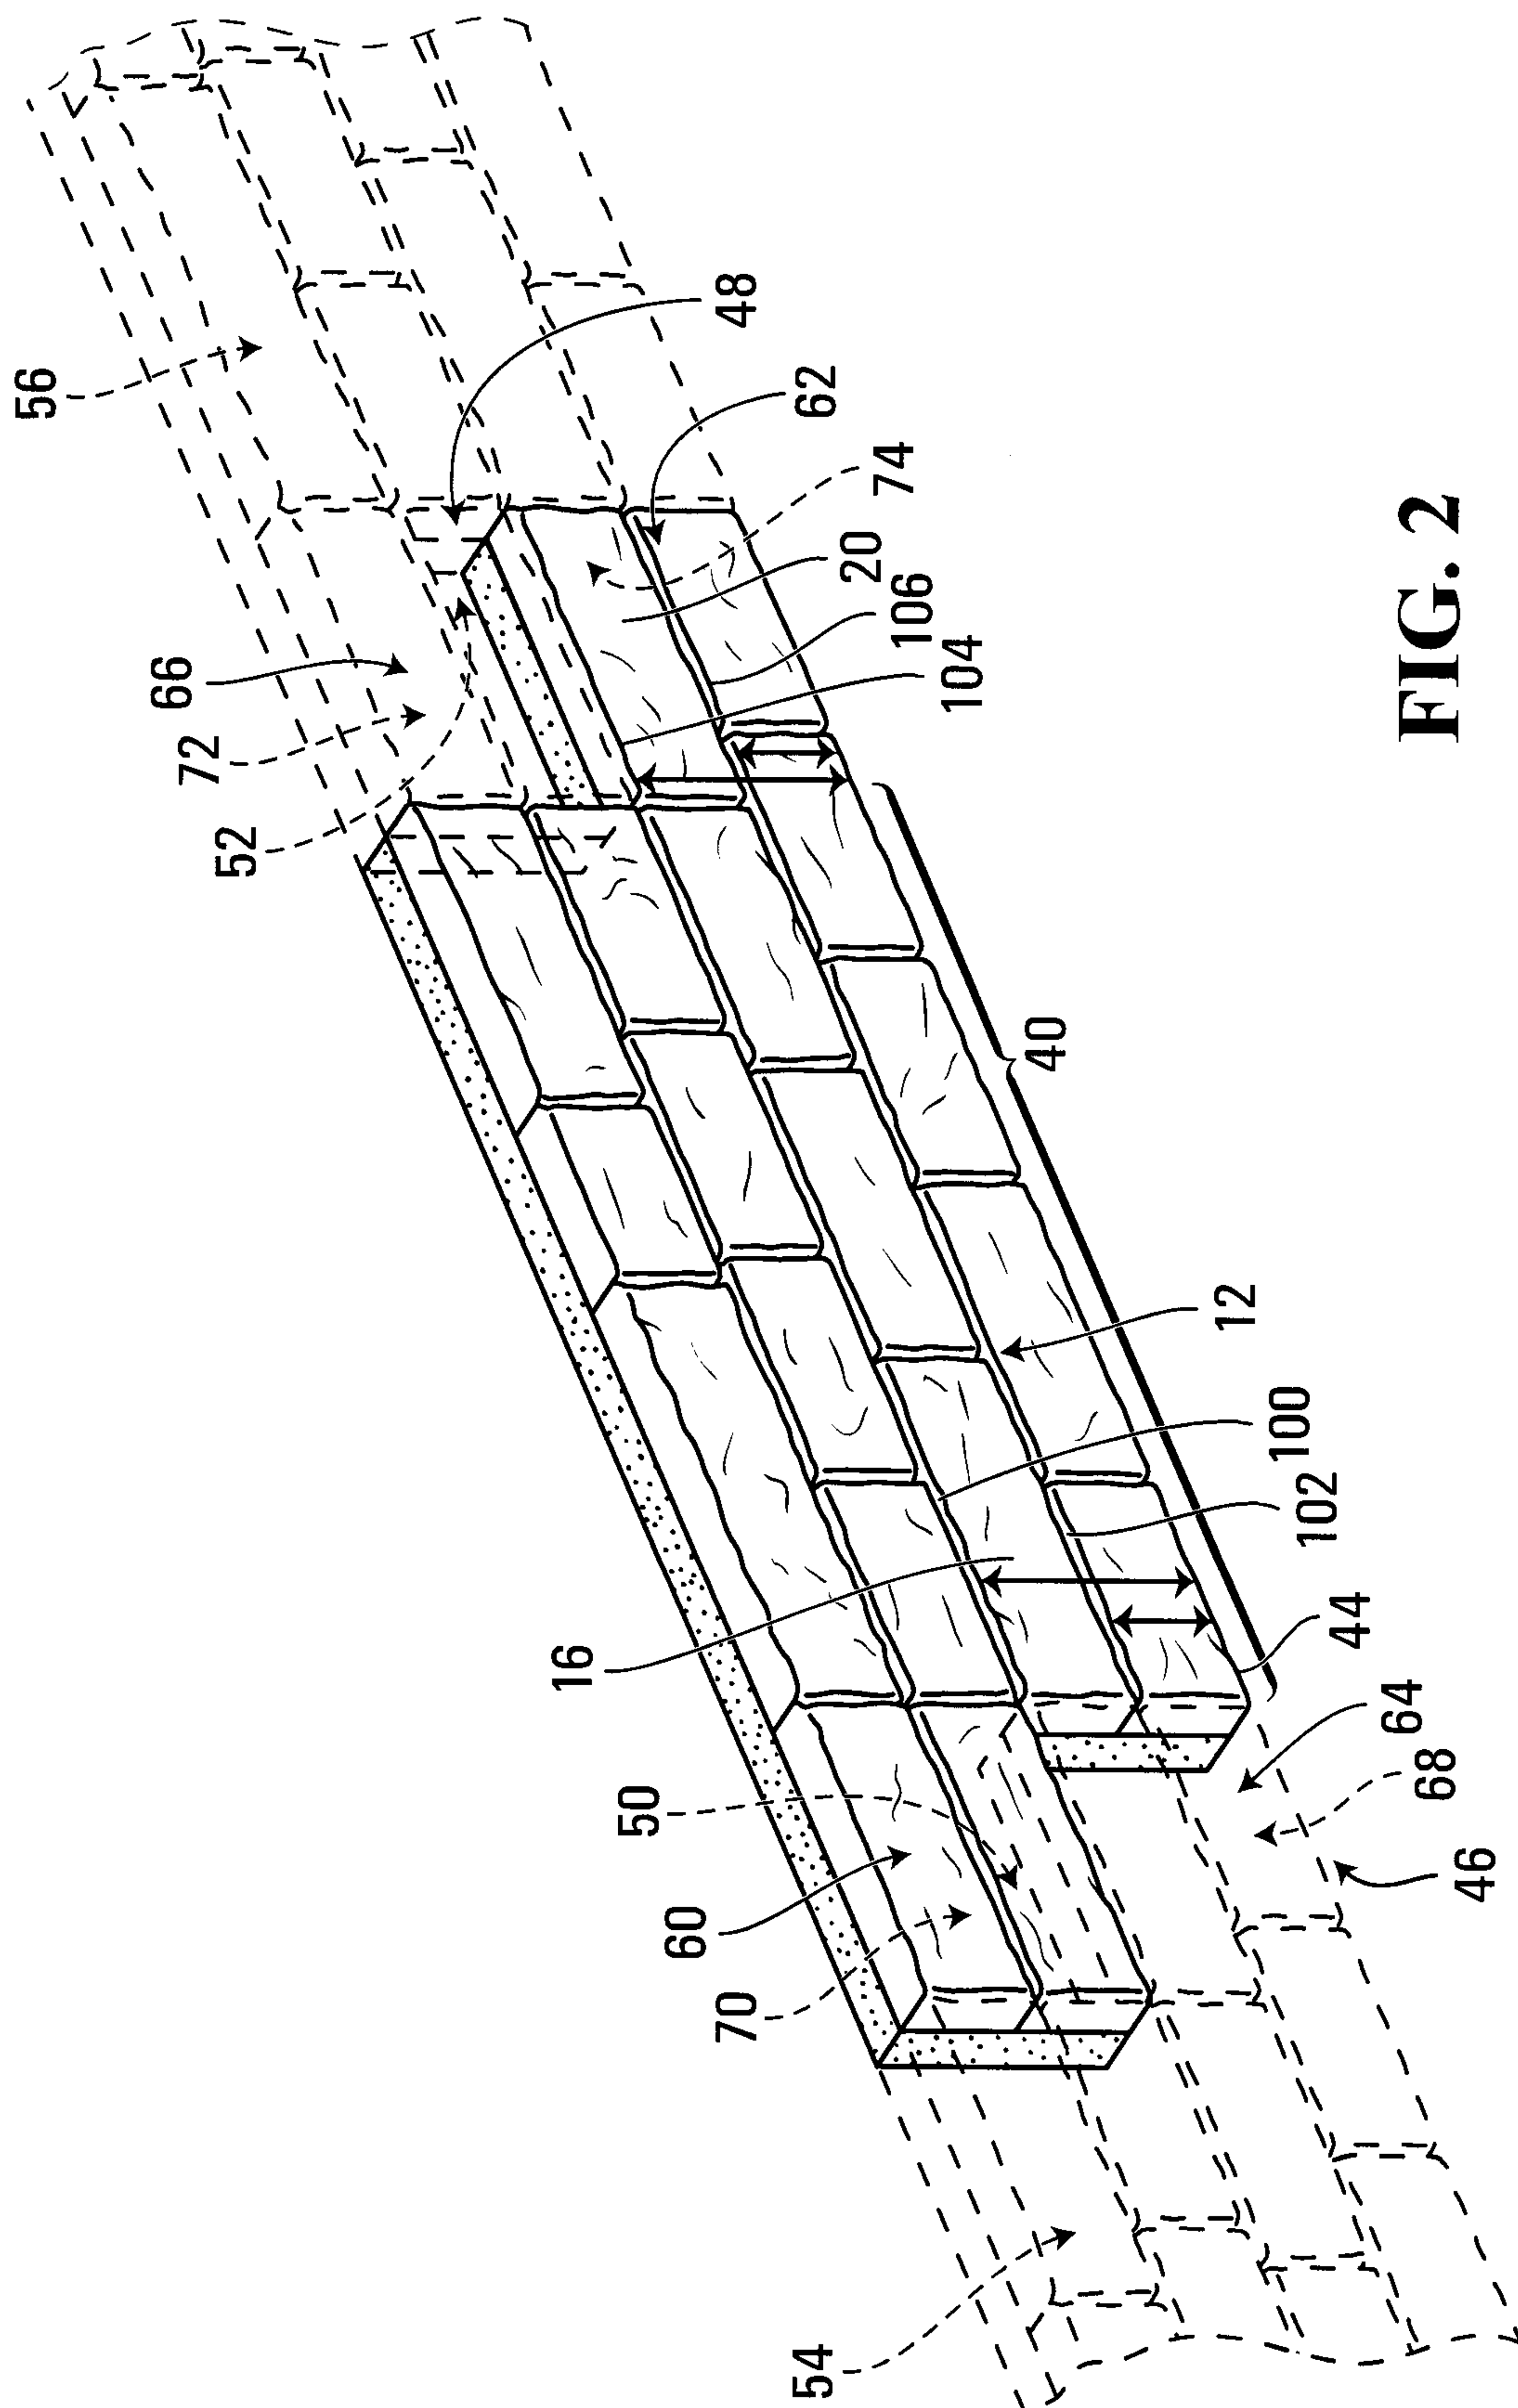


FIG. 2

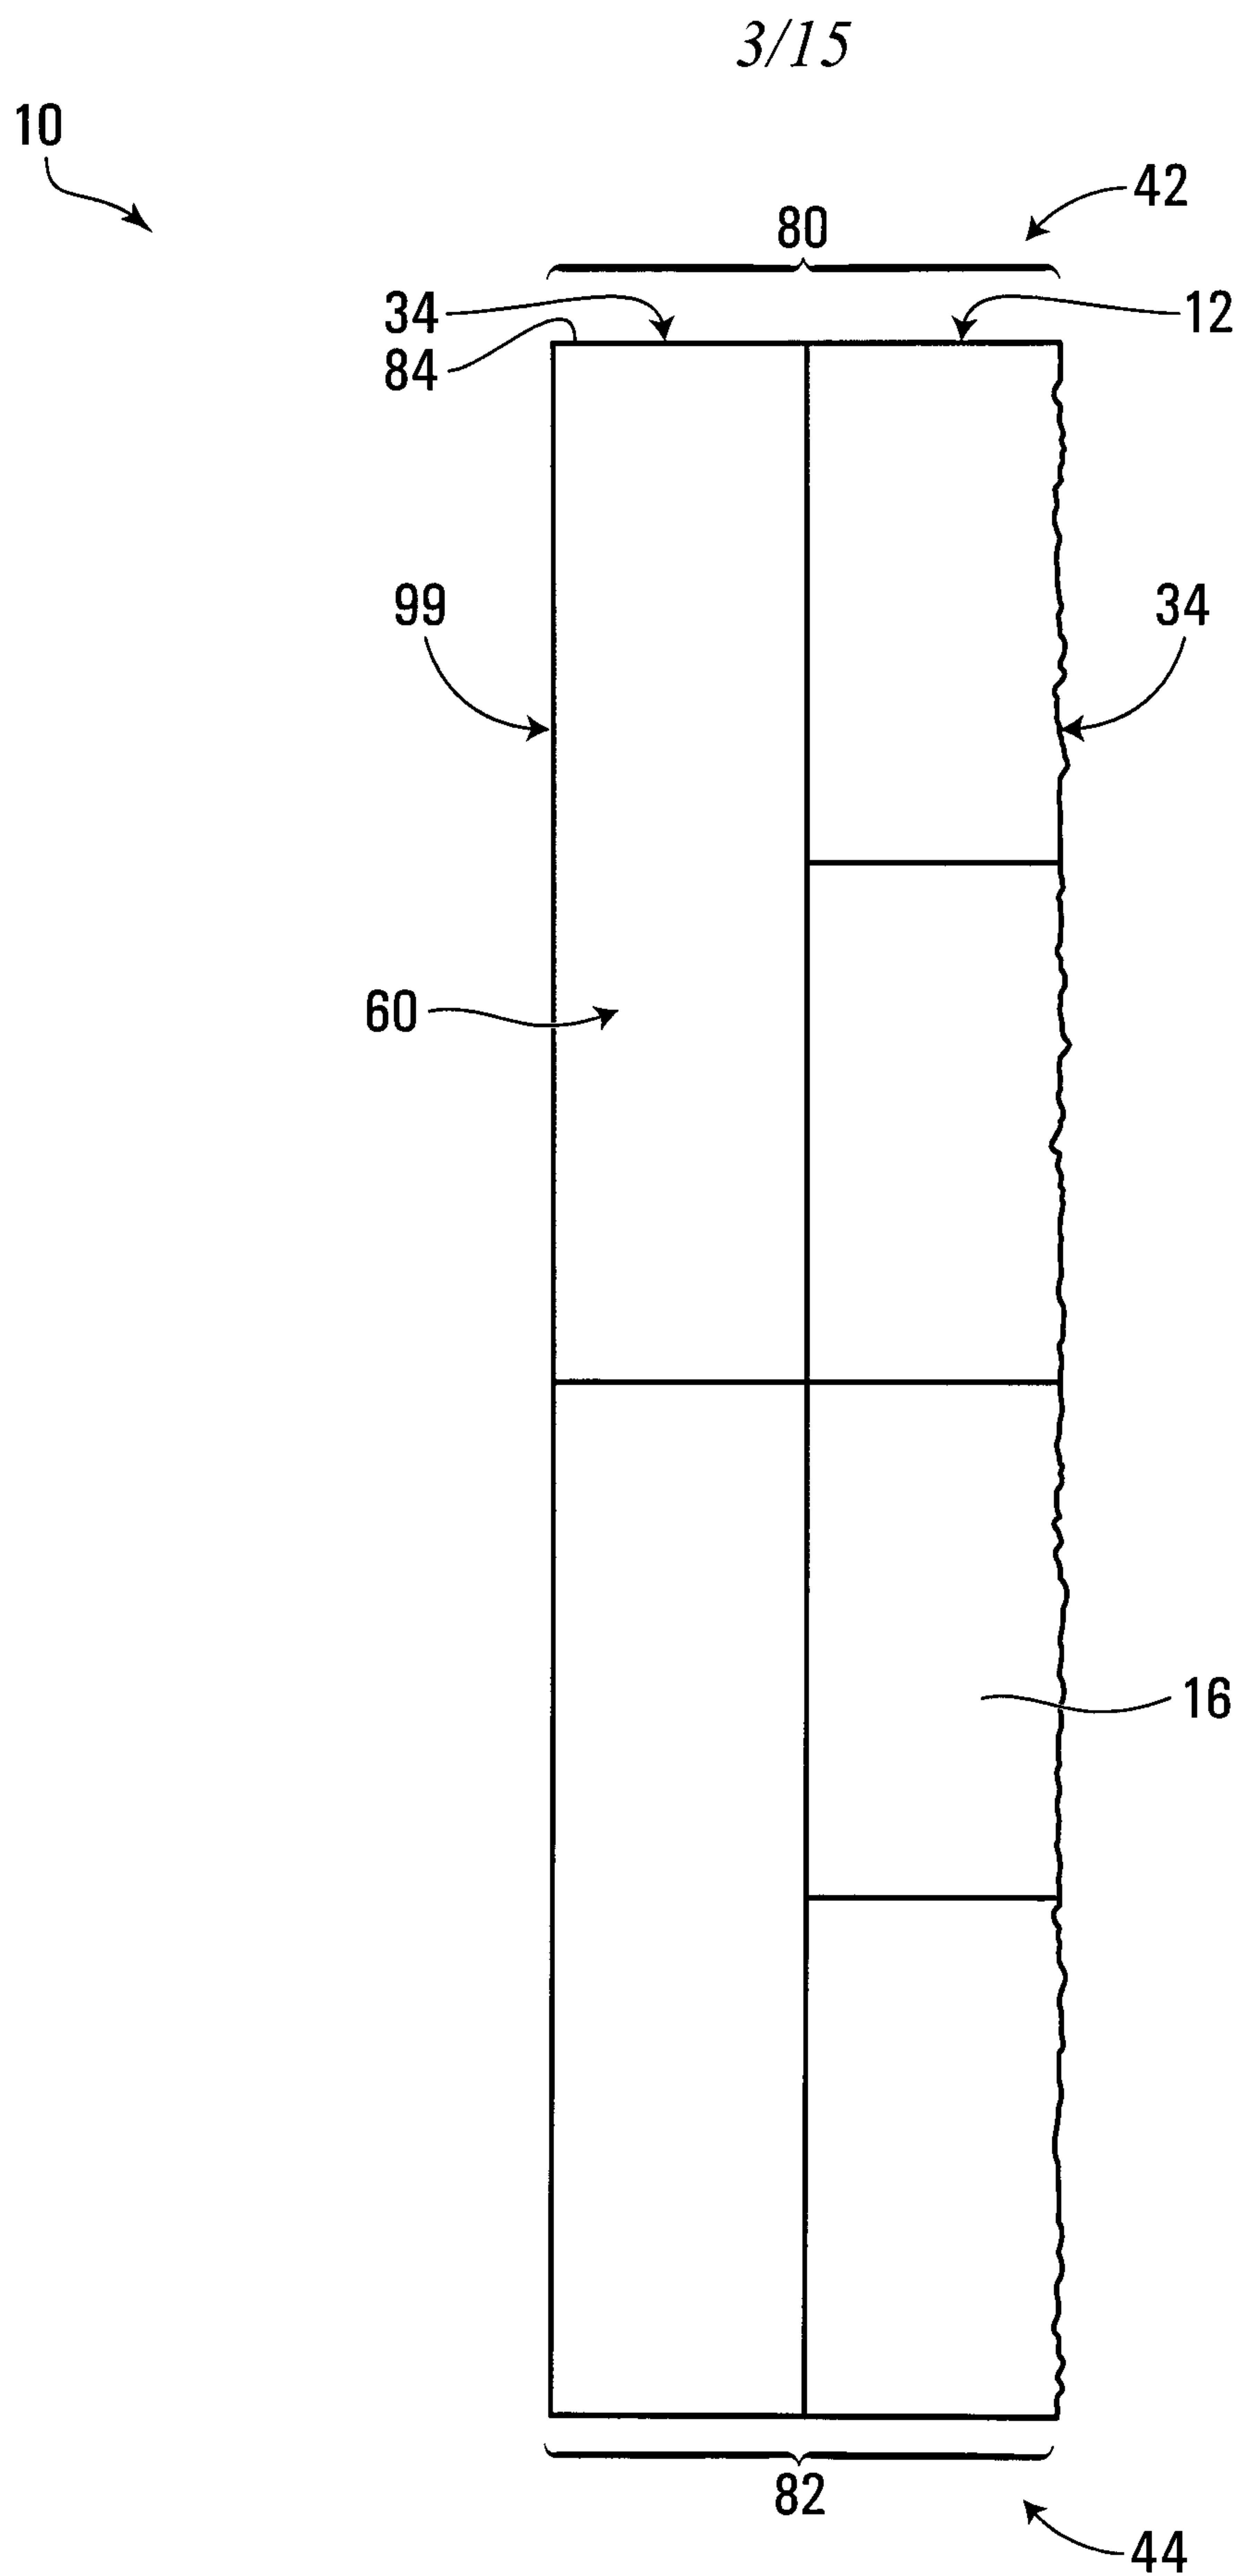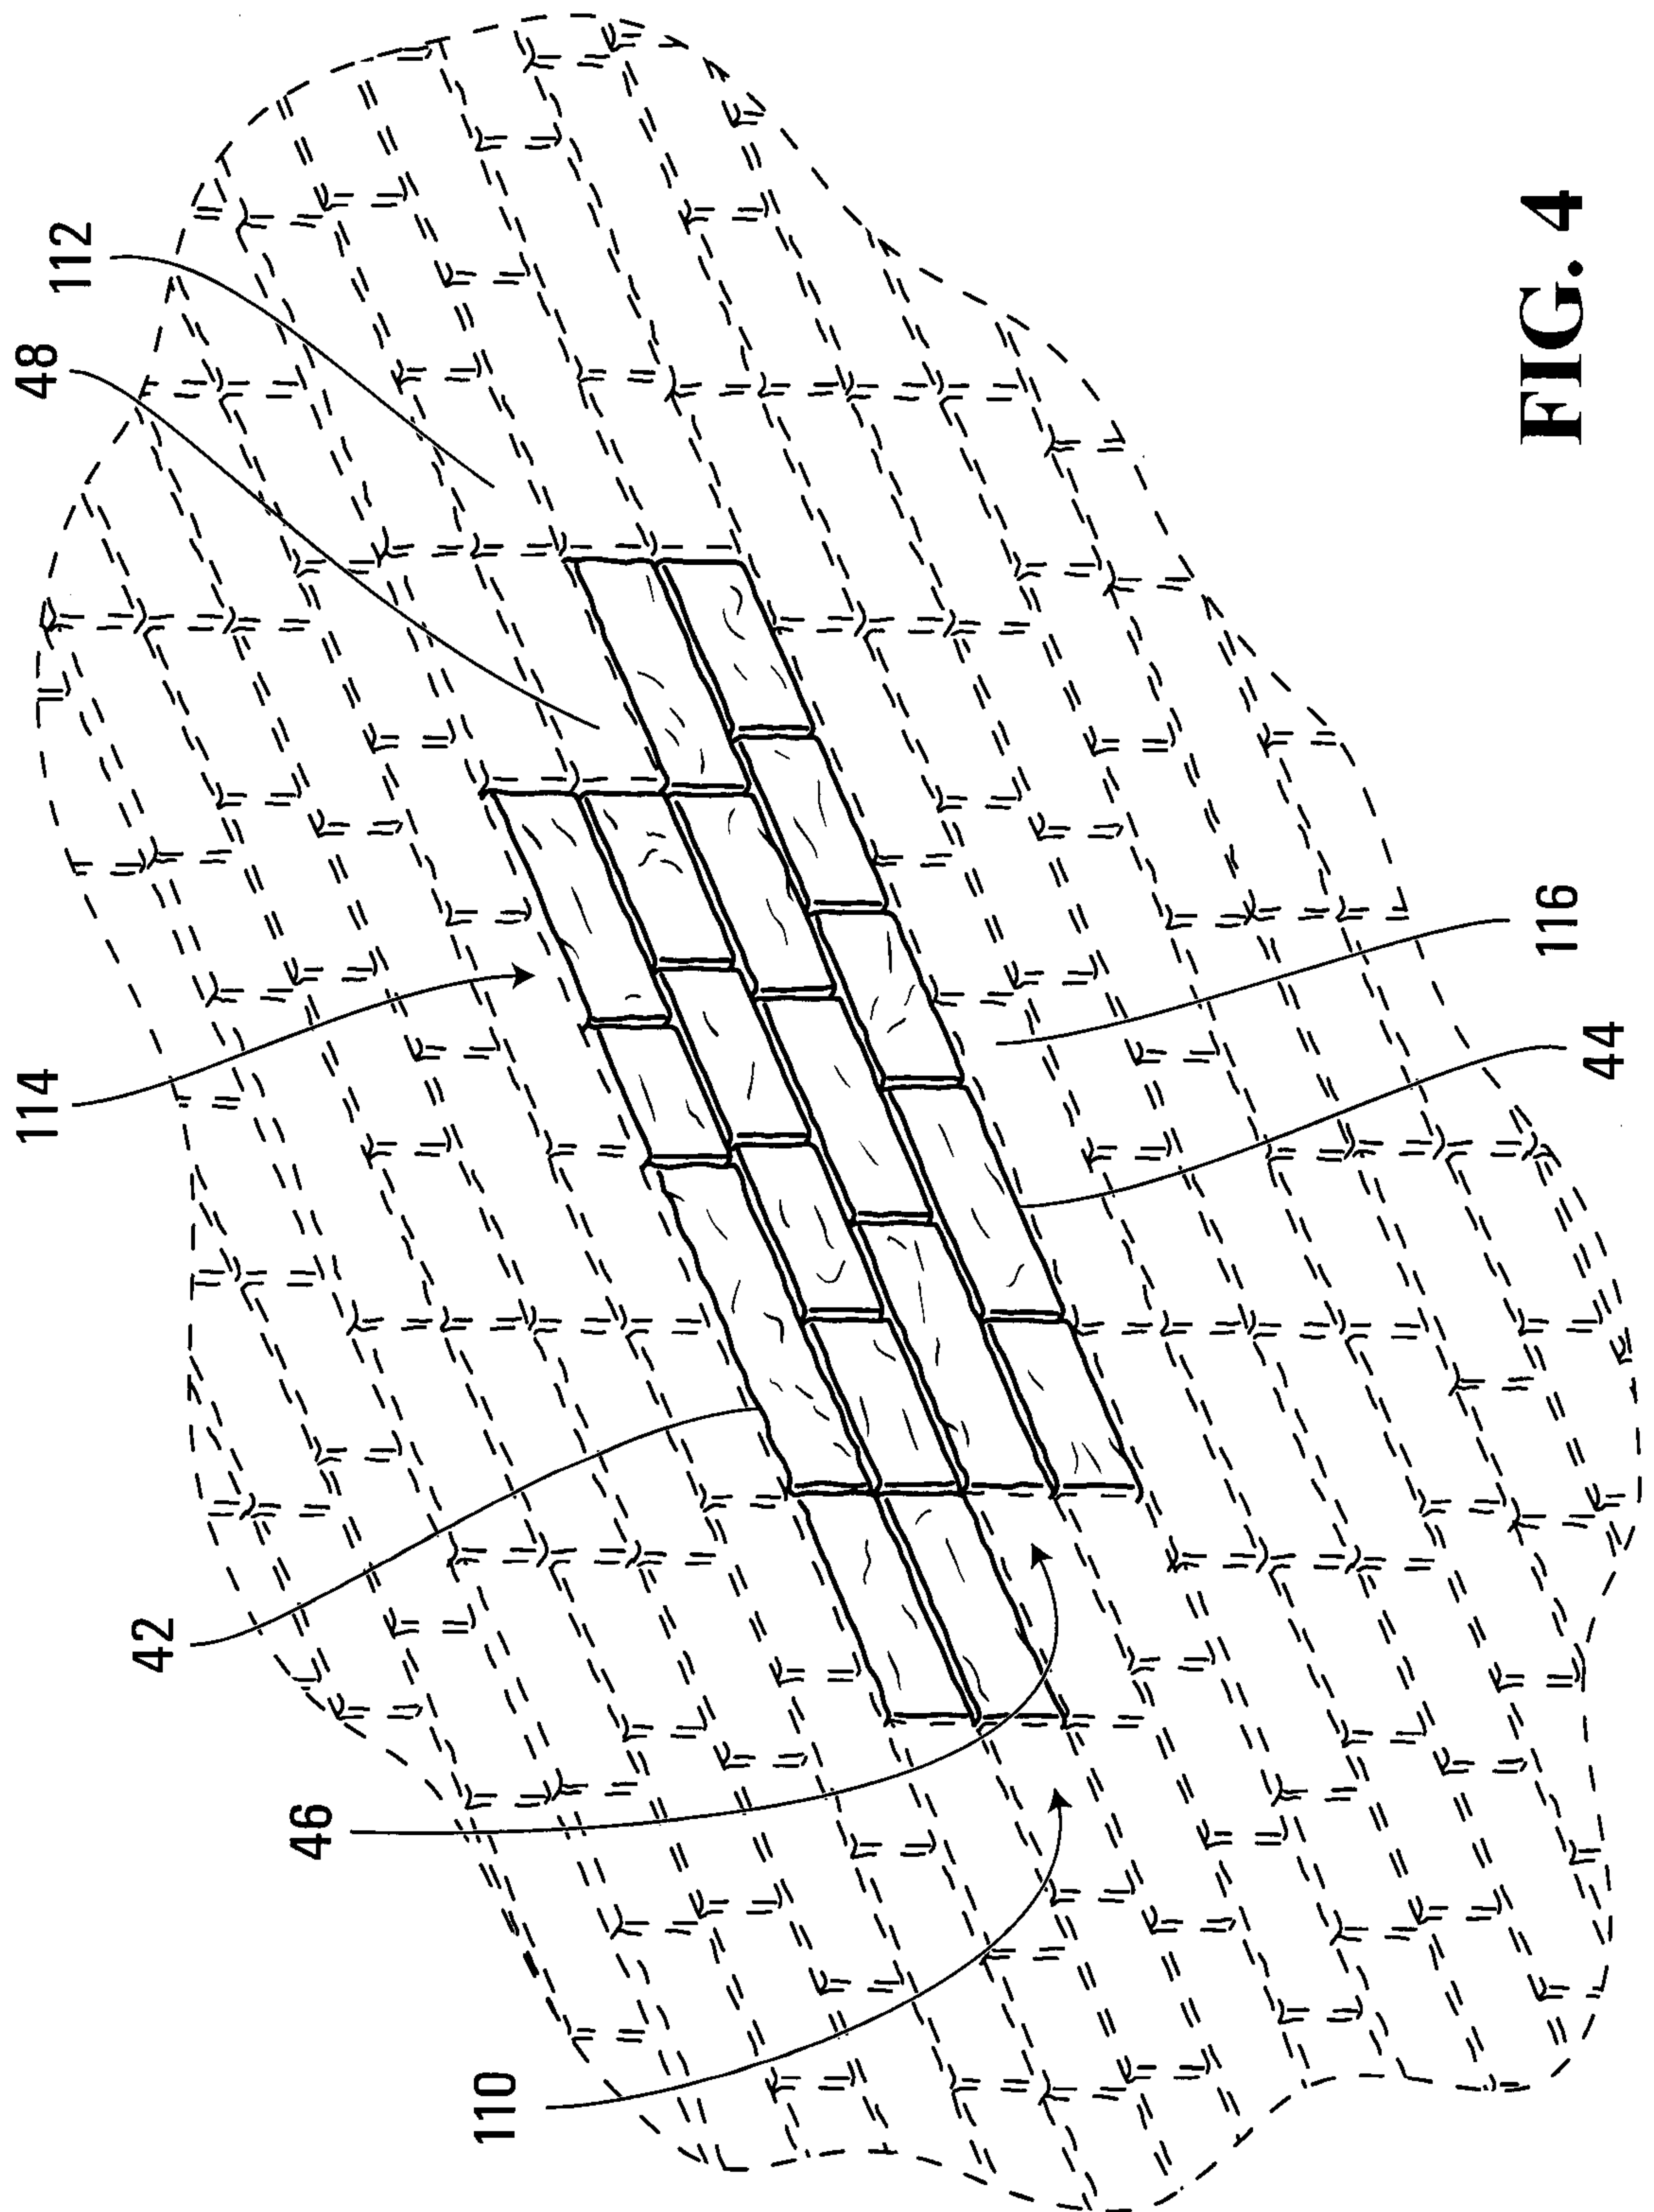

4/15

**FIG. 4**

5/15

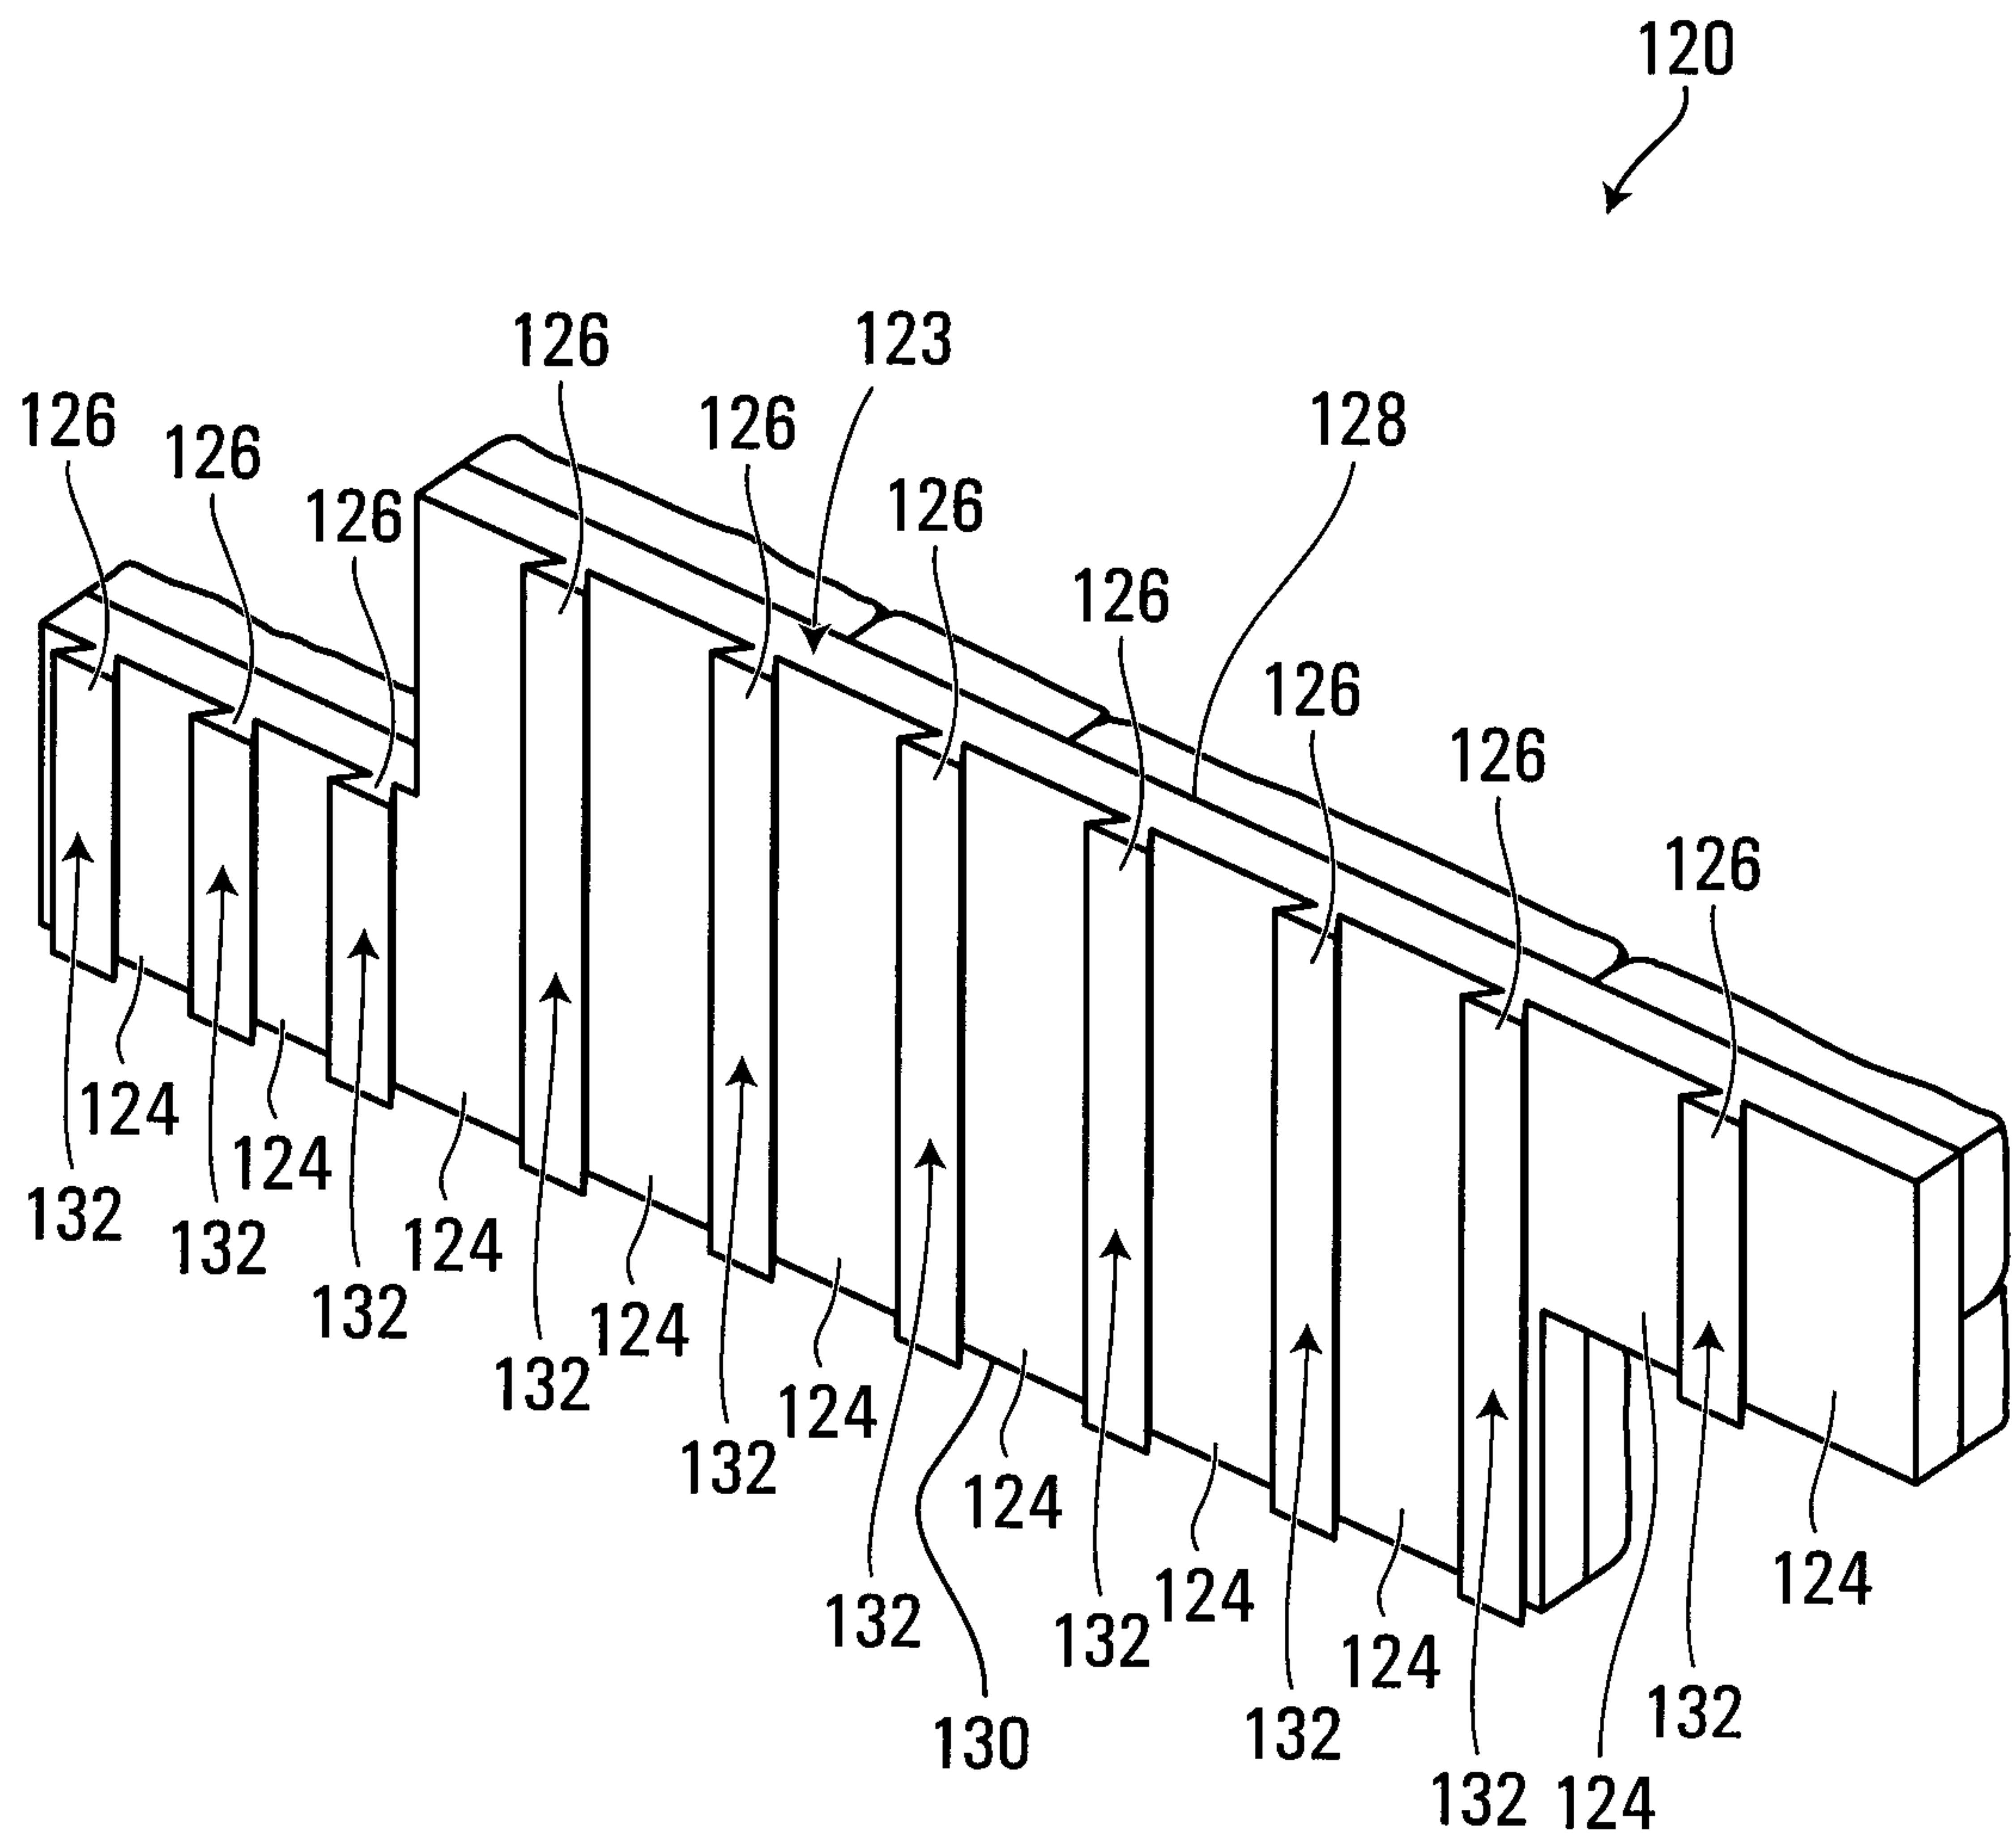
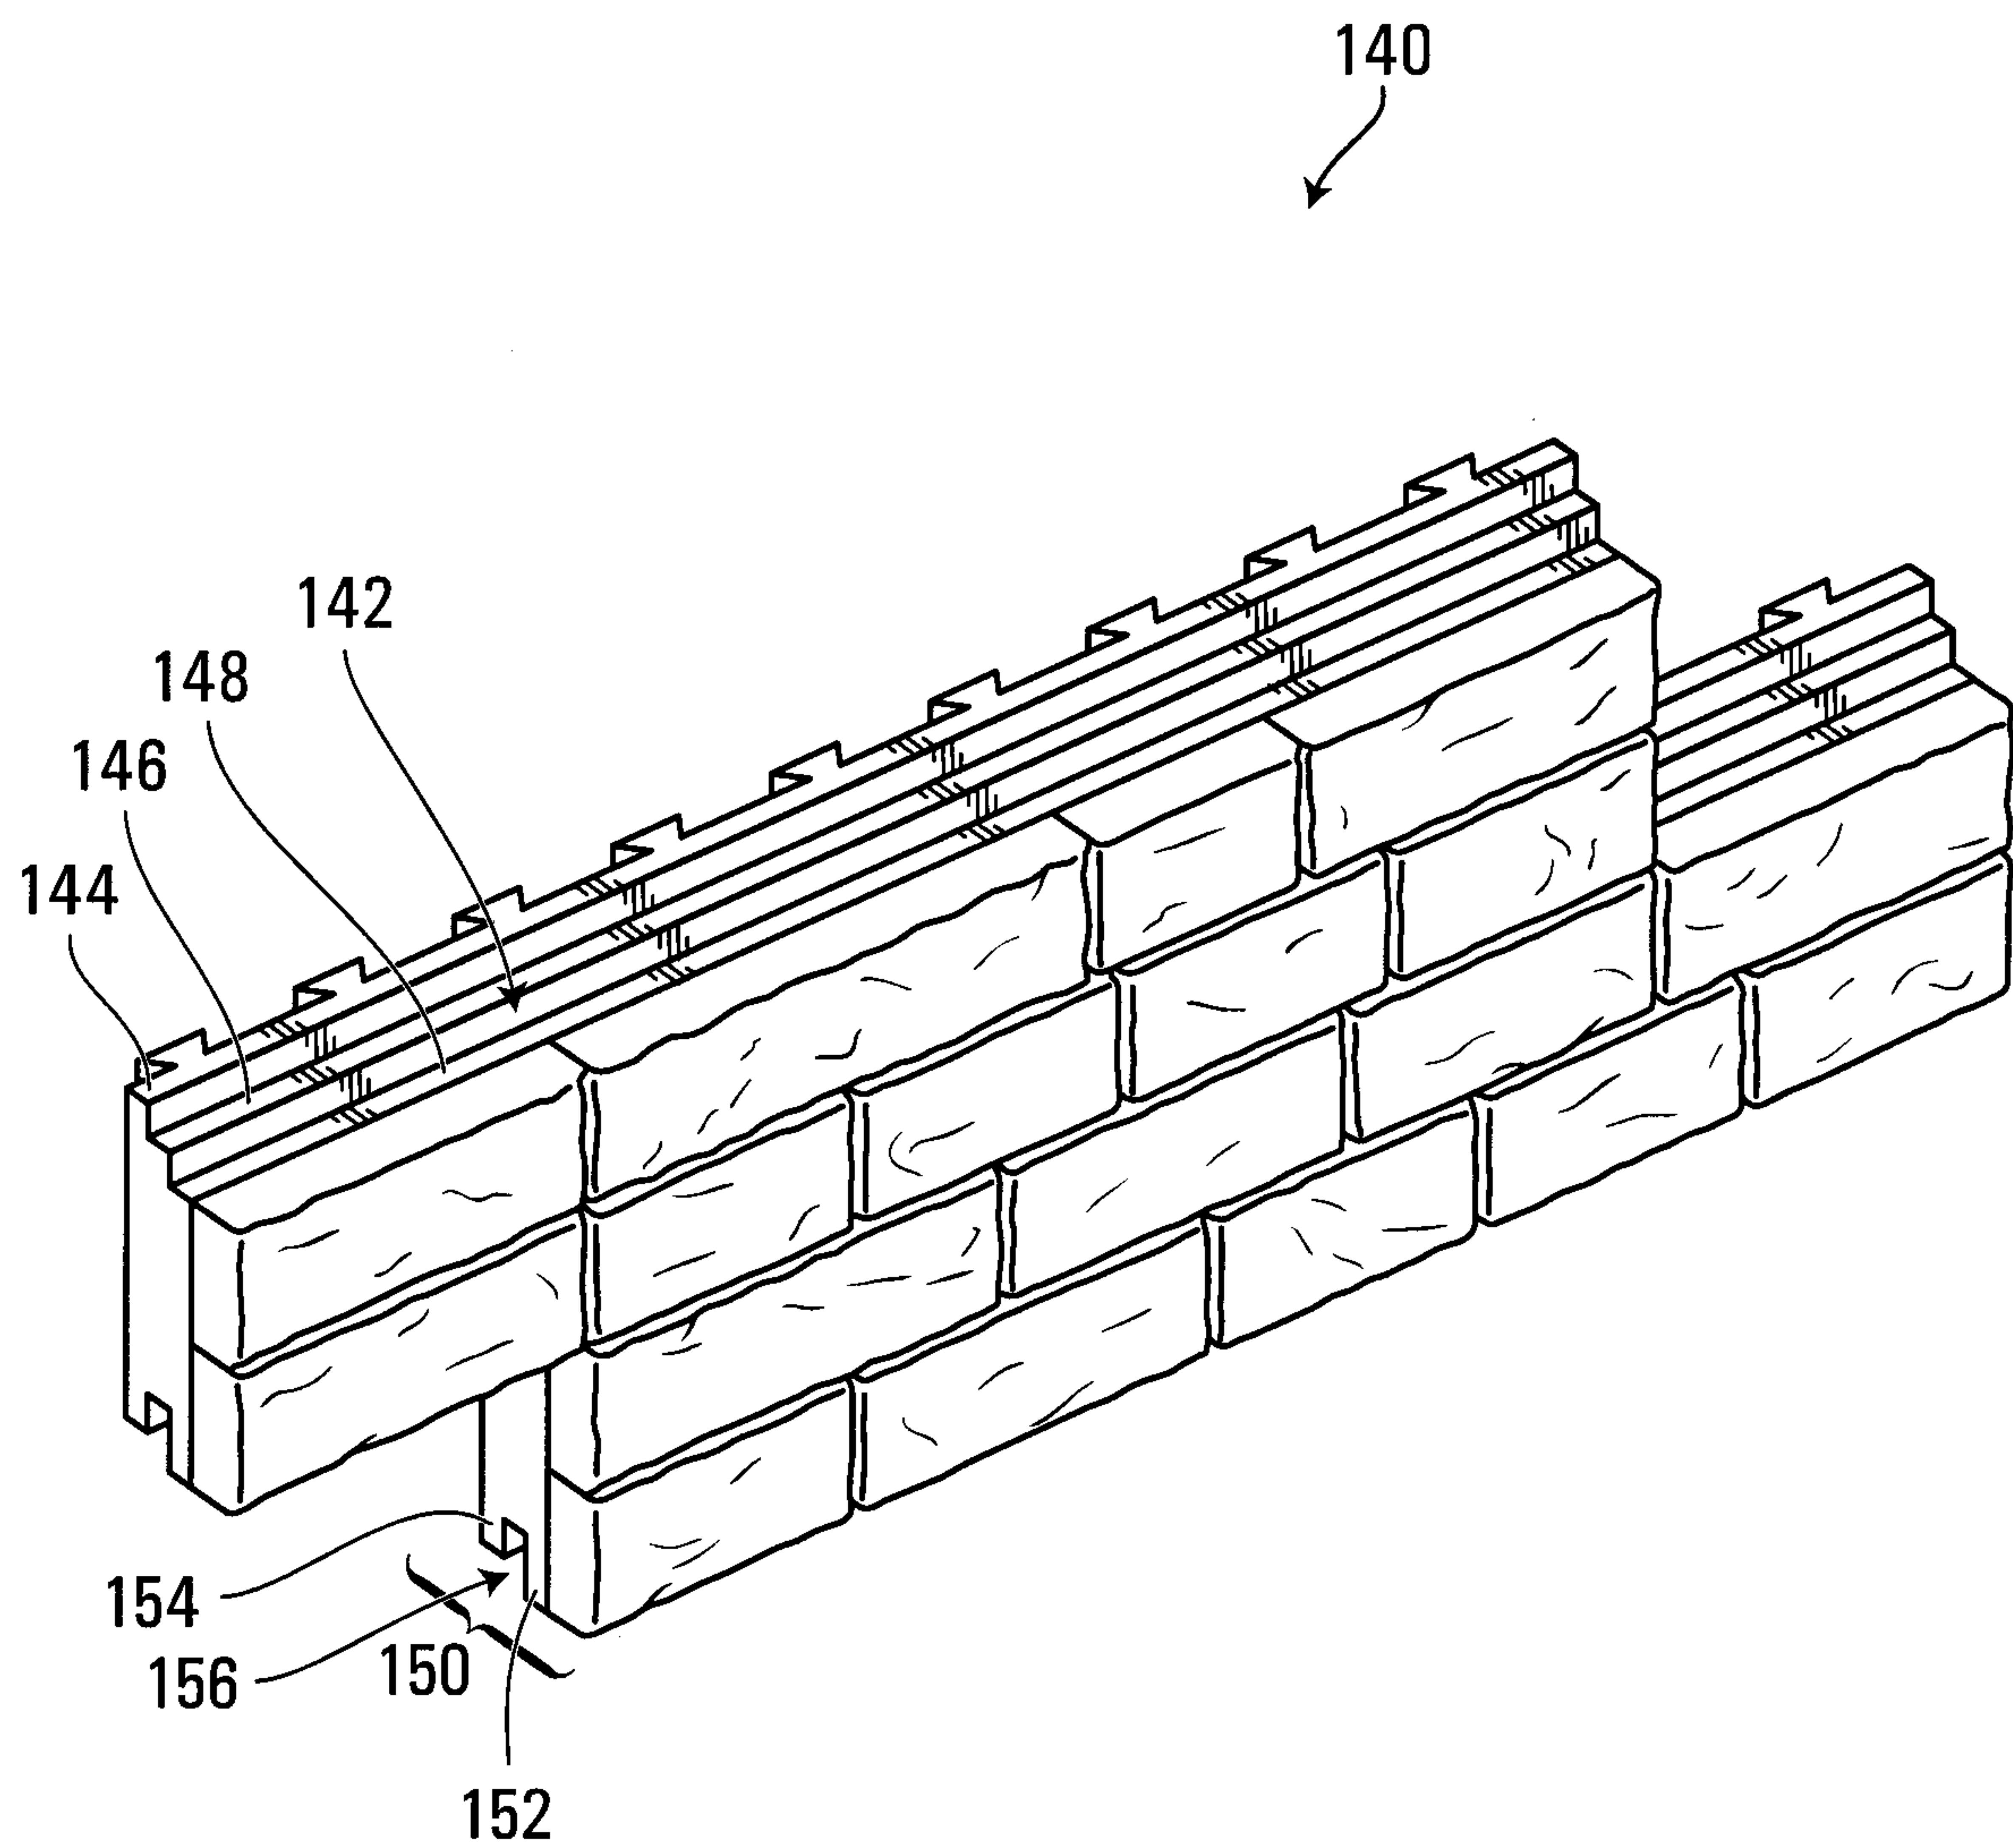
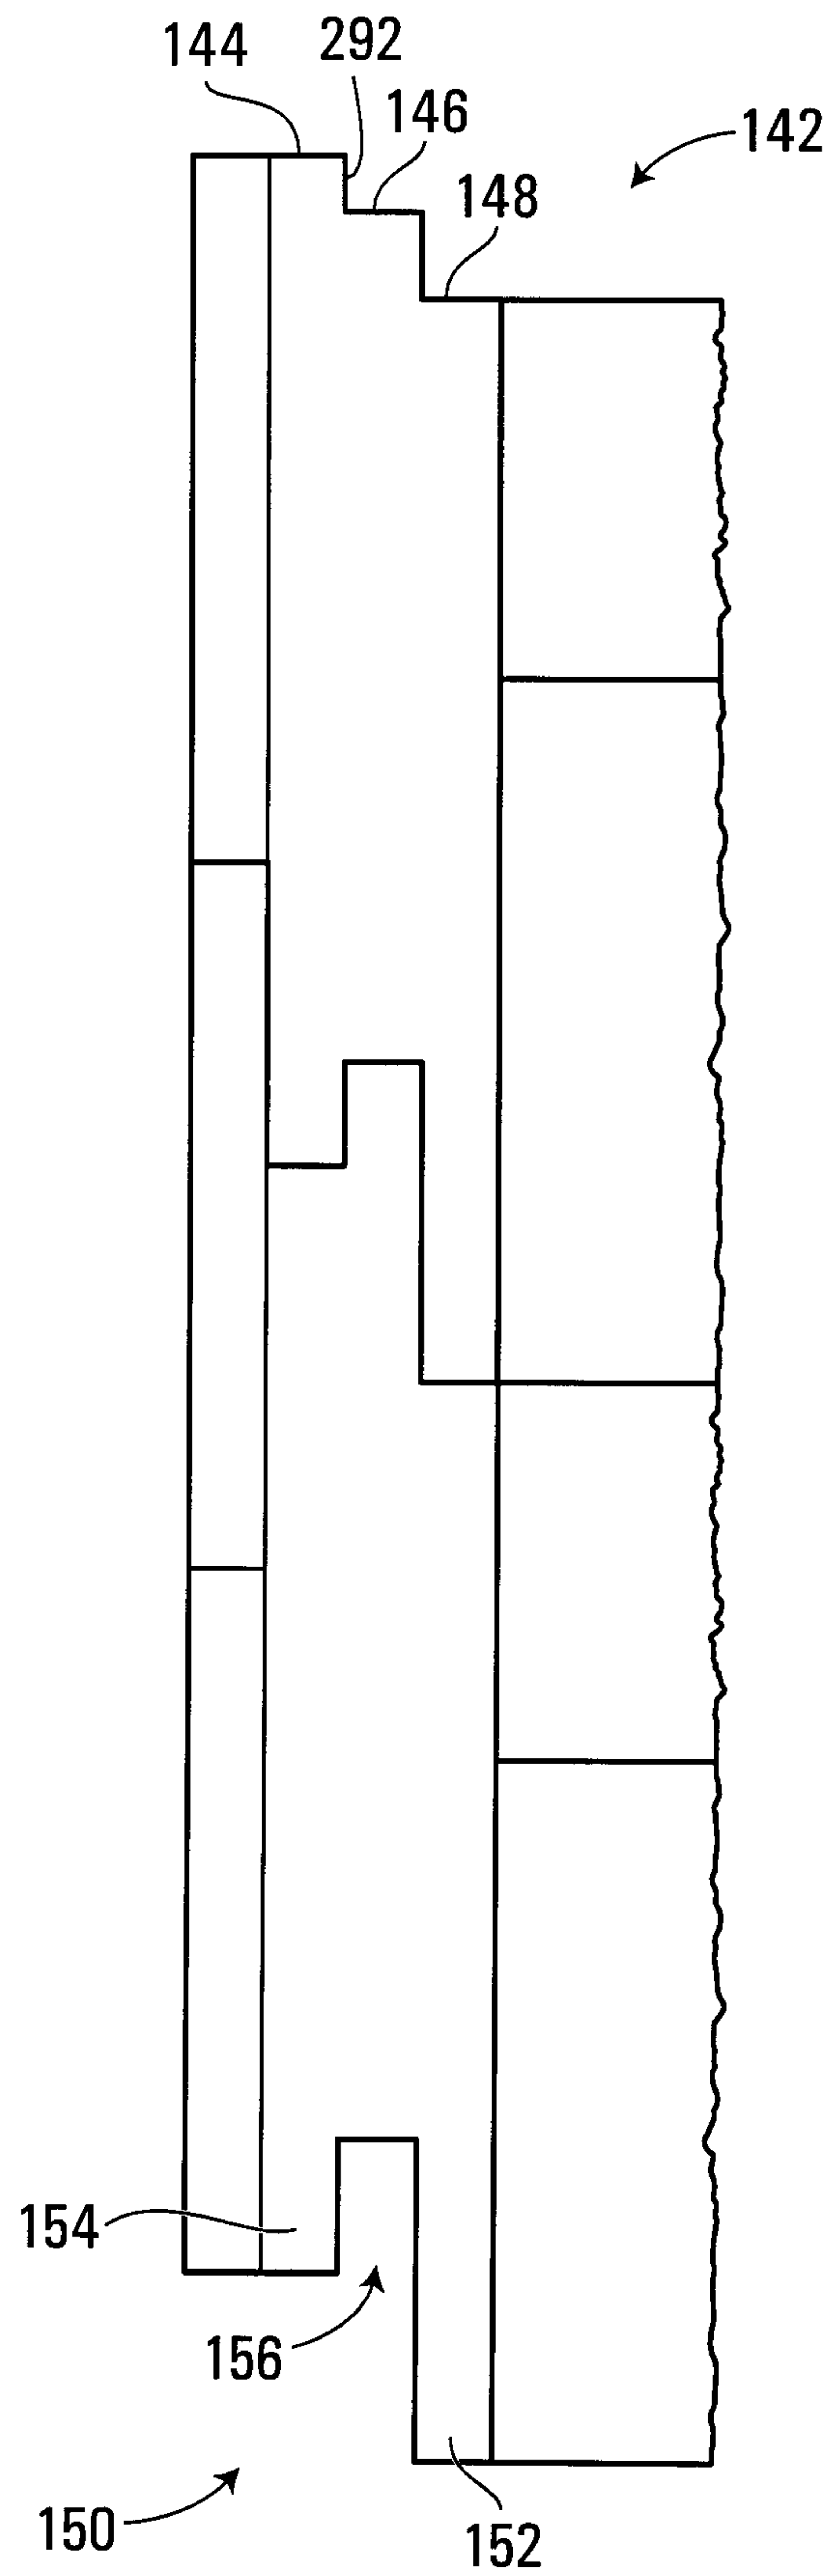


FIG. 5


6/15

**FIG. 6**

7/15

**FIG. 7**

8/15

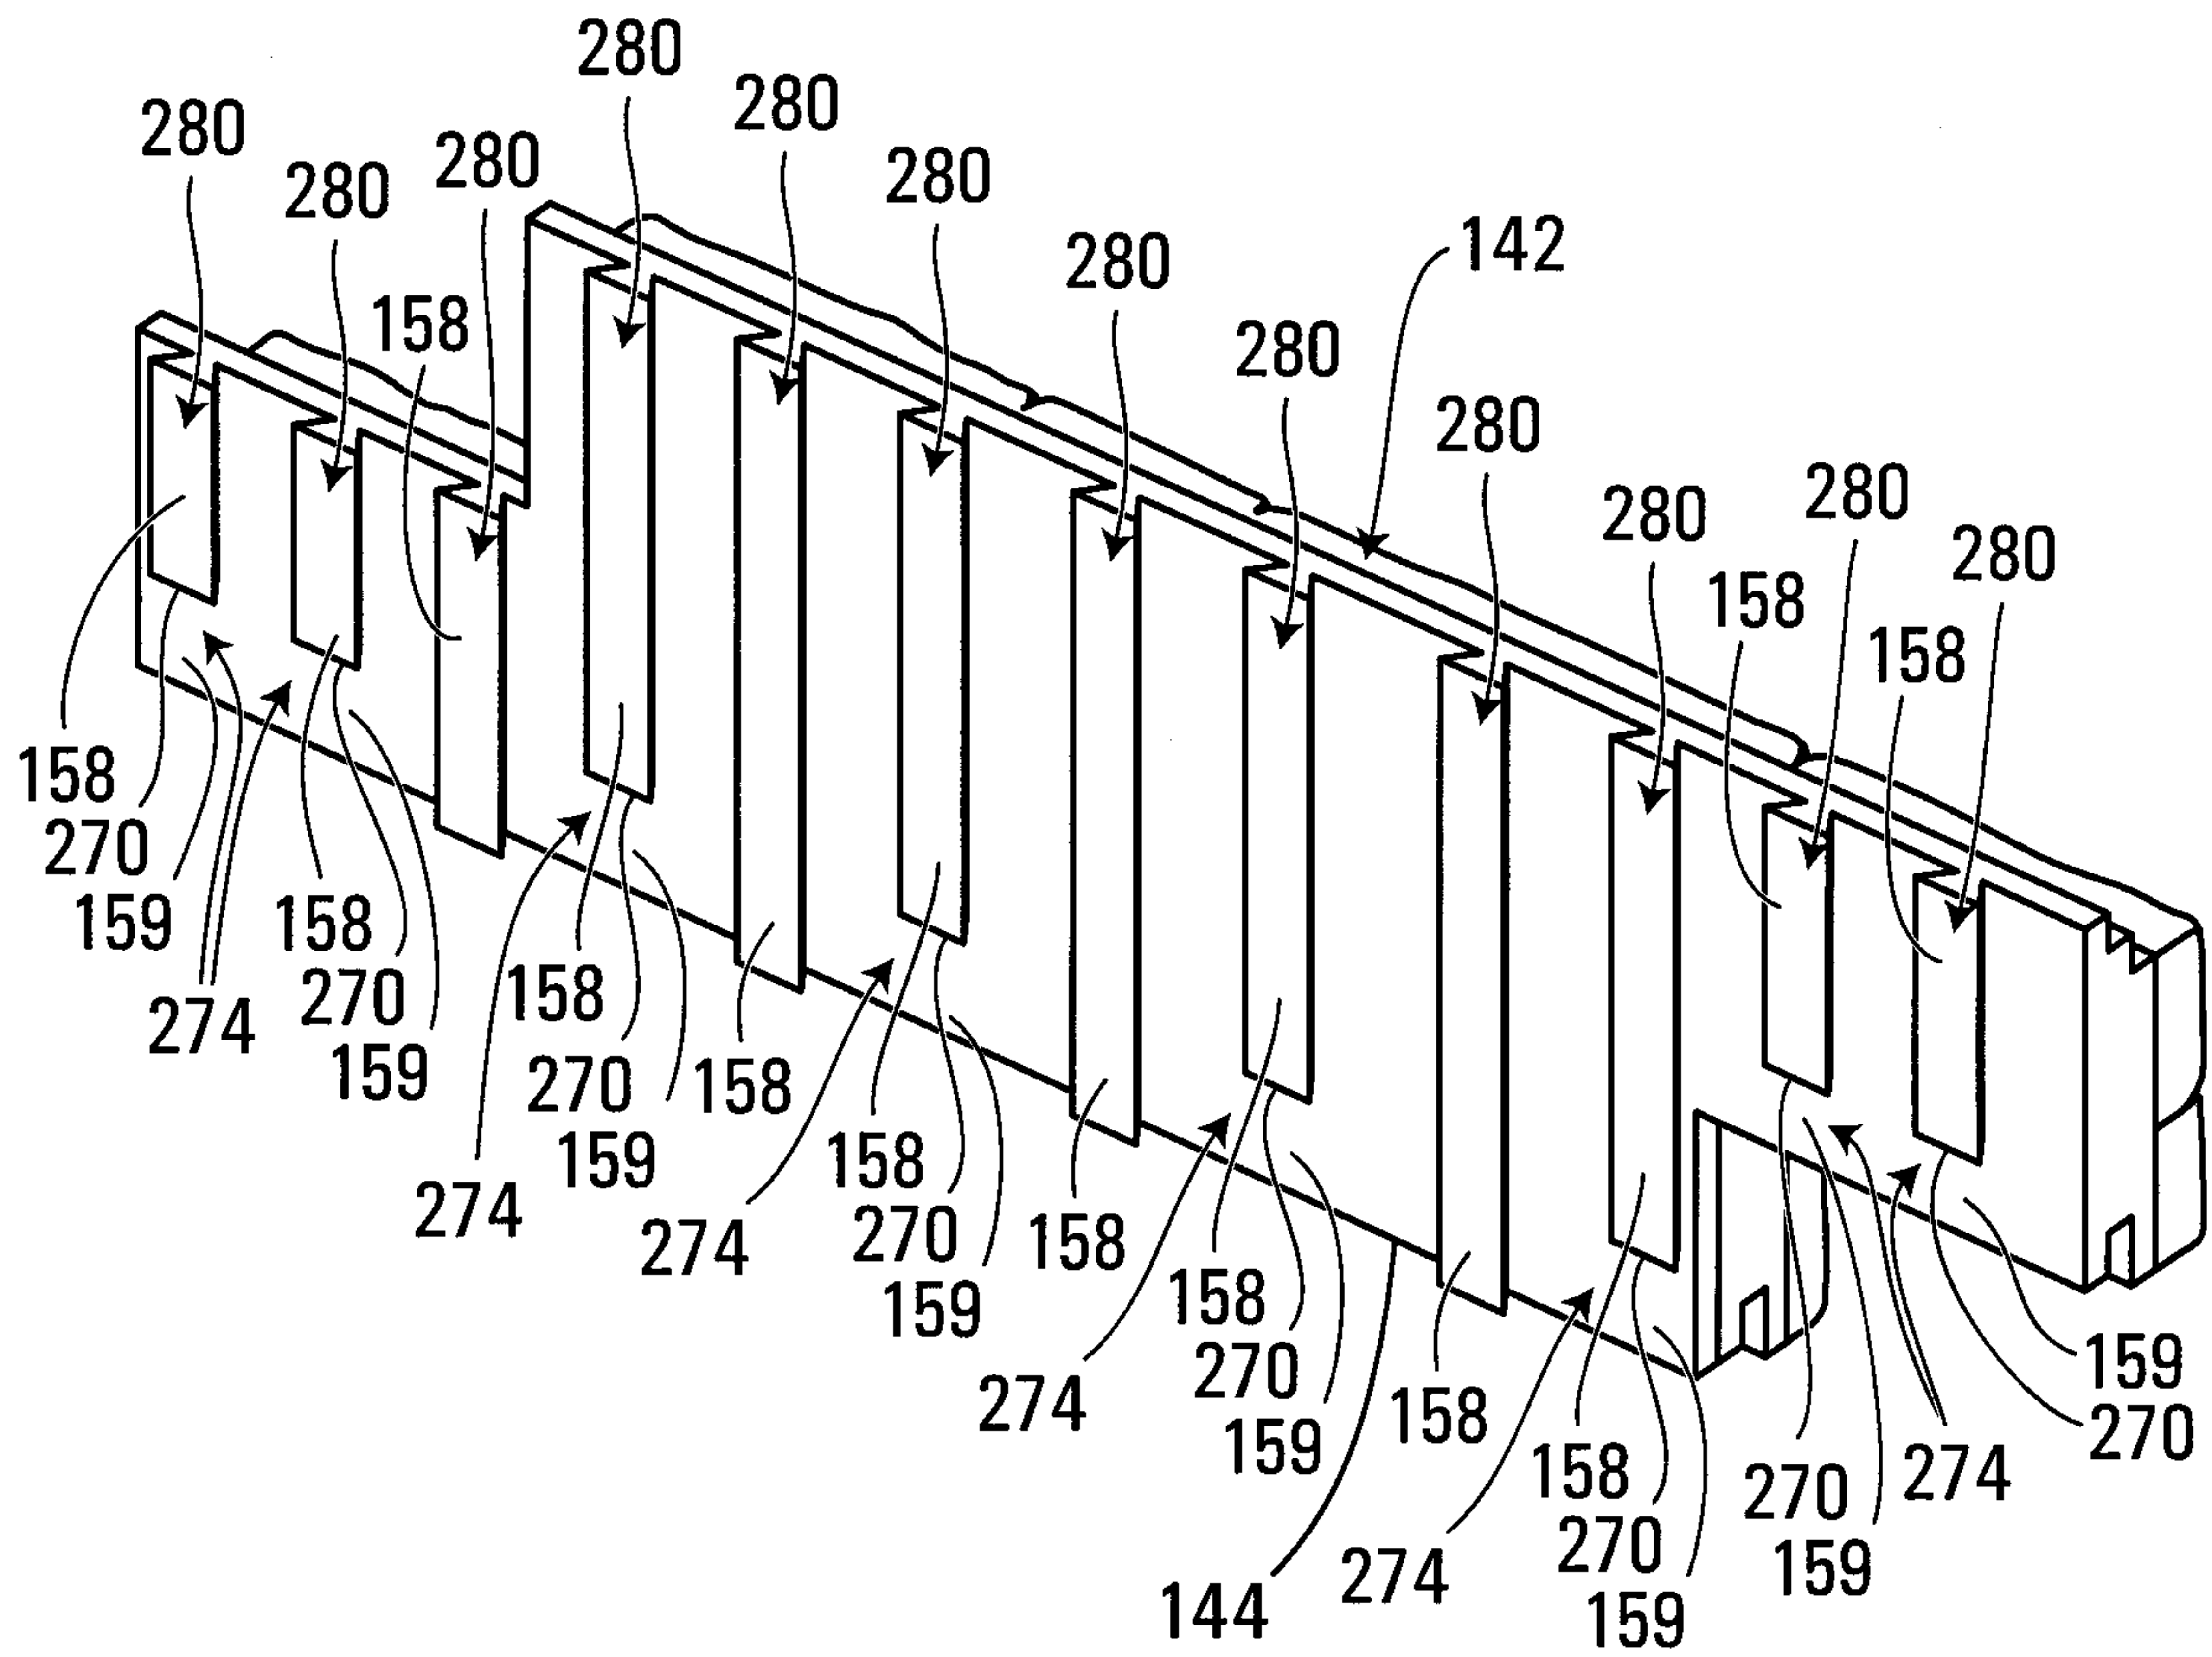**FIG. 8**

9/15

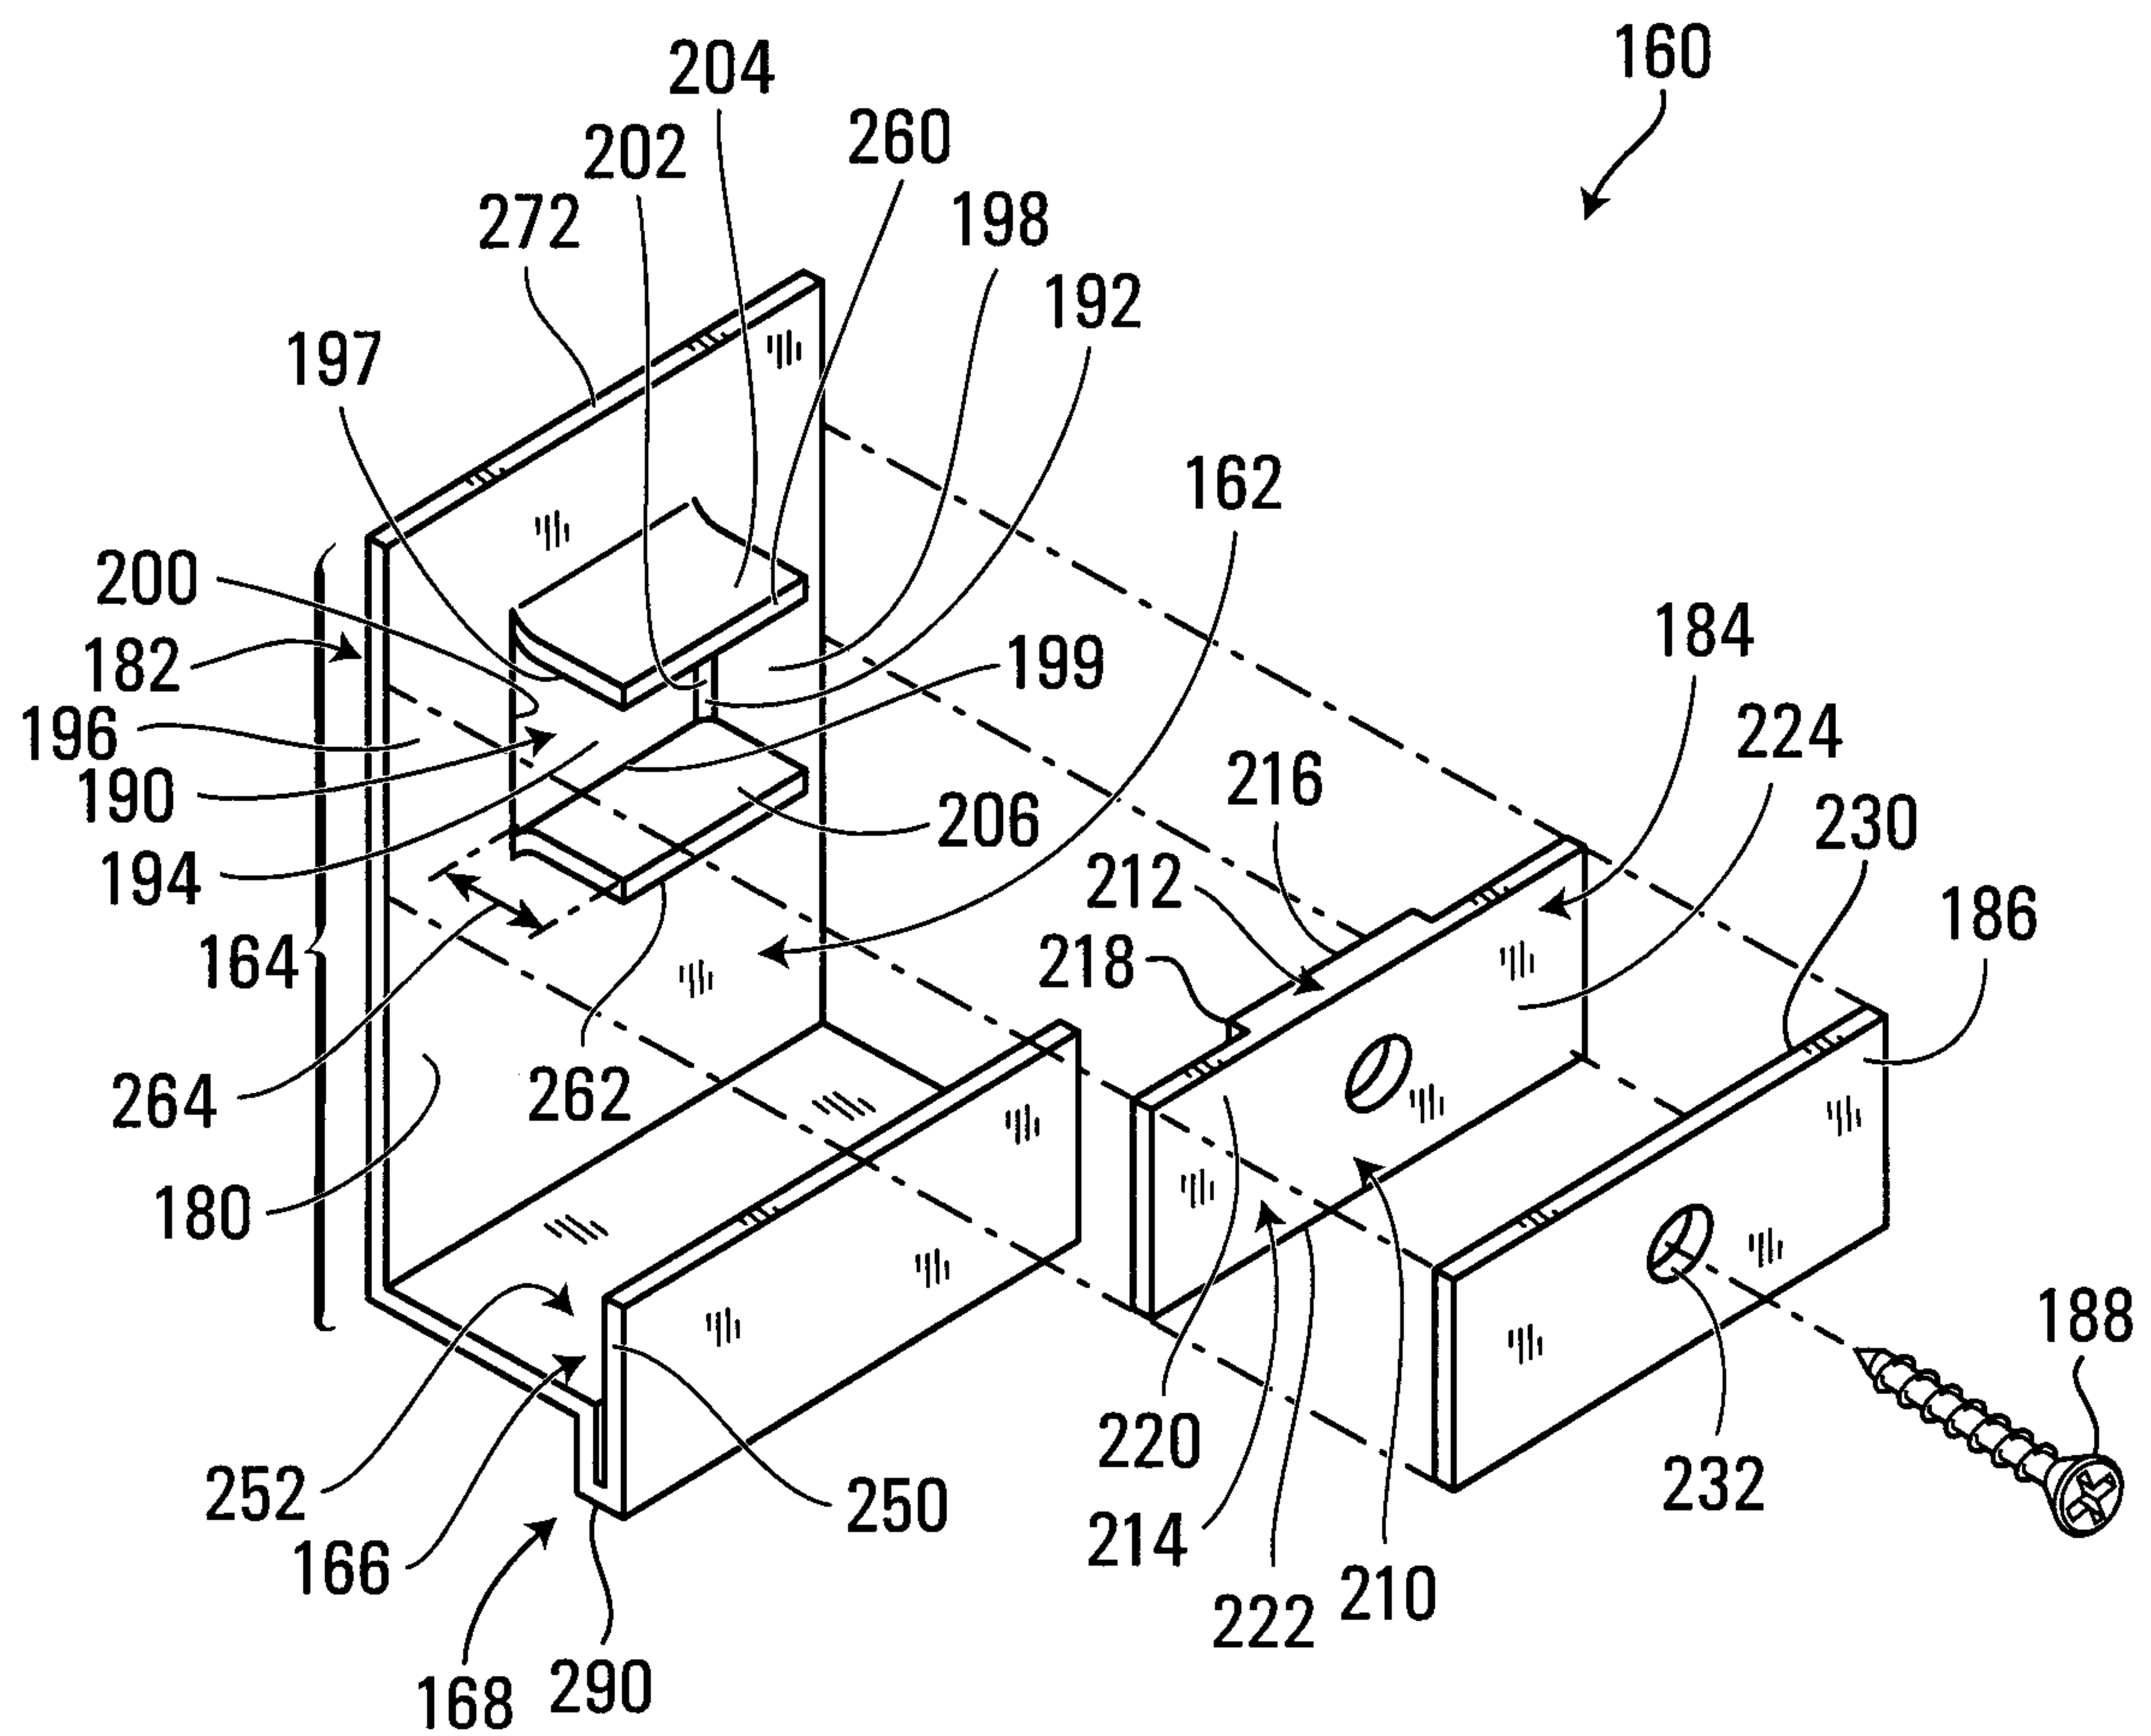


FIG. 9

10/15

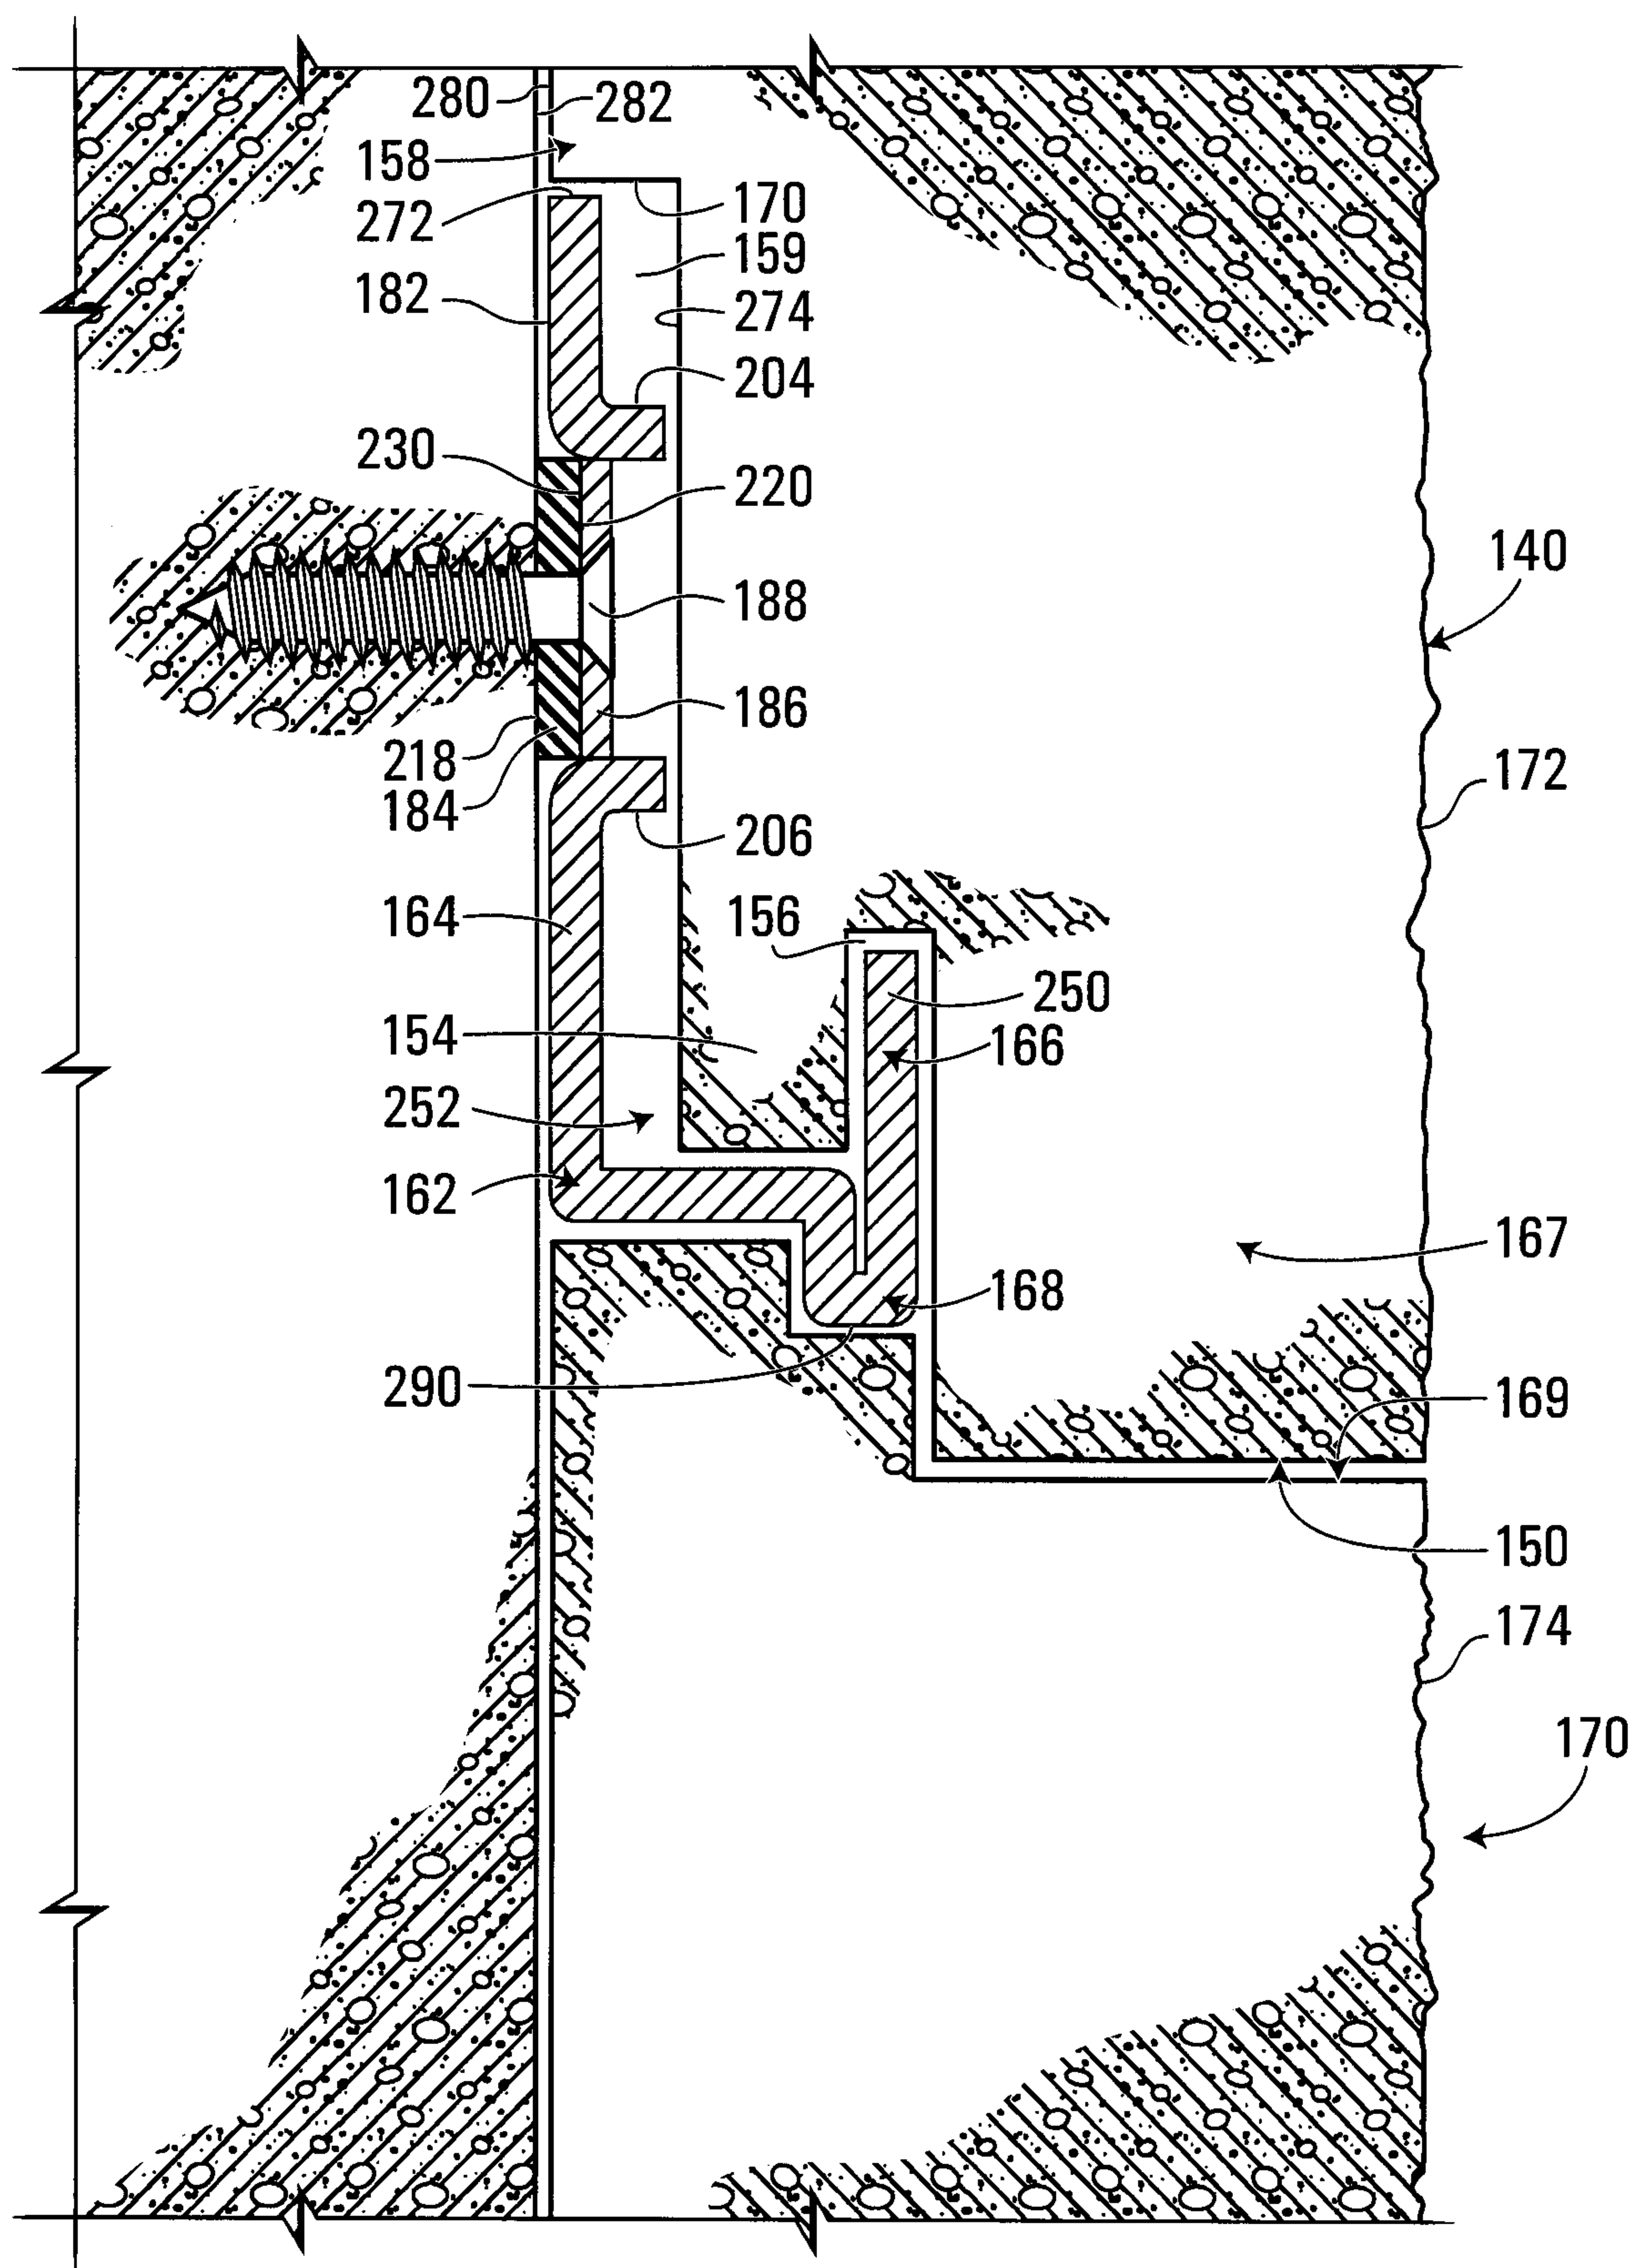
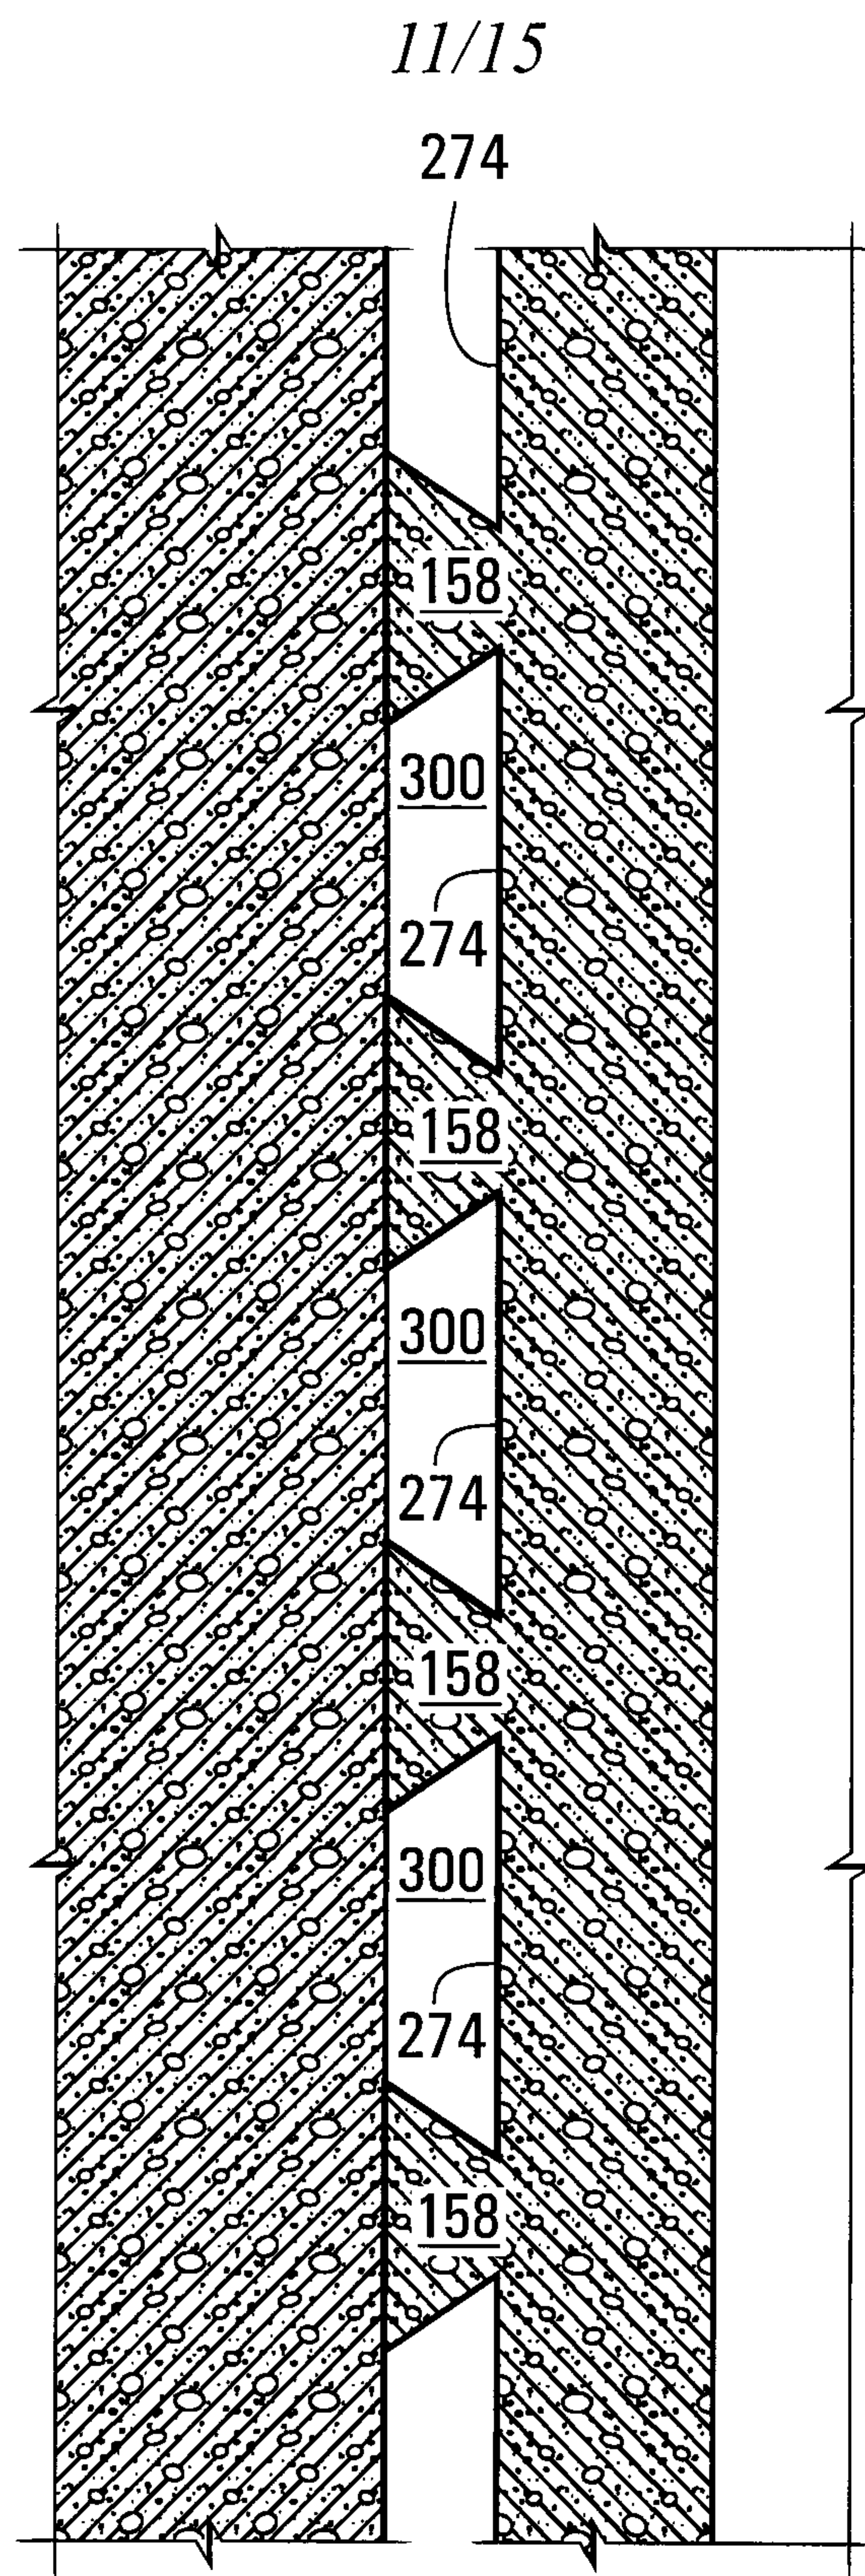
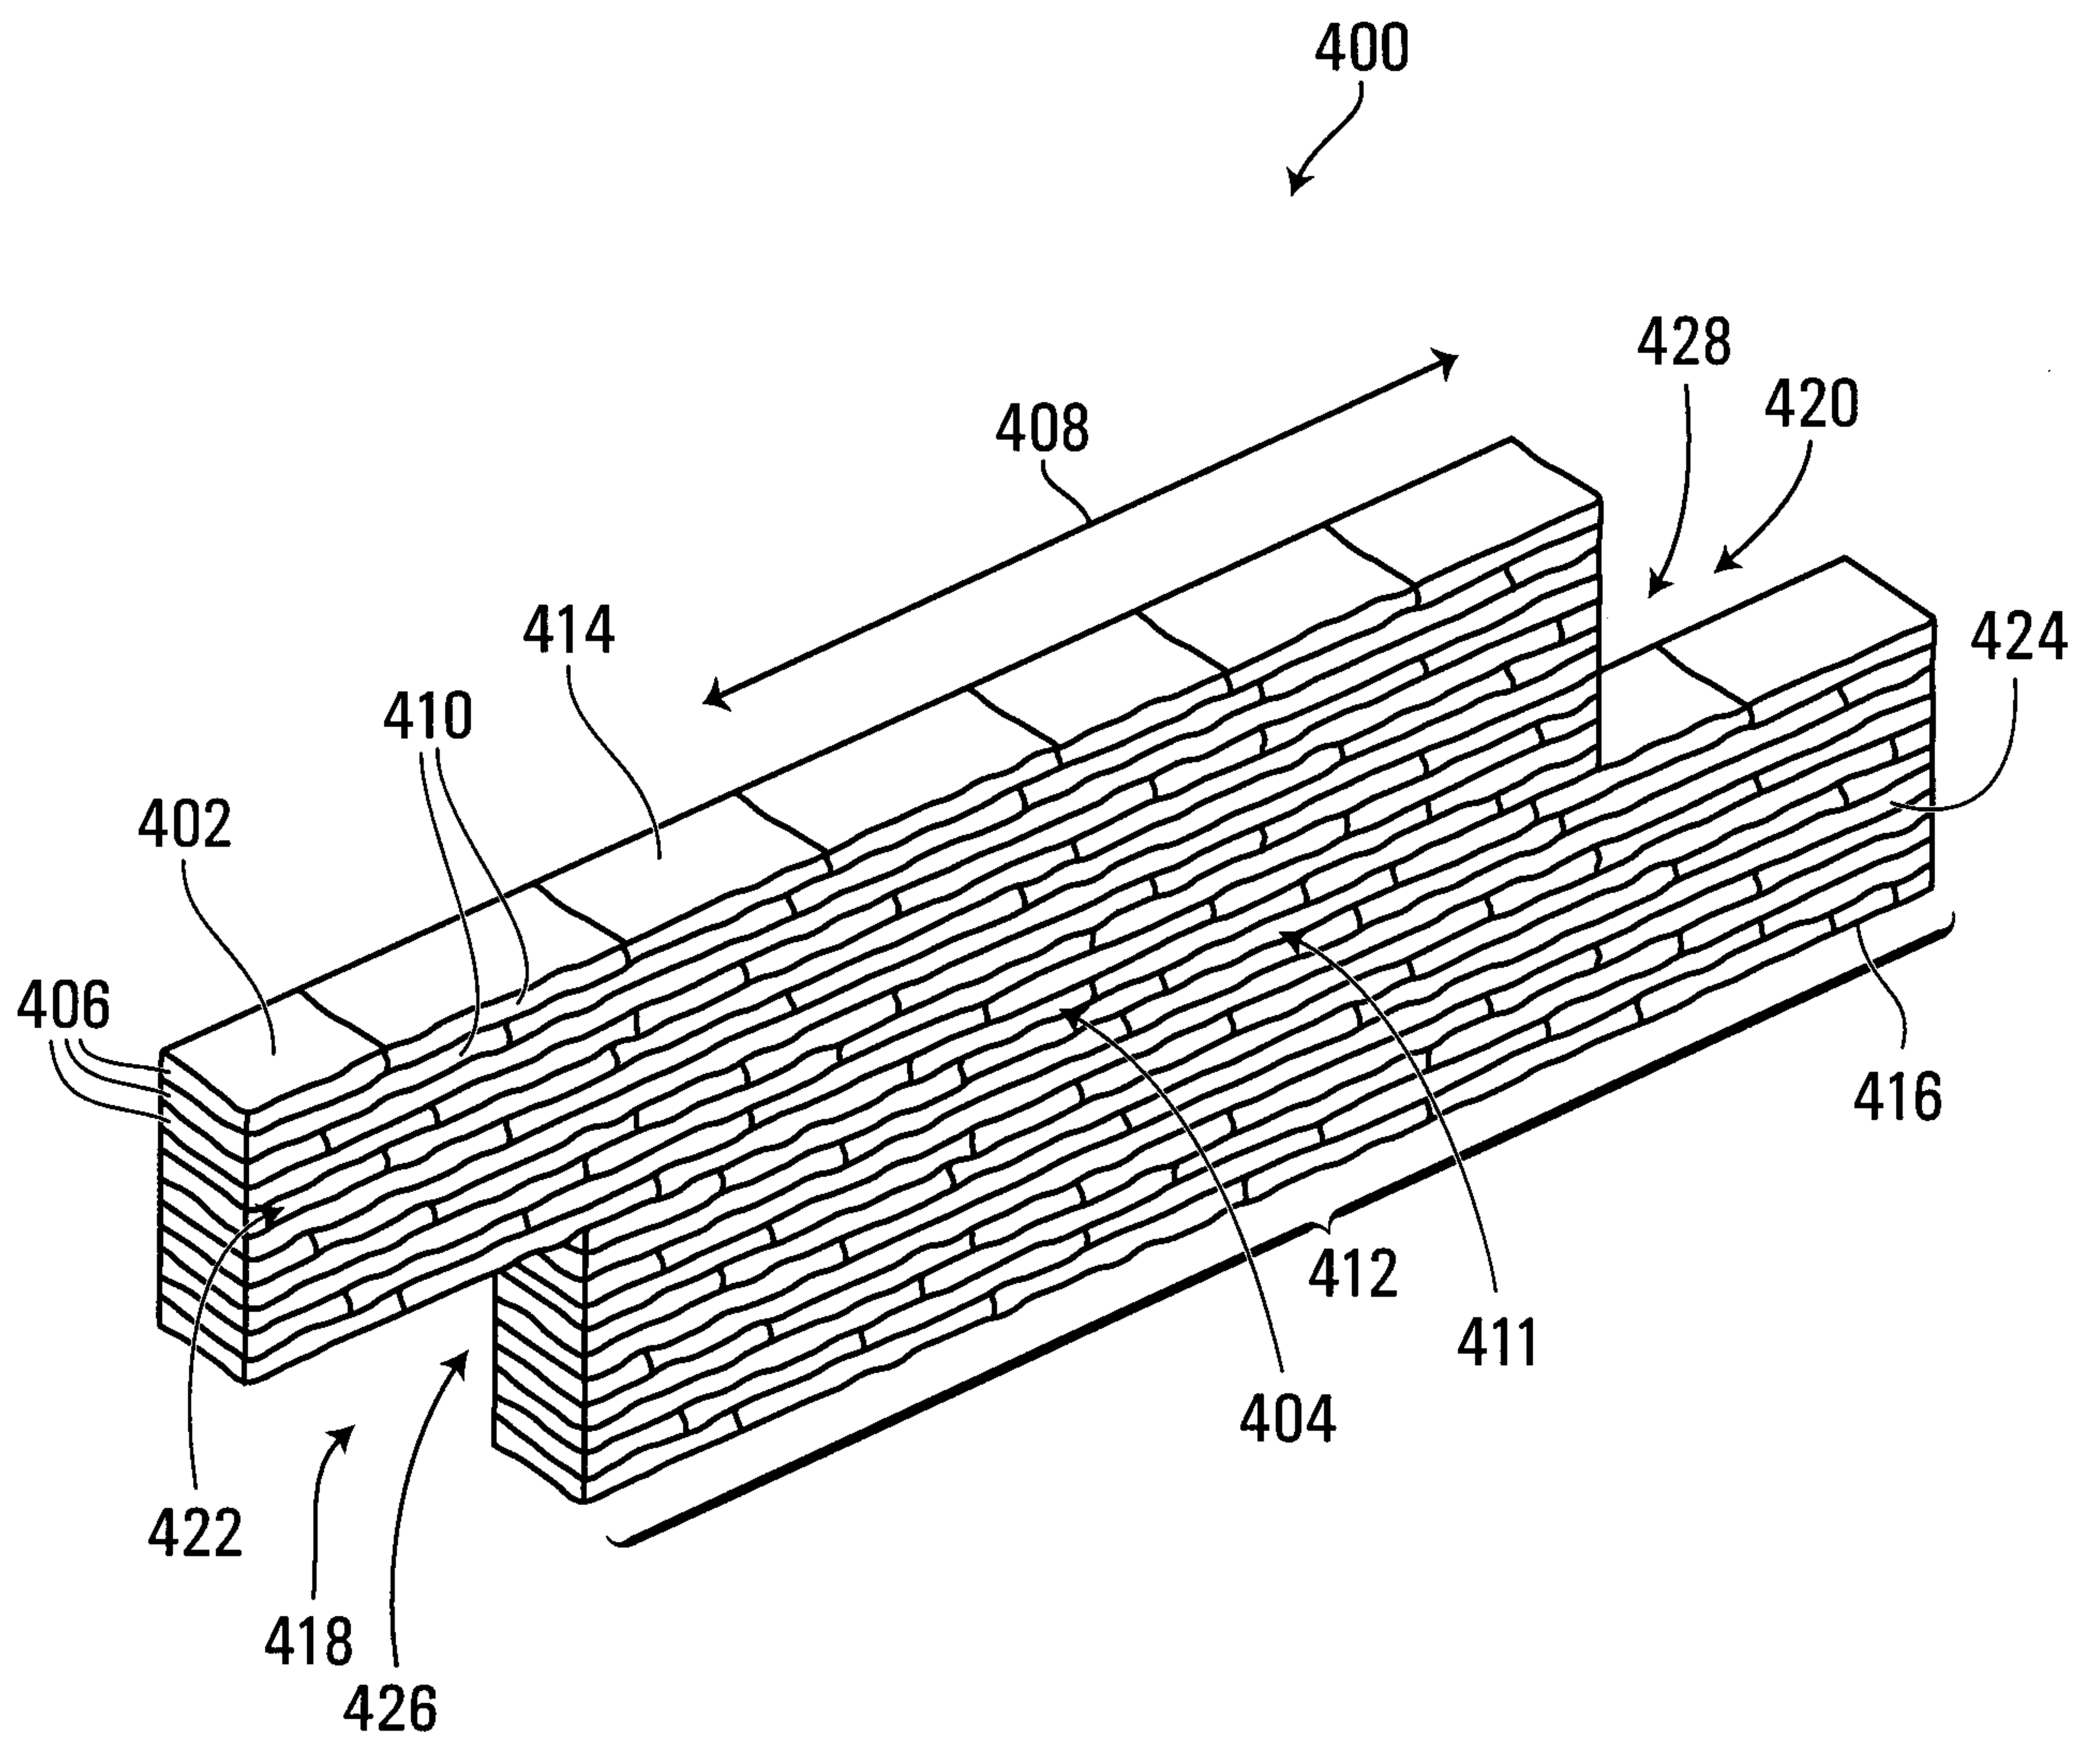
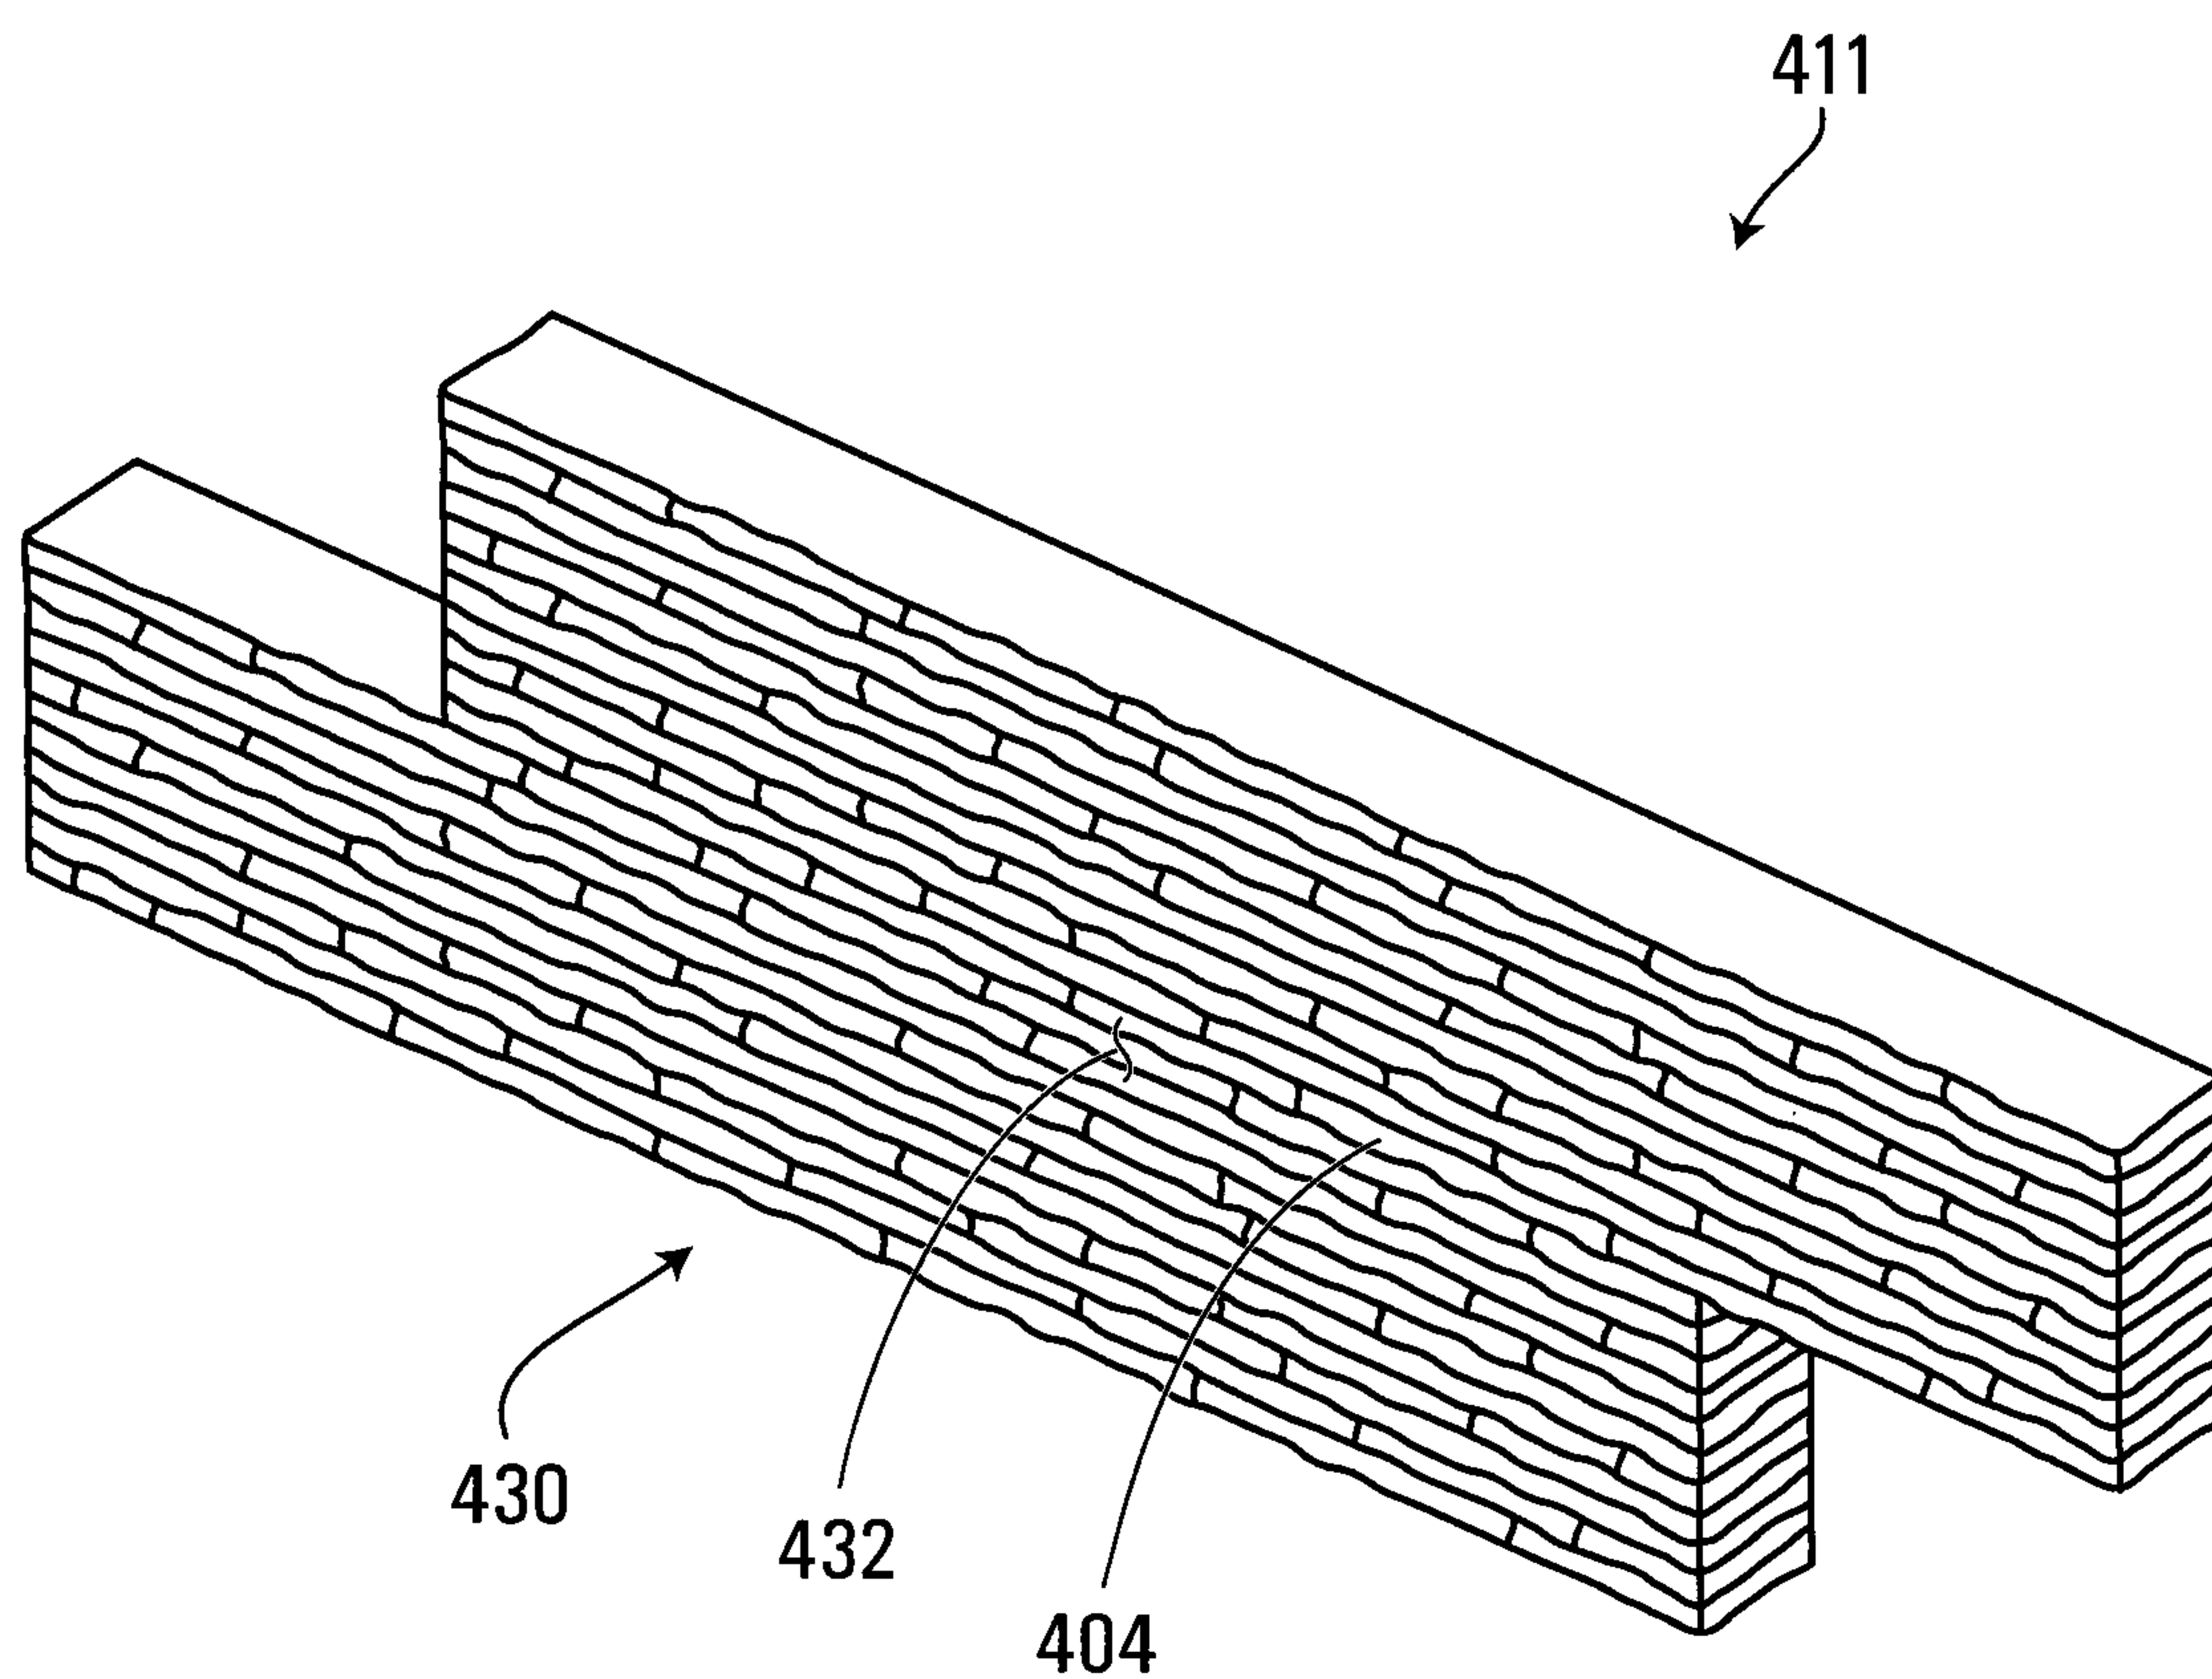



FIG. 10

**FIG. 11**


12/15

**FIG. 12**

13/15**FIG. 13**

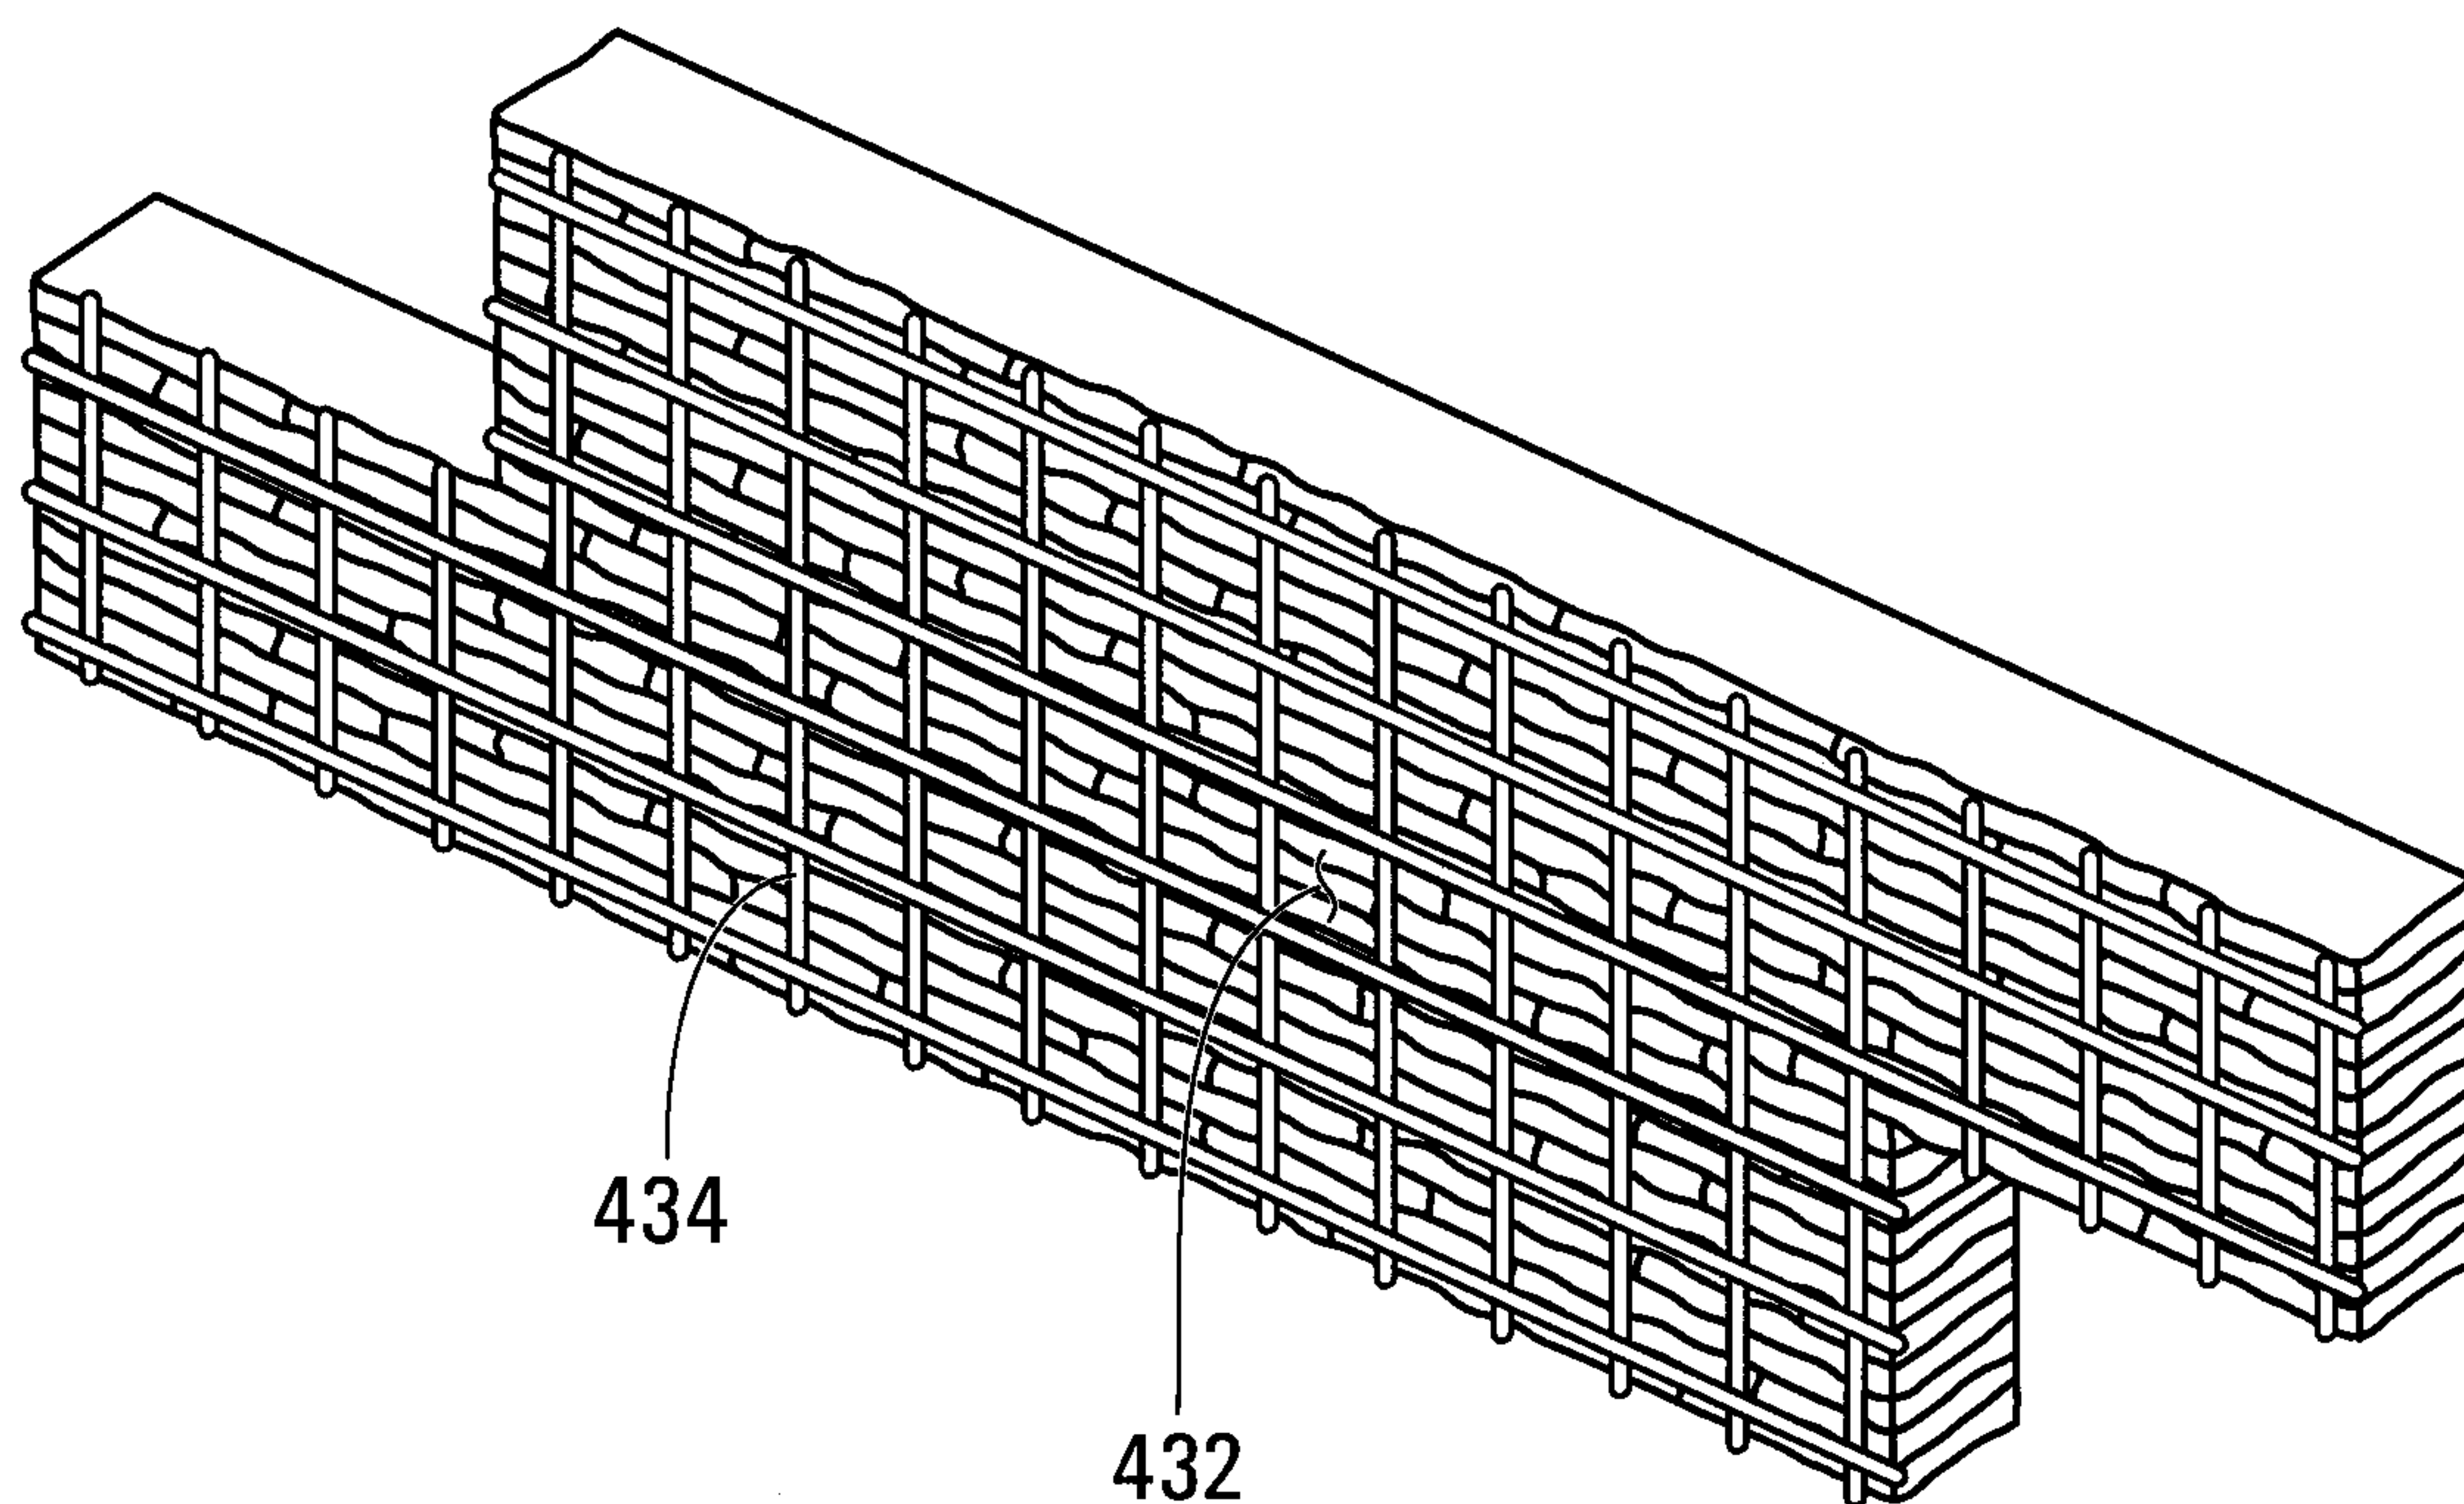14/15**FIG. 14**

15/15

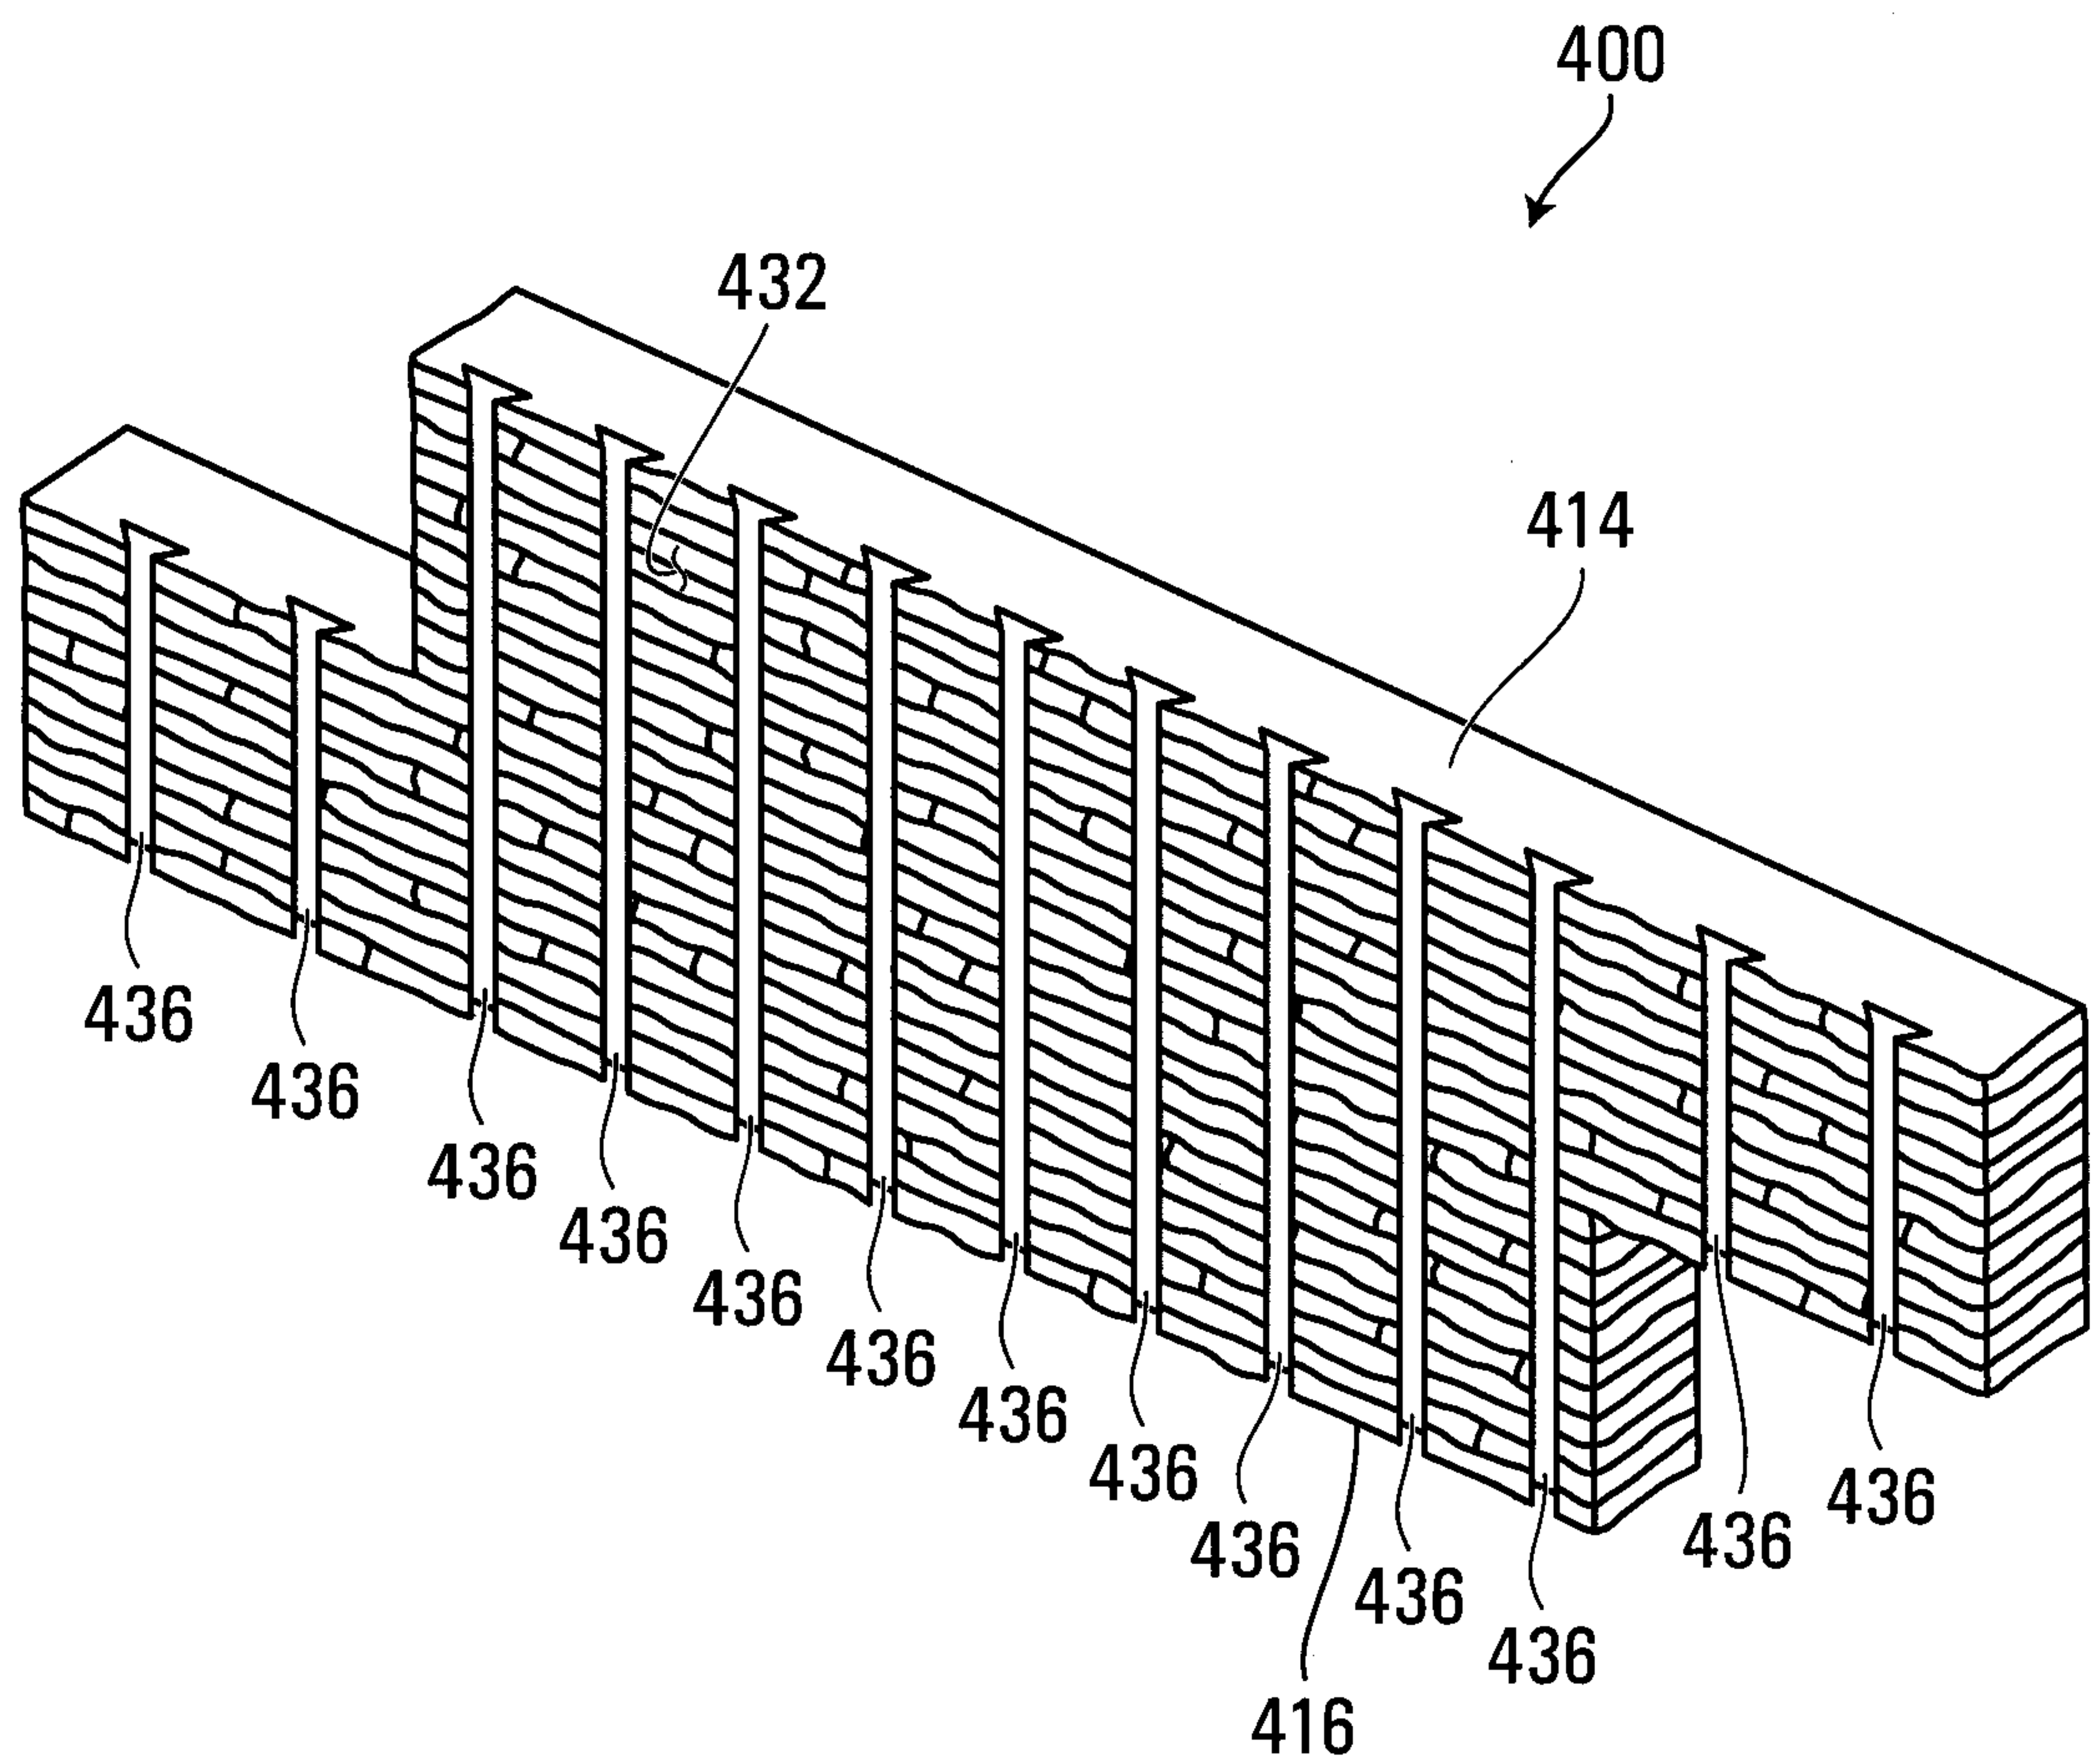**FIG. 15**

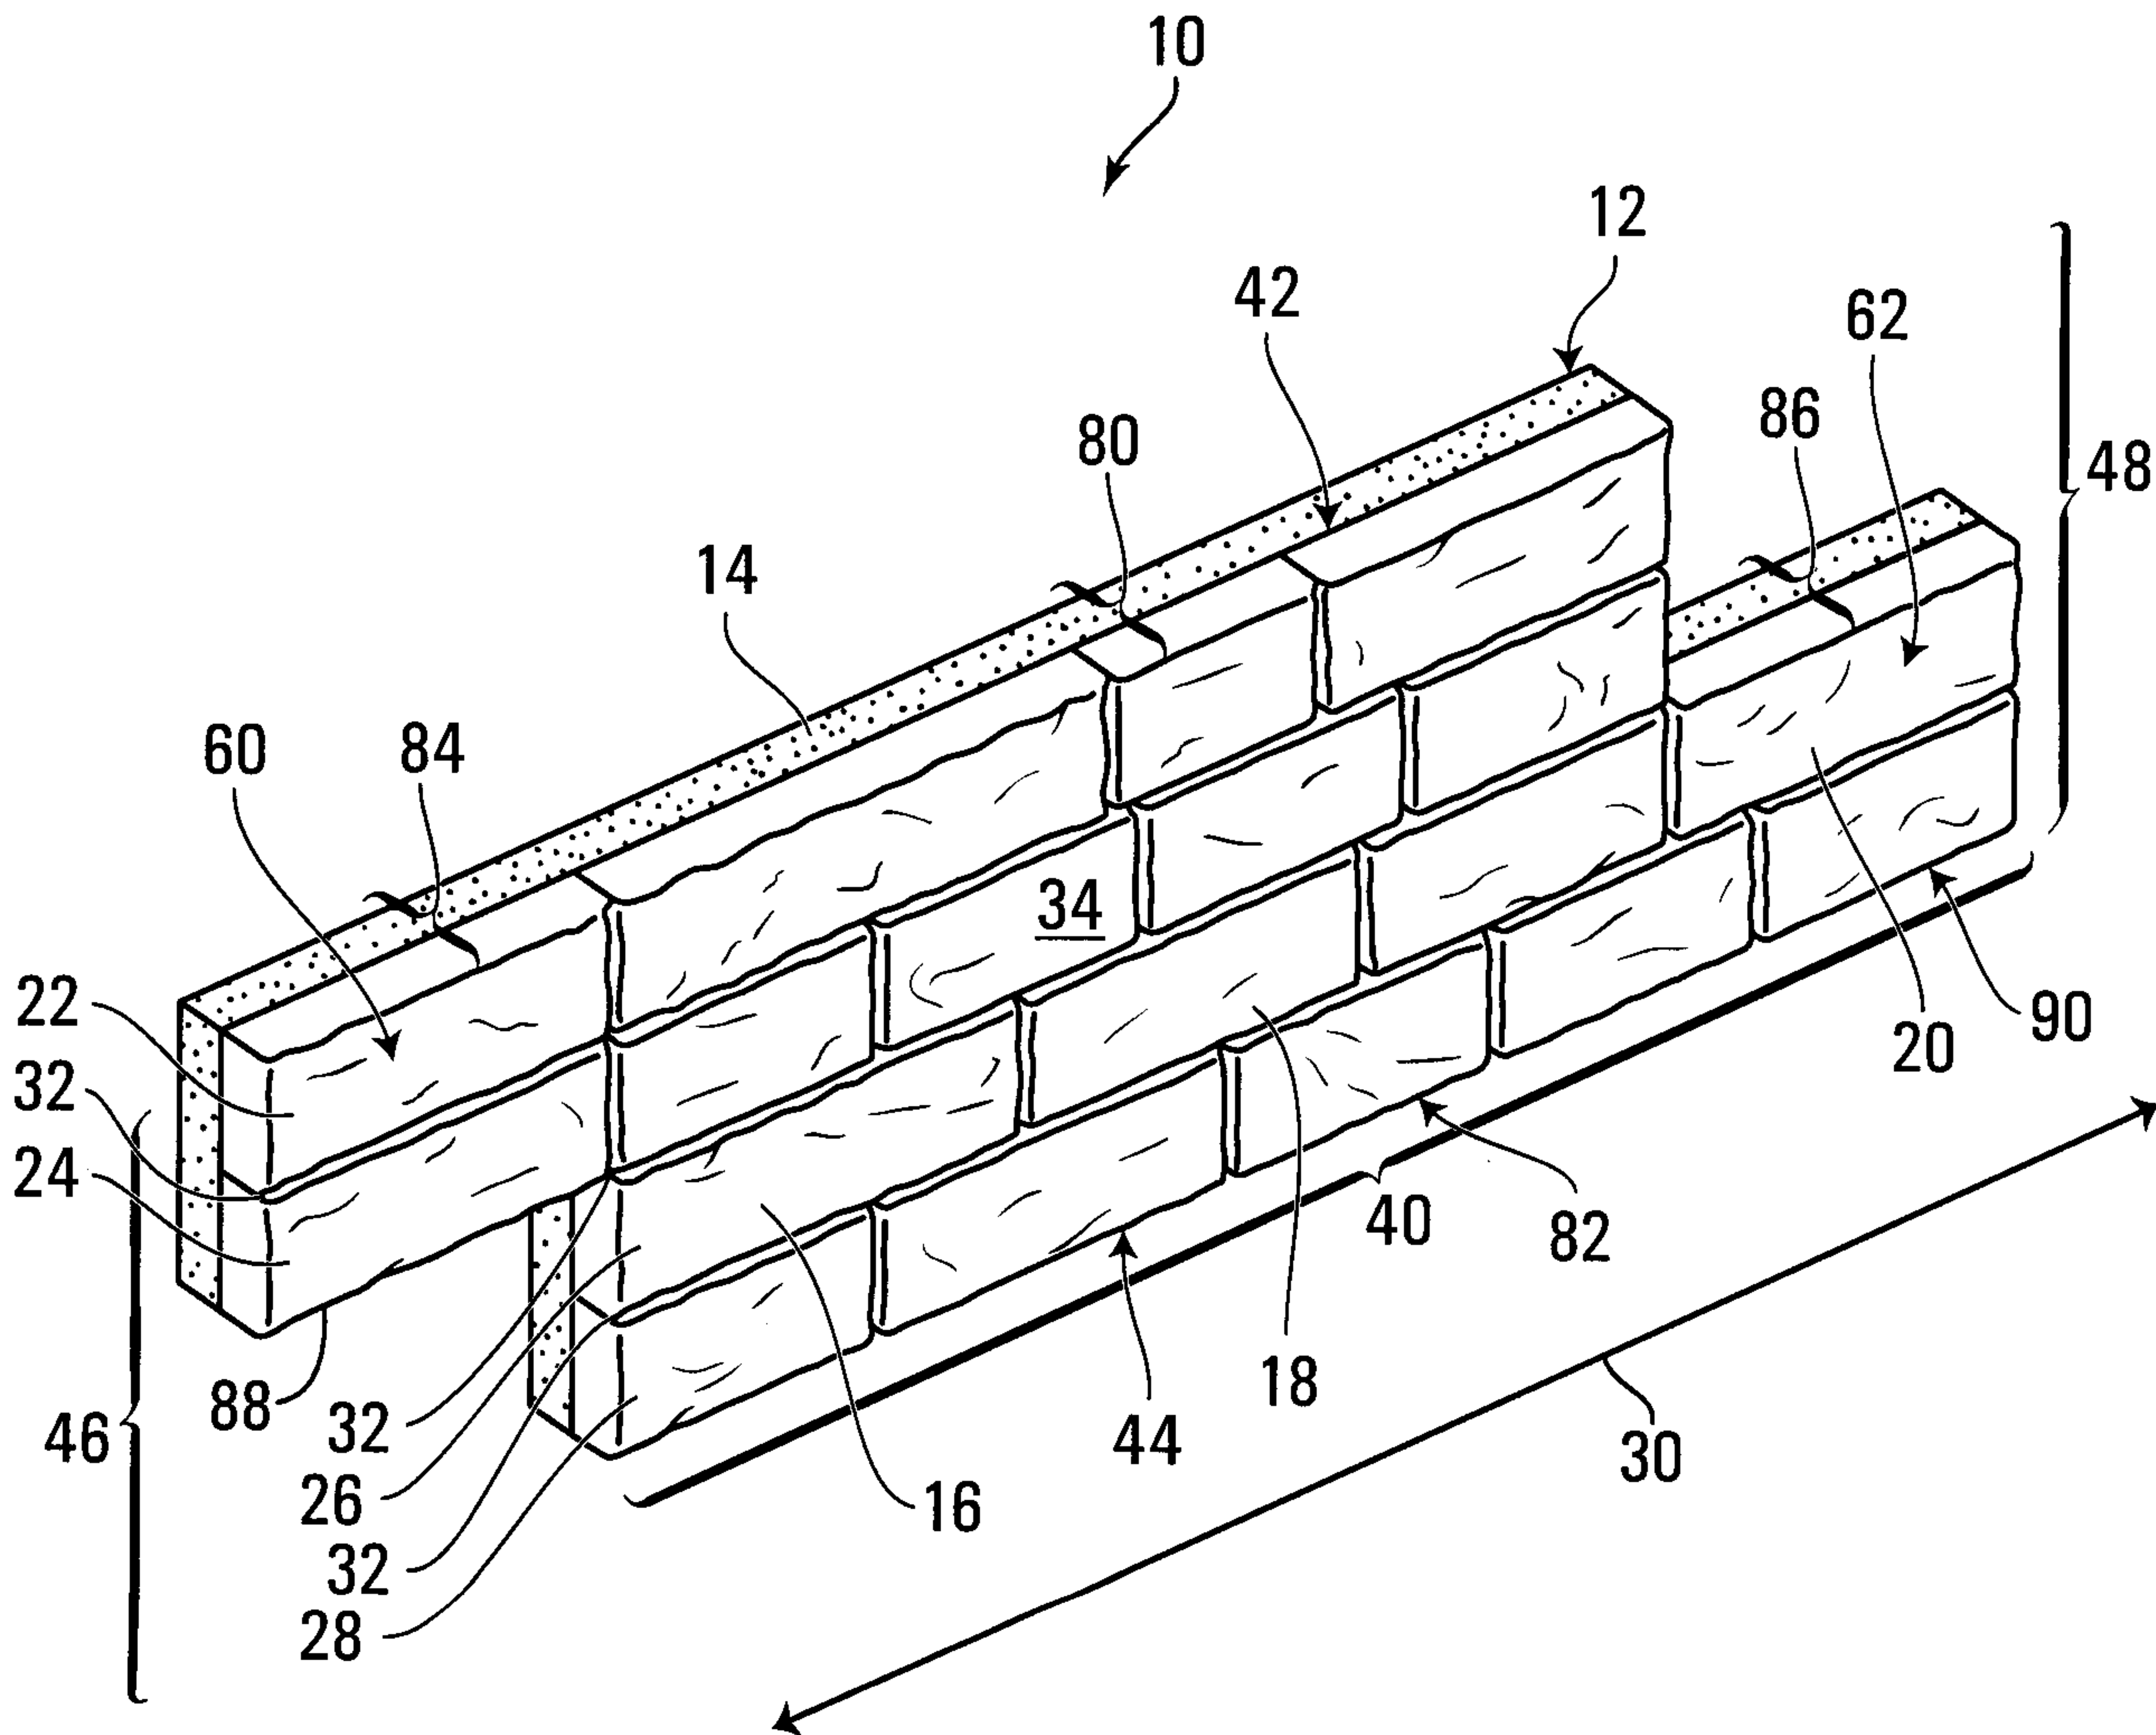


FIG. 1