



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 619 394 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
25.01.2006 Bulletin 2006/04

(51) Int Cl.:
F04D 29/54 (2006.01) F04D 25/08 (2006.01)

(21) Application number: **04106433.8**

(22) Date of filing: **09.12.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL BA HR LV MK YU

(30) Priority: **20.07.2004 CN 200410070000**

(71) Applicant: **Delta Electronics, Inc.**
Taoyuan Hsien 333 (TW)

(72) Inventors:
• **LU, Lobato**
333, Taoyuan Hsien (TW)
• **WANG, Ke-Nan**
333, Taoyuan Hsien (TW)
• **HUANG, Wen-Shi**
333, Taoyuan Hsien (TW)

(74) Representative: **Patentanwälte Kewitz & Kollegen
Partnerschaft,
Corneliusstrasse 18
60325 Frankfurt a.M. (DE)**

(54) **Fan assembly**

(57) The fan assembly (20) is applicable to a light source (L) that produces heat. The fan assembly (20) comprises a frame (21) and an impeller (24). The frame (21) comprises an opening (26), and a periphery of the

opening (26) has a curved surface. The impeller (24) is disposed in the frame (21). When light emitted from the light source (L) enters the opening (26), the light is blocked from penetrating the opening by the curved surface.

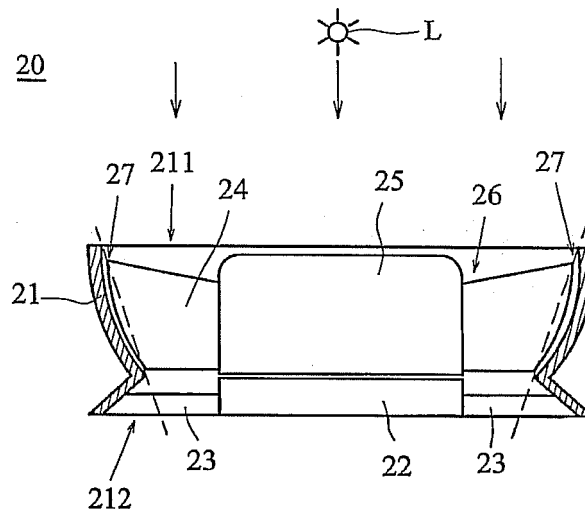


FIG. 2A

EP 1 619 394 A2

Description**BACKGROUND**

[0001] The invention relates to a fan assembly, and in particular to a fan assembly applicable to a light source producing heat.

With the continuous development of electronic devices, heat dissipation systems become necessary as temperature is significantly increased due to heat produced during operation. If heat is not appropriately dissipated, high temperature causes performance to deteriorate and may cause the electronic devices to fail. Particularly, since semiconductor and integrated circuits (IC) design has improved, the integrated circuit size has been reduced and the number of transistors per unit area has substantially increased, further concentrating heat energy. Thus, a heat dissipation system is required to effectively dissipate the excess heat and maintain working temperature.

[0002] Fan assembly is the most popular heat dissipation apparatus. Fig. 1A is a top view of a conventional fan assembly, and Fig. 1B is a cross section of Fig. 1A. As shown in Figs. 1A and 1B, the conventional fan 10 comprises a frame 11, an impeller 15, and a motor (not shown). The motor is disposed in a motor base 12 to drive the impeller 15. The frame 11 comprises a body with an opening defined therein. The motor base 12 disposed in the frame 11 is supported by a plurality of ribs 13. The ribs 13 can be cylindrical, arced, or streamlined. The impeller 15 comprises a plurality of radially arranged blades 14.

[0003] In Fig. 1B, as known, when two ribs 13 are both connected to the motor base 12 and the frame 11, they are not located along the same diameter of the impeller 15, and the cross section of the two ribs 13 would be discontinuous. For clear illustration, however, the ribs are shown in their entirety in Fig. 1B.

[0004] During rotation of the impeller 15, a gap is formed between the frame 11 and the blades 14 to prevent contact therebetween, which produces friction and noise, as shown in Fig. 1A. If the fan assembly 10, however, is applied to an optical machine to dissipate heat of the light source (lamp) L, the emitted light Lp may partially penetrate the gap between the frame 11 and the blades 14, causing light loss, as shown in Fig. 1B. Consequently, projected light intensity is reduced, and if escaped light Lp continuously illuminates other areas or objects such as a desk, the surface of the desk can be damaged by the light. The escaped light not only damages the surroundings but also causes safety concerns.

SUMMARY

[0005] Embodiments of the invention provide a fan assembly with various frames and corresponding blade edge designs to fully obstruct a light path between the blades and the frame, for preventing loss of light.

[0006] Embodiments of the invention further provide a fan assembly applicable to a light source that produces heat. The fan assembly comprises a frame and an impeller. The frame comprises an opening and a periphery of the opening has a curved surface. The impeller is disposed in the body. When light emitted by the light source enters the opening, the light is blocked from penetrating the opening by the curved surface. Moreover, the opening of the body comprises an inlet and an outlet, the emitted light entering the inlet is blocked by the curved surface, preventing light emission from out of the outlet. Embodiments of the invention further provide a fan assembly applicable to a light source that produces heat. The fan assembly comprises a frame and an impeller. The frame comprises an opening and a periphery of the opening has at least one inclined surface. The impeller is disposed in the body. When light emitted by the light source enters the opening of the frame, the light is blocked from penetrating the opening by the inclined surface. The periphery of the opening comprises multi-sectional inclined surfaces with different inclined angles. The impeller comprises blade edges, parallel to the multi-sectional inclined surfaces. Moreover, the periphery of the opening comprises multi-sectional inclined surfaces, protruded toward a central axis of the opening, and the impeller comprises blade edges facing the concave sides of the multi-sectional inclined surfaces, and the periphery of the opening exceeds a line connected by two ends of the concave sides.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Embodiments of the invention can be more fully understood by reading the subsequent detailed description in conjunction with the examples and references made to the accompanying drawings, wherein:

Fig. 1A is a top view of a conventional fan assembly;

Fig. 1B is a cross section of the conventional fan assembly;

Figs. 2A and 2B are cross sections of two fan assemblies according to a first embodiment of the invention;

Figs. 3A and 3B are cross sections of two fan assemblies according to a second embodiment of the invention;

Figs. 3C and 3D are two cross sections of another fan assemblies according to the second embodiment of the invention;

Figs. 4A to 4F are cross sections of fan assemblies according to a third embodiment of the invention; and Fig. 4G is a top view of the entire fan assembly according to the third embodiment of the invention.

DETAILED DESCRIPTION

First Embodiment

[0008] Figs. 2A and 2B are cross sections of a fan assembly according to a first embodiment of the invention. The fan assembly 20 comprises a frame 21, an impeller 24, and a motor (not shown). The motor is disposed in a motor base 22 for driving the impeller 25. The frame 21 comprises a body with an opening 26 defined therein. The periphery 27 of the opening 26 has a curved surface.

[0009] The motor base 22 is disposed in the body of the frame 21 and supported by a plurality of ribs 23. The impeller 25 comprises a plurality of radially arranged blades 24.

[0010] When the fan assembly 20 for dissipating heat is applied to a light source L producing heat such as a light bulb of a projector, light emitted by the light source L enters the opening 26, and the periphery 27 of the opening 26 has a curved surface for blocking the light, and thus, the light is prevented from penetrating the opening 26.

[0011] The periphery 27 of the opening 26 can have a curved surface depressed toward a central axis of the opening 26, as shown in Fig. 2A. The curved surface of the periphery 27 gradually contracts, and the blade edges of the impeller 25 correspond to the curved surface of the periphery 27 of the opening. Each edge of the blade 24 exceeds an imaginary line connected by two ends of the curved surface of the periphery 27. The imaginary line is represented by a dashed line in Fig. 2A. The blade edges of the impeller 25 are preferably parallel to the curved surface.

[0012] An inlet 211 and an outlet 212 are respectively formed at two ends of the opening 26 on the frame 21. The light emitted by the light source L enters the inlet 211 into the frame 21. The periphery 27 of the opening 26 having a concave surface corresponding to the blade edges can prevent light leakage from the outlet 212. Since a possible light path can be completely blocked at the location between the blades 24 and the frame 21, the problem of loss of light in a projector utilizing a conventional fan can be prevented. Furthermore, according to differing curved surfaces of the periphery 27 of the opening 26, area of the external edge of the blades 24 can be further increased, thereby increasing air pressure.

[0013] Alternatively, the periphery 27 of the opening 26 can have a convex surface protruded toward a central axis of the opening 26, as shown in Fig. 2B. The frame 21 has an inwardly concave side, and the blade edges of the impeller 25 correspond to the convex surface of the periphery 27 of the opening 26 to form concave sides separately. The concave side edge of each blade 24 is facing and corresponding to the curved surface of the periphery 27. The blade edges of the impeller 25 are preferably parallel to the convex surface. The protruded convex surface of the periphery 27 of the opening 26 exceeds an imaginary line connected by two ends of the concave side of the blade 24 edges. The imaginary line is represented by a dashed line in Fig. 2B. Thus, when the light is emitted by the light source L, the light can be blocked from penetrating the frame 21, since the protruded surface of the periphery 27 of the opening 26 corresponds to the blade edges.

[0014] Furthermore, at the inlet 211 and the outlet 212 of the fan assembly 20 in both Figs. 2A and 2B, the periphery 27 of the opening 26 or a vicinity thereof can be formed with an inclined angle or a guided inclined angle to increase the cross-sectional area of the flow path and increase air flow intake. Moreover, the curved surface preferably comprises a contracting and an expanding curved surface, or a plurality of radial contracting and expanding curved surfaces in the fan assembly 20 in Fig. 2A or in Fig. 2B. Also, any two adjacent curved surfaces can have different curvature.

Second Embodiment

[0015] Figs. 3A and 3B are cross sections of a fan assembly according to a second embodiment of the invention. The fan assembly 30 comprises a frame 31, an impeller 35, and a motor (not shown). The motor is disposed in a motor base 32 for driving the impeller 35. The frame 31 comprises a body with an opening 36 defined thereon.

[0016] The periphery of the opening 36 has at least one inclined surface. The motor base 32 is disposed in the body of the frame 31 and supported by a plurality of ribs 33. The impeller 35 comprises a plurality of radially arranged blades 34.

[0017] When the fan assembly 30 for dissipating heat is applied to a light source L producing heat such as a light bulb of a projector, light emitted by the light source L enters the opening 36, and the periphery 37 of the opening 36 has an inclined surface for blocking the light, and thus, the light is prevented from penetrating the opening 36.

[0018] The periphery 37 of the opening 36 comprises multi-sectional inclined surfaces with different inclined angles. For example, an inclined surface comprises a radially contracting inclined surface 3A₁ and a radially expanding inclined surface 3A₂, as shown in Fig. 3A.

[0019] The cross section of the frame 31 is preferably constituted of the contracting inclined surface 3A₁ and the expanding inclined surface 3A₂ from the inlet 311 to the outlet 312. An external edge of the blade 34 is parallel to the contracting inclined surface 3A₁ such that light is effectively blocked from penetrating the frame 31. Also, the expanding

inclined surface 3A₂ increases area of flow path, and increase airflow intake. Additionally, the inclined surface comprises a plurality of a combination of radially contracting inclined surfaces and radially expanding inclined surfaces, and each two adjacent inclined surfaces are connected at different angles. For example, as shown in Fig. 3B, the cross section of the frame 31 can be considered as being consisted of several inclined surfaces with different angles, such as two contracting inclined surfaces 3B₁, 3B₂, and one expanding inclined surface 3B₃, from the inlet 311 to the outlet 312. The contracting inclined surfaces 3B₁, 3B₂ can obstruct a potential light path between the blades 34 and the frame 31, and the external edges of the blades 34 are parallel to the contracting inclined surfaces 3B₂. Also, the expanding inclined surfaces 3B₃ increase area of the flow path, thereby increasing airflow intake.

[0020] Furthermore, as shown in Figs. 3C and 3D, the motor base 32 is disposed in the frame 31 and supported by a plurality of ribs 33. The motor base 32 and the ribs 33 can be disposed at the inlet 311 or the outlet 312. In Figs. 3C and 3D, the motor base 32 comprises a slope inclined radially in order to increase air outflow area, when the motor base 32 and the ribs 33 are disposed at the outlet 312. The slope can have a flat surface (Fig. 3C) or a curved surface (Fig. 3D). If the motor base 32 and the ribs 33 are disposed at the inlet 31 of the frame 31, the inclined motor base 32 can increase inflow area.

[0021] Furthermore, the inclined angle of the motor base 32 can be varied in accordance with different curvature of the cross section of the frame 31 to allow air smoothly flow between the motor base 32 and the frame 31, when the blades 34 rotate, so that noise can be reduced.

Third Embodiment

[0022] Figs. 4A to 4F are cross sections of a fan assembly according to a third embodiment of the invention. The fan 40 comprises a frame 41, an impeller 45, and a motor (not shown). The motor is disposed in a motor base 42 for driving the impeller 45. The frame 41 comprises a body with an opening 46 defined thereon. The periphery 47 of the opening 46 comprises at least one inclined surface. The motor base 42 is disposed in the frame 41 and supported by a plurality of ribs 43. The impeller 45 comprises a plurality of radially arranged blades 44. When the fan assembly 40 for dissipating heat is applied to a light source producing heat such as a light bulb of a projector, light emitted by the light source enters the opening 46, and the periphery 47 of the opening 46 has an inclined surface for blocking the light. The blades 44 have a maximum outer diameter greater than the inner diameter of the periphery 47 of the opening 46.

[0023] As a result, a potential light path between the blades 44 and the frame 41 can be obstructed by an overlapping portion between the blades 44 and the periphery 47 of the opening 46. Thus, the light is prevented from penetrating the opening 46.

[0024] The frame 41 comprises at least one inclined surface or curved surface from an inlet 411 to an outlet 412. The cross section of the frame 41 can be gradually contracting curved surface, expanding curved surface or a combination thereof. The contracting curved surface obstructs the light path between the blades 44 and the frame 41. The expanding curved surface can increase area of the flow path and increase the airflow intake. Furthermore, the external edges of the blades can be designed with various shapes in accordance with the frame 41. For example, the external edges of the blades can be flat (as shown in Figs. 4C and 4D), conical (as shown in Figs. 4E and 4F), stepped shapes (as shown in Figs. 4A and 4B), and so on.

[0025] The invention is not limited to the above embodiments. Moreover, the blades 44 not only have maximum outer diameter greater than a minimum inner diameter of the periphery 47 of the opening 46, each blade 44a also partially overlaps with an adjacent blade 44b in an axial direction of the opening 46, as shown in Fig. 4G. Fig. 4G is a top view of the entire fan assembly according to the third embodiment of the invention. The overlapping blades can further effectively block the light. Embodiments of the invention are compared to a conventional fan with a light-blocking experiment with the same size of frame from 50mm, 60mm, and 70mm frames in a black box. A 3000 Lux. of light irradiates in the black box. The amount of light passing through the fans is recorded in Table 1 as follows.

Table 1

	Frame size		
	SQ 50mm	SQ 60mm	SQ 70mm
fan assembly of the present invention	7.2 Lux	4.13 Lux	1.3 Lux
conventional fan assembly	490 Lux	329 Lux	318 Lux

[0026] In a 50mm-sized frame, the amount of light passing through the conventional fan assembly is 490 Lux, but the amount of light passing through the fan assembly of embodiments of the invention designed with light-blocking characteristics is only 7.2 Lux. Thus it demonstrates that the present invention can block light effectively.

[0027] While the invention has been described by way of example and in terms of preferred embodiment, it is to be understood that the invention is not limited thereto. To the contrary, it is intended to cover various modifications and similar arrangements (as would be apparent to those skilled in the art). Therefore, the scope of the appended claims should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements.

Claims

1. A fan assembly, applicable to a light source producing heat, the fan assembly comprising:
 - a frame comprising an opening and a periphery of the opening having a curved surface; and
 - an impeller, disposed in the frame;
 - wherein when light emitted by the light source enters the opening, the light is blocked from penetrating the opening by the curved surface.
2. The fan assembly as claimed in claim 1, wherein the opening forms an inlet and an outlet of the frame, and the emitted light entering the inlet is blocked from emitting out of the outlet by the curved surface.
3. The fan assembly as claimed in claim 2, wherein the periphery of the opening comprises an inclined angle at the inlet or the outlet, or a vicinity of the periphery comprises a guided inclined angle.
4. The fan assembly as claimed in claim 1, wherein the curved surface comprises a concave surface, depressed toward a central axis of the opening, and the impeller comprises blade edges, exceeding a line connected by two ends of the curved surface.
5. The fan assembly as claimed in claim 1, wherein the curved surface comprises a convex surface, protruded toward a central axis of the opening, the impeller comprises blade edges and a concave side facing the curved surface of the opening, and the curved surface of the periphery of the opening exceed a line connected by two ends of the concave side of the impeller.
6. The fan assembly as claimed in claim 5, wherein the periphery of the opening comprises an inclined angle or a vicinity of the periphery comprises a guided inclined angle.
7. The fan assembly as claimed in claim 1, wherein the impeller comprises blade edges, parallel to the curved surface.
8. The fan assembly as claimed in claim 1, wherein the curved surface comprises a contracting curved surface and an expanding curved surface.
9. The fan assembly as claimed in claim 1, further comprising a motor base disposed in the frame, and a plurality of ribs for supporting the motor base; wherein the motor base comprises a slope inclined radially, thereby increasing areas of air flow intake or outtake.
10. The fan assembly as claimed in claim 9, wherein the slope is flat or curved.
11. The fan assembly as claimed in claim 1, wherein the impeller has blades with a maximum outer diameter greater than a minimum inner diameter of the periphery of the opening.
12. The fan assembly as claimed in claim 11, wherein the impeller comprises blades with flat, conical, or stepped edges.
13. The fan assembly as claimed in claim 12, wherein each blade of the impeller overlaps an adjacent blade in an axial direction of the opening.
14. A fan assembly, applied to a light source producing heat, the fan assembly comprising:
 - a frame comprising an opening, and a periphery of the opening having at least one inclined surface; and
 - an impeller, disposed in the frame;
 - wherein when light emitted by the light source enters the opening, the light is blocked from penetrating the opening by the inclined surface.

15. The fan assembly as claimed in claim 14, wherein the periphery of the opening comprises multi-sectional inclined surfaces with different inclined angles.
- 5 16. The fan assembly as claimed in claim 15, wherein the impeller comprises blade edges, parallel to the multi-sectional inclined surfaces.
- 10 17. The fan assembly as claimed in claim 14, wherein the periphery of the opening comprises multi-sectional inclined surfaces, depressed toward a central axis of the opening, and the impeller comprises blade edges exceeding a line connected by two ends of the opening.
- 15 18. The fan assembly as claimed in claim 14, wherein the periphery of the opening comprises multi-sectional inclined surfaces having convex sides, protruded toward a central axis of the opening, the impeller comprises blade edges and a concave surface facing the convex sides of the multi-sectional inclined surfaces, and the periphery of the opening exceeds a line connected by two ends of the concave surface of the impeller.
- 20 19. The fan assembly as claimed in claim 14, wherein the impeller comprises blade edges, parallel to the inclined surface.
- 20 20. The fan assembly as claimed in claim 14, wherein the periphery of the opening comprises an expanding inclined surface.
- 25 21. The fan assembly as claimed in claim 14, further comprising a motor base disposed in the frame, and a plurality of ribs for supporting the motor base; wherein the motor base comprises a flat or curved slope inclined radially, thereby increasing areas of air flow intake or outtake.
- 30 22. The fan assembly as claimed in claim 14, wherein the impeller has blades with a maximum outer diameter greater than a minimum inner diameter of the periphery of the opening.
- 35 23. The fan assembly as claimed in claim 14, wherein the impeller comprises blades with flat, conical, or stepped edges.
- 40 24. The fan assembly as claimed in claim 14, wherein each blade of the impeller overlaps an adjacent blade in an axial direction of the opening.
- 45
- 50
- 55

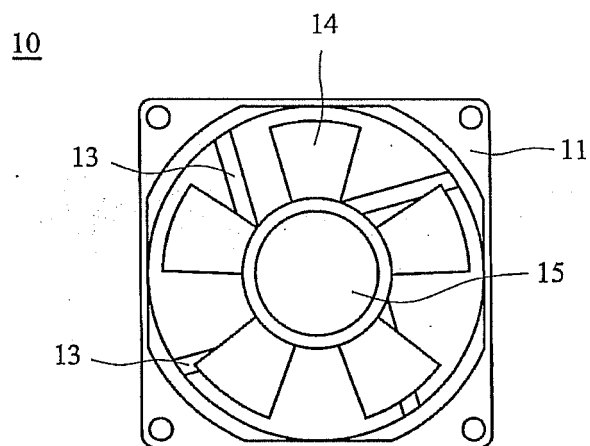


FIG. 1A (RELATED ART)

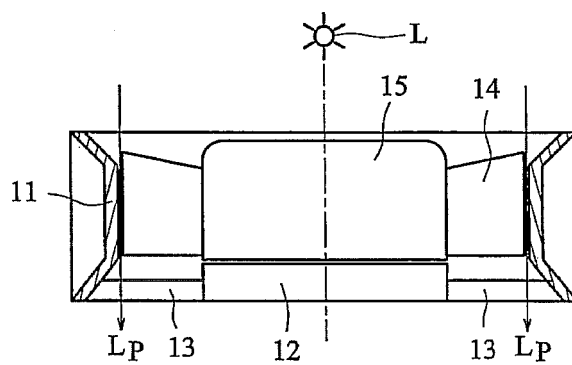


FIG. 1B (RELATED ART)

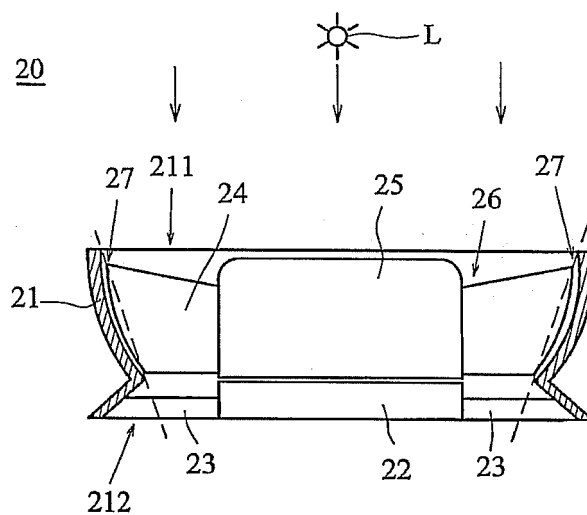


FIG. 2A

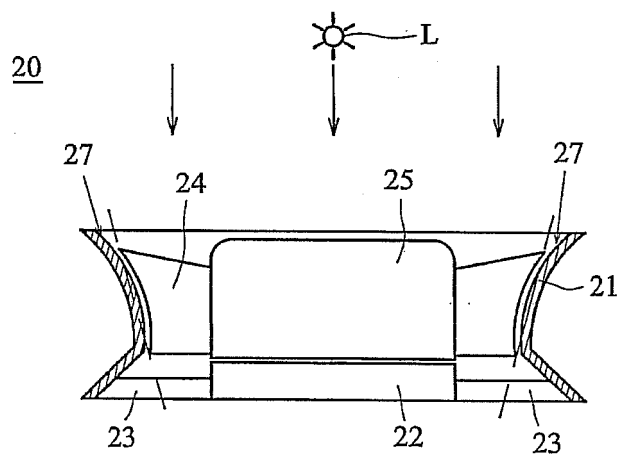


FIG. 2B

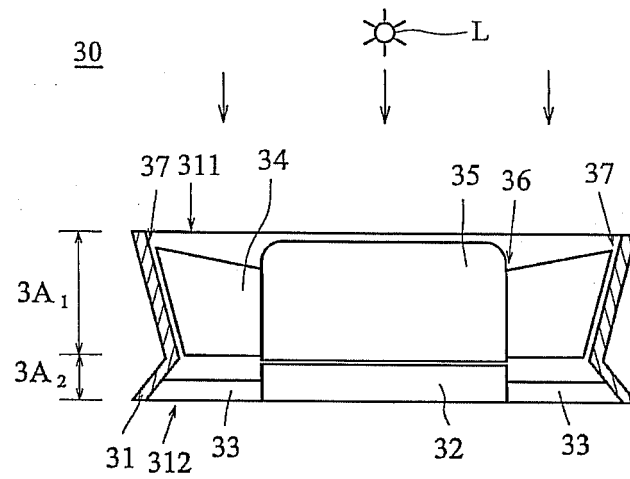


FIG. 3A

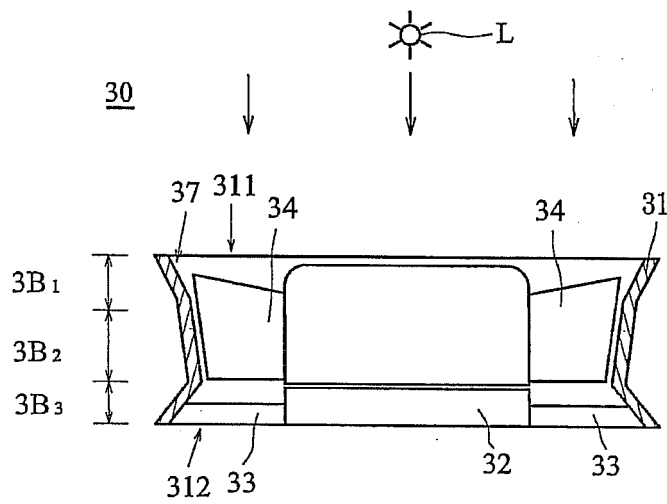


FIG. 3B

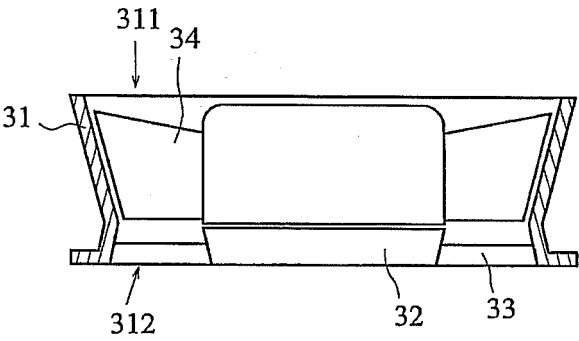


FIG. 3C

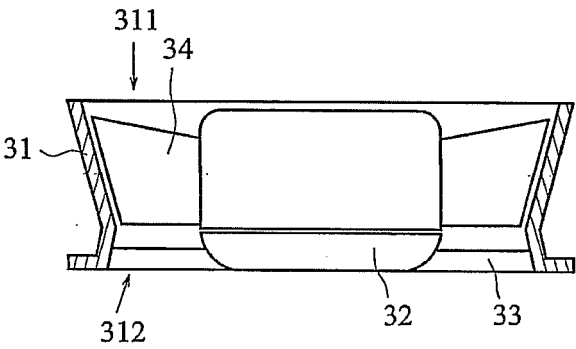


FIG. 3D

40

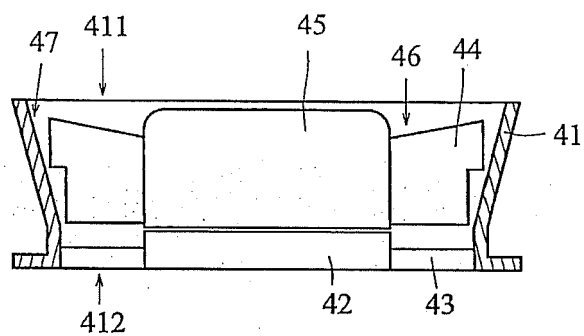


FIG. 4A

40

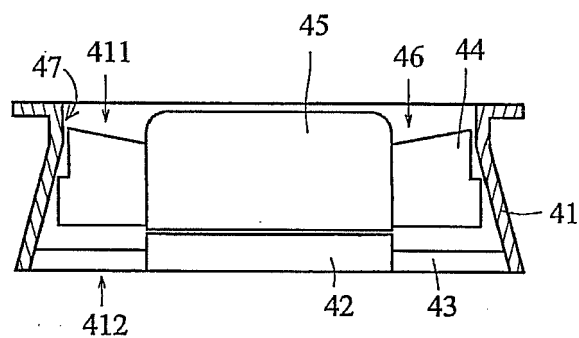


FIG. 4B

40

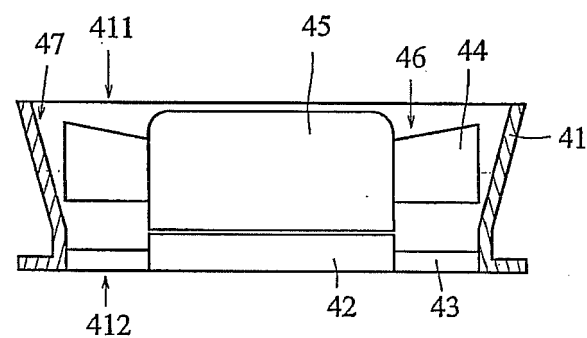


FIG. 4C

40

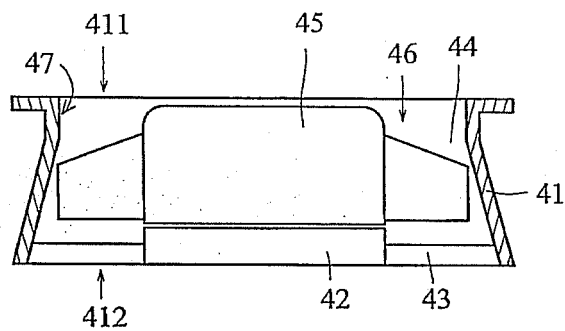


FIG. 4D

40

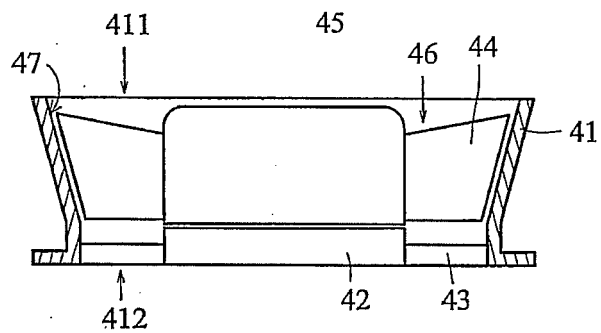


FIG. 4E

40

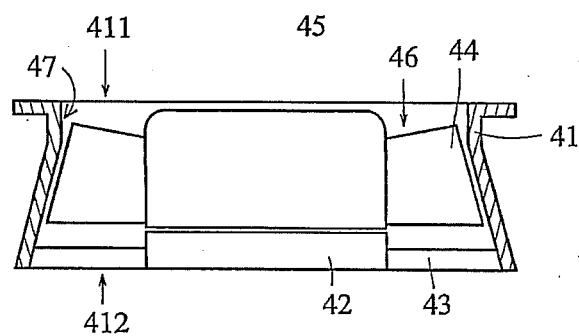


FIG. 4F

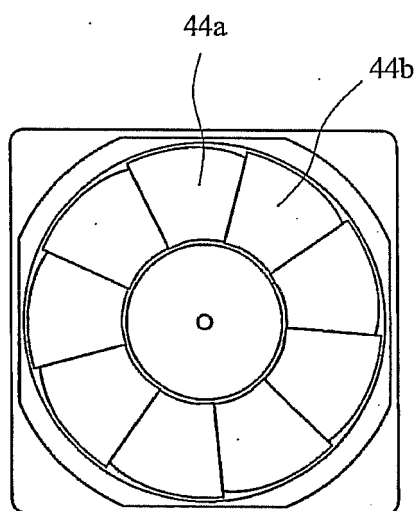


FIG. 4G