



(86) Date de dépôt PCT/PCT Filing Date: 2004/01/12
(87) Date publication PCT/PCT Publication Date: 2005/08/04
(45) Date de délivrance/Issue Date: 2012/08/07
(85) Entrée phase nationale/National Entry: 2006/07/05
(86) N° demande PCT/PCT Application No.: US 2004/000631
(87) N° publication PCT/PCT Publication No.: 2005/071212

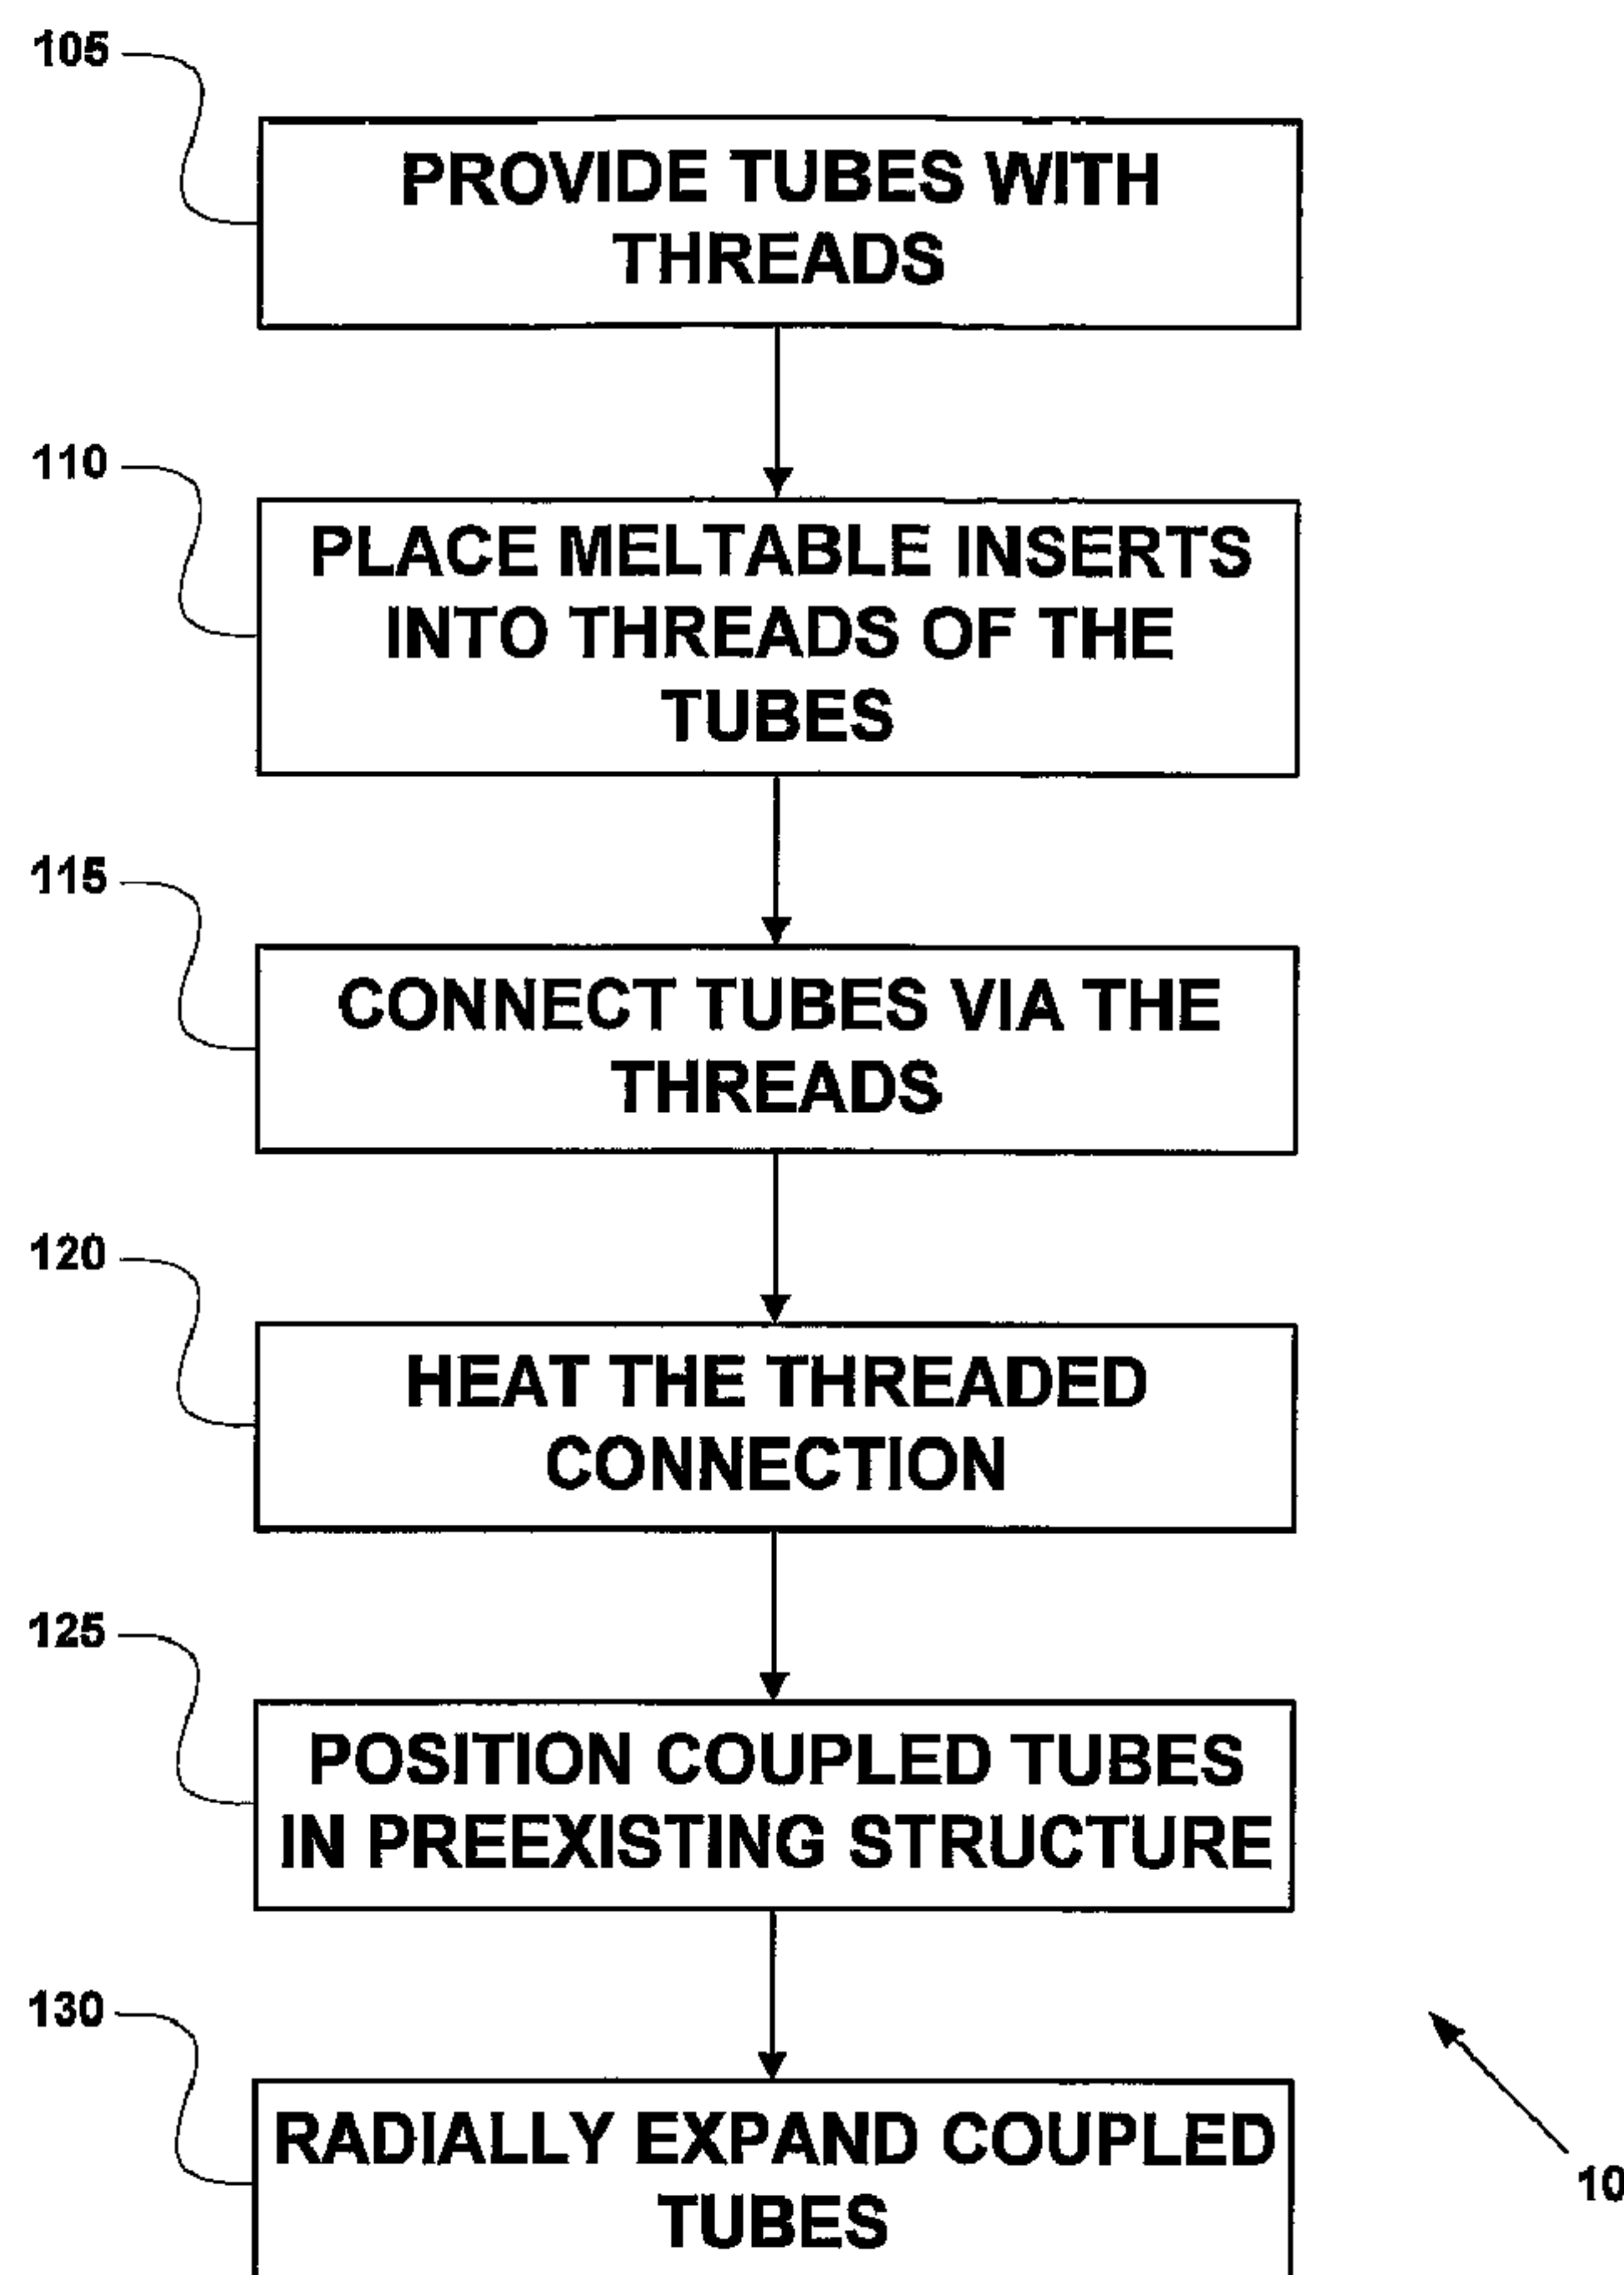
(51) Cl.Int./Int.Cl. *E21B 17/02* (2006.01),
E21B 23/00 (2006.01)

(72) Inventeurs/Inventors:
COOK, ROBERT LANCE, US;
BRISCO, DAVID PAUL, US;
STEWART, R. BRUCE, NL;
MACK, ROBERT DONALD, NL;
RING, LEV, US;
DUELL, ALAN, US;
FILIPPOV, ANDREI, US;
...

(73) Propriétaire/Owner:
SHELL OIL COMPANY, US

(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : RACCORD EXPANSIBLE
(54) Title: EXPANDABLE CONNECTION



(57) Abrégé/Abstract:

An expandable tubular liner includes a first tube, a second tube, a mechanical coupling for coupling the first and second tubes, and an insert coupled to the mechanical coupling. The insert is capable of forming a metallurgical bond with at least one of the tubes when energy is injected into the insert.



(72) Inventeurs(suite)/Inventors(continued): HAUT, RICHARD CARL, US; SHUSTER, MARK, US

Abstract

An expandable tubular liner includes a first tube, a second tube, a mechanical coupling for coupling the first and second tubes, and an insert coupled to the mechanical coupling. The insert is capable of forming a metallurgical bond with at least one of the tubes when energy is injected into the insert.

EXPANDABLE CONNECTION

Background of the Invention

[003] This invention relates generally to wellbore casings and in particular to wellbore casings that are formed using expandable tubing.

[004] Conventionally when a wellbore is created a number of casings are installed in the borehole to prevent collapse of the borehole wall and to prevent undesired outflow of drilling fluid into the formation or inflow of fluid from the formation into the borehole. The casings are limited in length often connected end-to-end by threaded connections.

[005] Other inventions have disclosed a method of forming a wellbore casing that includes installing a tubular liner and a mandrel in the borehole, injecting fluid into the borehole, and radially expanding the liner in the borehole by extruding the liner off of the mandrel.

[006] However, during the expansion, the tip ends of the threaded connections tend to peel away. The present invention is directed to overcoming this limitation of the expandable tubulars.

Summary of the Invention

[007] According to one aspect of the present invention, a method of radially expanding and plastically deforming a first tube having first threads, and a second tube having second threads is provided that includes coupling a first insert to the first threads, coupling the first threads to the second threads to form a threaded connection, heating the threaded connection sufficiently to melt at least a portion of the first insert, allowing the melted portion of the first insert to flow and solidify within the threaded connection, and radially expanding and plastically deforming the coupled first and second tubes.

[008] According to another aspect of the present invention, an expandable tubular liner is provided including a first tube having first threads, and a second tube having second threads coupled to the first threads; wherein the first threads are coupled to the second threads by the process of: coupling a first insert to the first threads, coupling the first threads to the second threads, heating the first insert sufficiently to melt at least a portion of the first insert, and cooling the melted portion of the first insert.

[009] According to another aspect of the present invention, an apparatus is provided that includes a preexisting structure coupled to a tubular liner, the tubular liner comprising a first tube including first threads, and a second tube including second threads, wherein the tubular liner is coupled to the preexisting structure by the process of: coupling a first insert to the first threads, coupling the first threads to the second threads to form a threaded connection, heating the threaded connection sufficiently to melt at least a portion of the first insert, allowing the melted portion of the first insert to flow and solidify within the threaded connection, positioning the coupled first and second tubes within a preexisting structure, and radially expanding the coupled first and second tubes into contact with the preexisting structure.

[0010] According to another aspect of the present invention, a method of radially expanding and plastically deforming a first tube having first threads, and a second tube having second threads is provided that includes coupling a first insert to the first threads, coupling the first threads to the second threads to form a threaded connection, and radially expanding and plastically deforming the coupled first and second tubes and forming a metallurgical bond between the first insert and at least one of the first and second tubes.

[0011] According to another aspect of the present invention, an expandable tubular liner is provided that includes a first tube having first threads, and a second tube having second threads coupled to the first threads; wherein the first threads are metallurgically bonded to the second threads by the process of: coupling a first insert to the first threads, coupling the first threads to the second threads, and radially expanding and plastically deforming the coupled first and second tubes.

[0012] According to another aspect of the present invention, an apparatus is provided that includes a preexisting structure coupled to a tubular liner, the tubular liner comprising a first tube including first threads, and a second tube including second threads, wherein the tubular liner is coupled to the preexisting structure by the process of: coupling a first insert to the first threads, coupling the first threads to the second threads to form a threaded connection, and radially expanding the coupled first and second tubes into contact with the preexisting structure and forming a metallurgical bond between the first insert and at least one of the first and second tubes.

[0013] According to another aspect of the present invention, A method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical connection for coupling the first and second tubes is provided that includes coupling an insert to at least one of the first and second tubes, coupling the first and second tubes together using the mechanical connection, radially expanding and plastically deforming the coupled first and second tubes, and forming a metallurgical bond between the insert and at least one of the first and second tubes by injecting energy into the insert prior to or during the radial expansion and plastic deformation of the first and second tubes.

[0014] According to another aspect of the present invention, a method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical connection for coupling the first and second tubes is provided that includes coupling an insert to at least one of the first and second tubes, coupling the first and second tubes together using the mechanical connection, radially expanding and plastically deforming the coupled first and second tubes, and forming a metallurgical bond between the insert and at least one of the first and second tubes by injecting energy into the insert prior to and during the radial expansion and plastic deformation of the first and second tubes.

[0015] According to another aspect of the present invention, a tubular assembly is provided that includes a first tube, a second tube, a mechanical connection for coupling the first and second tubes, and a metallurgical connection for coupling the first and second tubes, wherein the metallurgical connection is provided proximate the mechanical connection.

[0016] According to another aspect of the present invention, a tubular assembly is provided that includes a first tube, a second tube, a mechanical connection for coupling the first and

second tubes, and a metallurgical connection for coupling an external tubular surface of the first tube to an internal tubular surface of the second tube.

[0017] According to another aspect of the present invention, a tubular assembly is provided that includes a first tube, a second tube, a mechanical connection for coupling the first and second tubes, and a metallurgical connection for coupling an external surface of the first tube to an internal surface of the second tube, wherein the metallurgical connection is positioned within the mechanical connection.

[0018] According to another aspect of the present invention, a tubular assembly is provided that includes a first tube, a second tube, a threaded connection for coupling the first and second tubes, and a metallurgical connection for coupling an external surface of the first tube to an internal surface of the second tube, wherein the metallurgical connection is positioned within the threaded connection.

[0019] According to another aspect of the present invention, a cold-weldable insert for forming a metallurgical bond between overlapping threaded ends of adjacent tubular members is provided that includes a tapered tubular member comprising one or more threaded portions for engaging the threaded ends of the adjacent tubular members, wherein the tapered tubular member is fabricated from one or more materials capable of forming a metallurgical bond with at least one of the adjacent tubular members when energy is input into the tapered tubular member.

[0020] According to another aspect of the present invention, a method of radially expanding and plastically deforming a first tube having first threads, and a second tube having second threads is provided that includes coupling the first threads to the second threads to form a threaded connection, and radially expanding and plastically deforming the coupled first and second tubes and forming a metallurgical bond between the first and second tubes.

[0021] According to another aspect of the present invention, an expandable tubular liner is provided that includes a first tube having first threads, and a second tube having second threads coupled to the first threads; wherein the first threads are metallurgically bonded to the second threads by the process of: coupling the first threads to the second threads; and radially expanding and plastically deforming the coupled first and second tubes.

[0022] According to another aspect of the present invention, an apparatus is provided that includes a preexisting structure coupled to a tubular liner, the tubular liner comprising a first tube including first threads, and a second tube including second threads, wherein the tubular liner is coupled to the preexisting structure by the process of: coupling the first threads to the second threads to form a threaded connection, and radially expanding the coupled first and second tubes into contact with the preexisting structure and forming a metallurgical bond between the first insert and at least one of the first and second tubes.

[0023] According to another aspect of the present invention, a method of radially expanding and plastically deforming a first tube having first threads, and a second tube having second threads is provided that includes coupling the first threads to the second threads to form a threaded connection, and radially expanding and plastically deforming the coupled first and second tubes and forming a metallurgical bond between the first and second tubes.

[0024] According to another aspect of the present invention, an expandable tubular liner is provided that includes a first tube having first threads, and a second tube having second threads coupled to the first threads; wherein the first threads are metallurgically bonded to the second threads by the process of: coupling the first threads to the second threads, and radially expanding and plastically deforming the coupled first and second tubes.

[0025] According to another aspect of the present invention, an apparatus is provided that includes a preexisting structure coupled to a tubular liner, the tubular liner comprising a first tube including first threads, and a second tube including second threads, wherein the tubular liner is coupled to the preexisting structure by the process of: coupling the first threads to the second threads to form a threaded connection, and radially expanding the coupled first and second tubes into contact with the preexisting structure and forming a metallurgical bond between the first insert and at least one of the first and second tubes.

[0026] According to another aspect of the present invention, a method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes is provided that includes radially expanding and plastically deforming the coupled first and second tubes, and injecting energy into the coupled first and second tubes to form a metallurgical bond between the first and second tubes.

[0027] According to another aspect of the present invention, an expandable tubular liner is provided that includes a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes, wherein overlapping ends of the first and second tubes are metallurgically bonded by the process of: coupling the overlapping ends of the first and second tubes, radially expanding and plastically deforming the coupled first and second tubes, and injecting energy into the coupled first and second tubes.

[0028] According to another aspect of the present invention, an apparatus is provided that includes a preexisting structure coupled to a tubular liner, the tubular liner comprising a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes, wherein the tubular liner is coupled to the preexisting structure by the process of: radially expanding the coupled first and second tubes into contact with the preexisting structure, and injecting energy into the coupled first and second tubes to form a metallurgical bond between the first and second tubes.

[0029] According to another aspect of the present invention, a method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes is provided that includes positioning an insert material between the overlapping ends of the coupled first and second tubes, radially expanding and plastically deforming the coupled first and second tubes, injecting energy into the coupled first and second tubes before, during, or after the radial expansion and plastic deformation of the first and second tubes to lower a melting point of at least a portion of the insert material, and injecting thermal energy into the coupled first and second tubes to form a metallurgical bond between the insert material and at least one of the first and second coupled tubes.

[0030] According to another aspect of the present invention, an expandable tubular liner is provided that includes a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes, wherein overlapping ends of the first and second tubes are metallurgically bonded by the process of: positioning an insert material between the overlapping ends of the coupled first and second tubes, radially expanding and plastically deforming the coupled first and second tubes, injecting energy into the coupled first and second tubes before, during, or after the radial expansion and plastic deformation of the first and second tubes to lower a melting point of at least a portion of the insert material; and injecting thermal energy into the coupled first and second tubes to form a metallurgical bond between the insert material and the first and second coupled tubes.

[0031] According to another aspect of the present invention, an apparatus is provided that includes a preexisting structure coupled to a tubular liner, the tubular liner comprising a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes, wherein the tubular liner is coupled to the preexisting structure by the process of: positioning an insert material between the overlapping ends of the coupled first and second tubes, radially expanding and plastically deforming the coupled first and second tubes into engagement with the preexisting structure, injecting energy into the coupled first and second tubes before, during, or after the radial expansion and plastic deformation of the first and second tubes to lower a melting point of at least a portion of the insert material, and injecting thermal energy into the coupled first and second tubes to form a metallurgical bond between the insert material and the first and second coupled tubes.

Brief Description of the Drawings

[0032] Fig. 1 is a flow chart illustrating an exemplary embodiment of a method for coupling a plurality of tubes to a preexisting structure.

[0033] Fig. 2 is a cross-sectional illustration of an exemplary embodiment of the threaded connection between a pair of tubes, including meltable inserts.

[0034] Fig. 3 is a cross-sectional illustration of an exemplary embodiment of the meltable inserts of Fig. 2.

[0035] Fig. 4 is a cross-sectional illustration of the threaded connection of Fig. 2, illustrating the placement of induction heating coils near the locations of the meltable inserts.

[0036] Fig. 5 is a partial cross-sectional illustration of an expansion cone radially expanding the tubes of Fig. 4 into contact with a preexisting structure.

[0037] Fig. 6 is a flow chart illustrating an exemplary embodiment of a method for coupling a plurality of tubes to a preexisting structure.

[0038] Fig. 7 is a cross-sectional illustration of an exemplary embodiment of the threaded connection between a pair of tubes, including cold weldable inserts.

[0039] Fig. 8 is a cross-sectional illustration of an exemplary embodiment of the cold weldable inserts of Fig. 7.

[0040] Fig. 9 is a partial cross-sectional illustration of an expansion cone radially expanding the tubes of Fig. 8 into contact with a preexisting structure.

[0041] Fig. 10 is a flow chart illustrating an exemplary embodiment of a method for coupling a plurality of tubes to a preexisting structure.

[0042] Fig. 11 is a cross-sectional illustration of an exemplary embodiment of the threaded connection between a pair of tubes, including cold weldable inserts.

[0043] Fig. 12 is a cross-sectional illustration of an exemplary embodiment of the cold weldable inserts of Fig. 11.

[0044] Fig. 13 is a partial cross-sectional illustration of an expansion cone radially expanding the tubes of Fig. 11 into contact with a preexisting structure.

Detailed Description

[0045] In Fig. 1, an exemplary embodiment of a method 10 for forming and/or repairing a wellbore casing, pipeline, or structural support includes the steps of: (1) providing first and second tubes having first and second threads in step 105; (2) positioning a meltable insert into the first and second threads of the first and second tubes in step 110; (3) coupling the first and second threads of the first and second tubes to form a threaded connection in step 115; (4) heating the threaded connection in step 120; (5) positioning the coupled first and second tubes within a pre-existing structure in step 125; and (6) radially expanding the coupled first and second tubes into contact with the preexisting structure in step 130.

[0046] As illustrated in Fig. 2, in steps 105, 110, and 115, a first tube 205 having first threads 210 is coupled to a second tube 215 having second threads 220. Once coupled, the tubes 205 and 215 form a threaded connection 218. The tubes 205 and 215 may comprise any number of conventional tubes. In an exemplary embodiment, the tubes 205 and 215 are oilfield country tubular goods or wellbore casings available from Lone Star Steel.

[0047] A first meltable insert 225a is preferably positioned within a first channel 230 provided in the first threads 210, and a second meltable insert 225b is preferably positioned within a second channel 240 provided in the second threads 220. The threads 210 and 220 may include any number of conventional commercially available threads. In an exemplary embodiment, the first and second threads, 210 and 220, are pin and box threads available from Grant Prideco. The channels 230 and 240 may be provided within any portion of the threads 210 and 220. In an exemplary embodiment, the channels 230 and 240 are provided adjacent to the end portions of the threads 210 and 220, in order to optimally position the meltable inserts, 225a and 225b.

[0048] The meltable inserts 225 may include any number of conventional commercially available meltable inserts. In an exemplary embodiment, as illustrated in Fig. 3, the meltable inserts 225 include an inner core 305, a layer of a meltable material 310, and an outermost layer of a flux 315. In an exemplary embodiment, the melting point of the meltable material 310 is less than the melting point of the inner core 305. In an exemplary embodiment, the inner core 305 is fabricated from, and/or includes alloys of, indium, aluminum, bismuth, cadmium, lead, tin, brass, or bronze, the meltable material 310 is fabricated from, and/or includes alloys of, indium, aluminum, bismuth, cadmium, lead, tin, brass, or bronze, and the flux is fabricated from, or includes, ammonium cetyl sulfate, saturated zinc chloride in hydrochloric acid, Amasan flux C66, or 157 flux. In an exemplary embodiment, the meltable inserts 225 are ring shaped.

[0049] In an exemplary embodiment, one or more of the inserts 225 include, or constitute, one or more of the BrazeCoat™, S-Bond™, and/or WideGap™ insert materials and products available from Material Resources International in Lansdale, Pennsylvania.

[0050] As illustrated in Fig. 4, in step 120 the threaded connection 218 is heated using first and second induction coils, 405a and 405b, positioned around the vicinity of the meltable inserts, 225a and 225b. In this manner, heating is concentrated within and in the vicinity of the meltable inserts, 225a and 225b. Furthermore, the use of induction coils, 405a and 405b, as a heating element minimizes the possibility of fire. This is especially important when the present method is used to provide expandable tubular liners for oil and gas wellbores.

[0051] In an exemplary embodiment, the threaded connection 218 is sufficiently heated to melt at least a portion of the meltable inserts 225a and 225b. In an exemplary embodiment, the threaded connection 218 is heated to operating temperatures ranging from about 150 F to 1500 F for a time period of about 2-3 seconds to 2-3 minutes. In an exemplary embodiment, the melted portions of the meltable inserts, 225a and 225b, flow into at least a portion of the gap between the threads 210 and 220 of the threaded connection 218 by capillary action. In this manner, an optimal bond is formed between the first and second tubes, 205 and 215.

[0052] The melted portions of the meltable inserts, 225a and 225b, are then allowed to cool. In an exemplary embodiment, the melted portions of the meltable inserts, 225a and 225b, bond with and form a metallurgical alloy with the tubes 205 and 215. In this manner, the tubes 205 and 215 are preferably permanently bonded to one another. In this manner, the tubes 205 and 215 form a unitary tubular structure. In an exemplary embodiment, the material composition of the metallurgical bond between the tubes, 205 and 215, and the meltable inserts 225 includes aluminum, indium, bismuth, cadmium, lead, tin, brass, and/or bronze, or one or more alloys thereof, in order to provide a metallurgical bond having optimum strength.

[0053] As illustrated in Fig. 5, in steps 125 and 130, the tubes 205 and 215 are then positioned within a preexisting structure 505, and radially expanded into contact with the interior walls of the preexisting structure 505 using an expansion cone 510. The tubes 205 and 215 may be radially expanded into intimate contact with the interior walls of the preexisting structure 505, for example, by: (1) pushing or pulling the expansion cone 510 through the interior of the tubes 205 and 215; and/or (2) pressurizing the region within the tubes 205 and 215 behind the expansion cone 510 with a fluid. In an exemplary embodiment, one or more sealing members 515 are further provided on the outer surface of the tubes 205 and 215, in order to optimally seal the interface between the radially expanded tubes 205 and 215 and the interior walls of the preexisting structure 505.

[0054] In an exemplary embodiment, the radial expansion of the tubes 205 and 215 into contact with the interior walls of the preexisting structure 505, in steps 125 and 130, is performed substantially as disclosed in one or more of the following:

U.S. Patent Nos.: 7,108,072; 7,121,352; 7,168,499; 7,231,985; 7,246,667; 7,270,188; 7,275,601; 7,299,881; 7,357,190; 7,779,909; 7,611,161; 7,663,142; 7,159,667; 7,556,092; 7,055,608; 7,077,213; 7,438,132; 7,137,763; 7,350,563; 7,021,390; 7,036,582; 7,044,218; 7,048,062; 7,077,211; 7,077,213; 7,086,475; 7,108,061; 7,121,337; 7,159,665; 7,174,964; 7,185,710; 7,195,061; 7,195,064; 7,198,100; 7,216,701; 7,234,531; 7,240,728; 7,240,729; 7,350,564; 7,363,984; 7,434,618; 7,516,790; 7,552,776; 7,603,758; 7,665,532; 7,147,053; 7,108,072; 7,357,188; 7,967,064; 7,040,396 and 7,044,221.

[0055] In several alternative embodiments, the radial expansion of the tubes 205 and 215 into contact with the interior walls of the preexisting structure 505, in steps 125 and 130, is performed using one or more of the conventional commercially available radial expansion devices and/or methods available from Baker Hughes, Weatherford, and/or Enventure Global Technology L.L.C.

[0056] In several alternative embodiments, the radial expansion of the tubes 205 and 215 into contact with the interior walls of the preexisting structure 505, in steps 125 and 130, is performed using conventional commercially available radial expansion devices and/or methods such as, for example, hydroforming and/or radial expansion using rotary expansion devices.

[0057] Referring to Fig. 6, an exemplary embodiment of a method 600 for forming and/or repairing a wellbore casing, pipeline, or structural support includes the steps of: (1) providing first and second tubes having first and second threads in step 605; (2) positioning a cold weldable insert into the first and second threads of the first and second tubes in step 610; (3) coupling the first and second threads of the first and second tubes to form a threaded connection in step 615; (4) positioning the coupled first and second tubes within a pre-existing structure in step 620; and (5) radially expanding the coupled first and second tubes into contact with the preexisting structure in step 625.

[0058] As illustrated in Fig. 7, in steps 605, 610, and 615, a first tube 705 having first threads 710 is coupled to a second tube 715 having second threads 720. Once coupled, the tubes 705 and 715 form a threaded connection 725. The tubes 705

and 715 may comprise any number of conventional tubes. In an exemplary embodiment, the tubes 705 and 715 are oilfield country tubular goods or wellbore casings available from Lone Star Steel.

[0059] A first cold-weldable insert 730a is preferably positioned within a first channel 735 provided in the first threads 710, and a second cold-weldable insert 730b is preferably positioned within a second channel 740 provided in the second threads 720. The threads 710 and 720 may include any number of conventional commercially available threads. In an exemplary embodiment, the first and second threads, 710 and 720, are pin and box threads available from Grant Prideco. The channels 230 and 240 may be provided within any portion of the threads 710 and 720. In an exemplary embodiment, the channels 735 and 740 are provided adjacent to the end portions of the threads 710 and 720, in order to optimally position the cold-weldable inserts, 730a and 730b.

[0060] The cold-weldable inserts 730 may include any number of conventional commercially available cold-weldable inserts, and/or materials, capable of forming a metallurgical bond with at least one of the tubes 705 and/or 715, or permitting a metallurgical bond to be formed between the tubes, when energy is input into region proximate or constituting the cold-weldable inserts during, for example, the subsequent radial expansion and plastic deformation of the tubes 705 and 715. In an exemplary embodiment, as illustrated in Fig. 8, the cold-weldable inserts 730 include an inner core 745, a layer of a cold-weldable material 750, and an outermost layer of a flux 755. In an exemplary embodiment, the inner core 745 is fabricated from indium, aluminum, bismuth, cadmium, lead, tin, brass, and/or bronze, or alloys thereof, the layer of cold-weldable material 750 is fabricated from indium, aluminum, bismuth, cadmium, lead, tin, brass, and/or bronze, or alloys thereof, and the flux 755 is fabricated from, or includes, ammonium cetyl sulfate, saturated zinc chloride in hydrochloric aside, and/or Amasan flux C66, or 157 flux. In an exemplary embodiment, the cold-weldable inserts 730 are ring shaped.

[0061] In an exemplary embodiment, one or more of the inserts 730 include, or constitute, one or more of the BrazeCoatTM, S-BondTM, and/or WideGapTM insert materials and products available from Material Resources International in Lansdale, Pennsylvania.

[0062] In an exemplary embodiment, one or more of the cold-weldable inserts 730 include, or constitute, a Trib-Gel chemical cold welding agent. Trib-Gel is a chemical agent that permits a cold welded metallurgical joint and/or a Trib-Joint to be formed between tubular parts such as, for example, overlapping tubular members that are radially expanded and plastically deformed together by increasing the friction between the mating surfaces of the overlapping tubular members thereby inducing localized heating of the overlapping portions of the tubular members. In an exemplary embodiment, the Trib-Gel is provided and operates substantially as described in TRIB-GEL, A CHEMICAL COLD WELDING AGENT, G.R. Linzell, Technical Paper presented at: International Symposium on Exploiting Solid State Joining, TWI, Great Abington, Cambridge, U.K., 14th Sept 1999. In an exemplary embodiment, the Trib-Gel includes, or is, one or more of the conventional commercially available Trib-Gel products available from TribTech™.

[0063] As illustrated in Fig. 9, in an exemplary embodiment, in steps 620 and 625, the tubes 705 and 715 are then positioned within a preexisting structure 505, and radially expanded into contact with the interior walls of the preexisting structure 505 using an expansion cone 510. The tubes 705 and 715 may be radially expanded into intimate contact with the interior walls of the preexisting structure 505, for example, by: (1) pushing or pulling the expansion cone 510 through the interior of the tubes 705 and 715; and/or (2) pressurizing the region within the tubes 705 and 715 behind the expansion cone 510 with a fluid. In an exemplary embodiment, one or more sealing members 760 are further provided on the outer surface of the tubes 705 and 715, in order to optimally seal the interface between the radially expanded tubes 705 and 715 and the interior walls of the preexisting structure 505. In an exemplary embodiment, the energy input into the cold-weldable inserts 730 during the radial expansion and plastic deformation of the tubes 705 and 715 is sufficient to cause the cold-weldable inserts 730 to form a metallurgical bond with the tubes 705 and/or 715 and/or permit a metallurgical bond to be formed between the tubes.

[0064] In an exemplary embodiment, the radial expansion of the tubes 705 and 715 into contact with the interior walls of the preexisting structure 505, in steps 620 and 625, is performed substantially as disclosed in one or more of the following:

U.S. Patent Nos.: 7,108,072; 7,121,352; 7,168,499; 7,231,985; 7,246,667; 7,270,188; 7,275,601; 7,299,881; 7,357,190; 7,779,909; 7,611,161; 7,663,142; 7,159,667; 7,556,092; 7,055,608; 7,077,213; 7,438,132; 7,137,763; 7,350,563; 7,021,390; 7,036,582; 7,044,218; 7,048,062; 7,077,211; 7,077,213; 7,086,475; 7,108,061; 7,121,337; 7,159,665; 7,174,964; 7,185,710; 7,195,061; 7,195,064; 7,198,100; 7,216,701; 7,234,531; 7,240,728; 7,240,729; 7,350,564; 7,363,984; 7,434,618; 7,516,790; 7,552,776; 7,603,758; 7,665,532; 7,147,053; 7,108,072; 7,357,188; 7,967,064; 7,040,396 and 7,044,221.

[0065] In several alternative embodiments, the radial expansion of the tubes 705 and 715 into contact with the interior walls of the preexisting structure 505, in steps 620 and 625, is performed using one or more of the conventional commercially available radial expansion devices and/or methods available from Baker Hughes, Weatherford, and/or Enventure Global Technology L.L.C.

[0066] In several alternative embodiments, the radial expansion of the tubes 705 and 715 into contact with the interior walls of the preexisting structure 505, in steps 620 and 625, is performed using conventional commercially available radial expansion devices and/or methods such as, for example, hydroforming and/or radial expansion using rotary expansion devices.

[0067] Referring to Fig. 10, an exemplary embodiment of a method 800 for forming and/or repairing a wellbore casing, pipeline, or structural support includes the steps of: (1) providing first and second tubes having first and second threads in step 805; (2) positioning a cold weldable insert into the first and second threads of the first and second tubes in step 810; (3) coupling the first and second threads of the first and second tubes to form a threaded connection in step 815; (4) positioning the coupled first and second tubes within a pre-existing structure in step 820; and (5) radially expanding the coupled first and second tubes into contact with the preexisting structure in step 825.

[0068] As illustrated in Fig. 11, in steps 805, 810, and 815, a first tube 905 having first threads 910 is coupled to a second tube 915 having second threads 920. Once coupled, the tubes 905 and 915 form a threaded connection 925. The tubes 905 and 915 may comprise any number of conventional tubes. In an exemplary embodiment, the tubes 905 and 915 are oilfield country tubular goods or wellbore casings available from Lone Star Steel.

[0069] In an exemplary embodiment, the cold-weldable insert 730 is positioned within the threaded connection 925 between at least a portion of the threads 910 and 920 of the first and second tubes, 905 and 915, respectively. The threads 910 and 920 may include any number of conventional commercially available threads. In an exemplary embodiment, the first and second threads, 910 and 920, are pin and box threads available from Grant Prideco.

[0070] The cold-weldable inserts 930 may include any number of conventional commercially available cold-weldable inserts, and/or materials, capable of forming a metallurgical bond with at least one of the tubes 905 and/or 915, or permitting a metallurgical bond to be formed between the tubes, when energy is input into region proximate or constituting the cold-weldable inserts during, for example, the subsequent radial expansion and plastic deformation of the tubes 905 and 915. In an exemplary embodiment, as illustrated in Fig. 12, the cold-weldable inserts 930 include an inner core 935 including a cold weldable material 935, and outer layers, 940 and 945 of a flux. In an exemplary embodiment, the inner core 935 is fabricated from indium, aluminum, bismuth, cadmium, lead, tin, brass, and/or bronze, and/or alloys thereof, and the outer layers, 940 and 945, are fabricated from aluminum, indium, ~~aluminum~~, bismuth, cadmium, lead, tin, brass, and/or bronze, and/or alloys thereof. In an exemplary embodiment, the cold-weldable inserts 930 are tapered tubular members that include preformed threads.

[0071] In an exemplary embodiment, one or more of the inserts 930 include, or constitute, one or more of the BrazeCoat™, S-Bond™, and/or WideGap™ insert materials and products available from Material Resources International in Lansdale, Pennsylvania.

[0072] In an exemplary embodiment, one or more of the cold-weldable inserts 930 include or constitute a Trib-Gel chemical cold welding agent. Trib-Gel is a chemical agent that permits a cold welded metallurgical joint and/or a Trib-Joint to be formed between tubular parts such as, for example, overlapping tubular members that are radially expanded and plastically deformed together by increasing the friction between the mating surfaces of the overlapping tubular members thereby inducing localized heating of the overlapping portions of the tubular members. In an exemplary embodiment, the Trib-Gel is provided and operates substantially as described in TRIB-GEL, A CHEMICAL COLD WELDING AGENT, G.R. Linzell,

Technical Paper presented at: International Symposium on Exploiting Solid State Joining, TWI, Great Abington, Cambridge, U.K., 14th Sept 1999. In an exemplary embodiment, the Trib-Gel includes or is one or more of the conventional commercially available Trib-Gel products available from TribTech™.

[0073] As illustrated in Fig. 13, in an exemplary embodiment, in steps 820 and 825, the tubes 905 and 915 are then positioned within a preexisting structure 505, and radially expanded into contact with the interior walls of the preexisting structure 505 using an expansion cone 510. The tubes 905 and 915 may be radially expanded into intimate contact with the interior walls of the preexisting structure 505, for example, by: (1) pushing or pulling the expansion cone 510 through the interior of the tubes 905 and 915; and/or (2) pressurizing the region within the tubes 905 and 915 behind the expansion cone 510 with a fluid. In an exemplary embodiment, one or more sealing members 950 are further provided on the outer surface of the tubes 905 and 915, in order to optimally seal the interface between the radially expanded tubes 905 and 915 and the interior walls of the preexisting structure 505. In an exemplary embodiment, the energy input into the cold-weldable inserts 930 during the radial expansion and plastic deformation of the tubes 905 and 915 is sufficient to cause the cold-weldable inserts 930 to form a metallurgical bond with the tubes 905 and/or 915 and/or permit a metallurgical bond to be formed between the tubes.

[0074] In an exemplary embodiment, the radial expansion of the tubes 905 and 915 into contact with the interior walls of the preexisting structure 505, in steps 820 and 825, is performed substantially as disclosed in one or more of the following: U.S. Patent Nos.: 7,108,072; 7,121,352; 7,168,499; 7,231,985; 7,246,667; 7,270,188; 7,275,601; 7,299,881; 7,357,190; 7,779,909; 7,611,161; 7,663,142; 7,159,667; 7,556,092; 7,055,608; 7,077,213; 7,438,132; 7,137,763; 7,350,563; 7,021,390; 7,036,582; 7,044,218; 7,048,062; 7,077,211; 7,077,213; 7,086,475; 7,108,061; 7,121,337; 7,159,665; 7,174,964; 7,185,710; 7,195,061; 7,195,064; 7,198,100; 7,216,701; 7,234,531; 7,240,728; 7,240,729; 7,350,564; 7,363,984; 7,434,618; 7,516,790; 7,552,776; 7,603,758; 7,665,532; 7,147,053; 7,108,072; 7,357,188; 7,967,064; 7,040,396 and 7,044,221.

[0075] In several alternative embodiments, the radial expansion of the tubes 905 and 915 into contact with the interior walls of the preexisting structure 505, in steps 820 and 825, is performed using one or more of the conventional commercially available radial expansion devices and/or methods available from Baker Hughes, Weatherford, and/or Enventure Global Technology L.L.C.

[0076] In several alternative embodiments, the radial expansion of the tubes 905 and 915 into contact with the interior walls of the preexisting structure 505, in steps 820 and 825, is performed using conventional commercially available radial expansion devices and/or methods such as, for example, hydroforming and/or radial expansion using rotary expansion devices.

[0077] In an exemplary embodiment, the injection of energy into the cold-weldable inserts 703 and/or 930 also lower the melting point of at least a portion of the cold-weldable inserts such that the cold-weldable inserts can be melted using less injected thermal energy thereby facilitating the formation of a metallurgical bond between the cold-weldable inserts and at least one of the overlapping tubulars, 705 and 715, and/or 905 and 915, upon the combined injection of energy, of any kind, combined with the injection of thermal energy into the cold-weldable inserts.

In an exemplary embodiment, as described above, the cold-weldable inserts 730 and/or 930 that include, or constitute, a Trib-Gel chemical cold welding agent provide a cold welded metallurgical joint of the overlapping tubulars, 705 and 715, and/or 905 and 915, respectively, during the radial expansion and plastic deformation of the overlapping tubulars. In several alternative embodiments the cold-weldable inserts 730 and/or 930 that include, or constitute, a Trib-Gel chemical cold welding agent provide a cold welded metallurgical joint of the overlapping tubulars, 705 and 715, and/or 905 and 915, respectively, during the injection of energy such as, for example, mechanical, acoustic, vibrational, electrical, electro-magnetic and/or thermal energy into the overlapping tubulars prior to, during, and/or after the radial expansion and plastic deformation of the overlapping tubulars.

[0078] In several exemplary embodiments, one or more of the inserts 225, 730, or 930 are formed within, or proximate, one or more of the threaded connections 218, 725, or 925 using a conventional kinetic metallization method in order to provide a reliable method of providing the insert materials on the tubes. In an exemplary embodiment, the kinetic metallization method is provided using one or more of the

conventional commercially available products available from Inovati, Inc. in Santa Barbara, California, U.S.A.

[0079] In several exemplary embodiments, one or more of the inserts 225, 730, or 930 include, or constitute, one or more of the BrazeCoat™, S-Bond™, and/or WideGap™ insert materials and products available from Material Resources International in Lansdale, Pennsylvania.

[0080] In several exemplary embodiments, one or more of the inserts 225, 730, or 930 include, or constitute, one or more of the insert materials and products available from Spur Industries in Spokane, Washington, U.S.A.

[0081] A method of radially expanding and plastically deforming a first tube having first threads, and a second tube having second threads has been described that includes coupling a first insert to the first threads, coupling the first threads to the second threads to form a

threaded connection, heating the threaded connection sufficiently to melt at least a portion of the first insert, allowing the melted portion of the first insert to flow and solidify within the threaded connection, and radially expanding and plastically deforming the coupled first and second tubes. In an exemplary embodiment, coupling the first insert to the first threads includes placing the first insert within a portion of the first threads. In an exemplary embodiment, the first insert includes an outer layer of flux. In an exemplary embodiment, the first insert comprises an inner core comprised of a first material, and an outer layer comprised of a second material, and wherein the first material has a higher melting point than the second material. In an exemplary embodiment, the outer layer of the second material comprises an outer layer of flux. In an exemplary embodiment, the first material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze; and wherein the second material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze. In an exemplary embodiment, the first insert is fabricated from materials selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze. In an exemplary embodiment, the method further includes applying a flux to the first and second threads of the first and second tubes. In an exemplary embodiment, the first insert is a ring. In an exemplary embodiment, the method further includes placing the coupled first and second tubes within a preexisting structure before radially expanding and plastically deforming the coupled first and second tubes. In an exemplary embodiment, the preexisting structure is a wellbore casing. In an exemplary embodiment, the preexisting structure is a pipeline. In an exemplary embodiment, the preexisting structure is a structural support. In an exemplary embodiment, the method further includes, after coupling a first insert to the first threads, coupling a second insert to the second threads.

[0082] An expandable tubular liner has also been described that includes a first tube having first threads, and a second tube having second threads coupled to the first threads; wherein the first threads are coupled to the second threads by the process of: coupling a first insert to the first threads, coupling the first threads to the second threads, heating the first insert sufficiently to melt at least a portion of the first insert, and cooling the melted portion of the first insert. In an exemplary embodiment, coupling the first insert to the first threads comprises placing the first insert within a portion of the first threads. In an exemplary embodiment, the first insert includes an outer layer of flux. In an exemplary embodiment, the first insert includes an inner core composed of a first material, and an outer layer composed of a second material, and wherein the first material has a higher melting point than the second material. In an exemplary embodiment, the outer layer of the second material includes an outer layer of flux. In an exemplary embodiment, the first material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze; and the second material is

selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze. In an exemplary embodiment, the first insert is fabricated from materials selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze. In an exemplary embodiment, the liner further includes applying a flux to the first and second threads. In an exemplary embodiment, the first insert is a ring. In an exemplary embodiment, the liner further includes, after coupling a first insert to the first threads, coupling a second insert to the second threads.

[0083] An apparatus has also been described that includes a preexisting structure coupled to a tubular liner, the tubular liner comprising a first tube including first threads, and a second tube including second threads, wherein the tubular liner is coupled to the preexisting structure by the process of: coupling a first insert to the first threads, coupling the first threads to the second threads to form a threaded connection, heating the threaded connection sufficiently to melt at least a portion of the first insert, allowing the melted portion of the first insert to flow and solidify within the threaded connection, positioning the coupled first and second tubes within a preexisting structure, and radially expanding the coupled first and second tubes into contact with the preexisting structure. In an exemplary embodiment, coupling the first insert to the first threads includes placing the first insert within a portion of the first threads. In an exemplary embodiment, the first insert includes an outer layer of flux. In an exemplary embodiment, the first insert includes an inner core composed of a first material, and an outer layer composed of a second material, and wherein the first material has a higher melting point than the second material. In an exemplary embodiment, the outer layer of the second material includes an outer layer of flux. In an exemplary embodiment, the first material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze; and wherein the second material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze. In an exemplary embodiment, the first insert is fabricated from materials selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze. In an exemplary embodiment, the apparatus further includes applying a flux to the first and second threads. In an exemplary embodiment, the first insert is a ring. In an exemplary embodiment, the preexisting structure is a wellbore casing. In an exemplary embodiment, the preexisting structure is a pipeline. In an exemplary embodiment, the preexisting structure is a structural support. In an exemplary embodiment, the apparatus further includes, after the step of coupling a first insert to the first threads, the step of coupling a second insert to the second threads.

[0084] A method of radially expanding and plastically deforming a first tube having first threads, and a second tube having second threads has been described that includes coupling a first insert to the first threads, coupling the first threads to the second threads to form a

threaded connection, and radially expanding and plastically deforming the coupled first and second tubes and forming a metallurgical bond between the first insert and at least one of the first and second tubes. In an exemplary embodiment, coupling the first insert to the first threads includes placing the first insert within a portion of the first threads. In an exemplary embodiment, the first insert includes an outer layer of flux. In an exemplary embodiment, the first insert includes an inner core composed of a first material, and an outer layer composed of a second material, and wherein the first material has a higher energy point at which an energy input will cause a metallurgical reaction than the second material. In an exemplary embodiment, the outer layer of the second material includes an outer layer of flux. In an exemplary embodiment, the first material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze; and wherein the second material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze. In an exemplary embodiment, the first insert is fabricated from materials selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze. In an exemplary embodiment, the method further includes applying a flux to the first and second threads of the first and second tubes. In an exemplary embodiment, the first insert is a ring. In an exemplary embodiment, the method further includes placing the coupled first and second tubes within a preexisting structure before radially expanding and plastically deforming the coupled first and second tubes. In an exemplary embodiment, the preexisting structure is a wellbore casing. In an exemplary embodiment, the preexisting structure is a pipeline. In an exemplary embodiment, the preexisting structure is a structural support. In an exemplary embodiment, the method further includes, after coupling a first insert to the first threads, coupling a second insert to the second threads.

[0085] An expandable tubular liner has been described that includes a first tube having first threads, and a second tube having second threads coupled to the first threads; wherein the first threads are metallurgically bonded to the second threads by the process of: coupling a first insert to the first threads, coupling the first threads to the second threads, and radially expanding and plastically deforming the coupled first and second tubes. In an exemplary embodiment, coupling the first insert to the first threads includes placing the first insert within a portion of the first threads. In an exemplary embodiment, the first insert includes an outer layer of flux. In an exemplary embodiment, the first insert includes an inner core composed of a first material, and an outer layer composed of a second material, and wherein the first material has a higher energy point at which an energy input will cause a metallurgical reaction than the second material. In an exemplary embodiment, the outer layer of the second material includes an outer layer of flux. In an exemplary embodiment, the first material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze; and wherein the second material is selected from the group consisting of

aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze. In an exemplary embodiment, the first insert is fabricated from materials selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze. In an exemplary embodiment, the liner further includes applying a flux to the first and second threads. In an exemplary embodiment, the first insert is a ring. In an exemplary embodiment, the liner further includes, after coupling a first insert to the first threads, coupling a second insert to the second threads.

[0086] An apparatus has been described that includes a preexisting structure coupled to a tubular liner, the tubular liner comprising a first tube including first threads, and a second tube including second threads, wherein the tubular liner is coupled to the preexisting structure by the process of: coupling a first insert to the first threads, coupling the first threads to the second threads to form a threaded connection, and radially expanding the coupled first and second tubes into contact with the preexisting structure and forming a metallurgical bond between the first insert and at least one of the first and second tubes. In an exemplary embodiment, coupling the first insert to the first threads includes placing the first insert within a portion of the first threads. In an exemplary embodiment, the first insert includes an outer layer of flux. In an exemplary embodiment, the first insert includes an inner core composed of a first material, and an outer layer composed of a second material, and wherein the first material has a higher energy point at which an energy input will cause a metallurgical reaction than the second material. In an exemplary embodiment, the outer layer of the second material includes an outer layer of flux. In an exemplary embodiment, the first material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze; and wherein the second material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze. In an exemplary embodiment, the first insert is fabricated from materials selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze. In an exemplary embodiment, the apparatus further includes applying a flux to the first and second threads. In an exemplary embodiment, the first insert is a ring. In an exemplary embodiment, the preexisting structure is a wellbore casing. In an exemplary embodiment, the preexisting structure is a pipeline. In an exemplary embodiment, the preexisting structure is a structural support. In an exemplary embodiment, the apparatus further includes, after the step of coupling a first insert to the first threads, the step of coupling a second insert to the second threads.

[0087] A method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical connection for coupling the first and second tubes, has been described that includes coupling an insert to at least one of the first and second tubes, coupling the first and second tubes together using the mechanical connection, radially expanding and plastically

deforming the coupled first and second tubes, and forming a metallurgical bond between the insert and at least one of the first and second tubes by injecting energy into the insert prior to or during the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the injected energy includes thermal energy. In an exemplary embodiment, the injected energy includes mechanical energy. In an exemplary embodiment, the injected energy includes electrical energy. In an exemplary embodiment, the injected energy includes magnetic energy. In an exemplary embodiment, the injected energy includes electromagnetic energy. In an exemplary embodiment, the injected energy includes acoustic energy. In an exemplary embodiment, the injected energy includes vibrational energy.

[0088] A method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical connection for coupling the first and second tubes has been described that includes coupling an insert to at least one of the first and second tubes, coupling the first and second tubes together using the mechanical connection, radially expanding and plastically deforming the coupled first and second tubes, and forming a metallurgical bond between the insert and at least one of the first and second tubes by injecting energy into the insert prior to and during the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the injected energy includes thermal and mechanical energy. In an exemplary embodiment, the injected energy includes thermal and electrical energy. In an exemplary embodiment, the injected energy includes thermal and magnetic energy. In an exemplary embodiment, the injected energy includes thermal and electromagnetic energy. In an exemplary embodiment, the injected energy includes thermal and acoustic energy. In an exemplary embodiment, the injected energy includes thermal and vibrational energy.

[0089] A tubular assembly has been described that includes a first tube, a second tube, a mechanical connection for coupling the first and second tubes, and a metallurgical connection for coupling the first and second tubes, wherein the metallurgical connection is provided proximate the mechanical connection.

[0090] A tubular assembly has been described that includes a first tube, a second tube, a mechanical connection for coupling the first and second tubes, and a metallurgical connection for coupling an external tubular surface of the first tube to an internal tubular surface of the second tube.

[0091] A tubular assembly has been described that includes a first tube, a second tube, a mechanical connection for coupling the first and second tubes, and a metallurgical connection for coupling an external surface of the first tube to an internal surface of the second tube, wherein the metallurgical connection is positioned within the mechanical connection.

[0092] A tubular assembly has been described that includes a first tube, a second tube, a threaded connection for coupling the first and second tubes, and a metallurgical connection

for coupling an external surface of the first tube to an internal surface of the second tube, wherein the metallurgical connection is positioned within the threaded connection.

[0093] A cold-weldable insert for forming a metallurgical bond between overlapping threaded ends of adjacent tubular members has been described that includes a tapered tubular member comprising one or more threaded portions for engaging the threaded ends of the adjacent tubular members, wherein the tapered tubular member is fabricated from one or more materials capable of forming a metallurgical bond with at least one of the adjacent tubular members when energy is input into the tapered tubular member. In an exemplary embodiment, the injected energy is thermal energy. In an exemplary embodiment, the injected energy is mechanical energy. In an exemplary embodiment, the injected energy is electrical energy. In an exemplary embodiment, the injected energy is magnetic energy. In an exemplary embodiment, the injected energy is electromagnetic energy. In an exemplary embodiment, the injected energy is acoustic energy. In an exemplary embodiment, the injected energy is vibrational energy.

[0094] A method of radially expanding and plastically deforming a first tube having first threads, and a second tube having second threads has been described that includes coupling the first threads to the second threads to form a threaded connection, and radially expanding and plastically deforming the coupled first and second tubes and forming a metallurgical bond between the first and second tubes. In an exemplary embodiment, coupling the first threads to the second threads includes placing an insert material within the threaded connection. In an exemplary embodiment, the insert material includes a material capable of increasing a coefficient of friction between the first and second tubes during the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the method further includes placing the coupled first and second tubes within a preexisting structure before radially expanding and plastically deforming the coupled first and second tubes. In several exemplary embodiments, the preexisting structure is a wellbore casing, a pipeline, a structural support.

[0095] An expandable tubular liner has been described that includes a first tube having first threads, and a second tube having second threads coupled to the first threads; wherein the first threads are metallurgically bonded to the second threads by the process of: coupling the first threads to the second threads; and radially expanding and plastically deforming the coupled first and second tubes. In an exemplary embodiment, coupling the first threads to the second threads includes placing an insert material within the threaded connection. In an exemplary embodiment, the insert material is a material capable of increasing a coefficient of friction between the first and second tubes during the radial expansion and plastic deformation of the coupled first and second tubes.

[0096] An apparatus has been described that includes a preexisting structure coupled to a tubular liner, the tubular liner comprising a first tube including first threads, and a second tube including second threads, wherein the tubular liner is coupled to the preexisting structure by the process of: coupling the first threads to the second threads to form a threaded connection; and radially expanding the coupled first and second tubes into contact with the preexisting structure and forming a metallurgical bond between the first insert and at least one of the first and second tubes. In an exemplary embodiment, coupling the first insert to the first threads comprises placing an insert material within a portion of the threaded connection. In an exemplary embodiment, the insert material is a material capable of increasing a coefficient of friction between the first and second tubes during the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the preexisting structure is a wellbore casing. In an exemplary embodiment, the preexisting structure is a pipeline. In an exemplary embodiment, the preexisting structure is a structural support.

[0097] A method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes has been described that includes radially expanding and plastically deforming the coupled first and second tubes, and injecting energy into the coupled first and second tubes to form a metallurgical bond between the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes prior to the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes during the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes prior to and during the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes during and after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes prior to and after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes during and after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes prior to, during, and after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, coupling the first and second tubes comprises placing an insert material between the overlapping ends of the first and second tubes. In an exemplary embodiment, the insert material is a material capable of increasing a coefficient of friction between the first and second tubes during the injection of energy into the first and second tubes. In an exemplary embodiment, the method further includes placing the coupled first and second tubes within a preexisting structure

before radially expanding and plastically deforming the coupled first and second tubes. In an exemplary embodiment, the preexisting structure is a wellbore casing. In an exemplary embodiment, the preexisting structure is a pipeline. In an exemplary embodiment, the preexisting structure is a structural support. In an exemplary embodiment, the injected energy is thermal energy. In an exemplary embodiment, the injected energy is mechanical energy. In an exemplary embodiment, the injected energy is electrical energy. In an exemplary embodiment, the injected energy is magnetic energy. In an exemplary embodiment, the injected energy is electromagnetic energy. In an exemplary embodiment, the injected energy is acoustic energy. In an exemplary embodiment, the injected energy is vibrational energy.

[0098] An expandable tubular liner has also been described that includes a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes, wherein overlapping ends of the first and second tubes are metallurgically bonded by the process of: coupling the overlapping ends of the first and second tubes, radially expanding and plastically deforming the coupled first and second tubes, and injecting energy into the coupled first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes prior to the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes during the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes prior to and during the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes during and after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes prior to and after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes prior to, during, and after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, coupling the overlapping ends of the first and second tubes includes placing an insert material between the overlapping ends of the first and second tubes. In an exemplary embodiment, the insert material comprises a material capable of increasing a coefficient of friction between the first and second tubes during the injection of energy into the first and second tubes. In an exemplary embodiment, the liner further includes placing the coupled first and second tubes within a preexisting structure before radially expanding and plastically deforming the coupled first and second tubes. In an exemplary embodiment, the preexisting structure is a wellbore casing. In an exemplary embodiment, the preexisting structure is a pipeline. In an exemplary embodiment, the preexisting structure is a

structural support. In an exemplary embodiment, the injected energy is thermal, mechanical, electrical, magnetic, electromagnetic, acoustic, and/or vibrational energy.

[0099] An apparatus has been described that includes a preexisting structure coupled to a tubular liner, the tubular liner comprising a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes, wherein the tubular liner is coupled to the preexisting structure by the process of: radially expanding the coupled first and second tubes into contact with the preexisting structure, and injecting energy into the coupled first and second tubes to form a metallurgical bond between the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes prior to the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes during the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes prior to and during the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes during and after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes prior to and after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, the energy is injected into the coupled first and second tubes prior to, during, and after the radial expansion and plastic deformation of the first and second tubes. In an exemplary embodiment, coupling the overlapping ends of the first and second tubes includes placing an insert material between the overlapping ends of the first and second tubes. In an exemplary embodiment, the insert material includes a material capable of increasing a coefficient of friction between the first and second tubes during the injection of energy into the first and second tubes. In an exemplary embodiment, the apparatus further includes placing the coupled first and second tubes within a preexisting structure before radially expanding and plastically deforming the coupled first and second tubes. In several exemplary embodiments, the preexisting structure is a wellbore casing, a pipeline, and/or a structural support. In several exemplary embodiments, the injected energy includes thermal, mechanical, electrical, magnetic, electromagnetic, acoustic, and/or vibrational energy.

[00100] A method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes has been described that includes positioning an insert material between the overlapping ends of the coupled first and second tubes, radially expanding and plastically deforming the coupled first and second tubes, injecting energy into the coupled first and second tubes before, during,

or after the radial expansion and plastic deformation of the first and second tubes to lower a melting point of at least a portion of the insert material, and injecting thermal energy into the coupled first and second tubes to form a metallurgical bond between the insert material and at least one of the first and second coupled tubes.

[00101] An expandable tubular liner has been described that includes a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes, wherein overlapping ends of the first and second tubes are metallurgically bonded by the process of: positioning an insert material between the overlapping ends of the coupled first and second tubes, radially expanding and plastically deforming the coupled first and second tubes, injecting energy into the coupled first and second tubes before, during, or after the radial expansion and plastic deformation of the first and second tubes to lower a melting point of at least a portion of the insert material, and injecting thermal energy into the coupled first and second tubes to form a metallurgical bond between the insert material and the first and second coupled tubes.

[00102] An apparatus has been described that includes a preexisting structure coupled to a tubular liner, the tubular liner comprising a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes, wherein the tubular liner is coupled to the preexisting structure by the process of: positioning an insert material between the overlapping ends of the coupled first and second tubes, radially expanding and plastically deforming the coupled first and second tubes into engagement with the preexisting structure, injecting energy into the coupled first and second tubes before, during, or after the radial expansion and plastic deformation of the first and second tubes to lower a melting point of at least a portion of the insert material, and injecting thermal energy into the coupled first and second tubes to form a metallurgical bond between the insert material and the first and second coupled tubes.

[00103] It is understood that variations may be made in the foregoing without departing from the scope of the invention. For example, the teachings of the present illustrative embodiments may be used to provide a wellbore casing, a pipeline, and/or a structural support. In addition, other types of inserts may be substituted for the cold-weldable inserts 730 and/or 930 that are capable of forming a metallurgical bond with the tubes 705 and/or 715 and/or 905 and/or 915 when energy is input into the inserts. Furthermore, other methods of inputting energy into the cold-weldable inserts 730 and/or 930 may substituted for, or used in addition to, the radial expansion and plastic deformation of the tubes 705 and 715 such as, for example, electrical, mechanical, thermal, vibrational, electro-magnetic, and/or magnetic energy, which may be injected into the inserts before and/or during and/or after the radial expansion and plastic deformation of the tubes. In addition, other forms of mechanical connections may used instead of, or in combination with, the threaded connections 218 and/or

725 and/or 925. Furthermore, one or more of the inserts 225 and/or 730 and/or 930 may be positioned proximate and/or within the threaded connections 218 and/or 725 and/or 925 in order to provide a metallurgical connection between the tubes 205 and/or 215 and/or 705 and/or 715 and/or 905 and/or 915. In addition, in an exemplary embodiment, one or more of the inserts, 730 and/or 930, may include a polymer adhesive that is activated to form a bond between the tubes 705 and/or 715 and/or 905 and/or 915 when energy is injected into the inserts. Examples of such polymer adhesives include, for example, anaerobic adhesives such as those commercially available from Permabond L.L.C. Finally, the elements and teachings of the various illustrative embodiments may be combined in whole or in part in some or all of the illustrative embodiments.

[00104] Although this detailed description has shown and described illustrative embodiments of the invention, this description contemplates a wide range of modifications, changes, and substitutions. In some instances, one may employ some features of the present invention without a corresponding use of the other features.

Claims

1. A method of radially expanding and plastically deforming a first tube having first threads, and a second tube having second threads, comprising:
 - coupling a first insert to the first threads;
 - coupling the first threads to the second threads to form a threaded connection;
 - heating the threaded connection to melt at least a portion of the first insert;
 - allowing the melted portion of the first insert to flow and solidify within the threaded connection; and
 - radially expanding and plastically deforming the coupled first and second tubes;wherein the first insert comprises an inner core comprised of a first material, and an outer layer comprised of a second material, and wherein the first material has a higher melting point than the second material.
2. The method of claim 1, wherein coupling the first insert to the first threads comprises placing the first insert within a portion of the first threads.
3. The method of claim 1, wherein the first insert comprises an outer layer of flux.
4. The method of claim 1, wherein the outer layer of the second material comprises an outer layer of flux.
5. The method of claim 1, wherein the first material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze; and
 - wherein the second material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze.

6. The method of claim 1, wherein the first insert is fabricated from materials selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze.
7. The method of claim 1, further comprising applying a flux to the first and second threads of the first and second tubes.
8. The method of claim 1, wherein the first insert comprises a ring.
9. The method of claim 1, further comprising placing the coupled first and second tubes within a preexisting structure before radially expanding and plastically deforming the coupled first and second tubes.
10. The method of claim 9, wherein the preexisting structure comprises a wellbore casing.
11. The method of claim 9, wherein the preexisting structure comprises a pipeline.
12. The method of claim 9, wherein the preexisting structure comprises a structural support.
13. The method of any one of claims 1-12, further comprising, after coupling a first insert to the first threads, coupling a second insert to the second threads.
14. A method of radially expanding and plastically deforming a first tube having first threads, and a second tube having second threads, comprising:
 - coupling a first insert to the first threads;
 - coupling the first threads to the second threads to form a threaded connection;

radially expanding and plastically deforming the coupled first and second tubes to form a metallurgical bond between the first insert and at least one of the first and second tubes.

15. The method of claim 14, wherein coupling the first insert to the first threads comprises placing the first insert within a portion of the first threads.

16. The method of claim 14, wherein the first insert comprises an outer layer of flux.

17. The method of claim 14, wherein the first insert comprises an inner core comprised of a first material, and an outer layer comprised of a second material, and wherein the first material has a higher energy point at which an energy input will cause a metallurgical reaction than the second material.

18. The method of claim 17, wherein the outer layer of the second material comprises an outer layer of flux.

19. The method of claim 17, wherein the first material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze; and

wherein the second material is selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze.

20. The method of claim 14, wherein the first insert is fabricated from materials selected from the group consisting of aluminum, indium, bismuth, cadmium, lead, tin, brass, and bronze.

21. The method of claim 14, further comprising applying a flux to the first and second threads of the first and second tubes.

22. The method of claim 14, wherein the first insert comprises a ring.

23. The method of claim 14, further comprising placing the coupled first and second tubes within a preexisting structure before radially expanding and plastically deforming the coupled first and second tubes.
24. The method of claim 23, wherein the preexisting structure comprises a wellbore casing.
25. The method of claim 23, wherein the preexisting structure comprises a pipeline.
26. The method of claim 23, wherein the preexisting structure comprises a structural support.
27. The method of any one of claims 14-26, further comprising, after coupling a first insert to the first threads, coupling a second insert to the second threads.
28. A method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical connection for coupling the first and second tubes, comprising:
- coupling an insert to at least one of the first and second tubes;
 - coupling the first and second tubes together using the mechanical connection;
 - radially expanding and plastically deforming the coupled first and second tubes; and
 - forming a metallurgical bond between the insert and at least one of the first and second tubes by injecting energy into the insert during the radial expansion and plastic deformation of the first and second tubes.
29. The method of claim 28, wherein the injected energy comprises thermal energy.

30. The method of claim 28, wherein the injected energy comprises mechanical energy.

31. The method of claim 28, wherein the injected energy comprises electrical energy.

32. The method of claim 28, wherein the injected energy comprises magnetic energy.

33. The method of claim 28, wherein the injected energy comprises electromagnetic energy.

34. The method of claim 28, wherein the injected energy comprises acoustic energy.

35. The method of claim 28, wherein the injected energy comprises vibrational energy.

36. A method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical connection for coupling the first and second tubes, comprising:

coupling an insert to at least one of the first and second tubes;

coupling the first and second tubes together using the mechanical connection;

radially expanding and plastically deforming the coupled first and second tubes; and

forming a metallurgical bond between the insert and at least one of the first and second tubes by injecting energy into the insert prior to and during the radial expansion and plastic deformation of the first and second tubes.

37. The method of claim 36, wherein the injected energy comprises thermal and mechanical energy.

38. The method of claim 36, wherein the injected energy comprises thermal and electrical energy.

39. The method of claim 36, wherein the injected energy comprises thermal and magnetic energy.

40. The method of claim 36, wherein the injected energy comprises thermal and electromagnetic energy.

41. The method of claim 36, wherein the injected energy comprises thermal and acoustic energy.

42. The method of claim 36, wherein the injected energy comprises thermal and vibrational energy.

43. A method of radially expanding and plastically deforming a first tube having first threads, and a second tube having second threads, comprising:
coupling the first threads to the second threads to form a threaded connection; and
radially expanding and plastically deforming the coupled first and second tubes and thereby forming a metallurgical bond between the first and second tubes.

44. The method of claim 43, wherein coupling the first threads to the second threads comprises placing an insert material within the threaded connection.

45. The method of claim 43, wherein the insert material comprises a material capable of increasing a coefficient of friction between the first and second tubes during the radial expansion and plastic deformation of the first and second tubes.

46. The method of claim 43, further comprising placing the coupled first and second tubes within a preexisting structure before radially expanding and plastically deforming the coupled first and second tubes.
47. The method of claim 46, wherein the preexisting structure comprises a wellbore casing.
48. The method of claim 46, wherein the preexisting structure comprises a pipeline.
49. The method of claim 46, wherein the preexisting structure comprises a structural support.
50. The method of claim 28 or 36 wherein injecting energy into the insert during the radial expansion and plastic deformation of the first and second tubes comprises:
increasing a coefficient of friction between the first and second tubes during the radial expansion and plastic deformation of the first and second tubes.
51. The method of claim 28 or 36 wherein injecting energy into the insert during the radial expansion and plastic deformation of the first and second tubes comprises:
injecting localized thermal energy into the first and second tubes during the radial expansion and plastic deformation of the first and second tubes.
52. A method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes, comprising:
radially expanding and plastically deforming the coupled first and second tubes; and

injecting energy into the coupled first and second tubes to form a metallurgical bond between the first and second tubes;
wherein the metallurgical bond is a cold welded bond.

53. The method of claim 52, wherein the energy is injected into the coupled first and second tubes prior to the radial expansion and plastic deformation of the first and second tubes.

54. The method of claim 52, wherein the energy is injected into the coupled first and second tubes during the radial expansion and plastic deformation of the first and second tubes.

55. The method of claim 52, wherein the energy is injected into the coupled first and second tubes after the radial expansion and plastic deformation of the first and second tubes.

56. The method of claim 52, wherein the energy is injected into the coupled first and second tubes prior to and during the radial expansion and plastic deformation the first and second tubes.

57. The method of claim 52, wherein the energy is injected into the coupled first and second tubes during and after the radial expansion and plastic deformation of the first and second tubes.

58. The method of claim 52, wherein the energy is injected into the coupled first and second tubes prior to and after the radial expansion and plastic deformation of the first and second tubes.

59. The method of claim 52, wherein the energy is injected into the coupled first and second tubes prior to, during, and after the radial expansion and plastic deformation of the first and second tubes.

60. The method of claim 52, wherein coupling the first and second tubes comprises placing an insert material between the overlapping ends of the first and second tubes.
61. The method of claim 60, wherein the insert material comprises a material capable of increasing a coefficient of friction between the first and second tubes during the injection of energy into the first and second tubes.
62. The method of claim 52, further comprising placing the coupled first and second tubes within a preexisting structure before radially expanding and plastically deforming the coupled first and second tubes.
63. The method of claim 62, wherein the preexisting structure comprises a wellbore casing.
64. The method of claim 62, wherein the preexisting structure comprises a pipeline.
65. The method of claim 62, wherein the preexisting structure comprises a structural support.
66. The method of claim 52, wherein the injected energy comprises thermal energy.
67. The method of claim 52, wherein the injected energy comprises mechanical energy.
68. The method of claim 52, wherein the injected energy comprises electrical energy.
69. The method of claim 52, wherein the injected energy comprises magnetic energy.

70. The method of claim 52, wherein the injected energy comprises electromagnetic energy.

71. The method of claim 52, wherein the injected energy comprises acoustic energy.

72. The method of claim 52, wherein the injected energy comprises vibrational energy.

73. A method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes, comprising:

- positioning an insert material between the overlapping ends of the coupled first and second tubes;

- radially expanding and plastically deforming the coupled first and second tubes;

- injecting energy into the coupled first and second tubes during the radial expansion and plastic deformation of the first and second tubes to lower a melting point of at least a portion of the insert material; and

- injecting energy into the coupled first and second tubes to form a metallurgical bond between the insert material and at least one of the first and second coupled tubes.

74. A method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical connection for coupling the first and second tubes, comprising:

- coupling an insert to at least one of the first and second tubes;

- coupling the first and second tubes together using the mechanical connection;

- radially expanding and plastically deforming the coupled first and second tubes; and

forming a metallurgical bond between the insert and at least one of the first and second tubes by injecting energy into the insert prior to and during the radial expansion and plastic deformation of the first and second tubes.

75. A method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical connection for coupling the first and second tubes, comprising:

coupling an insert to at least one of the first and second tubes;

coupling the first and second tubes together using the mechanical connection;

radially expanding and plastically deforming the coupled first and second tubes; and

forming a metallurgical bond between the insert and at least one of the first and second tubes by injecting energy into the insert prior to or during the radial expansion and plastic deformation of the first and second tubes;

wherein the metallurgical bond is a cold welded bond.

76. A method of radially expanding and plastically deforming a first tube, a second tube, and a mechanical coupling for coupling overlapping ends of the first and second tubes, comprising:

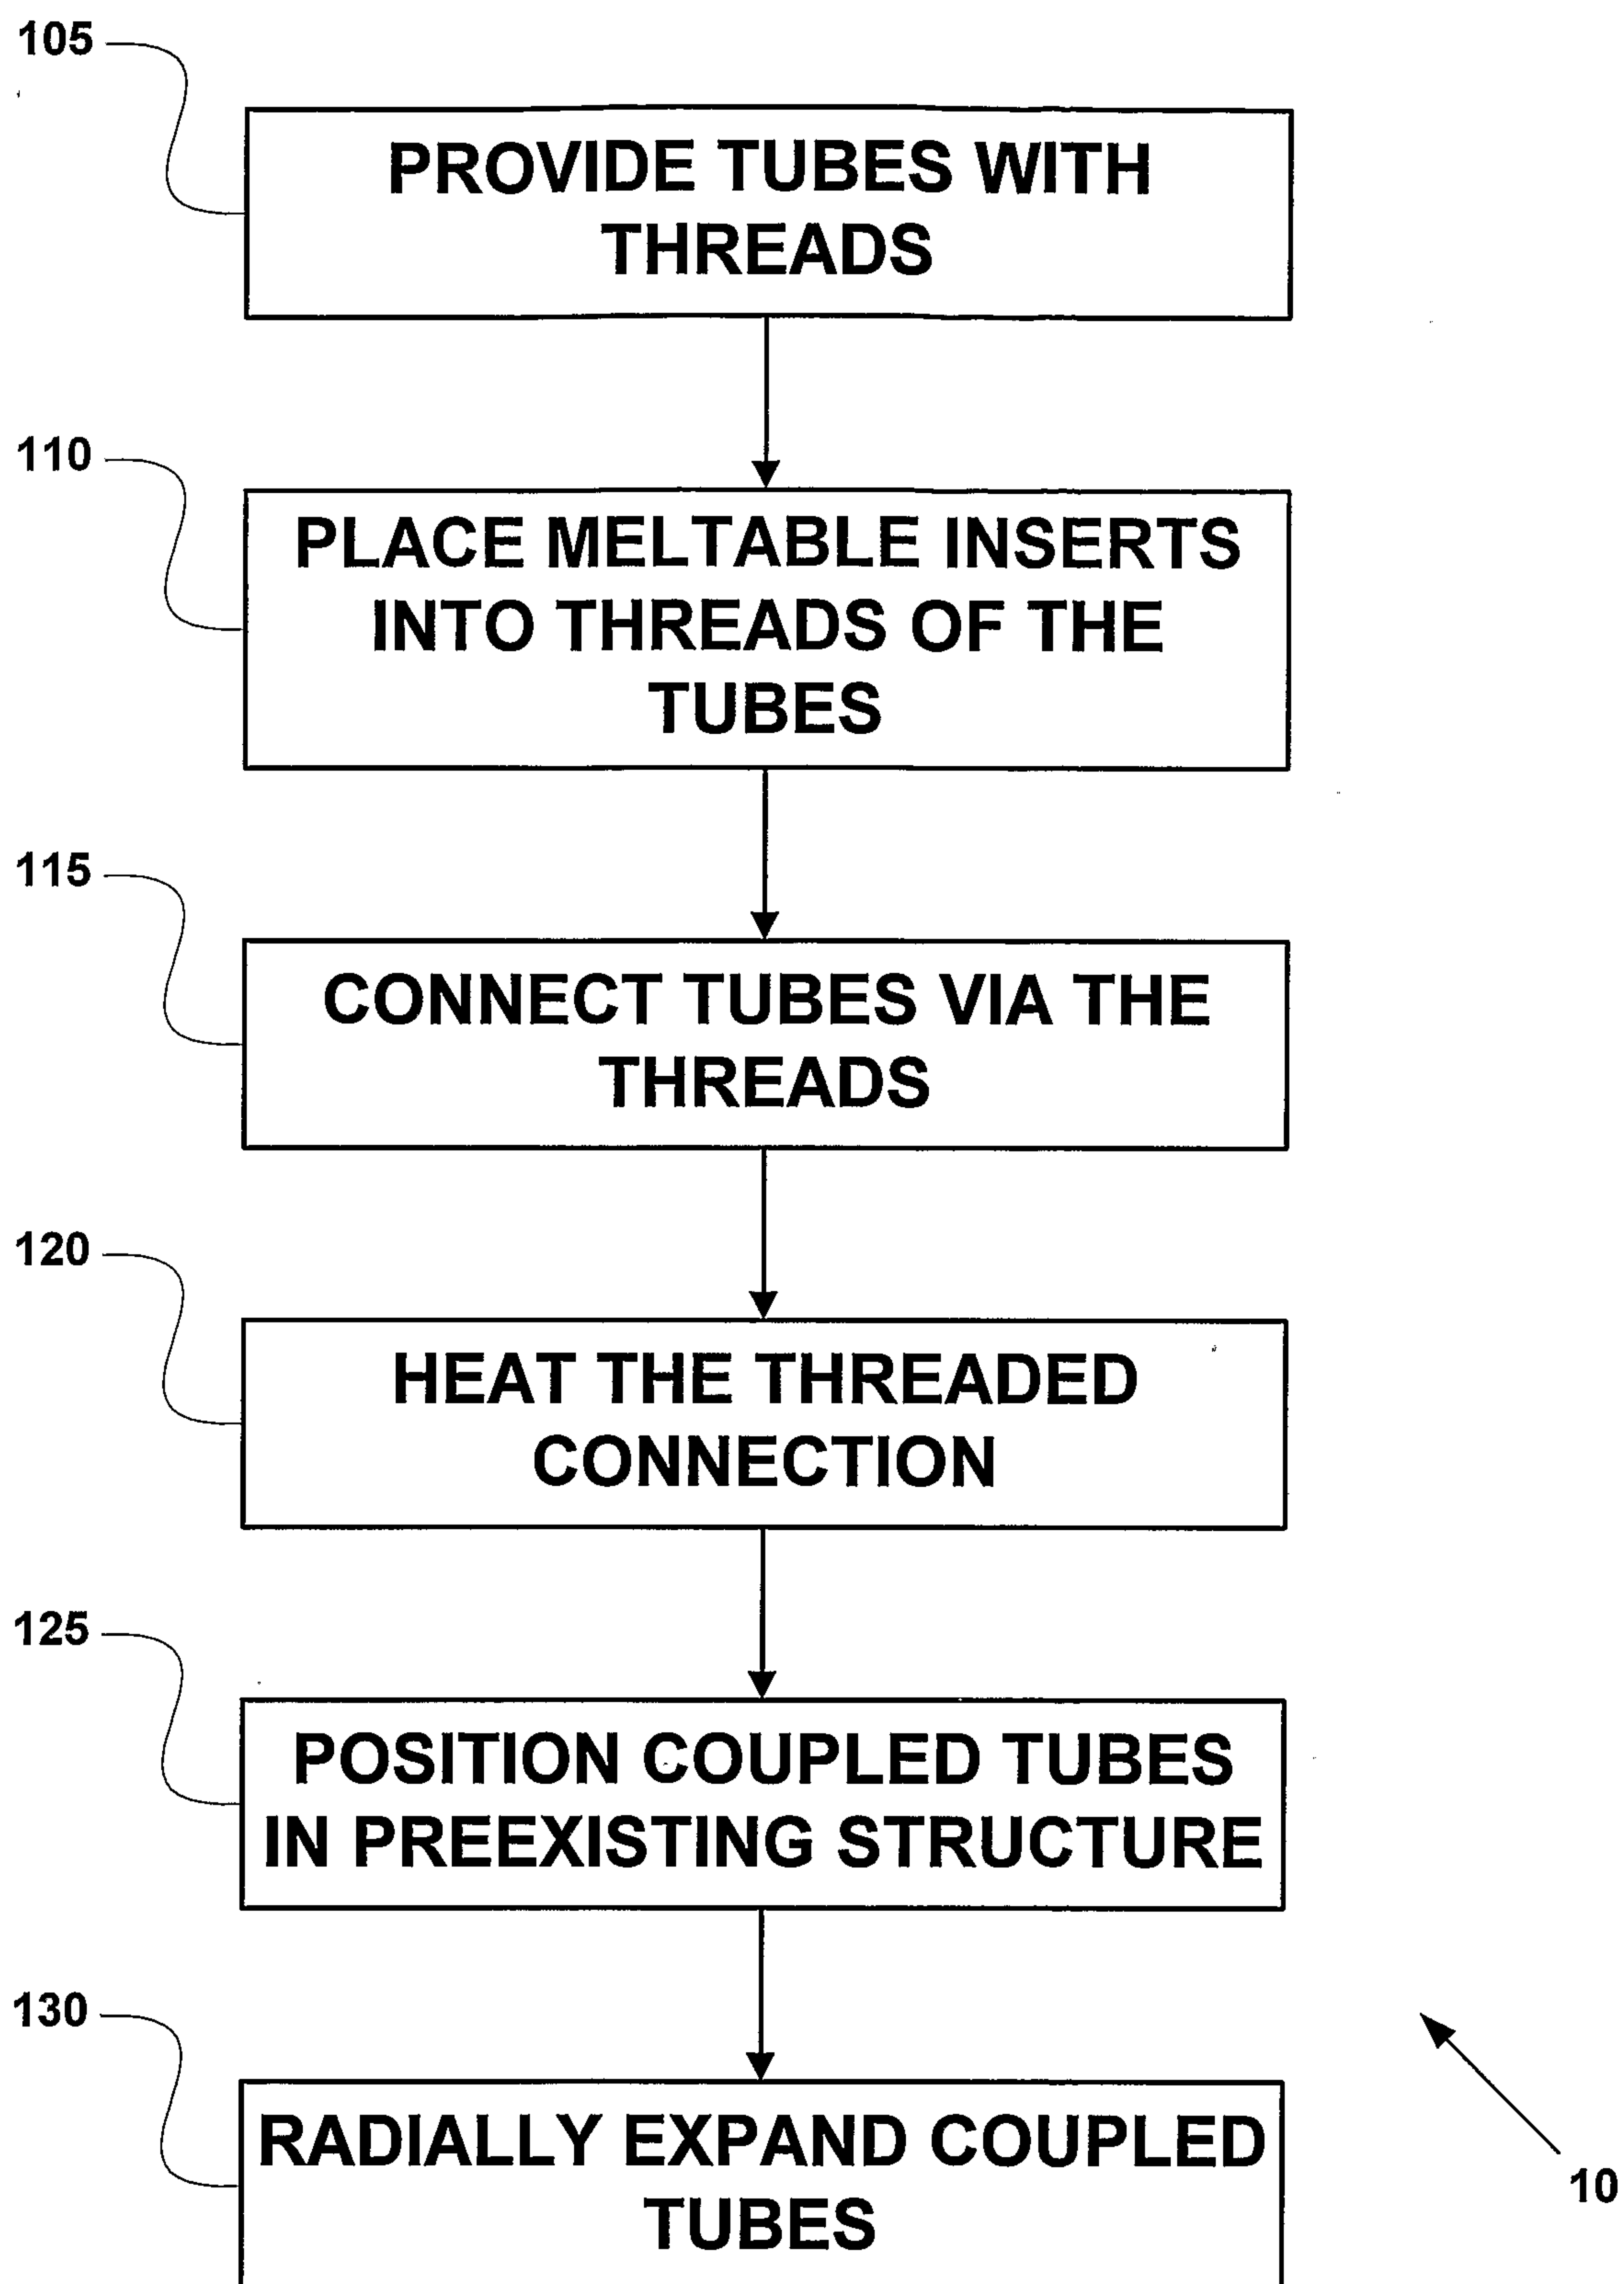
positioning an insert material between the overlapping ends of the coupled first and second tubes;

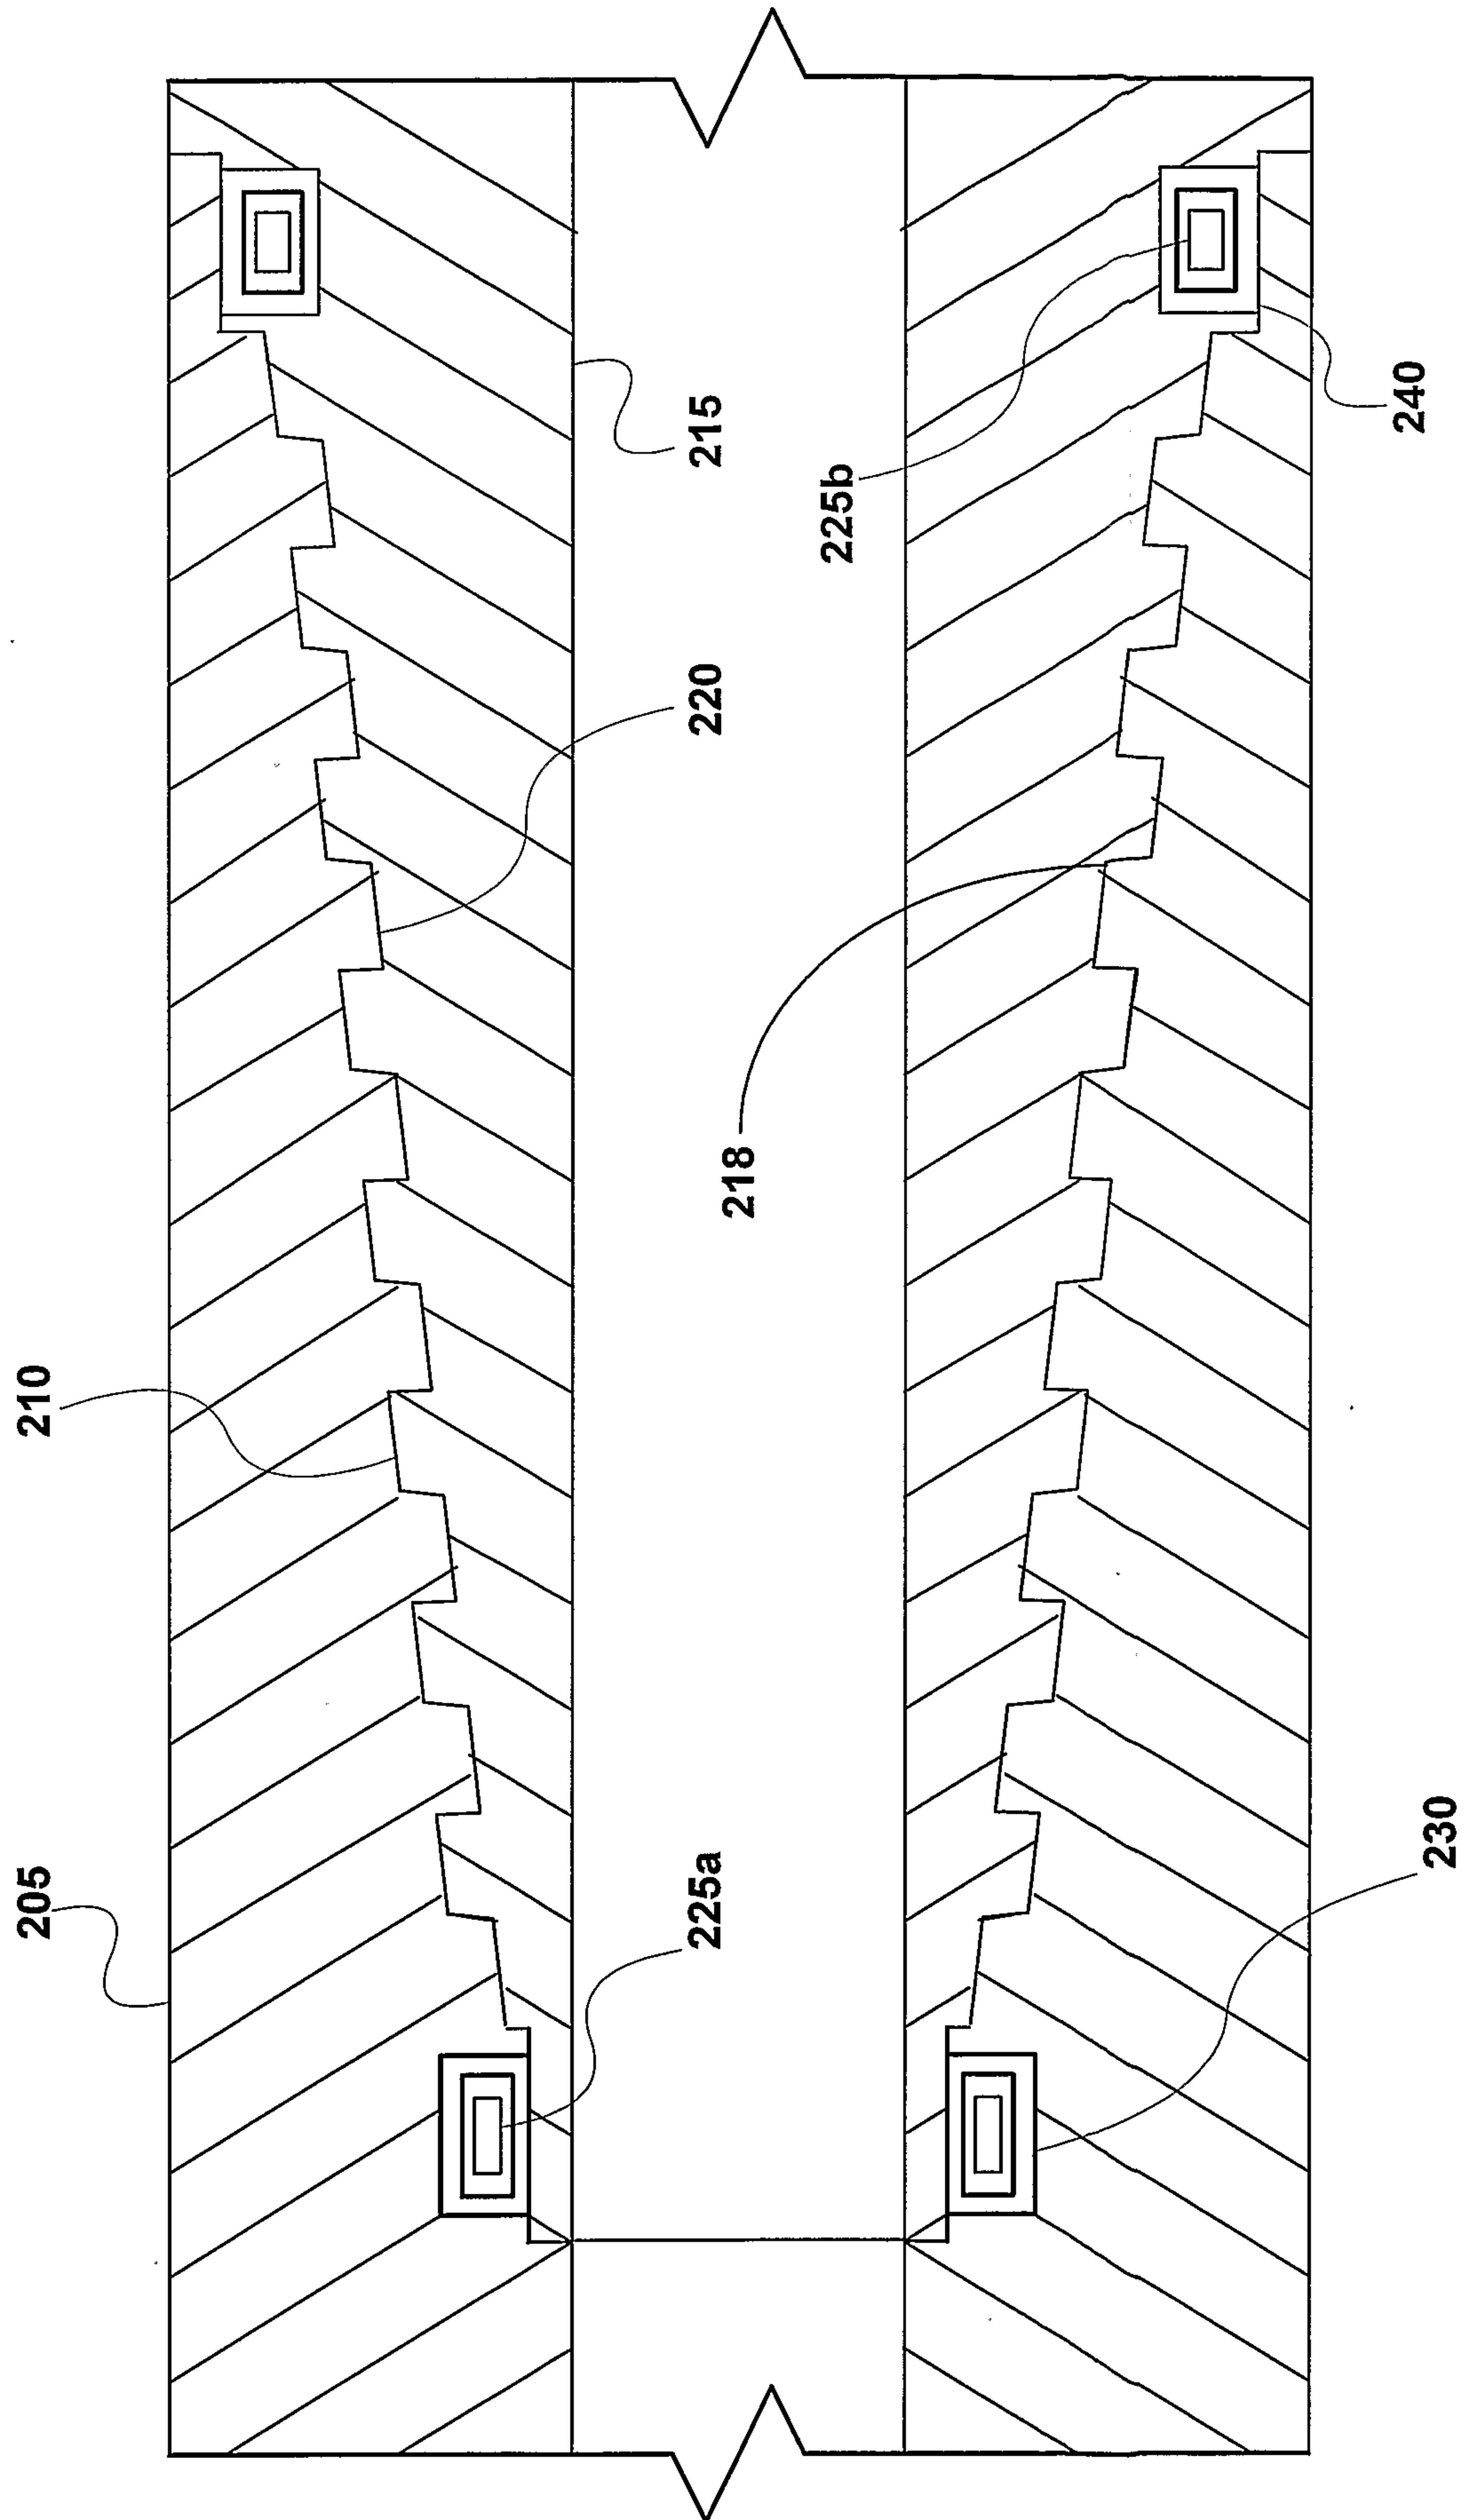
radially expanding and plastically deforming the coupled first and second tubes;

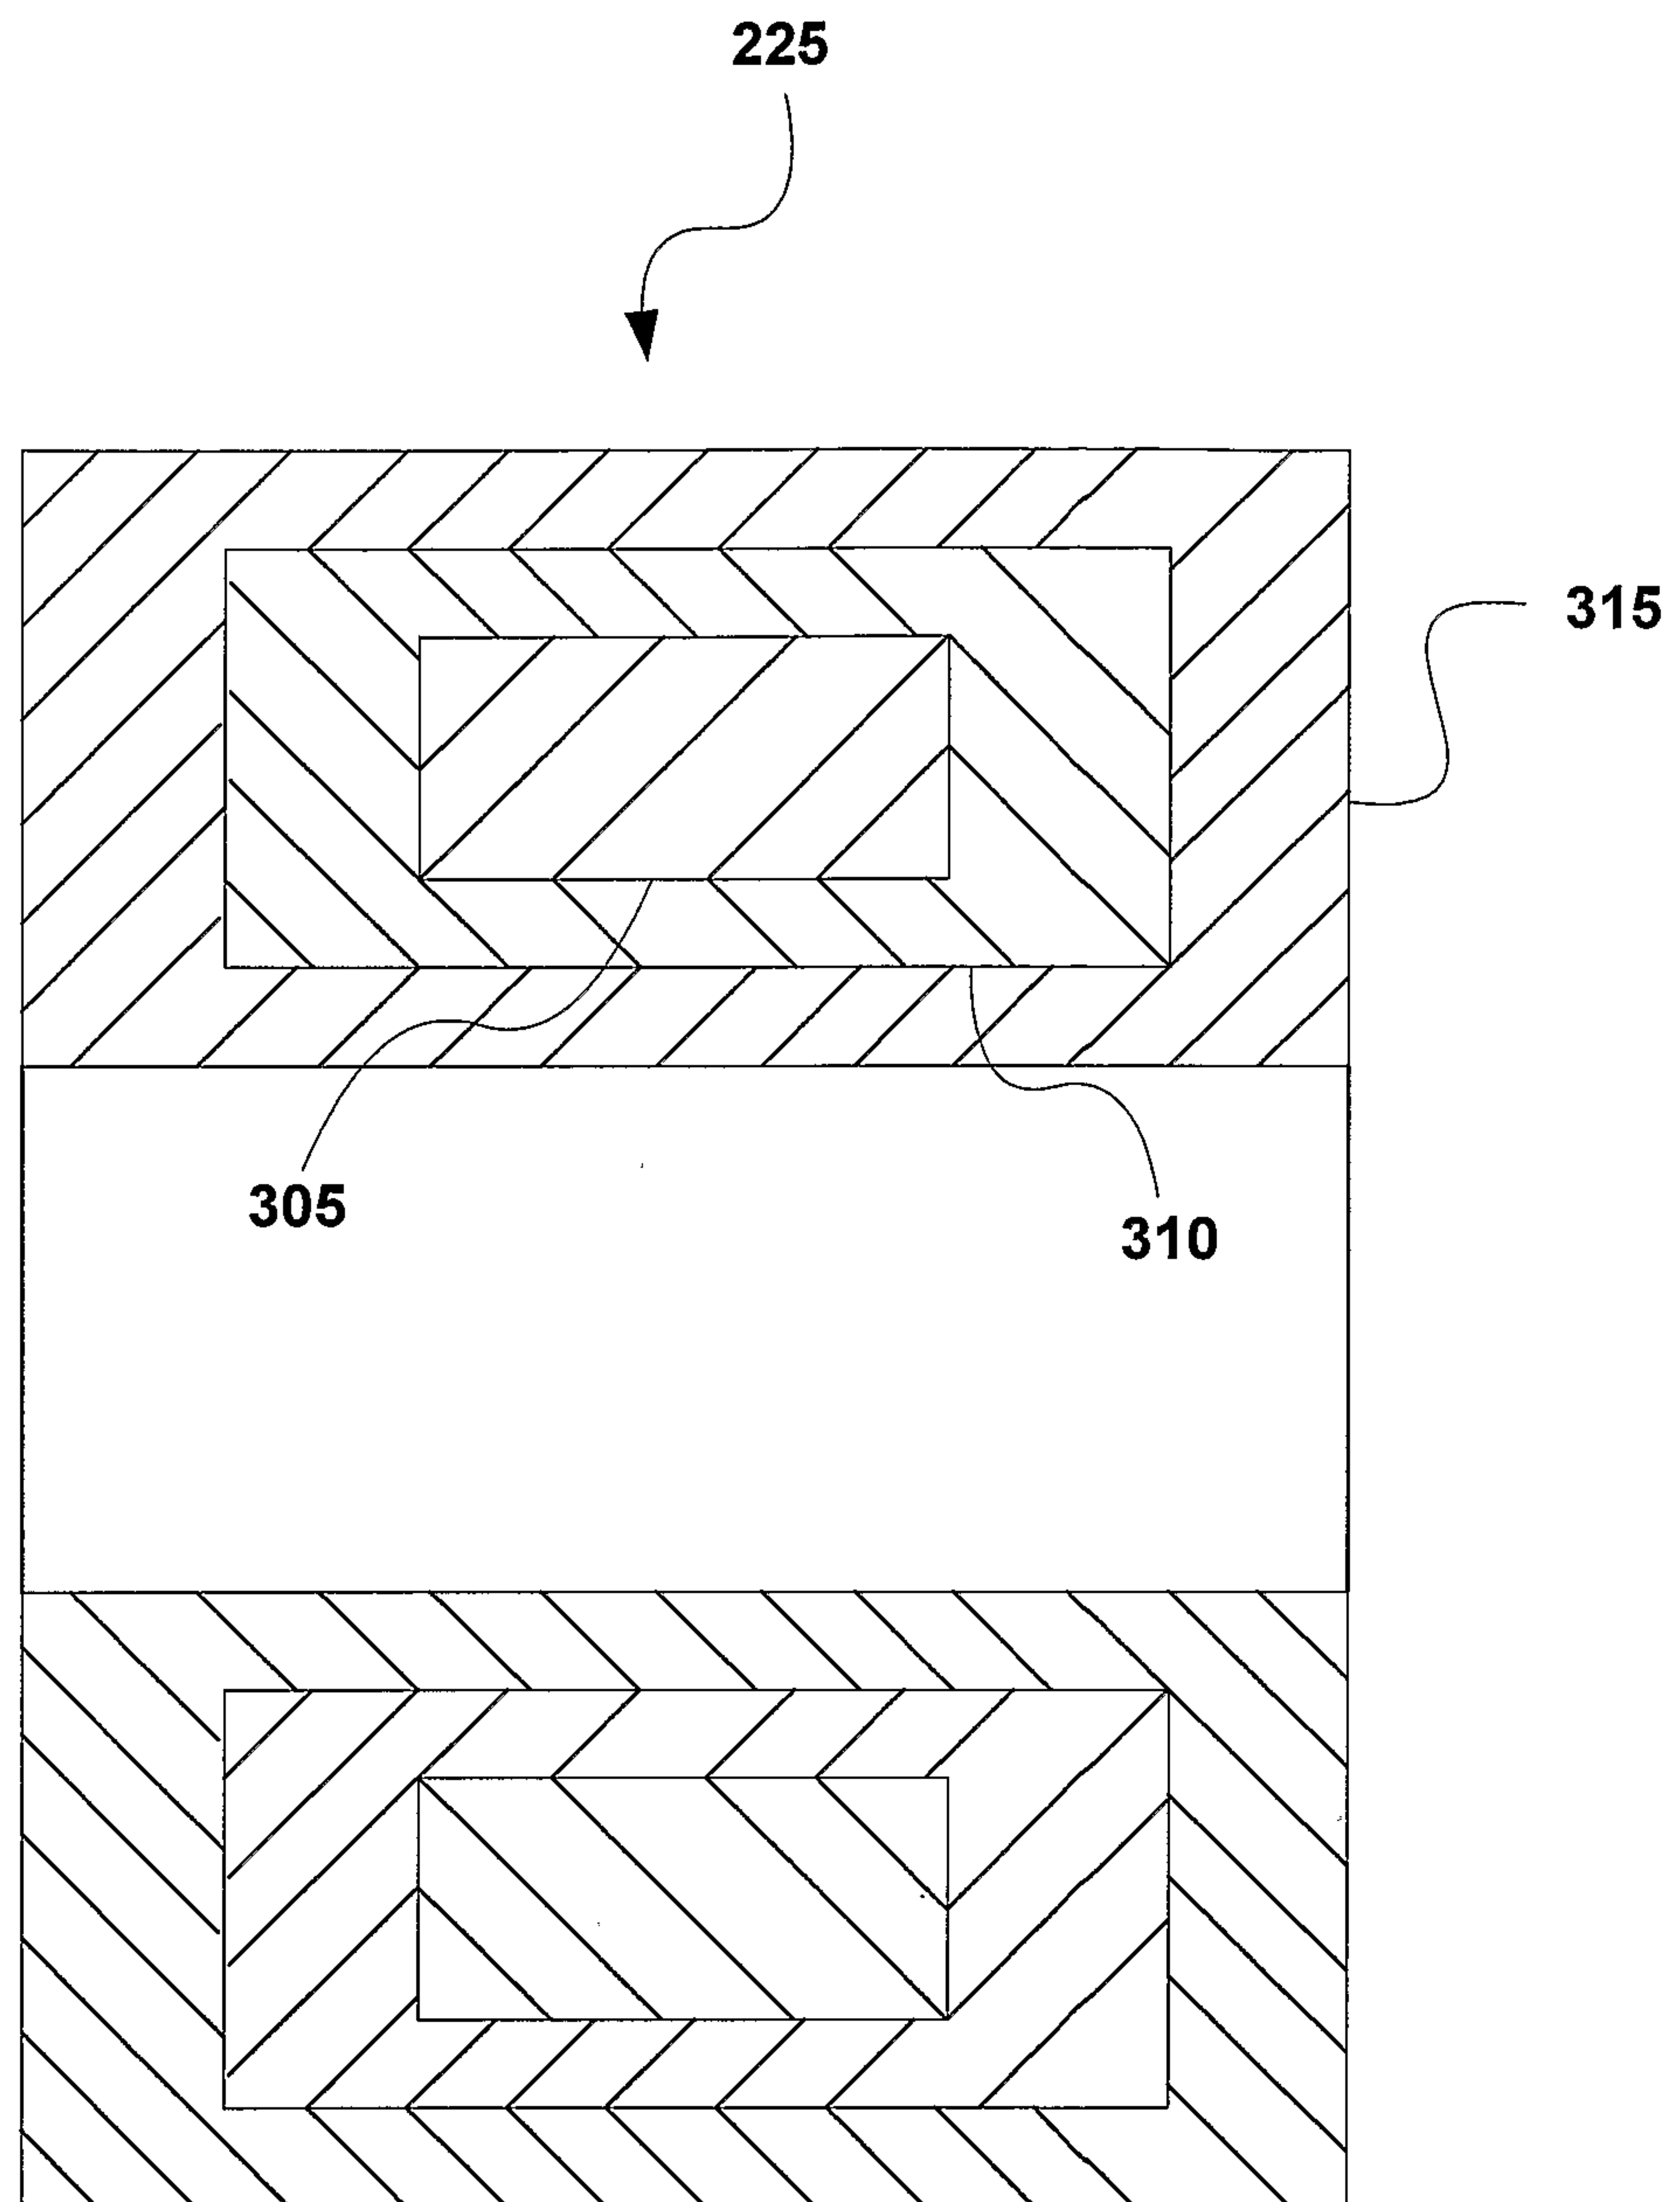
injecting energy into the coupled first and second tubes before, during, or after the radial expansion and plastic deformation of the first and second tubes to lower a melting point of at least a portion of the insert material; and

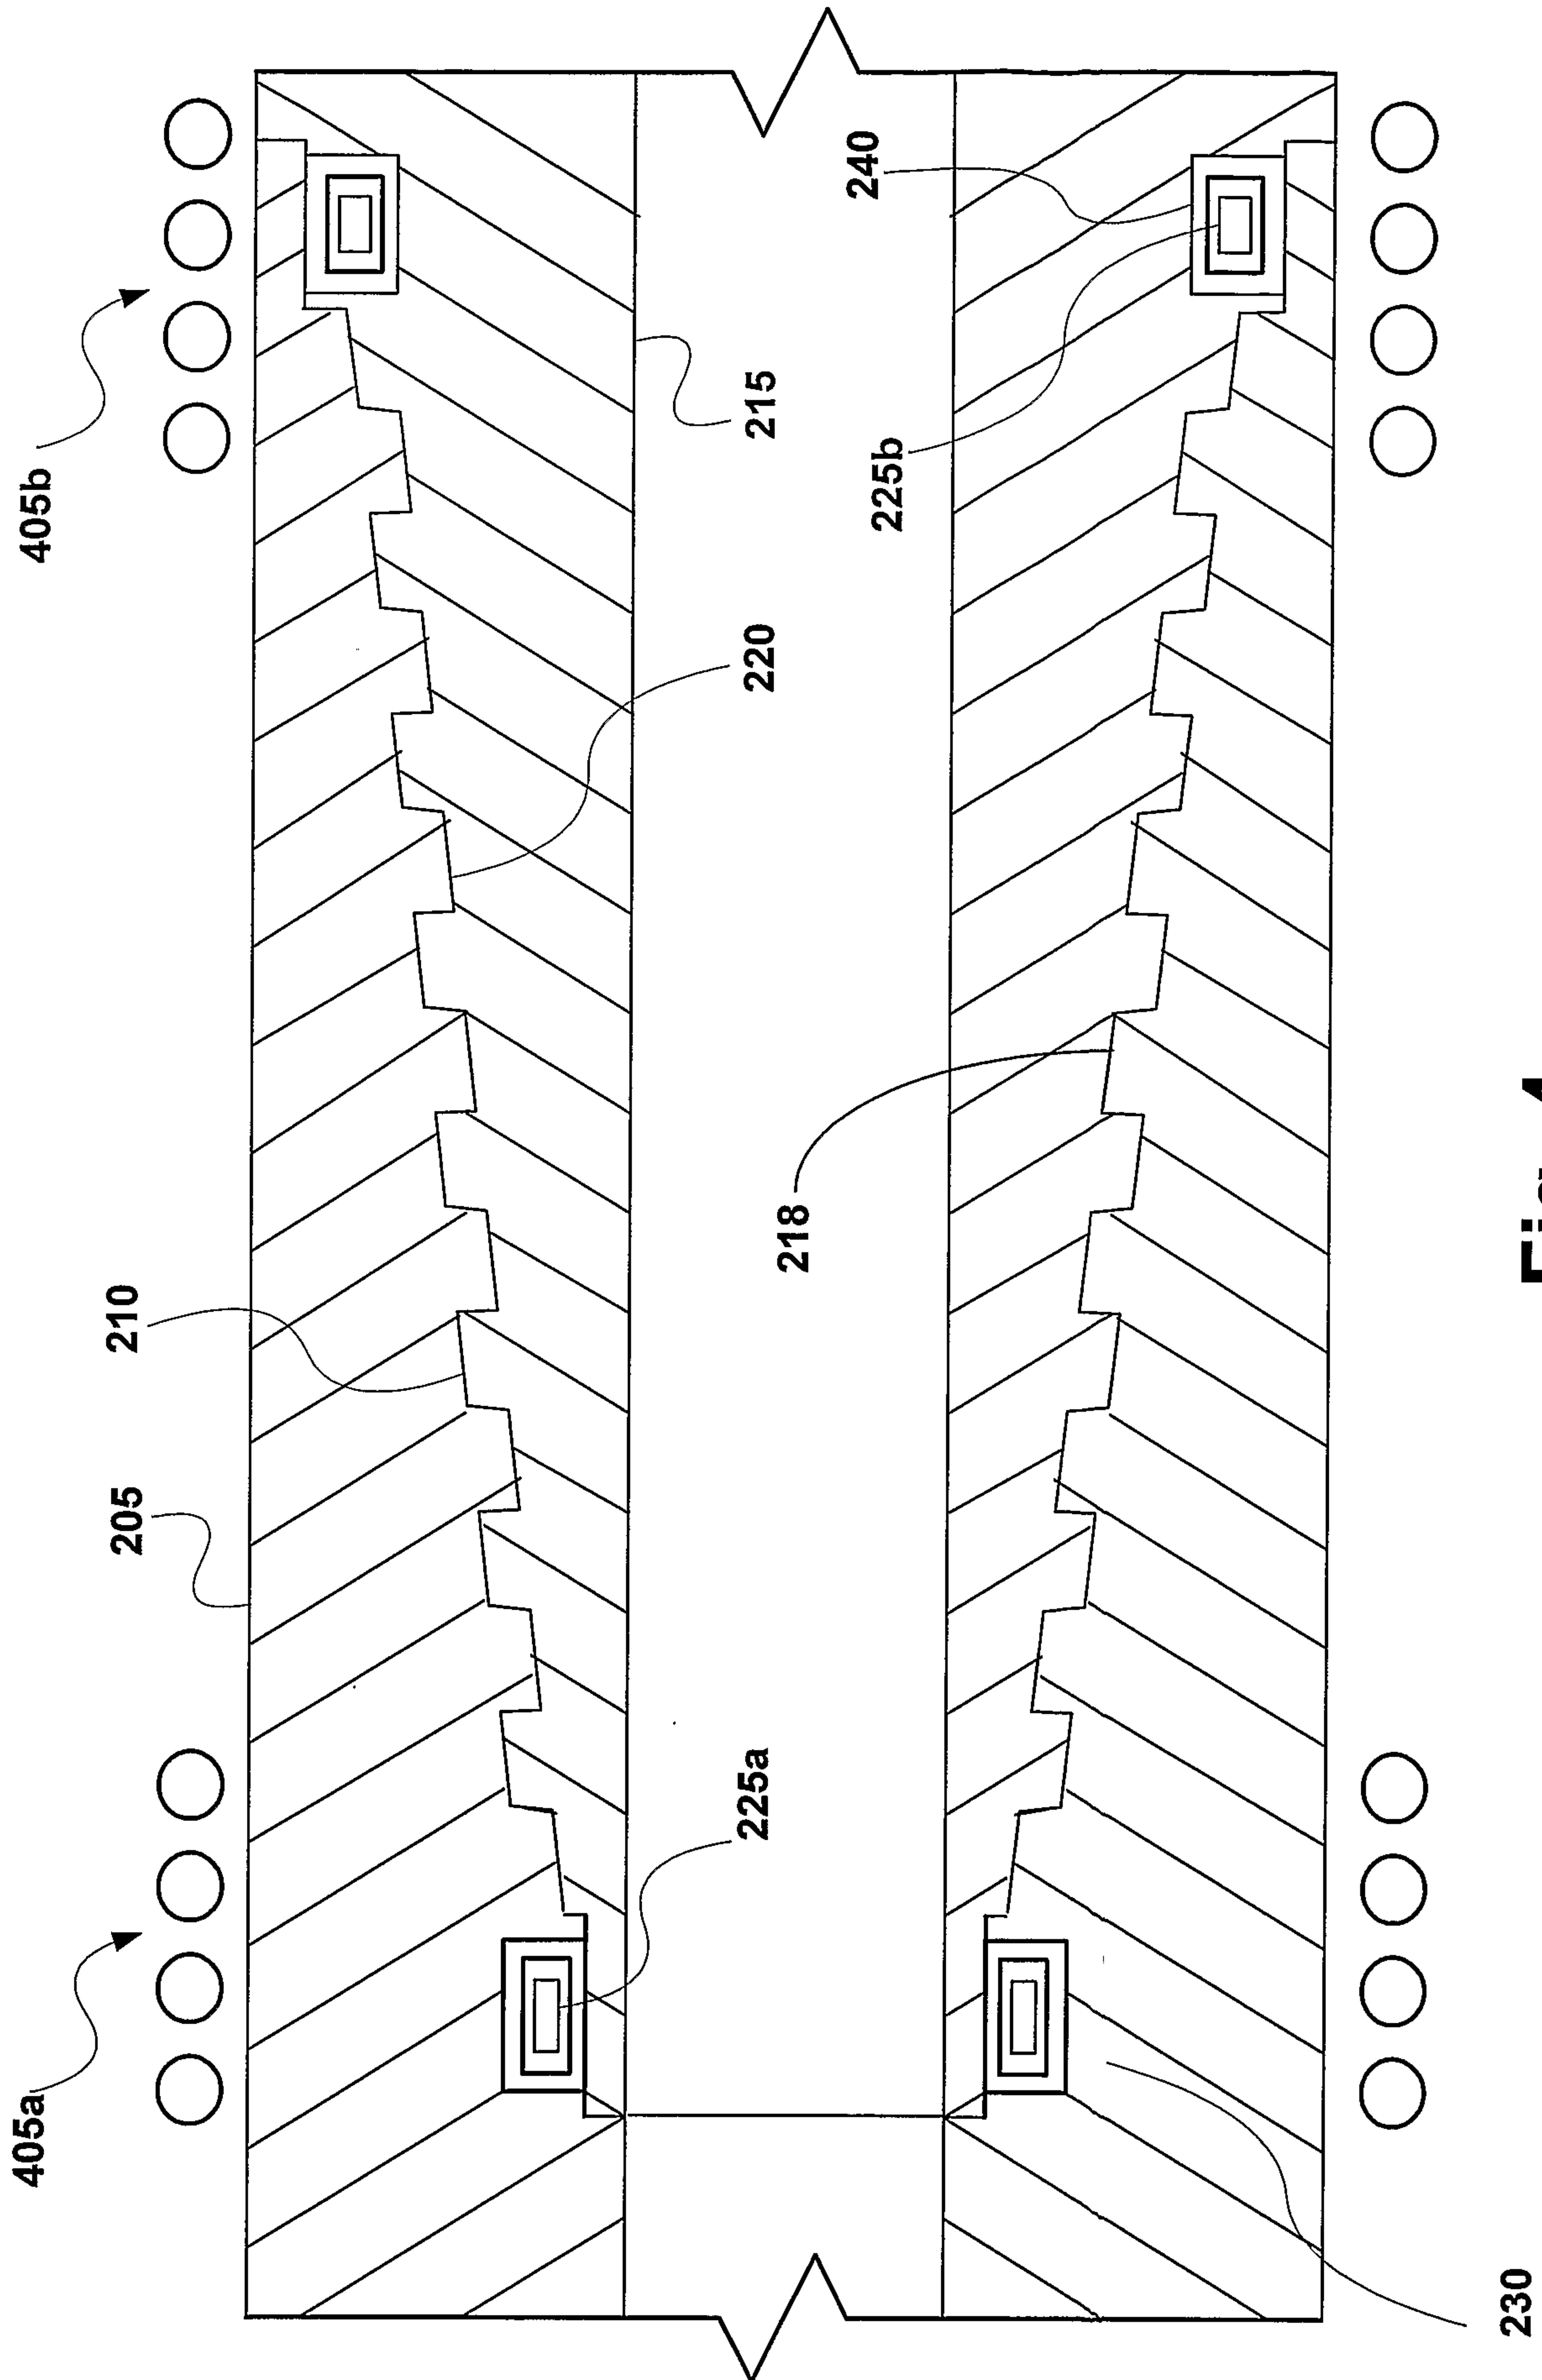
injecting energy into the coupled first and second tubes to form a metallurgical bond between the insert material and at least one of the first and second coupled tubes;

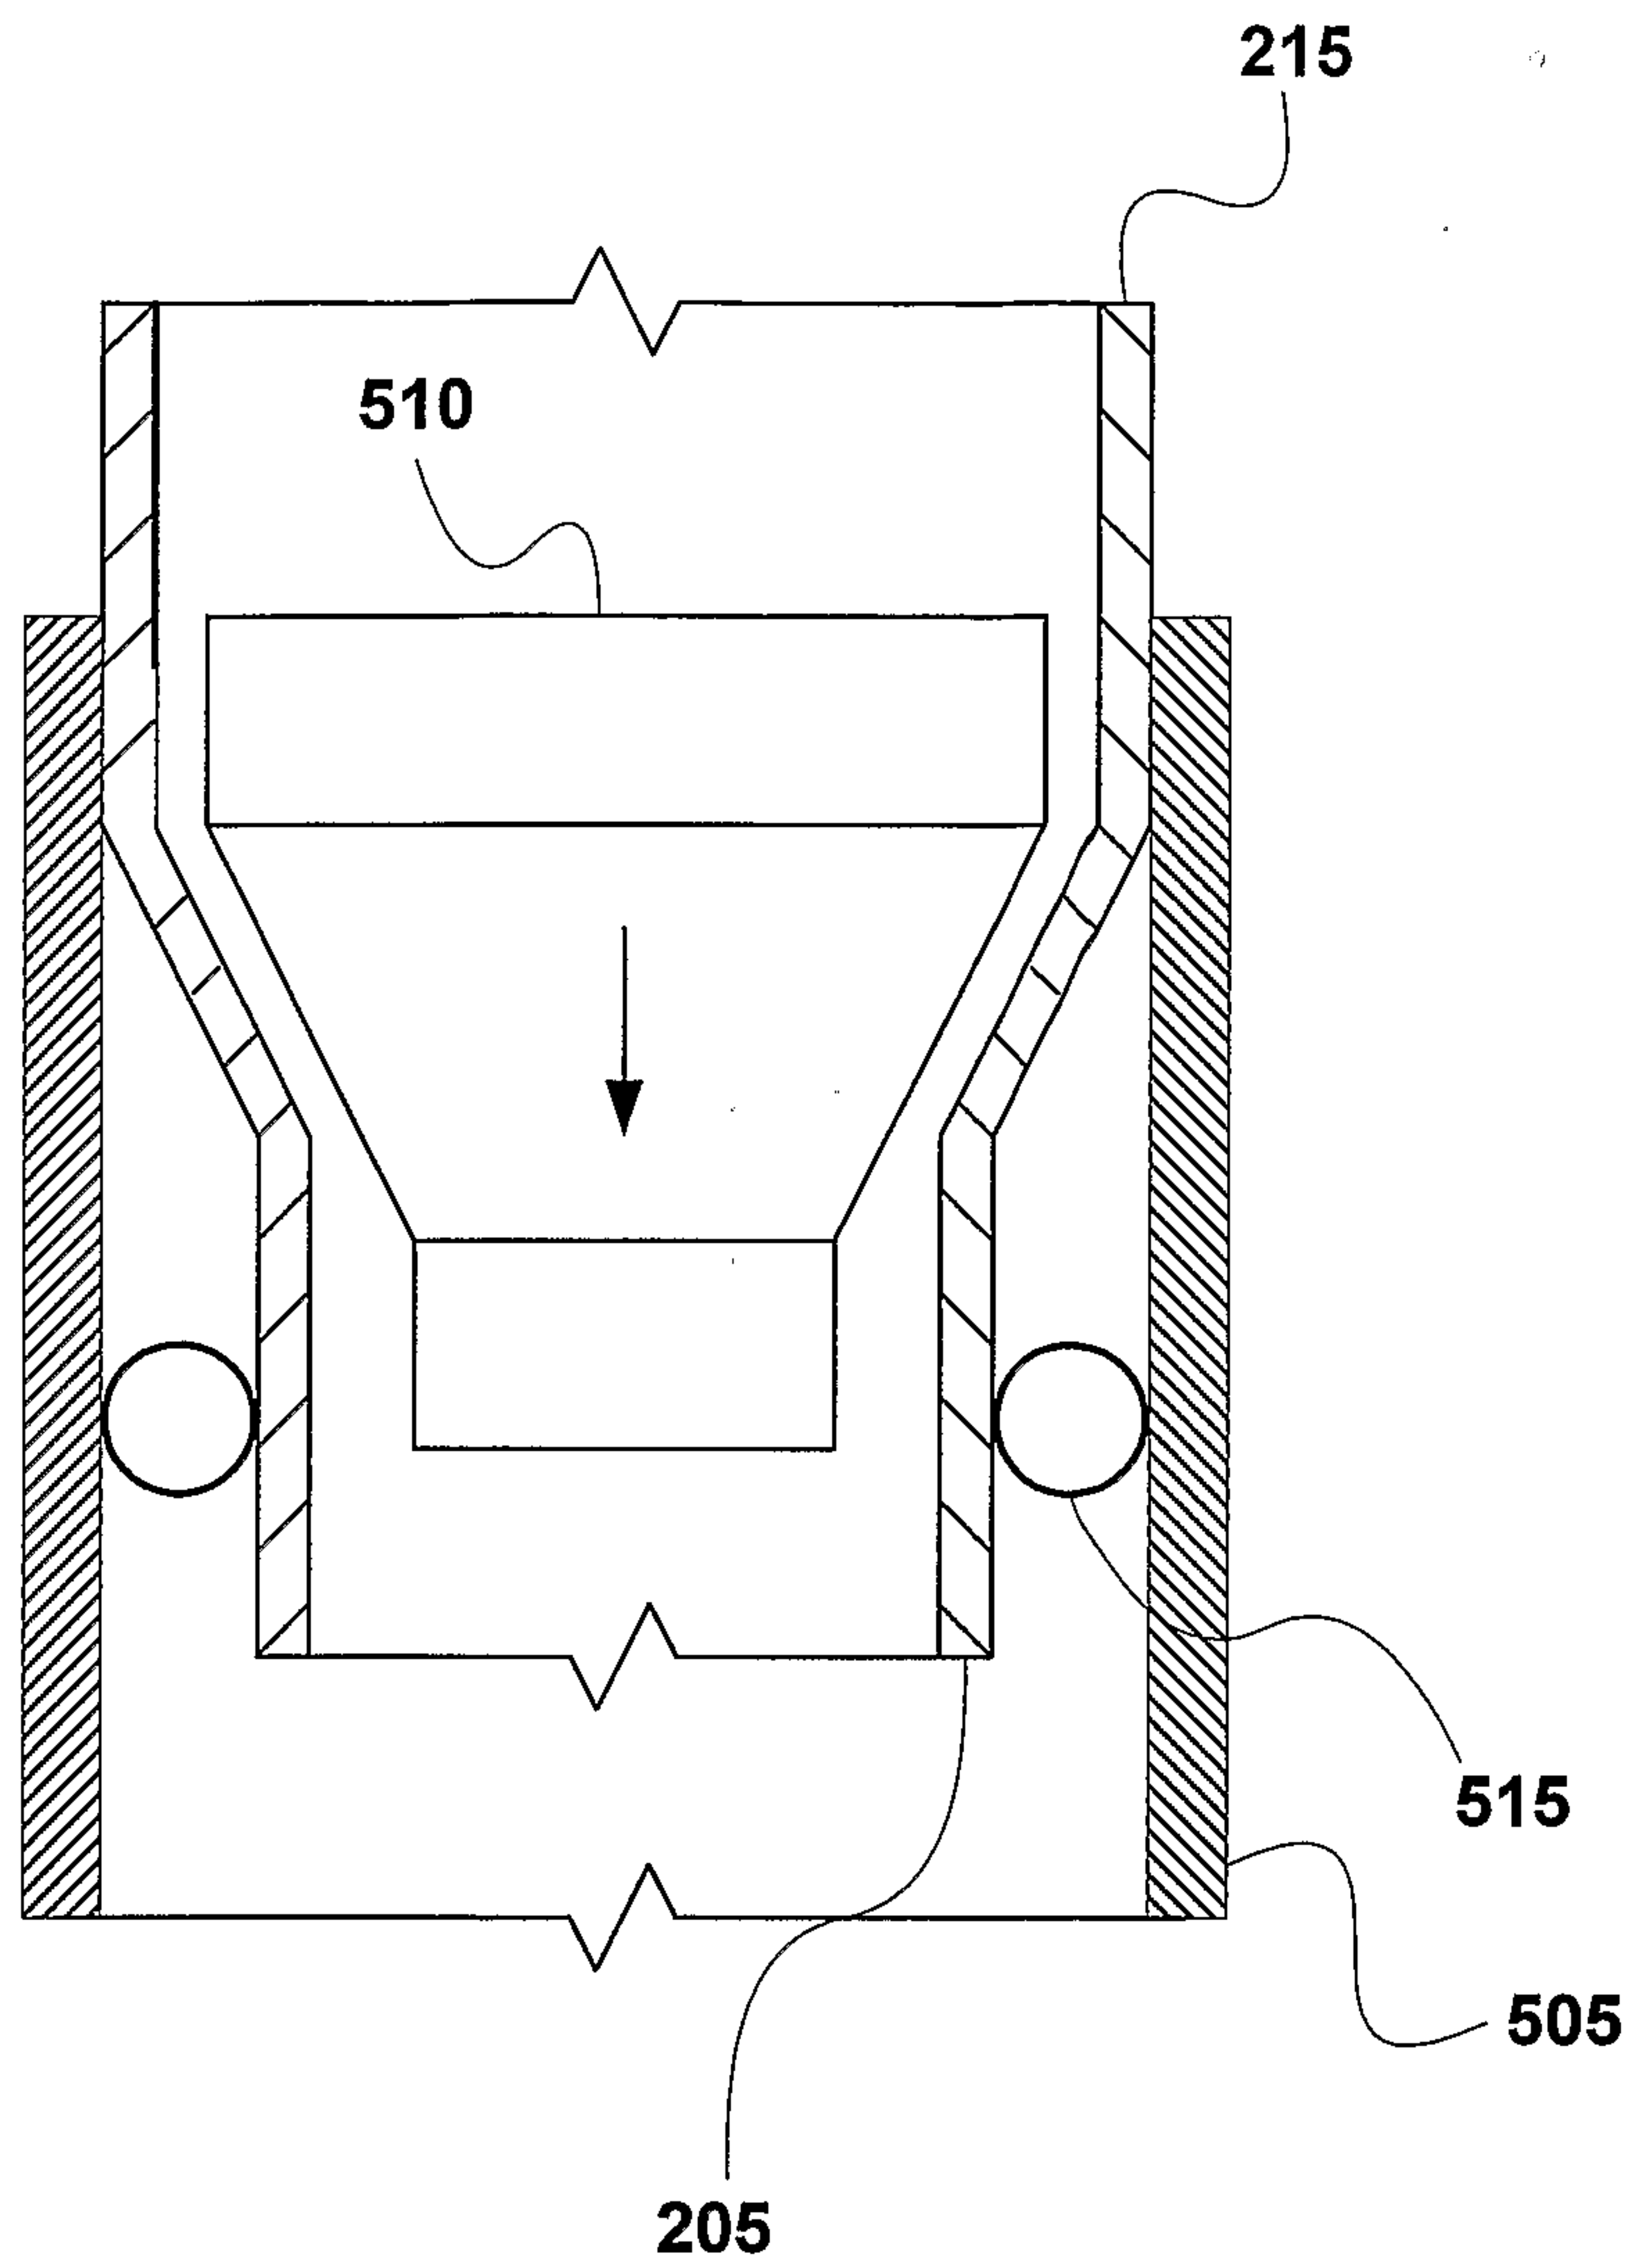
wherein the injected energy is selected from the group consisting of mechanical energy, electrical energy, magnetic energy, electromagnetic energy, acoustic energy, and vibrational energy.

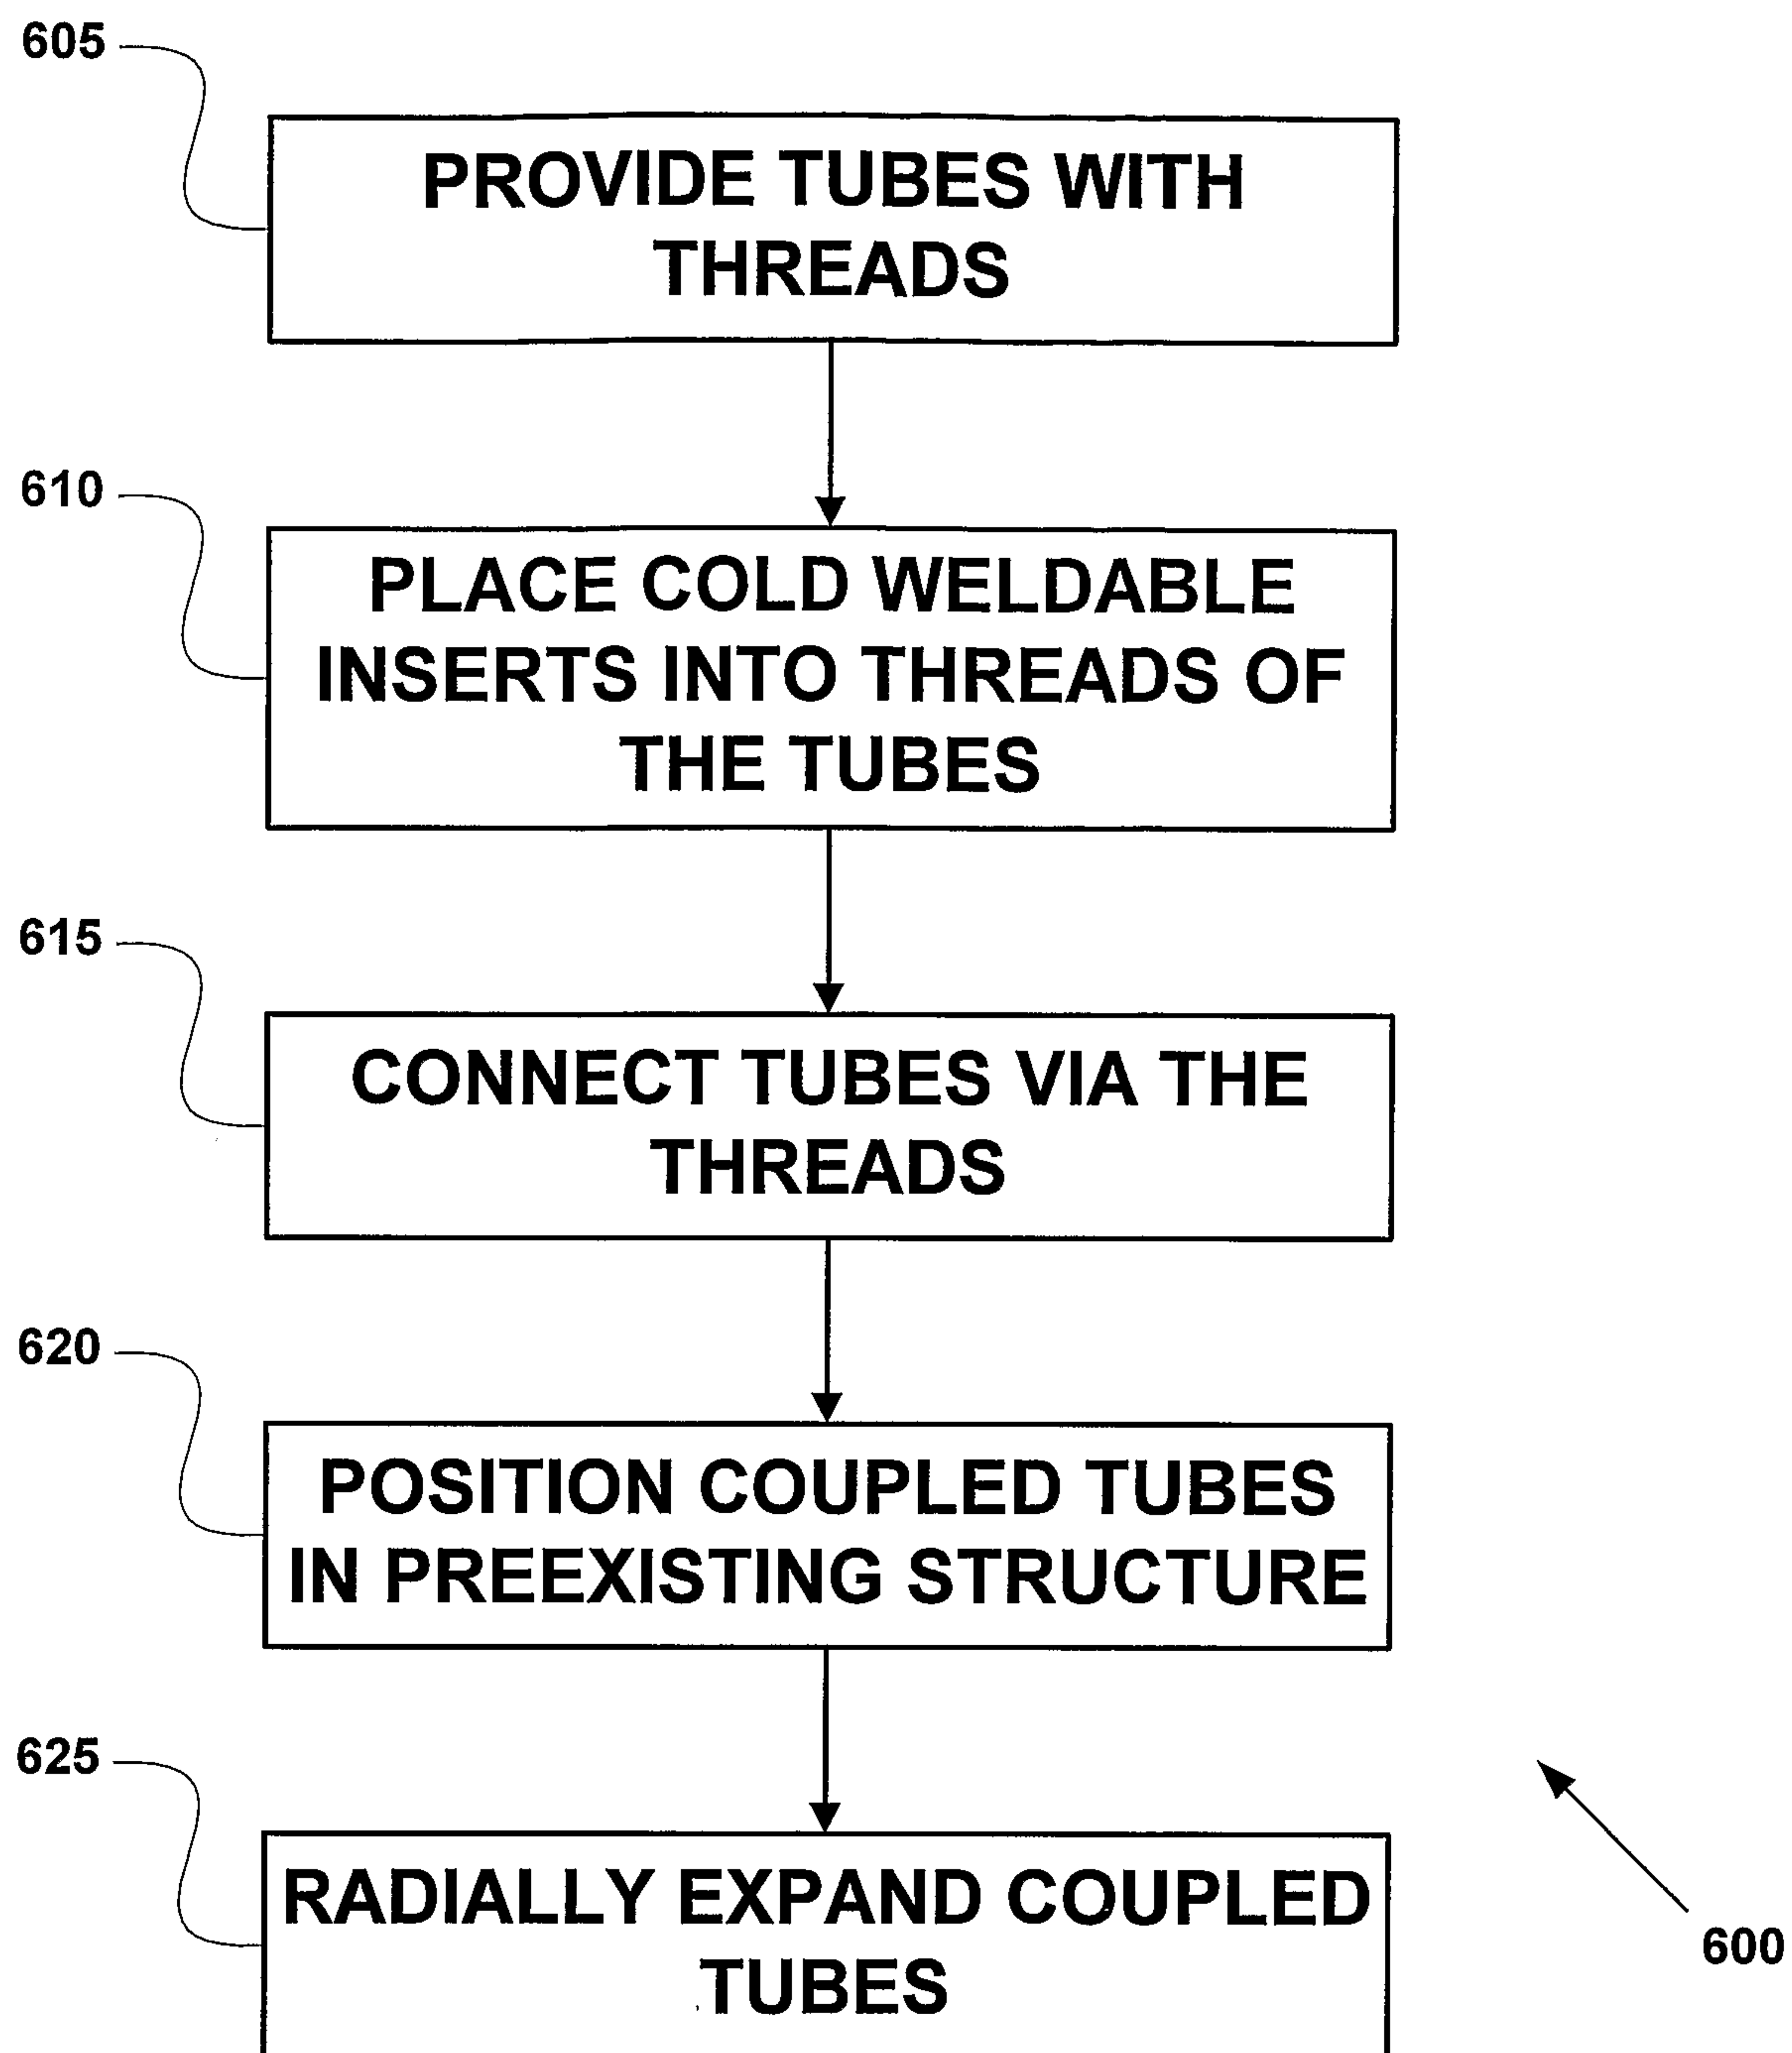
**Fig. 1**

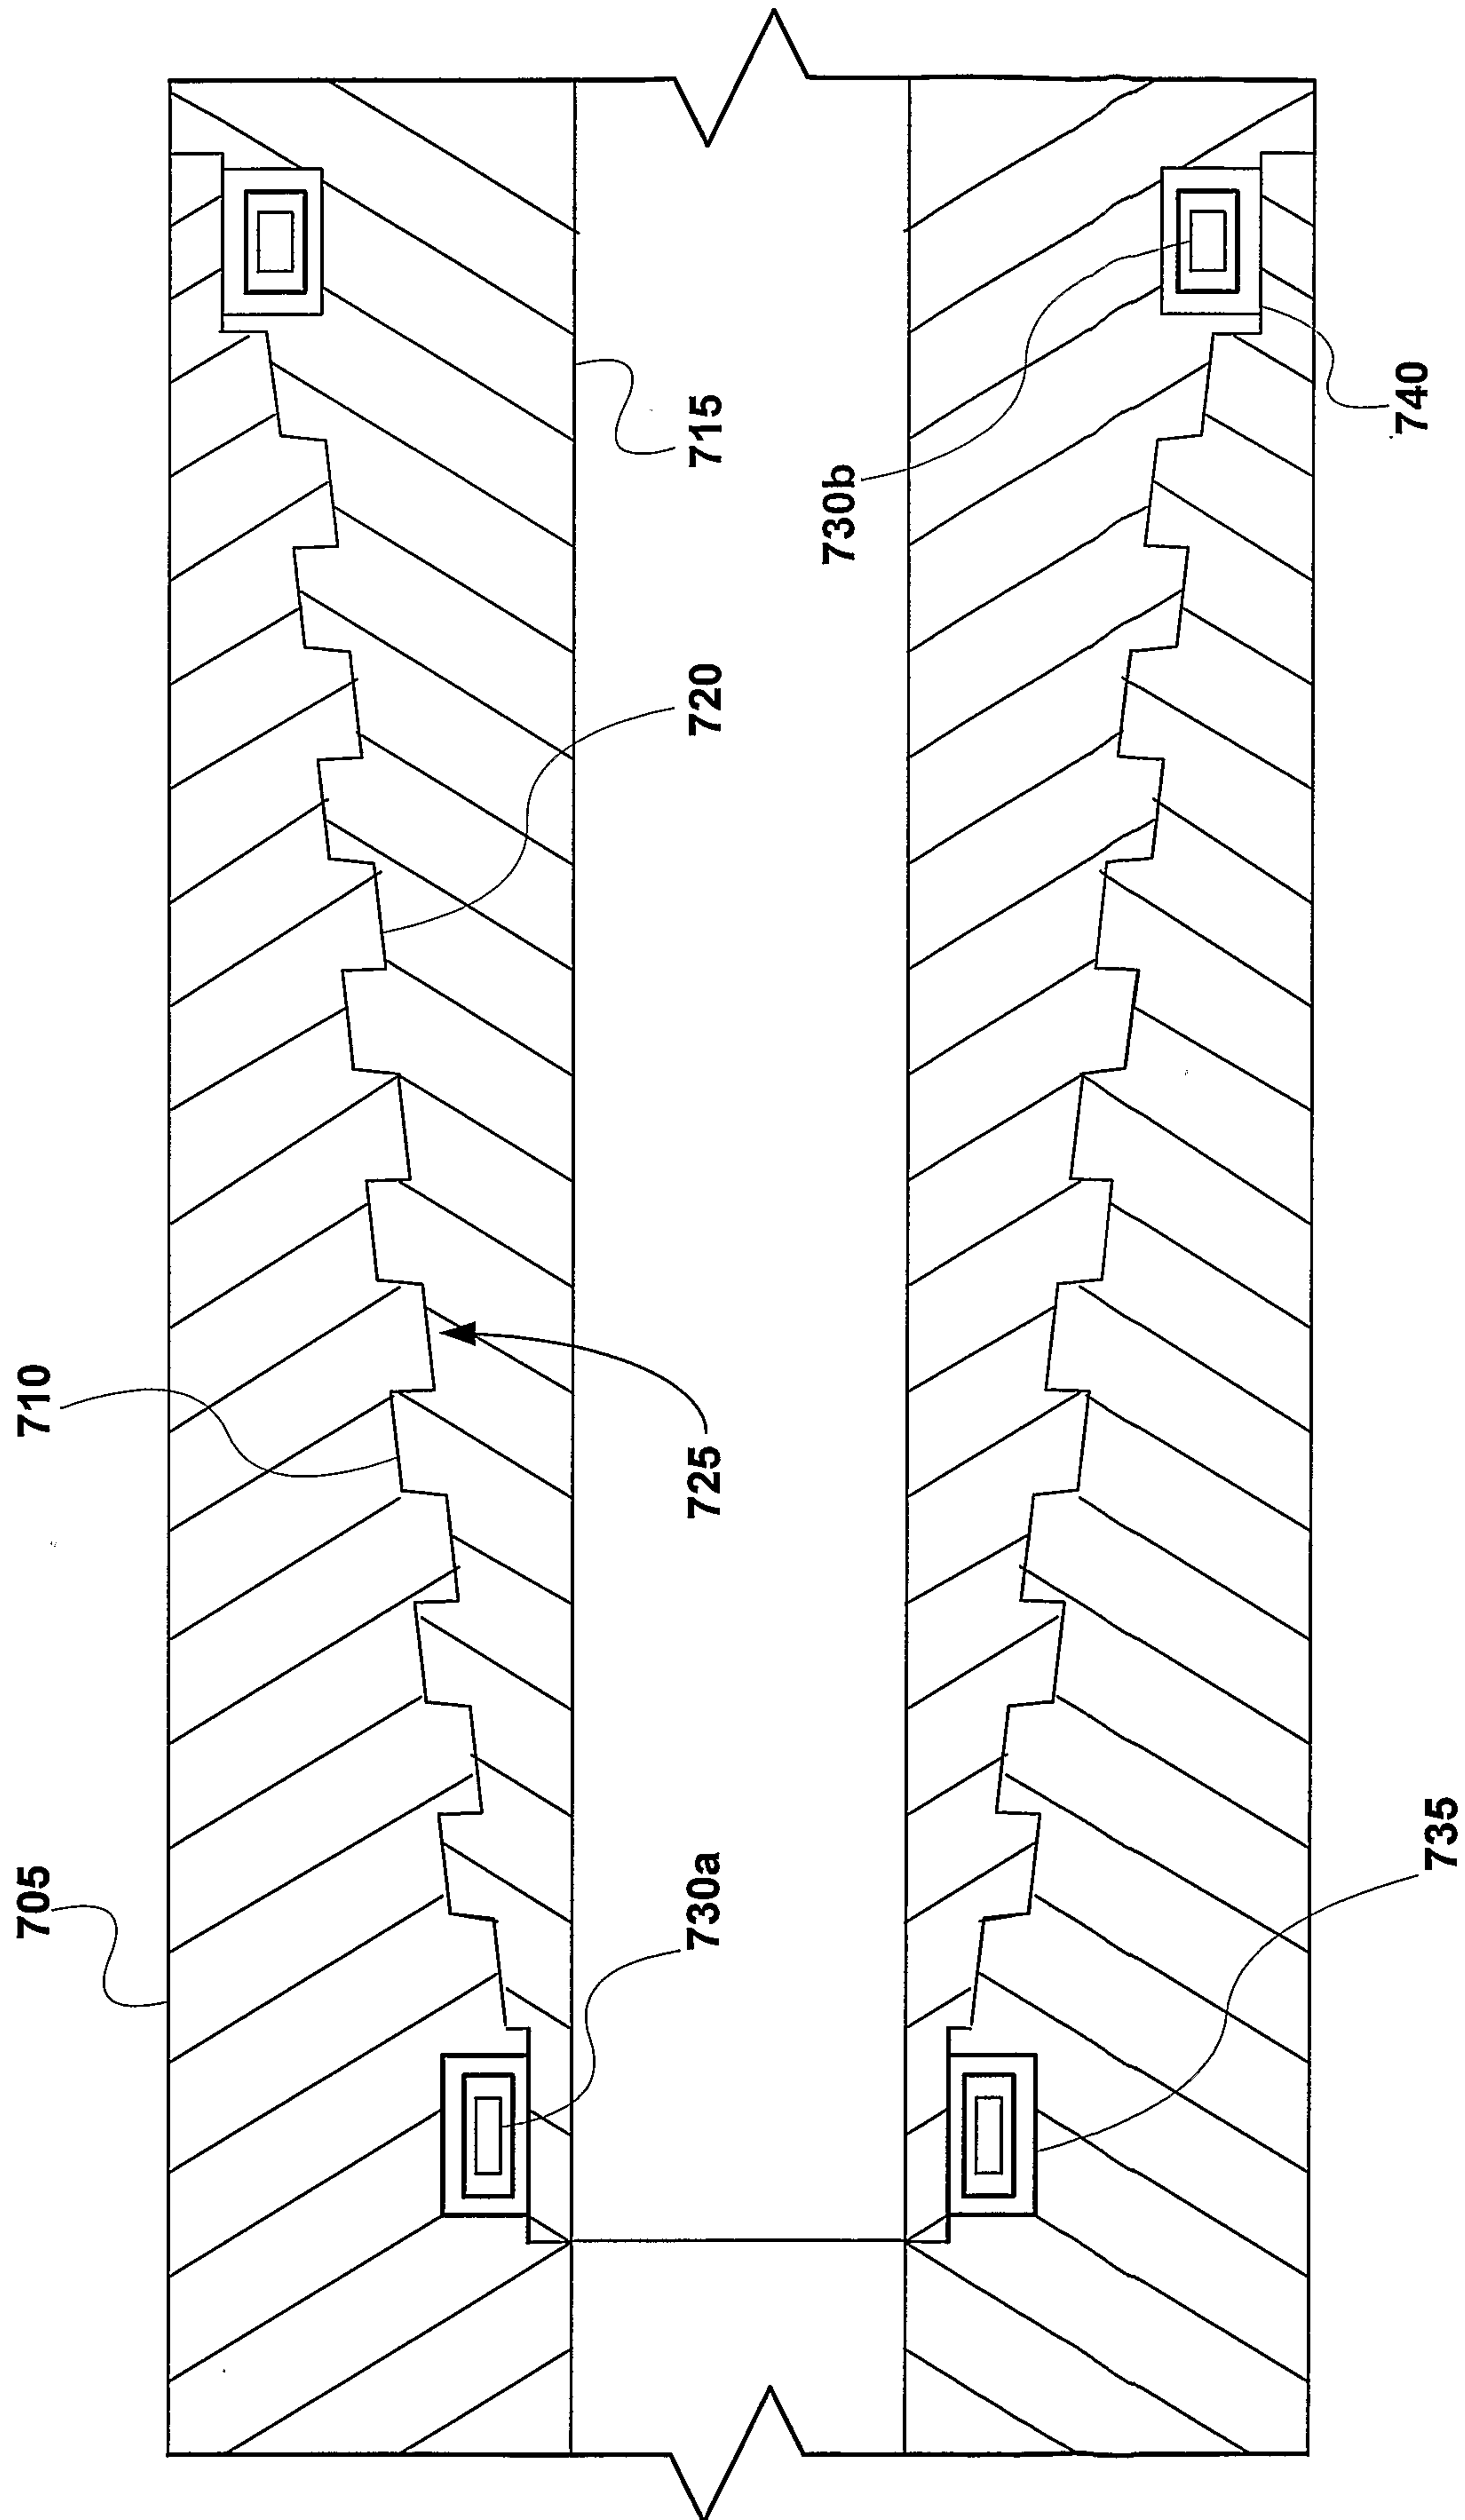
**Fig. 2**

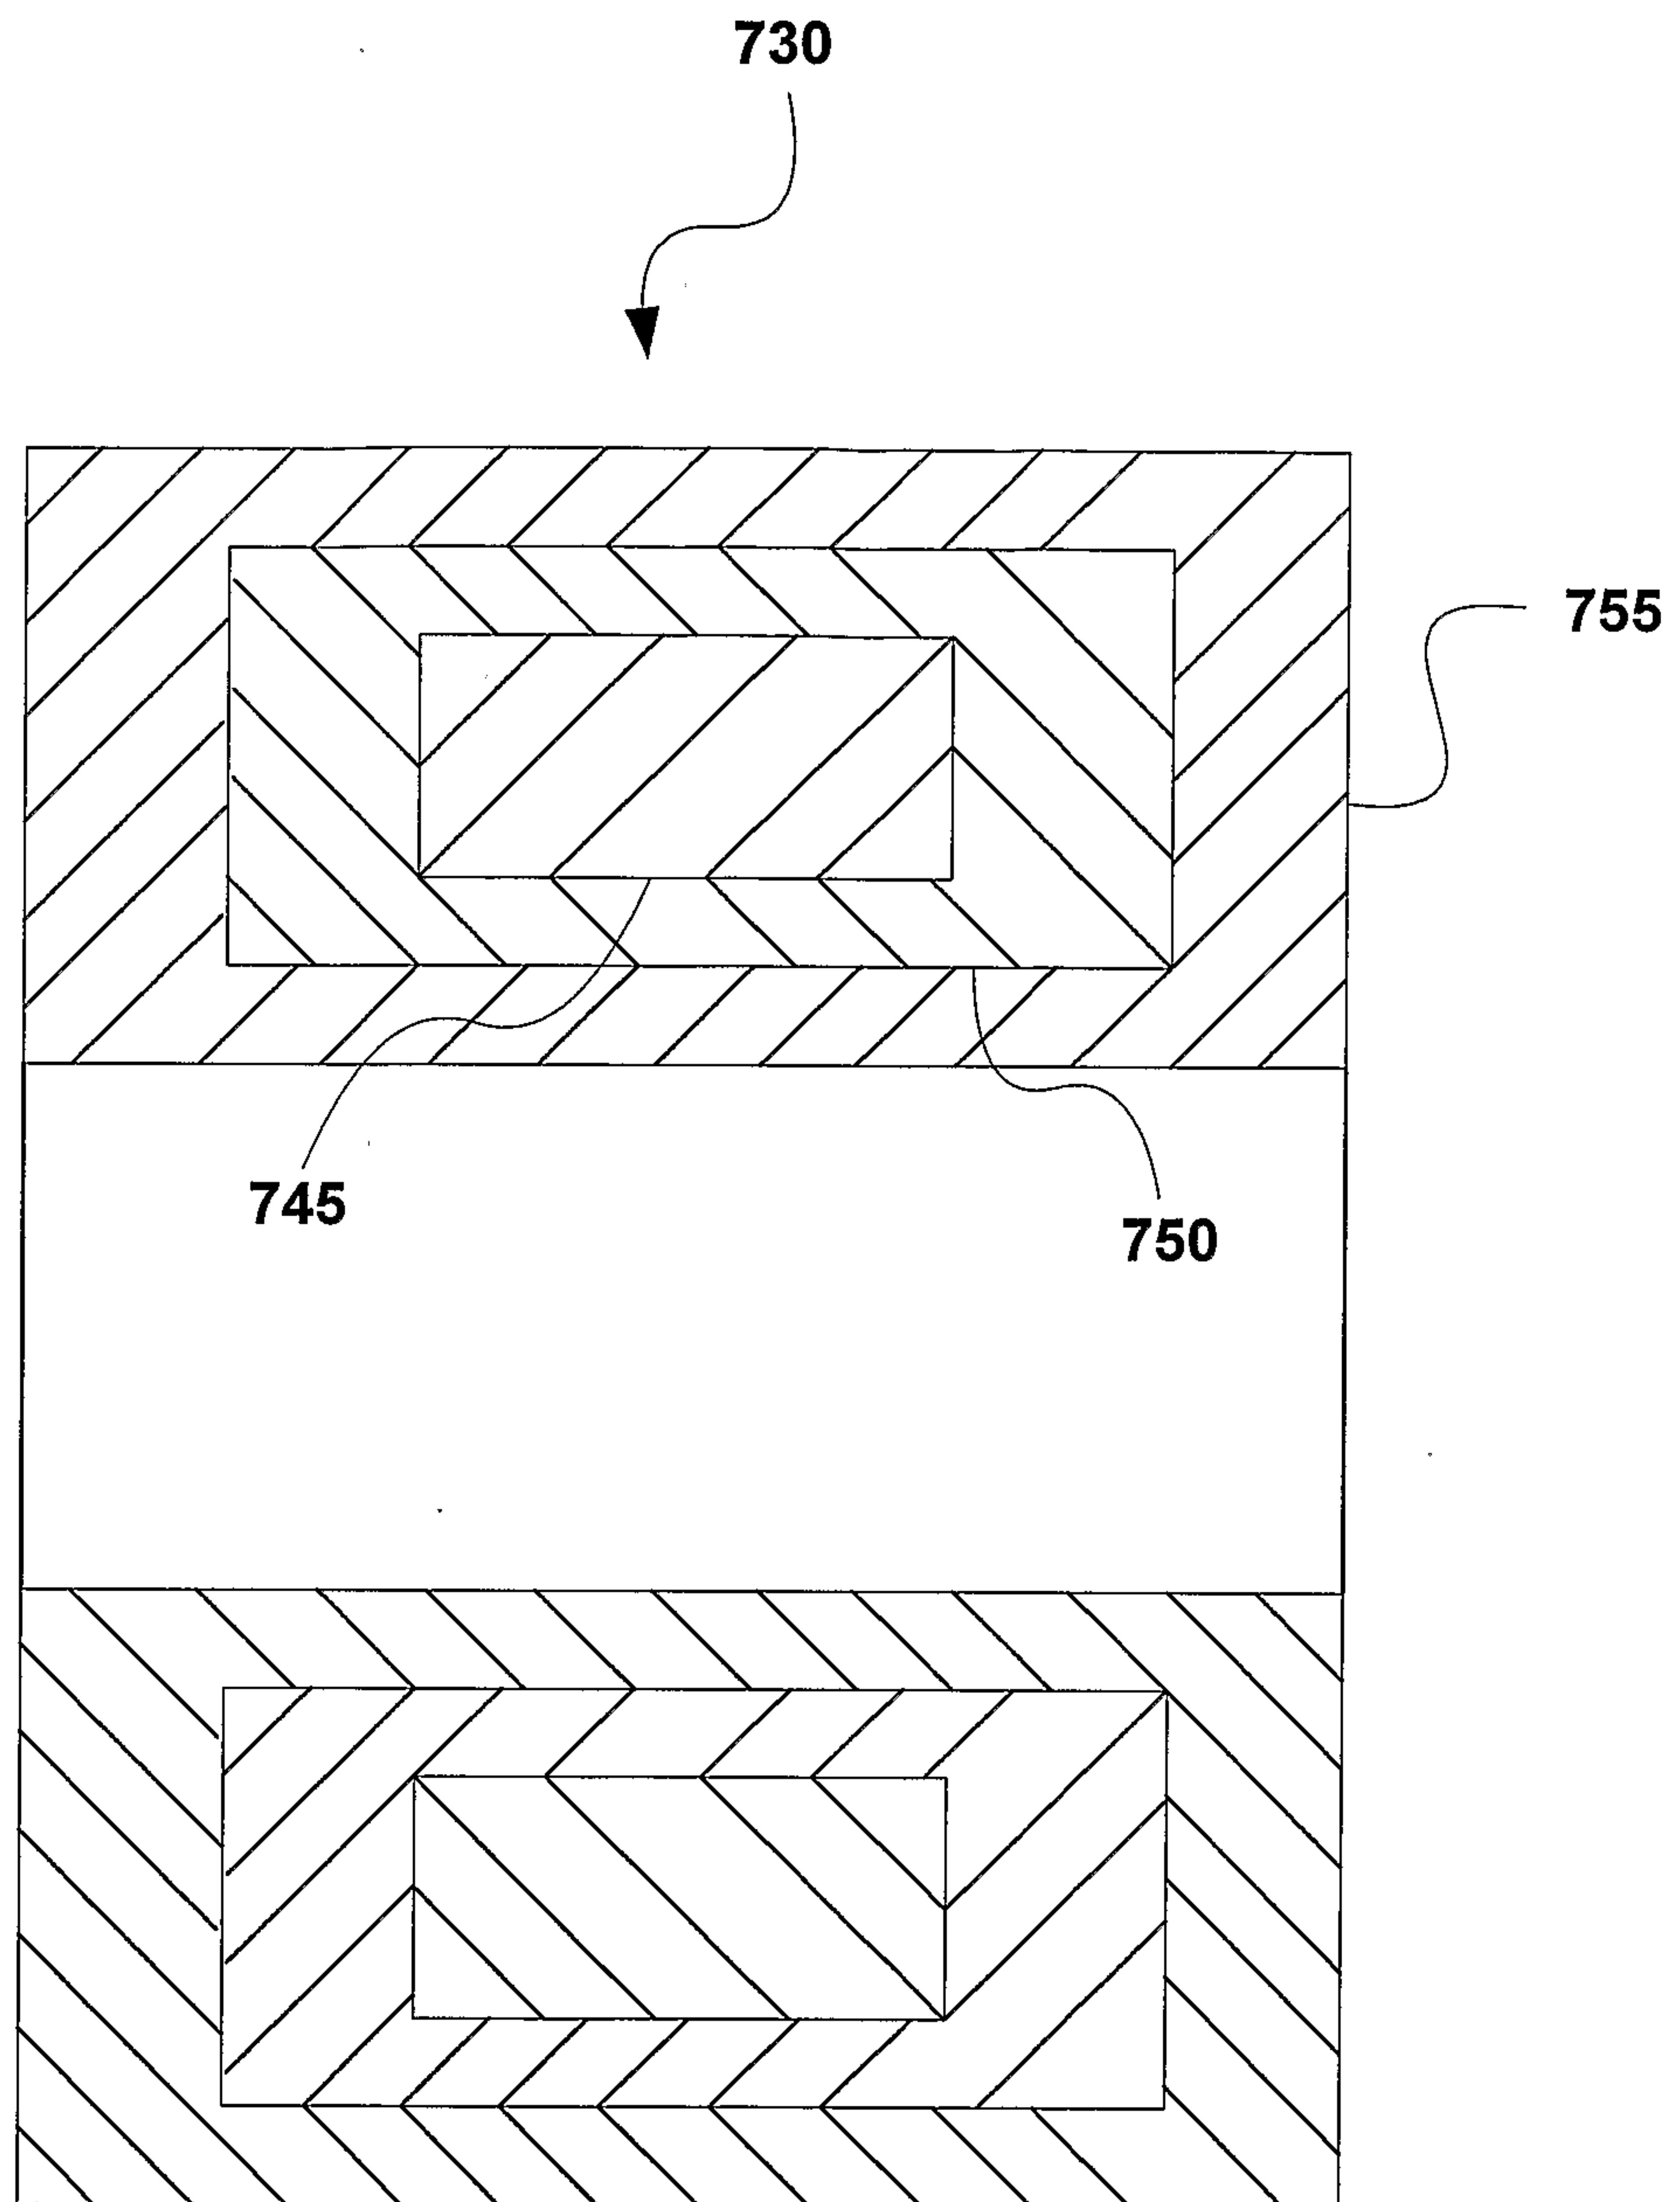
**Fig. 3**

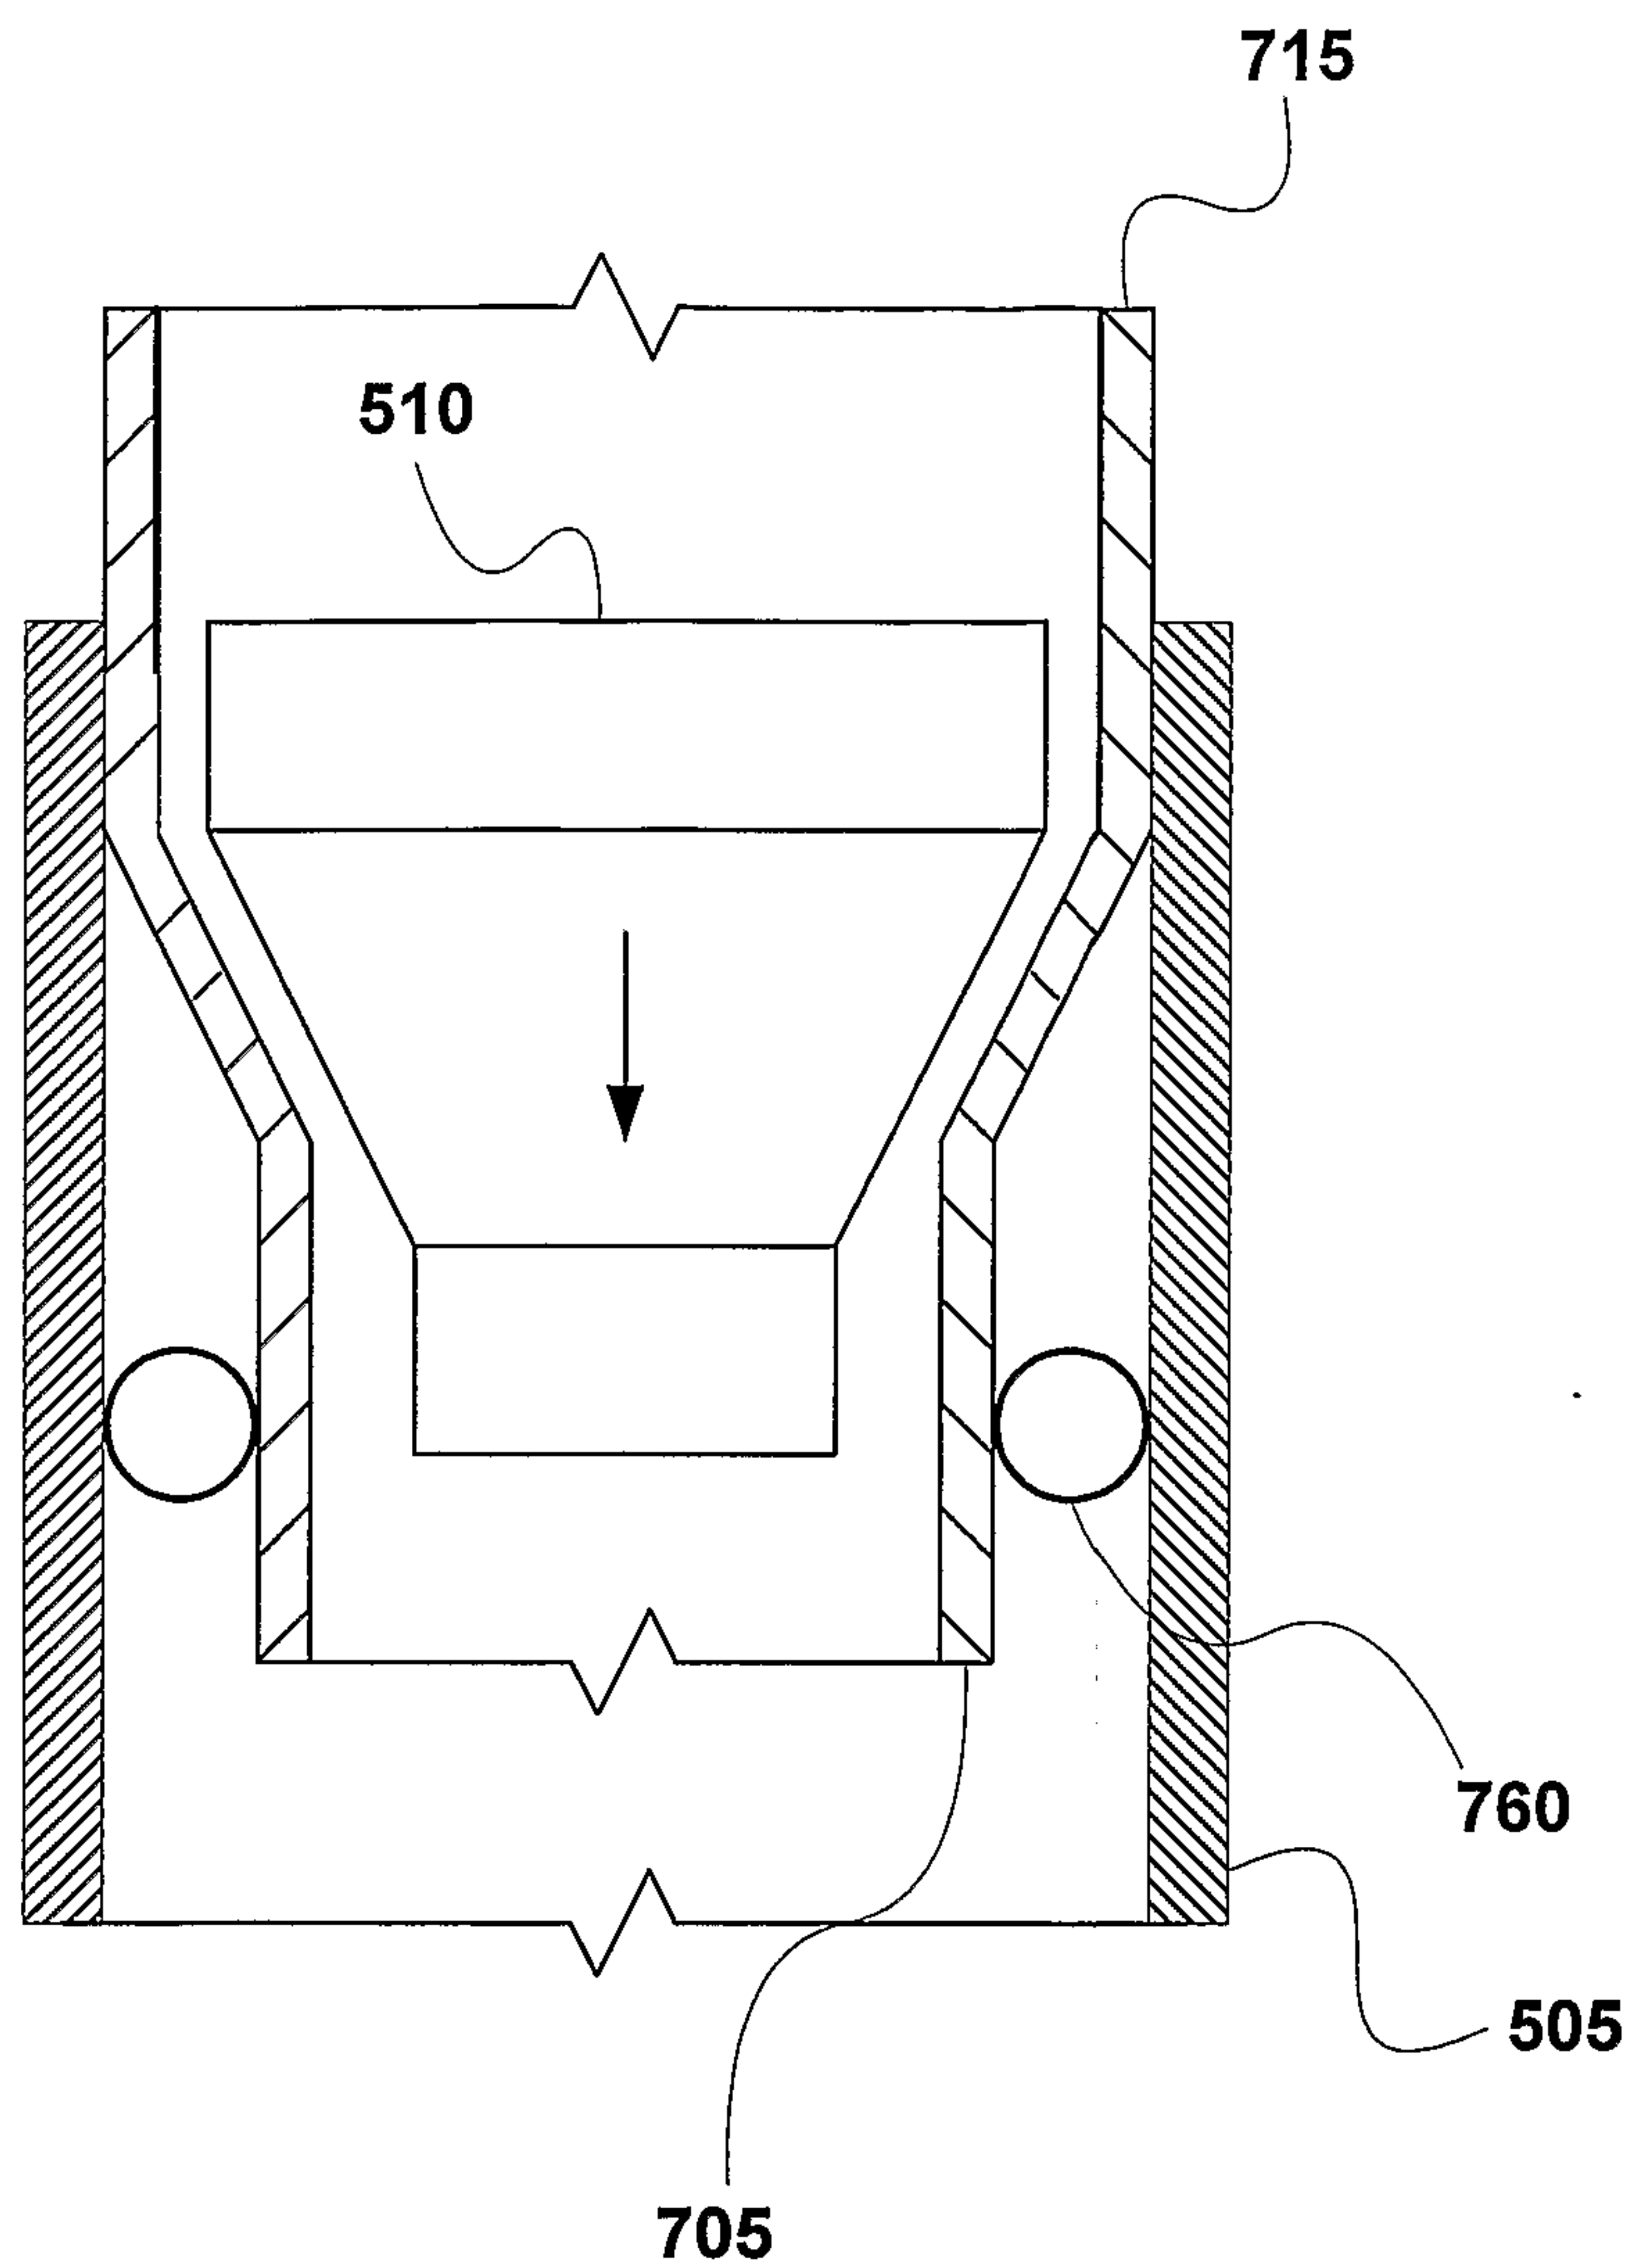
**Fig. 4**

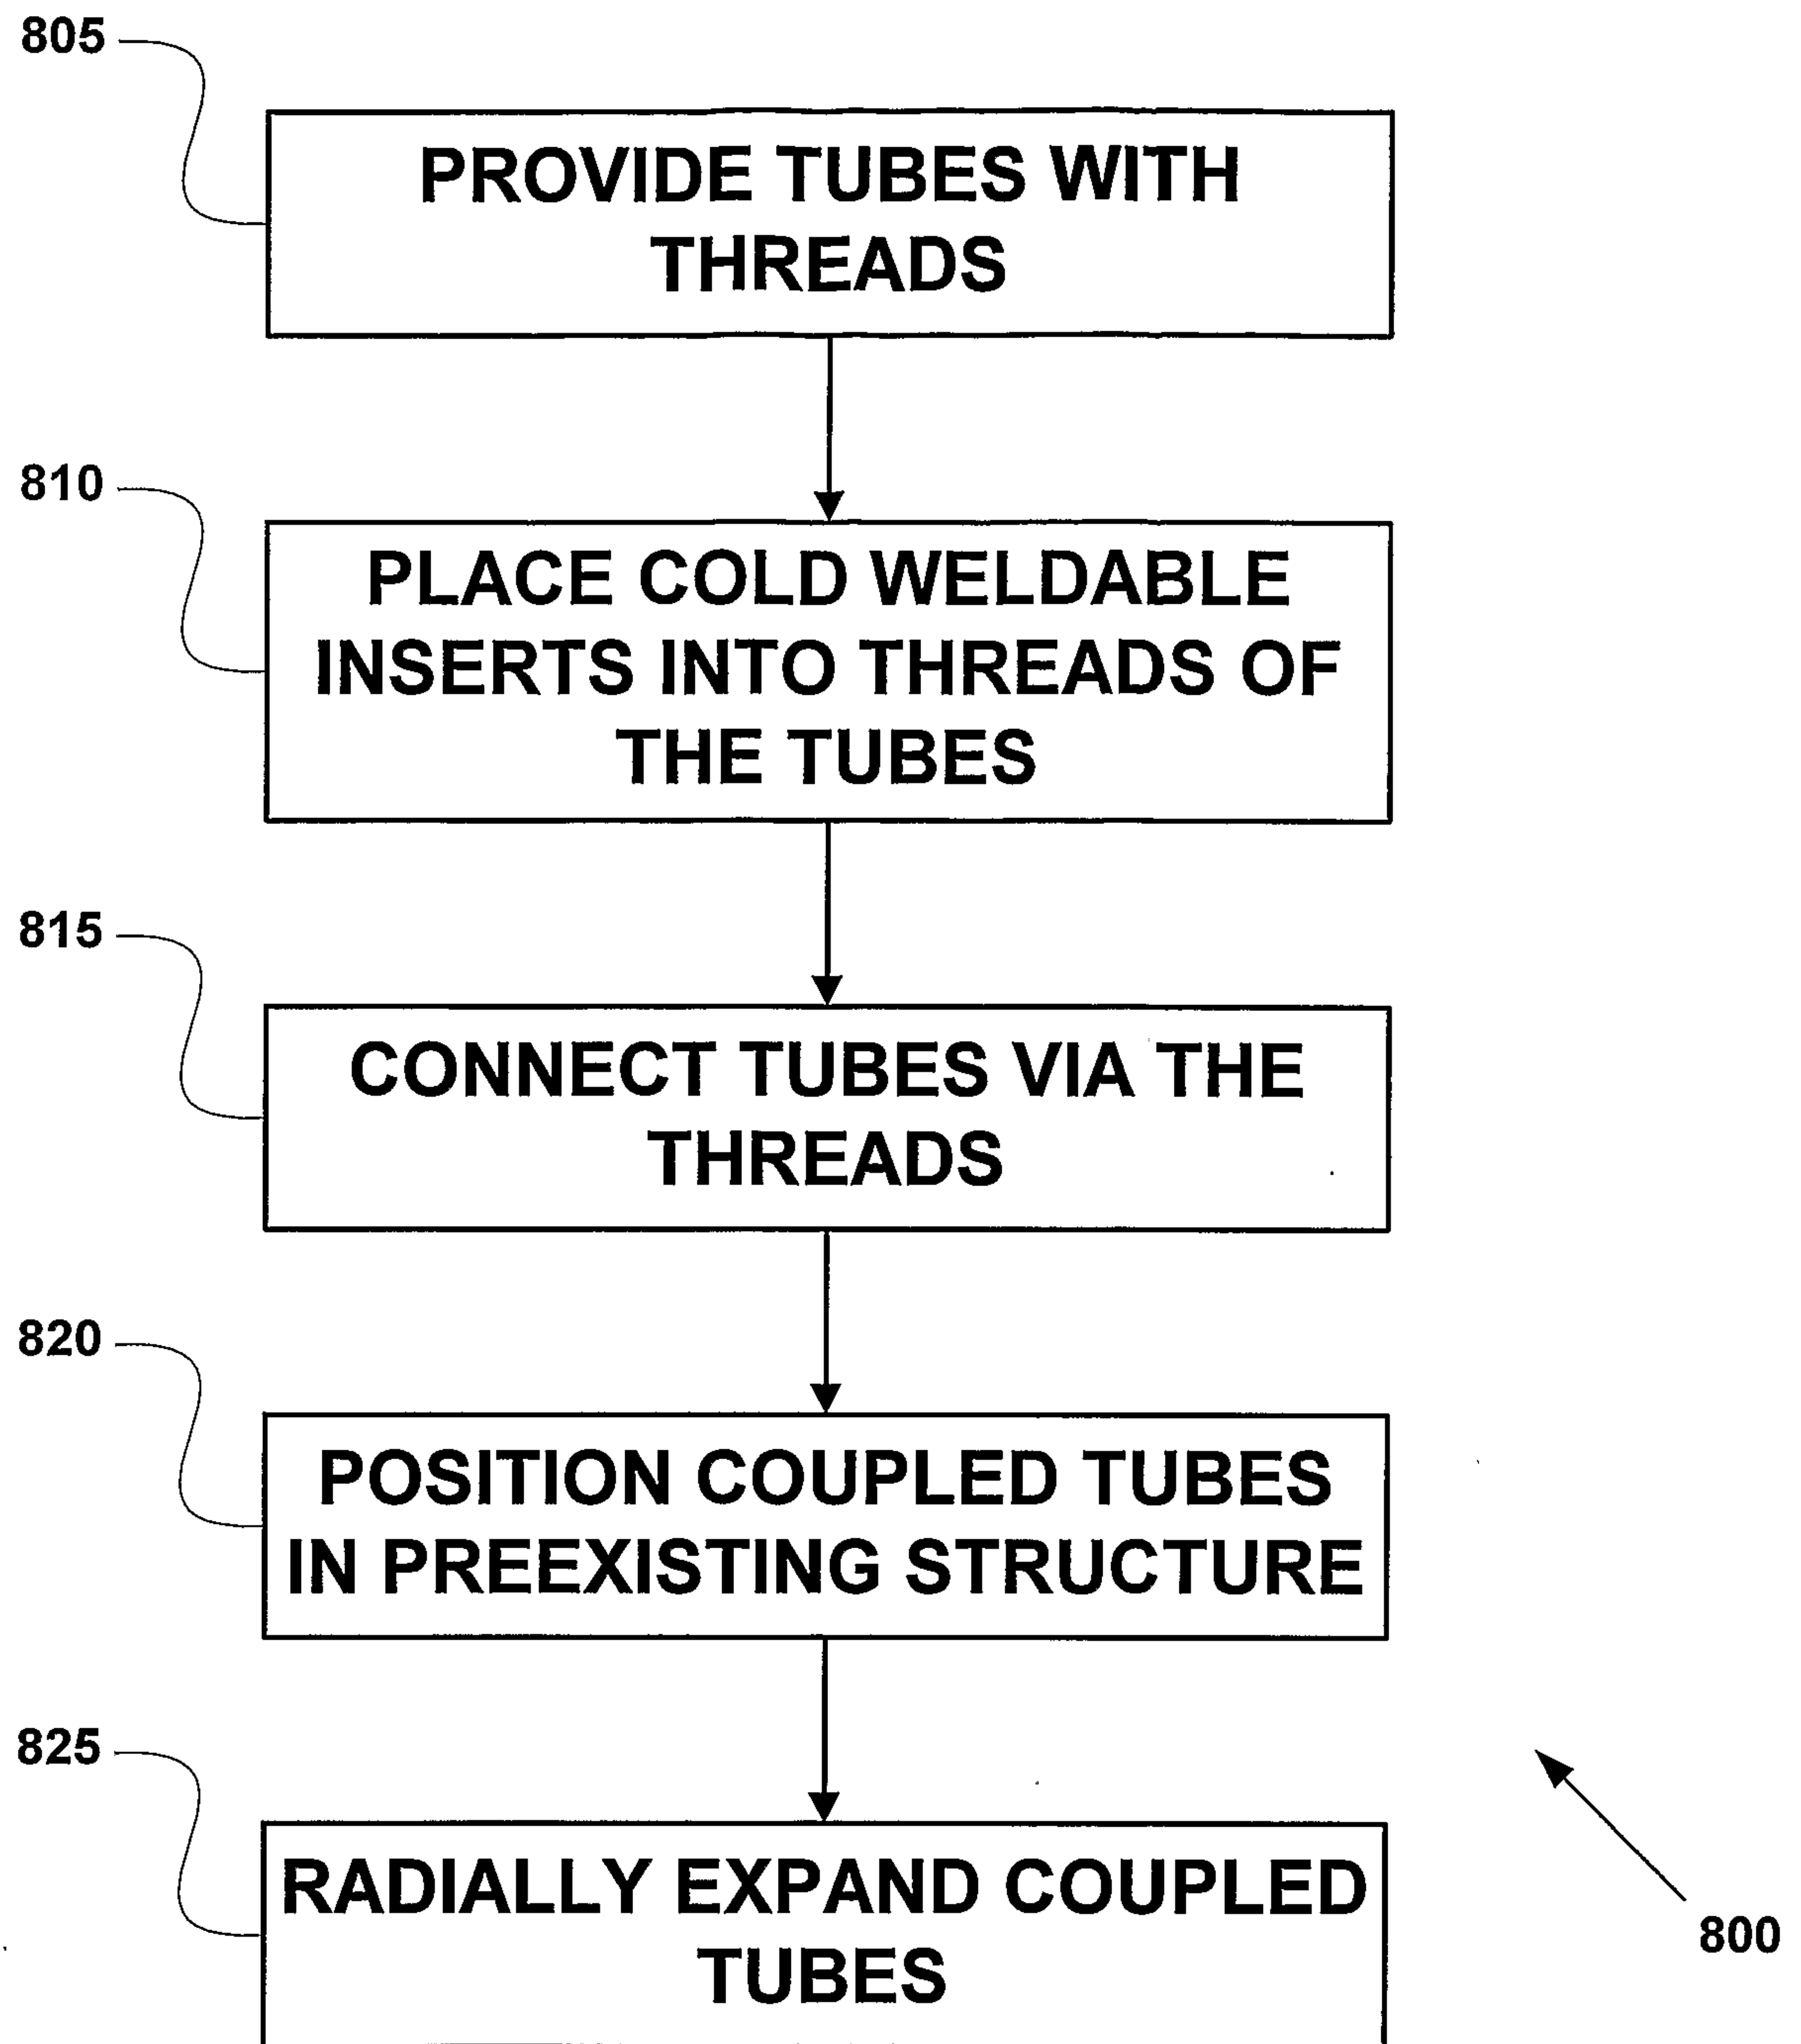
**Fig. 5**

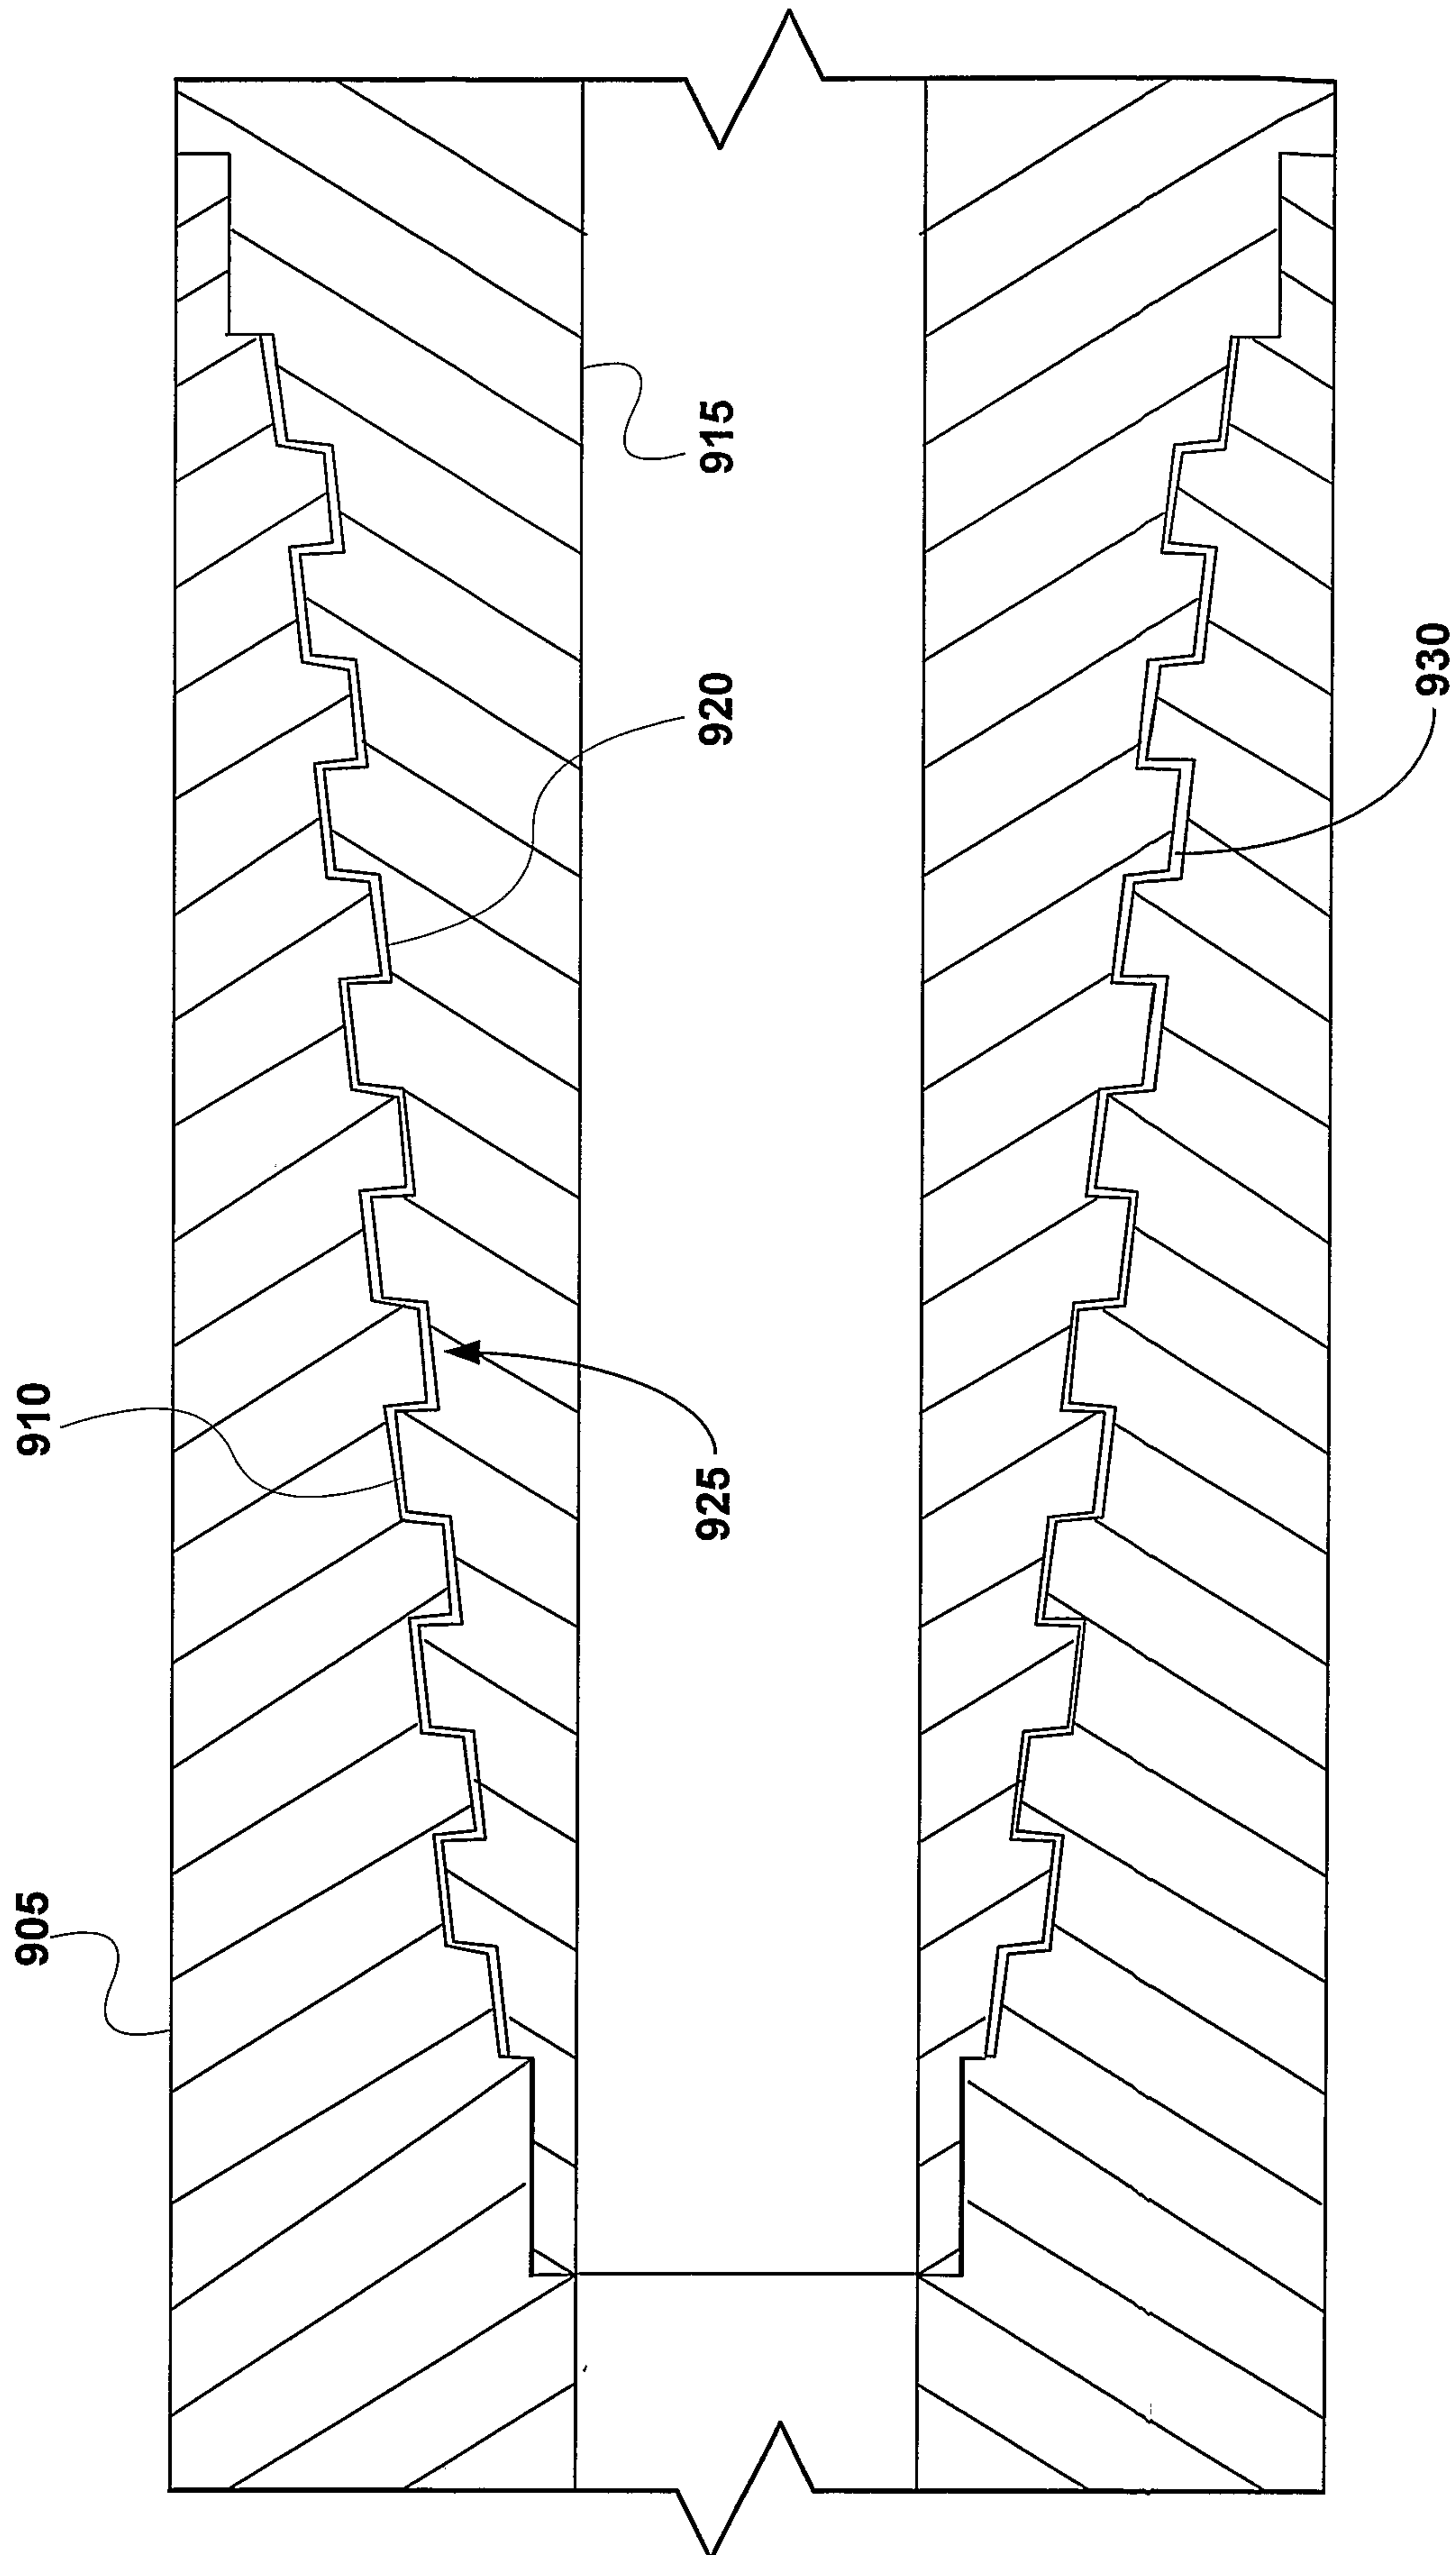
**Fig. 6**

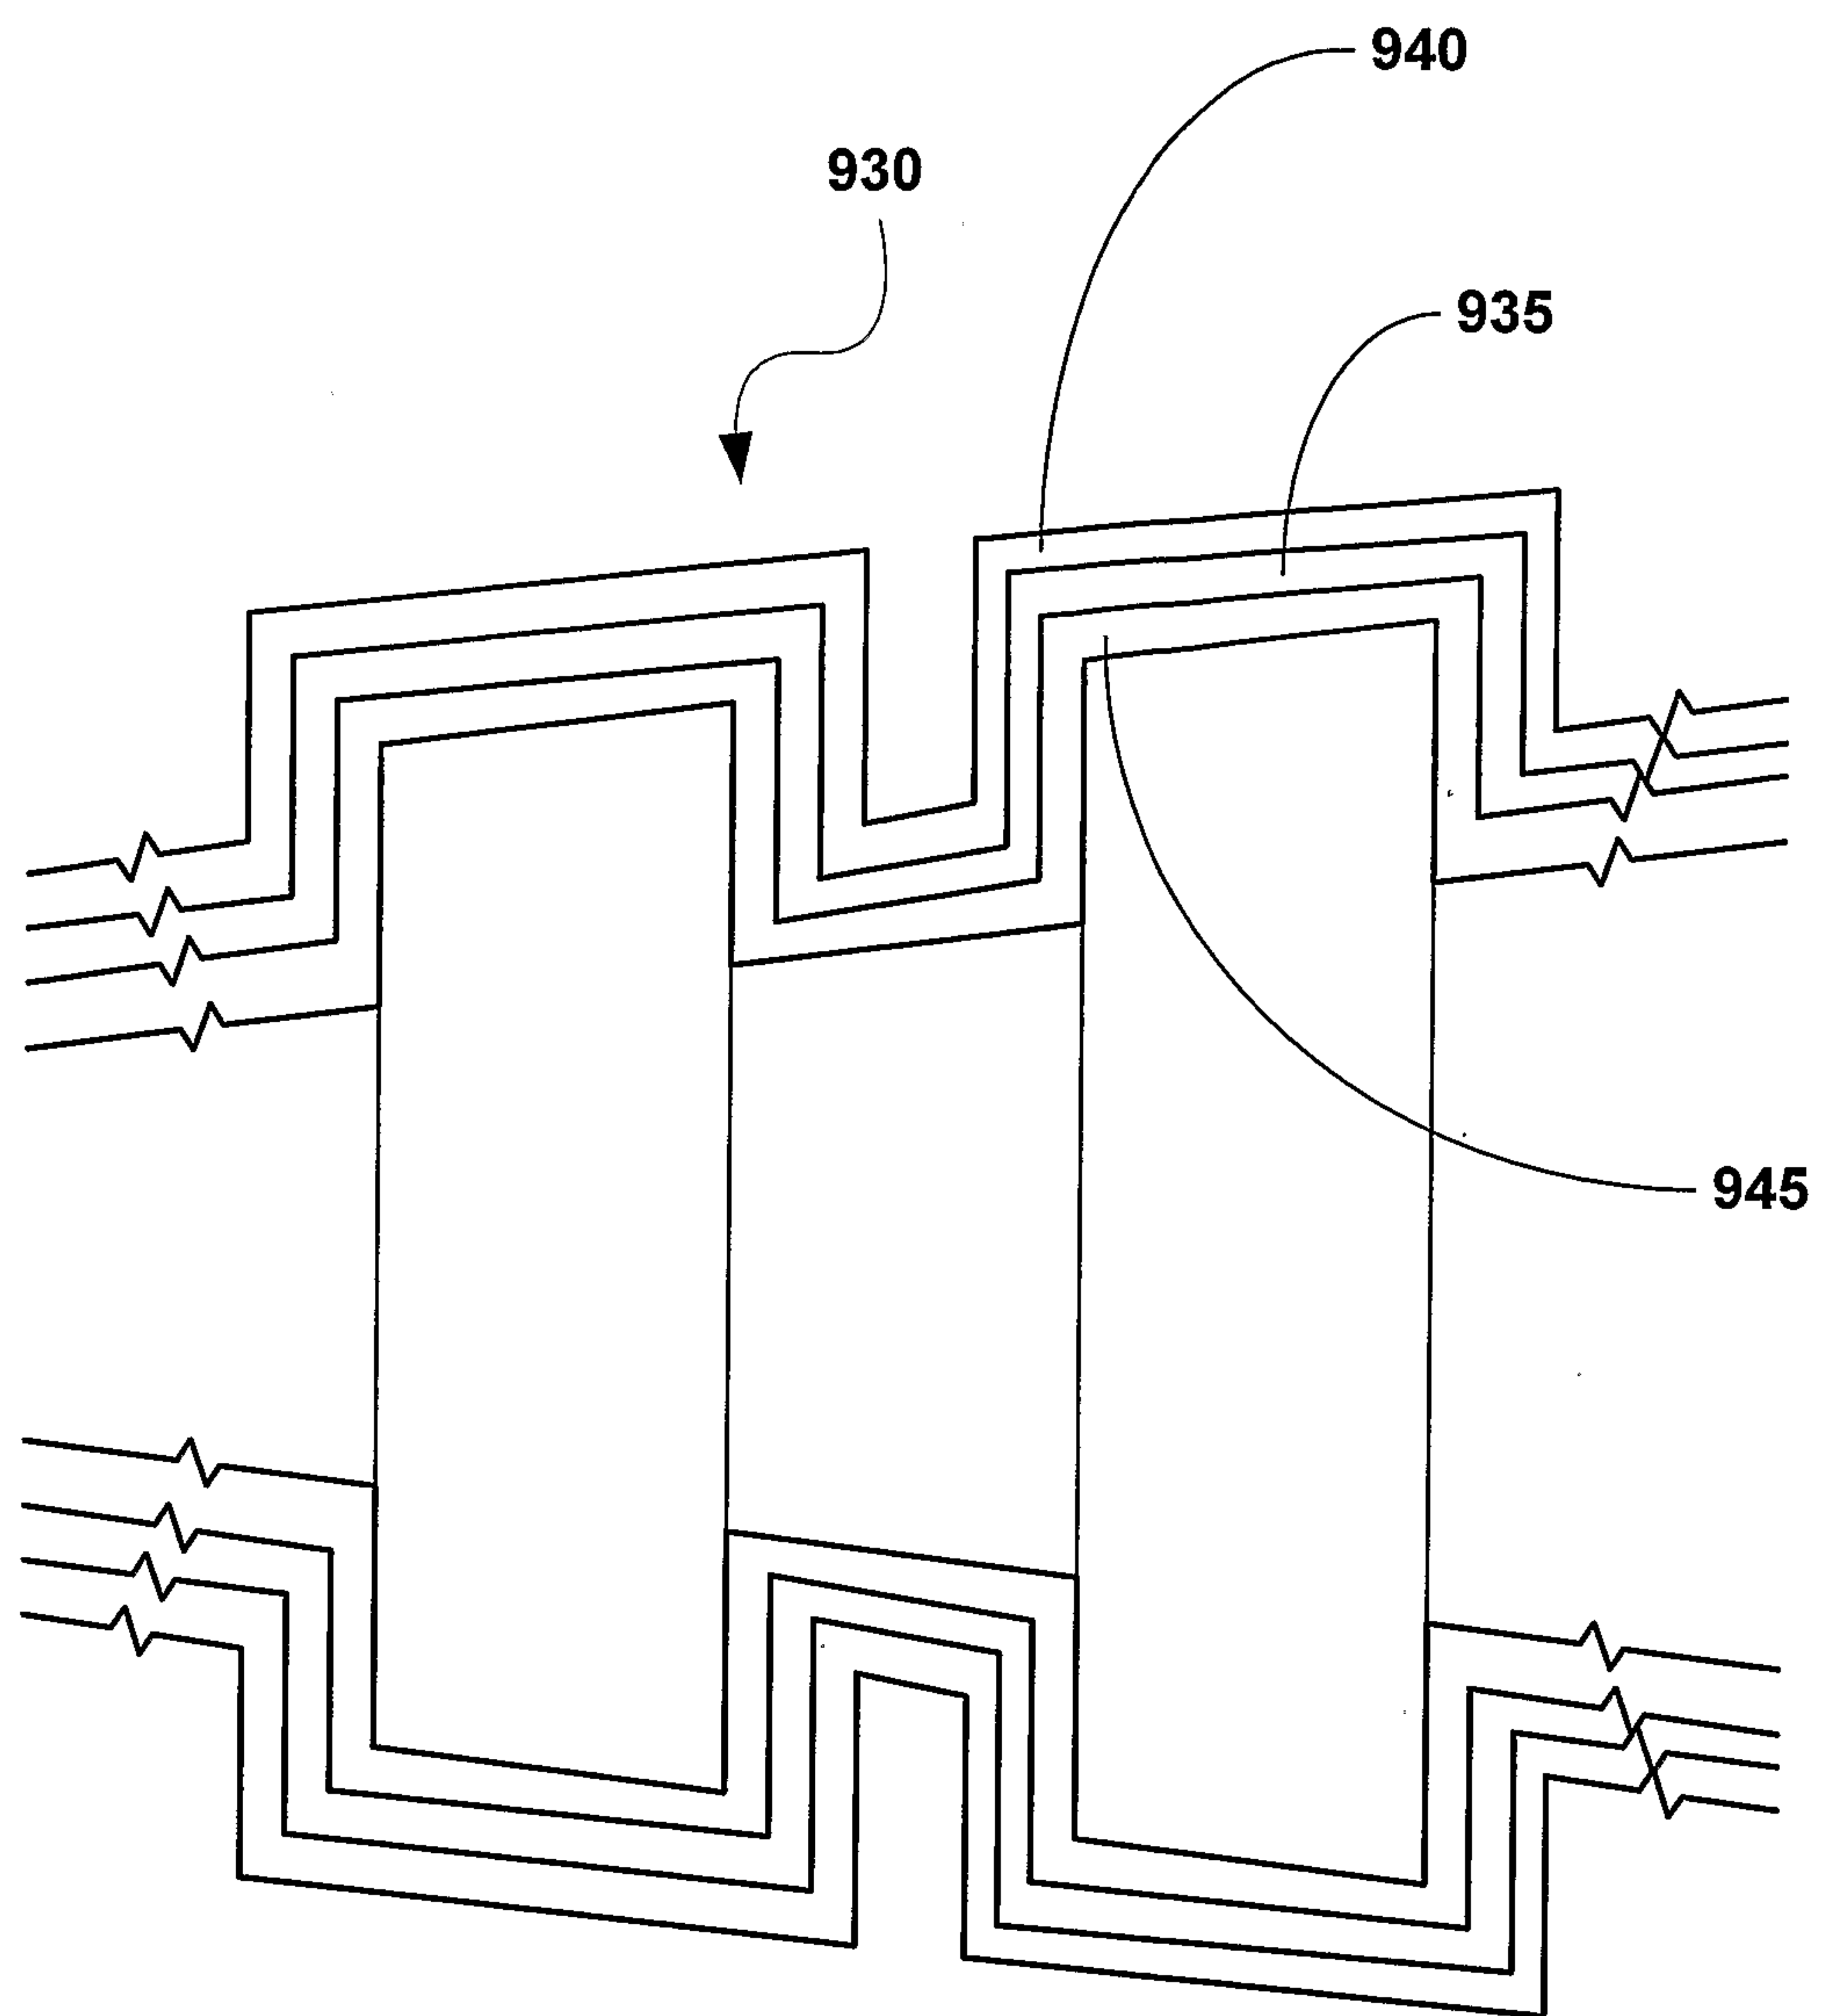
**Fig. 7**

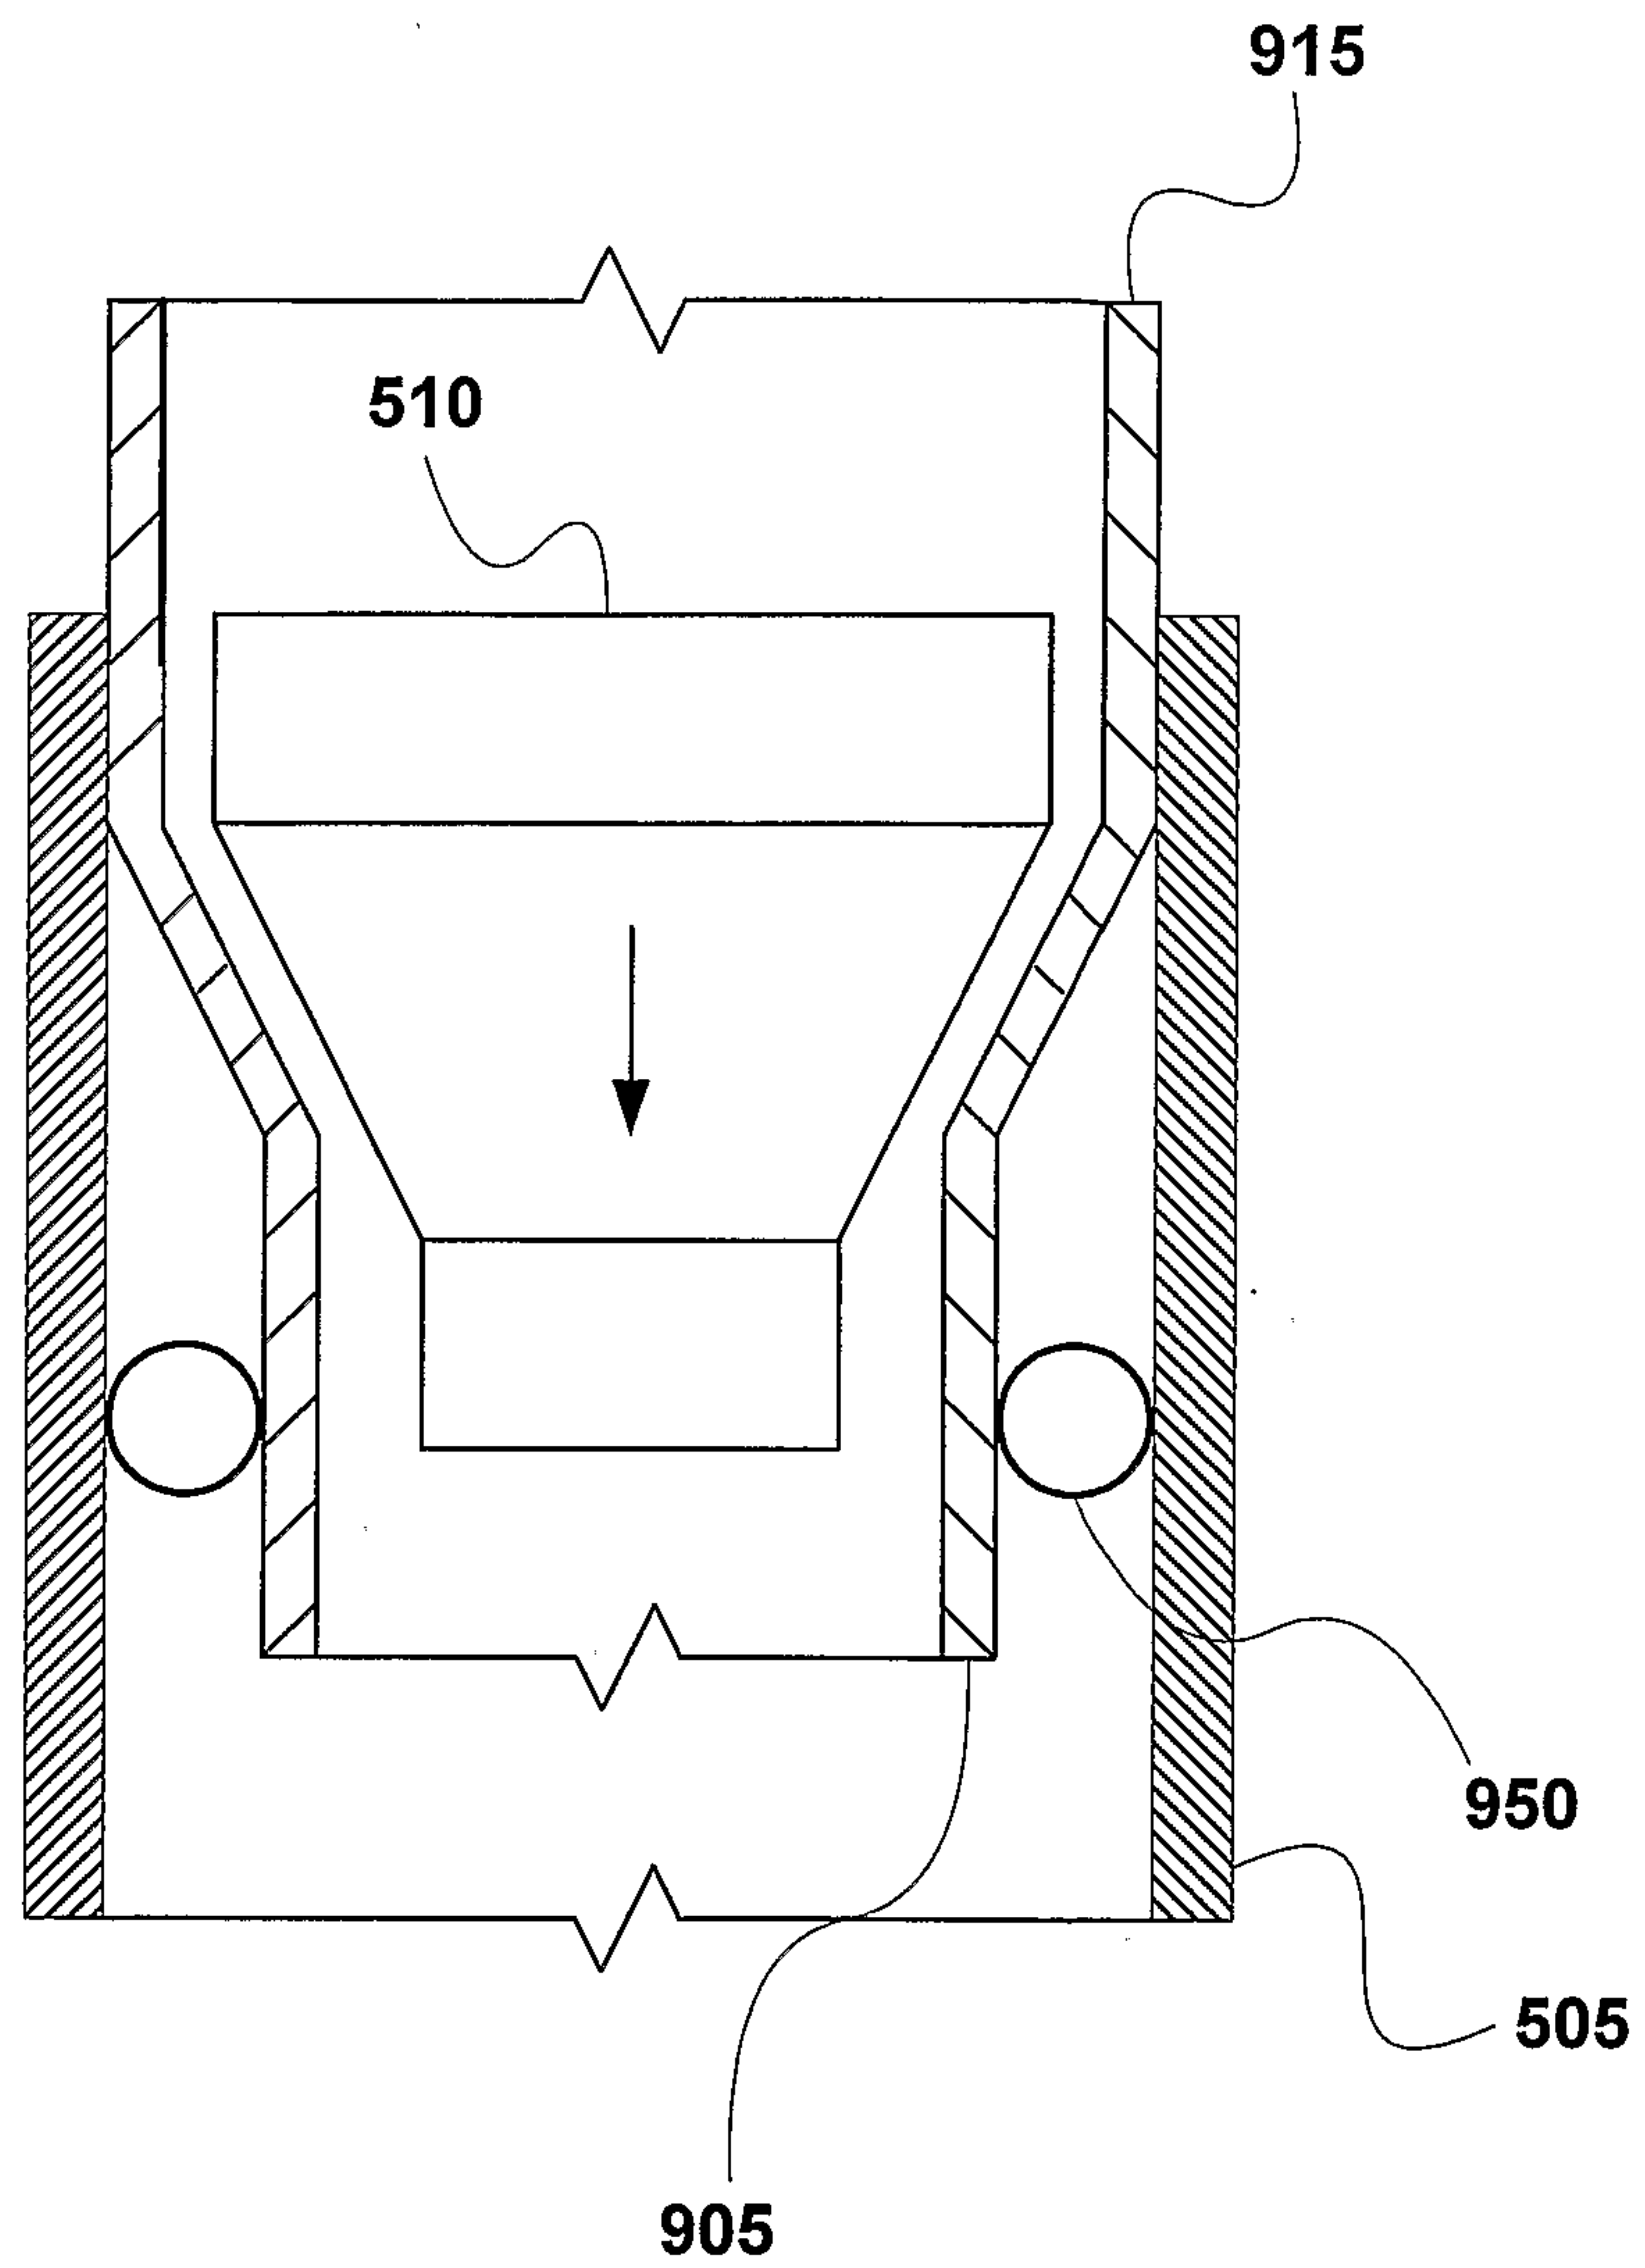
**Fig. 8**

**Fig. 9**

**Fig. 10**

**Fig. 11**

**Fig. 12**

**Fig. 13**

