




(86) Date de dépôt PCT/PCT Filing Date: 2004/07/23
(87) Date publication PCT/PCT Publication Date: 2005/10/27
(45) Date de délivrance/Issue Date: 2010/06/29
(85) Entrée phase nationale/National Entry: 2006/06/29
(86) N° demande PCT/PCT Application No.: JP 2004/010507
(87) N° publication PCT/PCT Publication No.: 2005/099549
(30) Priorités/Priorities: 2004/04/01 (JP2004-109429);
2004/04/16 (JP2004-121408)

(51) Cl.Int./Int.Cl. *A47L 13/16* (2006.01),
A47L 13/18 (2006.01)
(72) Inventeur/Inventor:
YAMADA, KIKUO, JP
(73) Propriétaire/Owner:
YAMADA, CHIYOE, JP
(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : FEUILLE D'OUTIL DE NETTOYAGE ET OUTIL DE NETTOYAGE
(54) Title: CLEANING TOOL SHEET AND CLEANING TOOL

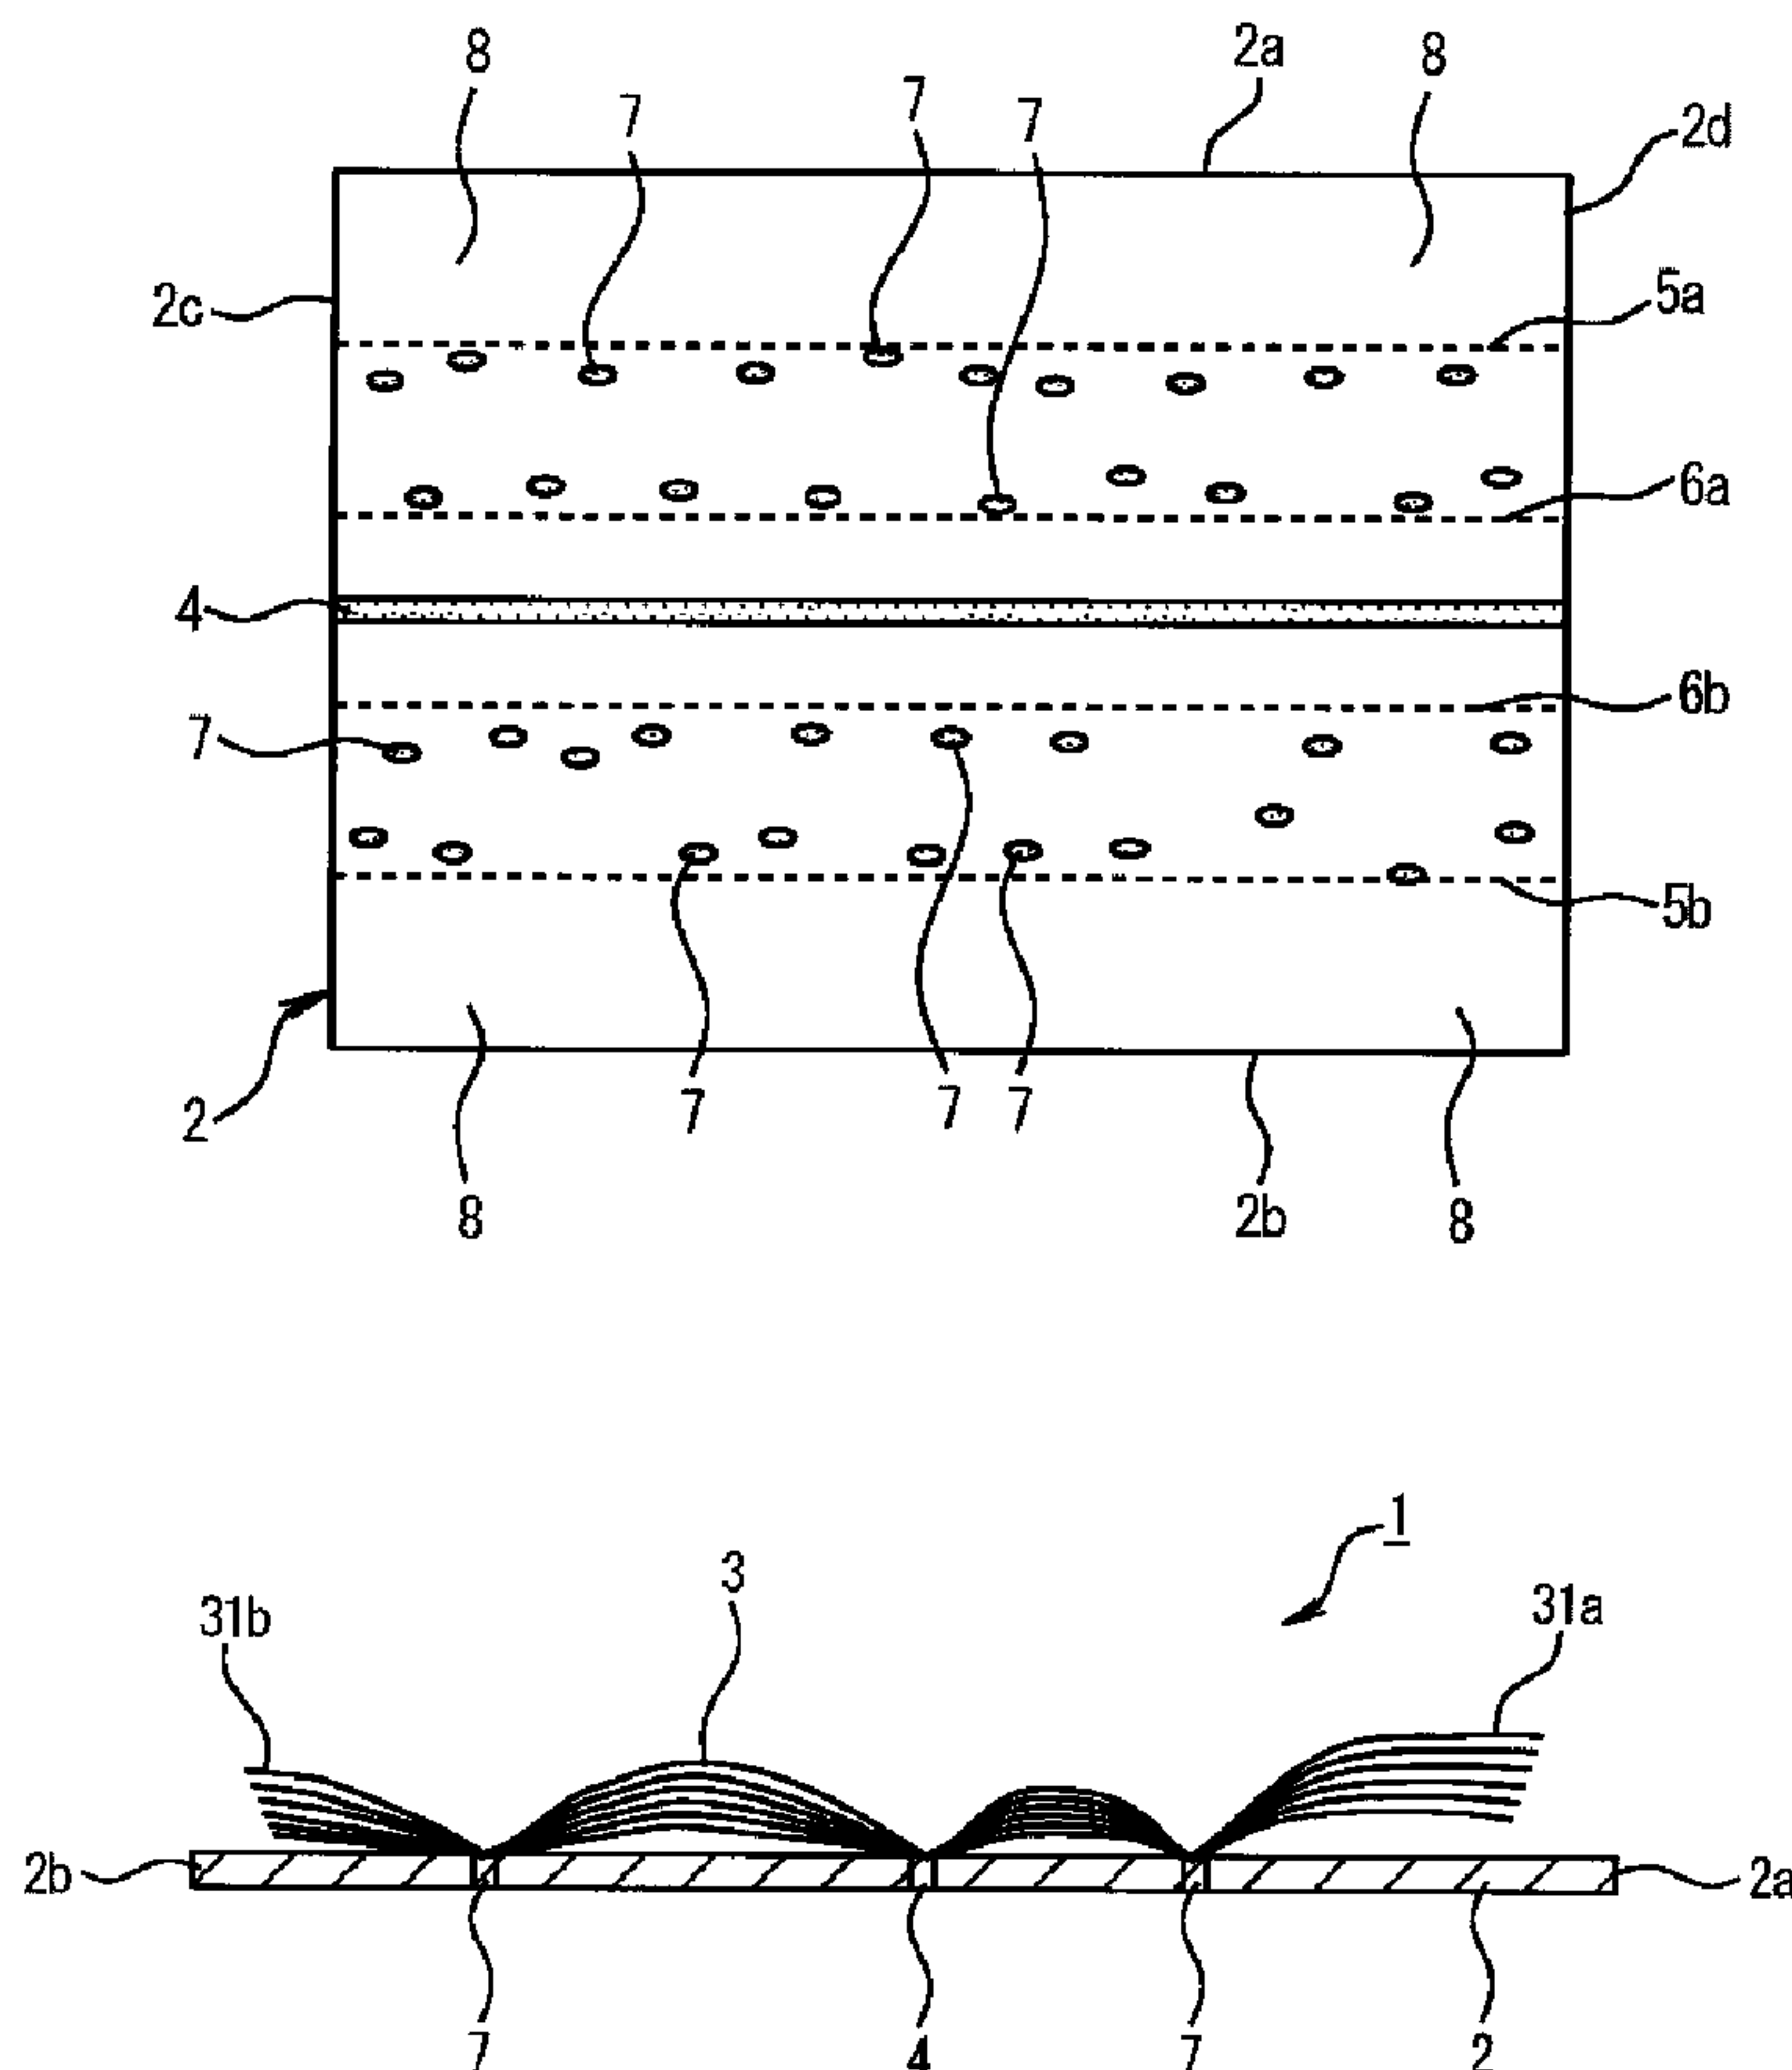

(57) Abrégé/Abstract:

The present invention relates to a cleaning tool sheet and a cleaning tool capable of use for wiping cleaning by contacting the surface of objects to be cleaned in various locations. In a cleaning tool sheet (1), fiber bundles (3) are laminated on one side face of

(57) **Abrégé(suite)/Abstract(continued):**

a base sheet (2); the central parts in the direction of flow of the fibers constituting the fiber bundles (3) are joined by a central joining part (4) continuously formed in the central part of the base sheet (2) and joined at a spot-form joining part (7) formed intermittently on a parallel line between the central joining part (4) and two end edges (2a, 2b) parallel therewith. The two ends (31a, 31b) in the direction of flow of the fibers of the fiber bundles (3) are not joined to the base sheet (2). An attaching part (8) for attaching onto a holding member is provided at both ends of the base sheet (2).

ABSTRACT

The present invention relates to a cleaning tool sheet and a cleaning tool capable of use for wiping cleaning by contacting the surface of objects to be cleaned in various
5 locations. In a cleaning tool sheet (1), fiber bundles (3) are laminated on one side face of a base sheet (2); the central parts in the direction of flow of the fibers constituting the fiber bundles (3) are joined by a central joining part (4) continuously formed in the central part of
10 the base sheet (2) and joined at a spot-form joining part (7) formed intermittently on a parallel line between the central joining part (4) and two end edges (2a, 2b) parallel therewith. The two ends (31a, 31b) in the direction of flow of the fibers of the fiber bundles (3) are not joined to the
15 base sheet (2). An attaching part (8) for attaching onto a holding member is provided at both ends of the base sheet (2).

DESCRIPTION

CLEANING TOOL SHEET AND CLEANING TOOL

TECHNICAL FIELD

5 The present invention relates to a cleaning tool sheet and a cleaning tool that are employed to wipe away dirt by contacting the surface of articles to be cleaned in various locations.

BACKGROUND ART

10 Sheets for cleaning tools employing nonwoven fabric are employed in cleaning tools used for cleaning by wiping away various types of dirt such as dirt or dust adhering to floors or walls, food scraps such as breadcrumbs, hair, thread dust or various other types of fine dirt. Sheets for
15 cleaning tools are widely employed in the form of so-called throwaway or replaceable sheets which can be removed and replaced by a new sheet when they become contaminated to a certain degree. Known types of sheets for cleaning tools include (1) cleaning sheets having liquid paraffin or the
20 like adhering to the surface of a nonwoven fabric sheet; and (2) sheets for cleaning tools (see Patent Reference 1) wherein joining threads are provided at fixed intervals intersecting with long fiber filaments in a fixed direction provided on a base sheet and constructed such that dust or
25 debris is captured by nap raising at the surface by cutting

some or all of the long fiber filaments between the joining threads.

However, the sheets for cleaning tools of (1) above could only capture fine particles of dirt adhering to the surface thereof and had a low ability to capture comparatively large particles of dirt. Also, the sheets for cleaning tools of (1) above had a low ability to hold the captured dust or debris. In contrast, the sheets for cleaning tools of (2) described above are capable of capturing dust by the long fiber portions that are formed on the surface thereof, thereby improving the capturing performance or holding performance in respect of dust or debris, but their ability to capture comparatively large particles of dirt is insufficient; better dirt capturing performance and holding ability are therefore sought.

Also, the aforementioned conventional cleaning tool sheet is employed (see Patent Reference 2) in a cleaning tool for wiping a floor surface by attaching to the undersurface of the pedestal of a holder constituted by joining a long handle to a flat-plate-form pedestal. To perform cleaning using this cleaning tool for wiping the floor surface, the cleaning tool is held by the handle and wiping is performed with the sheet for the cleaning tool attached to the pedestal pressed against the surface that is to be cleaned. The cleaning tool sheet that is attached to the pedestal is lacking in elasticity, since it is itself

formed of thin nonwoven fabric or the like and so has scarcely any cushioning ability.

When a wiping task is performed using this cleaning tool for floor wiping, although the dirt can be comparatively efficiently captured at the periphery of the pedestal, since a large pressure is applied in this region, its ability to capture various types of dirt in the middle region of the pedestal is poor, since little pressure is applied in this region, compared with the peripheral region: there was therefore the problem that efficient use of the cleaning tool sheet as a whole could not be achieved.

Also, as a hand-held cleaning tool employed for removing dust or debris in rooms or vehicles, a "handy mop" (hand-held wiping cleaning tool) is known (see Patent Reference 3) that is used by inserting the attaching part of a grip that is constituted of a holding part and an attaching part having two flat parallel insertion plates in a gap for attaching a mop body having two parallel gaps for attaching (attachment gaps). The mop body that is employed in this hand-held wiping cleaning tool may be replaced by a new mop body when it becomes contaminated, so disposable type mop bodies are employed. For this mop body, a cleaning tool sheet is employed that is secured by thermal fusion on a line running transversely across the middle thereof and constituted by overlaying two or three sheets of nap-raised nonwoven fabric made of synthetic resin. On the upper

surface of the mop body, there are formed two parallel attachment gaps between three thermal fusion lines; pieces of nonwoven fabric of short length are overlaid in the middle thereof on nonwoven fabric of the same size as the mop, being stuck in position on these three thermal fusion lines in the length direction.

However, since the cleaning tool sheet that is employed as a mop body of the aforesaid hand-held wiping cleaning tool is merely constituted by overlaying two or three sheets of nonwoven fabric made of nap-raised synthetic resin, its ability to capture comparatively large particles of dirt is insufficient, just as in the case of the cleaning tool sheet disclosed in Patent Reference 2; thus, further improvement in dirt capturing performance and holding ability are sought.

A cleaning tool that is formed in the form of a glove is also known (see Patent Reference 4). Specifically, this is of a construction adopting a design taking into account beforehand the desired borders where a wiping function is to be provided and engaging and overlaying two cut sheets, providing a hand insertion hole in which the fingers can be inserted and whose periphery is stitched or glued along the outline of the fingers; thus fine cleaning can be achieved by utilizing wiping sheet faces whereof the borders or the tip of the borders can abut and contact all the nooks and crannies of complex curved surfaces with a high degree of

irregularity and enable transmission of a sensation of contact to the fingertips.

However, since the aforesaid conventional glove-form cleaning tool employed a wooly material or other wiping
5 sheet or nonwoven fabric of excellent dirt capturing characteristics it was only able to capture fine particles of dirt adhering to its surface and its ability to capture comparatively large particles of dirt was low.

Also, with a conventional glove-form cleaning tool as
10 described above, it was difficult to apply pressure at portions other than the fingertips so the ability to capture dirt was low. There was the problem of low efficiency, since capture of dirt could only be performed in an extremely restricted portion of the cleaning tool such as at
15 the fingertips, portions other than these being substantially unused for capture of dirt.

Also, with a conventional glove-form cleaning tool as described above, the ability to hold captured dirt was restricted and the ability to capture comparatively large
20 particles of dirt was insufficient; thus a cleaning tool of better capturing ability and holding ability for dirt was sought.

The present invention was made in order to solve the above problems, its object being to provide a cleaning tool
25 sheet of excellent ability to capture and ability to hold various types of dirt such as dust or debris.

A further object, in a cleaning tool sheet employed in a cleaning tool for floor wiping, is to provide a cleaning tool sheet having a cushioning effect when attached to a pedestal for a cleaning tool so that pressure can be applied to the entirety from the peripheral portion to the central portion of the pedestal, and which thus exhibits the ability to capture various types of dust or debris over the entire surface to be cleaned and so is capable of efficiently utilizing this entire cleaning tool sheet.

Yet a further object is to provide a cleaning tool sheet having excellent dirt capturing ability and dirt holding ability in a cleaning tool sheet employed in a hand-held wiping cleaning tool.

Also a further object, in a glove-form cleaning tool, is to provide a cleaning tool of excellent ability to capture and ability to hold various types of dirt such as dust or debris that is easy to use and whereby the whole thereof can be efficiently utilized.

[Patent reference 1] Laid-open Japanese Patent Application No. 2000-245670

[Patent reference 2] Laid-open Japanese Patent Application No. 2000-296084

[Patent reference 3] Laid-open Japanese Patent Application No. 2003-265391

[Patent reference 4] Laid-open Japanese Patent Application No. 2003-510

DISCLOSURE OF THE INVENTION

The present invention consists in a cleaning tool sheet characterized in that fiber bundles are laminated on one side of a base sheet, the central parts in the direction of flow of the fibers constituting the fiber bundles are joined by a central joining part continuously formed in the central part of the base sheet and joined at a spot-form joining part formed intermittently on a parallel line between the central joining part and two end edges parallel therewith, but the two ends in the direction of flow of the fibers not being joined to the base sheet.

Although the cleaning tool sheet according to the present invention is formed with a spot-form joining part, it could be formed with a plurality of spot-form joining parts. Preferably the joining positions of the plurality of spot-form joining parts are formed such that they do not overlap in the direction of flow of the fiber bundles.

Preferably, in the cleaning tool sheet according to the present invention, although the fiber bundles are laminated on the base sheet, the base sheet and the fiber bundles have thermal fusibility.

While fiber bundles are employed in the cleaning tool sheet according to the present invention, preferably the thickness of the fibers constituting these fiber bundles is 1 to 18 denier.

In a cleaning tool sheet employed in a cleaning tool for floor wiping according to the present invention, fiber bundles are laminated on one side of a base sheet, the central parts in the direction of flow of the fibers constituting the fiber bundles are joined by a central joining part continuously formed in the central part of the base sheet and joined at a spot-form joining part formed intermittently on a parallel line between the central joining part and two end edges parallel therewith, but the two ends in the direction of flow of the fibers not being joined to the base sheet, and an attaching part for attaching to a holding member of the cleaning tool for floor wiping is provided at both end edges parallel with the central joining part of the base sheet.

In a cleaning tool sheet employed in a hand-held wiping cleaning tool according to the present invention, fiber bundles are laminated on one side of a base sheet, the central parts in the direction of flow of the fibers constituting the fiber bundles are joined by a central joining part continuously formed in the central part of the base sheet and joined at a spot-form joining part formed intermittently on a parallel line between the central joining part and two end edges parallel therewith, but the two ends in the direction of flow of the fibers not being joined to the base sheet, and a holding sheet formed with a holding part comprising a space for holding by insertion of

a leg of a holding member of the hand-held wiping cleaning tool is joined on the side of the base sheet opposite to the face where the fiber bundles are laminated.

In a glove-form cleaning tool according to the present invention, a cleaning tool sheet is employed wherein fiber bundles are laminated on one side of a base sheet, the central parts in the direction of flow of the fibers constituting the fiber bundles are joined by a central joining part continuously formed in the central part of the base sheet and joined at a spot-form joining part formed intermittently on a parallel line between the central joining part and two end edges parallel therewith, but the two ends in the direction of flow of the fibers not being joined to the base sheet; and a glove-form external appearance is formed by laminating a second sheet on the base sheet side of the cleaning tool sheet and providing a holding part comprising a space for holding by insertion of a hand between the base sheet and the second sheet.

Since, with the cleaning tool sheet according to the present invention, the fiber bundles are joined in the central joining part and spot-form joining part and both ends in the direction of flow of the fibers are not joined to the base sheet, the fiber bundle region can be formed with high bulk with considerable nap raising of the fibers of the fiber bundles. Since the two ends in the direction of flow of the fiber bundles of the cleaning tool sheet hang

downwards and the tip portions of the fibers at both ends of the fibers are liberated from the base sheet so that they are free to move, the ability to capture and ability to hold various types of dirt such as dust or debris is excellent in comparison with for example conventional sheets for cleaning tools whose surface nap is raised by cutting long fiber filaments.

Since the cleaning tool sheet according to the present invention is formed with a plurality of spot-form joining parts, in the fibers of the fiber bundles, the length from the central joining part to the spot-form joining part and the length from the spot-form joining part to the end are different; thus the fibers in the fiber bundles are formed with various different lengths, making it possible to prevent mutual entanglement of the fibers even more effectively. When a plurality of spot-form joining parts are formed, entanglement of the fibers can be reliably prevented, since the proportion of fibers of different lengths is increased by arranging that the spot-form joining parts do not overlap in the direction of flow of the fiber bundles.

If the base sheet and the fiber bundles of the cleaning tool sheet according to the present invention have thermal fusibility, these two can be joined and integrated by heating and applying pressure using a heating roll or the

like, thereby making it possible to manufacture a cleaning tool sheet easily.

If the thickness of the fibers constituting the fiber bundles of the cleaning tool sheet according to the present invention is 1 to 18 denier, a reliable ability to capture and ability to hold a wide range of dirt from small dirt particles to large dirt particles are manifested.

Since, when attached to the pedestal of the cleaning tool, the ends of the fiber bundles hang downwards and are liberated from the base sheet so that they are free to move, in the cleaning tool sheet employed in a floor wiping cleaning tool according to the present invention, the fibers are unlikely to become entangled and excellent ability to capture and hold dust and debris or the like from the surface of the floor or the like to be cleaned is provided.

If a cleaning tool sheet employed in a floor wiping cleaning tool according to the present invention is attached such that the fiber bundles on the pedestal of the cleaning tool are on the inside while the base sheet is on the outside undersurface, the tips of the fiber bundles can move freely between the base sheet and the pedestal, so a bulky formation can be achieved providing an excellent cushioning effect. As a result, when wiping is performed using the base sheet surface, pressure is applied evenly over the entire surface from the peripheral part to the central part of the wiping portion, so there is excellent adherence

between the wiping surface and the surface to be cleaned, making it possible to utilize the whole sheet effectively for cleaning.

Since, in a cleaning tool sheet employed in a hand-held
5 wiping cleaning tool according to the present invention, fiber bundles are laminated on one side of a base sheet, the central parts in the direction of flow of the fibers constituting the fiber bundles are joined by a central joining part continuously formed in the central part of the
10 base sheet and joined at a spot-form joining part formed intermittently on a parallel line between the central joining part and two end edges parallel therewith, but the two ends in the direction of flow of the fibers not being joined to the base sheet, and a holding part comprising a
15 space for holding by insertion of a leg of a holding member of the hand-held wiping cleaning tool is formed on the side of the base sheet opposite to the face where the fiber bundles are laminated, the ends of the fiber bundles hang downwards and are liberated from the base sheet so that they
20 are free to move, so the fibers are unlikely to become entangled and excellent ability to capture and hold dust and debris or the like from the surface to be cleaned is provided.

Since, in a glove-form cleaning tool according to the
25 present invention, a cleaning tool sheet is employed wherein fiber bundles are laminated on one side of a base sheet, the

central parts in the direction of flow of the fibers
constituting the fiber bundles are joined by a central
joining part continuously formed in the central part of the
base sheet and joined at a spot-form joining part formed
5 intermittently on a parallel line between the central
joining part and two end edges parallel therewith, but the
two ends in the direction of flow of the fibers not being
joined to the base sheet and a glove-form external
appearance is formed by laminating a second sheet on the
10 base sheet side of the cleaning tool sheet and providing a
holding part comprising a space for holding by insertion of
a hand between the base sheet and the second sheet, in
comparison with a conventional cleaning tool using nonwoven
fabric or a wiping sheet, both ends of the fibers do not
15 contact and are liberated from the base sheet, enabling free
movement when performing cleaning, so the tool can enter the
nooks and crannies of various types of surfaces to be
cleaned having irregularities, such as the irregular
keyboards of personal computers or ornamented furniture or
20 domestic electrical products of a complex shape and has an
excellent ability to wipe and capture dust or debris or the
like and ability to hold such dirt.

Furthermore, since a glove-form cleaning tool according
to the present invention is provided with a holding part for
25 making it possible to hold the cleaning tool with a hand
inserted, the fiber bundles are formed in a bulky manner

when cleaning is performed with a hand inserted in the glove-form cleaning tool; this therefore provides excellent cushioning ability so that adherence to the surface to be cleaned is satisfactorily maintained over the entirety thereof, making it possible to utilize the entire sheet efficiently for cleaning.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a plan view showing an example of a cleaning tool sheet according to the present invention;

10 Figure 2 is a diagram showing a joining portion of a cleaning tool sheet according to Figure 1;

Figure 3 is an end face view showing a cross-section along the line A-A of Figure 1;

15 Figure 4 is an end face view showing a cross-section along the line B-B of Figure 1;

Figure 5 is a perspective view showing the external appearance of an example of a floor wiping cleaning tool employing a cleaning tool sheet according to the present invention;

20 Figure 6 is a cross-sectional view along F-F showing the condition in which a cleaning tool sheet is attached such that the fiber bundle side is at the undersurface thereof in a floor wiping cleaning tool according to Figure 5;

25 Figure 7 is a cross-sectional view along F-F showing the condition in which a cleaning tool sheet is attached such

that the base sheet side is at the undersurface thereof in a floor wiping cleaning tool according to Figure 5;

Figure 8 is a plan view showing an example of a cleaning tool sheet used in a hand-held wiping cleaning tool according to the present invention;

Figure 9 is an end face view showing a cross-section along C-C of Figure 8;

Figure 10 is a bottom face view of a cleaning tool sheet according to Figure 8;

Figure 11 is an end face view showing a cross-section along D-D of Figure 8;

Figure 12 is a perspective view showing the external appearance of a holding member of a hand-held wiping cleaning tool;

Figure 13 is a perspective view of the external appearance showing a hand-held wiping cleaning tool using a cleaning tool sheet according to Figure 8;

Figure 14 is a perspective view of the external appearance showing an example of a glove-form cleaning tool according to the present invention;

Figure 15 is an end face view showing a cross-section along E-E of Figure 14;

Figure 16 is a view seen from the side of a second sheet of the glove-form cleaning tool of Figure 14;

Figure 17 is a view seen from the side of the sheet for the cleaning tool of the glove-form cleaning tool of Figure 14;

Figure 18 is a perspective view of the external appearance showing an example of a support member used in a glove-form cleaning tool according to Figure 14;

Figure 19 is a plan view showing a holding sheet used as a cleaning tool sheet according to Figure 8;

Figure 20 is an end face view showing a cross-section along the line G-G of Figure 19;

Figure 21 is a perspective view showing the step of laminating a holding sheet according to Figure 19 onto a cleaning tool sheet.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

As shown in Figure 1 to Figure 3, in a sheet 1 for a cleaning tool according to the present invention, fiber bundles 3 formed in sheet fashion by collecting a large number of fibers are laminated on one side face of a rectangular base sheet 2 made of nonwoven fabric or the like; in regard to the base sheet 2 and the fiber bundles 3, the central parts thereof in the direction of flow of the fibers constituting the fiber bundles 3 are joined with a central joining part 4 provided on a single continuous center line from one end edge 2c to the other end edge 2d of the rectangular shape in the central part of the rectangular base sheet 2.

Furthermore, as shown in Figure 2, the fiber bundles 3 and base sheet 2 are joined at spot-form joining parts 7 formed in intermittent fashion on parallel lines 5a, 5b, 6a, 6b between the two end edges 2a, 2b parallel with the central joining part 4 of the base sheet 2. As shown in Figure 2, the parallel lines 5a, 5b, 6a, 6b where the spot-form joining parts 7 are provided are formed between the central joining parts 4 and both end edges 2a, 2b of the base sheet 2.

As shown in Figure 3, in the cleaning tool sheet according to Figure 1, the centers of the fiber bundles 3 are joined with the central joining part 4 of the base sheet 2 and the fiber bundles 3 between this and one end edge 2a parallel with the central joining part 4 of the base sheet 2 are joined with the base sheet 2 by means of the spot-form joining parts 7. Also, the fiber bundles 3 between this and the other end edge 2b parallel with the central joining part 4 of the base sheet 2 are joined with the base sheet 2 by means of the spot-form joining parts 7. The ends 31a, 31b of the fiber bundles 3 in the direction of flow of the fibers are not joined with the base sheet 2 but are liberated therefrom.

Also, as shown in Figure 4, the cross-section along B-B of Figure 1 is a cross-section obtained by a parallel displacement of the cross-section along A-A but, between the one end edge 2a of the base sheet 2 and the central joining

part 4, the fibers of the fiber bundles 3 are in a condition in which they are completely unjoined with the base sheet 2, since no spot-form joining parts 7 are present from the central joining part 4 up to the end 31a in the direction of flow of the fibers. Also, the fiber bundles 3 between the other end edge 2b of the base sheet 2 and the central joining part 4 of the fiber bundles 3 are joined by the spot-form joining parts 7. The ends 31a, 31b in the direction of flow of the fibers of the fiber bundles 3 are liberated without being joined with the base sheet 2. The fibers of the fiber bundles 3 are constituted so as to be able to move freely in a length from the central joining part 4 or spot-form joining part 7 up to the tips 31a, 31b.

In this way, in the sheet 1 for a cleaning tool, between the central joining part 4 and the ends 2a, 2b, the fiber bundles 3 are joined by means of the spot-form joining parts 7 constituting intermittent joining parts, so, when seen from the direction of flow of the central joining part 4, the length of free movement of the fibers from the end of the fiber bundle 3 up to the joining part is different in the portions where a joining part with the spot-form joining part 7 is provided and in the portions where such a joining part is absent; in this way, entanglement of the fibers of the fiber bundles 3 can be prevented.

As shown in Figure 2, the spot-form joining parts 7 are provided directly above lines (parallel lines) 5a, 5b, 6a,

6b parallel with the central joining part 4 or in the vicinity of these lines. The spot-form joining parts 7 are lined up substantially linearly directly above the parallel lines 5a, 5b, 6a, 6b and are formed in non-continuous fashion intermittently in the linear direction of these parallel lines. The joining parts (spot-form parts) of the spot-form joining parts 7 formed intermittently on the parallel lines may be formed of circular shape, elliptical shape, oval shape or linear shape, for example; their shape may be formed of the same shape over the entire region of the spot-form joining parts or may be constituted by combining a plurality of the aforesaid shapes.

The widths of the spot-form parts constituting the spot-form joining parts 7 (in the direction of flow of the fibers) are preferably 0.5 to 5 mm and their lengths (in the longitudinal direction of the central joining part) are preferably 2 to 15 mm. Regarding the intervals of the joining parts of the spot-form joining parts 7 that are intermittently provided, the intervals with adjacent joining parts in the linear direction of the parallel lines are preferably formed such as to be 5 to 50 mm. The intervals of the spot-form joining parts may be constant over the entire region of the spot-form joining parts or may be different.

Also, the joining parts of the spot-form joining parts 7 may be formed so as to be positioned alternately on the left

and right in the width direction centered on the parallel lines (direction of flow of the fiber) or so as to be positioned in zigzag fashion on the left and right, with the parallel lines as center lines. That is, the joining parts
5 of the spot-form joining parts 7 need not necessarily be arranged in linear fashion on the line of the parallel lines.

Also, in the case of the sheet 1 for a cleaning tool according to the embodiment shown in Figure 1, as shown in Figure 2, the spot-form joining parts 7 may be provided on
10 respectively two parallel lines (5a, 6a or 5b, 6b) between one end (2a or 2b) parallel with the central joining part 4 of the base sheet 2, so that, as a whole, the sheet 1 for the cleaning tool is provided on a total of four parallel lines on both sides of the central joining part 4.

15 In the sheet 1 for a cleaning tool according to the present invention, the spot-form joining parts 7 are not restricted to the above mode but could be embodied in other modes. For example, the spot-form joining parts 7 could be provided on a single parallel line between the central
20 joining part 4 and the end edge 2a on one side and on a single parallel line between the central joining part 4 and the end edge 2b on the other side, so that, in terms of the entire sheet 1 for a cleaning tool, they are provided only on a total of two parallel lines (for example 5a and 5b) on
25 both sides of the central joining part 4.

Also, although not specifically shown in the drawing, the spot-form joining parts 7 could be provided respectively on three parallel lines between the central joining part 4 and the one end edge 2a or the end edge 2b; thus in terms of the sheet 1 for a cleaning tool as a whole, they may be provided on a total of six parallel lines or may be provided on four or more parallel lines on one side.

Also, although not specifically shown in the drawing, the spot-form joining parts 7 may be provided on two parallel lines between the central joining part 4 and the one end edge 2a and three parallel lines may be provided between the central joining part 4 and the other end edge 2b, so that, in terms of the sheet 1 for a cleaning tool as a whole, they are provided on a total of five lines; being provided on parallel lines of different number on one side and the other side of the central joining part 7 of the sheet for the cleaning tool.

In the case of the sheet 1 for a cleaning tool of the mode shown in Figure 1, as shown in Figure 2, the positions of joining of adjacent joining parts in the spot-form joining parts 7 of the parallel lines 5a between the central joining part 4 and the one end 2a and the spot-form joining parts 7 of the parallel line 6a adjacent to this spot-form joining part may be formed so as not to overlap in the direction of flow of the fiber bundles 3. Likewise, the positions of joining of adjacent joining parts in the spot-

form joining parts 7 of the parallel lines 5b between the central joining part 4 and the other end 2b and the spot-form joining parts 7 of the parallel line 6b adjacent to this spot-form joining part may be formed so as not to overlap in the direction of flow of the fiber bundles 3. Also, the direction of flow of the fibers of the fiber bundles 3 of the sheet 1 for a cleaning tool according to the mode shown in Figure 1 may be arranged so as to be in a direction orthogonal to the central joining part 4.

10 If the joining parts of the spot-form joining parts 7 are formed in this way so as not to overlap in the direction of flow of the fibers of the fiber bundles 3, any possibility of a single fiber being joined at a plurality of locations in the direction of flow is eliminated, so the portions where the fibers can move freely are increased, preventing obstruction of movement of the fibers and so making it possible to satisfactorily prevent entanglement of the fibers of the fiber bundles 3; thus dirt capturing and holding ability can be maintained over a long period.

20 The length from the central joining part 4 of the fibers of the fiber bundles 3 to both ends in the direction flow of the fibers is preferably formed to be a length of 50 to 100% of the length from the central joining part 4 to the end edge (2a or 2b) of the base sheet 2. Specifically, if for example a sheet 1 for cleaning of transverse width 300 mm and a base sheet 2 of length 200 mm are employed, the length

from the central joining part 4 to the end edge (2a or 2b) of the base sheet 2 is preferably 100 mm and the length of the fibers of the fiber bundles 3 is preferably formed to be 50 to 100 mm.

5 Also, as shown in Figure 3 and Figure 4, although the ends 31a, 31b in the direction of flow of the fibers of the fiber bundles 3 are not joined with the base sheet 2, the length of the portion of so-called free movement from the ends 31a, 31b up to the joining parts of the fibers of these
10 fiber bundles 3 is preferably 10 to 40 mm. This can be achieved by forming spot-form joining parts 7 such that the parallel lines (for example 5a, 5b, 6a, 6b) where the spot-form joining parts 7 are provided are in the range of 10 to 40 mm from the end edges 2a, 2b of the base sheet 2.

15 As the material of the base sheet 2, apart from nonwoven fabric, for example paper or synthetic resin sheet may be employed. From the point of view of ability to capture various types of dirt, preferably the base sheet 2 is made of nonwoven fabric sheet. Preferably, if nonwoven fabric is
20 employed for the base sheet 2, the quantity thereof is 10 to 200 g/m² and if synthetic resin sheet is employed the thickness thereof is preferably 0.01 to 0.1 mm.

 If thermally fusible fibers are employed for the fiber bundles 3, from the point of view of ease of joining with
25 these fiber bundles 3, preferably the base sheet 2 also has thermal fusibility. Also, although there is no particular

restriction if nonwoven fabric sheet is employed, preferably the short fibers (fiber bodies) constituting the sheet are short fibers having thermal fusibility with the fiber bundles 3. Examples that may be given of such short fibers
5 having thermal fusibility include fibers such as polypropylene, polyethylene or polyethylene terephthalate and composite fibers of these of the sheath/core type or side-by-side type.

Examples that may be given of the nonwoven fabric sheet
10 employed as the base sheet 2 include spun-lace nonwoven fabric, spun-bonded nonwoven fabric, thermally bonded nonwoven fabric, air-through bonded nonwoven fabrics, or point-bonded nonwoven fabrics and the like. Spun-lace nonwoven fabrics, thermally bonded nonwoven fabrics and the
15 like are especially desirable in this case. The nonwoven fabric sheet that is used may be constructed from a single sheet, or may be constructed by laminating a plurality of sheets of the same or different types.

The fiber bundles 3 that are used in the sheet 1 for a
20 cleaning tool are aggregates of fibers that are overlapped side by side so that numerous fibers are oriented in the same direction, with the respective fibers being wrapped to an extent that prevents the fibers from coming undone. The fiber bundles 3 are formed into sheets and are handled as
25 sheet-form fiber bundles. Also, the fiber bundles 3 may be partially mutually coupled by thermal fusion or the like.

The fiber bundles 3 may be constituted of fibers of the same type or may be constituted of fibers of a plurality of different types.

5 The fiber bundles 3 may be constituted solely of fibers of the same thickness or may be constituted of fibers of a plurality of thicknesses. Irrespective of whether the fiber bundles 3 are the same or different in respect of the types of constituent fibers and their thickness, they may be constituted of fibers of different colors.

10 For example, natural fibers such as cotton, wool or the like, synthetic fibers such as polyethylene, polypropylene, polyethylene terephthalate, nylon, polyacrylics or the like, composite fibers such as core-sheath type fibers, ocean-island type fibers, side-by-side type fibers or the like are
15 used as the fiber bundles 3. Thermally fusible synthetic fibers or composite fibers are preferable, in particular core-sheath type composite fibers whose core is made of polypropylene and whose sheath is made of polyethylene are desirable since they combine the excellent thermal
20 fusibility of the polyethylene constituting the sheath with the "body" of the polypropylene constituting the core.

Also, the fibers that are employed for the fiber bundles 3 may be crimped, being for example mechanically crimped or thermally crimped.

25 Furthermore, the fiber bundles 3 may also be long fiber bundles generally called "tow" that are manufactured from

polyethylene, polypropylene, nylon, polyester, rayon or the like.

Preferably the thickness of the fibers constituting the fiber bundles 3 is 1 to 18 denier. Also, preferably the
5 quantity of fiber bundles 3 is 5 to 30 g/m² if the thickness of the fibers is 2 denier.

For the fiber bundles 3, two or more fiber bundles in sheet form can be used in overlapping fashion. If fibers in sheet form are used in overlapping fashion, fiber bundles of
10 different types of constituent fibers, thickness and fiber color may be combined at will. If fiber bundles of different colors are employed in overlapping fashion, aesthetic characteristics of the cleaning tool sheet can be improved.

15 Preferably, if a plurality of fiber bundles are employed in overlapping fashion, fiber bundles of slender fibers and fiber bundles of thick fibers may be superimposed alternately. As the aforementioned slender fibers, fibers of 0.01 to 0.05 mm are preferable. As the aforementioned
20 thick fibers, which may be thicker than the slender fibers, fibers of thickness 0.06 mm to 0.3 mm are preferable. Also, for the thick fibers, preferably fibers such as polypropylene having "body" may be employed.

As the fiber bundles 3b consisting of thick fibers
25 laminated onto the base sheet 2 of the sheet 1 for a cleaning tool shown in Figure 8 to Figure 11, fiber bundles

are employed constructed from fibers that are formed by
splitting a drawn polypropylene tape in the direction of
drawing so that the fibers are made long and slender. Also,
the fiber bundles 3b are laminated onto the fiber bundles 3a
5 and joined by thermal fusion at the central joining part 4.

When fiber bundles of thick fibers and fiber bundles of
slender fibers are used in this way in laminated fashion,
preferably the thick fibers are laminated so as to be on the
outside (i.e. on the side of the body to be cleaned). For
10 example, when cleaning an object such as a computer keyboard,
which has narrow crevices, the slender fibers do not easily
enter the crevices owing to their lack of body. In contrast,
the thick fibers have body and so easily enter the crevices,
making it possible to scrape out dirt such as dust or debris.
15 The slender fibers then function to take up the dirt that
has been scraped out. The thick fibers also prevent mutual
entanglement of the slender fibers.

A sheet 1 for a cleaning tool according to the present
invention may be obtained by laminating fiber bundles 3 onto
20 the surface of a base sheet 2 and joining with the central
joining part 4 and spot-form joining parts using prescribed
joining means in accordance with the material properties of
the base sheet 2 and fiber bundles 3, using means such as
thermal fusion, ultrasonic fusion, gluing, or sewing.

25 If for example the base sheet 2 and the fiber bundles 3
are of material that is capable of thermal fusion, they can

easily be joined by applying heat and pressure to a laminated body consisting of the base sheet 2 and fiber bundles 3 using for example a heated roll.

Also, if the base sheet 2 and the fiber bundles 3 are of material that is not capable of thermal fusion, they may be laminated with thermally fusible material such as hot melt adhesive laminated between these or may be joined by for example applying adhesive thereto.

As shown in Figure 2, in the sheet 1 for a cleaning tool, the vicinities of the four corners at the sides of the two ends 2a, 2b parallel with the central joining part 4 and closer to the central joining part 4 than the spot-form joining parts 7 may be formed as attaching parts 8, 8, 8, 8 constituted solely by the base sheet 2. These attaching parts 8 serve for attaching onto the holding member of the cleaning tool (see Figure 5) when the sheet is employed as a cleaning tool sheet that is used for floor wiping.

The attaching parts 8 of the sheet 1 for a cleaning tool are not restricted to a mode constituted solely from the base sheet 2 as described above and could be formed in various ways depending on for example the attaching means or the shape of the holding member, so longer as they make it possible to attach the cleaning tool for floor wiping to the holding member.

For example, the attaching parts 8 could be constituted by providing a tacky adhesive layer on the front surface

and/or back surface of the base sheet 2, the outer surface of this tacky adhesive layer being covered with a peel-off sheet. If a sheet 1 for a cleaning tool is formed in this way, when attaching to the cleaning tool 10 for floor wiping, the tacky adhesive layer can be joined at the position of a stop 13 on the upper surface of the pedestal 12 after removing the peel-off sheet. It should be noted that, if a tacky adhesive layer is provided on the attaching parts 8 of the cleaning tool 10 for floor wiping, attaching could be effected onto the pedestal 12 of a cleaning tool 10 for floor wiping that is not provided with a fixed member such as the stop 13. Also, although not particularly shown in the drawing, it would be possible to provide slits in the sheet 1 for a cleaning tool for attaching onto for example the pedestal of the cleaning tool in the attaching parts 8, 8, 8 in the vicinity of the two end edges 2a, 2b in the direction of flow of the fibers of the fiber bundles 3.

The base sheet 2 and/or fiber bundles 3 of the sheet 1 for a cleaning tool according to the present invention could be coated with an agent for enhancing the dirt capturing ability. Examples of such an agent that may be mentioned include an oiling agent or the like containing a mineral oil such as liquid paraffin or the like, a silicone oil or a nonionic surfactant.

Figure 5 is a perspective view showing the external appearance of an example of a cleaning tool for floor wiping.

A cleaning tool sheet employed in a floor wiping cleaning tool (floor cleaning tool sheet) according to the present invention is described below. As shown in Figure 5, the floor wiping cleaning tool 10 comprises a pedestal 12 formed in the shape of a rectangular plate and constituting a holding member for the floor cleaning tool sheet 1, and an handle 11 that is attached to the upper surface of this pedestal 12. Cleaning of the floor is effected by attaching the floor cleaning tool sheet 1 to the pedestal 12 of the floor wiping cleaning tool 10, using the handle 11 to bring the undersurface of the pedestal 12 into contact with the floor and moving the handle 11 so that the pedestal 12 is moved chiefly in the direction of the arrow P - Q in the Figure.

A sheet 1 for a cleaning tool as shown in Figure 1 to Figure 4 may be employed for the floor cleaning tool sheet 1. In the floor cleaning tool sheet 1, attaching parts 8 at the sides of the two end edges 2a, 2b parallel with the central joining part 4 in the vicinity of the four corners of the base sheet 2 are provided for attaching thereof to the pedestal 12, which is the holding member of the floor wiping cleaning tool 10. The attaching parts 8 are portions constituted solely by the base sheet 2 in portions corresponding to the position of the stop 13 that is provided on the pedestal 12 as an attachment element, so

only the base sheet 2 needs to be fixed by means of the stop 13 of the pedestal 12.

As shown in Figure 6, when the floor cleaning tool sheet 1 is attached to the pedestal 12, it is employed by being fixed to the pedestal 12 such that the side of the fiber bundles 3 is on the outside of the undersurface of the pedestal 12. Attaching is effected on the pedestal 12 such that the direction of flow of the fibers of the fiber bundles 3 of the floor cleaning tool sheet 1 is in the same direction as the main direction of wiping by the floor wiping cleaning tool 10 (direction of the arrow P - Q). As shown in Figure 6, when cleaning is effected by wiping the floor using the floor wiping cleaning tool 10, dirt is taken up, captured and held in the gaps between the fibers of the fiber bundles 3.

Also, as shown in Figure 7, if, for the base sheet 2 of the floor cleaning tool sheet 1, a sheet is employed having dirt capturing ability, such as a nonwoven fabric sheet or the like, when this is attached to the pedestal 12 of the floor wiping cleaning tool 10, attaching can be effected such that the fiber bundles 3 are positioned between the undersurface of the pedestal 12 and the base sheet 2 by fixing to the pedestal 12 such that the side of the base sheet 2 is the outer undersurface of the pedestal 12. In this way, when the floor cleaning tool sheet 1 is attached, in the floor wiping cleaning tool 10, cushioning is provided

by the fiber bundles 3 between the base sheet 2 and the pedestal 12, so extremely good adherence can be achieved with the surface to be cleaned such as the floor at the outside surface of the base sheet 2; thus it becomes
5 possible to capture dirt using the entire undersurface of the base sheet 2, enabling cleaning to be performed in an efficient manner.

A method of use is thereby possible wherein for example as shown in Figure 6, first of all comparatively large
10 particles of dirt are picked up by wiping the floor with the floor wiping cleaning tool 10 attached with the fiber bundles 3 of the floor cleaning tool sheet 1 as the outside face and then, as shown in Figure 7, the floor cleaning tool sheet 1 is turned over so that comparatively small particles
15 of dirt can be captured by wiping the floor with the floor wiping cleaning tool 10 attached such that the base sheet 2 is on the outside face.

With this floor wiping cleaning tool 10, when the cleaning tool sheet 1 becomes contaminated, it may be
20 removed from the pedestal 12 and replaced by another uncontaminated cleaning tool sheet 1.

As the cleaning tool sheet (hand-held cleaning tool sheet) 20 employed in the hand-held wiping cleaning tool according to the present invention, there may be employed a
25 cleaning tool sheet 1 wherein, as shown in Figure 8 to Figure 11, fiber bundles 3 are laminated on one side face of

the base sheet 2 and the central part in the direction of flow of the fibers constituting the fiber bundles 3 (i.e. the direction of the arrow X-Y in Figure 8) is joined with the central joining part 4 formed continuously in the central part of the base sheet 2 and is joined at the spot-form joining parts 7 formed intermittently on parallel lines between the two end edges 2a, 2b parallel with the central joining part 4, but the two ends in the direction of flow of the fibers of the fiber bundles 3 are not joined with the base sheet 2.

The hand-held cleaning tool sheet 20 may be laminated and joined with a holding sheet 21 formed with a bag-shaped holding part 22 comprising a space for holding a leg of a holding member of the hand-held wiping cleaning tool by insertion therein, on the face of the base sheet 2 of the cleaning tool sheet 1, opposite to the face where the fiber bundles 3 are laminated.

Numerous cuts 25 which are formed in the same direction as the direction of flow of the fibers of the fiber bundles 3 are formed from both end edges 2a and 2b parallel to the central joining part 4 of the base sheet 2 to the vicinity of the spot-form joining parts 7 in the hand-held cleaning tool sheet 20 shown in Figure 8 to Figure 11.

Also, the fiber bundles 3 of the hand-held cleaning tool sheet 20 shown in Figure 8 to Figure 11 comprise fiber bundles 3a made of slender fibers laminated on the side of

the base sheet 2 and fiber bundles 3b made of thick fibers and laminated on the outside of these fiber bundles 3a. The fibers constituting the fiber bundles 3b consisting of thick fibers are constituted by gathering together fibers formed
5 by splitting drawn polypropylene tape to produce fibers elongate in the direction of drawing. This confers the advantage that, in a condition in which joining is effected using solely the central joining parts 45 using these fibers having body, simply by holding the cleaning tool in the hand
10 so that the fiber bundles 3b are directed downwardly, the thick fiber bundles 3b hang downwards, providing high bulk of the fiber bundles 3b so no special operation to achieve this is required.

Preferably the length of the fiber bundles 3b in the
15 direction of flow of the fibers is formed such as to be somewhat shorter than that of the fiber bundles 3a; however, they could be of exactly the same length as the fiber bundles 3a.

In this way, by constituting the fiber bundles 3 of
20 fiber bundles 3a and 3b of different thickness, as described in the description of the fiber bundles of the cleaning tool sheet shown in Figure 1, an excellent wiping effect is obtained when cleaning portions such as narrow grooves.

The cleaning tool sheet 1 of the hand-held cleaning tool
25 sheet 20 shown in Figure 8 to Figure 11 is obtained in the same way as in the sheet of Figure 1 by first of all

laminating fiber bundles 3a of slender fibers onto the base sheet 2 and joining by thermal fusion with the central joining part 4 and spot-form joining parts 7, then joining the fiber bundles 3b of thick fibers with the central joining part 4.

It should be noted that, in the cleaning sheet 1 of the hand-held cleaning tool sheet 20, the positions where the joining parts of the spot-form joining parts 7 that are intermittently formed on parallel lines between the two end edges 2a, 2b parallel with the central joining part 4 are provided is further inwards than the position where the cuts 25 are provided i.e. they are formed so as not to overlap the cuts 25.

In the cleaning tool sheet 1 of the hand-held cleaning tool sheet 20 shown in Figure 8, in the same way as in the case of the sheet shown in Figure 1, the spot-form joining parts 7 are formed using two parallel lines respectively provided as parallel lines between the two end edges 2a, 2b that are parallel with the central joining part 4. It would also be possible to form the spot-form joining parts 7 using four parallel lines respectively provided as parallel lines between the two end edges 2a, 2b that are parallel with the central joining part 4.

For the base sheet 2 and fiber bundles 3 (3a, 3b) of the hand-held cleaning tool sheet 20, the material indicated by the cleaning tool sheet 1 shown in Figure 1 can be employed.

Also, the construction of the central joining part 4 and spot-form joining parts 7 can be the same as the construction described with reference to the cleaning tool sheet 1 shown in Figure 1.

5 Also, the hand-held cleaning tool sheet 20 shown in Figure 8 to Figure 11 may be constituted with the same type of color as that of the fiber bundles 3 and holding sheet 21.

As shown in Figure 19 and Figure 20, the holding sheet 21 is formed with a sealed part 28 constituted by laminating
10 two sheets of nonwoven fabric 21a, 21b having thermal fusibility and joining three sides and the central part, excluding the insertion opening part 23, by heat sealing, and, between these two sheets of nonwoven fabric 21a, 21b, is formed with bag-form holding parts 22 comprising a space
15 for holding by respectively inserting two legs 31 (see Figure 12) of a holding member 30 of the hand-held wiping cleaning tool. The holding part 22 is formed in two bag-form configurations that are sealed on three sides (except for the opening parts) as respective holding parts in
20 accordance with the size of the leg parts 2. Furthermore, in each holding part, at least the side surface sides may be sealed, and the tip end may be left in an open state without being sealed.

As is shown in Fig. 20, the portions of the insertion
25 openings 23 of the holding sheet 21 are formed in an open state in which the two nonwoven fabric sheets 21a and 21b

are not sealed to each other. The holding sheet 21 shown in Figure 20 is formed by folding a single nonwoven fabric sheet in two, and heat-sealing at prescribed locations, lamination being effected with the upper portion of the nonwoven fabric at this insertion opening 23 being folded over so as to be longer than the lower portion of the nonwoven fabric. The nonwoven fabric sheet 21a on the upper side of the portion corresponding to the insertion openings 23 is formed as an ear part 29 that is not joined to the lower-side nonwoven fabric sheet 21b, being thus formed so that it can freely be bent over thereabove at the position of the end of the sealed part 28.

In addition, a colored part 24 which serves as a marker for each insertion part 23 is disposed on the end part of this ear part 29. Thus, the upper nonwoven fabric sheet 21a being longer than the lower nonwoven fabric sheet 21b, the passage of the leg parts 2 of the holding member can easily be accomplished if such an ear part 29 is provided.

Also, instead of providing a colored part 24 on the ear part 29 of the holding sheet 21, a pattern of surface irregularities could be provided by performing embossing processing. In this way, in a hand-held cleaning tool sheet 20, by providing a colored part 24 on the side of the insertion opening 23 of the holding sheet 21 or by providing a pattern of surface irregularities by embossing processing, when the legs 31 of the holding member 30 are inserted into

the holding part 22, the inserted portion of the legs 31 can be easily ascertained visually, so the legs 31 of the holding member 30 can easily be inserted into the insertion opening 23 of the cleaning tool sheet 20 by a user.

5 Also, for the holding sheet 21, two nonwoven fabric sheets may be laminated and heat sealed, instead of folding over a single nonwoven fabric sheet and a construction may be adopted wherein the lengths of the upper nonwoven fabric sheet 21a and lower nonwoven fabric sheet 21b are the same.

10 As shown in Figure 21, a hand-held cleaning tool sheet 20 may be obtained by applying hot melt adhesive 27 in the central part on the opposite side to the fiber bundles of the base sheet of the cleaning tool sheet 1, laminating the holding sheet 21 thereon and joining by using heating and
15 pressurizing means, for example. It should be noted that the sticking on of the holding sheet 21 to the cleaning tool sheet 1 is not restricted to the use of hot melt adhesive and other types of adhesive or tacky adhesive or the like could be employed.

20 The hand-held cleaning tool sheet 20 may be employed as a hand-held wiping cleaning tool 40 as shown in Figure 13 by attaching to the holding member 30 of the hand-held wiping cleaning tool shown in Figure 12. The holding member 30 shown in Figure 12 comprises legs 31 for holding a hand-held
25 cleaning tool sheet 20 and a handle member 32 that is formed so as to be capable of being gripped by the hand. The legs

31 serve for attaching the hand-held cleaning tool sheet 20 and are formed as bifurcated branch members as shown in Figure 12.

In order to attach the hand-held cleaning tool sheet 20 on the holding member 30, the legs 31 of the holding member 30 are inserted from the insertion opening 23 of the holding sheet 21 of the hand-held cleaning tool sheet 20 and held in the holding part 22. When the hand-held cleaning tool sheet 20 becomes contaminated, the legs 31 of the holding member 30 are extracted from the insertion opening 23 and replaced by another, uncontaminated hand-held cleaning tool sheet 20; in this way an excellent wiping effect is obtained.

The legs 31 for the holding member 30 of the hand-held wiping cleaning tool shown in Figure 12 are formed in a shape obtained by cutting a cylinder in half. These legs 31 are provided with protrusions 33 that protrude outwards from their periphery at four locations having a prescribed interval in the length direction of the upper periphery of their respective branch members.

These protrusions 33 are formed as projections protruding such that the radius of the legs 31 becomes larger rearwardly than forwardly; thus they make it possible for the legs 31 to be inserted comparatively smoothly in the case of insertion from the tips of the legs 31 into the holding part 22 of the hand-held cleaning tool sheet 20 but can prevent the hand-held cleaning tool sheet 20 from

escaping during performance of cleaning using the hand-held
wiping cleaning tool 40; this is achieved by the protrusions
33 catching on the covering sheet 21 of the holding part if
an attempt is made to extract the legs from the holding part
5 22 of the hand-held cleaning tool sheet 20.

Figure 14 to Figure 17 show an example of a glove-form
cleaning tool according to the present invention. As shown
in Figure 14 to Figure 17, the glove-form cleaning tool 50
according to the present invention employs a cleaning tool
10 sheet 1 wherein fiber bundles 3 are laminated on one side
face of the base sheet 2, the central part in the direction
of flow of the fibers constituting the fiber bundles 3 is
joined by the central joining part 4 formed continuously in
the central part of the base sheet 2, and is joined at spot-
15 form joining parts 7 formed intermittently on parallel lines
between the two end edges parallel with the central joining
part 4, but the two ends 31a, 31b in the direction of flow
of the fibers are not joined to the base sheet 3.

In addition, in the glove-form cleaning tool 50, a
20 second sheet 51 is laminated on the side of the base sheet 2
of the cleaning tool sheet 1 and the glove-form cleaning
tool 50 is provided with a holding part 52 comprising a
space for insertion and holding of a hand H between the base
sheet 2 and a second sheet 51. Also its external appearance
25 is formed in glove-form. The glove-form cleaning tool 50 is
formed in glove-form with an insertion part 53 as an opening

part, by the provision of a joining part 54 where joining is effected of the periphery of a laminated body constituted by laminating a cleaning tool sheet 1 and a second sheet 51, except for this insertion part 53 for insertion of a hand H.

5 The joining of this peripheral joining part 54 can be effected by a method such as gluing using heat fusion, adhesive, or tacky adhesive or stitching and employing means such as hot melt severing of a laminated body, heating and/or pressurizing.

10 As shown in Figure 16, at the tip of the glove-form cleaning tool 50 the peripheral joining part 54 is formed in a rounded shape around the shape of the hand except for the insertion part 53. By the "tip" of the glove-form cleaning tool 50 is meant the region of the fingertips when a hand is
15 inserted i.e. the opposite side to the insertion part 53.

In addition, as shown in Figure 14 to Figure 16, in the holding part 52 in the interior of the glove-form cleaning tool 50, a partition 55 is provided that divides into two the tip region of the holding part 52 so that the glove-form
20 cleaning tool 50 is formed in the shape of a mitten. As shown in Figure 16, the partition 55 is provided linearly from the tip of the glove-form cleaning tool 50 towards the insertion part 53 and is formed of a length such that the end on the side of the insertion part of this partition 55
25 does not contact the root of the fingers when a hand H is inserted.

Although there is no particular restriction regarding the "glove-form" of the glove-form cleaning tool 50 so long as it is of a shape having a holding part 52 capable of performing holding by insertion of a hand H, preferably it is formed in mitten shape. It should be noted that, as shown in Figure 14, "mitten shape" means a shape that is formed so as to make possible performance of holding by dividing the fingers into two spaces by dividing the holding part 52 into two by means of a single partition 55.

Also, the glove-form cleaning tool 50 according to the present invention could be constituted by providing two or more partitions 55 such that the holding part 52 is divided into three or more parts along the shape of the fingers. Also, a five-fingered glove shape can be formed by providing partitions 55 corresponding to the shape of the five fingers so that a holding part 52 is formed wherein each of the five fingers can separately enter the glove-form cleaning tool 50.

As shown in Figure 15, a partition 55 may be formed so as to effect partitioning, by joining the cleaning tool sheet 1 and the second sheet 51. If the cleaning tool sheet 1 and the second sheet 51 have thermal fusibility, this joining may be effected by thermal fusion produced by heating and pressurizing. Also, if these two sheets do not have thermal fusibility, the joining may be effected by joining using adhesive or using stitching or the like.

Figure 17 is a view of the glove-form cleaning tool 50 of Figure 14 seen from the side of the cleaning tool sheet 1. As shown in Figure 17, in the cleaning tool sheet 1, fiber bundles 3 are laminated onto the base sheet 1 and lamination is effected onto a second sheet 51 such that these fiber bundles 3 are on the outside (see Figure 16).

Also, regarding the arrangement of the cleaning tool sheet 14 in the glove-form cleaning tool 50 shown in Figure 17, the arrangement is such that the central joining part 4 is in the direction of insertion of hand and is in the center in the width direction of the hand. That is, the cleaning tool sheet 1 is attached such that its direction is the direction of the tip (vertical direction in Figure 17) from the insertion part 53 of the cleaning tool 1, the central joining part 4 thereof being positioned in substantially the center in the width direction (left/right direction in Figure 17) of the glove-form cleaning tool 50.

The direction of attaching of the cleaning tool sheet 1 of the glove-form cleaning tool 50 according to the present invention is not restricted to the embodiment described and it could be attached for example such that the longitudinal direction of the central joining part 4 is in a direction orthogonal to or intersecting with the direction of insertion of the hand H.

As shown in Figure 17, preferably the glove-form cleaning tool 50 is constituted with the longitudinal

direction of the central joining part 4 of the cleaning tool sheet 1 arranged so as to be in the same direction as the direction of insertion of the hand. Typically when performing wiping cleaning using the glove-form cleaning tool, wiping is normally performed by moving the hand to the left and right. This wiping direction is the same direction as the direction of flow of the fibers of the fiber bundles 3 of the cleaning tool sheet 1 of the glove-form cleaning tool 50. As a result, the fiber bundles 3 of the glove-form cleaning tool 50 can be efficiently utilized and satisfactory capture and holding of the dirt can be performed.

For the cleaning tool sheet 1, the cleaning tool sheet 1 shown in Figure 1 may be employed. However, as shown in Figure 17, the point of difference of the cleaning tool sheet employed in the glove-form cleaning tool from the cleaning tool sheet shown in Figure 1 is that the shapes of the base sheet 2 and the fiber bundles 3 are formed corresponding to the glove shape of the glove-form cleaning tool 50. The cleaning tool sheet used in the glove-form cleaning tool 50 may be formed beforehand in a shape corresponding to the glove shape, but it is also possible to use a rectangular cleaning tool sheet 1 as shown in Figure 1 by cutting it to the prescribed shape in accordance with the external shape of the glove-form cleaning tool.

Also in the glove-form cleaning tool 50, the second sheet 51 may be a sheet of any kind but it is preferable to employ a nonwoven fabric sheet having cleaning ability. For the nonwoven fabric sheet, the sheet indicated in the description of the nonwoven fabric sheet employed as the base sheet 2 of the cleaning tool sheet 1 may be employed. If wiping cleaning is performed using the glove-form cleaning tool 50 using a nonwoven fabric sheet for the second sheet 51, dirt such as dust or debris and hair in areas to be wiped on the side of the fiber bundles 3 of the cleaning tool sheet 1 that are of irregular surface shape is held by the fiber bundles 3 and may then be wiped away using the nonwoven fabric sheet on the side of the second sheet 51. Since the nonwoven fabric sheet is formed smoothly but with minute gaps, it captures fine dirt and can be used to polish smooth areas such as mirrors or glass or painted surfaces.

Apart from being used by insertion of a hand H into the holding part 52, the glove-form cleaning tool 50 according to the present invention may be used by inserting a separate holding member into the holding part 52. As shown in Figure 18, for example a support member 60 may comprise a cleaning tool support part 61 that is formed in a shape corresponding to the shape of the holding part 52 of the glove-form cleaning tool 50 and a grip 62 constituting a handle for gripping by the hand.

The grip 62 is provided on the side of the insertion part 53 of the glove-form cleaning tool 50 of the support part 61. Also, in the support part 61, there is provided a slit 63 at a position corresponding to the partition 55 of the glove-form cleaning tool 50. As shown Figure 18, a cleaning tool support part 61 of the support member 60 is formed in a flat-plate-form corresponding to the glove shape and a grip 62 of the support member 60 is formed in cylindrical shape.

When the support member 60 is employed in a glove-form cleaning tool 50, the support part 61 of the support member 60 is inserted into the holding part 52 from the insertion part 53 of the glove-form cleaning tool 50 and is attached such that the partition 55 enters the slit 63. By employing the glove-form cleaning tool 50 for cleaning with the grip 62 of the support member 60 held in the hand, the glove-form cleaning tool 50 can easily be employed for cleaning for example narrow gaps when the hand cannot directly enter.

INDUSTRIAL APPLICABILITY

The cleaning tool sheet, the floor wiping cleaning tool sheet, the hand-held wiping cleaning tool sheet and glove-form cleaning tool of the present invention can be utilized in wiping cleaning by being caused to contact the surfaces of objects of cleaning such as floors, walls, windows, furniture, household products, personal computers, illuminating devices, bookshelves, various types of metal

products and the like in various locations such as ordinary households, factories, hospitals, shops, vehicle interiors and the like, and make it possible to wipe away and capture dirt such as dust, debris and the like in an efficient
5 manner by means of a simple structure; furthermore, these cleaning tools are extremely effective in terms of being able to hold the captured dirt.

Claims:

1. A cleaning tool sheet comprising:

at least one fiber bundle laminated on one side of a base
5 sheet,

wherein a central part in the direction of flow of the
fibers constituting the fiber bundle is joined by a central
joining part continuously formed in the central part of the
base sheet, and the base sheet and the fiber bundle are joined
10 at a plurality of spot-form joining parts formed
intermittently along a spot-form line in a direction crossing
the flow direction of the fibers between the central joining
part and two end edges parallel therewith, and the spot-form
line is positioned apart from and along the central joining
15 part, and both side portions of the fiber bundle which extend
from the central joining part and the spot-form joining parts
are free against the base sheet.

2. The cleaning tool sheet according to claim 1,

20 wherein some of the plurality of spot-form joining parts are
formed intermittently along another spot-form line positioned
in the direction crossing the flow direction of the fibers
between the central joining part and the two edges parallel
therewith.

25

3. The cleaning tool sheet according to claim 2,
wherein joining positions of the plurality of spot-form

joining parts are formed such that they do not overlap in the direction of flow of the fibers in the fiber bundle.

4. The cleaning tool sheet according to claim 1,
5 wherein the base sheet and the fiber bundles are bound by any one of thermal fusion, ultrasonic fusion, gluing or sewing.

5. The cleaning tool sheet according to claim 1,
wherein the length of the spot-form joining parts is between
10 about 1/2 mm and about 5 mm and wherein the distance between consecutive spot-form joining parts is between about 5 mm and about 50 mm.

6. A cleaning tool sheet employed in a cleaning tool
15 for floor wiping comprising:

at least one fiber bundle laminated on one side of a base sheet,

wherein a central part in the direction of flow of the fibers constituting the fiber bundle is joined by a central
20 joining part continuously formed in the central part of the base sheet, and the base sheet and the fiber bundle are joined at a plurality of spot-form joining parts formed intermittently along a spot-form line in a direction crossing the flow direction of the fibers between the central joining
25 part and two end edges parallel therewith, and the spot-form line is positioned apart from and along the central joining

part, and both side portions of the fiber bundle which extend from the central joining part and the spot-form joining parts are free against the base sheet, and attaching parts for attaching to a holding member for floor wiping being provided at both end edges parallel with the central joining part of the base sheet.

7. A cleaning tool sheet employed in a hand-held wiping cleaning tool comprising:

10 at least one fiber bundle laminated on one side of a base sheet,

wherein a central part in the direction of flow of the fibers constituting the fiber bundle is joined by a central joining part continuously formed in the central part of the base sheet, and the base sheet and the fiber bundle are joined at a plurality of spot-form joining parts formed intermittently along a spot-form line in a direction crossing the flow direction of the fibers between the central joining part and two end edges parallel therewith, and the spot-form line is positioned apart from and along the central joining part, and both side portions of the fiber bundle which extend from the central joining part and the spot-form joining parts are free against the base sheet, and

at least a holding part forming a space for holding at least a leg of a holding member of the hand-held wiping cleaning tool and being formed on the other side of the base

sheet opposite to the one side laminated the fiber bundle.

8. A glove-form cleaning tool having a cleaning tool sheet comprising:

5 at least one fiber bundle laminated on one side of a base sheet,

wherein a central part in the direction of flow of the fibers constituting the fiber bundle is joined by a central joining part continuously formed in the central part of the
10 base sheet, and the base sheet and the fiber bundle are joined at a plurality of spot-form joining parts formed intermittently along a spot-form line in a direction crossing the flow direction of the fibers between the central joining part and two end edges parallel therewith, and the spot-form
15 line is positioned apart from and along the central joining part, and both side portions of the fiber bundle which extend from the central joining part and the spot-form joining parts are free against the base sheet.and

a second sheet being laminated on the other side of the
20 base sheet to provide a holding part having a space and a glove-form external appearance for holding the cleaning tool sheet by insertion of a hand between the base sheet and the second sheet.

25 9. A cleaning tool sheet according to claim 1, further comprising a holding sheet bonded to a side of the

base sheet opposite the fiber bundle to provide a space for receiving a holding member and the spot-form line is positioned along a respective edge of the space.

5 10. The cleaning tool sheet according to claim 9, wherein some of the plurality of spot-form joining parts are formed intermittently along another spot-form line positioned along an edge of another space for receiving the holding member.

10

 11. The cleaning tool sheet according to claim 9, wherein the holding sheet comprises two non-woven sheets bonded together.

15

 12. The cleaning tool sheet according to claim 11, wherein the holding sheet comprises two bag form holding parts.

 13. The cleaning tool sheet according to claim 9, wherein the holding sheet comprises a single non-woven sheet
20 folded in two and sealed to the base sheet.

 14. The cleaning tool sheet according to claim 9 , wherein the holding sheet further comprises a colored part indicating a location for insertion of an insertion part of a
25 cleaning tool.

15. The cleaning tool sheet according to claim 9,
wherein the holding sheet further comprises a pattern of
surface irregularities indicating a location of insertion of
an insertion part of a cleaning tool.

5

16. The cleaning tool sheet according to claim 1,
wherein the length of the spot-form joining parts is between
about 2 mm and about 15 mm and wherein the distance between
consecutive spot-form joining parts is between about 10 mm and
10 about 30 mm.

17. The cleaning tool sheet according to claim 1,
wherein the base sheet has a plurality of cuts formed in the
same direction of the flow of the fibers of the fiber bundle
15 and from both sides to the vicinity of the spot-form joining
parts.

18. The cleaning tool sheet according to claim 17,
wherein the base sheet is comprised of non-woven fabric sheet.
20

19. The cleaning tool sheet according to claim 18,
wherein the spot-form joining parts are randomly oriented on
the non-woven fabric sheet.

25 20. The cleaning tool sheet according to Claim 18,
wherein the spot-form joining parts are oriented in lines on

the non-woven fabric sheet.

21. The cleaning tool sheet according to claim 17,
further comprising a holding sheet, the holding sheet
5 comprising two non-woven sheets bonded together to define a
holding part therein, the holding sheet bonded to a side of a
base sheet opposite the fiber bundle.

22. The cleaning tool sheet according to claim 17,
10 further comprising a holding sheet, the holding sheet
comprising a single non-woven sheet folded in two and heat
sealed to a side of a base sheet opposite the fiber bundle.

23. The cleaning tool sheet according to claim 18,
15 wherein the spot-form joining parts are oriented in a line
that is positioned between the central joining part and the
portion of the non-woven sheet having the plurality of cuts.

24. A method of forming a cleaning tool sheet comprising:
20 joining a base sheet comprised of a non-woven sheet to a
fiber bundle at a central joining part and a plurality of
spot-form joining parts along a direction crossing a flow
direction of fibers of the fiber bundle so that a first
portion of fibers in the fiber bundle is joined only by the
25 central joining part and a second portion of fibers in the
fiber bundle is joined by the spot-form joining parts and by

the central joining part;

bonding a holding sheet to a side of the non-woven sheet opposite the fiber bundle to provide a space for receiving a holding member; and

5 arranging the spot-form joining parts along a line that corresponds with an edge of the space, so that the first and second portions of the fiber bundle which extend from the central joining part and the spot-form joining parts are liberated from the base sheet, and the fiber bundle comprises
10 movable fibers having respectively different length between distal ends and fixed ends formed by the central joining part and the spot-form joining parts of the fiber.

25. The method of Claim 24, further comprising forming a
15 plurality of cuts to the base sheet in the same direction of the flow of the fibers of the fiber bundle and from both sides to the vicinity of the spot-form joining parts of the base sheet.

20 26. The method according to claim 24, further comprising forming the holding sheet by joining two non-woven sheets together.

27. The method of Claim 24, further comprising
25 forming the holding sheet by folding a single non-woven sheet in two.

28. A cleaning tool sheet and holding member
comprising:

5 a first fiber bundle being laminated on one side of a
base sheet, the base sheet and the first fiber bundle being
joined at a central joining part and at spot-form joining
parts formed intermittently along a spot-form line in a
direction crossing a flow direction of fibers of the first
10 fiber bundle;

a holding sheet bonded to the base sheet to provide a
space for receiving the holding member; and


a second fiber bundle joined to the first fiber bundle
at the central joining part along a direction crossing a flow
15 direction of the fibers, and

wherein the central joining part and the spot-form line
are positioned along respective edges of the space for
receiving a holding member, and


wherein the holding member has legs with protrusions for
20 securing the cleaning tool sheet onto the holding member.

DRAWINGS


【FIG1】

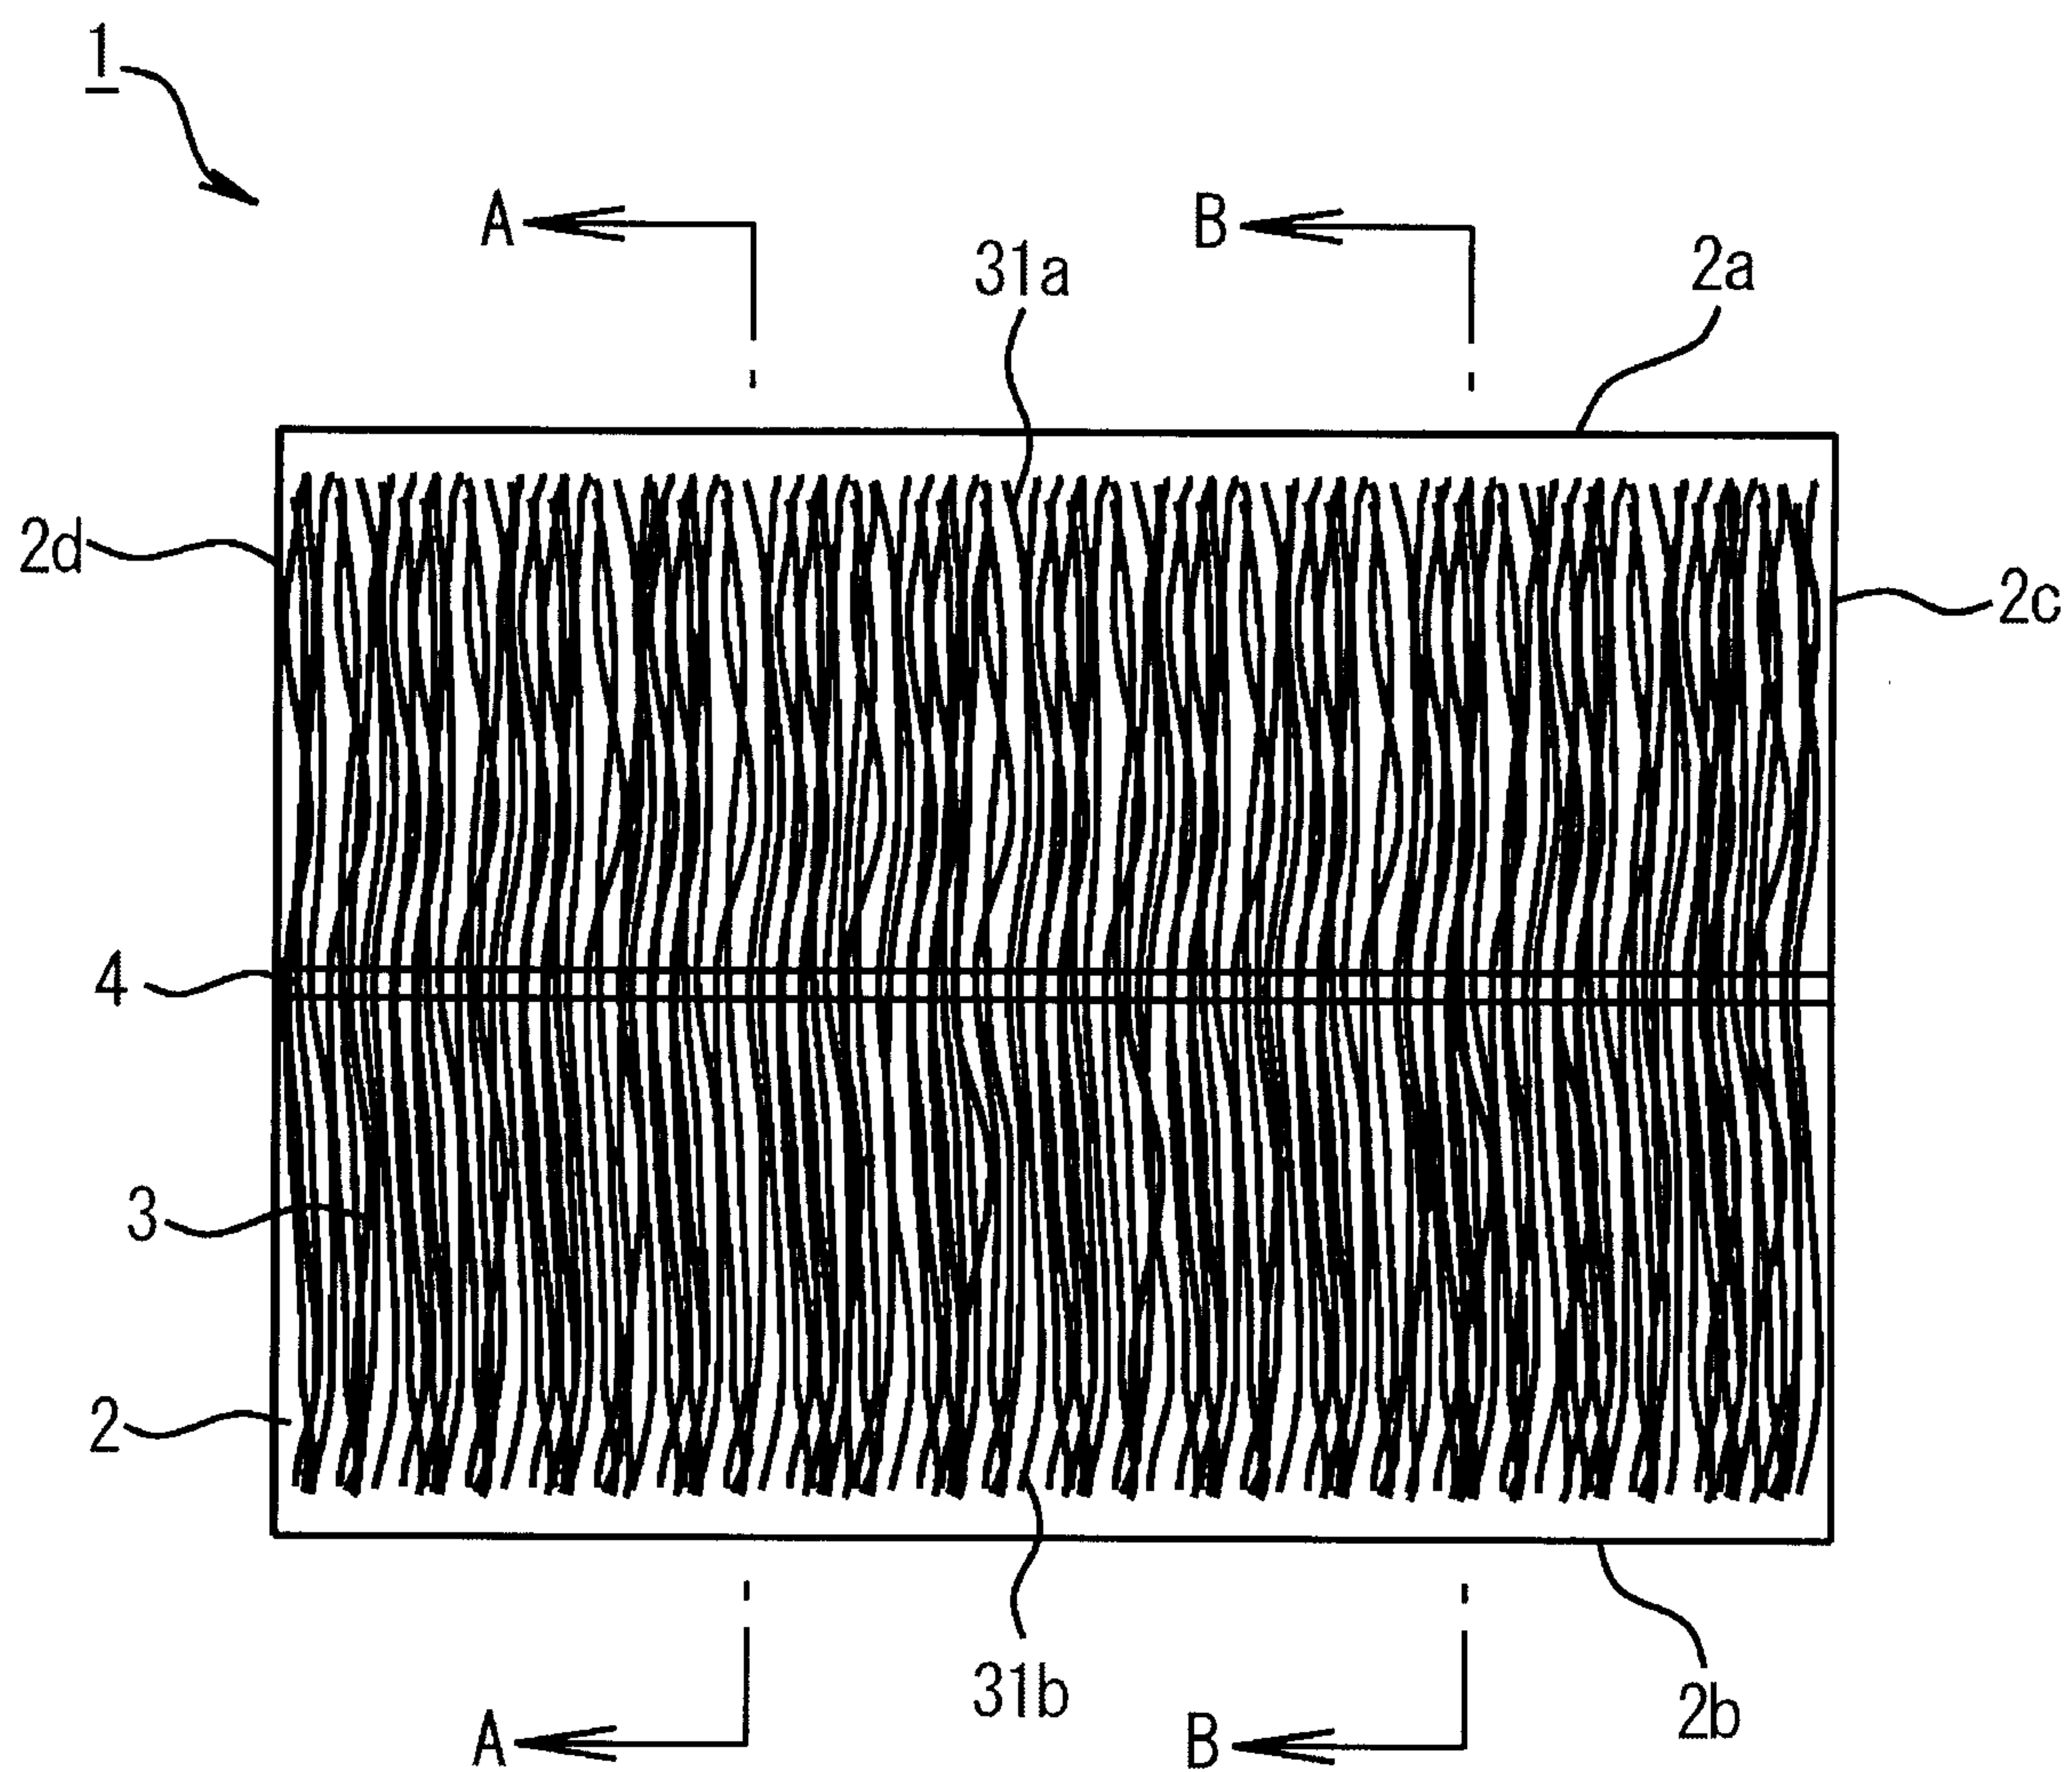


【FIG2】

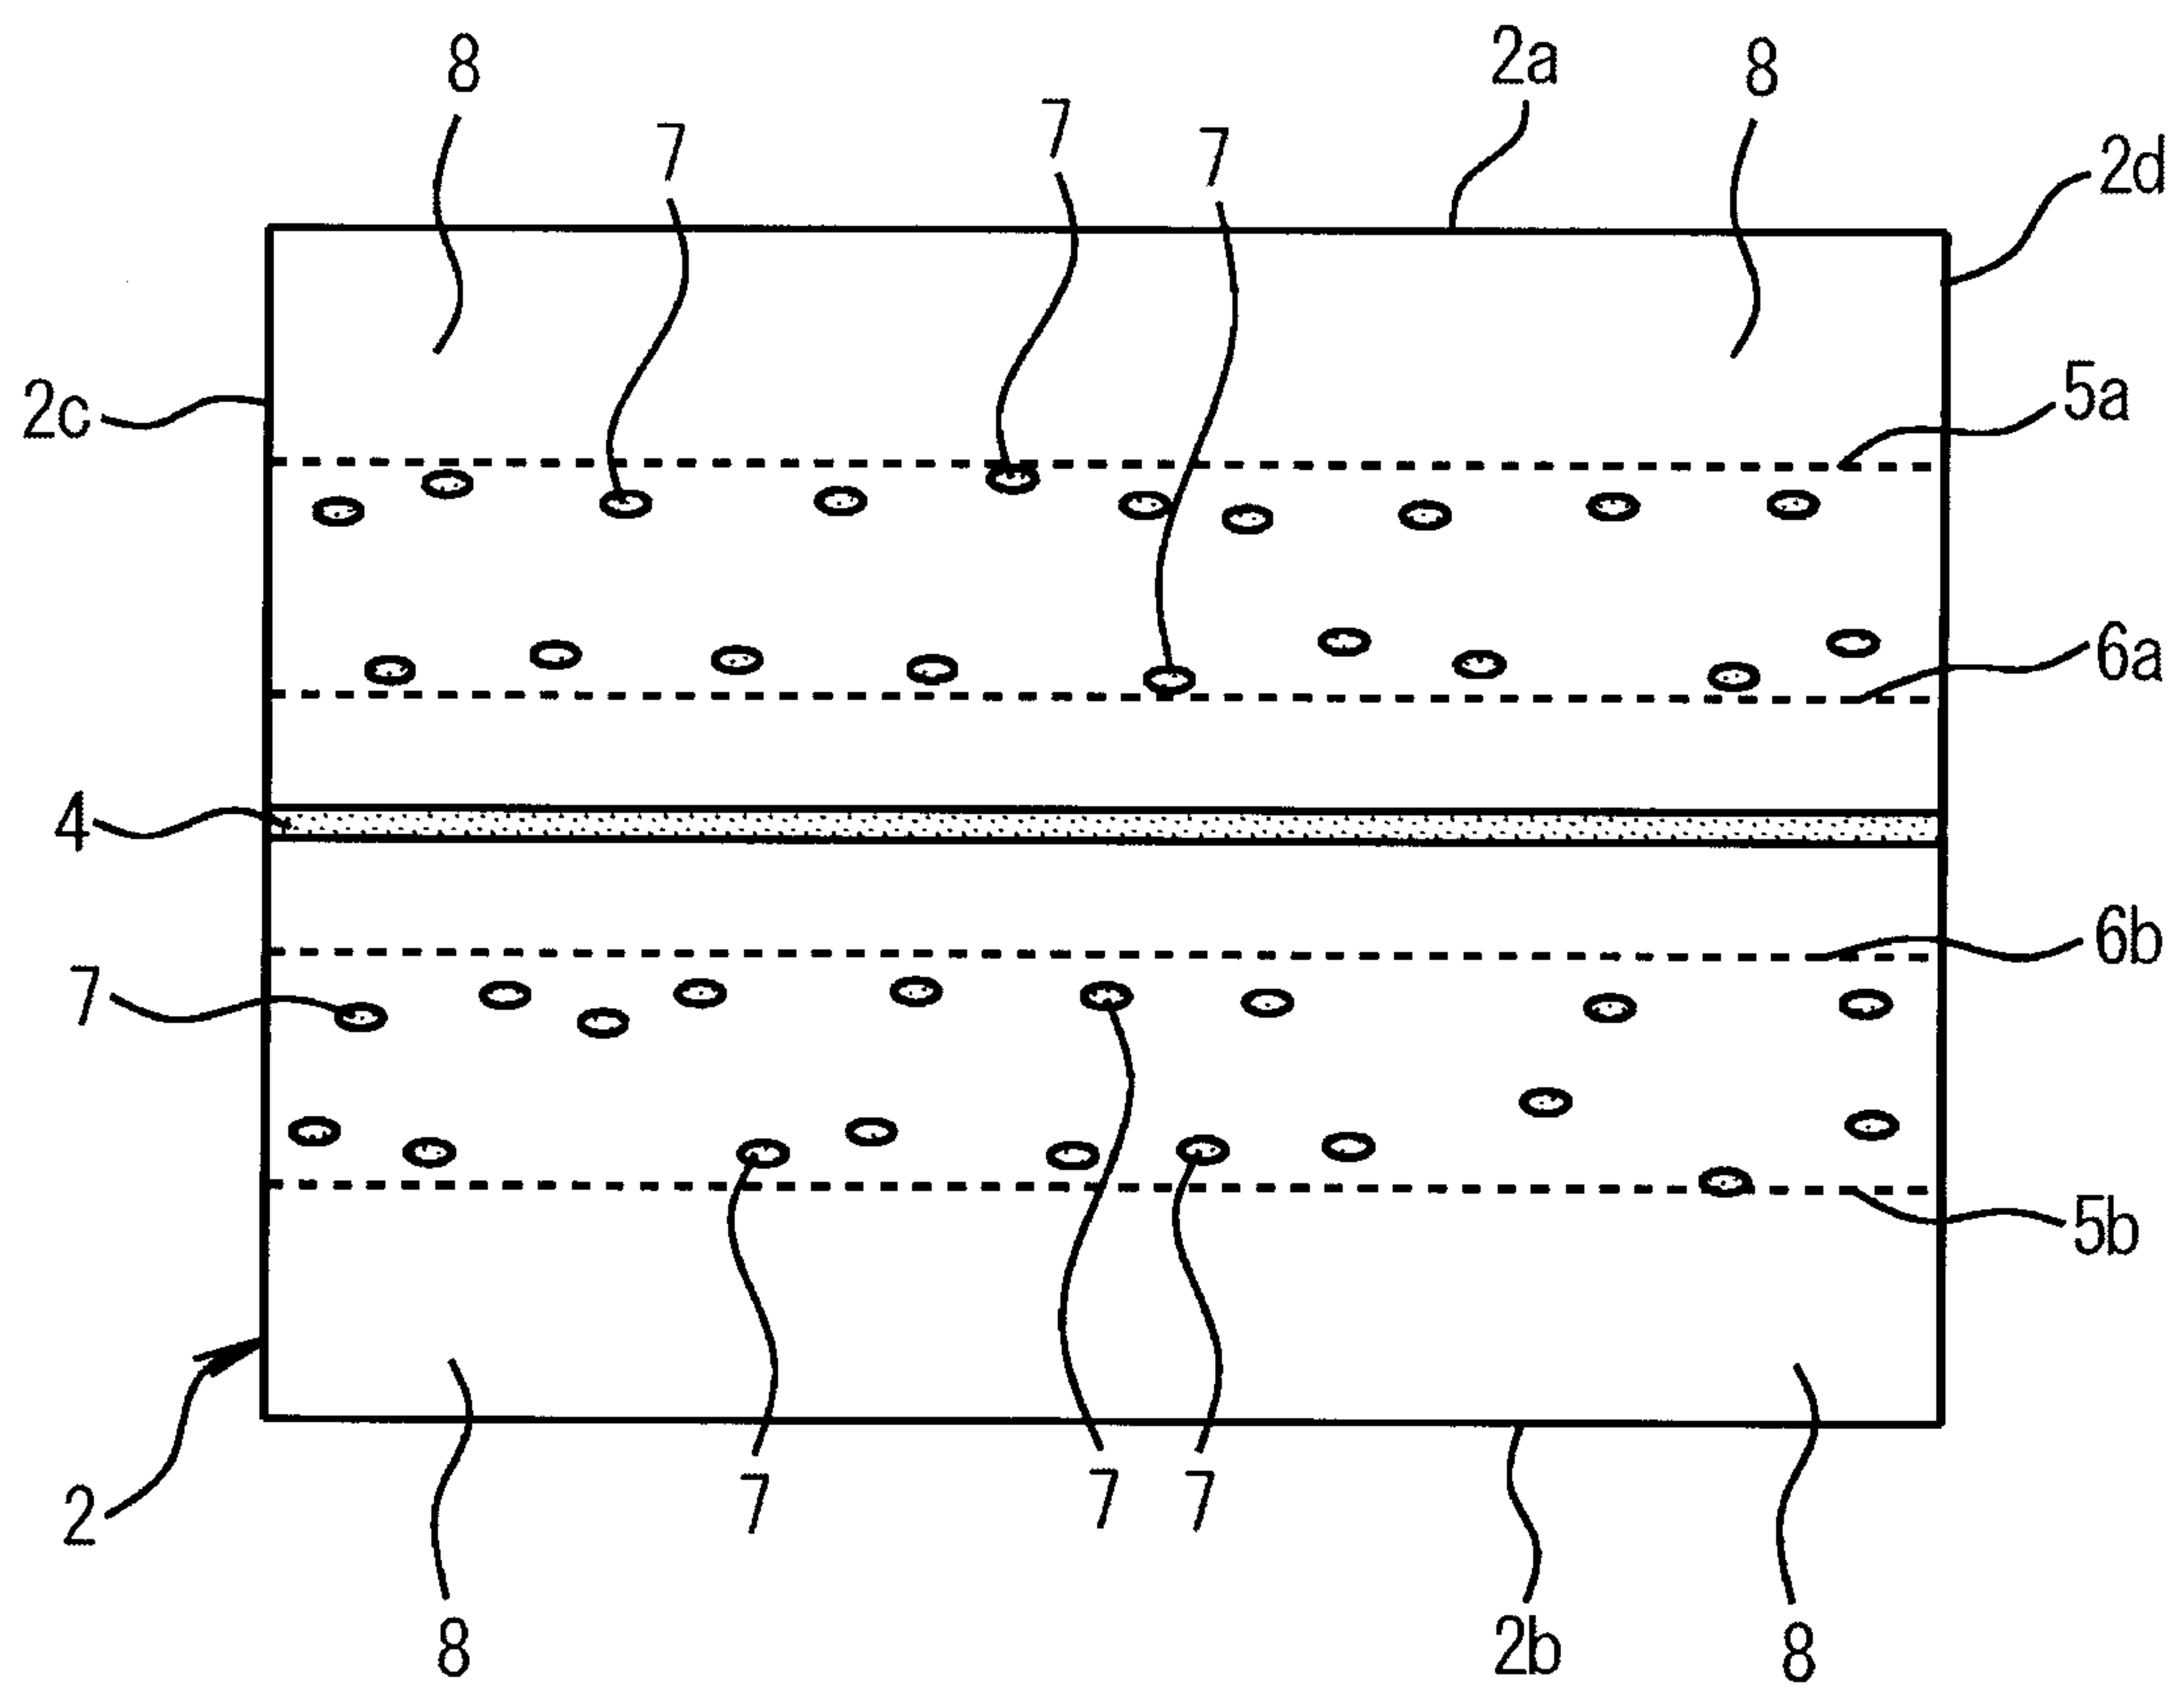


【FIG3】

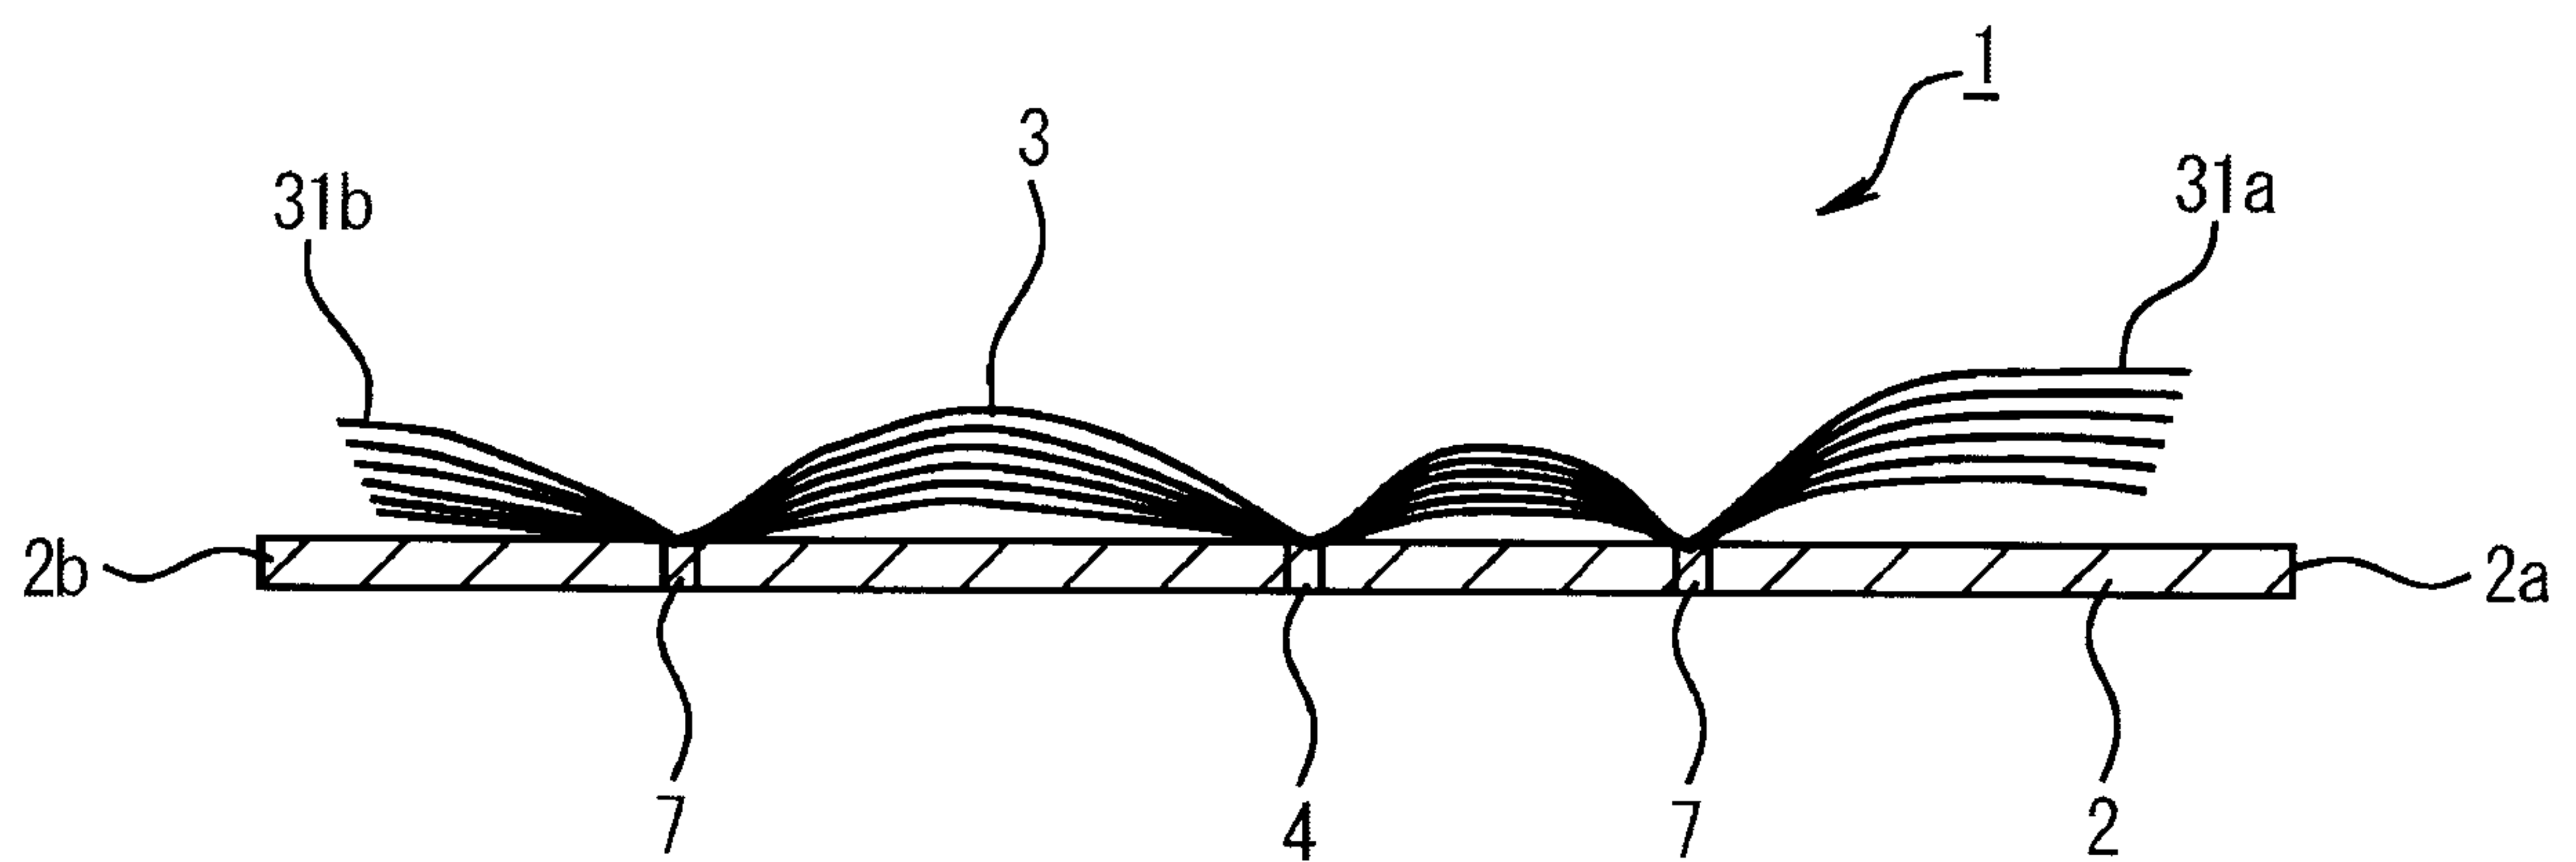


【FIG4】

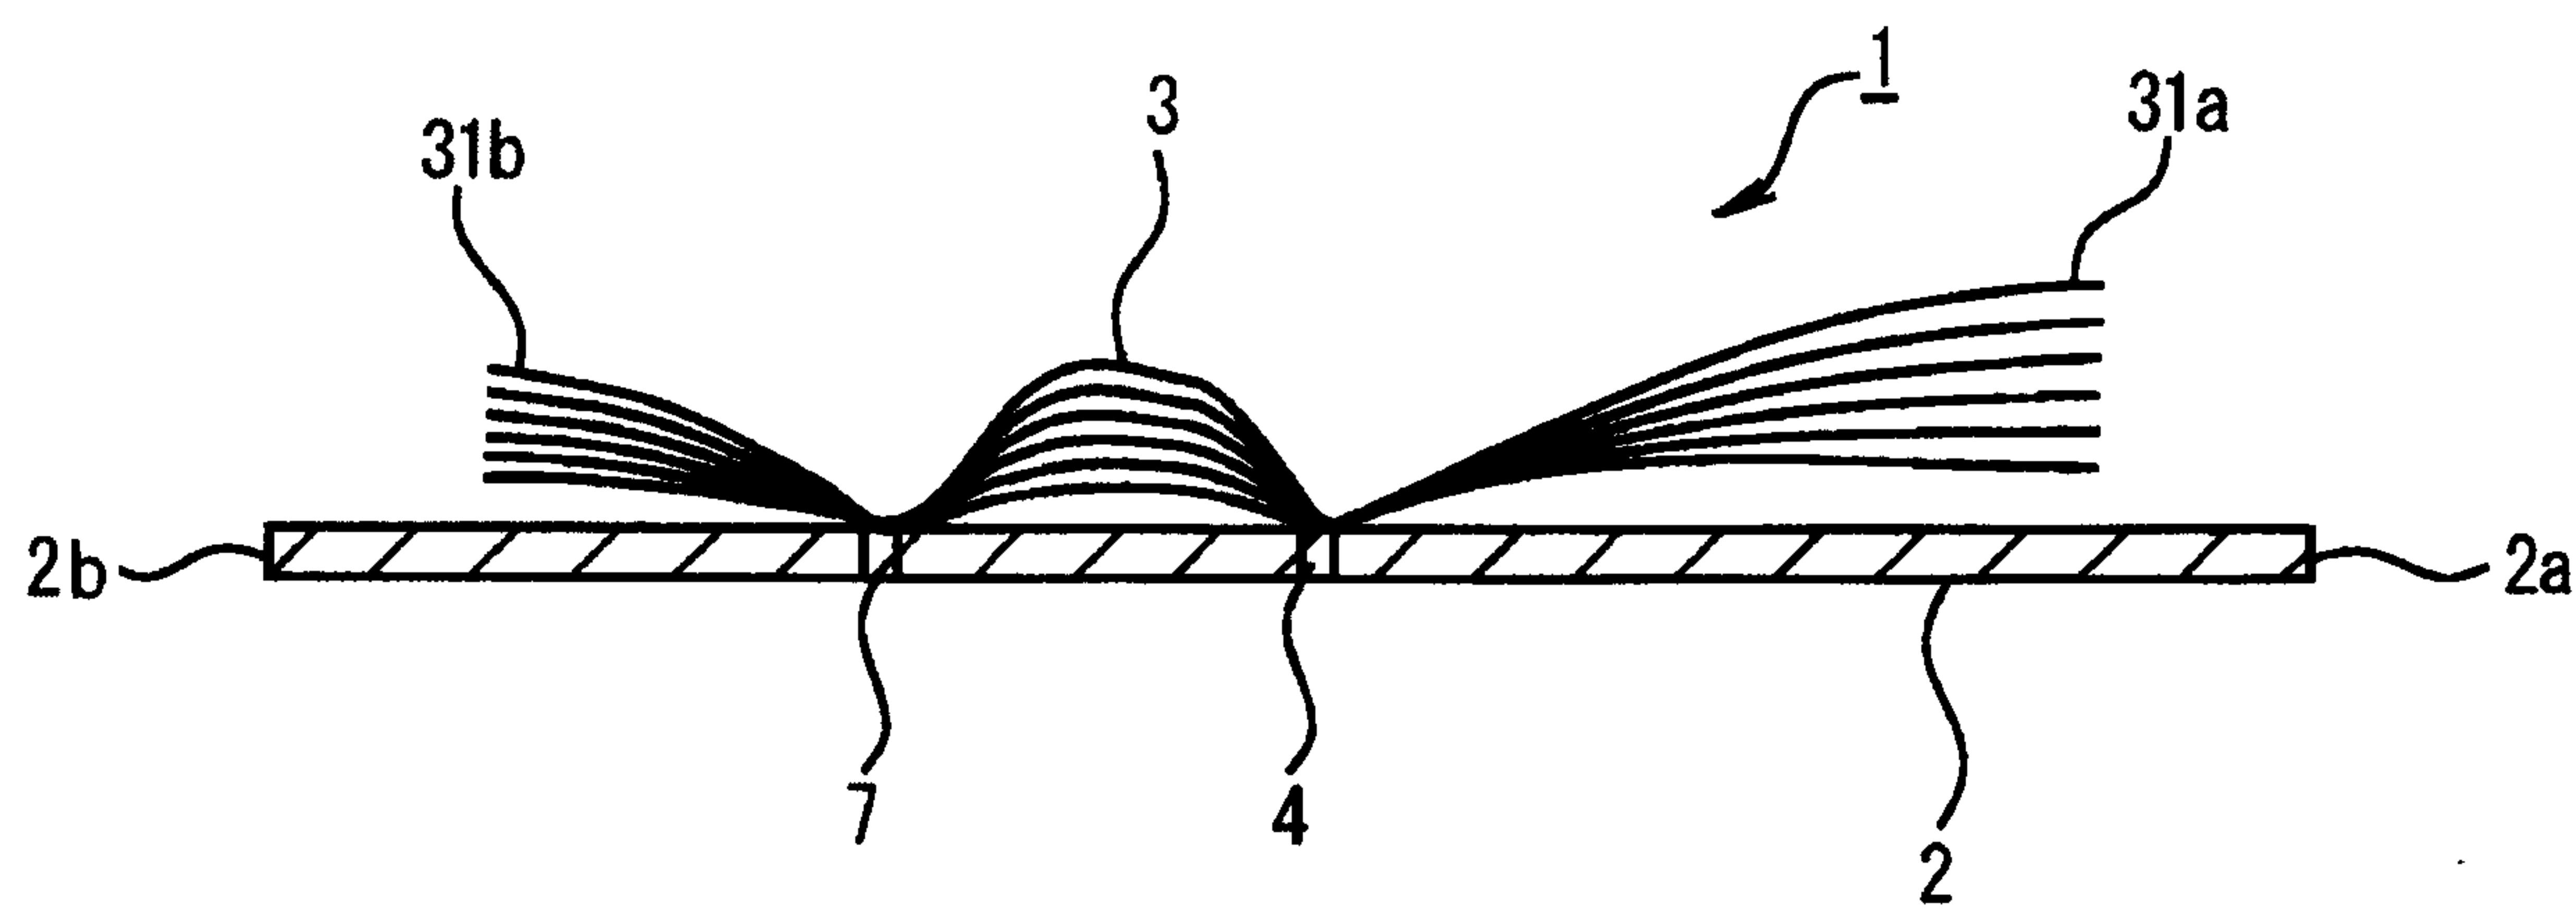


【FIG5】

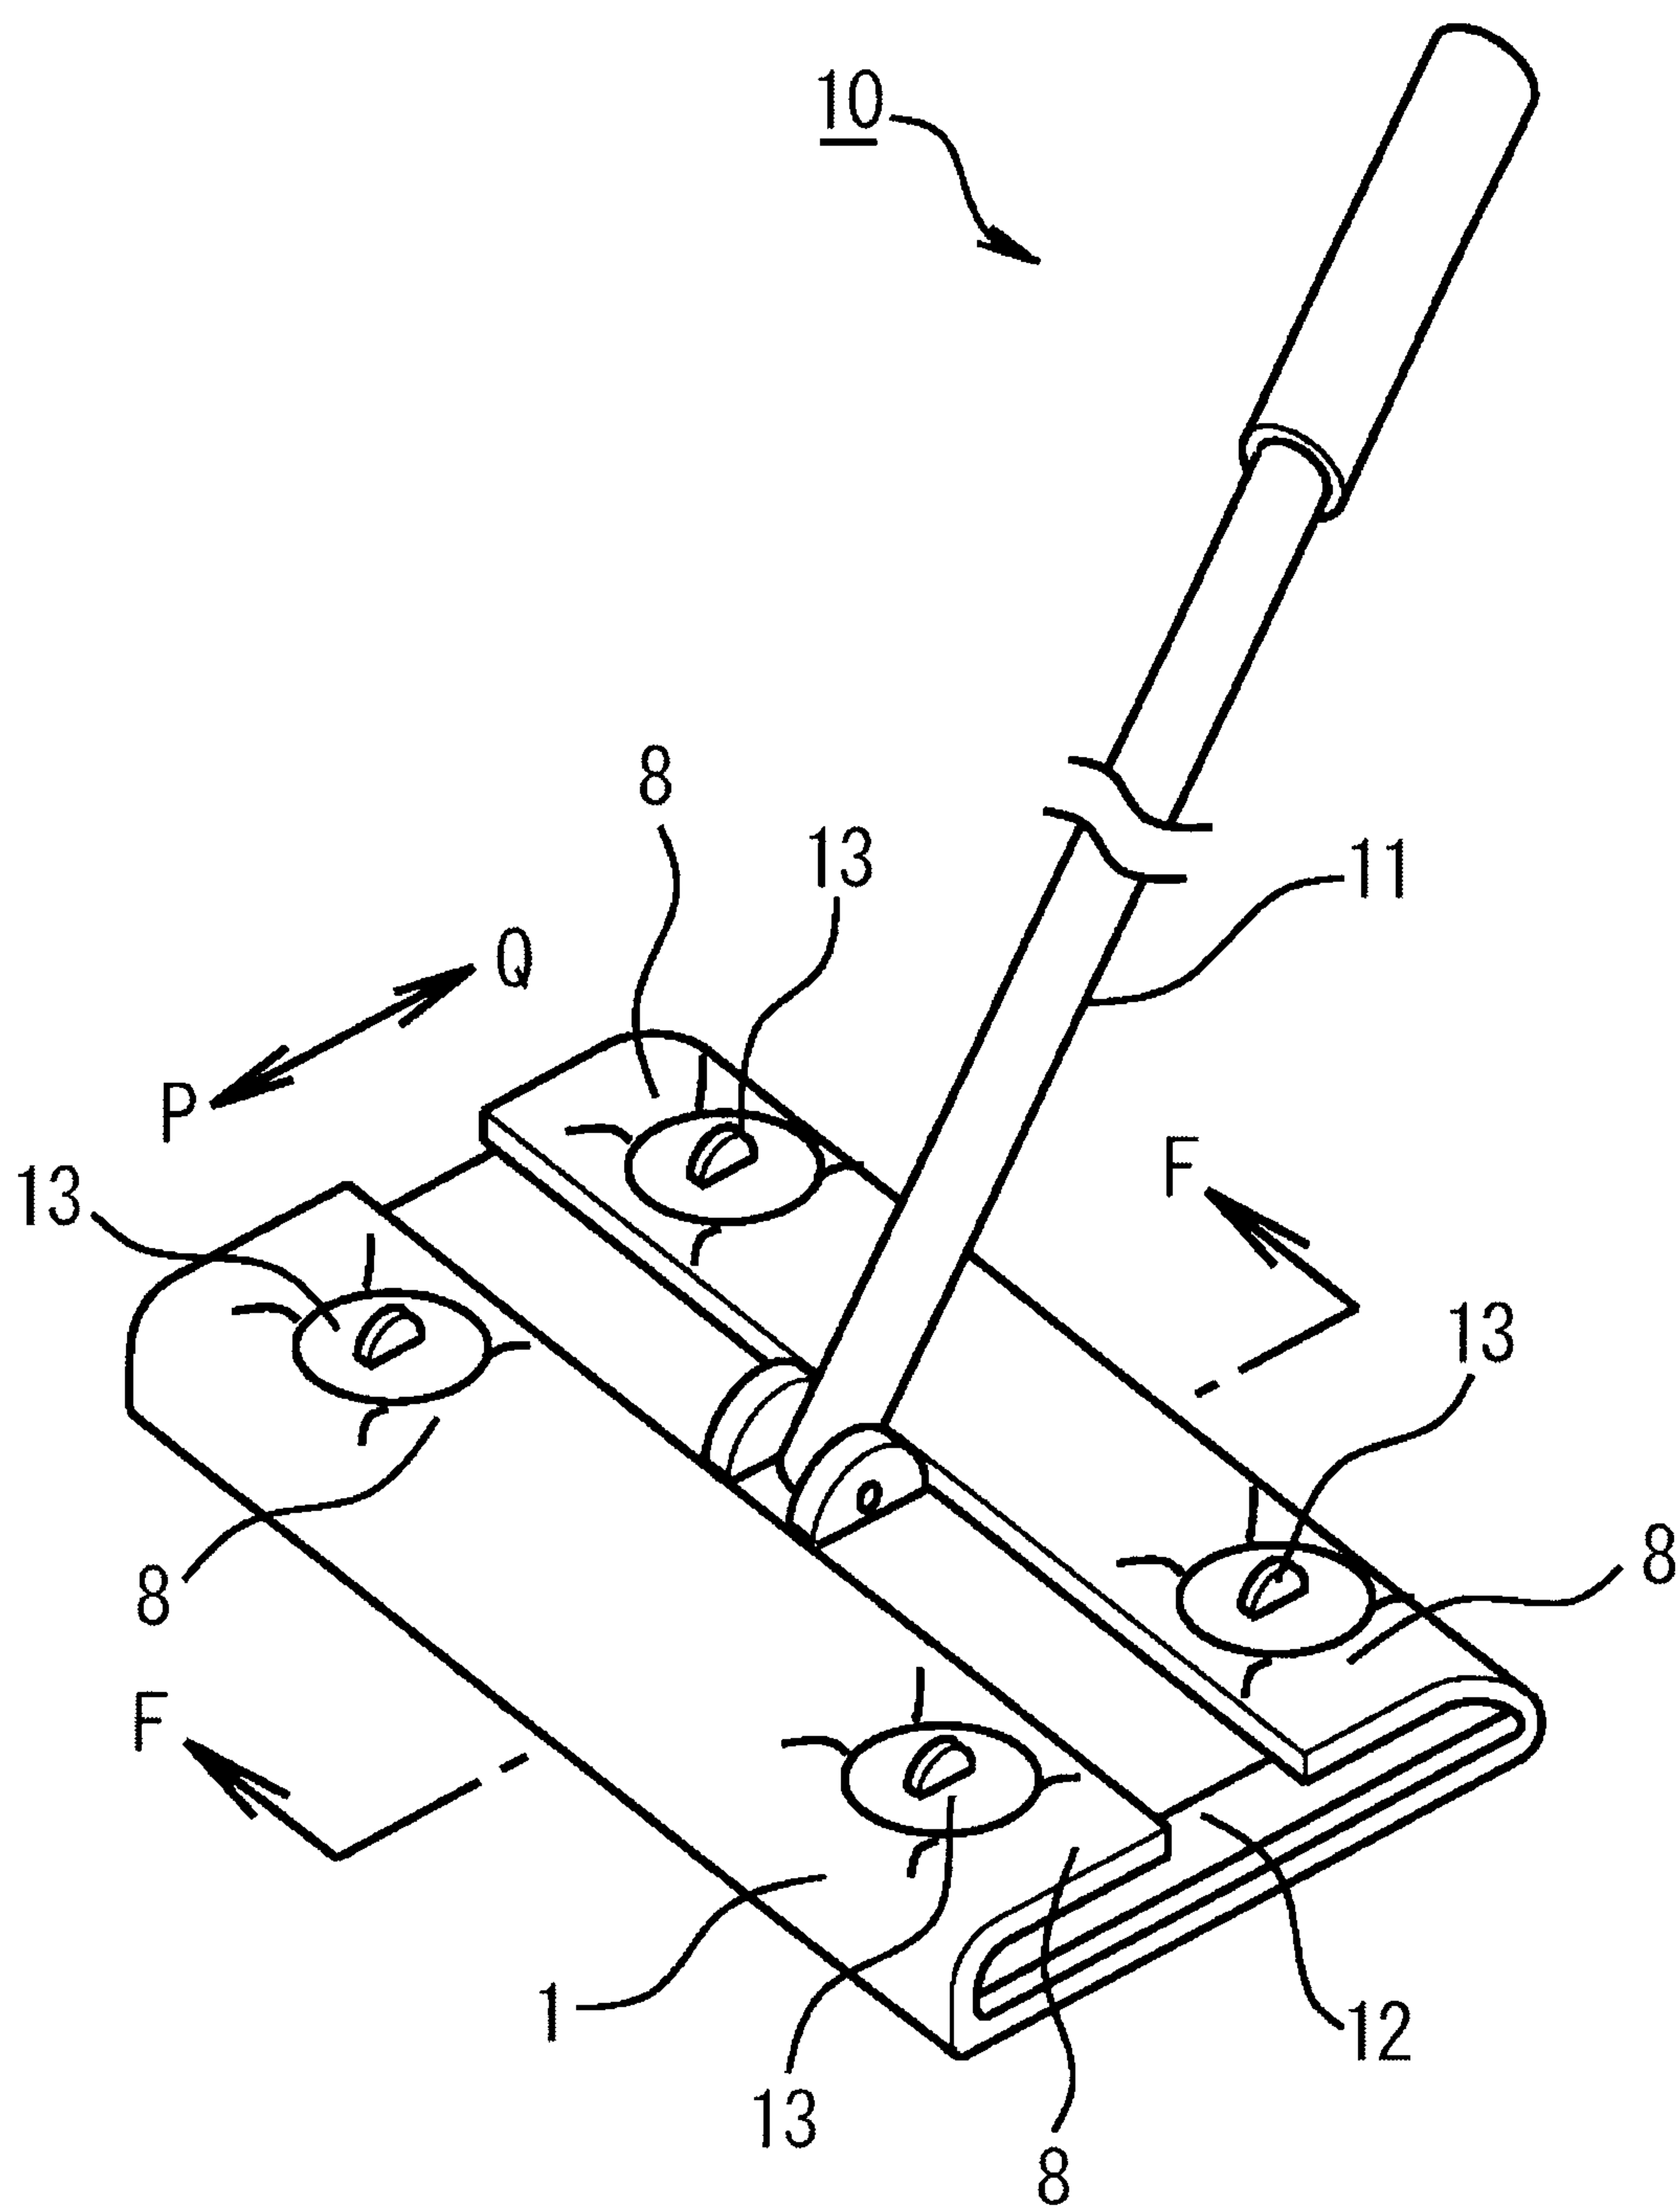


【FIG6】

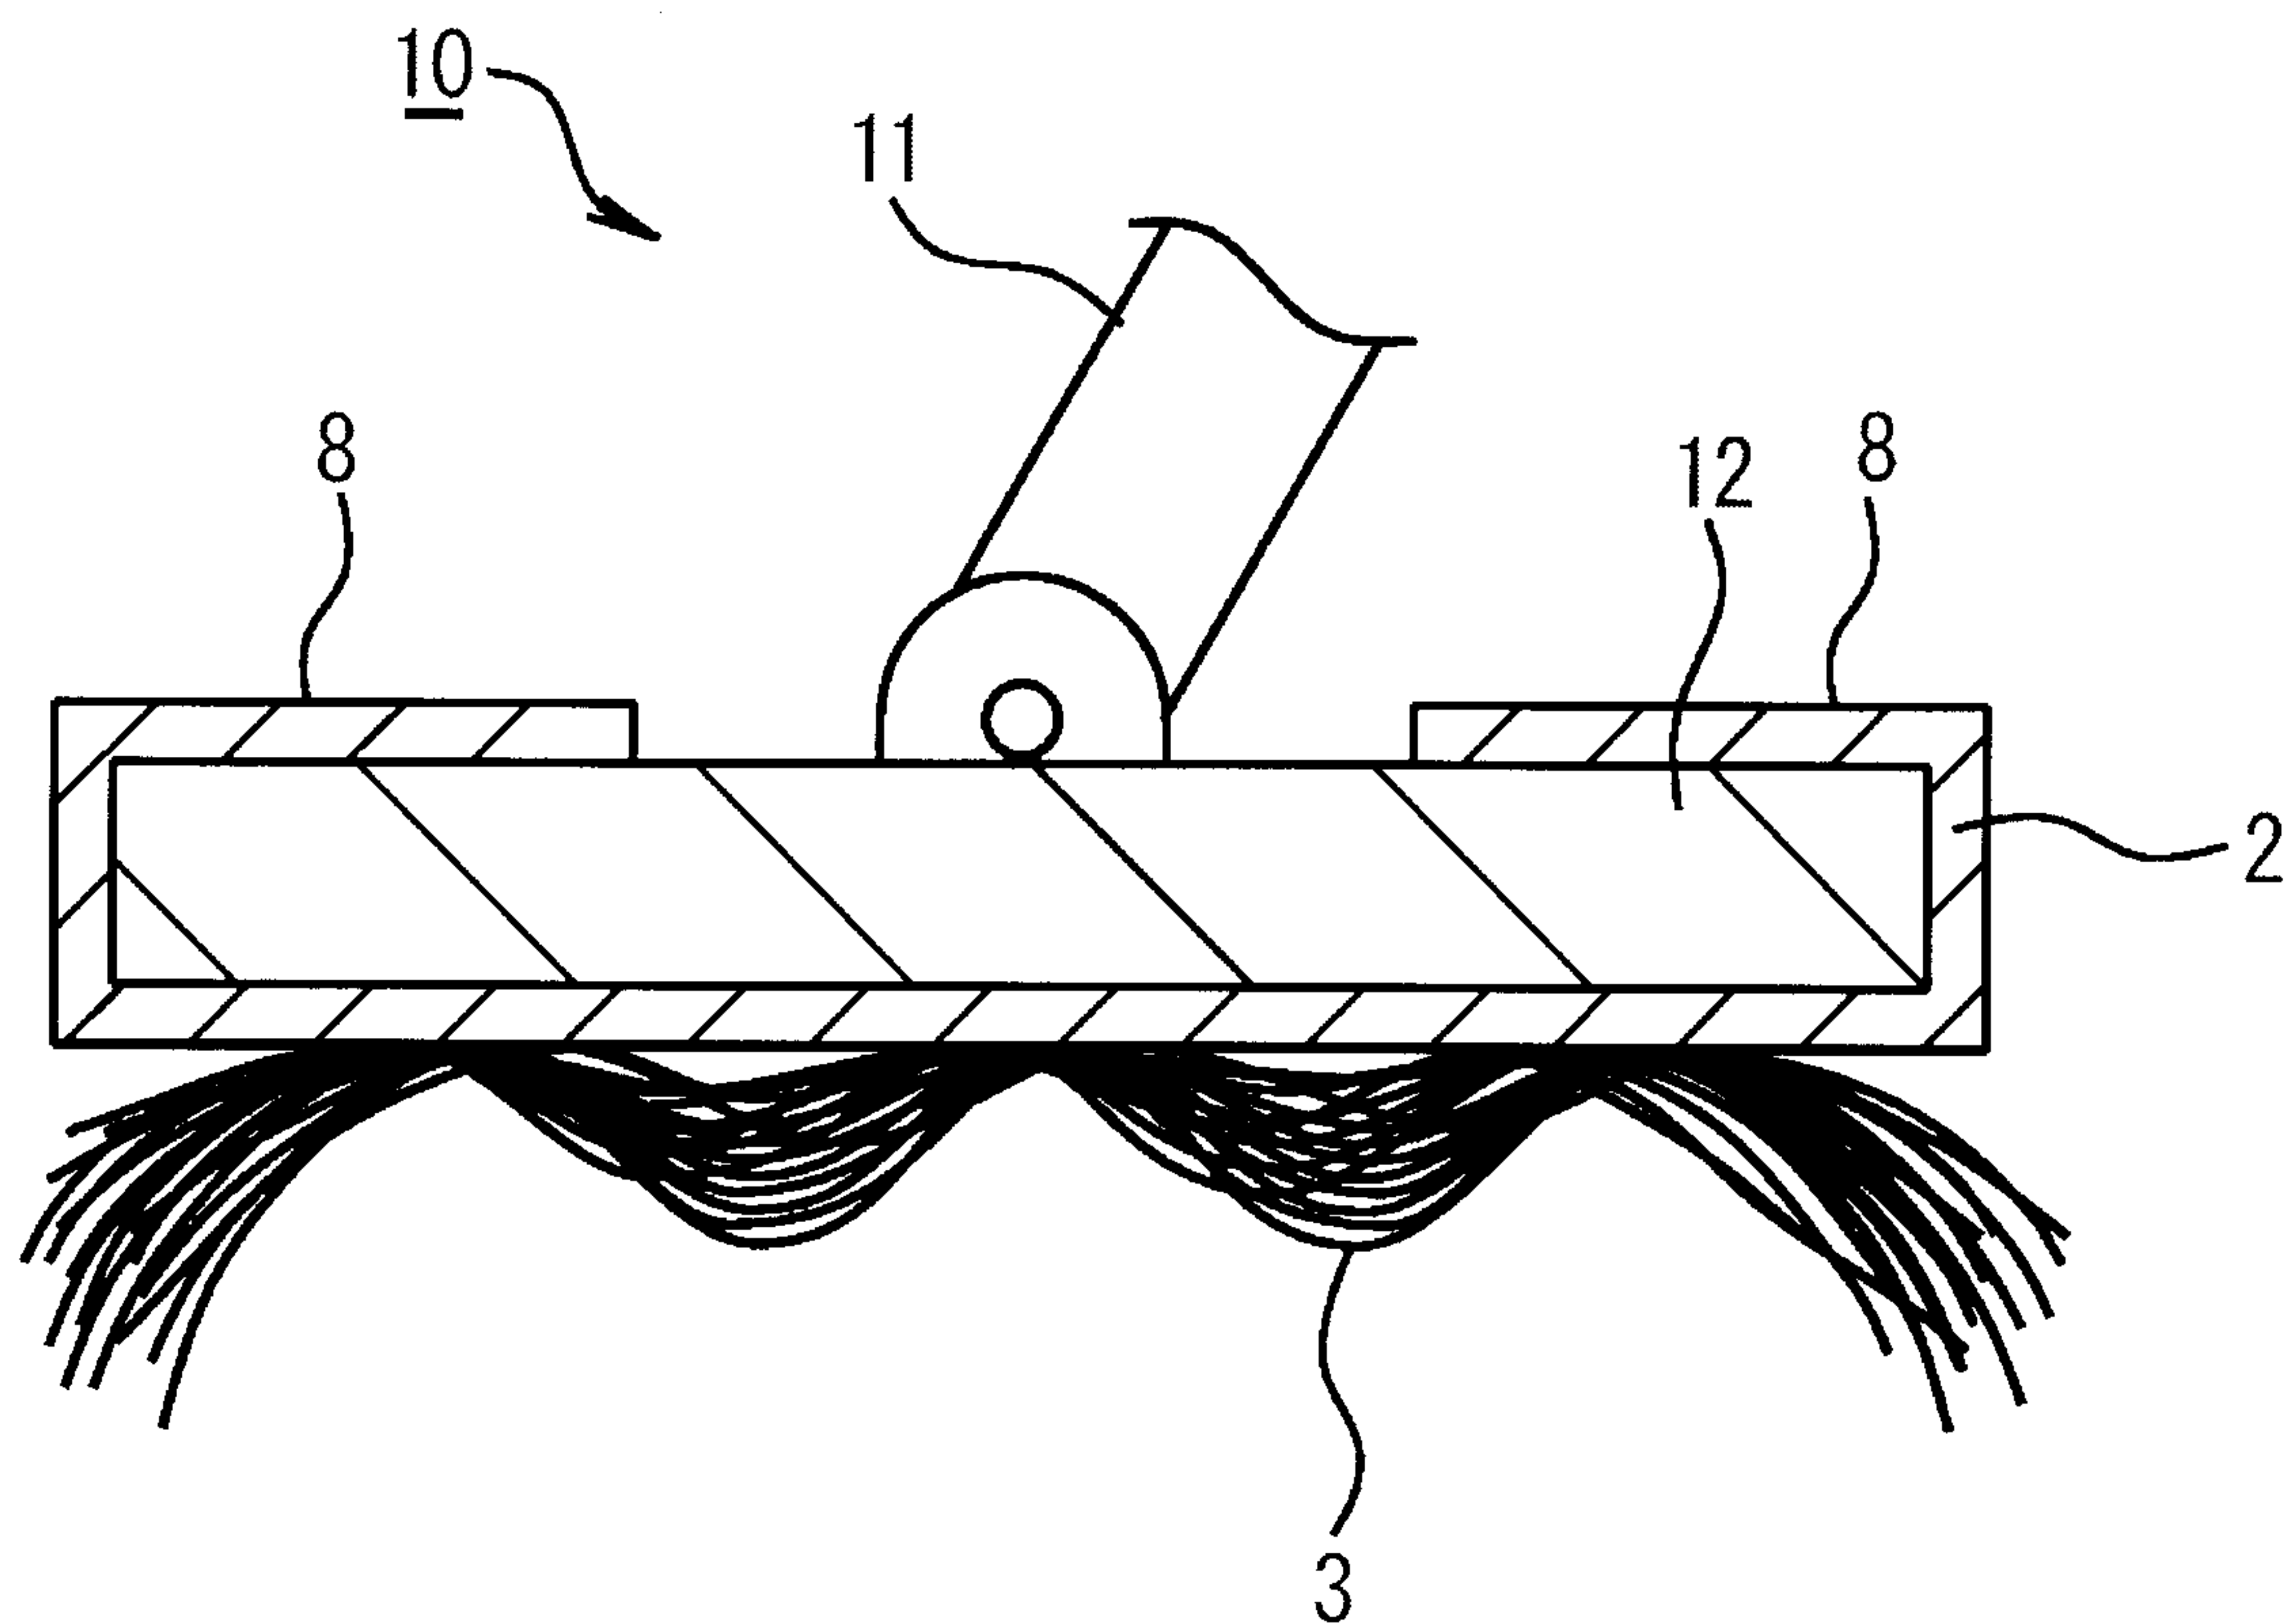


【FIG7】

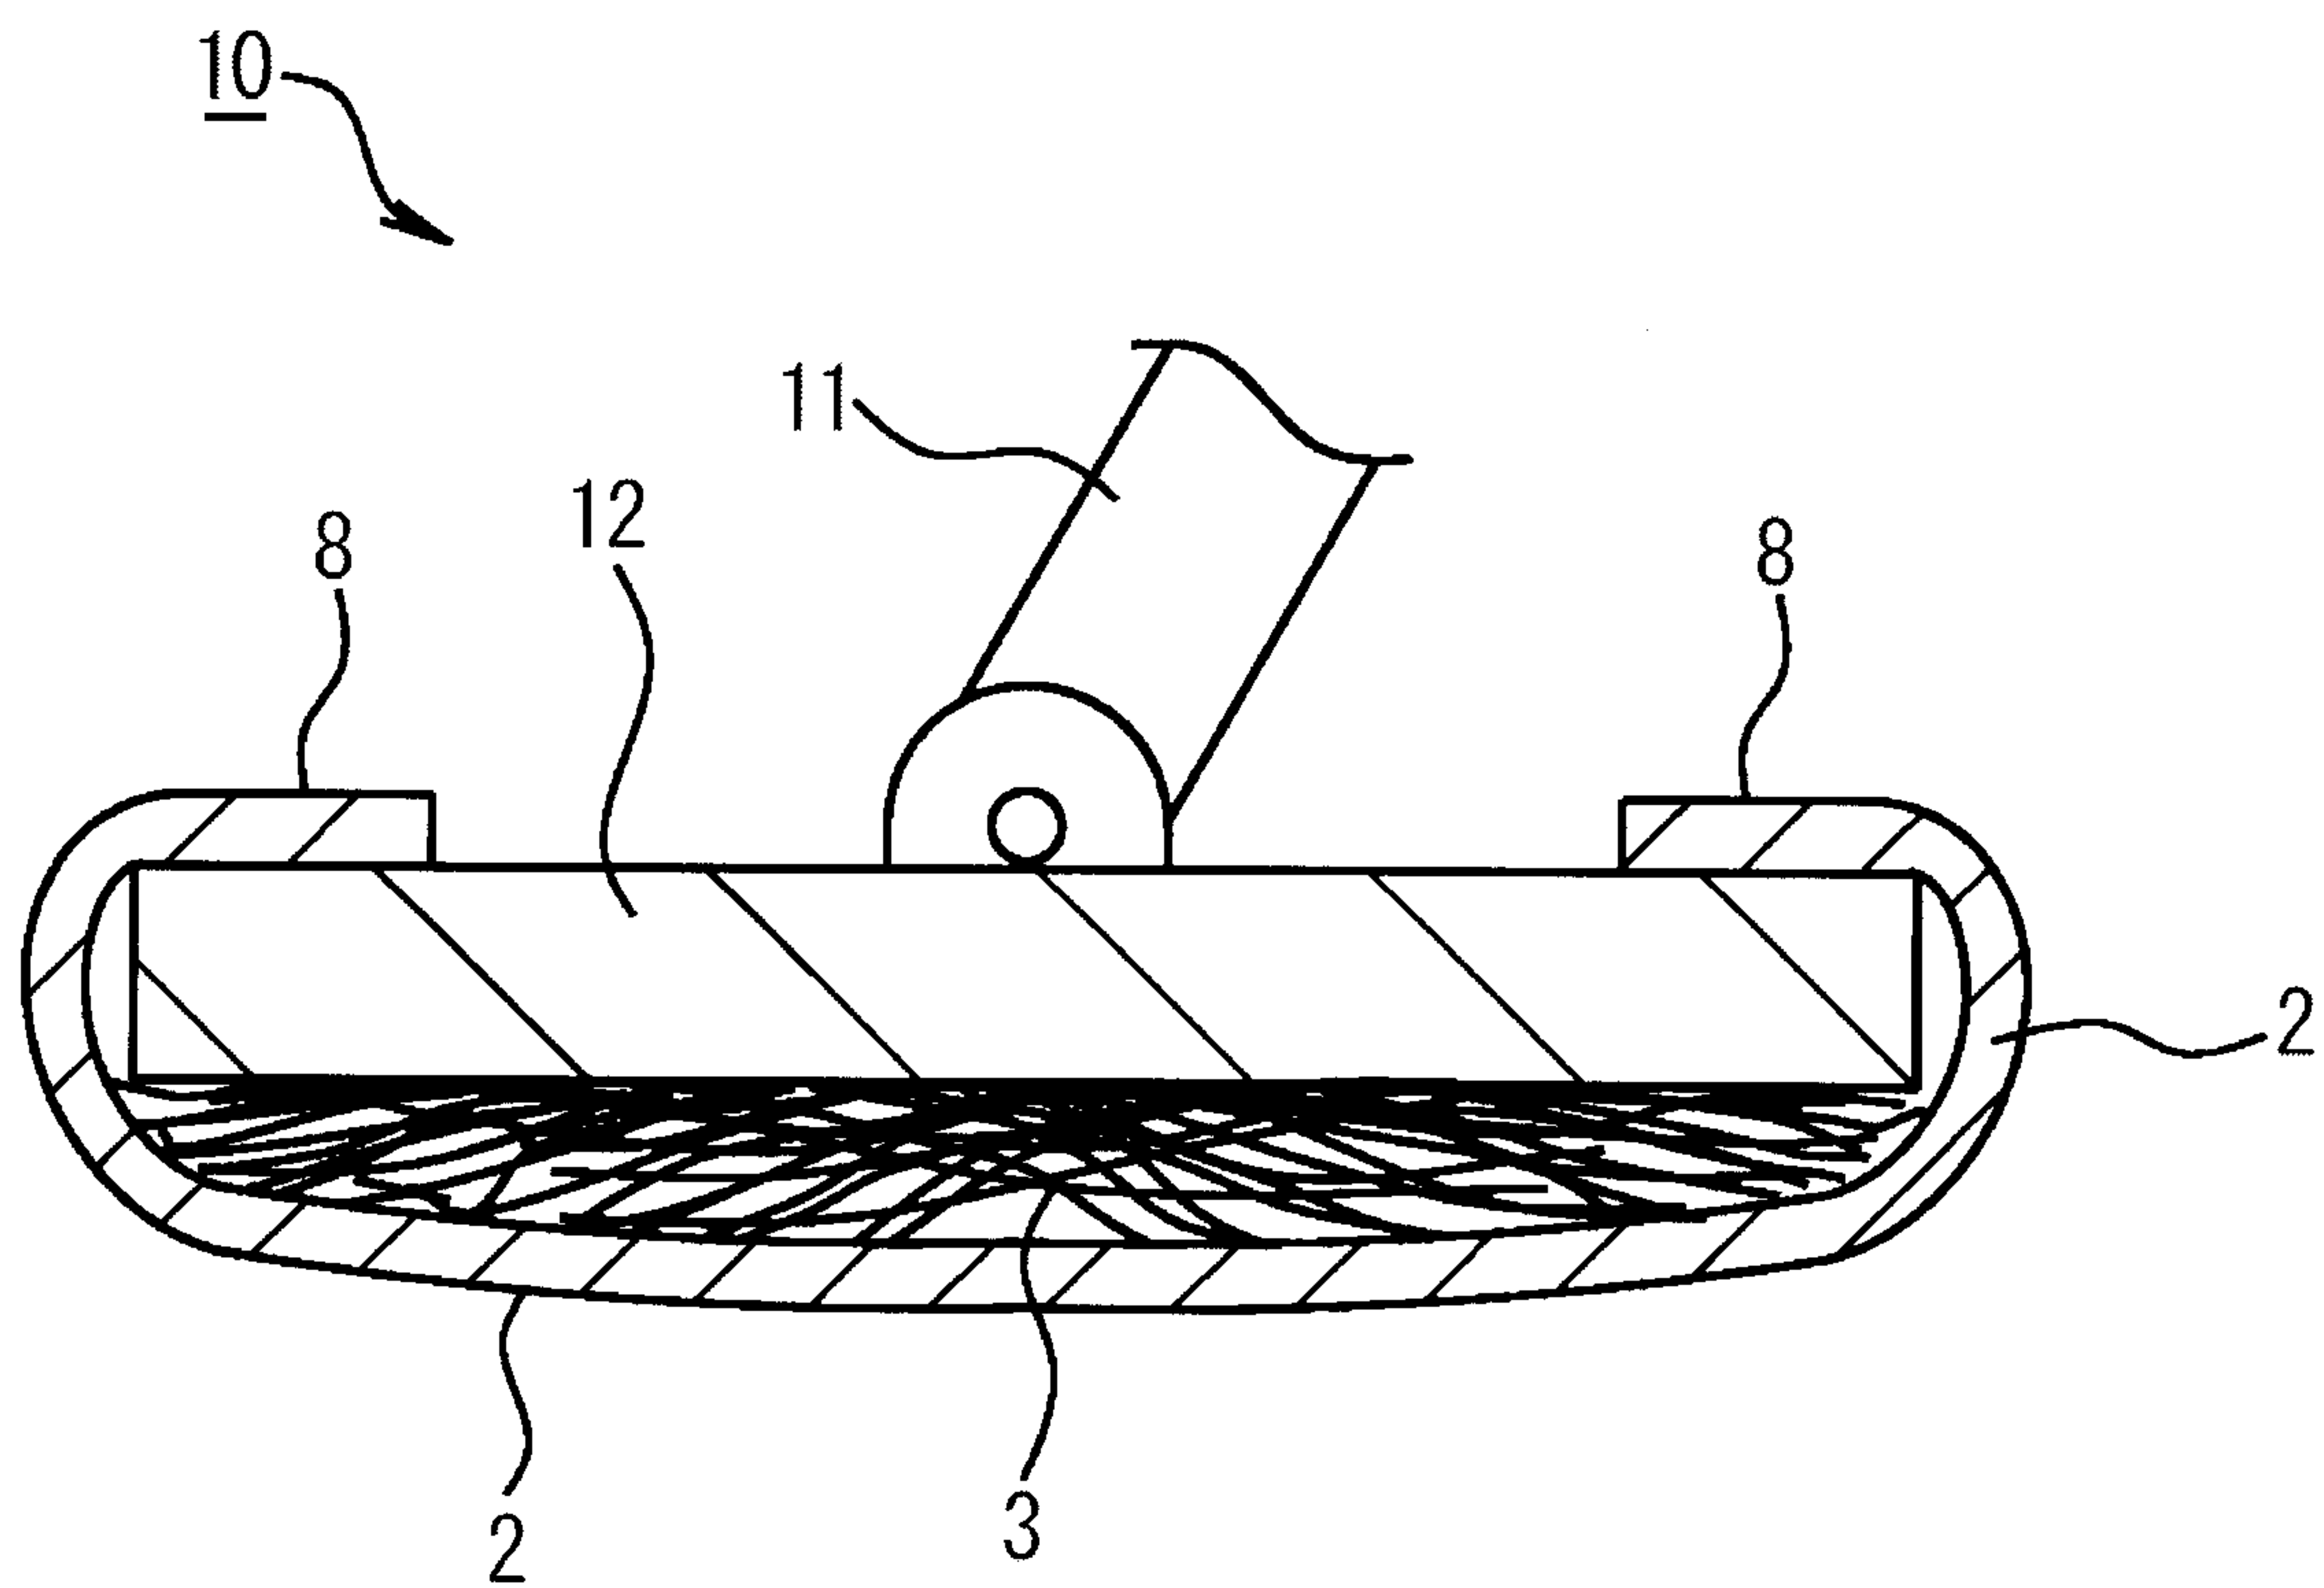


【FIG8】

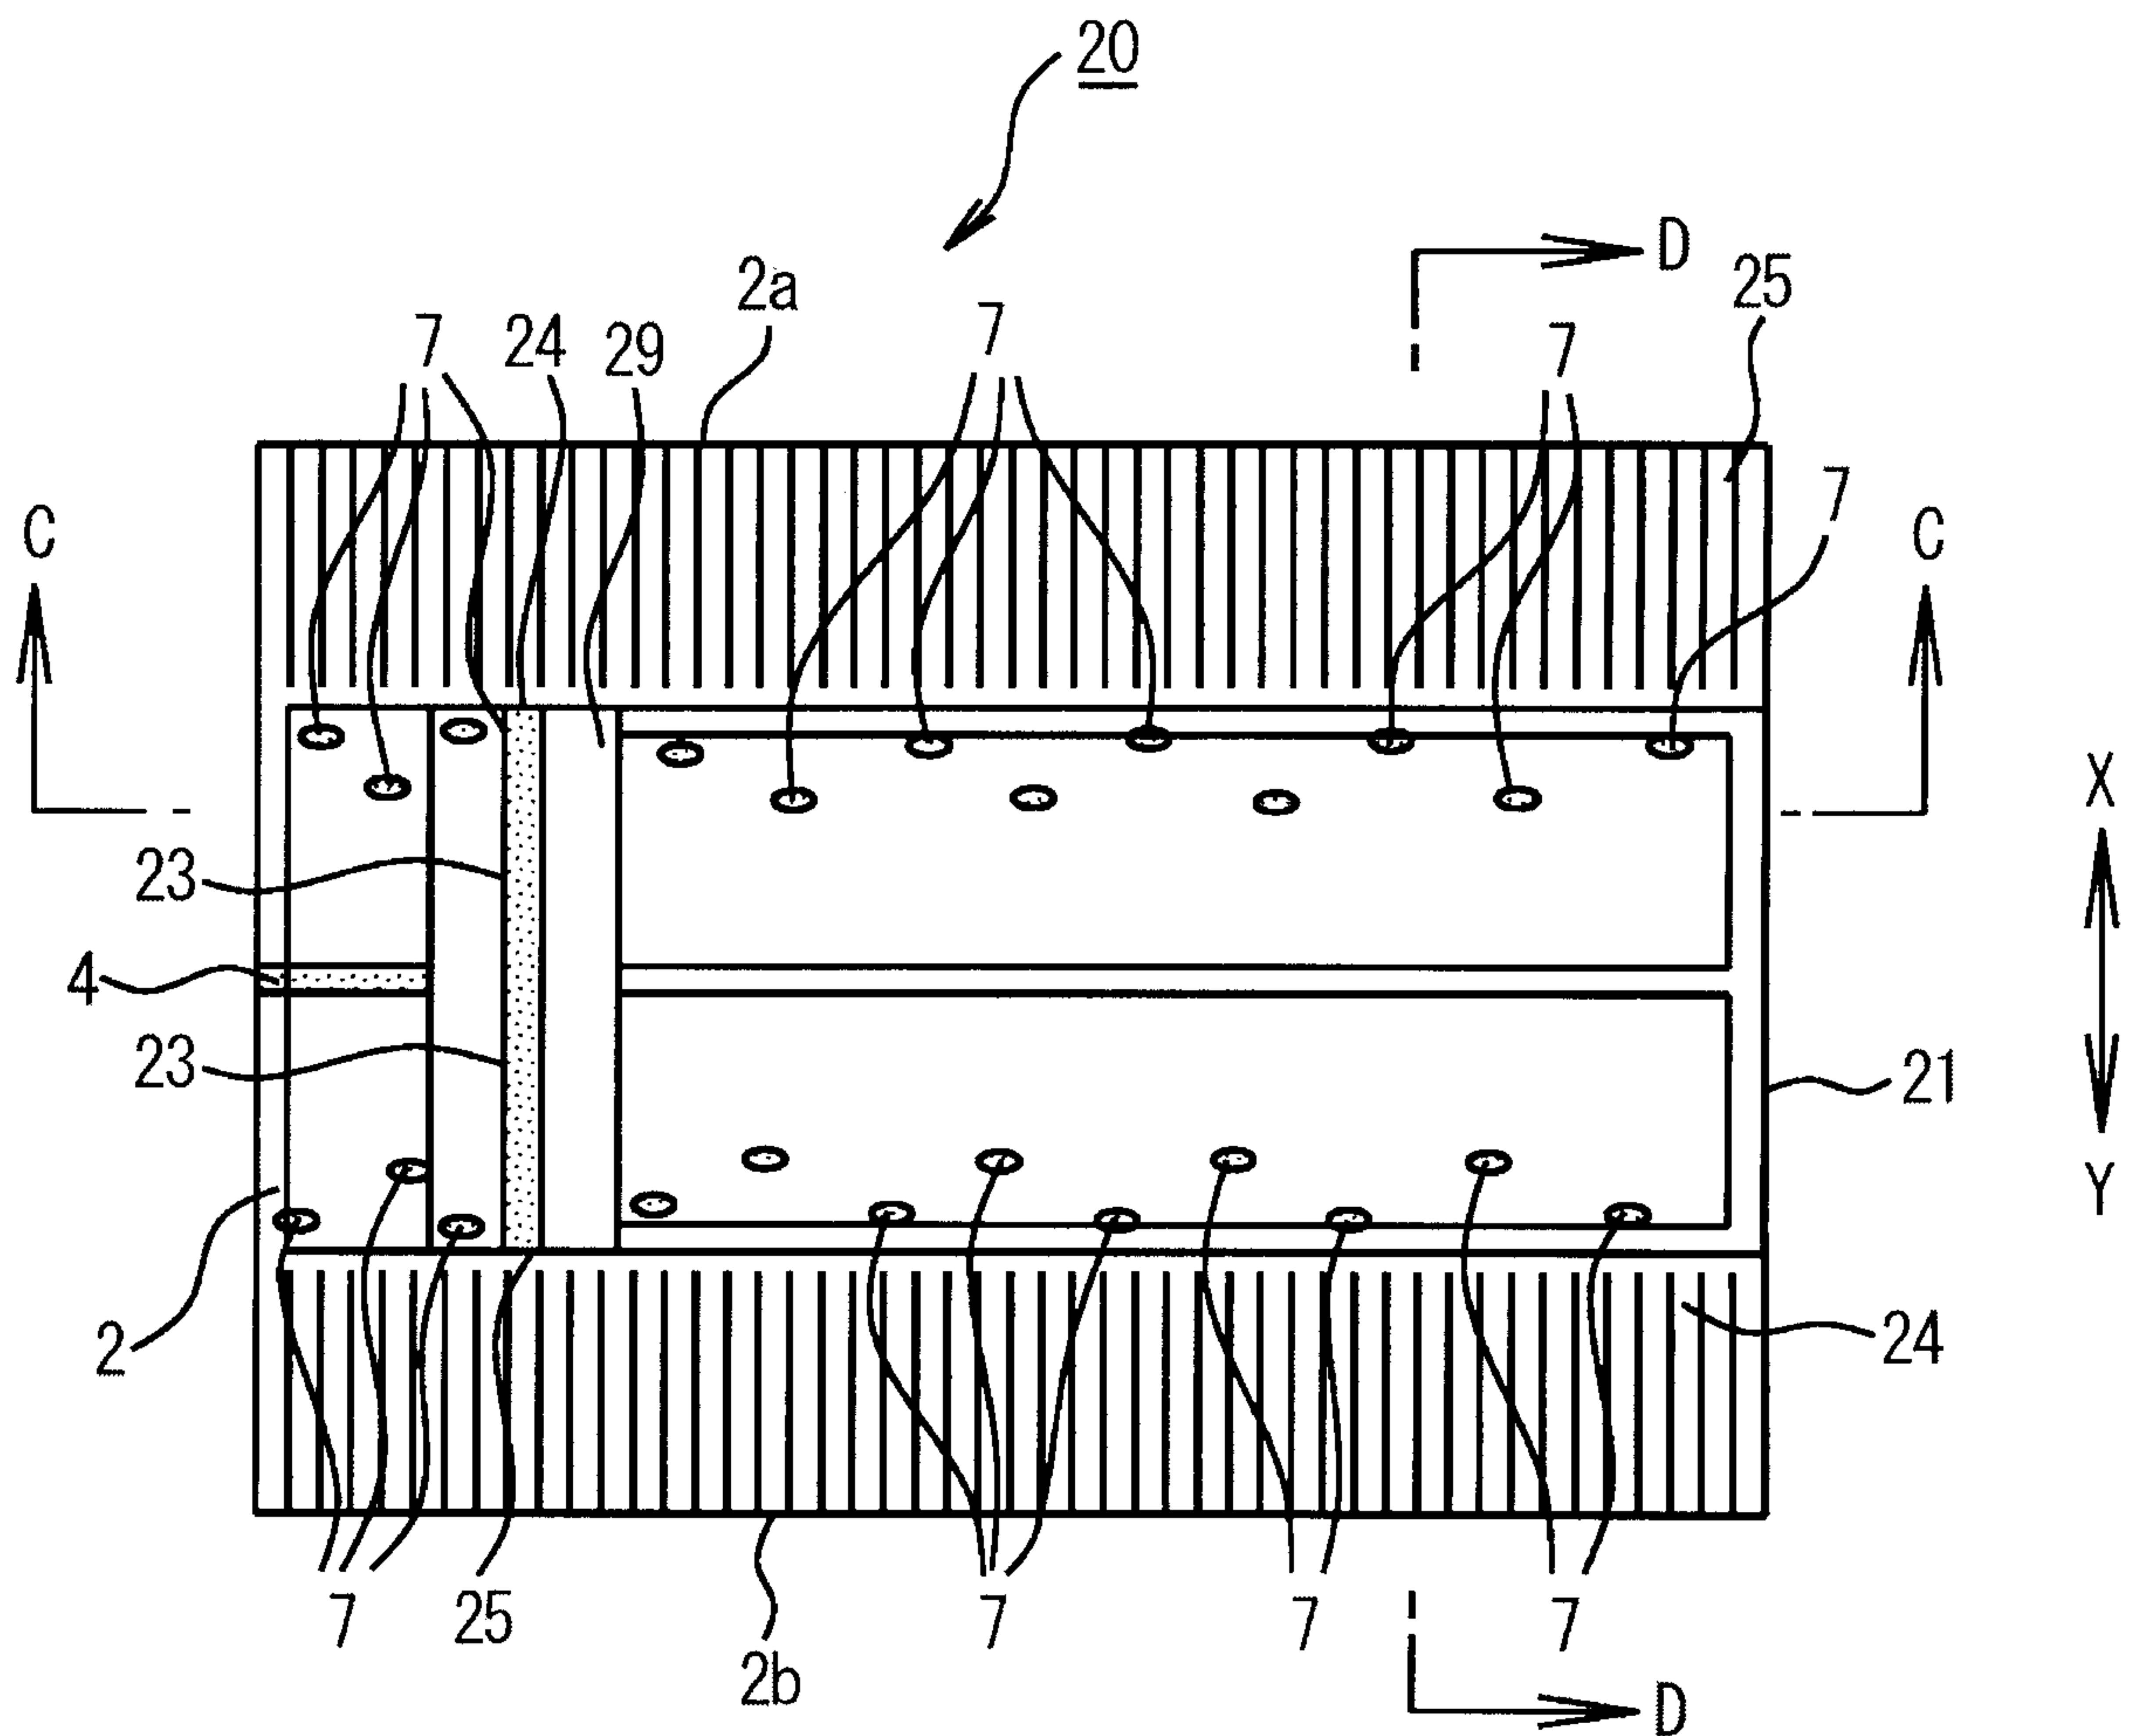


【FIG9】

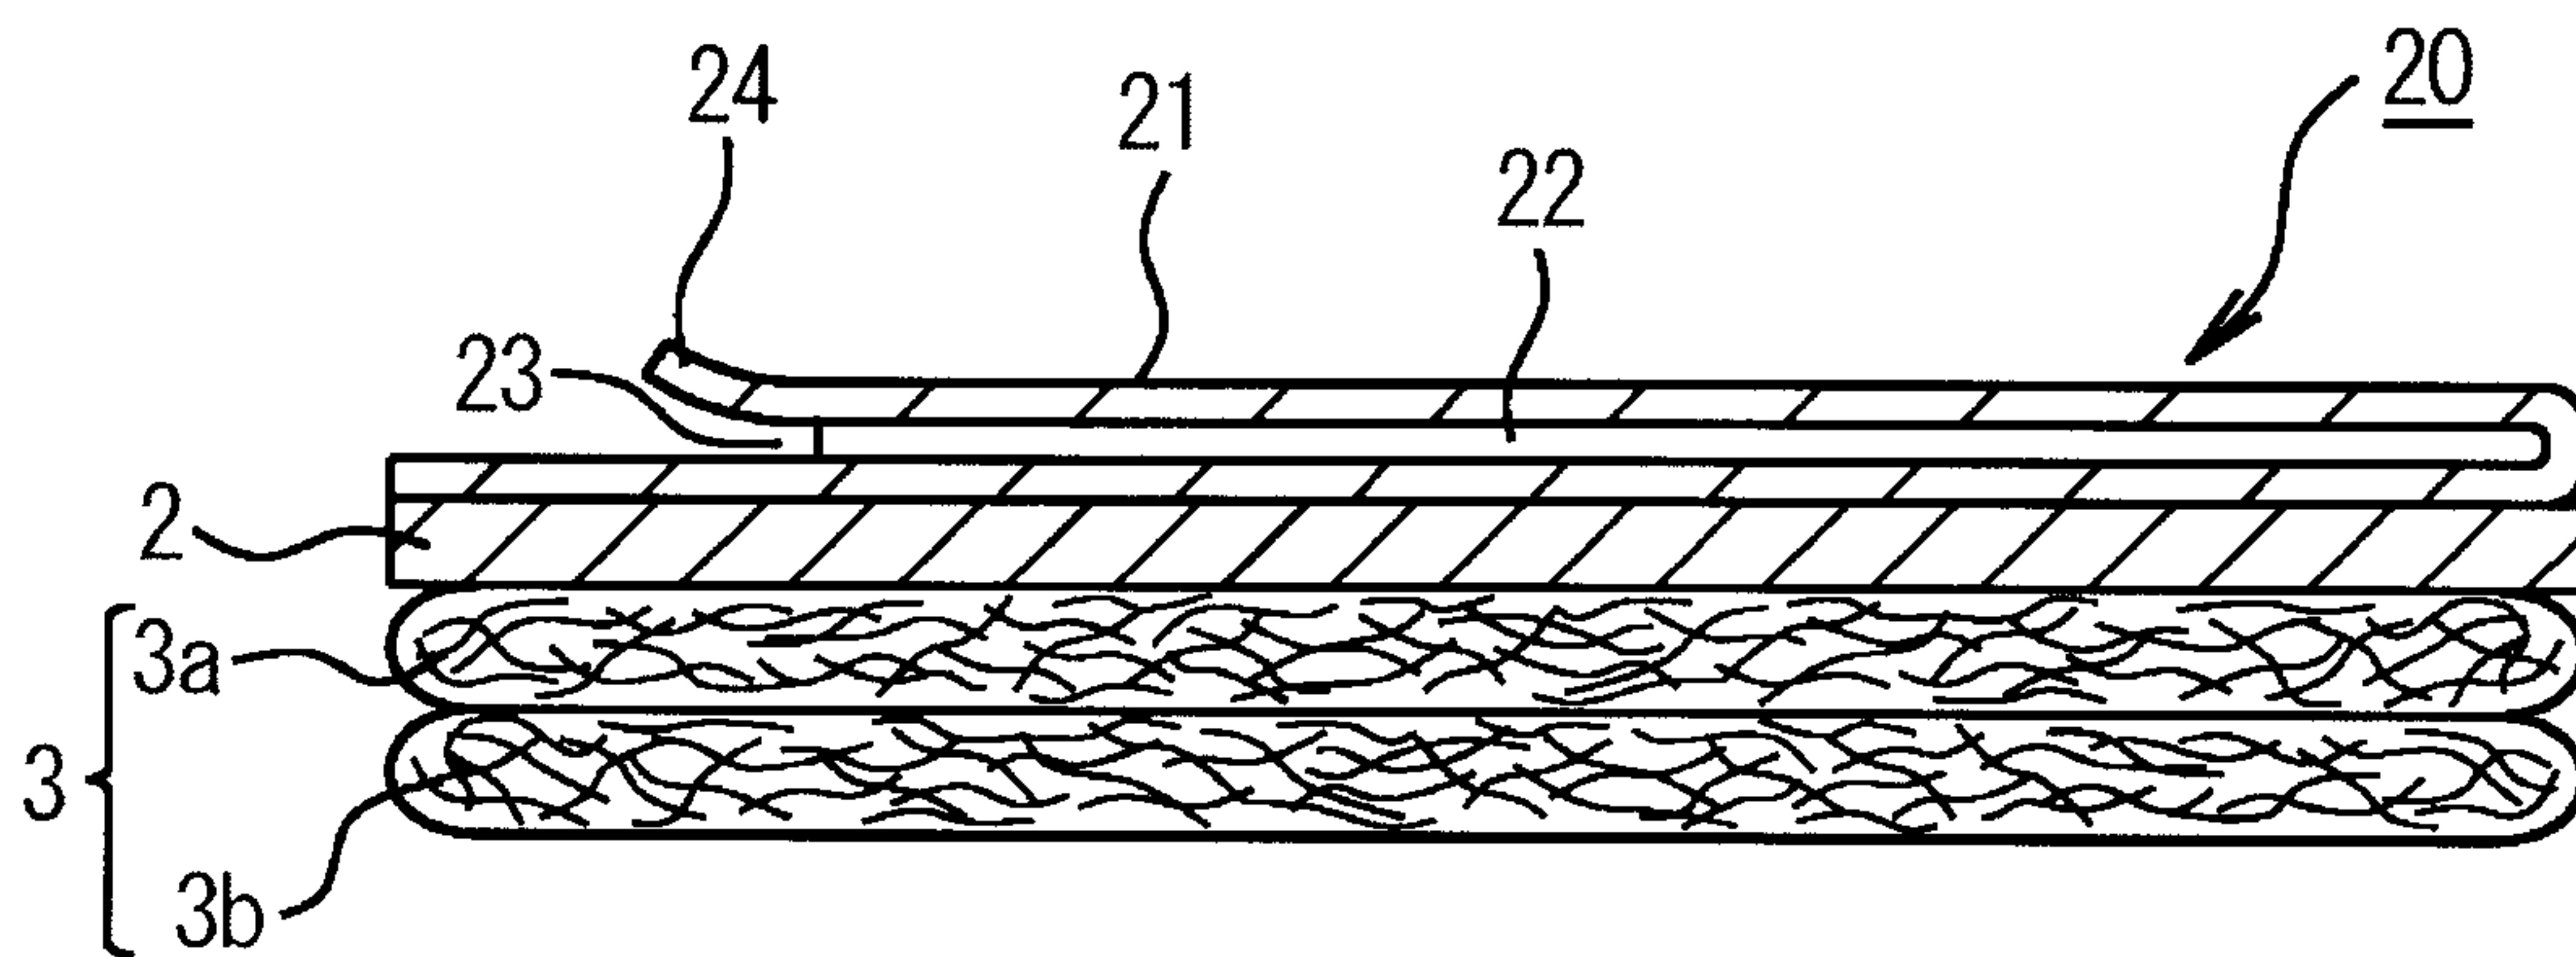


【FIG10】

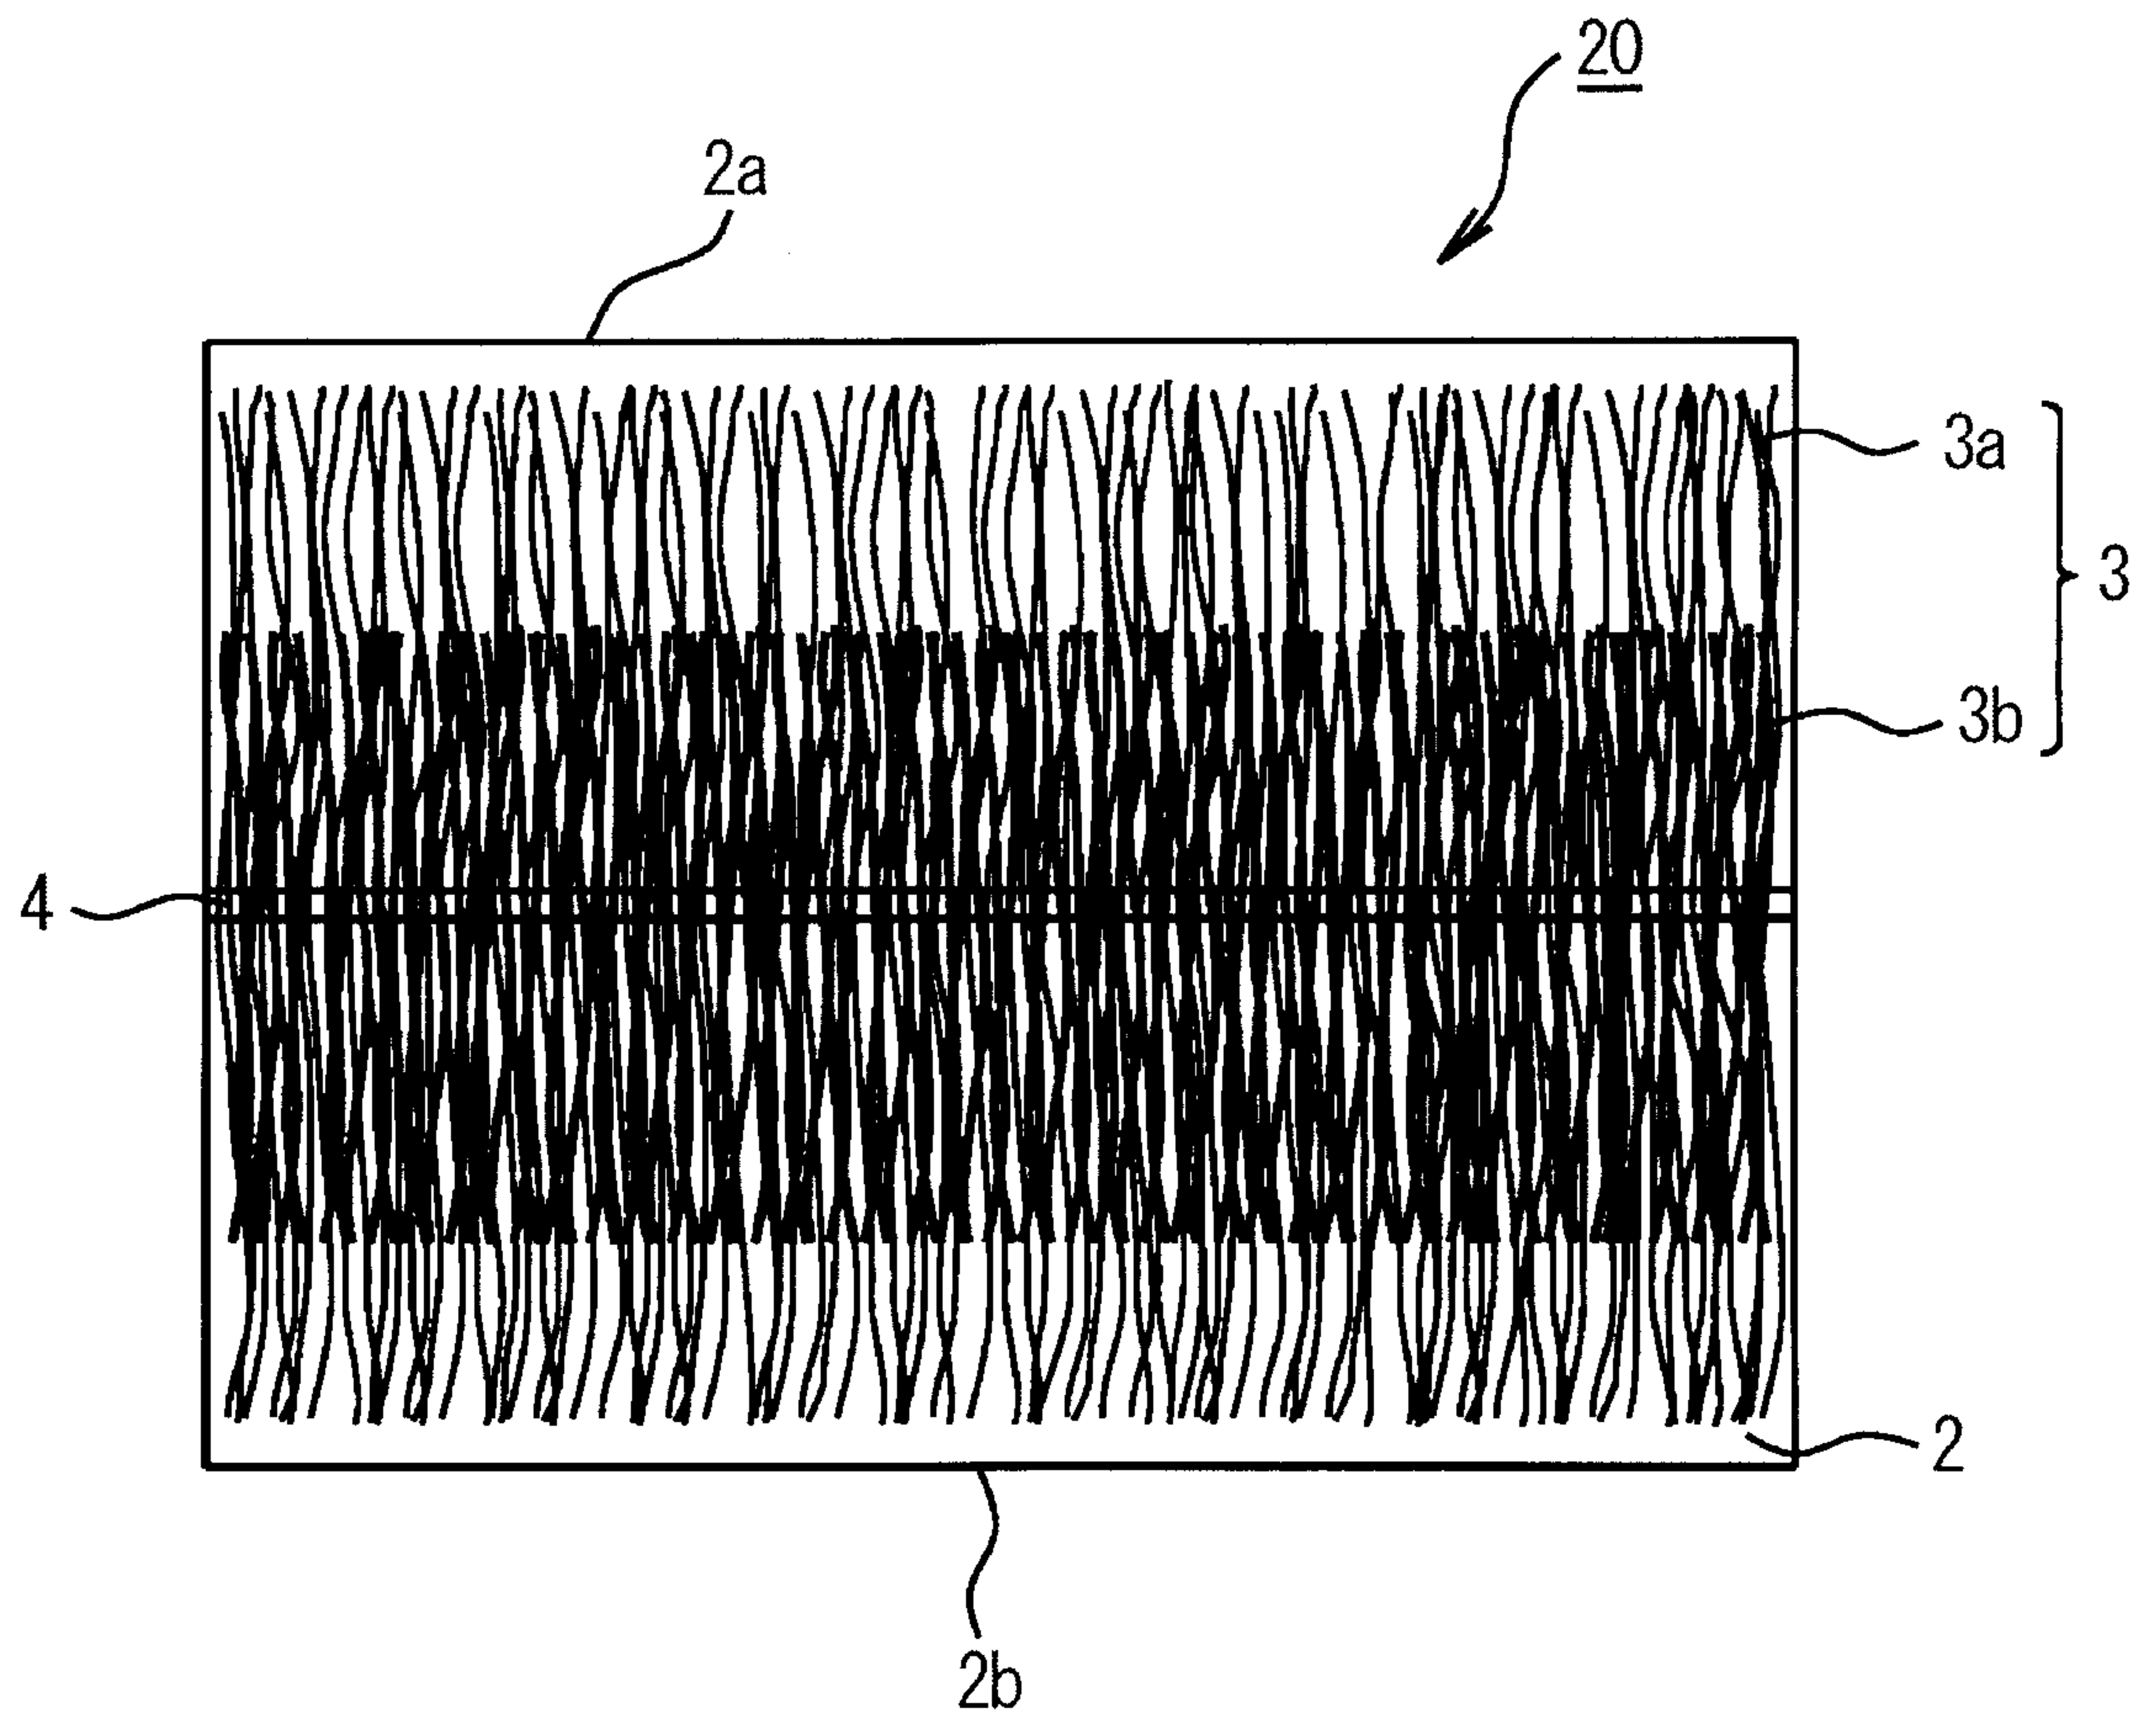


【FIG11】

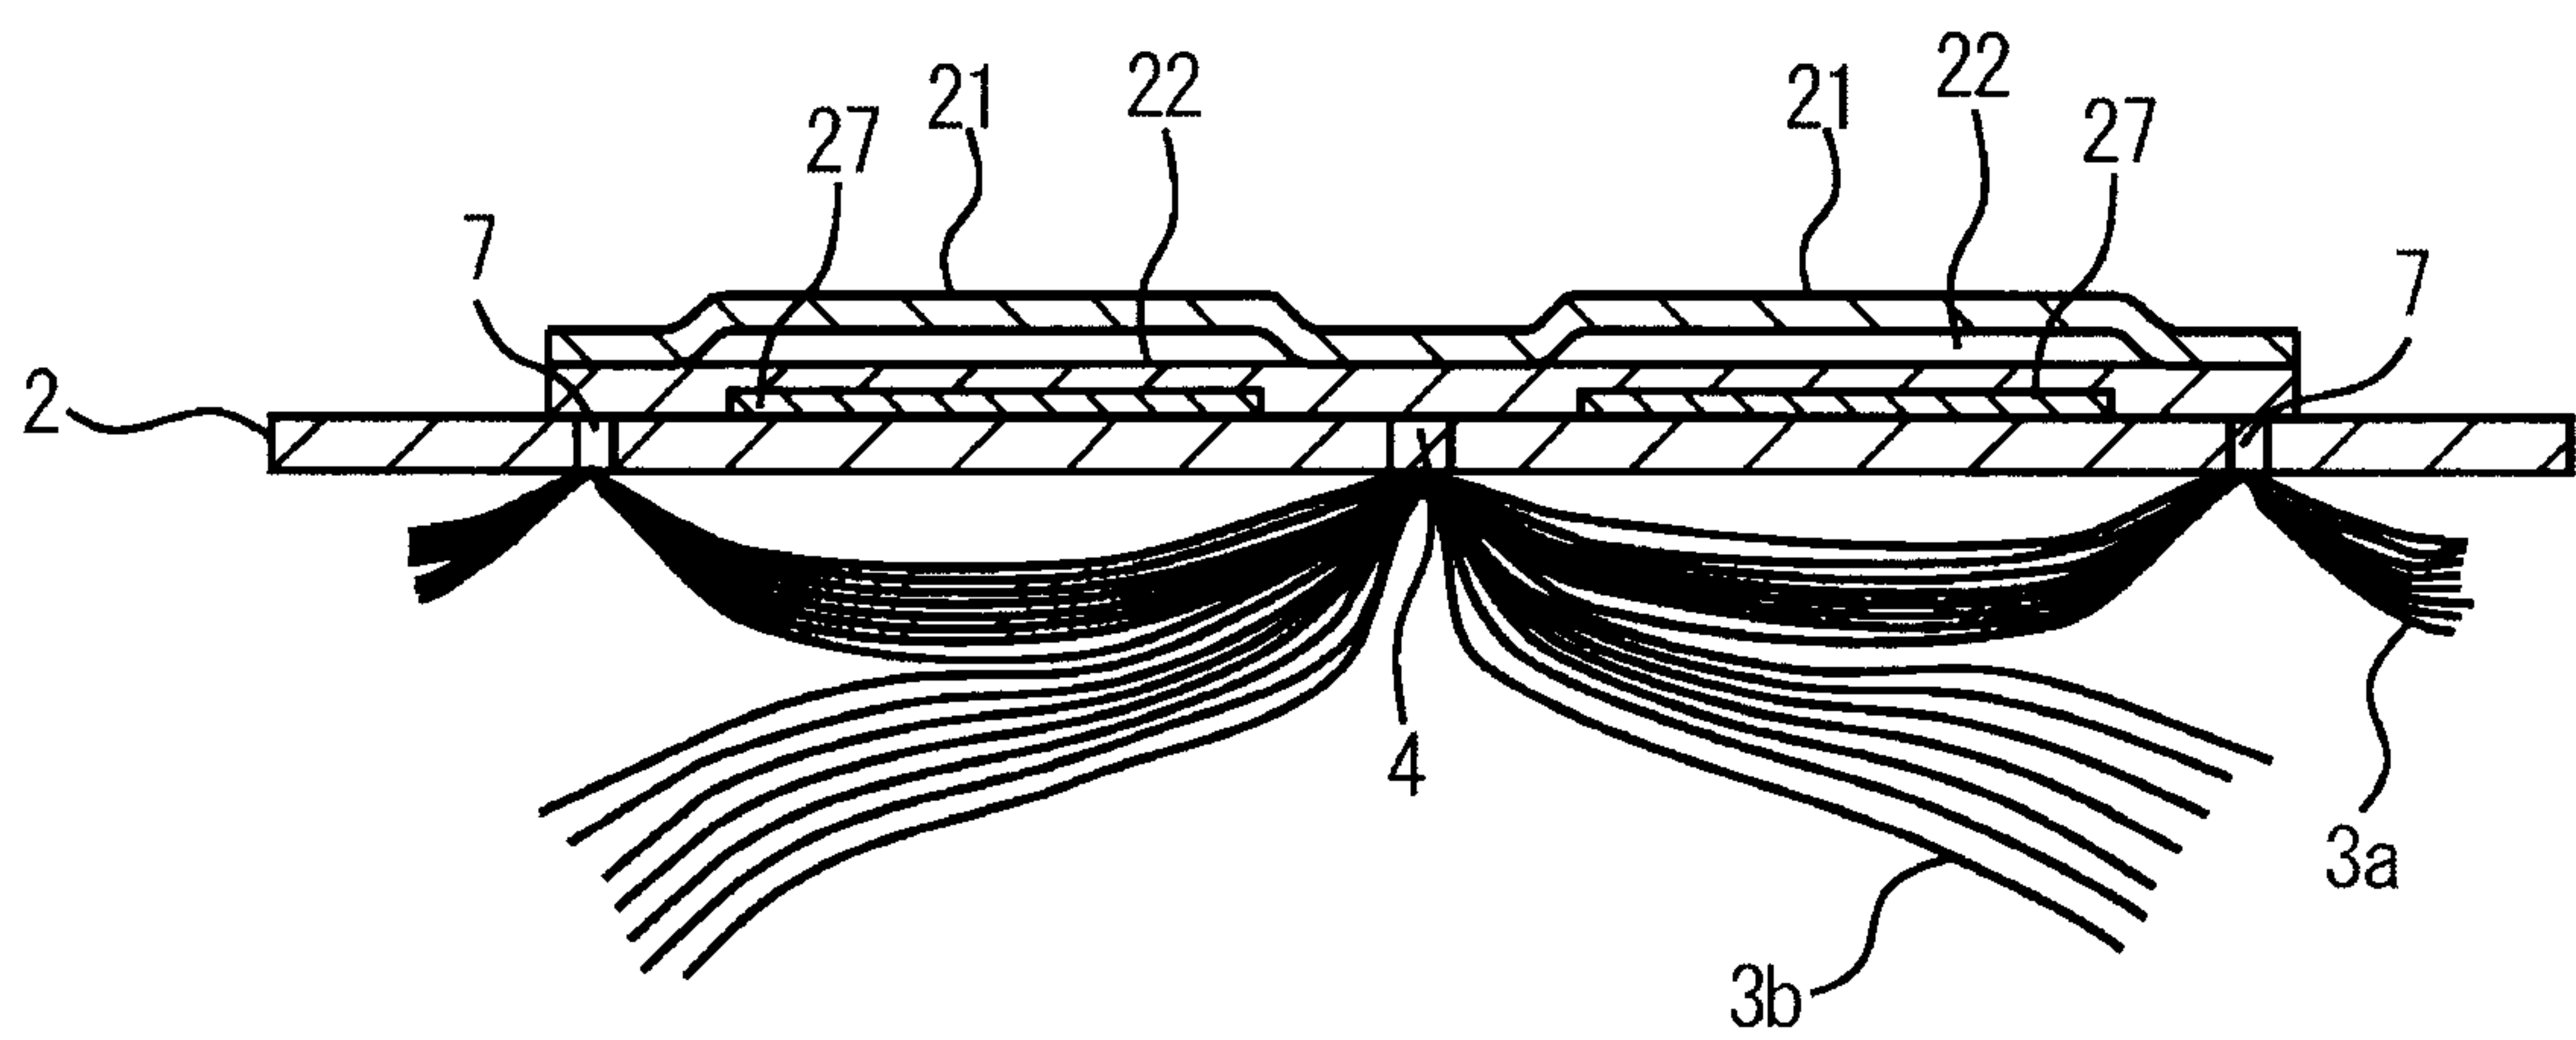


【FIG12】

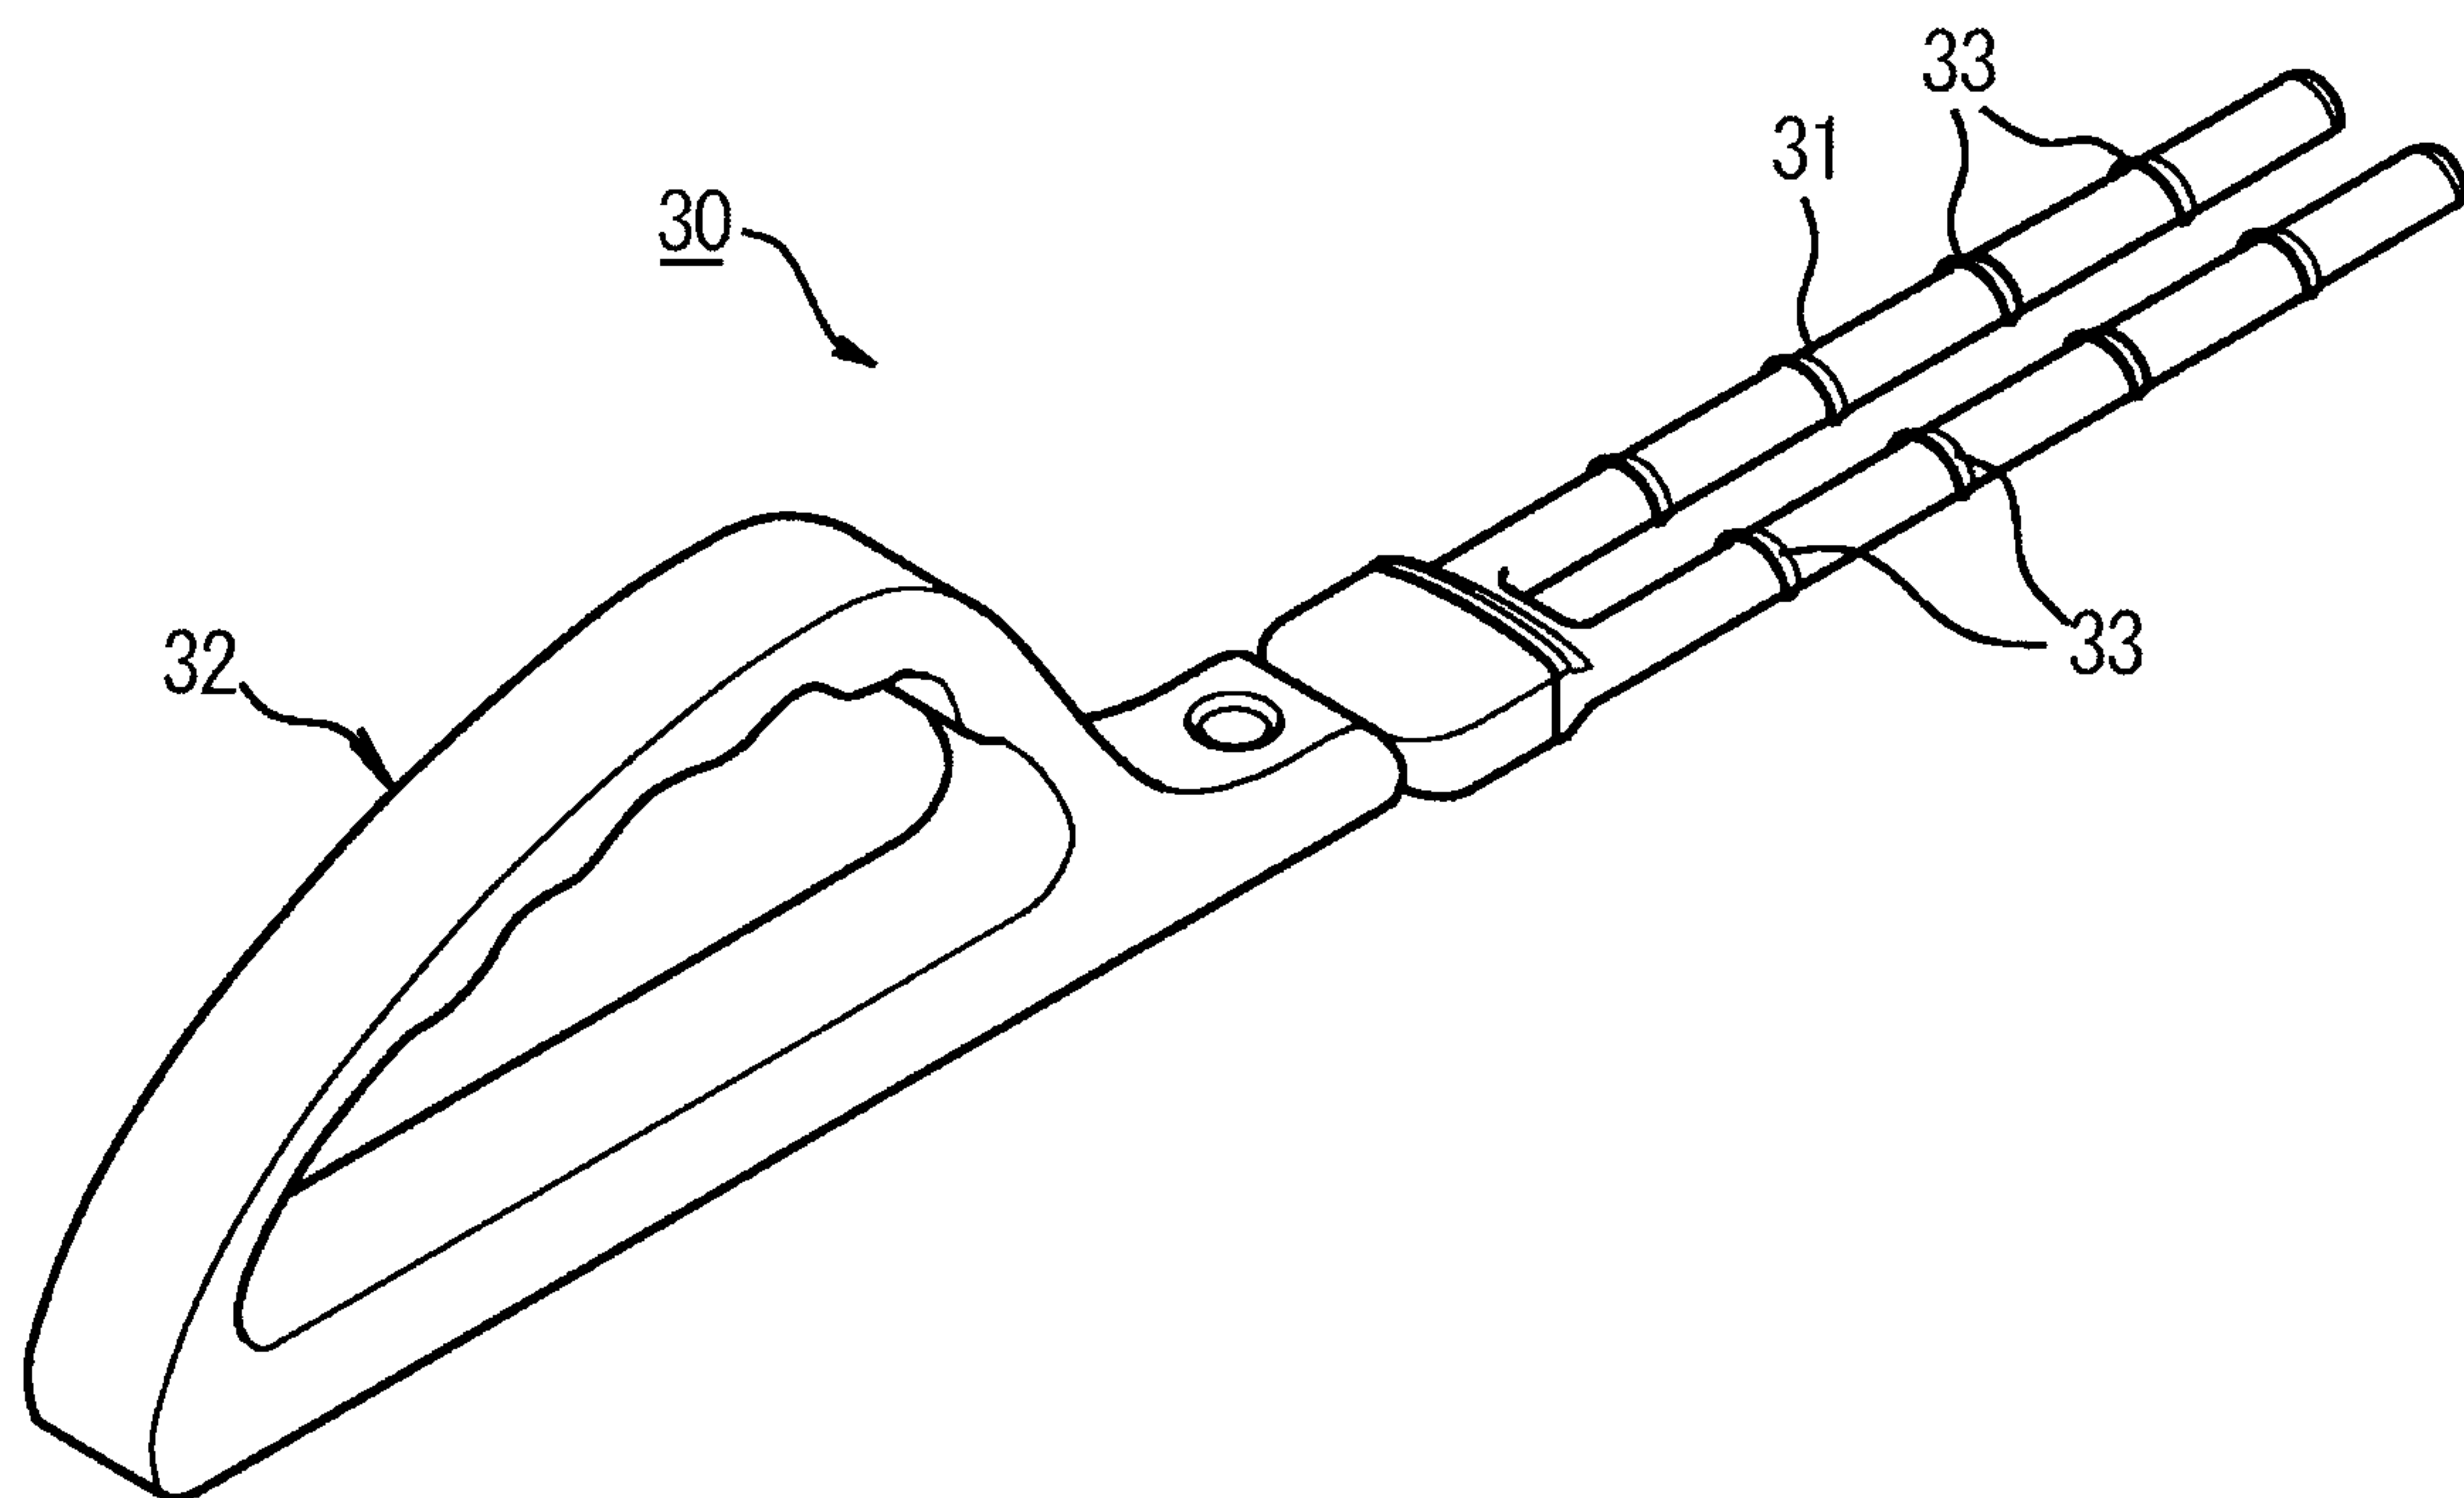


【FIG13】

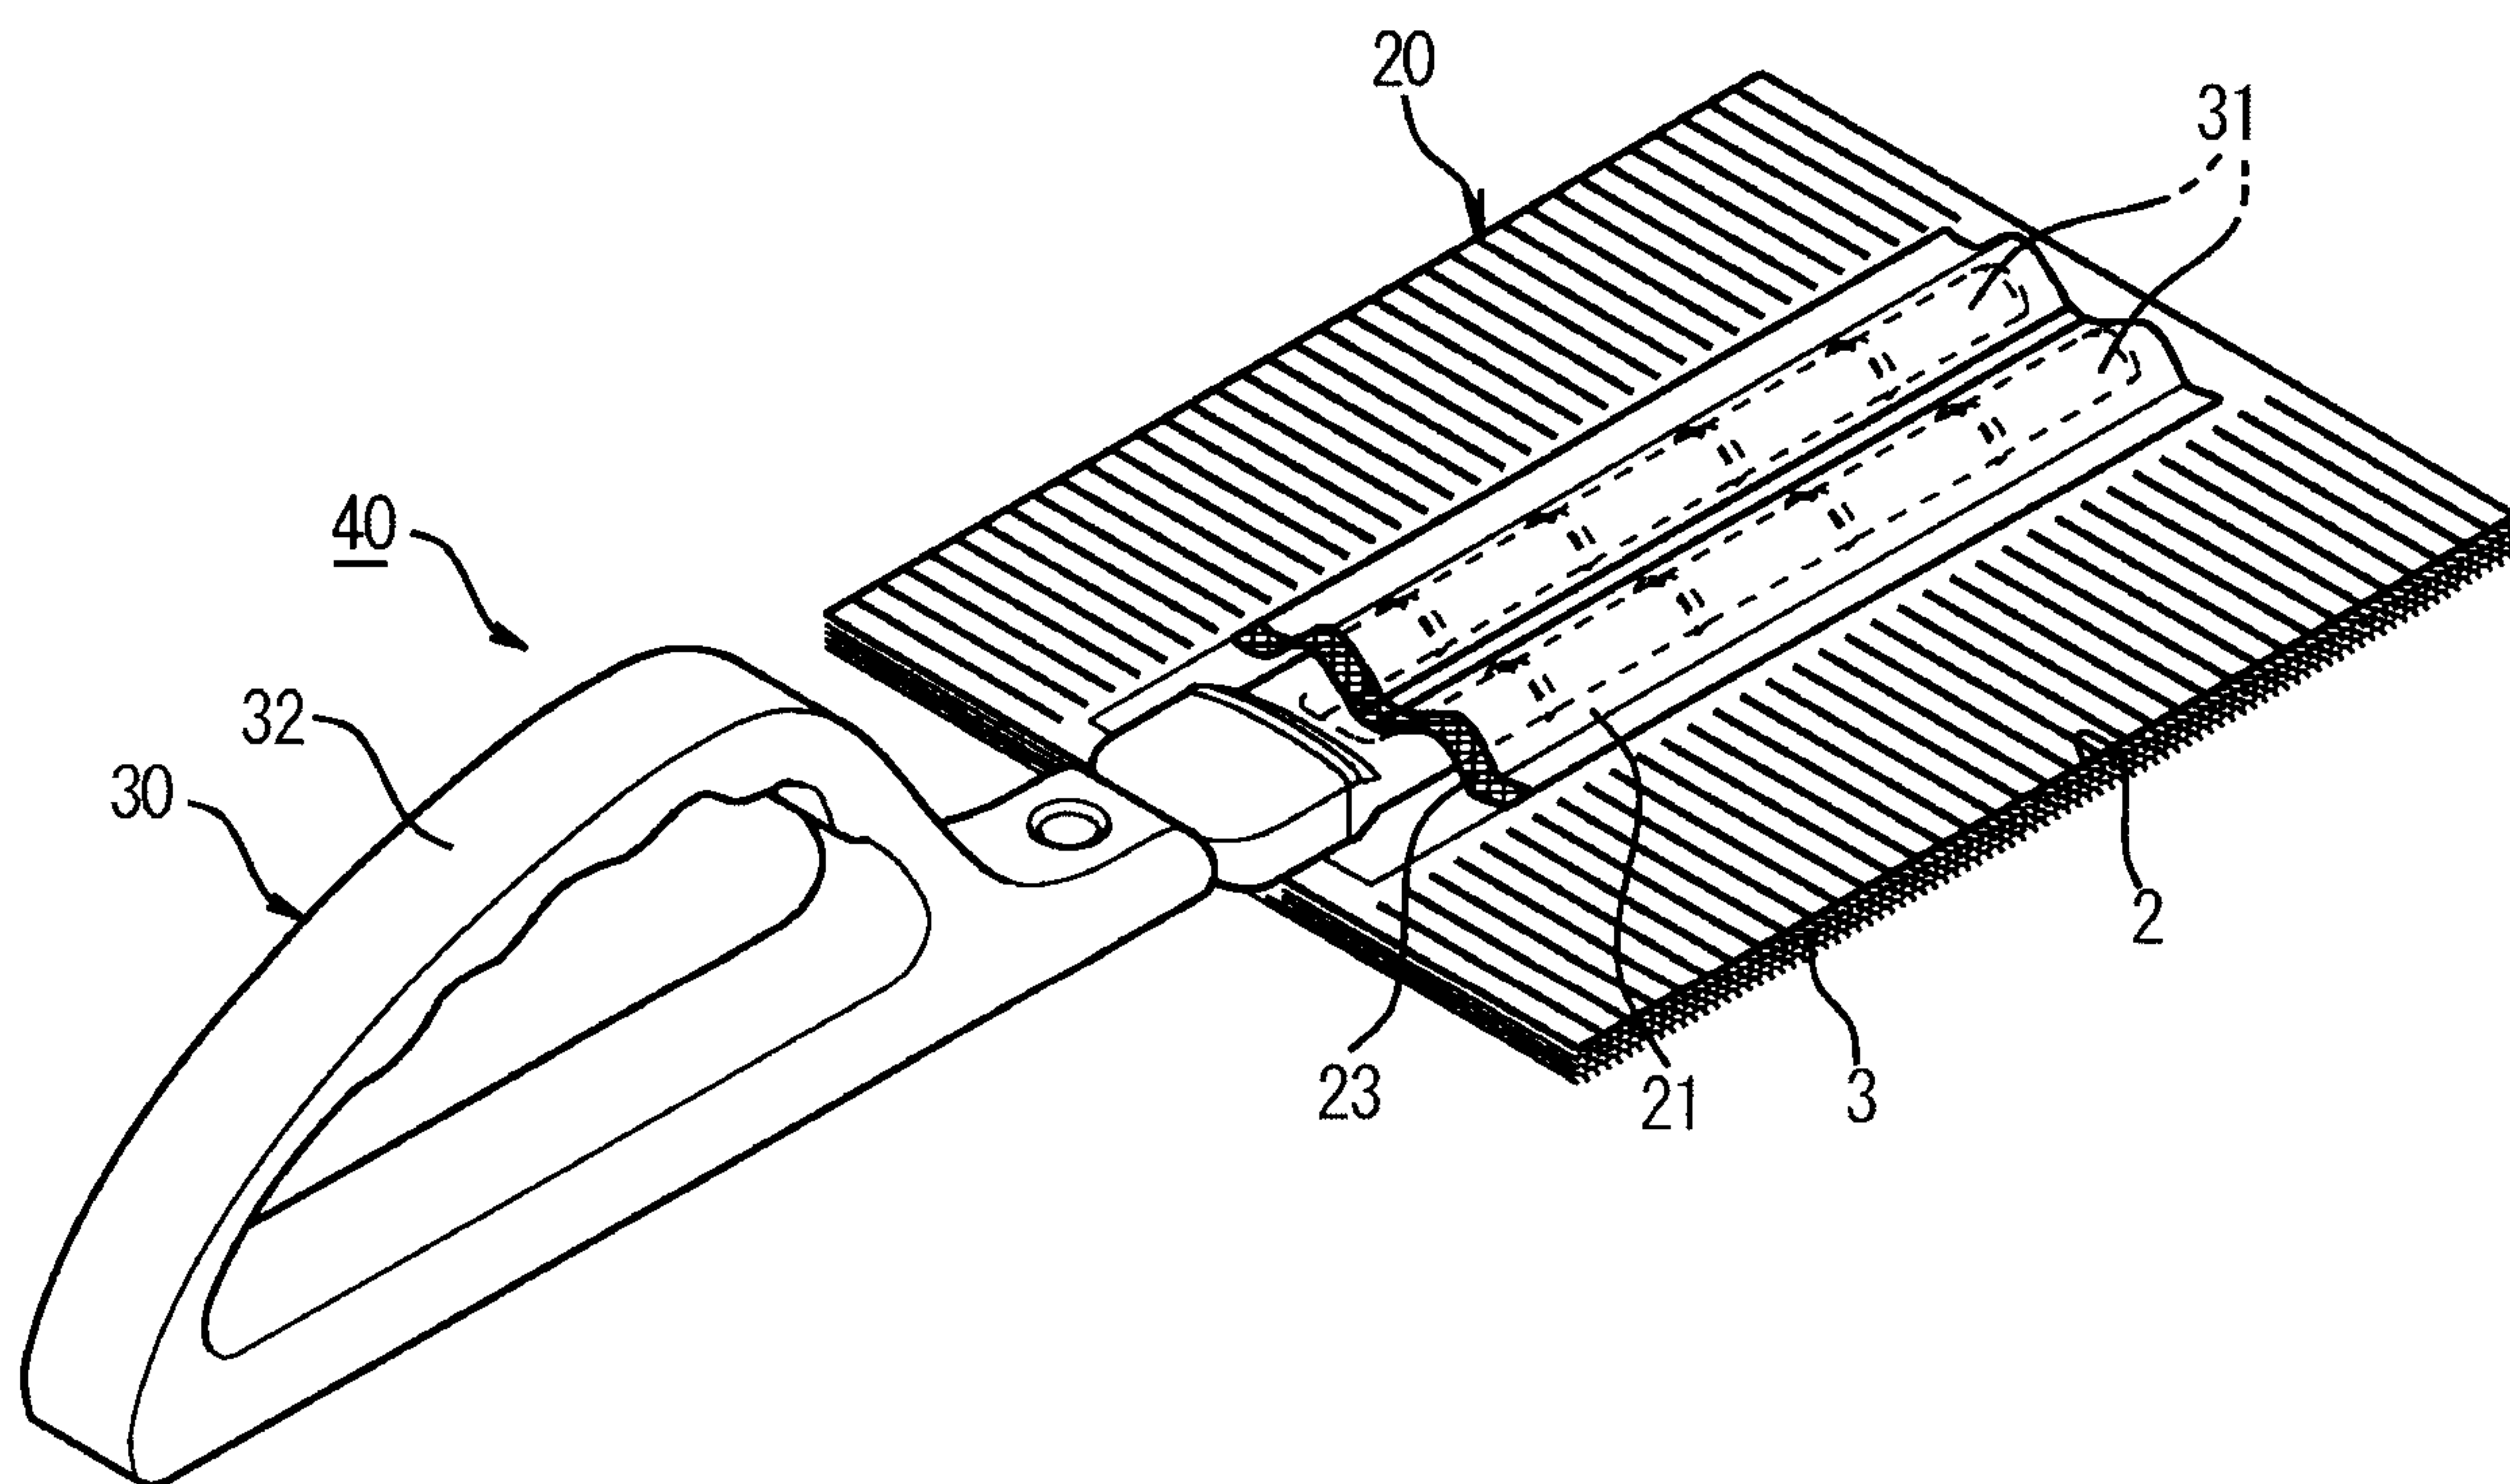


【FIG14】

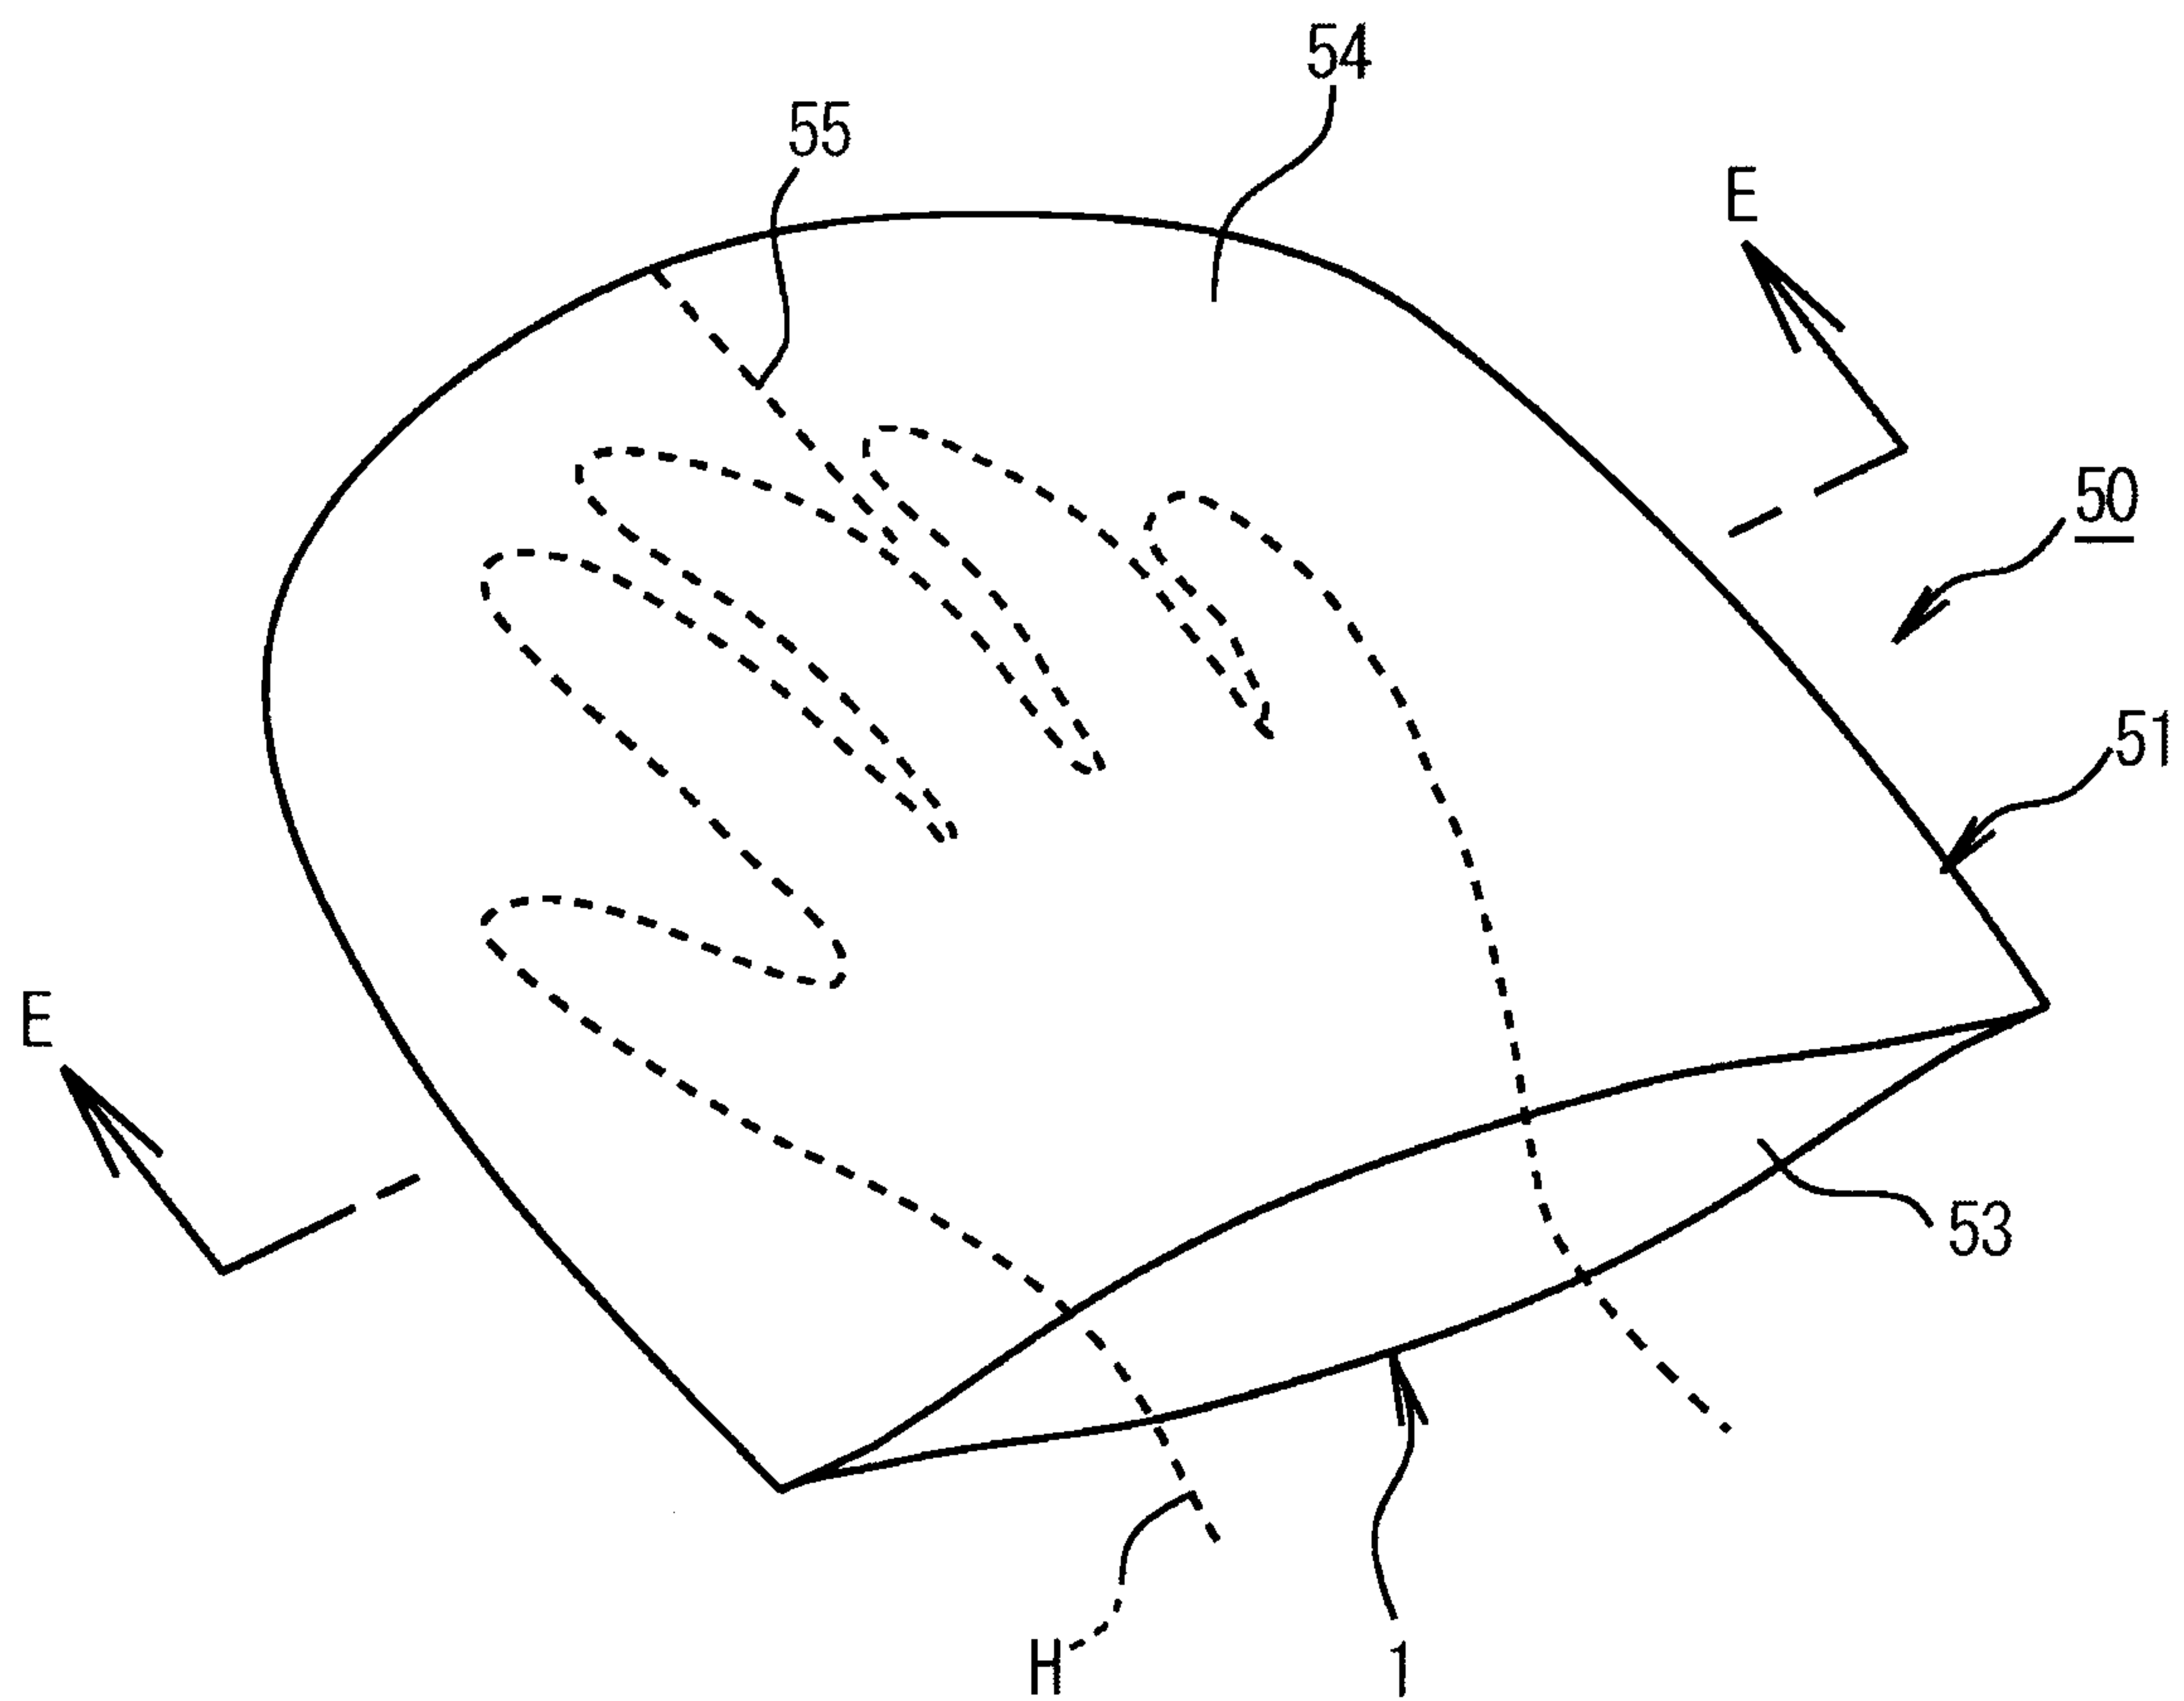


【FIG15】

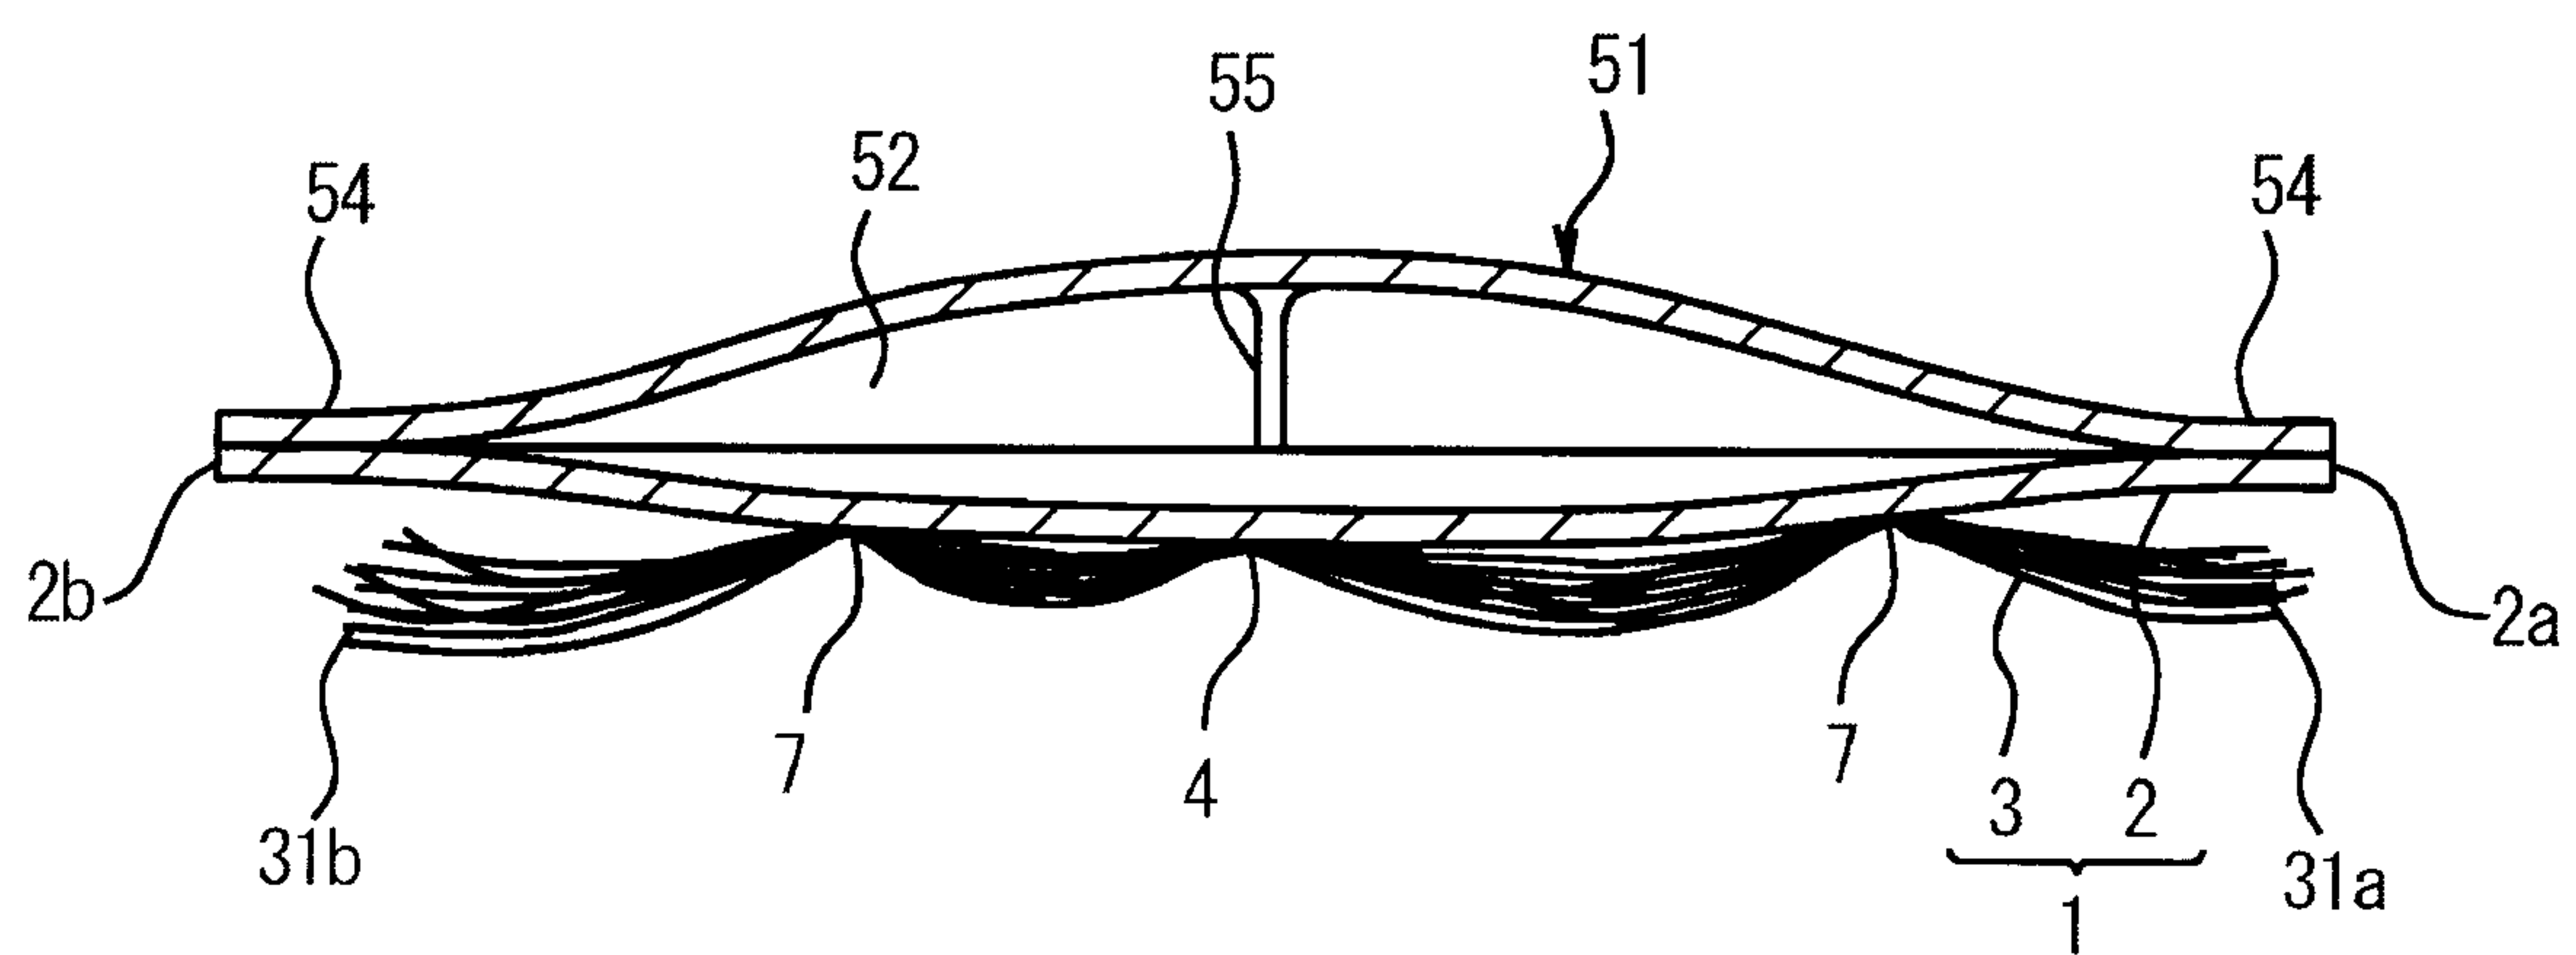


【FIG16】

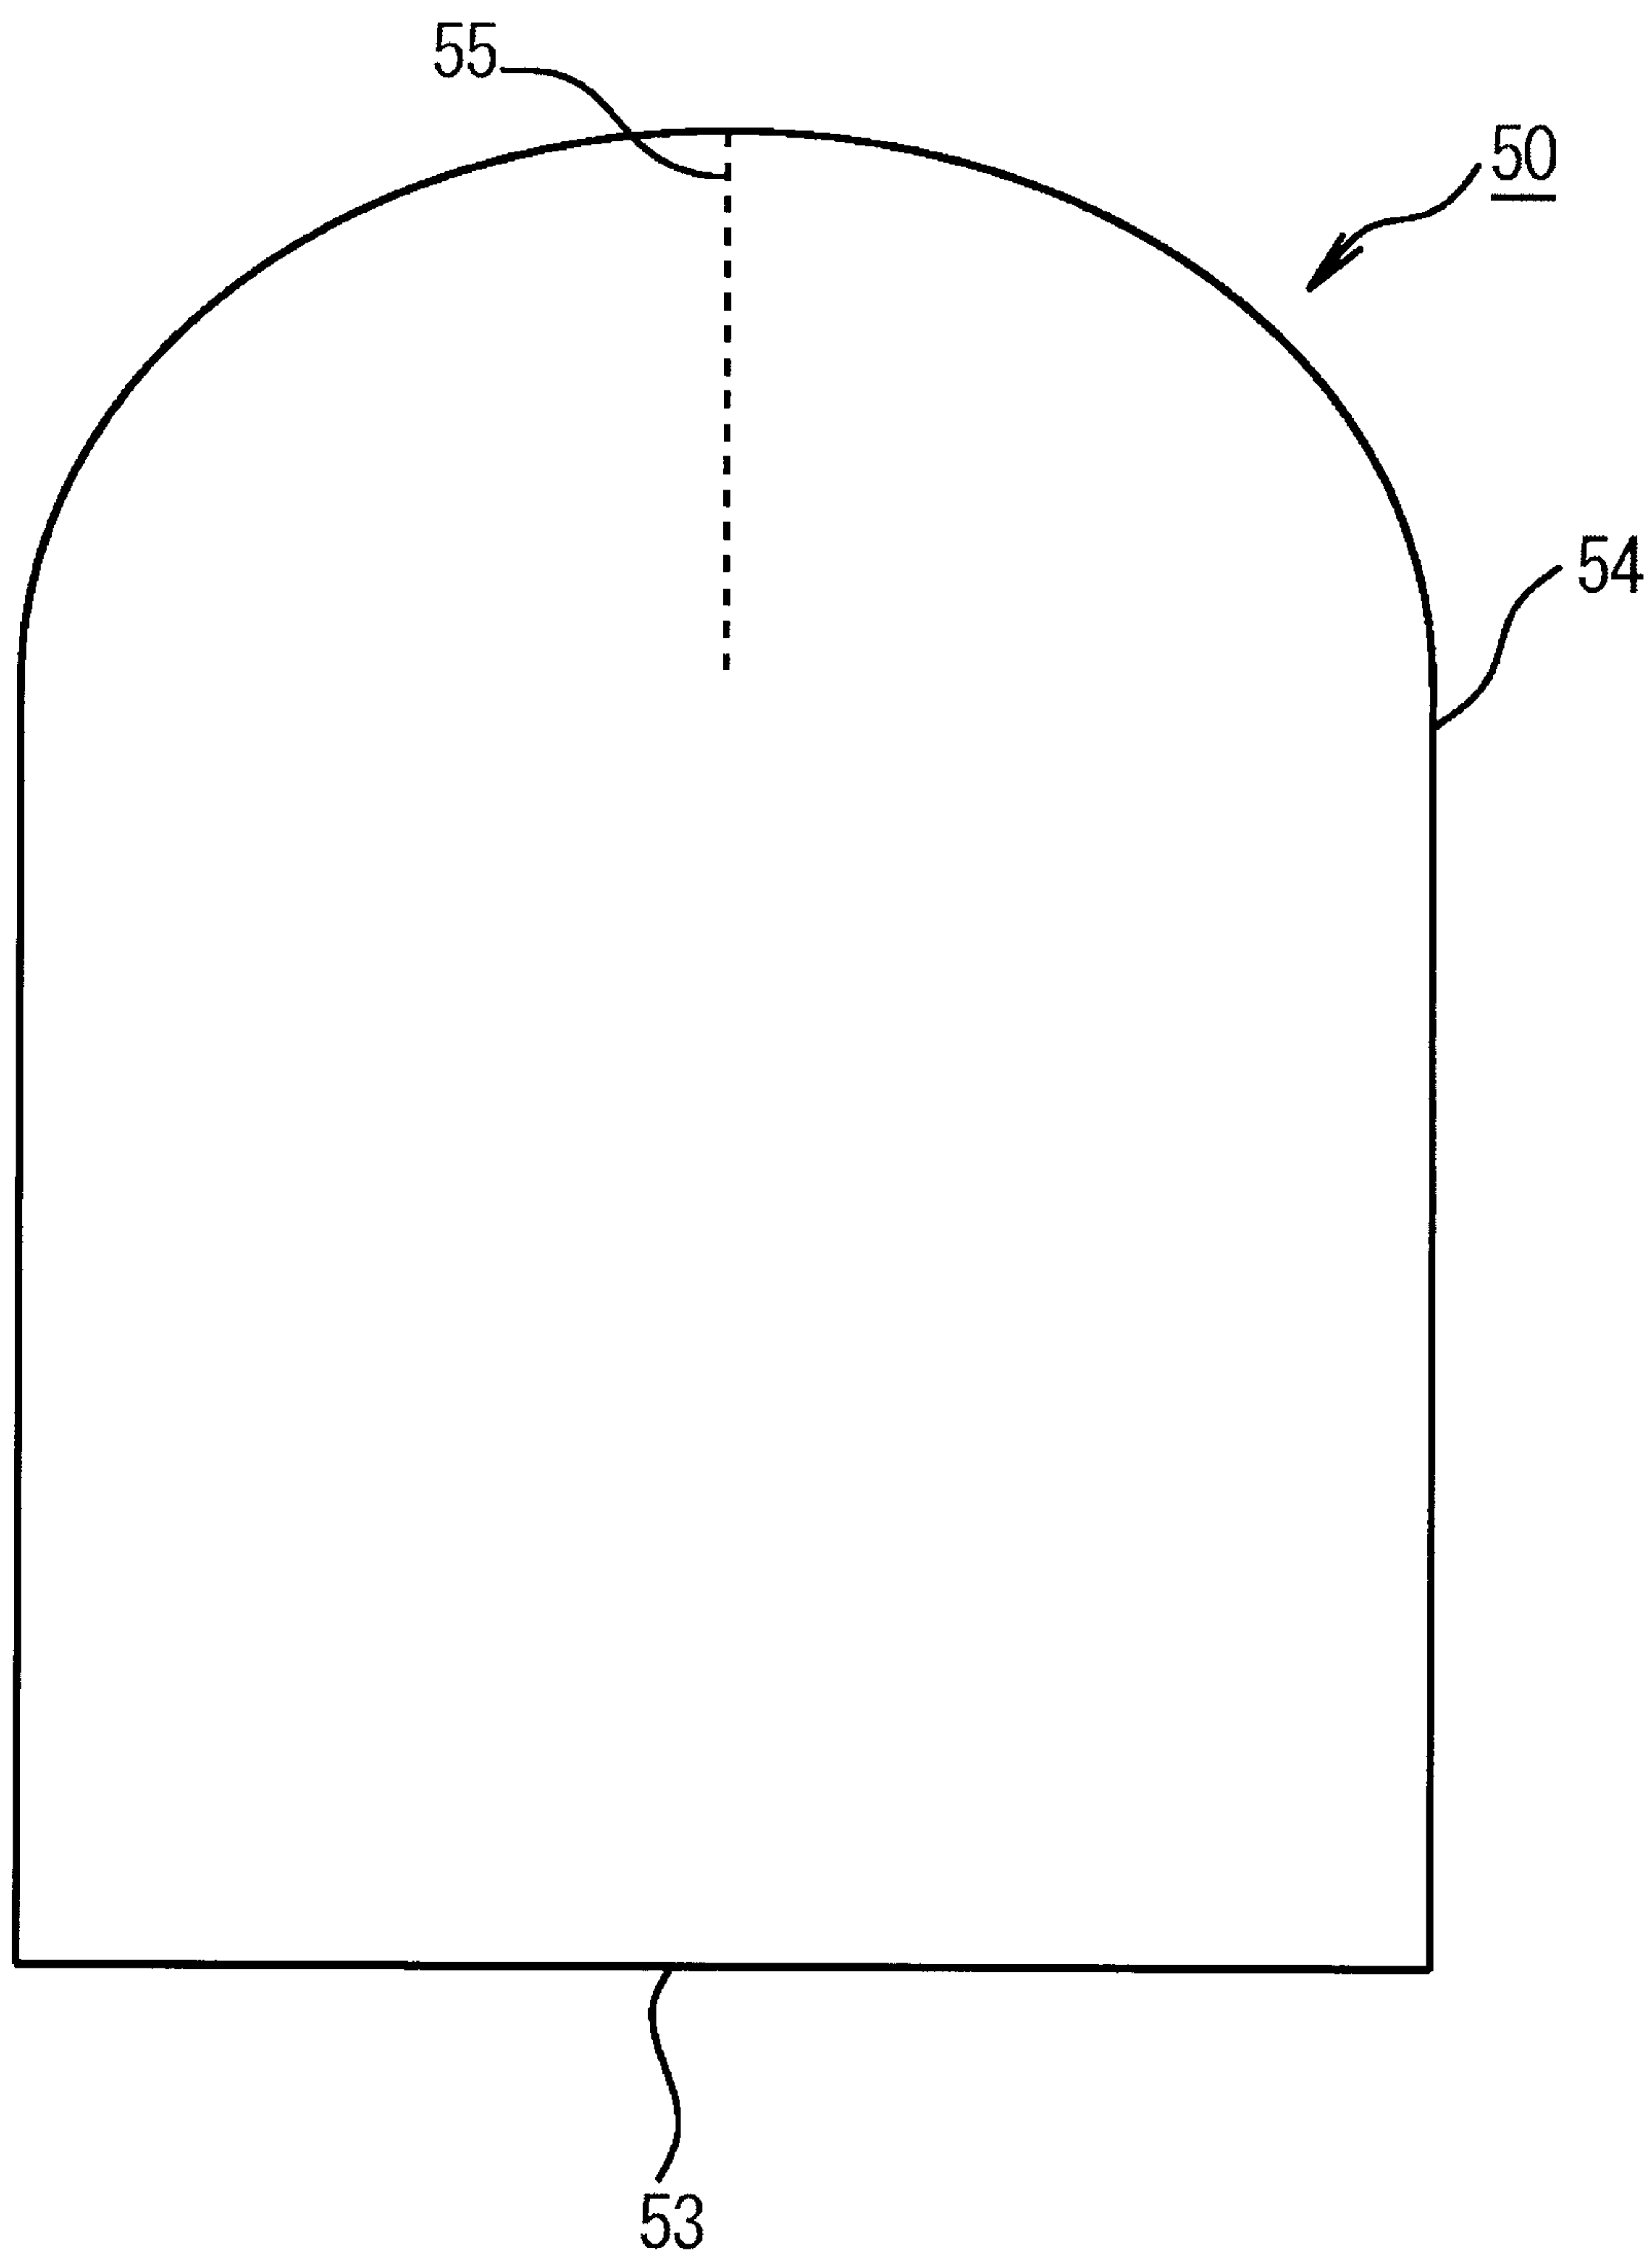


【FIG17】

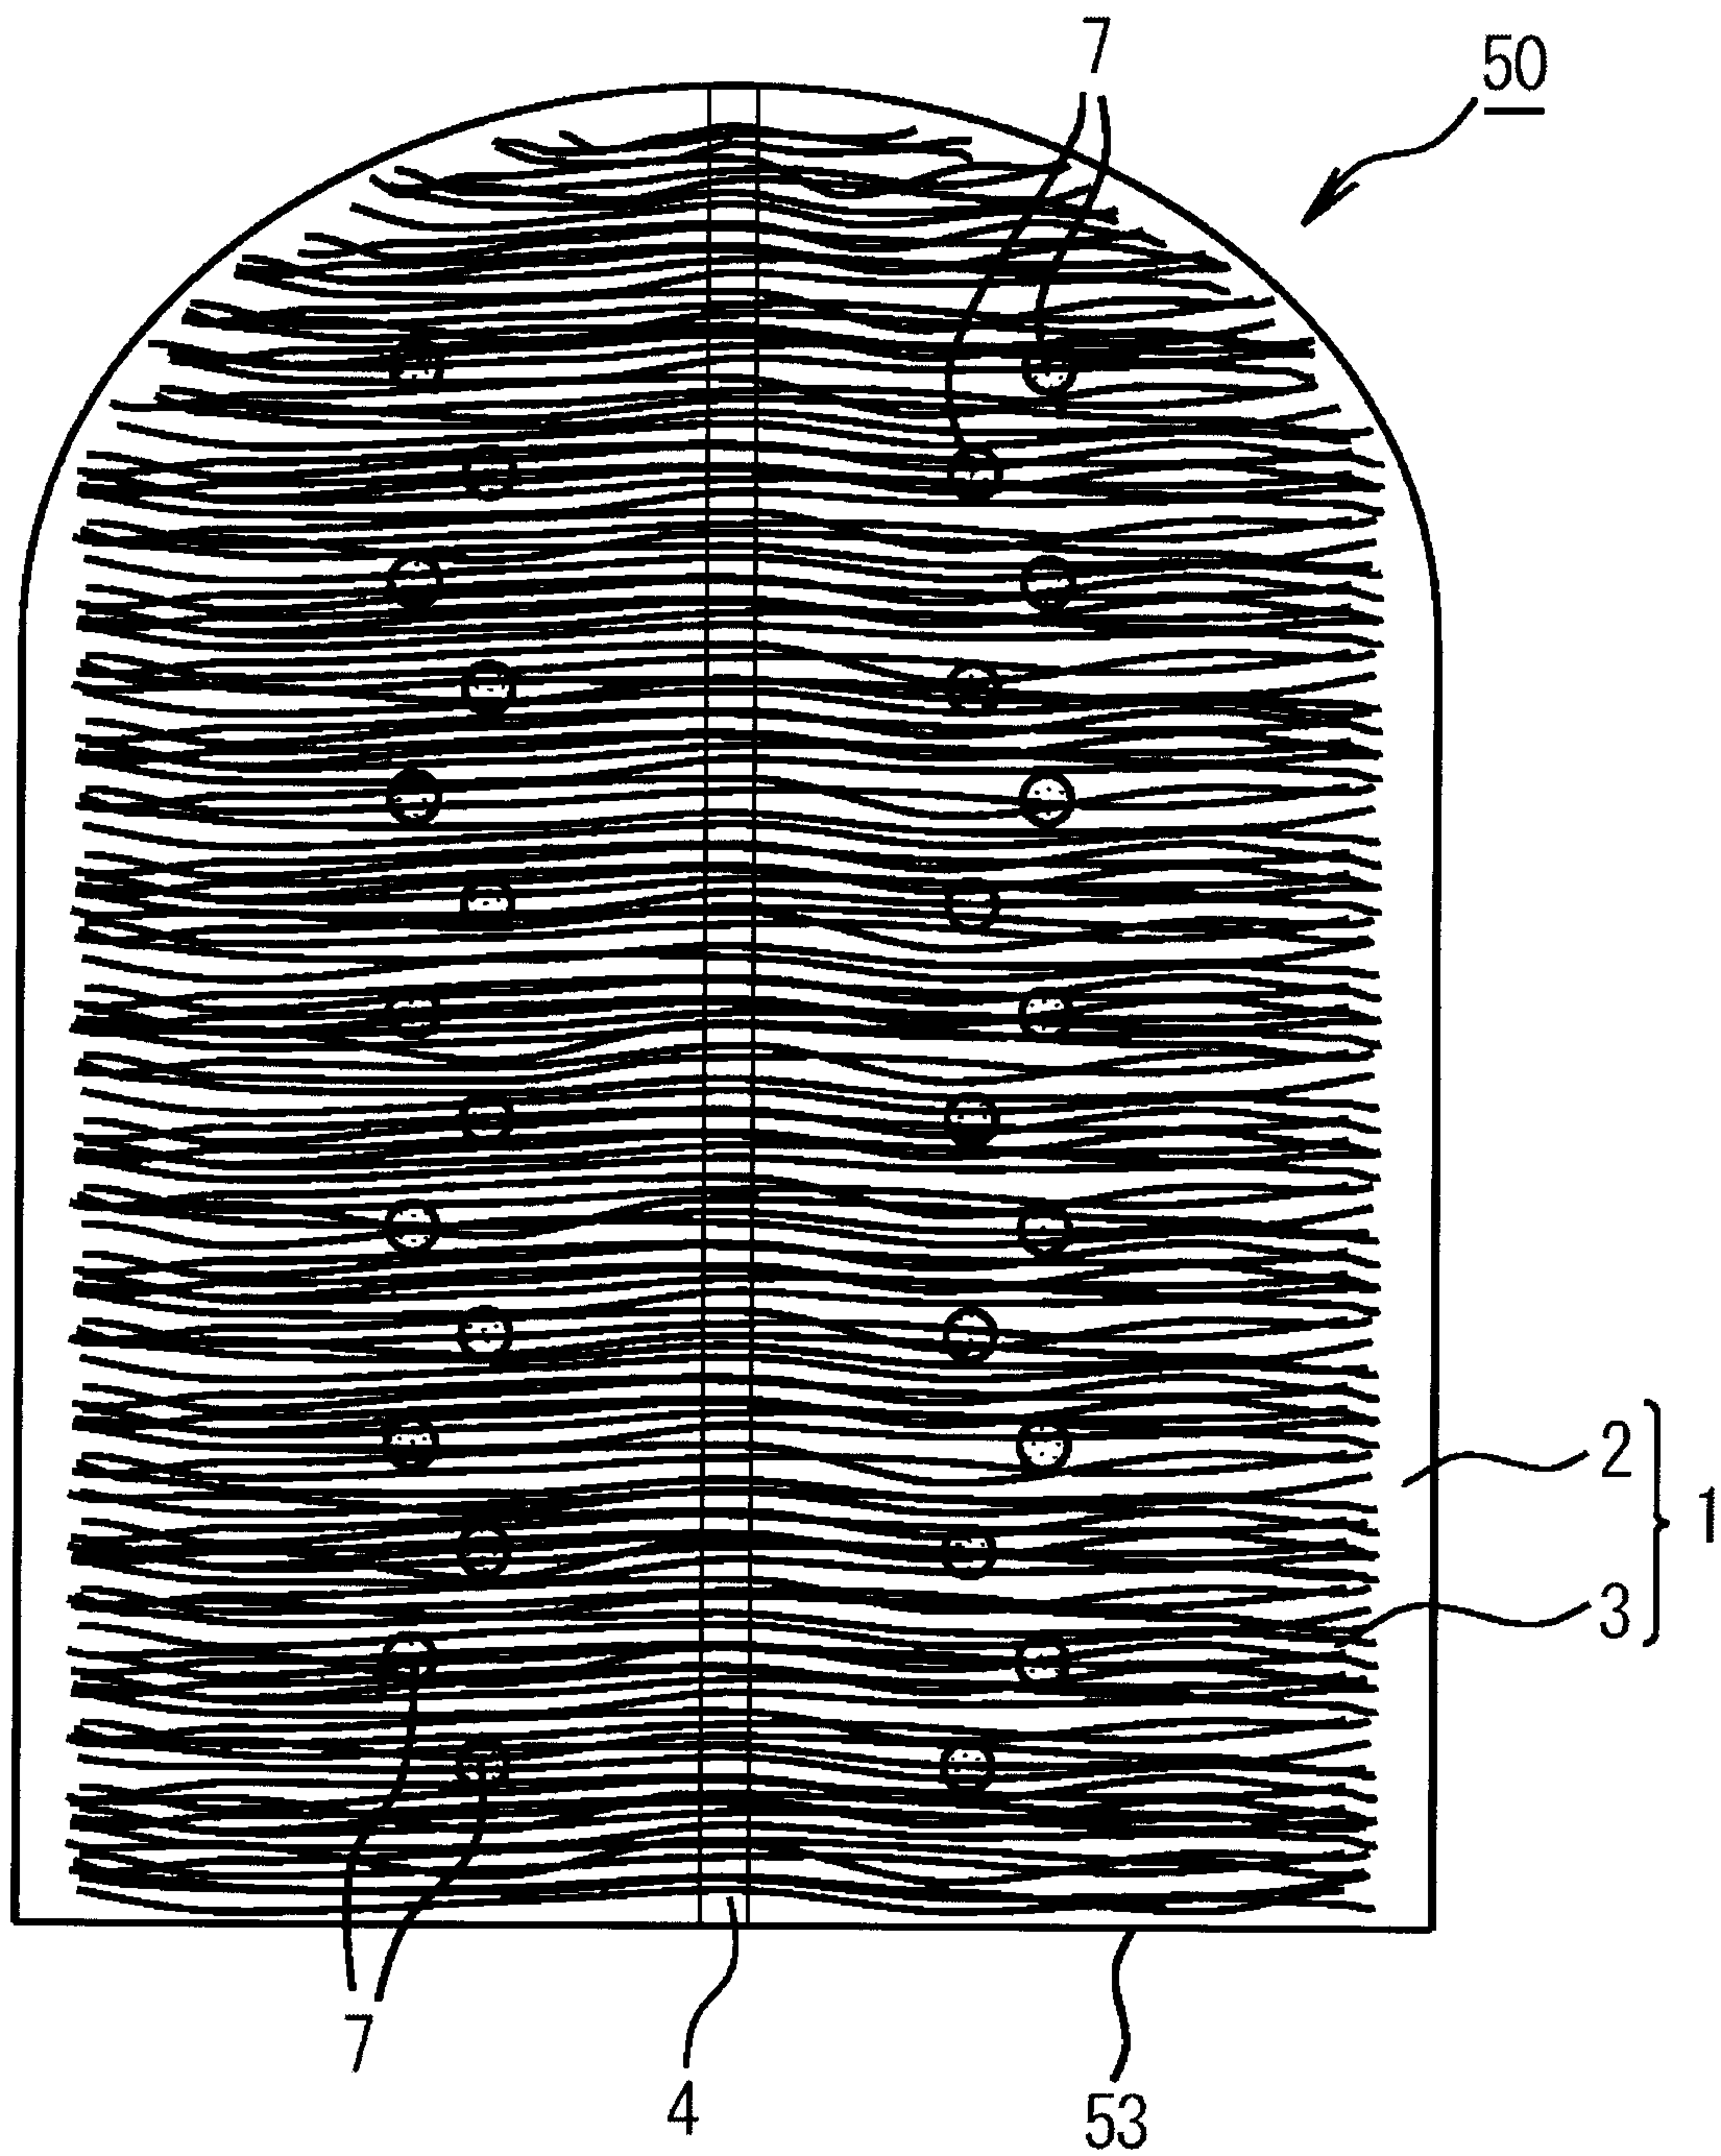


【FIG18】

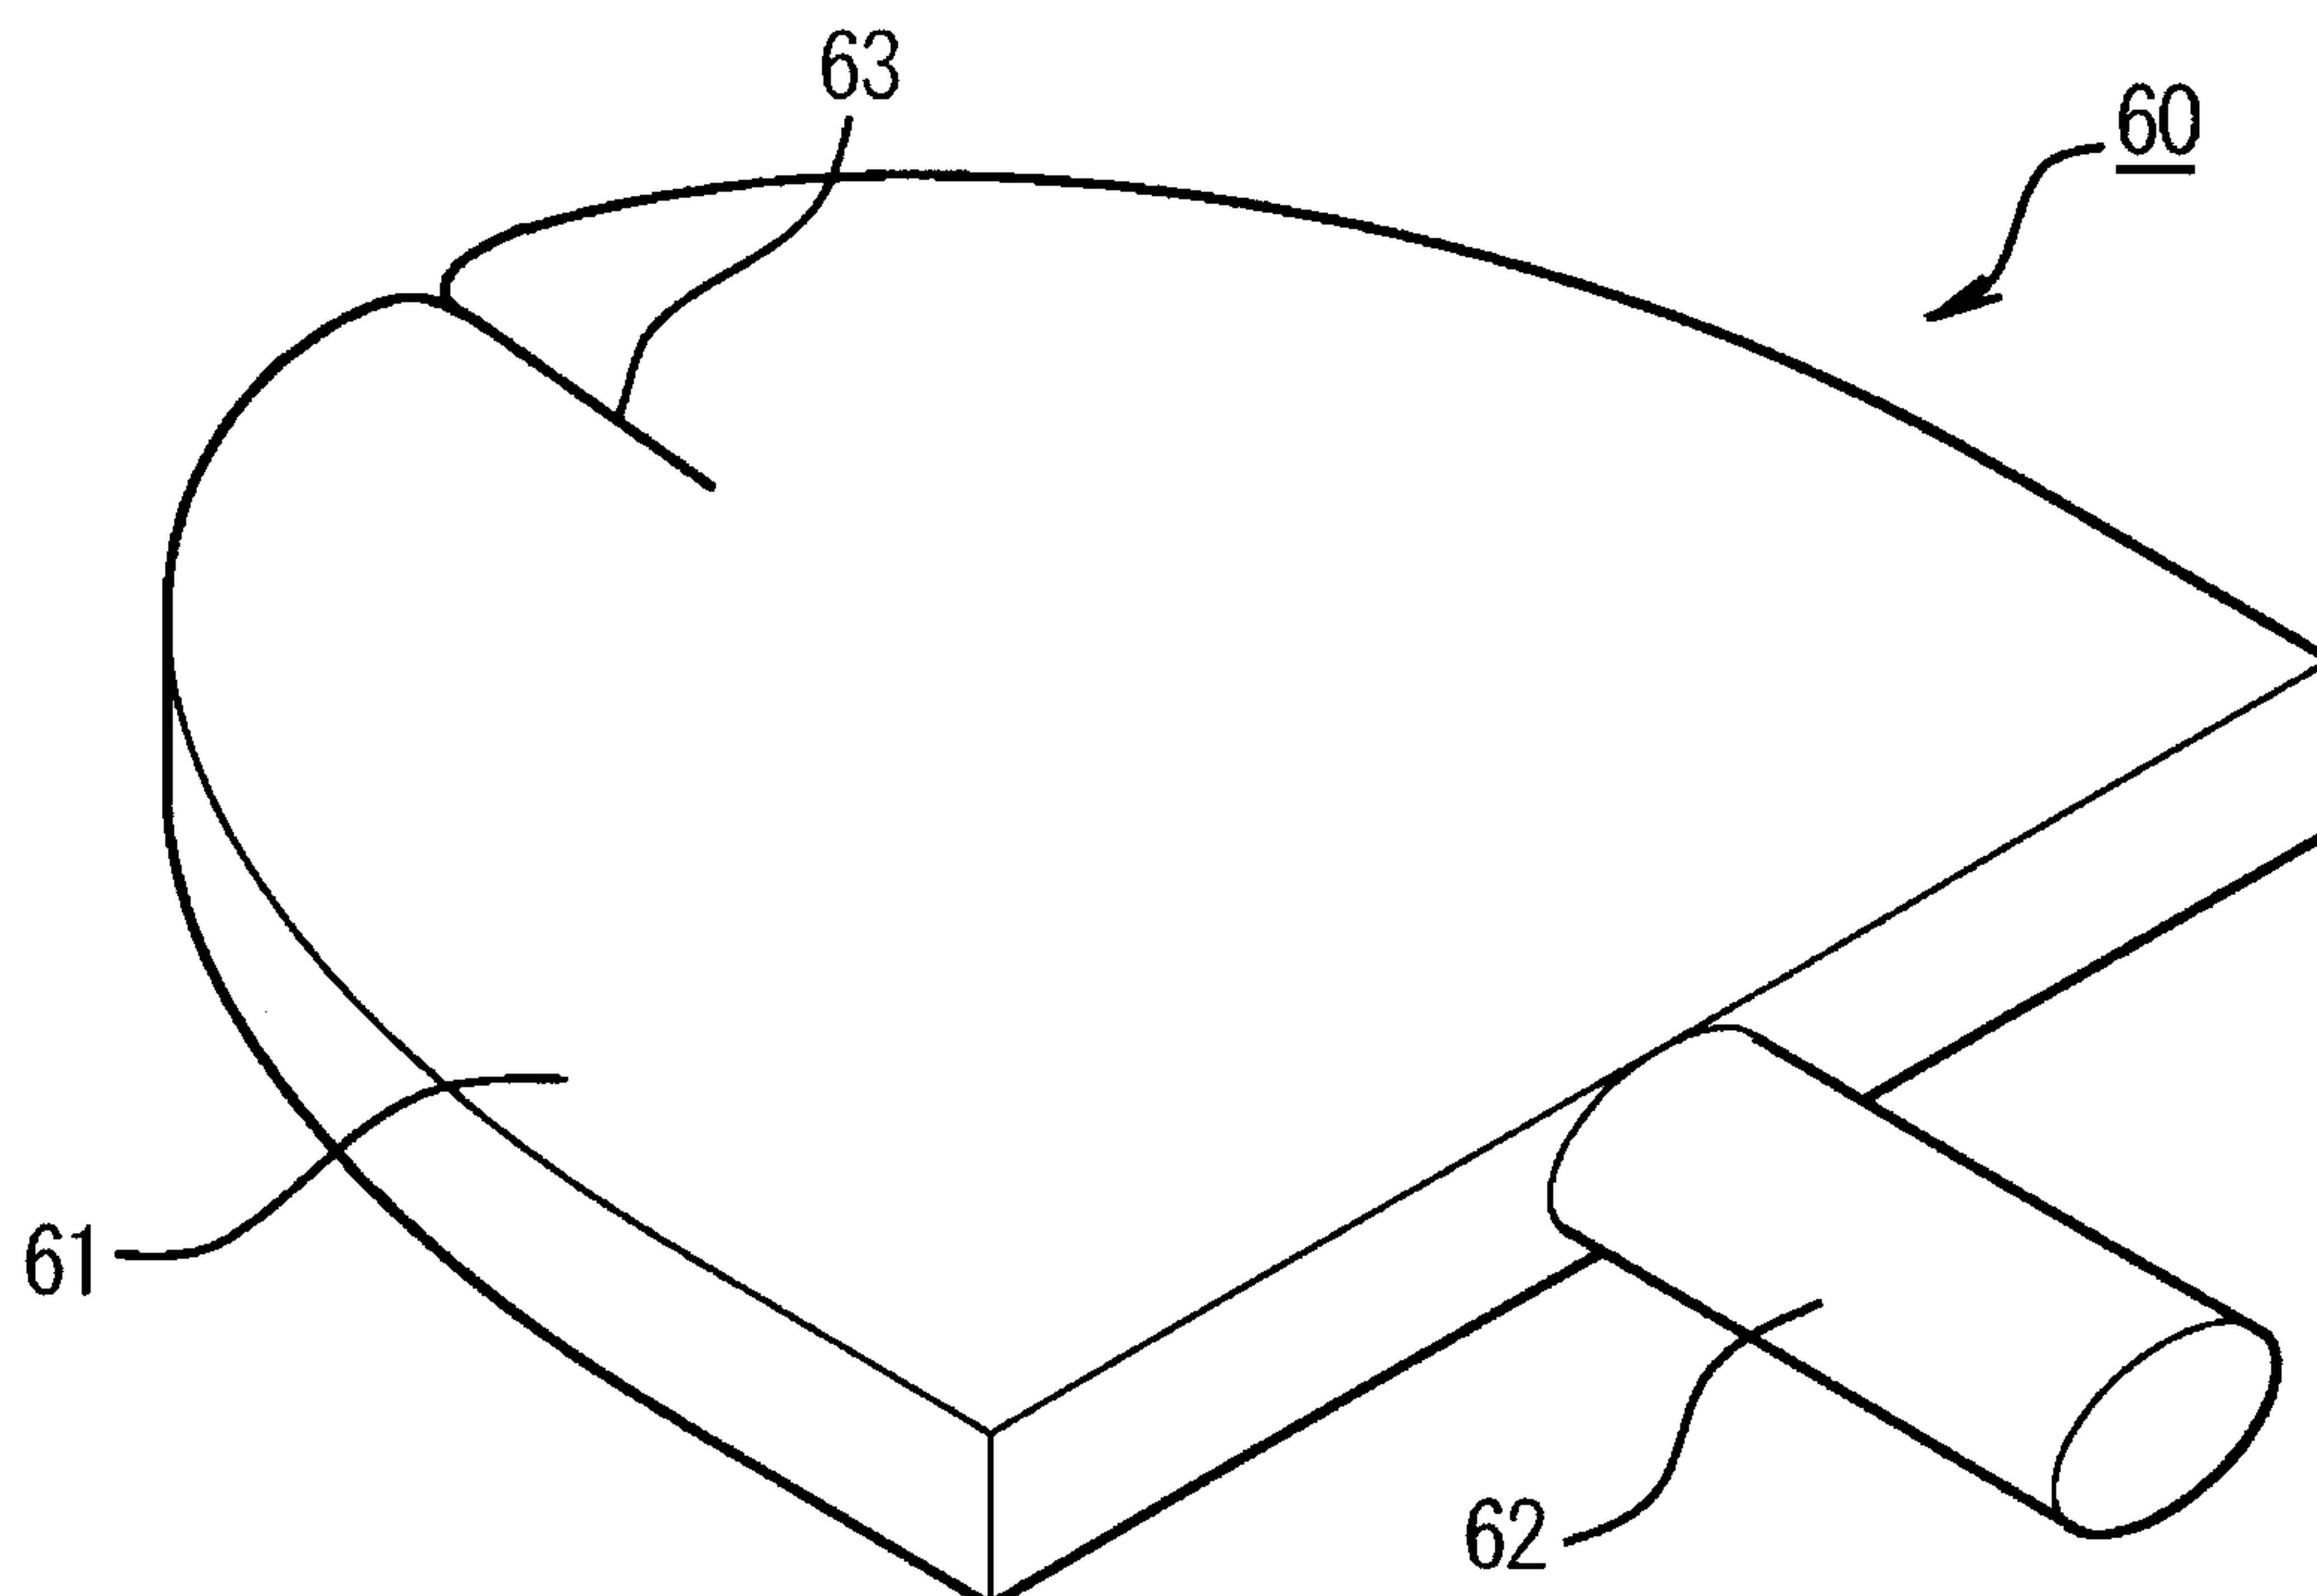

【FIG19】

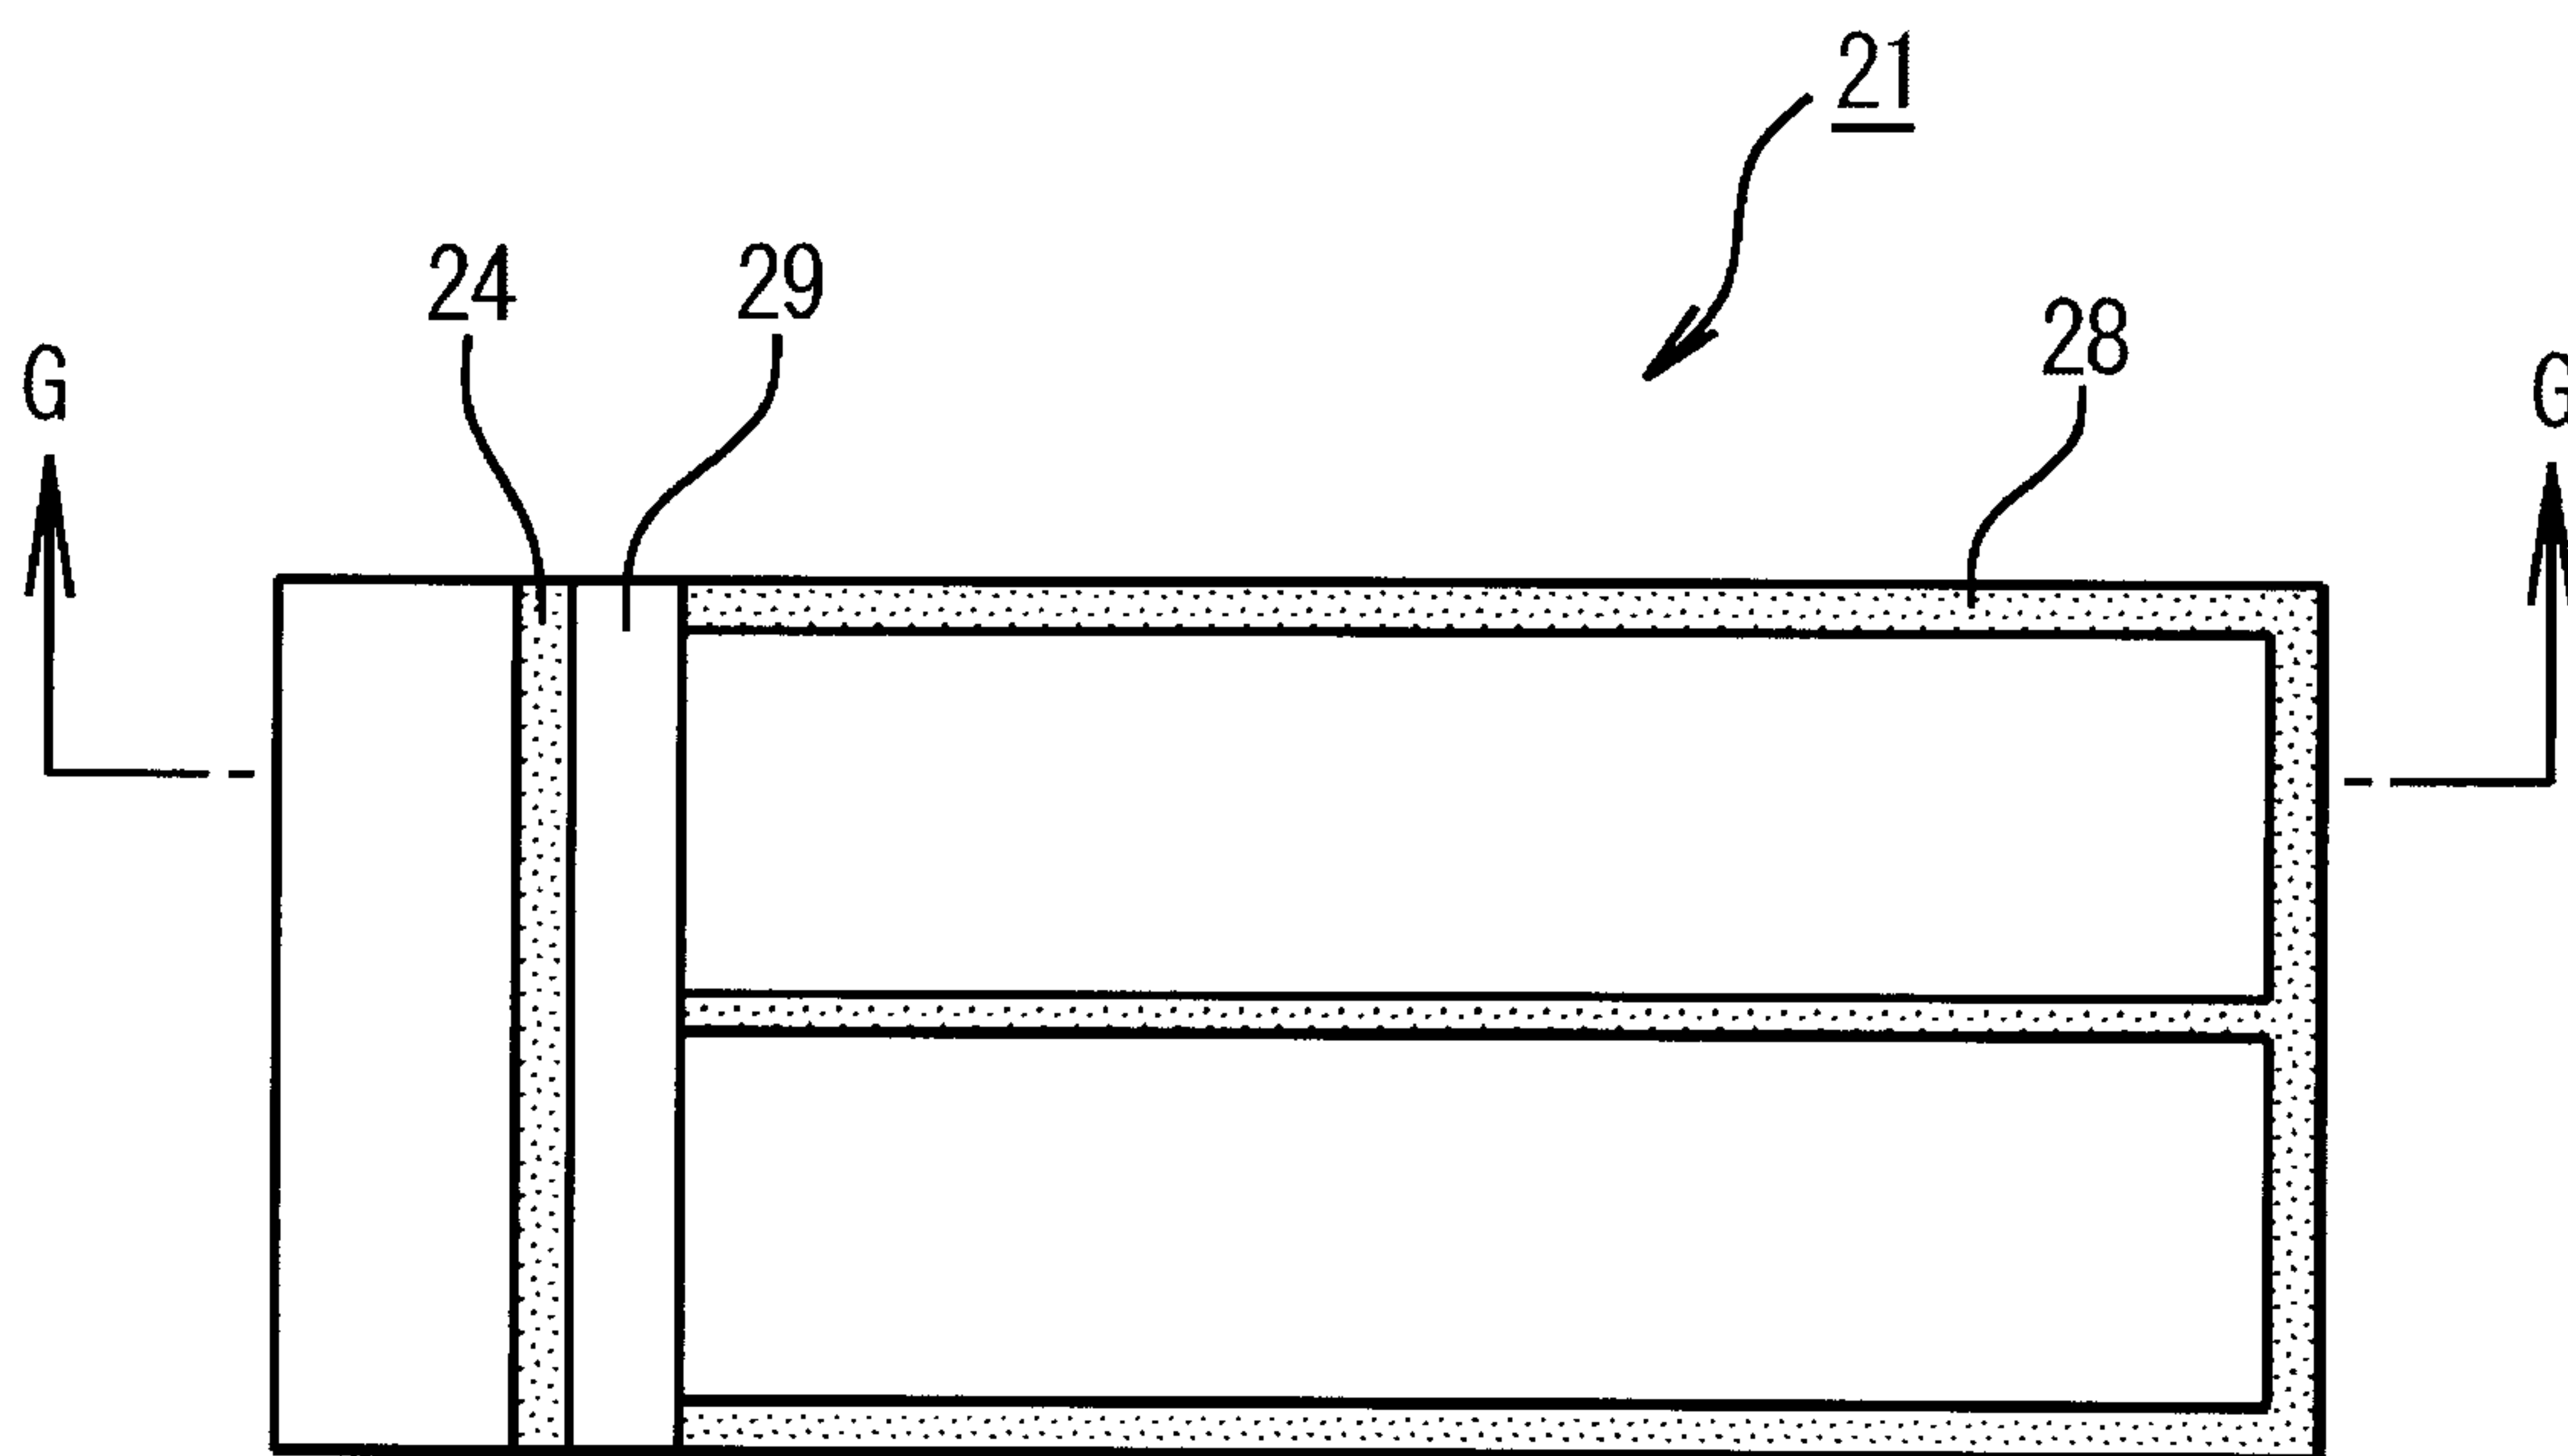

【FIG20】

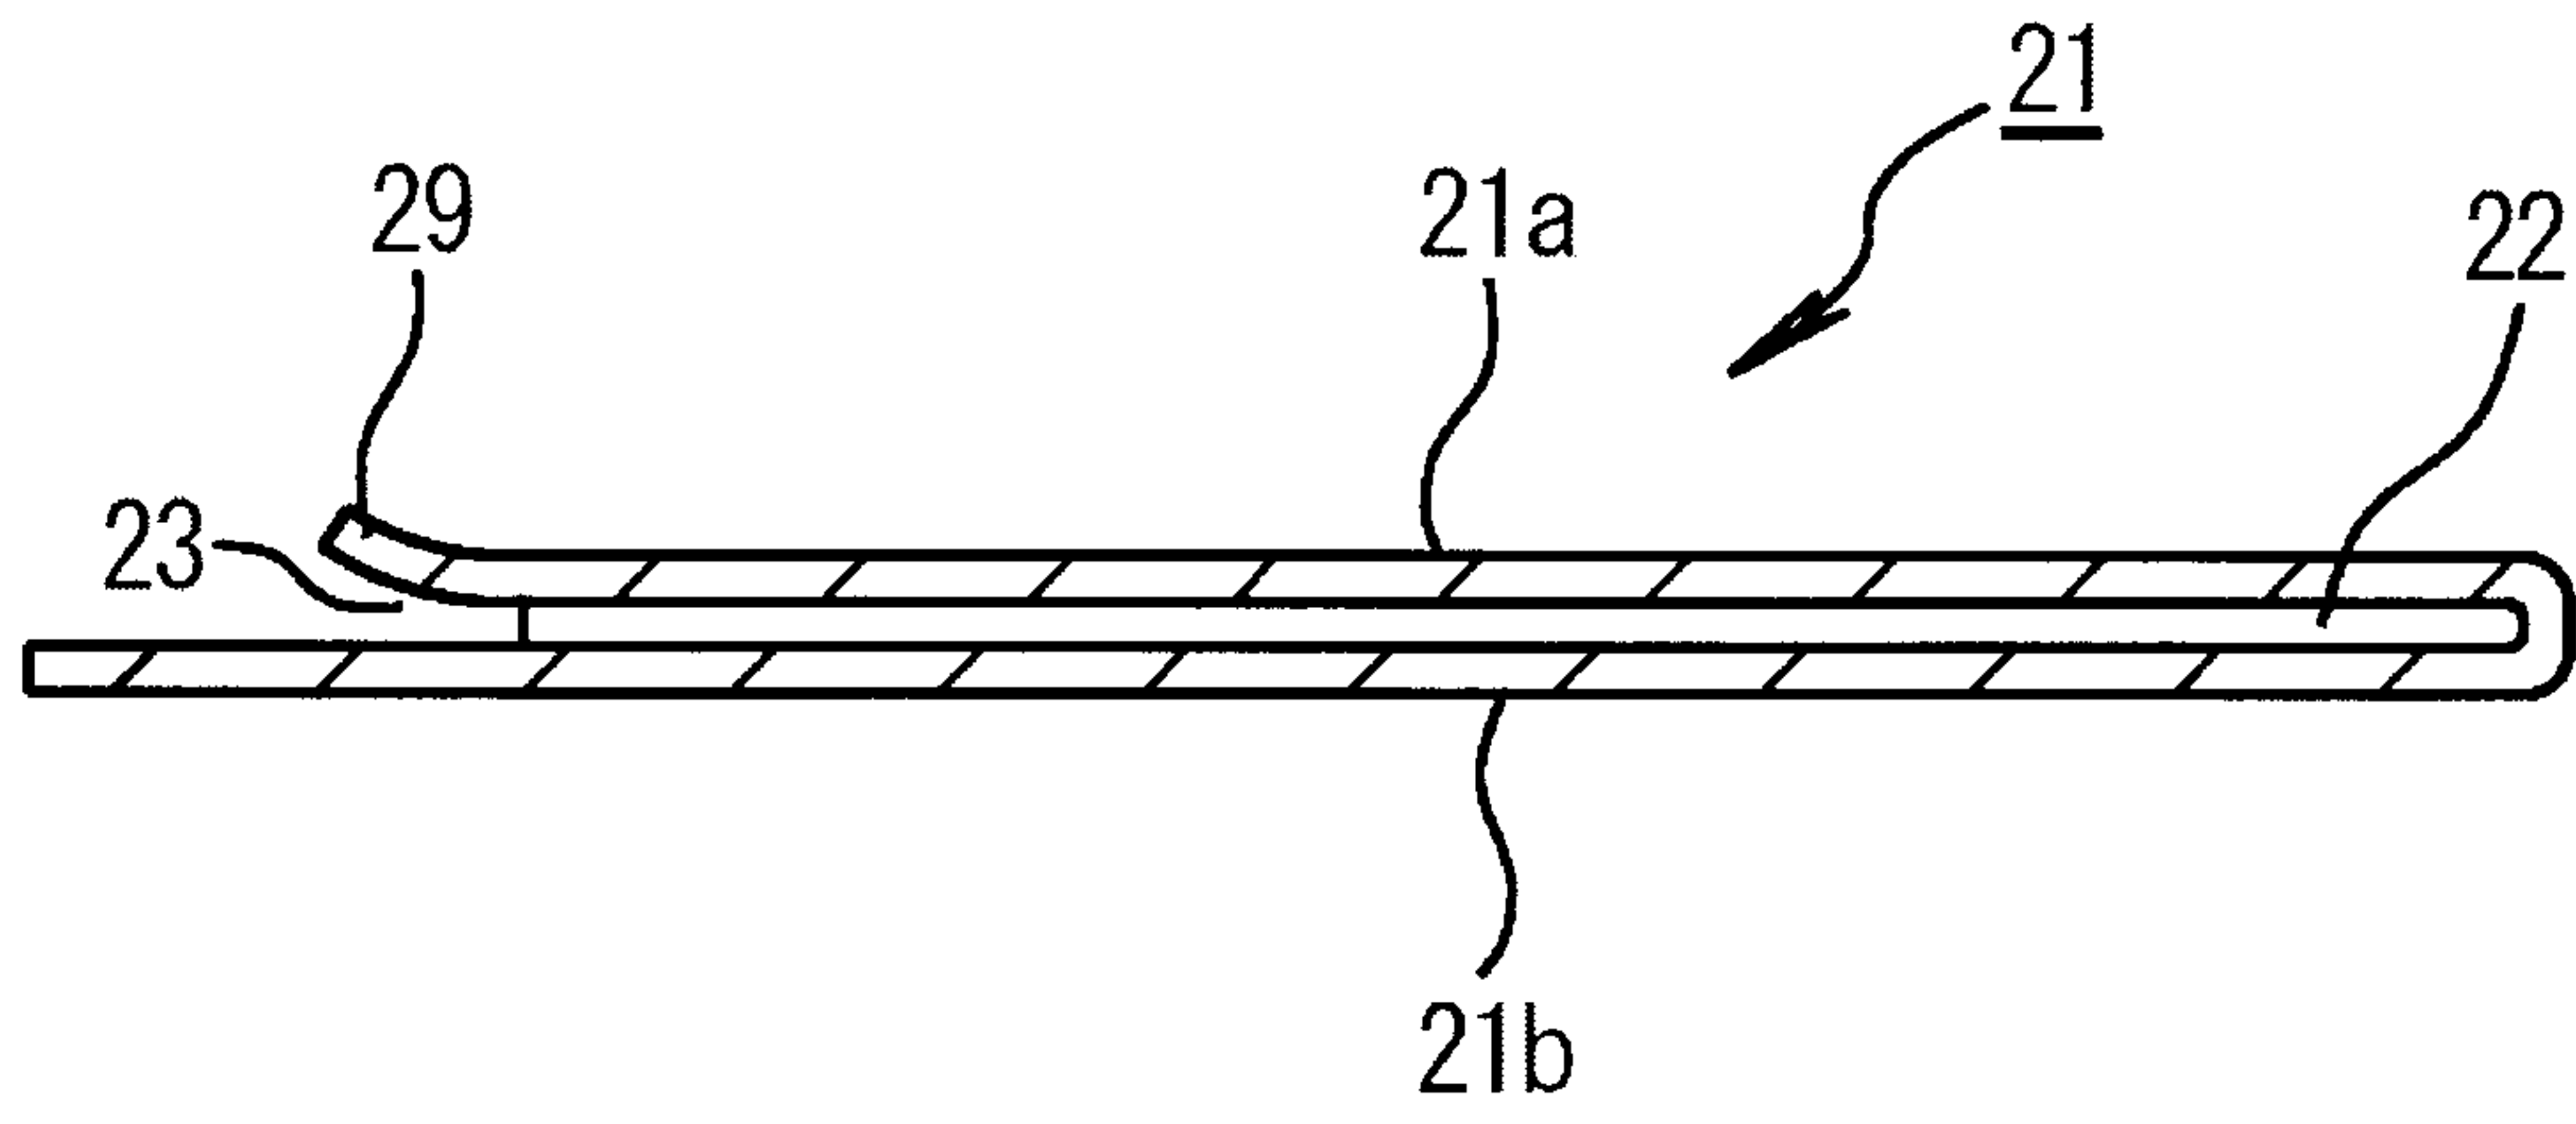

【FIG21】

