

(19) **DANMARK**

(10) **DK/EP 2272931 T3**



(12)

## Oversættelse af europæisk patentskrift

Patent- og  
Varemærkestyrelsen

- 
- (51) Int.Cl.: **B 32 B 7/12 (2006.01)**                      **B 32 B 5/02 (2006.01)**                      **B 32 B 5/24 (2006.01)**  
**B 32 B 7/06 (2006.01)**                      **C 09 J 7/02 (2006.01)**                      **D 06 N 3/00 (2006.01)**  
**D 06 N 3/18 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2018-03-05**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2017-12-06**
- (86) Europæisk ansøgning nr.: **09175405.1**
- (86) Europæisk indleveringsdag: **2009-11-09**
- (87) Den europæiske ansøgnings publiceringsdag: **2011-01-12**
- (30) Prioritet: **2009-07-09 US 500466**
- (84) Designerede stater: **AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR**
- (73) Patenthaver: **Lee, Sang Young, 112-605 Dongil Highville Lake City , Apt, 555 Sang-dong , Suseong-gu, Daegu , 706-950, Sydkorea**
- (72) Opfinder: **Lee, Sang Young, 112-605 Dongil Highville Lake City , Apt, 555 Sang-dong , Suseong-gu, Daegu , 706-950, Sydkorea**
- (74) Fuldmægtig i Danmark: **Georg Pintz & Partners Patent Trademark & Law Office LLC, Pintz és Társai Kft, H-1539 Budapest, Pf. 590, Ungarn**
- (54) Benævnelse: **Genklæbelig, flytbar og genanvendelig tekstilkløbende genstand for udskrivning og fremstilling heraf**
- (56) Fremdragne publikationer:  
**WO-A1-2008/138331**  
**US-A1- 2002 022 420**  
**Wolfgang Türk: "Denier", Römp online Version 4.0, 1 February 2005 (2005-02-01), pages 1-1, XP055198771, Retrieved from the Internet: URL:https://roempp.thieme.de/roempp4.0/do/ data/RD-04-00522 [retrieved on 2015-06-29]**



# DESCRIPTION

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

**[0001]** The present invention relates to a readherable, repositionable and reusable adhesive laminated sheet comprising a fabric and a paper backer that is used with color printers for personal computers, printing machines for indoor and outdoor advertising, wide format printers, plotters, and so on to print colored images on the laminated sheet.

### 2. Background Art

**[0002]** More particularly, the present invention is characterized in that the adhesive laminated sheet allows any printer to easily print, can be freely readhered onto many places several times, does not leave an adhered mark when it is come off, and does not damage a place where this product will be adhered (for instance, on a painted wall, on wallpaper, or on an existing advertising medium previously attached to any one place).

**[0003]** Furthermore, the present invention is characterized in that the adhesive laminated sheet is soft and reusable several times, allows a higher resolution image and a superior image quality, and prevents decoloration of printed images. Moreover, the adhesive laminated sheet according to the present invention has an effect for shading the sun by adding a gray coating on the rear face of the fabric through a special technique to thereby allow an easy window decoration in the summer season, and can protect a human body since the fabric and an adhesive layer of this product can serve to fix broken window pieces to a certain extent when a window is broken.

**[0004]** Additionally, the adhesive laminated sheet according to the present invention is a superior product in various aspects including a cutting work.

**[0005]** In general, paper and vinyl are mainly used for printing. However, recently, with a development of various advertising techniques, printing methods to print on fibrous materials is increasing.

**[0006]** As a representative example, there are banners that are recently used to output images through a wide format printer or a plotter.

**[0007]** However, such fabrics for printing have several problems in that the degrees of clarity and detail are low due to a low printing quality, in that it is decolorated rapidly after the printing,

in that it requires thermal cutting that is expensive and takes much time since yarns of a cut portion are unloosed when the fabric is cut as much as a necessary size, and in that it is inconvenient to adhere and remove an advertising thing.

### **SUMMARY OF THE INVENTION**

**[0008]** Accordingly, the present invention has been made to solve the above-mentioned problems occurring in the prior arts, and it is an object of the present invention to provide a readherable, repositionable and reusable adhesive laminated sheet, which is fit to a new advertising period, can reduce a customer's burden on costs a bit, allows the customer to easily and directly carry out printing, allows a higher resolution image and a superior image quality, and prevents decoloration of printed images.

**[0009]** Furthermore, it is another object of the present invention to provide a readherable, repositionable and reusable adhesive laminated sheet, which has an effect for shading the sun to thereby allow an easy window decoration in the summer season, can protect a human body when a window is broken, and is easy to cut.

**[0010]** To accomplish the above object, according to the present invention, there is provided a method according to claim 1 for manufacturing a readherable, repositionable and reusable adhesive laminated sheet for printing images.

**[0011]** The adhesive laminated sheet according to the present invention allows any printer to easily print, can be freely readhered onto many places several times, does not leave an adhered mark when it is come off, and does not damage a place where this product will be adhered (for instance, on a painted wall, on wallpaper, or on an existing advertising medium previously attached to any one place).

**[0012]** Furthermore, the adhesive laminated sheet according to the present invention is soft and reusable several times, allows a higher resolution image and a superior image quality, and prevents decoloration of printed images. Moreover, the adhesive laminated sheet according to the present invention has an effect for shading the sun by adding a gray coating on the back of the fabric through a special technique to thereby allow an easy window decoration in the summer season, and can protect a human body since the fabric and an adhesive layer of this product can serve to fix broken window pieces to a certain extent when a window is broken.

**[0013]** Additionally, the adhesive laminated sheet according to the present invention is a superior product in various aspects including a cutting work.

**[0014]** Accordingly, the adhesive laminated sheet for printing according to the present invention is a convenient product, which is freely readherable to various places for indoor and outdoor advertisings, such as commercial advertising, domestic printing paper, wallpaper decoration, advertising of various kinds using vehicles, picketing, postcards, bromides, and so

on.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

**[0015]** The above and other objects, features and advantages of the present invention will be apparent from the following detailed description of the preferred embodiments of the invention in conjunction with the accompanying drawings, in which:

FIG. 1 is an enlarged sectional view of an adhesive laminated sheet according to the present invention; and

FIG. 2 is another enlarged sectional view of the adhesive laminated sheet according to the present invention.

#### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

**[0016]** Reference will be now made in detail to the preferred embodiment of the present invention with reference to the attached drawings.

**[0017]** It is the best to use polyester DTYS (Draw Textured Yarns) for a fabric.

**[0018]** The reason is that the polyester DTYS can absorb a coating liquid deepest of fabrics all when the coating liquid for receiving ink sufficiently is coated on the fabric during a manufacturing process of an adhesive laminated sheet according to the present invention, and make the coating liquid exist between pieces of yarns to thereby prevent the coating liquid from being separated from the fabric supremely after coating.

**[0019]** Moreover, the polyester DTYS can allow a print ink to be evenly and deeply distributed on the coating liquid sufficiently absorbed into the fabric and existing between the pieces of yarn to thereby provide excellent image resolution and vividness.

**[0020]** The polyester DTYS are woven with the warp of 8.3 tex(75 denier) per 36 filaments and the weft of 1.667 tex (150 denier) per 48 filaments wherein the warp density is about 8,800 yarns and the weft density is 72T per inch.

**[0021]** Furthermore, the polyester DTYS may be woven with the warp of 8.3 tex (75 denier) per 72 filaments and the weft of 8.3 tex (75 denier) per 72 filaments.

**[0022]** Next, the fabric is heated and cooled rapidly so that its width is reduced by 10% to 15%. There are various heating methods, but in this invention, a JIG type machine is used, and

in this instance, the fabric is treated for 7 to 8 hours while keeping temperature of 180°C when the width of the fabric is 1.87 m (74 inches).

**[0023]** After the above process, the fabric is cooled rapidly to thereby be shrunk. The rapidly cooling process is carried out twice in such a way that the fabric is shrunk sufficiently till it becomes a 1.87 m (74 inches) fabric with a width ranging 1.63 m (64 inches) to 1.65 m (65 inches).

**[0024]** Then, the fabric density gets higher so that yarns close together and get dense, and hence, it can be prevented that the coating liquid is permeated to the rear face of a coated face during a rear face coating process, which will be carried out later.

**[0025]** It also can prevent the curling of the fabric and the tunneling between the fabric and the backer caused by a shrinkage of the fabric on the backer after this surface-coated product is completely laminated to the backer.

**[0026]** Since fabrics are different in quantity to absorb moisture, they cause the curling and tunneling when they come in contact with paper. Accordingly, when the fabric is matured several times during a sufficient period of time to thereby prevent the shrinkage of the product after the lamination of the product.

**[0027]** To make coating liquid, in this invention, coating liquids of two types are used: one being an "S" coating liquid for solvent-based ink; and the other being an "R" coating liquid for dyes-based ink, pigment-based ink and UV ink.

**[0028]** Prepare the coating liquids before three days from the use. The reason is to mature them for about three days and to make time that different ingredients of the coating liquids react with each other sufficiently.

**[0029]** After that, put a central rotating shaft into a container having the coating liquid therein and sufficiently mix the coating liquid at high speed for about 30 minutes before the use to thereby make viscosity of the coating liquid sufficiently thin and keep its white color evenly.

**[0030]** Particularly, the "S" coating liquid is divided into a first coating liquid and a second coating liquid, which are different coating liquids. Furthermore, the "R" coating liquid is coated twice.

**[0031]** Basic ingredients of the "S" coating liquid are as follows.

Chemical characterization	CAS NO	WT %
Methanol (Low molecular weight alcohol)	67-56-1	60-75
Silicon dioxide(silica)	112945-52-5	8-12
Additive	mixture	9-12
Polyacrylate copolymer	-	10-15

## &lt;First coating liquid&gt;

**[0032]**

Chemical characterization	CAS NO	WT %
Ethylene vinyl acetate copolymer	24937-78-8	40-50
additive	-	5-10
water	7732-18-5	40-60

## &lt;Second coating liquid&gt;

**[0033]**

Chemical characterization	CAS NO	WT %
Poly urethane Resin	51-79-6	app.25
additive	-	app.10
Methyl alcohol	67-56-1	app.60

**[0034]** To make a treatment of rear face of the fabric, first, mix polyurethane resin and a white pigment together and carry out a white coating (hereinafter, called rear face white coating) to the rear face of the fabric. Next, mix polyurethane resin and a gray pigment together and carry out a gray coating (hereinafter, called rear face gray coating).

**[0035]** The rear face white coating and the rear face gray coating are used as methods for waterproof of umbrellas or parasols for shading the sun because they have strong water resistance. In the present invention, they are used to make an adhesive be coated well and prevent penetration of the adhesive into the fabric in the following process.

**[0036]** If the adhesive penetrates through the fabric, it will be caused that decoloration of an image printed on the front face will be hastened. Moreover, the rear face white coating and the rear face gray coating serve to prevent loosening of yarns when the adhesive laminated sheet is cut in a predetermined size and when it is cut in a roll type since they serve to fix yarns.

**[0037]** As described above, the present invention can reduce expenses since it can be cut by a cutting blade, which is inexpensive and fast without needing the expensive heat cutting, which takes much time, due to the rear face white coating and the rear face gray coating serving to prevent loosening of yarns. Additionally, this process is carried out to prevent

transmission of light into the fabric and shade the sun.

**[0038]** Especially, this process is also carried out to prevent that the existing background color or pictures or characters of the previously adhered advertisement are shown through on the surface of the present invention when the adhesive laminated sheet of the present invention is adhered on a certain place.

**[0039]** In addition, this process is carried out not in such a way as to just form a thin white coating layer and a thin gray coating layer but in such a way as to treat the rear face white coating and the rear face gray coating after respectively mixing the white pigment and the gray pigment with polyurethane resin, and hence, it may give the same effect as that the fabric gets dyed white and gray. Accordingly, since this process increases the effect of the white coating of the front face ("S" coating and "R" coating) and doubles the effect of the gray coating of the rear face, the fabric and the adhesive are cleanly removed together without leaving any gray spot on a wall or a surface when the adhesive laminated sheet of the present invention is adhered on and removed from the wall or the surface.

**[0040]** In other words, the present invention can be adhered on the existing and previously adhered advertising thing without any problem in various aspects. Especially, after the above process, carry out the "S" coating and the "R" coating on the opposite face of the face where this process is carried out.

**[0041]** Then, the color of the rear face gray coating does not give any influence and change on the "S"-coated and "R"-coated white face, the "S"-coated and "R"-coated white face can keep its white color more clearly by the rear face white coating, and the characteristic of the rear face gray coating for shading the sun can be kept as it is.

**[0042]** The existing vinyl products require many expenses since they must be used after the previously adhered advertising things and adhered remnants are all removed. Actually, the vinyl products have a problem in that it is inconvenient and complex to adhere it and carry out other works because they leave thin vinyl layers on a wall or an advertising pole when they are removed.

**[0043]** Accordingly, in the present invention, the fabric is laminated with a backer through a removable adhesive, which will be processed in the next process, so that the present invention can be easily removed without any damage to the existing wallpaper or a painted place and without leaving adhered remnants, and is readherable and reusable several times.

**[0044]** This process includes the following steps.

**<Rear face white coating>**

**[0045]** Mix polyurethane resin and the white pigment together in the ratio of 6:4 (For instance,

polyurethane resin of 30g + white pigment of 20g). The mixture of 50g is used per 0.9144 m (1 yard) with the width of 1.65 m(65 inches).

**[0046]** An interval of a coating knife from the surface of the fabric during coating is 0.8mm during the first cutting and 1mm during the second cutting, and the room temperature of a drying room for drying the coating liquid is kept in a range of 150°C to 170°C.

**[0047]** Here, it is important to carry out the coating again through the same process. The reason is that to coat thin twice gives clearer white color than to coat thick once and that the rear face gray coating, which will be carried out next, can minimize transparentness without any influence on the "S"-coated and "R"-coated white surface.

**[0048]** As described above, this step can fix the yarns in such a way that the yarns are not loosened as firm as possible and prevent penetration of the adhesive into the surface since films are formed doubly.

#### **<Rear face gray coating>**

**[0049]** Mix polyurethane resin and the gray pigment together in the ratio of 6:4 (For instance, polyurethane resin of 30g + white pigment of 20g). The mixture of 50g is used per 0.9144 m (1 yard) with the width of 1.65 m(65 inches).

**[0050]** An interval of a coating knife from the surface of the fabric during coating is 0.5mm during the first cutting and 0.8mm during the second cutting, and the room temperature of the drying room for drying the coating liquid is kept in a range of 150°C to 170°C.

**[0051]** This step is carried out once. Differently from the rear face white coating, since the gray pigment used in the rear face gray coating has a high saturation, it can show a satisfied effect through just one coating.

**[0052]** In the process of a surface coating of the fabric, as described above, the "S" coating liquid and the "R" coating liquid, which are different sorts, are used. The "S" coating and the "R" coating are carried out on the opposite face of the face to which the rear face white coating and the rear face gray coating are applied.

**[0053]** In other words, after the white coating and the gray coating are applied to the rear face, the "S" coating and the "R" coating are applied to the opposite face of the rear face (namely, the front face). Accordingly, this process can be carried out easily because the rear face coating liquids are not stained on the surface of the fabric to which the "S" coating and the "R" coating will be applied. Such an effect may be obtained also through the heating process of the fabric, which is described above.

**[0054]** After the first coating, dry and cool the fabric. After that, carry out the second coating,

and then dry the fabric.

**[0055]** Particularly, compared with a method that coating ingredients are all mixed together and coating is carried out once, this method to coat and dry twice can make the coating liquid penetrate into the fabric evenly and separate the coating layers from each other, so that the first coating serves as a underpainting and as a medium to fix the fabric in such a way that the second coating liquid does not easily separate from the fabric. Furthermore, the method can prevent an easy decoloration of the surface coating of the fabric even though water permeated.

**[0056]** The second coating serves to absorb ink evenly and to express colors vividly.

**[0057]** Especially, because the second coating is carried out in a cooled condition after the first coating and drying, it can prevent that the coating liquid is coated on the fabric in a lump since the coating liquid is hardened during the second coating directly before it is distributed on the fabric evenly due to heat permeated into the fabric during the first coating. Also, it can minimize formation of coating lines on the surface of the fabric during the coating. In comparison with the method that coating ingredients are all mixed together and coating is carried out once, this method to coat and dry twice can prevent transmission of light by keeping the respective separate coating layers and maximize the effects of the respective coating liquids.

**[0058]** Furthermore, through this method, the second coating liquid can be firmly fixed on the first coating liquid.

**[0059]** Next, how to carry out the "S" coating and the "R" coating will be described.

#### **<First "S" coating>**

**[0060]** The coating liquid of 62g to 69g is used per 0.9144 m (1 yard) with the width of 1.65 m(65 inches), and an interval of a coating knife from the surface of the fabric during coating is 1.5mm. The room temperature of the drying room for drying the coating liquid is kept in a range of 170°C to 190°C.

**[0061]** The surface tension of the fabric is kept in a relatively loose condition as much as the knife interval of 1.5mm so that the coating liquid can be coated satisfactorily. If the surface tension is too strong, the coating liquid is coated too thin and the fabric may be shrunk again after the completion of the product, and hence, the surface tension is to prevent tunneling between the fabric and the backer after the fabric and the backer are laminated together.

#### **<Second "S" coating>**

**[0062]** The coating liquid of 34g to 41g is used per 0.9144 m (1 yard) with the width of 1.65 m(65 inches), and an interval of a coating knife from the surface of the fabric during coating is 2mm. The room temperature of the drying room for drying the coating liquid is kept in a range of 170°C to 190°C. The surface tension of the fabric is kept in a relatively loose condition as much as the knife interval of 2mm so that the coating liquid can be coated satisfactorily. The reason is the same as the description of the first "S" coating.

**<First "R" coating>**

**[0063]** The coating liquid of 62g to 69g is used per 0.9144 m(1 yard) with the width of 1.65 m (65 inches), and an interval of a coating knife from the surface of the fabric during coating is 1.5mm. The room temperature of the drying room for drying the coating liquid is kept in a range of 165°C to 180°C. The surface tension of the fabric is kept in a relatively loose condition as much as the knife interval of 1.5mm so that the coating liquid can be coated satisfactorily.

**<Second "R" coating>**

**[0064]** The coating liquid of 62g to 69g is used per 0.9144 m(1 yard) with the width of 1.65 m (65 inches), and an interval of a coating knife from the surface of the fabric during coating is 2mm. The room temperature of the drying room for drying the coating liquid is kept in a range of 165°C to 180°C. The surface tension of the fabric is kept in a relatively loose condition as much as the knife interval of 2mm so that the coating liquid can be coated satisfactorily.

**[0065]** After the above process, mature the coating fabric in a natural condition for three or four days.

**[0066]** It is to prevent the curling of the fabric and the tunneling between the fabric and the backer again due to shrinkage of the fabric on the backer after the fabric and the backer are laminated together.

**[0067]** Since fabrics are different in quantity to absorb moisture, there occur the curling and tunneling when they come in contact with paper. Accordingly, when the fabric is matured in a natural condition during a sufficient period of time to thereby prevent the shrinkage of the product after the lamination of the product.

**[0068]** For lamination of fabric and backer and other processes, lamination is carried out by a comma coater.

**[0069]** As the backer, a white vellum sheet having a weight of about 100g, which is the most suitable for the environments required by the fabric used in this process and is similar to the surface fabric in speed to absorb and release moisture. Additionally, as time goes by, the fabric

and the backer are all shrunk little by little, and hence, the white vellum sheet having the weight of about 100 g is selected in order to keep a similar shrinking radial width.

**[0070]** As another method, as the backer, PET paper may be used, but it is preferable that the white vellum sheet having a weight of about 100g if possible. The backer of the vellum sheet is not even and flat in the surface, but it is advantageous in that the backer is easily separated from the surface fabric since the uneven surface gives air-permeability when the surface fabric is removed from the backer for use in a state where the uneven surface comes in close contact with the adhesive portion and the surface fabric.

**[0071]** The surface of the PET paper is more smooth and flat than the white vellum sheet of 100g and even in the surface. However, since the PET paper is considerably low in air-permeability, it is difficult to easily separate it from the backer when the surface fabric is removed from the backer for use in a state where the PET paper comes in close contact with the adhesive portion and the surface fabric.

**[0072]** Basic ingredients of the removable adhesive are as follows.

INGREDIENTS	CAS NO	Weigh t (%)
Acrylic Polymer	-	31-35
Ethyl acetate	147 -78 -6	35-45
Toluene	108 -88 -3	10-20

**[0073]** Add a hardener of 2g to compound solvent of 100g to make total 102g. This rate is the ideal rate to keep a strong adhesive force and to make the backer be easily removed.

**[0074]** Mix the compound solvent and the hardener for 30 minutes and coat the adhesive on the backer evenly. In this instance, the most preferred thickness of the adhesive for the surface fabric of the present invention is  $1.8 \times 10^{-6}\text{m}$  (1.8 micron) to  $2.0 \times 10^{-6}\text{m}$  (2.0 micron).

**[0075]** After the lamination, since the polyester DTY absorbs the adhesive to a certain extent, if the thick coating is applied to the backer, the adhesive is evaporated and dried to a predetermined degree through a thermal drier, and then, the adhesive of the most suitable amount remains.

**[0076]** After the backer coated with the adhesive passes the drying room, the backer and the surface of the fabric are pressed together by a roller to thereby form a laminated sheet. In this instance, it is the most important to perform the laminating work in a state where the backer coated with the adhesive come in contact with the opposite face of the surface-coated face of the fabric, namely, the face to which the rear face gray coating was applied.

**[0077]** The reason is that the removable adhesive must be coated on the rear face of the surface-coated fabric, namely, the face to which the rear face gray coating was applied.

**[0078]** After the laminating work is completed, mature the product at the room temperature of about 50°C for one day and carry out various cuttings (roll cutting, and re-cutting). Also, in this instance, roll the product in the opposite direction of a direction that the product is rolled previously, and then, start cutting after three or four hours. The reason is to keep smoothness of the finished product by re-rolling the fabric and the backer, which are rolled in one direction, in the opposite direction.

**[0079]** In brief, the adhesive laminated sheet according to the present invention is made through the following steps.

**[0080]** Heat and cool rapidly the fabric woven with polyester DTYs, so that its width is reduced by 10% to 15%.

**[0081]** After that, coat the rear face of the fabric 1 with the coating liquid, which is made by mixing polyurethane resin and the white pigment in the ratio of 6:4, twice to thereby form a rear face white coating layer 11.

**[0082]** Coat the rear face of the fabric 1 with the coating liquid, which is made by mixing polyurethane resin and the gray pigment in the ratio of 6:4, once to thereby form a rear face gray coating layer 12.

**[0083]** Coat the fabric with the first "S" coating liquid containing ethylene vinyl acetate copolymer of 40-50% by weight to thereby form a first "S" coating layer 21.

**[0084]** Next, coat the fabric with the second "S" coating liquid containing polyurethane resin of 25% by weight to thereby form a second "S" coating layer 22.

**[0085]** Furthermore, coat the fabric with the "R" coating liquid containing methanol of 60-75% by weight and silicon dioxide (silica) of 8-12% by weight twice to thereby form an "R" coating layer 23. After that, the backer 30 coated with the adhesive 31 is laminated on the rear face of the fabric.

#### **LIST OF REFERENCE SIGNS**

**[0086]**

1: fabric

11: rear face white coating layer

12: rear face gray coating layer

21: first "S" coating layer

22: second "S" coating layer

23: "R" coating layer

30: backer

31: adhesive

**Patentkrav**

1. En metode til fremstilling af en genklæbelig, flytbar og genanvendeligt, klæbende lamineret folie bestående af et stof og et papir til udskrivning af billeder,
- 5 bestående af:
- vævning af et stof med polyester DTYs (Draw Textured Yarns/Tegn tekstueret garn);
- en proces med opvarmning og afkøling af det vævede stof, således at dens bredde skrumpes med 10% til 15%;
- 10 en proces til at forberede en belægningsvæske, der skal belægges på forsiden af stoffet og modnes i tre dage;
- en proces med blanding af harpiks og et hvidt pigment og belægning af det bageste side af stoffet to gange med blandingen, og derefter blande harpiks med et gråt pigment og belægning på den tidligere belagte side;
- 15 en proces med belægning af forsiden af stoffet to gange med den modnede belægningsvæske, som yderligere omfatter udtørring og afkøling af belagt stof mellem to belægningsprocesser på forsiden; og
- en proces med belægning af en papirbager med en lim for at danne et klæbelag; og
- 20 en proces af laminering af den bageste side af belagt stof med det klæbende lag således, at det klæbende lag vender ud mod stoffet.

2. Fremstillingsmetoden ifølge fordring 1, hvori klæbestoffet, belagt på papiret, er
- 25 en blanding, hvor acrylpolymer, ethylacetat og toluen er blandet sammen og er belagt på siden efter en hærder er tilføjet til blandingen, og hvori processen med laminering består af: tørring af den siden, der er belagt med klæbestof; laminering til den bageste side af stoffet på sådan en måde, at siden kommer i tæt kontakt med den bageste side af stoffet; modning af lamineret papir i en sammenrullet
- 30 tilstand i en dag; og igen rullende lamineret ark i den modsatte retning, som det laminerede ark var rullet og skåret i.

3. Fremstillingsmetoden ifølge fordring 1, bestående af:

35 udarbejde en første "S" belægningsvæske indeholdende ethylen vinylacetat  
copolymer af 40-50% efter vægt, en anden "S" belægningsvæske indeholdende  
harpiks på 25% efter vægt som belægningsvæske på forsiden; og  
første belægning på forreste side med den første "S" belægningsvæske, og  
derefter anden belægning med den anden "S" belægningsvæske.

40

4. Fremstillingsmetoden ifølge fordring 1, bestående af:

forberede en "R" belægningsvæske indeholdende methylalkohol på 60-75% af  
vægten og siliciumdioxid (silica) 8-12% efter vægt, da belægningsvæsken skal  
belægges på forsiden af stoffet; og

45 belægning af forsiden med "R" belægningsvæske to gange.

5. En genklæbelig, flytbar og genanvendeligt, klæbende lamineret folie bestående  
af et stof og et papir til udskrivning af billeder, bestående af:

50 et stof (1) vævet med polyester DTYs (Draw Textured Yarns/Tegn tekstueret  
garn), stoffet (1) bliver opvarmet og afkølet hurtigt, således at dens bredde  
reduceres med 10% til 15%;

Et belægningslag på den bagerste side (11) dannet på en måde, der blander  
harpiks og et hvidt pigment og bageste ansigtet af stoffet med blandingen, og en  
55 bageste side med grå belægning (12) formet på en måde, der blander harpiks og  
et gråt pigment, og belægger den bageste side af stoffet med blandingen;

en belægning dannet på forsiden og tilpasset til at modtage blæk; og

en papirbager (30) belagt med et klæbemiddel (31), som (30) er lamineret til den  
bageste side af det belagte stof, hvori det klæbende lag vender mod stoffet.

# DRAWINGS

FIG. 1

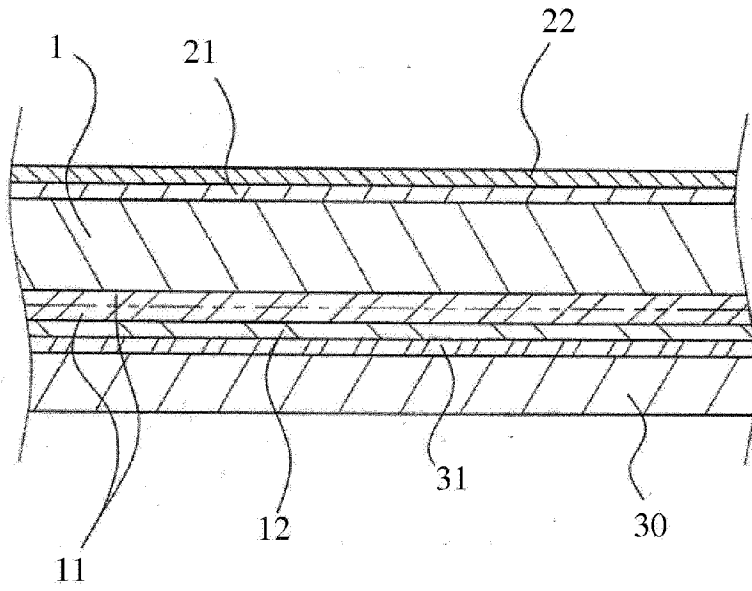


FIG. 2

