

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2014/144948 A1

(43) International Publication Date  
18 September 2014 (18.09.2014)

WIPO | PCT

(51) International Patent Classification:

H04N 5/225 (2006.01)

(21) International Application Number:

PCT/US2014/029561

(22) International Filing Date:

14 March 2014 (14.03.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/801,380 15 March 2013 (15.03.2013) US  
61/876,719 11 September 2013 (11.09.2013) US

(72) Inventors; and

(71) Applicants : STUART, Micheal, D. [US/US]; 71 Big Bear Place NW, Issaquah, WA 98027 (US). SCHLICHTING, Jordan [US/US]; 3550 Annapolis Lane North, Suite 70, Plymoutn, MN 55447 (US). NEELEY, John [US/US]; 952 North 35th Street, Seattle, WA 98103 (US).

(74) Agent: FITZGERALD, Thomas, R.; Christensen O'Connor Johnson Kindness, 1201 Third Avenue, Suite 3600, Seattle, WA 98101-3029 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: VISIBLE AUDIOVISUAL ANNOTATION OF INFRARED IMAGES USING A SEPARATE WIRELESS MOBILE DEVICE

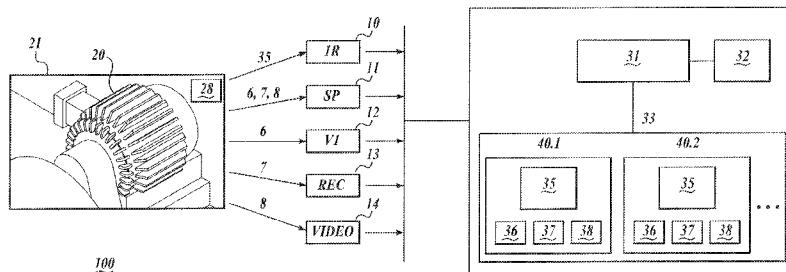


Fig. 2.

(57) Abstract: A smart phone user captures video and still images of a motor and makes a sound recording of his observations. The images and recordings are tagged with a date/time stamp, a serial, number, bar code, matrix code, RFID code, or geolocation and sent wirelessly to an infrared camera. The infrared camera has a collocation application that reads the tag and creates a folder which holds the infrared image and the auxiliary information from, the smartphone related to an asset. The collocation program also adds icons to the infrared image. By operating the user interface (not shown) of the infrared camera, the user may select an icon to view the images and listen to the sound recording.

VISIBLE AUDIOVISUAL ANNOTATION OF INFRARED IMAGES USING A  
SEPARATE WIRELESS MOBILE DEVICE

CROSS-REFERENCES TO RELATED APPLICATIONS

5 This application claims the benefit of Provisional Application No. 61/801,380, filed March 15, 2013, and Provisional Application No. 61/876,719, filed September 11, 2013, the disclosures of which are hereby incorporated by reference herein.

BACKGROUND

10 The present invention relates to the field of infrared cameras. More particularly, this invention relates to infrared cameras enabling an operator to capture a thermal image of an asset and the scene or area where the asset is located and then associate it with any auxiliary information relating to the asset or scene.

15 Thermal imaging cameras have long been used in many settings to measure temperature profiles and analyze thermal variations and differences of one or more assets in a scene such as an electric motor in an area of a manufacturing plant. To that end, such profiles can be used in comparing the different temperatures of the assets at any given time, or conversely, can be used in comparing these temperatures or thermal variations and differences over a period of time. For example, infrared cameras are frequently used 20 in industrial applications as part of preventative maintenance programs and for building sciences and diagnostics inspections. These types of programs often typically rely on periodic inspections of the assets of a plant, facility, or structure to discover likely failures before they occur or monitor and document ongoing performance. For example, in an industrial setting, plant personnel often develop survey routes in order to routinely gather temperature data on the identified equipment. As is known, similar examples exist in 25 other applications for building sciences as well.

In an industrial setting example, after collecting a thermal baseline image for each piece of equipment along a route, a person (such as a thermographer, an inspector, a building performance professional, an electrician, a technician, etc.) can then identify changes in thermal characteristics over the course of several inspections by comparing 30 later thermal images of the equipment with the baseline image or other prior images. Changes in thermal characteristics can in some cases indicate the imminent failure of a part, thus allowing the person to schedule maintenance or replacement prior to failure.

In a simple case, a person can visually compare thermal images captured at different times to determine changes in thermal characteristics over the time period. However, only so much information can be gleaned solely from thermal images. To aid in the analysis of a most recent image captured or in comparing that image to images 5 previously captured, infrared imaging cameras have been configured to allow operators to add notes or annotations to an image. These annotations are generally created as audio or text files, and can be subsequently saved to the image in order to provide supplementary information that is difficult to ascertain from the image alone.

However, issues were encountered in adding these annotations to the image. In 10 particular, some cameras only enable annotations to be added at the time the thermal image is saved (with limited ability for later modification), while other cameras enable annotations to be added after the image is saved. As such, it is not uncommon to find operators of these cameras further carrying a notebook to jot down their impressions of the scene in the field. In turn, the operator waits until later to combine these impressions 15 into a single file which can then be stored with the saved image of the scene. Unfortunately, this process is time-consuming and invites error, because what is observed and noted in the field may not be fully recalled, even with the use of such notebook. Further, the operator may not be able to remember the particular image that the annotations correspond to, inviting further potential error.

20 Many of the above and other problems are solved by embodiments of an apparatus and methods shown in U.S. Patent Application Publication No. 20120224067, published September 6, 2012, based upon U.S. Patent Application No. 13/040667, filed March 4, 2011, assigned to the assignee of this patent and hereby incorporated by reference. That publication shows a thermal imager for capturing a primary thermal 25 image of an asset or scene and then associating it, as desired, with auxiliary information relating to the asset or scene. The auxiliary information can be associated with the primary thermal image in the field after the image is captured. The auxiliary information can pertain to further detail regarding the asset, the surroundings of the scene, and/or the surroundings of the location of the scene, which when associated with the primary thermal image, collectively represents a form of asset information card for the image. The auxiliary information is generally in the form of images and video recordings, 30 whether infrared and/or visible light, and can be associated to the primary thermal image in varying or distinct manners, such as being based on relatedness of the information to

the asset or the scene. The infrared image is annotated with the other images and recordings in the thermal imager at or proximate the time of recording.

The infrared imager of the publication has the added ability to capture still images, sound recordings, and video, and thereby annotate the infrared images by capturing the infrared images and the annotations at approximately the same time. However, many users continue to use their existing infrared imagers that have no ability to capture still and video images and sound recordings. As such, there remains a problem with annotating thermal images with other images and recordings taken by video camera, still image cameras, and sound recorders. Moreover, often the infrared images reside on a remote server and only require annotations with images and recording that can be captured by non-infrared equipment such as the ubiquitous smartphone which records video, audio, and still images. There remains a long felt and unmet need for such annotating infrared images with auxiliary information captured by non-infrared devices.

#### SUMMARY

This summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This summary is not intended to identify key features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter.

The invention described and claimed herein has a number of embodiments and should not be interpreted or otherwise limited to the abbreviated discussion of some embodiments in this summary. The embodiments of the invention address the problem of how to collocate (group) information about an asset, such as a motor or machine, by using tags. A primary piece of information is a thermal image. The thermal image is annotated with auxiliary information, including and not limited to digital images (still), sound recordings of notes spoken by an observer of the asset, and video images. Auxiliary information is captured with a smartphone, a digital camera, a digital recorder or a digital video camera. Each capture device applies a tag to the captured information that relates the captured information to an asset.

There are numerous types of tags, including date/time stamps, serial numbers, bar and matrix codes, RFID codes and geolocations (latitude and longitude) tags. The tagged information is processed in the capture device or is sent to another device where tags on the information are used to collocate information about the same asset into a common

folder. The receiving device annotates a thermal image with icons that represent the types of auxiliary information in the folder.

#### DESCRIPTION OF THE DRAWINGS

The foregoing aspects and many of the attendant advantages of this invention will 5 become more readily appreciated as the same become better understood by reference to the following detailed description, when taken in conjunction with the accompanying drawings, wherein:

FIGURE 1 is a general schematic diagram of an embodiment of an annotation system;

10 FIGURE 2 is a more detailed general schematic diagram of an embodiment of an annotation system;

FIGURE 3 is a schematic block diagram of a first specific embodiment of an annotation system;

15 FIGURE 4 is a schematic block diagram of a second specific embodiment of an annotation system;

FIGURE 5 is a schematic block diagram of a third specific embodiment of an annotation system; and

FIGURE 6 is a schematic block diagram of a fourth specific embodiment of an annotation system.

20 **DETAILED DESCRIPTION**

While illustrative embodiments have been illustrated and described, it will be appreciated that various changes can be made therein without departing from the spirit and scope of the invention.

25 Turning to FIGURE 1, a system 100 is shown. One or more capture devices 10-12 capture infrared images, still images, video images and sound recordings of assets 20, such as electric motors and their surrounding area or related environment 21. The asset 20 and its surrounding area (scene) 21 are labeled with a tag 28. Tags 28 are indicia or codes that relate captured information to an asset. Capture devices 10-12 capture thermal images, auxiliary information and their respective tag information. The 30 capture devices 10-12 also apply one or more tags to captured information so that each thermal image 35 and auxiliary information have one or more tags 28 and each tag is related to the same asset 20. The capture devices 10-12 have wireless transceivers for sending infrared images 35 and captured auxiliary information and their tags to an

annotation/storage/display (ASD) device 30. The ASD 30 is adapted to send asset folders 40 to a cloud storage device 50 from which annotated thermal images of an asset may be distributed to multiple devices 53-56 via wired or wireless connections 51 and the internet 52.

5 The ASD 30 may be a personal computer, a tablet computer, or a server. The ASD 30 has a processor 31 and a collocation program 33. The processor 31 operates the collocation program 33 to sort thermal images and auxiliary information with related tags into a common folder 40 to provide a folder having the infrared image 35 and auxiliary information. The processor also operates the collocation program to create icons 36-38  
10 representative of the types of auxiliary information associated with the tag. Icons 36-38 are symbols representative of visual images 6, sound recordings 7, and video images 8, respectively.

Moving to FIGURE 2, there is a more detailed view of system 100. An asset 20, such as a motor 20, is shown in an area 21. The capture devices include an infrared 15 camera 10 capable of capturing an infrared image 35 of the motor 20 or other asset. A smartphone 11 is a versatile capture device and captures video images 8, sound recordings 7, and still images 6. The smartphone 11 also captures different types of tags including, and not limited to, serial numbers, bar codes or matrix codes, date/time stamps for images, and audio recordings. Other tag embodiments include geo-location 20 information (latitude and longitude) using global positioning circuitry and GPS programs that provide latitude and longitude values for the location of an asset 20. Still further tag embodiments include RFID tags. Smartphones may be equipped with circuitry and programs for reading all such codes.

Other capture devices 12-14 include suitable apparatus and circuitry to apply one 25 or more tags to captured auxiliary information including images 6, sound recordings 7, and videos 8. The digital camera 12 and video camera 14 can apply date/time stamps to information and are inherently capable of capturing images of a serial number, bar code, or matrix (two-dimensional) code, which can be later deciphered as tags for asset 20. The digital recorder 13 may also attach a date/time stamp to a recording and the user may 30 make an audible record of a serial number that can also be deciphered later. The other capture devices 12-14 may also be equipped with or modified to include apparatus and circuitry to detecting and appending RFID and geolocation codes to auxiliary

information. Each capture device may send its information via a wired or wireless communication path to the ASD 30.

The ASD 30 has a processor 31, a memory 32, and one or more computer programs 33 for collocating images. Memory 32 holds multiple folders 40.1, 40.2, 40.3, 5 40.N of thermal images and auxiliary information. Each folder 40.N has an infrared image 35 of an asset 20 and the thermal image is annotated with icons 36-38 representing the types of auxiliary information in the folder. ASD 30 has suitable apparatus, methods and computer programs, such as optical character recognition and speech recognition programs, to decipher and recognize serial numbers, bar codes, matrix codes and audible 10 notes corresponding to tags. The tag identification programs may operate independently or together to collocate received images and recordings. For example, audio recordings of spoken serial numbers are recognized by speech recognition programs. Such audio recordings may be processed together with the date/time tag data to collocate the audio recording with a captured image having similar date/times.

15 ASD 30 has a display 34 for displaying an infrared image 35 of the motor 20 or other asset with one or more icons 36, 37, 38 on the bottom of image 35. The icons 36-38 refer to still images, audio recordings, and video images, respectively, of the motor 20 and its relevant area or environment 21. A user operating an input device 30 may access 20 any folder 40.N and display it on display 34. By clicking one of icons 36-38, the user may display still or video images or listen to comments in the audio annotations. The input device 39 is any suitable device and includes one or more of a keyboard, mouse, track ball, track pad, and touch screen on the display 34 and combinations thereof.

25 FIGURE 3 shows a first specific embodiment. The user operates an infrared camera 10 to capture a thermal image of a motor 20. The user then operates a smart phone 11 to capture video and still images of motor 20 and make a sound recording of his observations. The images and recordings are tagged with a date/time stamp and sent wirelessly to the infrared camera 10. The infrared camera 10 has a collocation application that reads the date/time stamps of the thermal, still and video images and the sound recording and creates a folder 40.1 that holds the infrared image 35 and the 30 auxiliary information from the smartphone 11 related to asset 20. The collocation program also adds icons 36-38 to the infrared image 35. By operating the user interface (not shown) of the infrared camera 10, the user may select an icon 36-38 to view the images 6, 8 and listen to the sound recording 7.

The specific embodiment of FIGURE 3 may be modified to substitute a digital video camera 14, a digital still image camera 12, or a digital recorder 13 for the smart phone 11. Each of the cameras 14, 12 and the recorder 13 has a wireless transmitter for sending images or recordings to infrared camera 10. The infrared camera 10 may capture or already have thermal image 35 with one or more tags including a serial number, barcode or matrix code data, a date/time stamp tag, a geolocation tag or an RFID tag. The devices 12-14 have one or more apparatus, circuitry, processor and supporting programs to acquire one or more tags, including and not limited to a serial number, barcode or matrix code data, a date/time stamp tag, a geolocation tag, or an RFID tag.

5 The devices 12-14 append one or more tags to their respective images or recordings for transmission to the infrared camera 10. The infrared camera 10 has a collocation application that creates a folder 40.1 that has an infrared image 35 of the motor 20. The camera 10 and its collocation program reads the tags received from the devices 12-14, places the received images and recordings in the folder 40.1, and adds icons 36-38 to image 35. By operating the user interface (not shown) of the infrared camera 10, the user may select an icon 36-38 to view the images 6, 8 and listen to the sound recording 7.

10

15

FIGURE 4 shows a second specific embodiment. The user operates a smart phone 11 to capture video and still images of motor 20 and make a sound recording of his observations. The smartphone has a global positioning apparatus and program for tagging images and sound recordings with the latitude and longitude of where the image and recordings were made. The smartphone 11 wirelessly sends the image and sound recording to a remote ASD (personal computer/database) 30. The ASD 30 holds a thermal image 35 of the motor in a folder 40.2. The image was taken last week. The ASD 30 has a collocation application that reads the geolocation tag of the images and recording received from the smartphone 11 and collocates the received images and recordings in folder 40.2, which has the same geolocations tag as the still and video images and the sound recording. Upon accessing folder 40.2, the user sees an infrared image 35 of the motor 20 and icons 36-38. By operating the user interface (not shown) of the smartphone 11, the user may select an icon 36-38 to view the images 6, 8 and listen to the sound recording 7.

20

25

30

FIGURE 5 shows a third specific embodiment. The user operates a smart phone 11 to capture video and still images of motor 20 and make a sound recording of his observations. The smartphone attaches a date/time stamp tag to the images and

recordings and wirelessly sends them to a tablet computer/ASD 30. A few minutes later, the user operates an infrared camera 10 to capture an infrared image 35 of the motor 20. The user sends the infrared image 35 with a date/time tag to the tablet computer/ASD 30. By operating the user interface (not shown) of the tablet, the user may select an 5 icon 36-38 to view the images 6, 8 and listen to the sound recording 7.

The tablet computer/ASD 30 wirelessly receives the images and sound recordings from the infrared camera 10 and the smartphone 11. The tablet computer receives the thermal image 35 and stores it in a folder 40.3. The ASD 30 has a collocation application that reads the date/time stamp of the images and recordings received from the 10 smartphone 11 and collocates those images and sound recording into folder 40.3 and adds icons 36-38 to the thermal images 35. The collocation program matches the images and sound recordings from the smartphone 11 to the thermal image 35 because they have date/time tags of the same day and close to the same time as the thermal image 35. In some embodiments, the collocation program may ask the user to accept or decline the 15 prospective collocation of images and sound recordings with a given thermal image. Upon accessing folder 40.3, the user sees a thermal image 35 of the motor 20 and icons 36-38. By operating a user interface (not shown) of ASD 30, the user may select an icon and view the images 36, 37 and listen to the sound recording 38.

FIGURE 6 shows a fourth specific embodiment. The user operates an infrared 20 camera 11 to capture a thermal image 35 of the motor 20 or other asset. Infrared camera 10 has a built-in barcode reader, not shown. It reads a barcode 5 disposed on the motor 20 or in close proximity to the motor, appends the barcode data to the thermal image as a tag, and stores the thermal image 35 and barcode data in a folder 40.4. The user then operates a smartphone 11 to capture still images, video images, and a sound 25 recording of observations regarding motor 20. The smartphone 11 also captures images of the barcode 5 and allows the user to append the barcode image to the still and video images and to the sound recording. The images and sound recording are wirelessly sent to the infrared camera 10 that has a memory and a collocation application program. The collocation program identifies the barcode data and stores the thermal image 35 of the 30 motor in folder 40.4. The collocation program also identifies the barcode tag data of the images and sound recording and stores the images and sound recording in folder 40.4 because each has the same tag information as the thermal image 35. The collocation program adds icons 36-38 to the thermal image 35 and wirelessly sends the annotated

5 folder 40.4 to a cloud storage facility 50 where it may be downloaded to one or more devices 53-56 via wired or wireless connections 51 and the internet 52. Devices 53-56 may be infrared cameras, smartphones, tablet computers, personal computers, or other apparatus capable of displaying thermal images with icons that can be opened to their underlying images and recordings. By operating the user interface of the devices 53-56, the user may select an icon 36-38 to view the images 6, 8 and listen to the sound recording 7.

10 While some embodiments of the invention have been shown and described, modifications and variations may be made thereto by those of ordinary skill in the art without departing from the spirit and scope of the present invention. For example, each 15 of the capture devices 10-14 may be constructed or modified to have a collocation program and other programs for deciphering bar codes embedded in images and recognizing spoken serial numbers in sound recordings. Each of the capture devices may send its information to any of the other devices or to a personal computer, tablet computer, or cloud storage facility. In this regard, the personal computer, tablet computer, and cloud storage facility may have apparatus, circuitry, and programs for collocating tagged information into folders and for deciphering codes embedded in images and recordings.

20 It should be understood that aspects of the various embodiments may be interchanged either in whole or in part. Furthermore, those of ordinary skill in the art will appreciate that the foregoing description is by way of example only, and is not intended to limit the invention, except as further described in the appended claims. Those skilled 25 in the art will understand that other and equivalent components and steps may be used to achieve substantially the same results in substantially the same way as that described and claimed.

While illustrative embodiments have been illustrated and described, it will be appreciated that various changes can be made therein without departing from the spirit and scope of the invention.

## CLAIMS

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A method for annotating an infrared image comprising:
  - storing in a folder an infrared image of an asset having one or more tags in a folder;
  - collocating in said folder auxiliary information having at least one tag corresponding to the tag of the asset;
  - annotating the thermal image with one or more icons representative of types of auxiliary information stored in the folder; and
  - displaying the thermal image of the device with one or more icons representative of the auxiliary information in the folder.
2. The method of Claim 1, further comprising wirelessly receiving auxiliary information.
3. The method of Claim 1, wherein the auxiliary information comprises one or more types of information including visual images, video images, and sound recordings wherein each image or recording has at least one tag corresponding to the tag of the asset.
4. The method of Claim 2, further comprising selecting an icon corresponding to the type of auxiliary information selected for display.
5. The method of Claim 1, wherein a tag comprises information representative of the identity of the asset.
6. The method of Claim 1, wherein the tag comprises a coded image.
7. The method of Claim 2, wherein the tag comprises a serial number, a barcode, or a matrix code.
8. The method of Claim 1, wherein the tag comprises a date/time stamp of when the image or recording was captured.

9. The method of Claim 1, wherein the tag comprises a geolocation code corresponding to the geographic location of the asset.

10. The method of Claim 1, wherein the annotations are icons representative of one or more of the group consisting of visual images, video images or sound recordings stored in the folder.

11. The method of Claim 1, further comprising capturing one or more of the group comprising visual images, video images, and sound recordings wherein each one of the group is associated with the device.

12. The method of Claim 1, further comprising capturing an infrared image of a device with an infrared camera.

13. The method of Claim 1, further comprising capturing a visual image, video images, or a sound recording with a smartphone and wirelessly transmitting the captured images or audio recording to the folder holding the thermal image.

14. The method of Claim 1, further comprising storing the annotated thermal image in an infrared camera.

15. The method of Claim 1, further comprising storing the annotated thermal image in a smart phone.

16. The method of Claim 1, further comprising storing the annotated thermal image in a computer.

17. The method of Claim 16, wherein the computer comprises a personal computer or a tablet computer.

18. The method of Claim 1, further comprising storing the annotated thermal image in a computer cloud.

19. A system for annotating an infrared image comprising:  
a storage apparatus for storing in a folder an infrared image of an asset having one or more tags;  
a device for capturing auxiliary information and at least one tag about the asset;

wirelessly transmitting the auxiliary information and the tag(s) to the storage apparatus;

a collocation program for sorting auxiliary information into folders corresponding to the tag(s) on the auxiliary information and for annotating the infrared image in the folder with one or more icons of the types of auxiliary information in the folder;

a processor in the storage apparatus for operating the collocation program to store auxiliary information in the folders and to apply icons to the infrared images in the folders; and

a display displaying the thermal image of the asset with icons.

20. The apparatus of Claim 19, wherein a tag comprises information representative of the identity of the asset.

21. The apparatus of Claim 19, wherein the tag comprises a coded image.

22. The apparatus of Claim 21, wherein the tag comprises a serial number, a barcode, or a matrix code.

23. The apparatus of Claim 19, wherein the tag comprises a date/time stamp of when the image or recording was captured.

24. The apparatus of Claim 19, wherein the tag comprises a geolocation code corresponding to the geographic location of the asset.


25. The system of Claim 19, wherein the device for capturing auxiliary information comprises one or more of the group consisting of a still image camera, a video camera, and a sound recorder for capturing one or more of the group comprising visual images, video images, and sound recordings associated with the asset.

26. The system of Claim 20, wherein the storage apparatus comprises an infrared camera for capturing the thermal image of the asset device.


27. The system of Claim 20, wherein the storage apparatus is one or more of the group consisting of a smartphone, a computer cloud, a personal computer, a tablet computer, a video camera, a digital camera, or a digital recorder.


28. An apparatus for annotating an infrared image comprising:
  - an input for receiving wirelessly transmitted auxiliary information with one or more tag(s);
  - a memory for storing in a folder an infrared image of an asset having one or more tags;
  - a collocation program for sorting auxiliary information into folders corresponding to the tag(s) on the auxiliary information and for applying icons to the thermal images stored in the folders;
  - a processor for operating the collocation program to store auxiliary information in folders with tags having thermal images with tags corresponding to the one or more tags of the auxiliary information and for applying icons to the thermal images representative of the type of auxiliary information stored in the folder; and
  - a display displaying the thermal image of the asset with icons.
29. The apparatus of Claim 28, wherein said apparatus is an infrared camera.
30. The apparatus of Claim 28, wherein a tag comprises information representative of the identity of the asset.
31. The apparatus of Claim 28, wherein the tag comprises a coded image.
32. The apparatus of Claim 31, wherein the tag comprises a serial number, a barcode, or a matrix code.
33. The apparatus of Claim 28, wherein the tag comprises a date/time stamp of when the image or recording was captured.
34. The apparatus of Claim 28, wherein the tag comprises a geolocation code corresponding to the geographic location of the asset.
35. The system of Claim 19, wherein the device for capturing auxiliary information comprises one or more of the group consisting of a still image camera, a video camera, and a sound recorder for capturing one or more of the group comprising visual images, video images, and sound recordings associated with the asset.

36. The system of Claim 19, wherein the storage apparatus is one or more of the group consisting of a smartphone, a computer cloud, a personal computer, a tablet computer, a video camera, a digital camera, or a digital recorder.

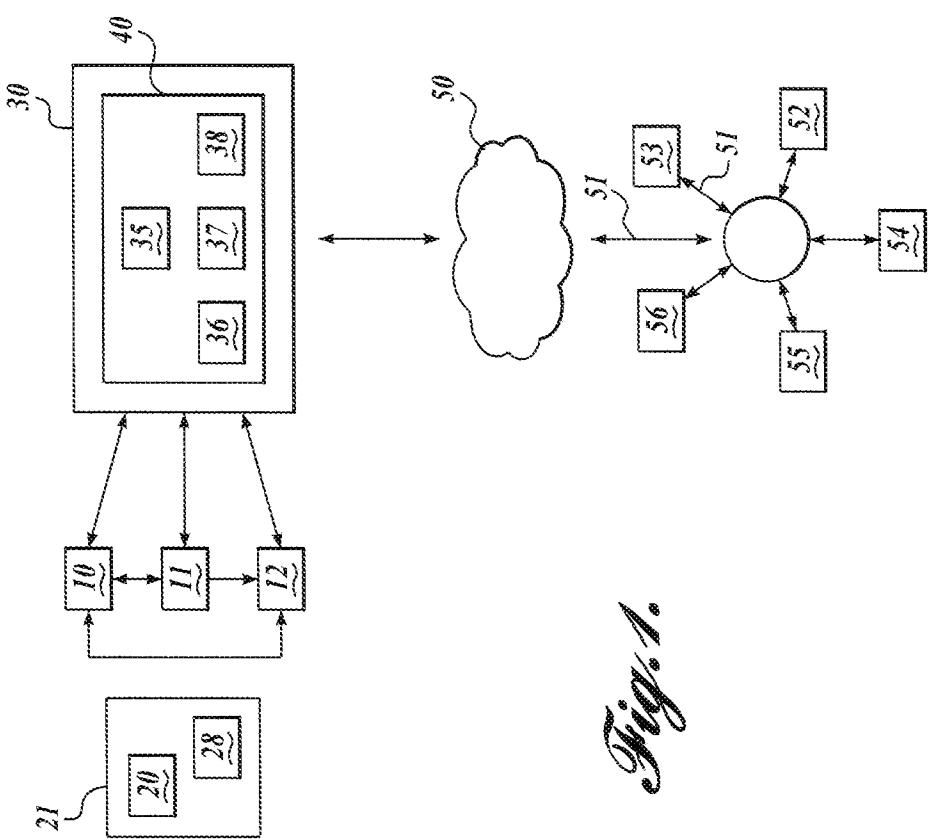



2/6

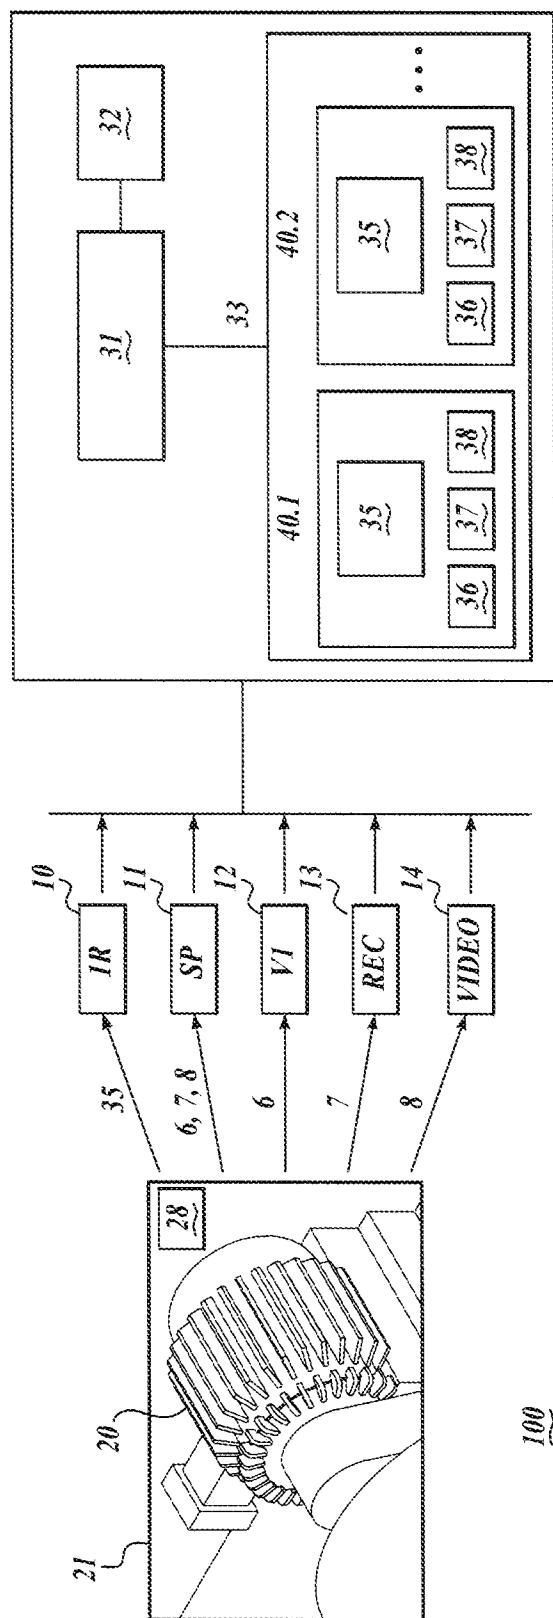
*Fig. 2.*

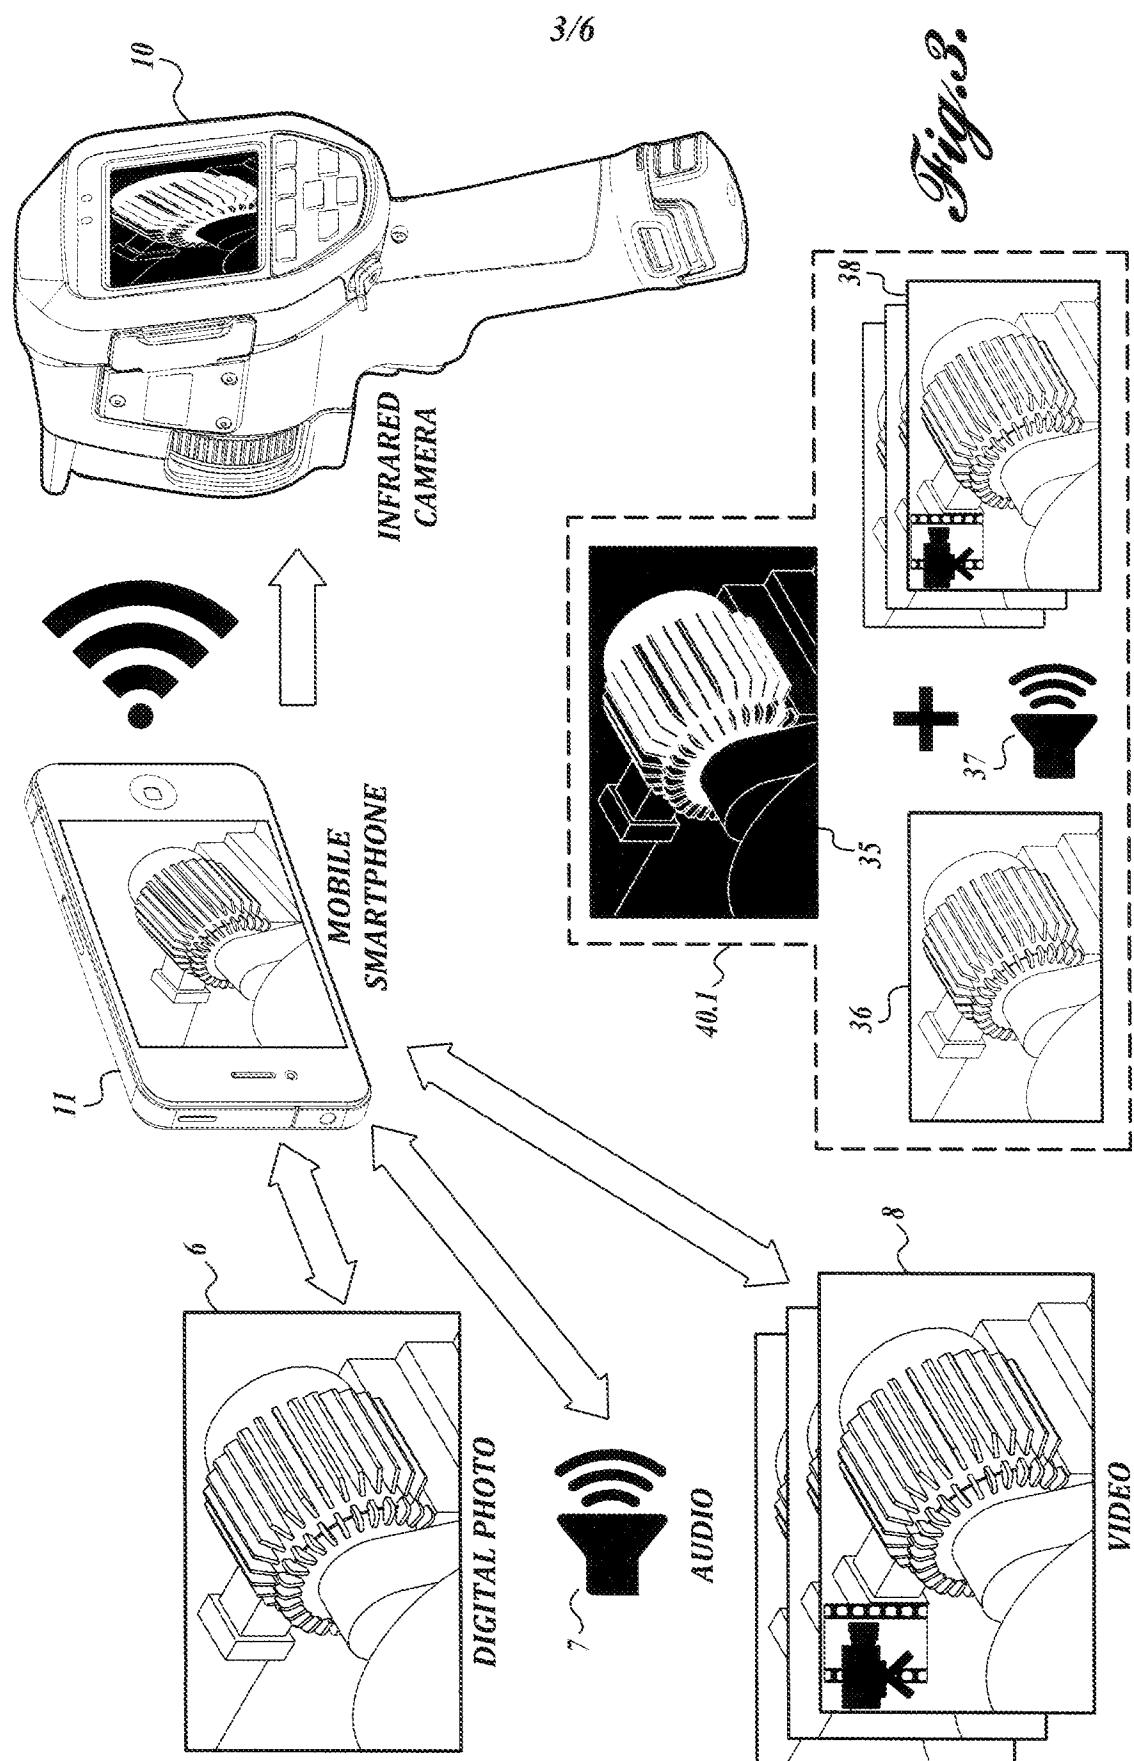

4/6

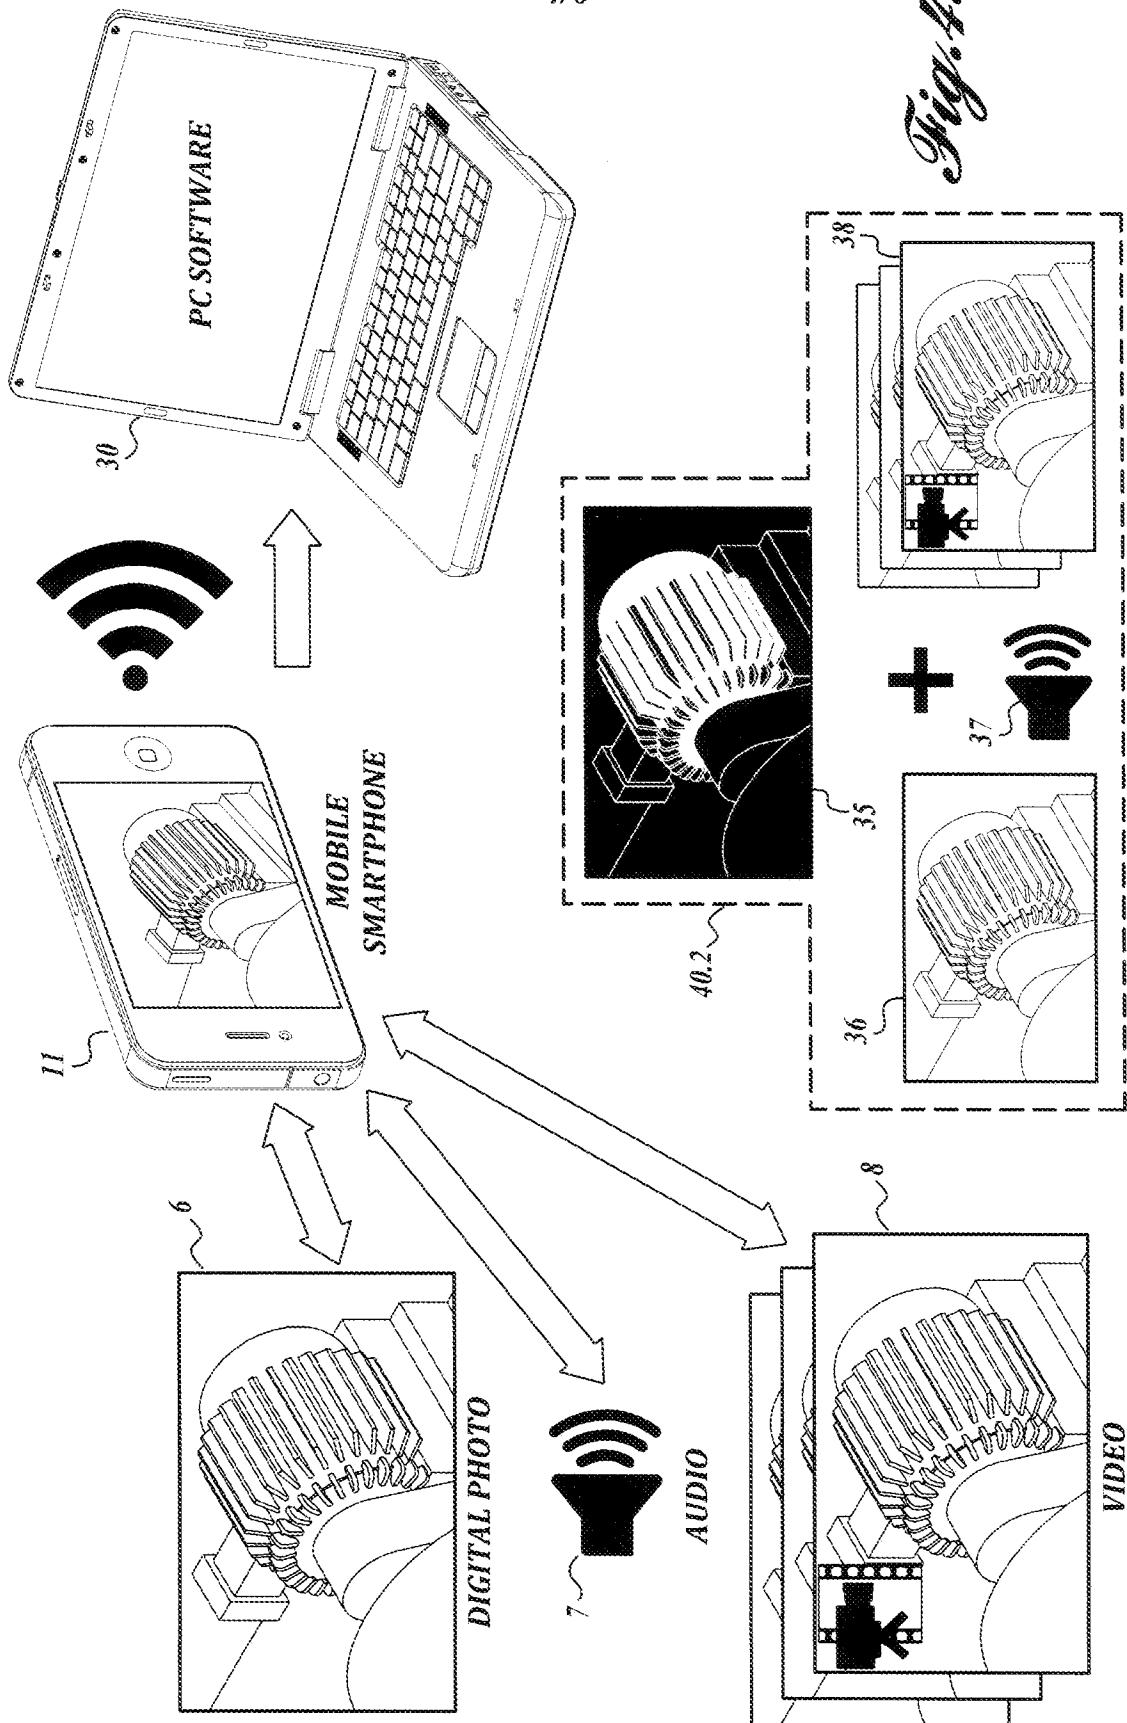

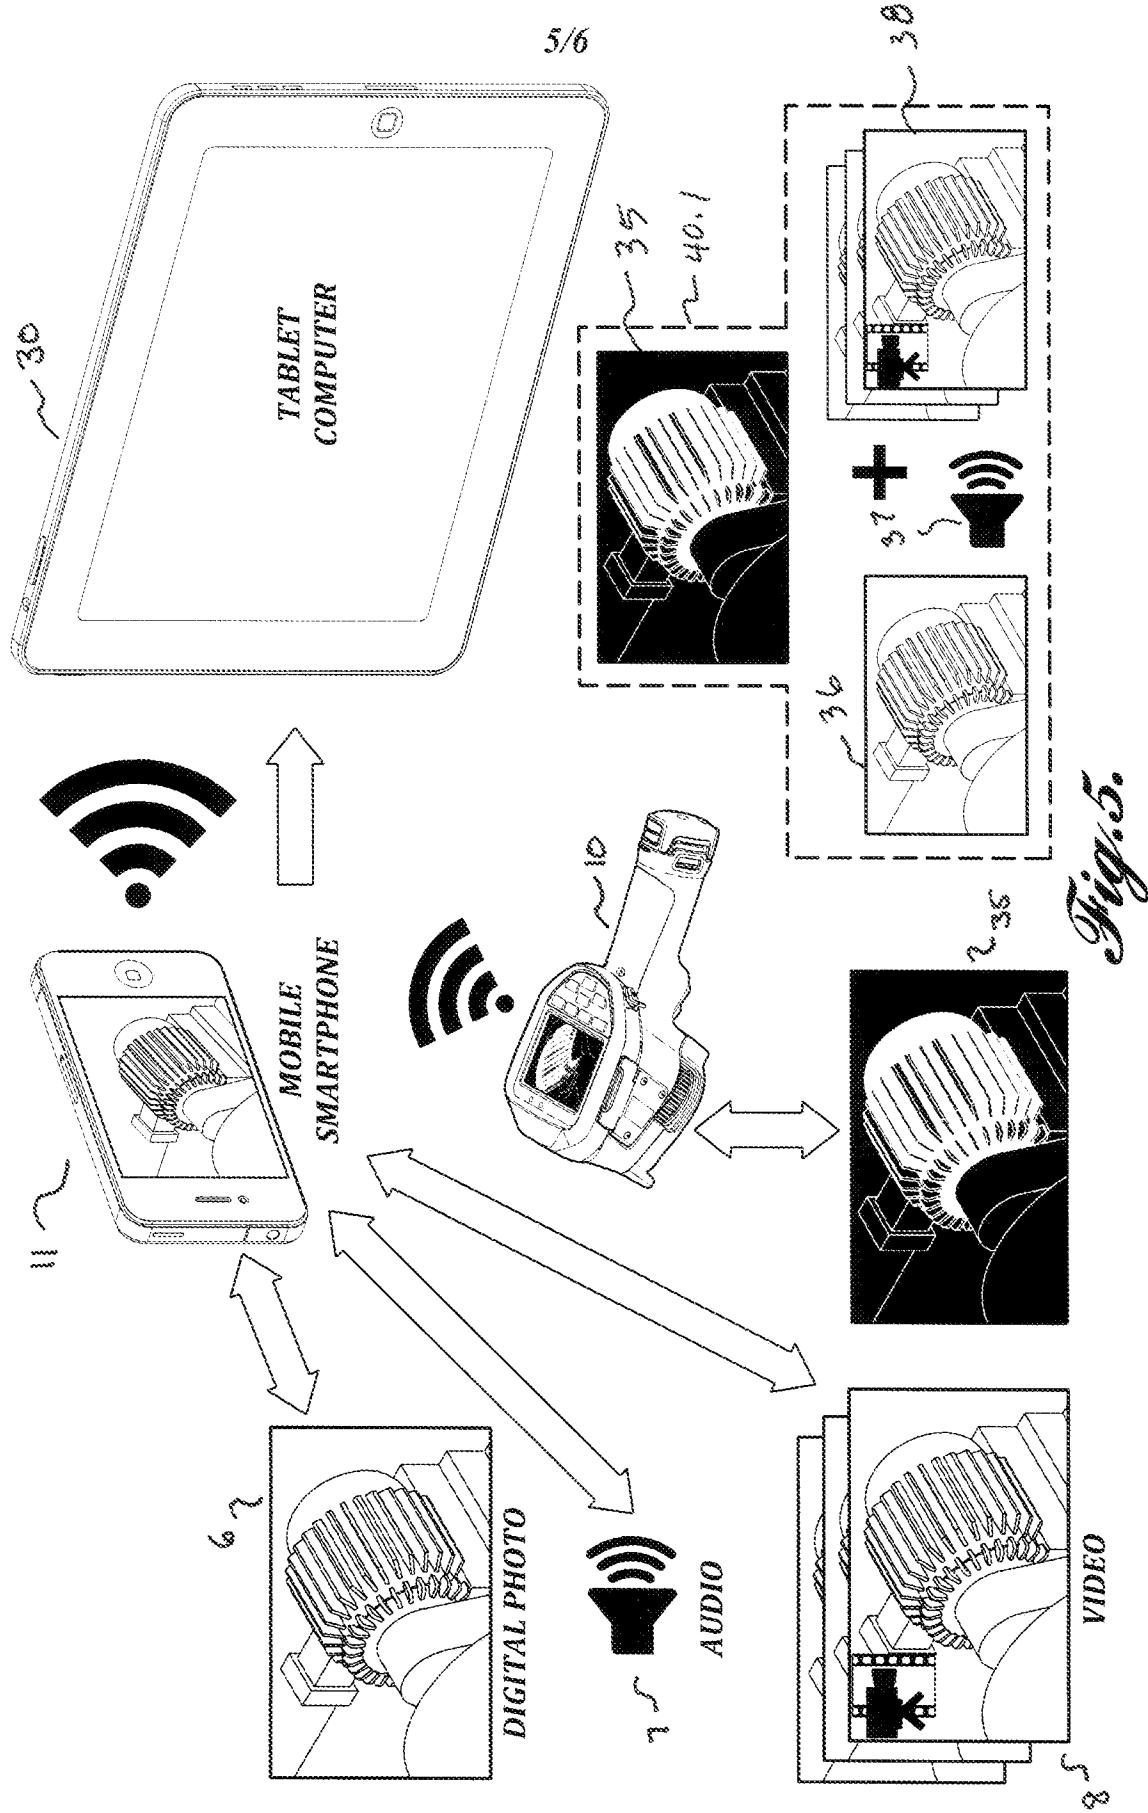

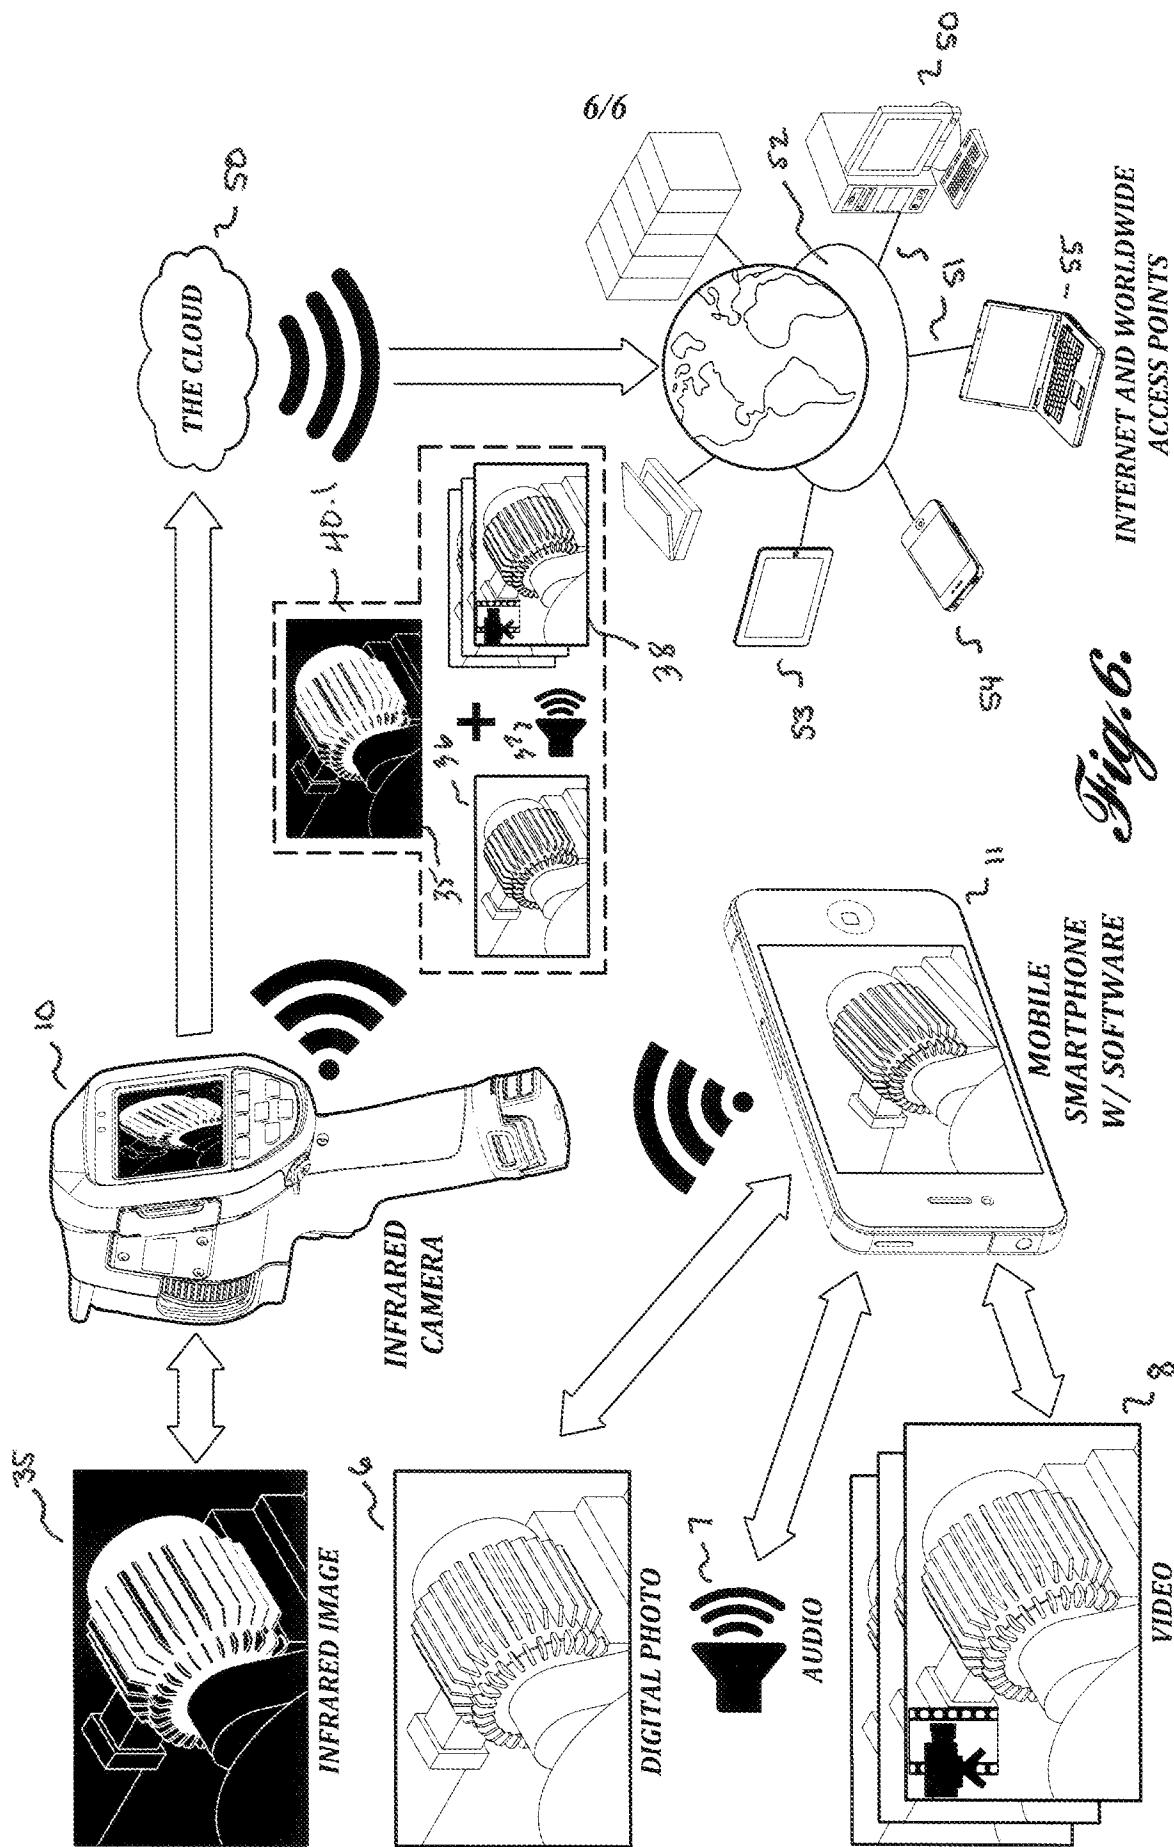

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US2014/029561

## A. CLASSIFICATION OF SUBJECT MATTER

H04N 5/225(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
H04N 5/225; H04N 5/33; G01N 25/72; G06F 17/20; G06K 9/03; H04N 5/228; G06K 19/06Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
Korean utility models and applications for utility models  
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
eKOMPASS(KIPO internal) & Keywords: infrared, image, asset, tag, folder, auxiliary, annotating, icon, wireless

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2012-0224067 A1 (MICHAEL DEVIN STUART et al.) 06 September 2012 See paragraphs [0032], [0044]–[0045]; and claims 1, 10.	1-36
A	US 5386117 A (KENNETH R. PIETY et al.) 31 January 1995 See column 2, line 34 - column 4, line 11; and claims 1, 5.	1-36
A	US 2012-0300089 A1 (LUCIANO SBAIZ et al.) 29 November 2012 See abstract; paragraphs [0038]–[0041], [0059]–[0063]; and claims 1–3, 11–12.	1-36
A	US 2008-0231719 A1 (ROBERT G. BENSON et al.) 25 September 2008 See abstract; paragraphs [0015], [0061]–[0063]; claims 1, 16; and figure 2.	1-36
A	US 2012-0047424 A1 (LEIGH M. ROTHSCHILD) 23 February 2012 See paragraphs [0017], [0022]–[0023]; claims 1, 7, 12; and figures 1, 4A–4B.	1-36

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 10 July 2014 (10.07.2014)	Date of mailing of the international search report <b>10 July 2014 (10.07.2014)</b>
Name and mailing address of the ISA/KR International Application Division Korean Intellectual Property Office 189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701, Republic of Korea Facsimile No. +82-42-472-7140	Authorized officer AHN, Jeong Hwan Telephone No. +82-42-481-8440

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2014/029561**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0224067 A1	06/09/2012	CN 102737373 A EP 2495674 A1	17/10/2012 05/09/2012
US 5386117 A	31/01/1995	US 5386117 B1 US 5637871 A WO 94-29701 A1	10/06/1997 10/06/1997 22/12/1994
US 2012-0300089 A1	29/11/2012	CN 102204238 A EP 2321953 A1 EP 2321953 B1 JP 2012-507761 A JP 5436559 B2 KR 10-2011-0066133 A WO 2010-026170 A1	28/09/2011 18/05/2011 06/11/2013 29/03/2012 05/03/2014 16/06/2011 11/03/2010
US 2008-0231719 A1	25/09/2008	US 8659664 B2	25/02/2014
US 2012-0047424 A1	23/02/2012	US 2006-0114337 A1 US 2006-0114338 A1 US 2006-0114514 A1 US 2006-0114516 A1 US 2006-0176516 A1 US 2009-0059014 A1 US 2009-0059034 A1 US 2009-0171915 A1 US 2011-0010631 A1 US 2011-0016378 A1 US 7450163 B2 US 7456872 B2 US 7475092 B2 US 7991792 B2 US 7995118 B2	01/06/2006 01/06/2006 01/06/2006 01/06/2006 10/08/2006 05/03/2009 05/03/2009 02/07/2009 13/01/2011 20/01/2011 11/11/2008 25/11/2008 06/01/2009 02/08/2011 09/08/2011