

[19]	INTELLECTUAL PROPERTY PHILIPPINES		
[12]	INVENTION PUBLICATION		
[11]	Publication Number:	12015500675	Document Code: B1
[22]	Publication Date:	18/5/2015	
[21]	Application Number:	12015500675	Document Code: A
[22]	Date Filed:	26/3/2015	
[54]	Title:	METHOD AND SYSTEM FOR TRANSMISSION MANAGEMENT OF FULL CONFIGURATION SYNCHRONIZATION BETWEEN EML-NML.	
[71]	Applicant(s):	FIBERHOME TELECOMMUNICATION TECH CO LTD	
[72]	Inventor(s):	ZHANG LIYA LIU YUE	
[30]	Priority Data:	22/7/2013 CN201310308141	
[51]	International Class 8:	H04L 12/24 20060101AFI20180709BHPH; H04L 29/06 20060101ALI20180709BHPH;	
[57]	Abstract:	Disclosed in the present invention are a method and system for transmission management of full configuration synchronization between EML (Element Management Level) and NML (Network Management Level), The present invention relates to the field of EML-NML. The system comprises a DCN (Data Communication Network), a plurality of EMSes (Element Management System) and NMSes (Network Management System) which are connected with the DCN respectively, and a shared FTP (File Transfer Protocol) server; arranged in the share FTP server are FTP interfaces which are fixedly separated, and FTP is employed as a mass data transfer protocol; the process of full configuration synchronization is divided by the NMSes into three parallel processes: a basic configuration synchronization request process, a network element cross synchronization request process and a service routing synchronization request process; a basic configuration synchronization request is sent to the EMSes, and the NMSes transfer the basic configuration synchronization request to the EMS side through interaction protocol IIOP/SOAP (Internet Inter-ORB Protocol/Simple Object Access Protocol). The present invention can avoid a large amount of network handshake interaction time, facilitate splitting XML (Extensible Markup Language) configuration files, realize a plurality of NMSes sharing configuration data, reduce full synchronization frequency between EML and NML, and improve the degree of parallelism of full configuration synchronization during big configuration data synchronization.	

performing asynchronous generation of configuration data, regularly reporting the progress and the time-out time of the next file transfer status message to NMS; after the configurations requested by NMSes have generated XML files, entering the step
5 S5.

On the basis of the said technical solution, the step S5 comprises the following steps: according to the parameters sent by NMSes, ESMes at background compresses all XML files as a data package and transfer the data package to a FTP server designated
10 by NMSes.

On the basis of the said technical solution, the step S6 comprises the following steps: after transmission of XML data package, EMSes send file transfer status message with transfer completion ratio being 100% to NMS; in this message, the
15 time-out time of the next message is written as 0; if the generation of configuration data fails, failure notice is sent to NMS through the file transfer status message.

On the basis of the said technical solution, in Step 102, the process of judging whether the file transfer status is 100%
20 completed is as follows: judging whether 100% completed file transfer status notification message is received, or the designated configuration files have existed on FTP server; so long as any of both conditions is met, it is believed that the file transfer status is 100% completed.

25 On the basis of the said technical solution, the synchronization configuration request in step 101 comprises:

(1) Using URL (Uniform Resource Locator) to designate shared FTP server and designate the name of file uploaded by EMS in URL

address;

- (2) Designate the certification information of FTP server;
- (3) Synchronization range;
- (4) List of synchronous configuration types;
- 5 (5) The requirements for storage of files include: The maximal file size, whether compressed, the compression format, whether the data of shared FTP server is used, and the time validity of configuration data.

The present invention also provides a system for transmission
10 management of full configuration synchronization between EML
(Element Management Level) and NML (Network Management
Level) which is used to realize the said method, comprising a DCN
(Data Communication Network), a plurality of EMSes (Element
Management System) and NMSes (Network Management System)
15 which are connected with the DCN respectively, characterized in that,
the system also comprises and a shared FTP (File Transfer Protocol)
server, wherein the shared FTP server is connected with the DCN,
arranged in the shared FTP server are FTP interfaces which are fixedly
separated, and FTP is employed as a mass data transfer protocol;
20 according to the duration of time consumed in data processing and
synchronization, the process of full configuration synchronization is
divided by the NMSes into three parallel processes: a basic
configuration synchronization request process, a network element
cross synchronization request process and a service routing
25 synchronization request process; a basic configuration synchronization
request is sent to the EMSes, and the NMSes transfer the basic
configuration synchronization request to the EMS side through
interaction protocol IIOP/SOAP.

As compared with the prior art, the present invention has the following advantages:

(1) The present invention adopts the information model of TMF as basic object model, the interaction protocols support IIOP(Internet
5 Inter - ORB Protocol)/ SOAP (Simple Object Access Protocol); FTP is adopted as mass data transfer protocol; the method for providing batch configuration synchronization can reduce the network handshake and interaction time.

(2) The present invention improves the format for storage of
10 XML files. According to the object types, it is defined as flat storage format. Each object defines a global positioning information in TMP, so that XML files can be respectively stored according to the object types. The storage of XML files according to object types facilitates NMSes to split the configuration files of XML, rather than the storage
15 objects in tree nested structure defined in MTOSI.

(3) The present invention realizes a plurality of NMSes sharing configuration data through shared FTP server.

(4) The present invention improves the design of XML storage format, so that one XML stores one type of object data information;
20 the present invention also standardizes the XML file designation format to support convenient splitting of XML; in addition, the data validity is inspected through XSD (XML Schemas Definition), and time mark is supported through XML file name, so as to facilitate NMSes to perform time validity check. For example, if XML files on
25 FTP server do not exceed 1 Hr, it is not necessary for NMSes to send synchronization request again, so that the frequency of full synchronization between EML-NML can be reduced.

(5) According to the duration of time consumed in data

processing and synchronization, the process of full configuration synchronization is divided by the present invention into three parallel processes: a basic configuration synchronization request process, a network element cross synchronization request process and a service
5 routing synchronization request process; in addition, through the arrangement of FTP interfaces which are fixedly separated, the present fixes the conditions for full configuration synchronization, so as to improve the degree of parallelism during full configuration synchronization between NMS/EMS and reduce the failure rate during
10 full configuration synchronization.

(6) For the file transfer status notification message defined in extended TMF, Next Expire Time is added in the message, so that the time for NMSes waiting for time-out is more reasonable.

15 **Description of attached drawings**

Fig 1 is a structure diagram of full configuration synchronization system between EML-NML in the embodiment of the present invention.

Fig 2 is a flow diagram of the method for transmission
20 management of full configuration synchronization between EML-NML in the embodiment of the present invention.

Fig 3 is the flow diagram of NMSes processing request full synchronization in the embodiment of the present invention.

Fig 4 is the flow diagram of EMSes processing synchronization
25 request in the embodiment of the present invention.

Detailed Description of Preferred Embodiments

Further detailed description on the present invention is provided

with reference to specific embodiments in combination with attached drawings.

As shown in Fig 1, the embodiment of the present invention also provides a system for transmission management of full configuration synchronization between EML (Element Management Level) and NML (Network Management Level), comprising a DCN (Data Communication Network), a plurality of EMSes (Element Management System) and NMSes (Network Management System), a shared FTP server and other management systems, which are connected with the DCN respectively; arranged in the shared FTP server are FTP interfaces which are fixedly separated, and FTP is employed as a mass data transfer protocol; according to the duration of time consumed in data processing and synchronization, the process of full configuration synchronization is divided by the NMSes into three parallel processes: a basic configuration synchronization request process, a network element cross synchronization request process and a service routing synchronization request process; a basic configuration synchronization request is sent to the EMSes, and the NMSes transfer the basic configuration synchronization request to the EMS side through interaction protocol IIOP/ SOAP.

As shown in Fig 2, the embodiment of the present invention provides a method for transmission management of full configuration synchronization between EML- NML, comprising the following steps:

S1, Network management system NMS requests full synchronization:

S2, EMS processes synchronization request; after having received the NMS full configuration synchronization request through interaction protocols such as IIOP/SOAP, judging whether to receive

this service request according to the current busy status of EMS, whether the full configuration synchronization is being processed as well as the time effectiveness of full data;

S3, EMS performs asynchronous generation of XML
5 configuration file;

S4, EMS regularly reports progress;

S5, EMS transfers XML files to shared FTP server;

S6, EMS reports the completed result.

Each of the steps is respectively described in detail as follows:

10 As shown in Fig 3, the Step S1 specifically comprises the following steps:

Step 101, NMSes send basic configuration synchronization request:

The process of full configuration synchronization is divided by
15 the NMSes into three parallel processes according to the duration of time consumed in data processing: a basic configuration synchronization request process, a network element cross synchronization request process and a service routing synchronization request process; a basic configuration synchronization request is sent
20 to the EMSes, and the NMSes transfer the following information to the EMS side through interaction protocol IIOP/SOAP:

(1) Using URL (Uniform Resource Locator) to designate shared FTP server and designate the name of file uploaded by EMS in URL address;

25 (2) Designate certification information of FTP server, such as user name and password;

(3) Synchronization range, such as whole EMS or a subnetwork and so on;

(4) List of synchronous configuration types, such as synchroniation single-disk and port, etc;

(5) The requirements for storage of files include: The maximal file size, whether compressed, the compression format, whether the data of shared FTP server is used, and the time validity of configuration data;

All the parameters(1)~(5) sent by the said interaction protocol are included in the synchronization configuration request, and the object types of basic configuration are written in the list of configuration types;

Step 102, judging whether the progress notification is timed-out or completed:

Using NT_FILE_TRANSFER_STATUS defined by TMF as the file transfer progress notification message between EMS-NMS and making the following extension: adding Next Expire Time in this notification message in the unit of Second, namely time when the next file transfer status notification message is expected to be sent; NMSes judge whether EMS side is timed out according to the Next Expire Time; if time-out, returning to step 101 and resending the basic configuration synchronization request; after time-out for many times, terminating the full configuration synchronization; if not time-out and the file transfer status completion ratio exceeds 50%, entering the step 104; when the file transfer status is 100% completed, starting the parallel processing mechanism and entering the step 103; judging whether the file transfer status is 100% completed, it is necessary to judge whether 100% completed file transfer status notification message is received, or the designated configuration files have exist on FTP server; if one of both is met, it is judged that the file transfer status is

100% completed;

Step 103, when the file transmission status is 100% completed, the parallel processing mechanism is started, and basic configuration data is processed by NMSes; this step is a background parallel
5 processing step;

Step 104, when the file transfer status completion ratio exceeds 50%, NMSes send network element crosss synchronization request;

In this step, most of the parameters of network element cross synchronization request sent by NMSes to EMSes are same as the
10 parameters of the synchronization configuration request in the step 101. Except for that network element cross and MFD FR (MatrixFlowDowmainFragment) are indicated in the list of configuration types, performing synchronization for network element cross and flow domain fragement;

15 Step 105, judging whether the progress notification is timed-out or completed; NMSes judge whether EMS side is timed out according to the time prompted in the file transfer state message; if it is timed out, returning the step 104, and resending the network element cross configuration synchronization request; when it is not timed-out and
20 the file transfer completion status completion ratio exceeds 50%, entering the step 107; when the file transfer status is 100% completed, starting the parallel processing mechanism and entering the step 106;

Step 106, when the file transmission state is 100% completed, the parallel processing mechanism is started, and network element cross
25 configuration data is processed by NMSes; this step is a background parallel processing step;

Step 107, when the file transfer status completion ratio exceeds 50%, NMSes send the service routing synchronization request;

Step 108, judging whether the progress notification is timed-out or completed; NMSes judge whether the EMS side is timed out according to the time prompted in the file transfer status message; if it is timed out, returning the step 107 and resending the service routing
5 synchronization request; when the file transfer status is 100% completed, starting the parallel processing mechanism and entering the step 109;

Step 109, when the file transmission status is 100% completed, the parallel processing mechanism is started, and service routing
10 configuration data is processed by NMSes; this step is a background parallel processing step;

As shown in Fig 4, the Step S2 specifically comprises the following steps:

Step 201, judging whether NMS utilizes the data of shared FTP
15 server, if Yes, proceeding to step 202; otherwise, proceeding to Step S3 to perform the generation of full configuration data;

Step 202, judging whether EMS is processing the full configuration synchronization of other NMSes; if Yes, proceeding to the Step 203; otherwise, proceeding to the Step 204;

20 Step 203, EMS returns the URL address of FTP file, and NMS performs configuration data processing: EMS returns the following information to NMS: (1) status: Notifying that NMS is processing configuration, (2) waiting for the time-out time of the next file transfer status notification message; (3) URL address information of target
25 FTP file; NMS waits for file transfer status notification according to the returned time-out time and inspects whether the designated configuration file exists on FTP server;

Step 204, judging whether EMS is in busy status; if Yes,

proceeding to step 205; otherwise, proceeding to Step S3 to perform the generation of full configuration data;

Step 205, EMS returns notice; after waiting time-out, NMS resends request.

5 The Step specifically comprises the following steps:

After having received NMS request, EMS starts the background parallel processing mechanism; according to the object type and range designated by NMSes, EMS generates management object in XML format; to facilitate the splitting of XML file, XML format for storage
10 of configuration data must meet the following requirements:

(1)File name: according to object types, the global configuration is divided into a plurality of XMLs for storage, and the name of compression package of all XML files is designated when NMS is sending the URL address of object FTP file; XML file name of the
15 storage object is composed of such basic elements as the name of object type, the data type, the time when the configuration data is generated as well as the sequence number for splitting of file, wherein the time format is " yyyyMMddhhmmss.x ",where yyyy represents Year, MM represents Month, dd represents date, hh represents Hour, mm
20 represents minute, ss represents second, x represents tenth of a second and is 0 in default; the format of sequence number for splitting file is [a_b], wherein a represents the sequence number of current file, b represents the total number of files after splitting, both a and b are positive integers.

25 For example: ME_Configlog_20100617110304.0_ , ME (network element) represents that the configuration information of network element object is stored in the current file; ConfigLog (configuration record) represents that the data of configuration type is

stored in this XML; 20100617110304.0 represents that this data is generated at 11'clock, 3 min, 4 second on June 17, 2010, [1_1] represents the network element configuration of the whole network is divided into one file, and this file is the first splitted file;

5 (2)File format: the files are stored according to object types, each XML files only stores the list of this type of objects, the storage format for each target XML is kept consistent with the structure defined in TMF, and the validity of data is limited through XSD;

(3)Splitting of files: since independent objects rather than nested
10 tree object structure are used for XML storage, the splitting of files can be made according to the quantity of objects;

The step S4 specifically comprises the following steps: in the asynchronous generation of configuration data, EMS regularly reports the progress as well as the time-out time of next file transfer status
15 message to NMS; after all the configurations requested by NMSes have generated XML files, proceeding to Step S5;

The step S5 specifically comprises the following steps: according to the parameters sent by NMSes, EMSes at background compress all XML files as a data package and transfer the data package to the FTP
20 server designated by NMSes.

The step S6 specifically comprises the following steps: after transmission of XML data package, EMSes send file transfer status message with transfer completion ratio being 100% to NMSes; in this message, the timed-out time of the next message is written as 0; if the
25 generation of configuration data fails, failure notice is sent to NMSes through the file transfer status message.

Those skilled in the art can make various modifications and transformations to the embodiments of the present invention. Provided

that these modifications and transformations fall within the claims of the present invention and the range of equivalent technology, these modifications and transformations are also within the protection range of the present invention.

5 The contents which are not described in detail in this specification fall within the prior art for those skilled in the art.

10

15

20

METHOD AND SYSTEM FOR TRANSMISSION MANAGEMENT OF FULL CONFIGURATION SYNCHRONIZATION BETWEEN EML-NML

Field of the Invention

The present invention relates to the technical field of
5 EML-NML(Element Management Level - Network Management
Level), in particular to method and system for transmission
management of full configuration synchronization between
EML-NML.

10 Background of the prior art

In EML-NML management system, NMS (Network Management
System) is required to perform synchronization of full network
configuration data of EMS (Element Management System). Since the
range of devices under the management of EMS system, the data
15 quantity in need of synchronization is huge. In such case, the s
efficiency synchronization is particularly important.

At present, there are two full configuration synchronization
solutions in the industry, one is scheduling through fine granulation
interfaces, such as get All Managed Element; the other is that all the
20 configurations are transferred through bypass interface FTP (File
Transfer Protocol), such as get Inventory(get inventory configuration)
method put forward by MTOSI(Multi - Technology Operations
System Interface).

In these two solutions, the former includes the interface based
25 synchronization configuration data in the MTNM(Multi - Technology
Network Management)/ MTOSI standard put forward on TMF (Tele
Management Forum). The deficiencies of this former solution consists

in that, when configuration becomes big, very high frequency of scheduling between NMS-EMS is required, and excessive time is spent in the network handshake interaction; at present, the latter solution also includes the get inventory configuration method defined
5 in MTOSI . This interface is intended to generate nested tree structure XML (Extensible Markup Language) based on the configuration data and transfer the compressed data to NMS. This interface can significantly reduce the network handshake time. However, the configuration data to be get by this method generates a XML file in
10 tree nested format, so that in the process of getting whole network configuration, the XML file is huge, leading to slow NMSes resolution and difficulties in processing; in addition, when NMSes request splitting XML into a plurality of files according to appropriate size, it is difficult to realize this request on EMS side. The method of
15 getting inventory configuration as provided by MTOSI allows NMSes to randomly combine synchronous entity object types, so that it is difficult for the service provider- EMSes to realize the optimal parallel processing under multiple designated conditions, leading to low efficiency, while there is no solution describing the sharing of
20 configuration data.

The existing two full configuration synchronization solutions involve the following deficiencies:

- (1) The method based on interface synchronization configuration data requires excessive network handshake interaction time.
- 25 (2) The method of getting inventory configuration as provided by MTOSI does not support convenient splitting of XML files.
- (3) In the method of getting inventory configuration as provided by MTOSI, a plurality of NMSes fail to share configuration data.

(4) The method of getting inventory configuration as provided by MTOSI features excessively flexible synchronization conditions, which is not convenient to improve the degree of parallelism during full configuration synchronization.

5

Summary of the Invention

With view of the deficiencies of the prior art, it is the technical objective of the present invention to provide a method and system for transmission management of full configuration synchronization between EML (Element Management Level) and NML (Network Management Level),so as to avoid a large amount of network handshake interaction time, facilitate splitting XML (Extensible Markup Language) configuration files, realize a plurality of NMSes sharing configuration data, reduce full synchronization frequency between EML and NML, fix the conditions within the range of synchronization configuration and improve the degree of parallelism of full configuration synchronization during big configuration data synchronization.

The present invention provides a method for transmission management of full configuration synchronization between EML-NML, comprising the following steps:

S1, Network management system NMS requests full synchronization:

Step 101, NMSes send basic configuration synchronization request:

The process of full configuration synchronization is divided by the NMSes into three parallel processes according to the duration of time consumed in data processing: a basic configuration

synchronization request process, a network element cross synchronization request process and a service routing synchronization request process; a basic configuration synchronization request is sent to the EMSes, and the NMSes transfer the basic configuration synchronization request to the EMS side through interaction protocol IIOP/SOAP.

Step 102, judging whether the progress notification is timed-out or completed: using the file transfer status notification message defined by TMF as a file transfer progress notification message between EMS-NMS and making the following extension: adding the time-out time of next notification in this notification message, namely, the time when the next file transmission status notification message is expected to transfer; NMSes judge whether EMS side is timed out according to the time-out time of the next notification; in case of time-out, returning step 101 and resending the basic configuration synchronization request; after time-out for several times, terminating the full configuration synchronization; When there is no time-out and the file transfer status completion ratio exceeds 50%, entering the step 104; when the file transfer status is 100% completed, starting the parallel processing mechanism and entering the step 103;

Step 103, when the file transmission state is 100% completed, the parallel processing mechanism is started, and basic configuration data is processed by NMSes;

When the file transfer status completion ratio exceeds 50, NMSes send network element cross synchronization request;

Step 105, judging whether the progress notification is timed-out or completed; NMSes judge whether EMS side is timed out according to the time prompted in the file transfer state message; if it is timed

out, returning the step 104, and resending the network element cross configuration synchronization request; when it is not timed-out and the file transfer completion status completion ratio exceeds 50%, entering the step 107; when the file transfer status is 100% completed,
5 starting the parallel processing mechanism and entering the step 106;

Step 106, when the file transmission state is 100% completed, the parallel processing mechanism is started, and network element cross configuration data is processed by NMSes;

Step 107, when the file transfer status completion ratio exceeds
10 50%, NMSes send the service routing synchronization request;

Step 108, judging whether the progress notification is timed-out or completed; NMSes judge whether the EMS side is timed out according to the time prompted in the file transfer status message; if it is timed out, returning the step 107 and resending the service routing
15 synchronization request; when the file transfer status is 100% completed, starting the parallel processing mechanism and entering the step 109;

Step 109, when the file transfer status is 100% completed, the parallel processing mechanism is started, and service routing
20 configuration data is processed by NMSes;

S2, EMS processes synchronization request; after having received the NMS full configuration synchronization request through interaction protocols such as IIOP/SOAP, judging whether to receive this service request according to the current busy status of EMS,
25 whether the full configuration synchronization is being processed as well as the time effectiveness of full data;

S3, EMS performs asynchronous generation of XML configuration file;

S4, EMS regularly reports progress;

S5, EMS transfers XML files to shared FTP server;

S6, EMS reports the completed result.

On the basis of the said technical solution, the step S2
5 comprises the following specific steps:

Step 201, judging whether NMS utilizes the data of shared FTP server, If Yes, proceeding to step 202; otherwise, proceeding to Step S3 to perform the generation of full configuration data;

Step 202, judging whether EMS is processing the full
10 configuration synchronization of other NMSes; If Yes, proceeding to the Step 203; otherwise, proceeding to the Step 204;

Step 203, EMS returns the URL address of FTP file, and NMS performs configuration data processing: EMS returns the following information to NMS: (1) status: notifying that NMS is processing
15 configuration, (2) waiting for the time-out time of the next file transfer status notification message; (3) URL address information of target FTP file; NMS waits for file transfer status notification according to the returned time-out time and inspects whether the designated configuration file exists on FTP server;

20 Step 204, judging whether EMS is in busy status; if Yes, proceeding to step 205; otherwise, proceeding to Step S3 to perform the generation of full configuration data;

Step 205, EMS returns notice; after waiting time-out, NMS resends request.

25 On the basis of the said technical solution, the step 3 comprises the following specific steps:

After having received NMS request, EMS starts background parallel processing mechanism; according to the object type and range

designated by NMSes, EMS generates management object in XML format, while XML format for storage of configuration data meets the following requirements:

(1) File name: according to object types, the global configuration is divided into a plurality of XMLs for storage, and the name of the package of all XML files is designated when NMS is sending the URL address of target FTP file; as the storage object, XML file name is composed of such basic elements as the name of object type, the data type, the time when the configuration data is generated as well as the file splitting sequence number;

(2) File format: the files are stored according to object types, each XML files only stores the list of this type of objects, the storage format for each target XML is kept consistent with the structure defined in TMF, and the validity of data is limited through XSD;

(3) Performing the splitting of files according to the quantity of objects.

On the basis of the said technical solution, the time format in the XML file name of the said storage object is "yyyyMMddhhmmss.x", wherein yyyy represents Year, MM represents Month, dd represents date, hh represents Hour, mm represents minute, ss represents second, x represents tenth of a second and is 0 in default; the format of sequence number for splitting file is [a_b], wherein a represents the sequence number of current file, b represents the total number of files after splitting, both a and b are positive integers.

On the basis of the said technical solution, the step S4 comprises the following steps: in the process when EMS

Claims:

1. A method for transmission management of full configuration synchronization between EML (Element Management Level) and NML (Network Management Level), characterized in that, comprising
5 the following steps:

S1, Network management system NMS requests full synchronization:

Step 101, NMSes send basic configuration synchronization request:

10 The process of full configuration synchronization is divided by the NMSes into three parallel processes according to the duration of time consumed in data processing and s: a basic configuration synchronization request process, a network element cross synchronization request process and a service routing synchronization
15 request process; a basic configuration synchronization request is sent to the EMSes, and the NMSes transfer the basic configuration synchronization request to the EMS side through interaction protocol IIOP/SOAP (Internet Inter-ORB Protocol/Simple Object Access Protocol).

20 Step 102, judging whether the progress notification is time-out or completed: using the file transfer status notification message defined by TMF as a file transfer progress notification message between EMS-NMS and making the following extension: adding the time-out time of next notification in this notification message, namely, the time

when the next file transmission status notification message is expected to transfer; NMSes judge whether EMS side is timed out according to the time-out time of the next notification; In case of time-out, returning step 101 and resending the basic configuration
5 synchronornization request; after time-out for several times, terminating the full configuration synchronization;

When there is no time-out and the file transfer status completion ratio exceeds 50%, entering the step 104; when the file transfer status is 100% completed, starting the parallel processing mechanism and
10 entering the step 103;

Step 103, when the file transmission status is 100% completed, the parallel processing mechanism is started, and basic configuration data is processed by NMSes;

Step 104, when the file transfer status completion rate exceeds
15 50, NMSes send network element crosss synchronization request;

Step 105, judging whether the progress notification is timed-out or completed; NMSes judge whether EMS side is timed out according to the time prompted in the file transfer status message; if it is timed out, returning the step 104, and resending the network element cross
20 configuration synchronization request; when it is not timed-out and the file transfer completion status completion rate exceeds 50%, entering the step 107; when the file transfer status is 100% completed, starting the parallel processing mechanism and entering the step 106;

Step 106, when the file transmission status is 100% completed,
25 the parallel processing mechanism is started, and network element cross configuration data is processed by NMSes;

Step 107, when the file transfer status completion ratio exceeds 50%, NMSes send the service routing synchronization request;

Step 108, judging whether the progress notification is timed-out or completed; NMSes judge whether the EMS side is timed out according to the time prompted in the file transfer status message; if it is timed out, returning the step 107 and resending the service routing synchronization request; when the file transfer status is 100% completed, starting the parallel processing mechanism and entering the step 109;

Step 109, when the file transfer status is 100% completed, the parallel processing mechanism is started, and service routing configuration data is processed by NMSes;

S2, EMS processes synchronization request; after having received the NMS full configuration synchronization request through interaction protocols such as IIOP/SOAP, judging whether to receive this service request according to the current busy status of EMS, whether the full configuration synchronization is being processed as well as the time effectiveness of full data;

S3, EMS performs asynchronous generation of XML configuration file;

S4, EMS regularly reports progress;

S5, EMS transfers XML files to shared FTP server;

S6, EMS reports the completed result.

2. The method for transmission management of full configuration synchronization between EML- NML of claim 1, characterized in that, the Step S2 comprises the following steps:

Step 201, judging whether NMS utilizes the data of shared FTP server, if Yes, proceeding to step 202; otherwise, proceeding to Step

S3 to perform the generation of full configuration data;

Step . 202, judging whether EMS is processing the full configuration synchronization of other NMSes; if Yes, proceeding to the Step 203; otherwise, proceeding to the Step 204;

5 Step 203, EMS returns the URL address of FTP file, and NMS performs configuration data processing: EMS returns the following information to NMS: (1) status: notifying that NMS is processing configuration, (2) waiting for the time-out time of the next file transfer status notification message; (3) URL address information of object
10 FTP file; NMS waits for file transfer status notification according to the returned time-out time and inspects whether the designated configuration file exists on FTP server;

Step . 204, judging whether EMS is in busy status; if Yes, proceeding to step 205; otherwise, proceeding to Step S3 to perform
15 the generation of full configuration data;

Step 205, EMS returns notice; after waiting time-out, NMS resends request.

3. The method for transmission management of full configuration synchronization between EML- NML of claim 2, characterized in that,
20 the Step S3 comprises the following steps:

After having received NMS request, EMS starts background parallel processing mechanism; according to the object type and range designated by NMSes, EMS generates management object in XML format, while XML format for storage of configuration data meets the
25 following requirements:

(1)File name: according to object types, the global configuration is divided into a plurality of XMLs for storage, and the name of the package of all XML files is designated when NMS is sending the URL

address of object FTP file; as the storage object, XML file name is composed of such basic elements as the name of object type, the data type, the time when the configuration data is generated as well as the file splitting sequence number;

5 (2)File format: the files are stored according to object types, each XML files only stores the list of this type of objects, the storage format for each object XML is kept consistent with the structure defined in TMF, and the validity of data is limited through XSD;

(3)Performing the splitting of files according to the quantity of
10 objects.

4. The method for transmission management of full configuration synchronization between EML-NML of claim 3, characterized in that, comprising the following steps: the time format in the XML file name of the said storage object is " yyyyMMddhhmmss.x ", wherein yyyy
15 represents Year, MM represents Month, dd represents date, hh represents Hour, mm represents minute, ss represents second, x represents tenth of a second and is 0 in default; the format of sequence number for splitting file is [a_b], wherein a represents the sequence number of current file, b represents the total number of files after
20 splitting, both a and b are positive integers.

5. The method for transmission management of full configuration synchronization between EML-NML of claim 3, characterized in that, the step S4 comprises the following steps: in the process when EMS performing asynchronous generation of configuration data, regularly
25 reporting the progress and the time-out time of the next file transfer status message to NMS; after the configurations requested by NMSes have generated XML files, entering the step S5.

6. The method for transmission management of full configuration

synchronization between EML-NML of claim 5, characterized in that, the step S5 comprises the following steps: according to the parameters sent by NMSes, ESMes at background compresses all XML files into a data package and transfers this data package to FTP server
5 designated by NMSes.

7. The method for transmission management of full configuration synchronization between EML-NML of claim 6, characterized in that, the step S6 comprises the following steps: after transmission of XML data package, EMSes send file transfer status message with transfer
10 completion ratio being 100% to NMSes; in this message, the time-out time of the next message is written as 0; if the generation of configuration data fails, failure notice is sent to NMSes through the file transfer status message.

8. The method for transmission management of full configuration
15 synchronization between EML-NML as disclosed in claim 1, characterized in that, in Step 102, the process of judging whether the file transfer status is 100% completed is as follows: judging whether 100% completed file transfer status notification message is received, or the designated configuration files have existed on FTP server; so
20 long as any of both conditions is met, it is believed that the file transfer status is 100% completed.

9. The method for transmission management of full configuration synchronization between EML- NML as disclosed in claim 1, characterized in that, the synchronization configuration request in the
25 step 101 comprises:

(1)Using URL (Uniform Resource Locator) to designate shared FTP server and designate the name of file uploaded by EMS in URL address;

(2) Designating the certification information of FTP server;

(3) Synchronization range;

(4) List of synchronous configuration types;

(5) The requirements for storage of files include: the maximal file
5 size, whether compressed, the compression format, whether the data
of shared FTP server is used, and the time validity of configuration
data.

10 10. A system for transmission management of full configuration
synchronization between EML (Element Management Level) and
NML (Network Management Level) which is used to realize the
method disclosed in claim 1, comprising a DCN (Data
Communication Network), a plurality of EMSes (Element
Management System) and NMSes (Network Management System)
which are connected with the DCN respectively, characterized in that,
15 the system also comprises and a shared FTP (File Transfer Protocol)
server, wherein the shared FTP server is connected with the DCN,
arranged in the shared FTP server are FTP interfaces which are fixedly
separated, and FTP is employed as a mass data transfer protocol;
according to the duration of time consumed in data processing and
20 synchronization, the process of full configuration synchronization is
divided by the NMSes into three parallel processes: a basic
configuration synchronization request process, a network element
cross synchronization request process and a service routing
synchronization request process; a basic configuration synchronization
25 request is sent to the EMSes, and the NMSes transfer the basic
configuration synchronization request to the EMS side through
interaction protocol IIOP/SOAP (Internet Inter-ORB Protocol/Simple
Object Access Protocol).

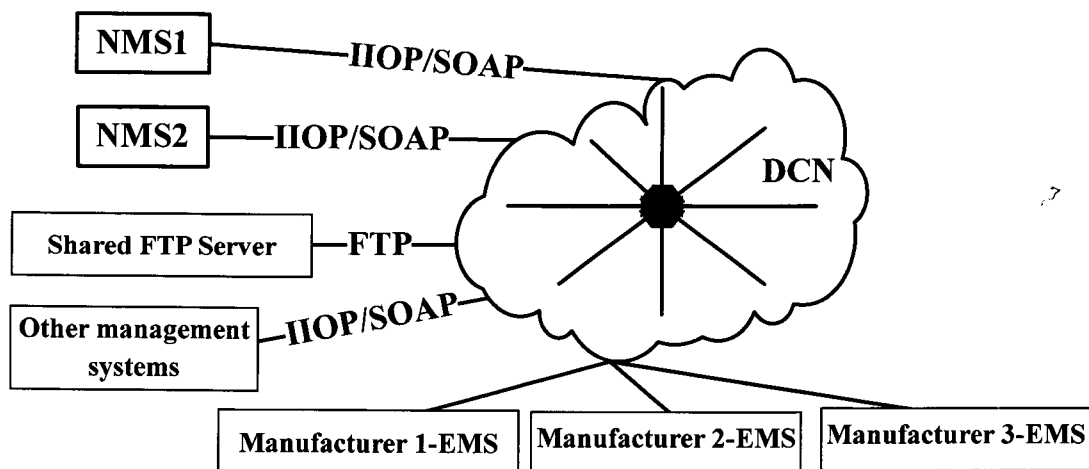



Figure 1

FIBERHOME TELECOMMUNICATION
TECHNOLOGIES CO., LTD.
Applicant

By:


Dabertte Jemimah B. Sanchez
Authorized Representative

2018 JUN -4 PM 2:46
TELECOM FIBER
TECHNOLOGIES CO., LTD.

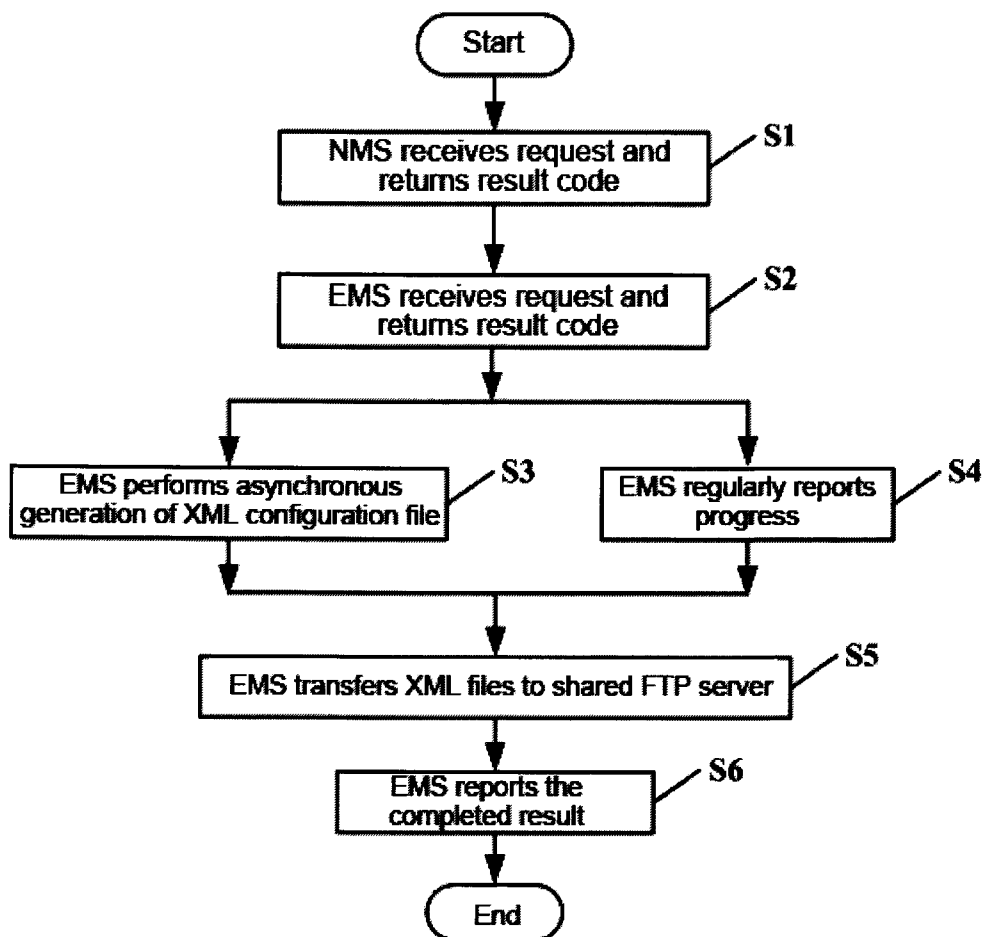



Fig 2

FIBERHOME TELECOMMUNICATION
TECHNOLOGIES CO., LTD.

Applicant

By:


Dabette Jenimah B. Sanchez
Authorized Representative

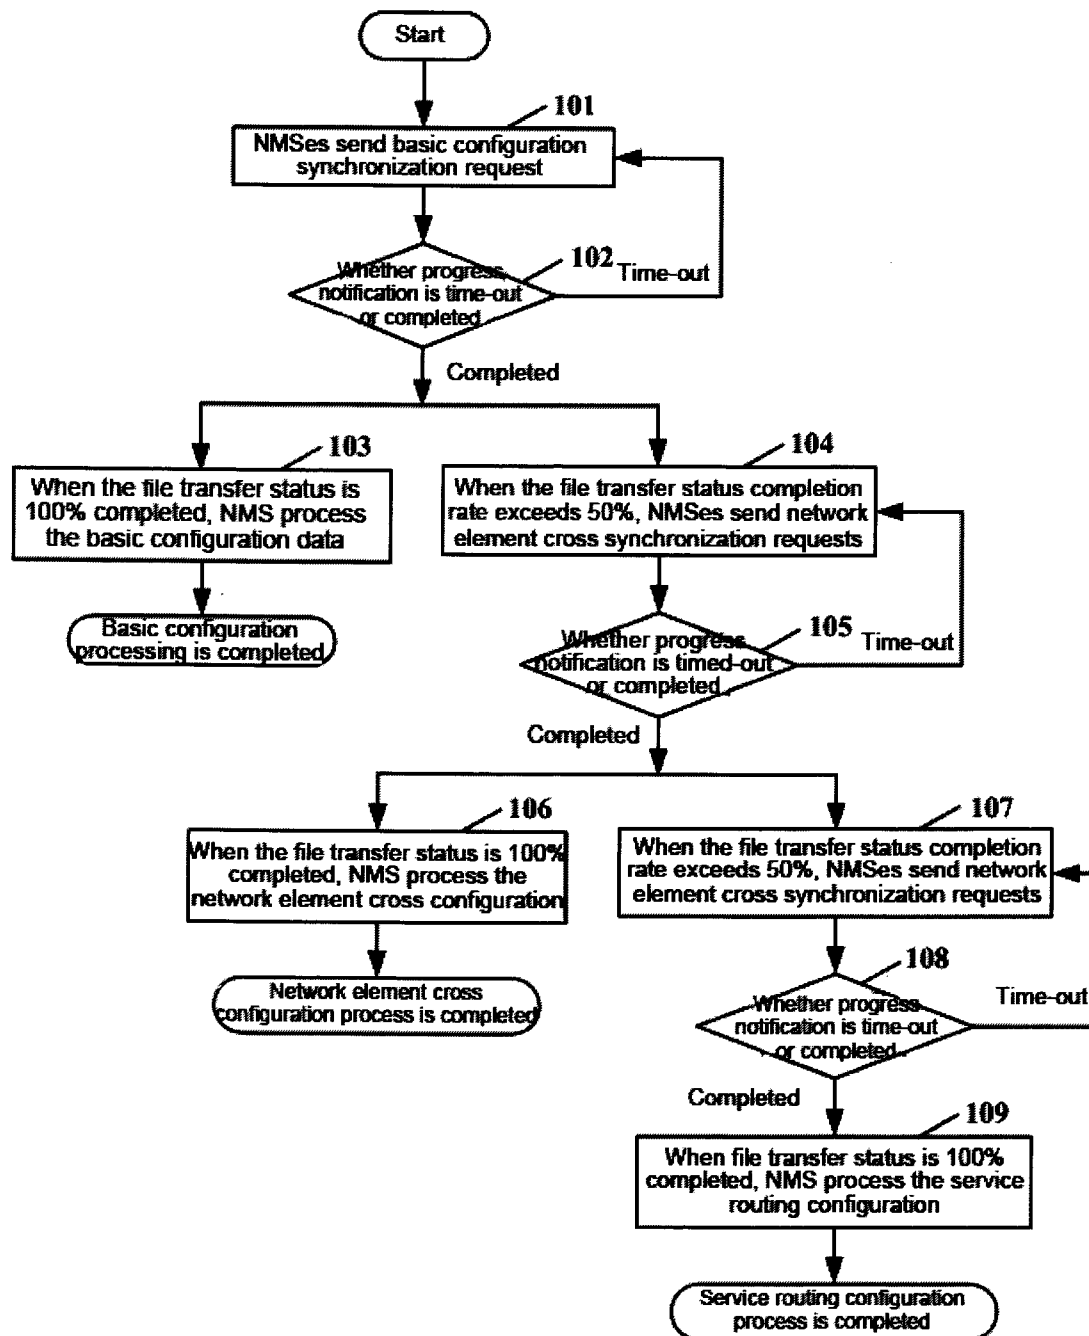


Fig 3

FIBERHOME TELECOMMUNICATION
TECHNOLOGIES CO., LTD.

Applicant

By:


Daberte Jemigan B. Sanchez
Authorized Representative

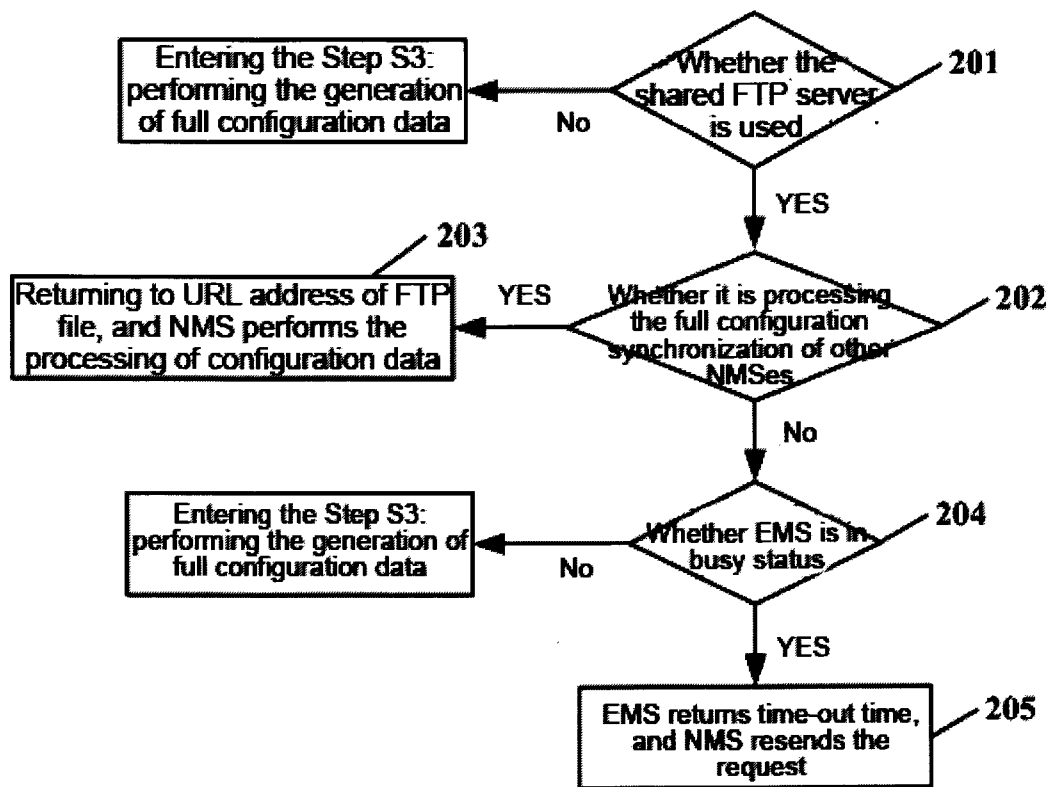



Fig 4

FIBERHOME TELECOMMUNICATION
TECHNOLOGIES CO., LTD.
Applicant

By:


Daberte Jemimah B. Sanchez
Authorized Representative

2018 JUN -6 PM 2:46

RECEIVED

TELECOMMUNICATIONS AUTHORITY