




(86) Date de dépôt PCT/PCT Filing Date: 1995/04/18
(87) Date publication PCT/PCT Publication Date: 1995/11/02
(45) Date de délivrance/Issue Date: 2004/03/30
(85) Entrée phase nationale/National Entry: 1996/08/07
(86) N° demande PCT/PCT Application No.: DK 1995/000160
(87) N° publication PCT/PCT Publication No.: 1995/029138
(30) Priorité/Priority: 1994/04/21 (459/94) DK

(51) Cl.Int.⁶/Int.Cl.⁶ C04B 7/44
(72) Inventeur/Inventor:
HUNDEBØL, SØREN, DK
(73) Propriétaire/Owner:
F.L. SMIDTH & CO. A/S, DK
(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : PROCEDE DE REGULATION DE LA TEMPERATURE D'UN FOUR
(54) Title: METHOD FOR CONTROLLING THE TEMPERATURE IN A KILN

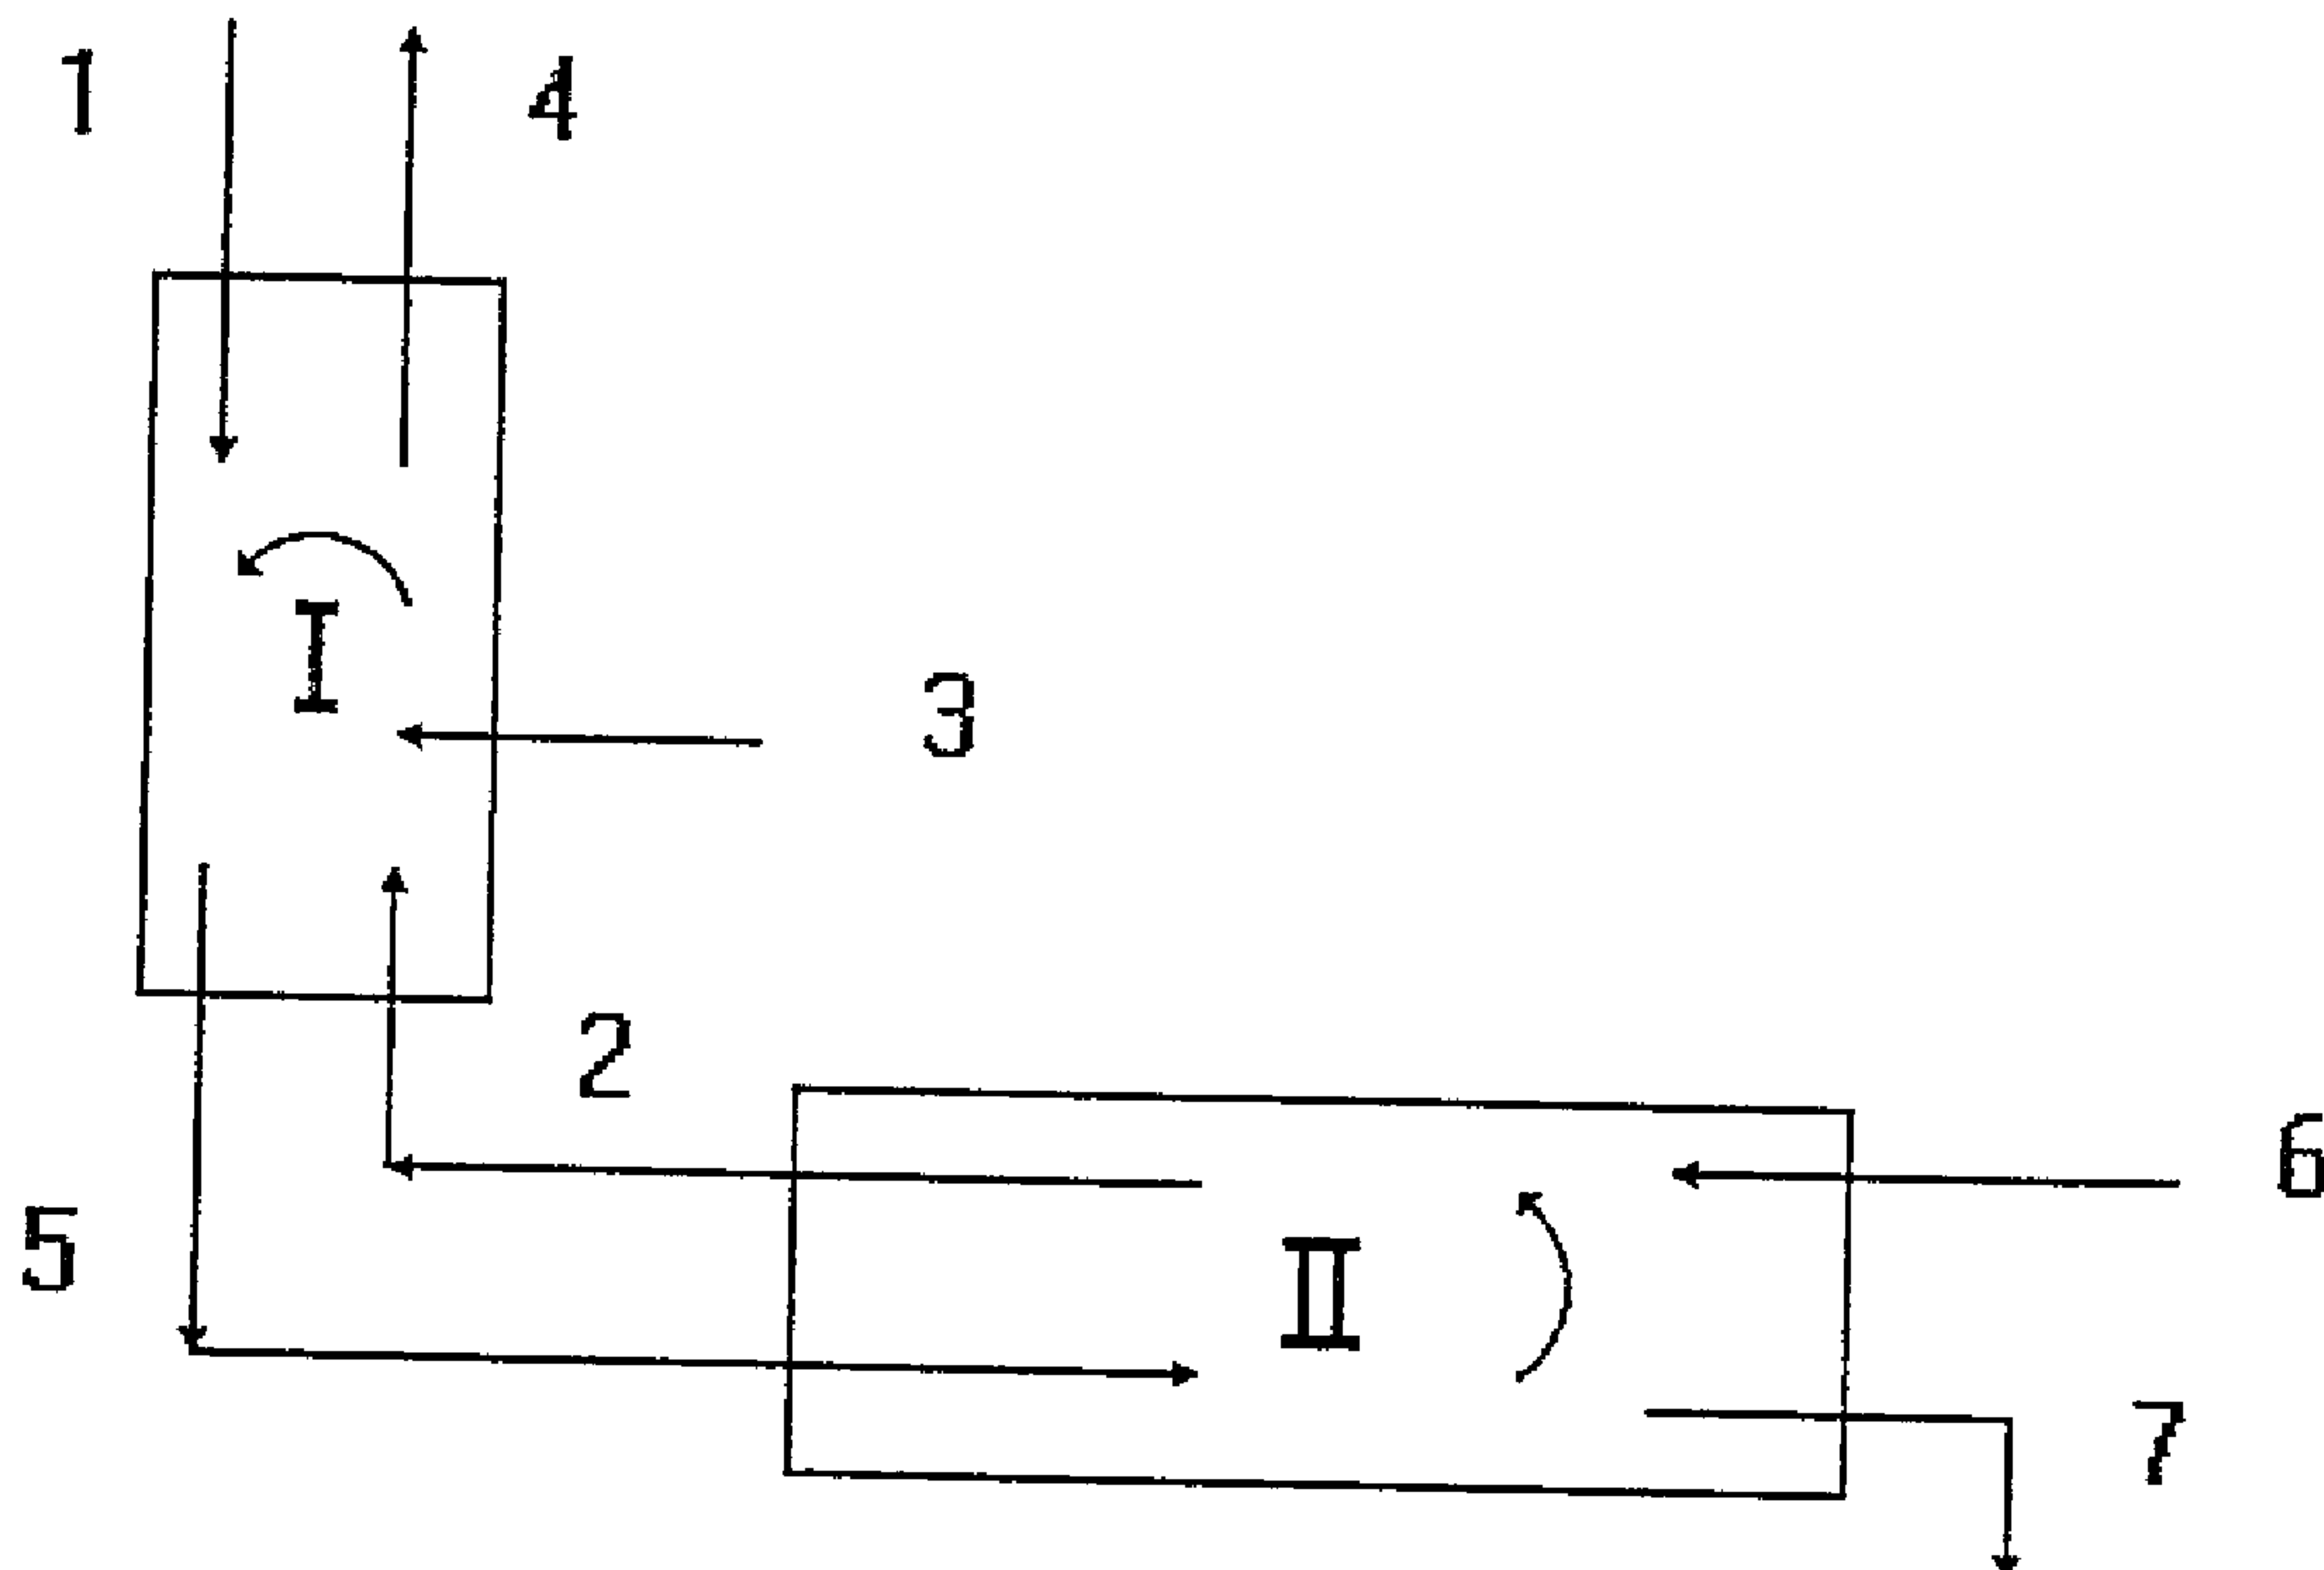

(57) **Abrégé/Abstract:**

The invention relates to a method for controlling the temperature in a kiln in which cement clinker is manufactured, with a burning zone temperature within the range 1100-1500 °C. This invention makes it possible to control the temperature in the kiln, and hence to control the manufacture of the clinker which is produced in the cement kiln, while simultaneously reducing the NO_x-emission of the kiln to a minimum. By the method according to the invention, a calculation is made of the sulphur evaporation in the kiln, thereby obtaining a measure of the instantaneous temperature in the burning zone. The evaporation factor is calculated on the basis of measurements of the sulphur content in the cyclone material which passes to the kiln or a measurement of the sulphur content in the exit gases out of the kiln.






INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C04B 7/44	A1	(11) International Publication Number: WO 95/29138 (43) International Publication Date: 2 November 1995 (02.11.95)
(21) International Application Number: PCT/DK95/00160 (22) International Filing Date: 18 April 1995 (18.04.95) (30) Priority Data: 459/94 21 April 1994 (21.04.94) DK (71) Applicant (for all designated States except US): F.L. SMIDTH & CO. A/S [DK/DK]; Vigerslev Allé 77, DK-2500 Valby (DK). (72) Inventor; and (75) Inventor/Applicant (for US only): HUNDEBØL, Søren [DK/DK]; Vigerslev Allé 77, DK-2500 Valby (DK).		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TM, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG). Published <i>With international search report.</i> 2182903

(54) Title: METHOD FOR CONTROLLING THE TEMPERATURE IN A KILN

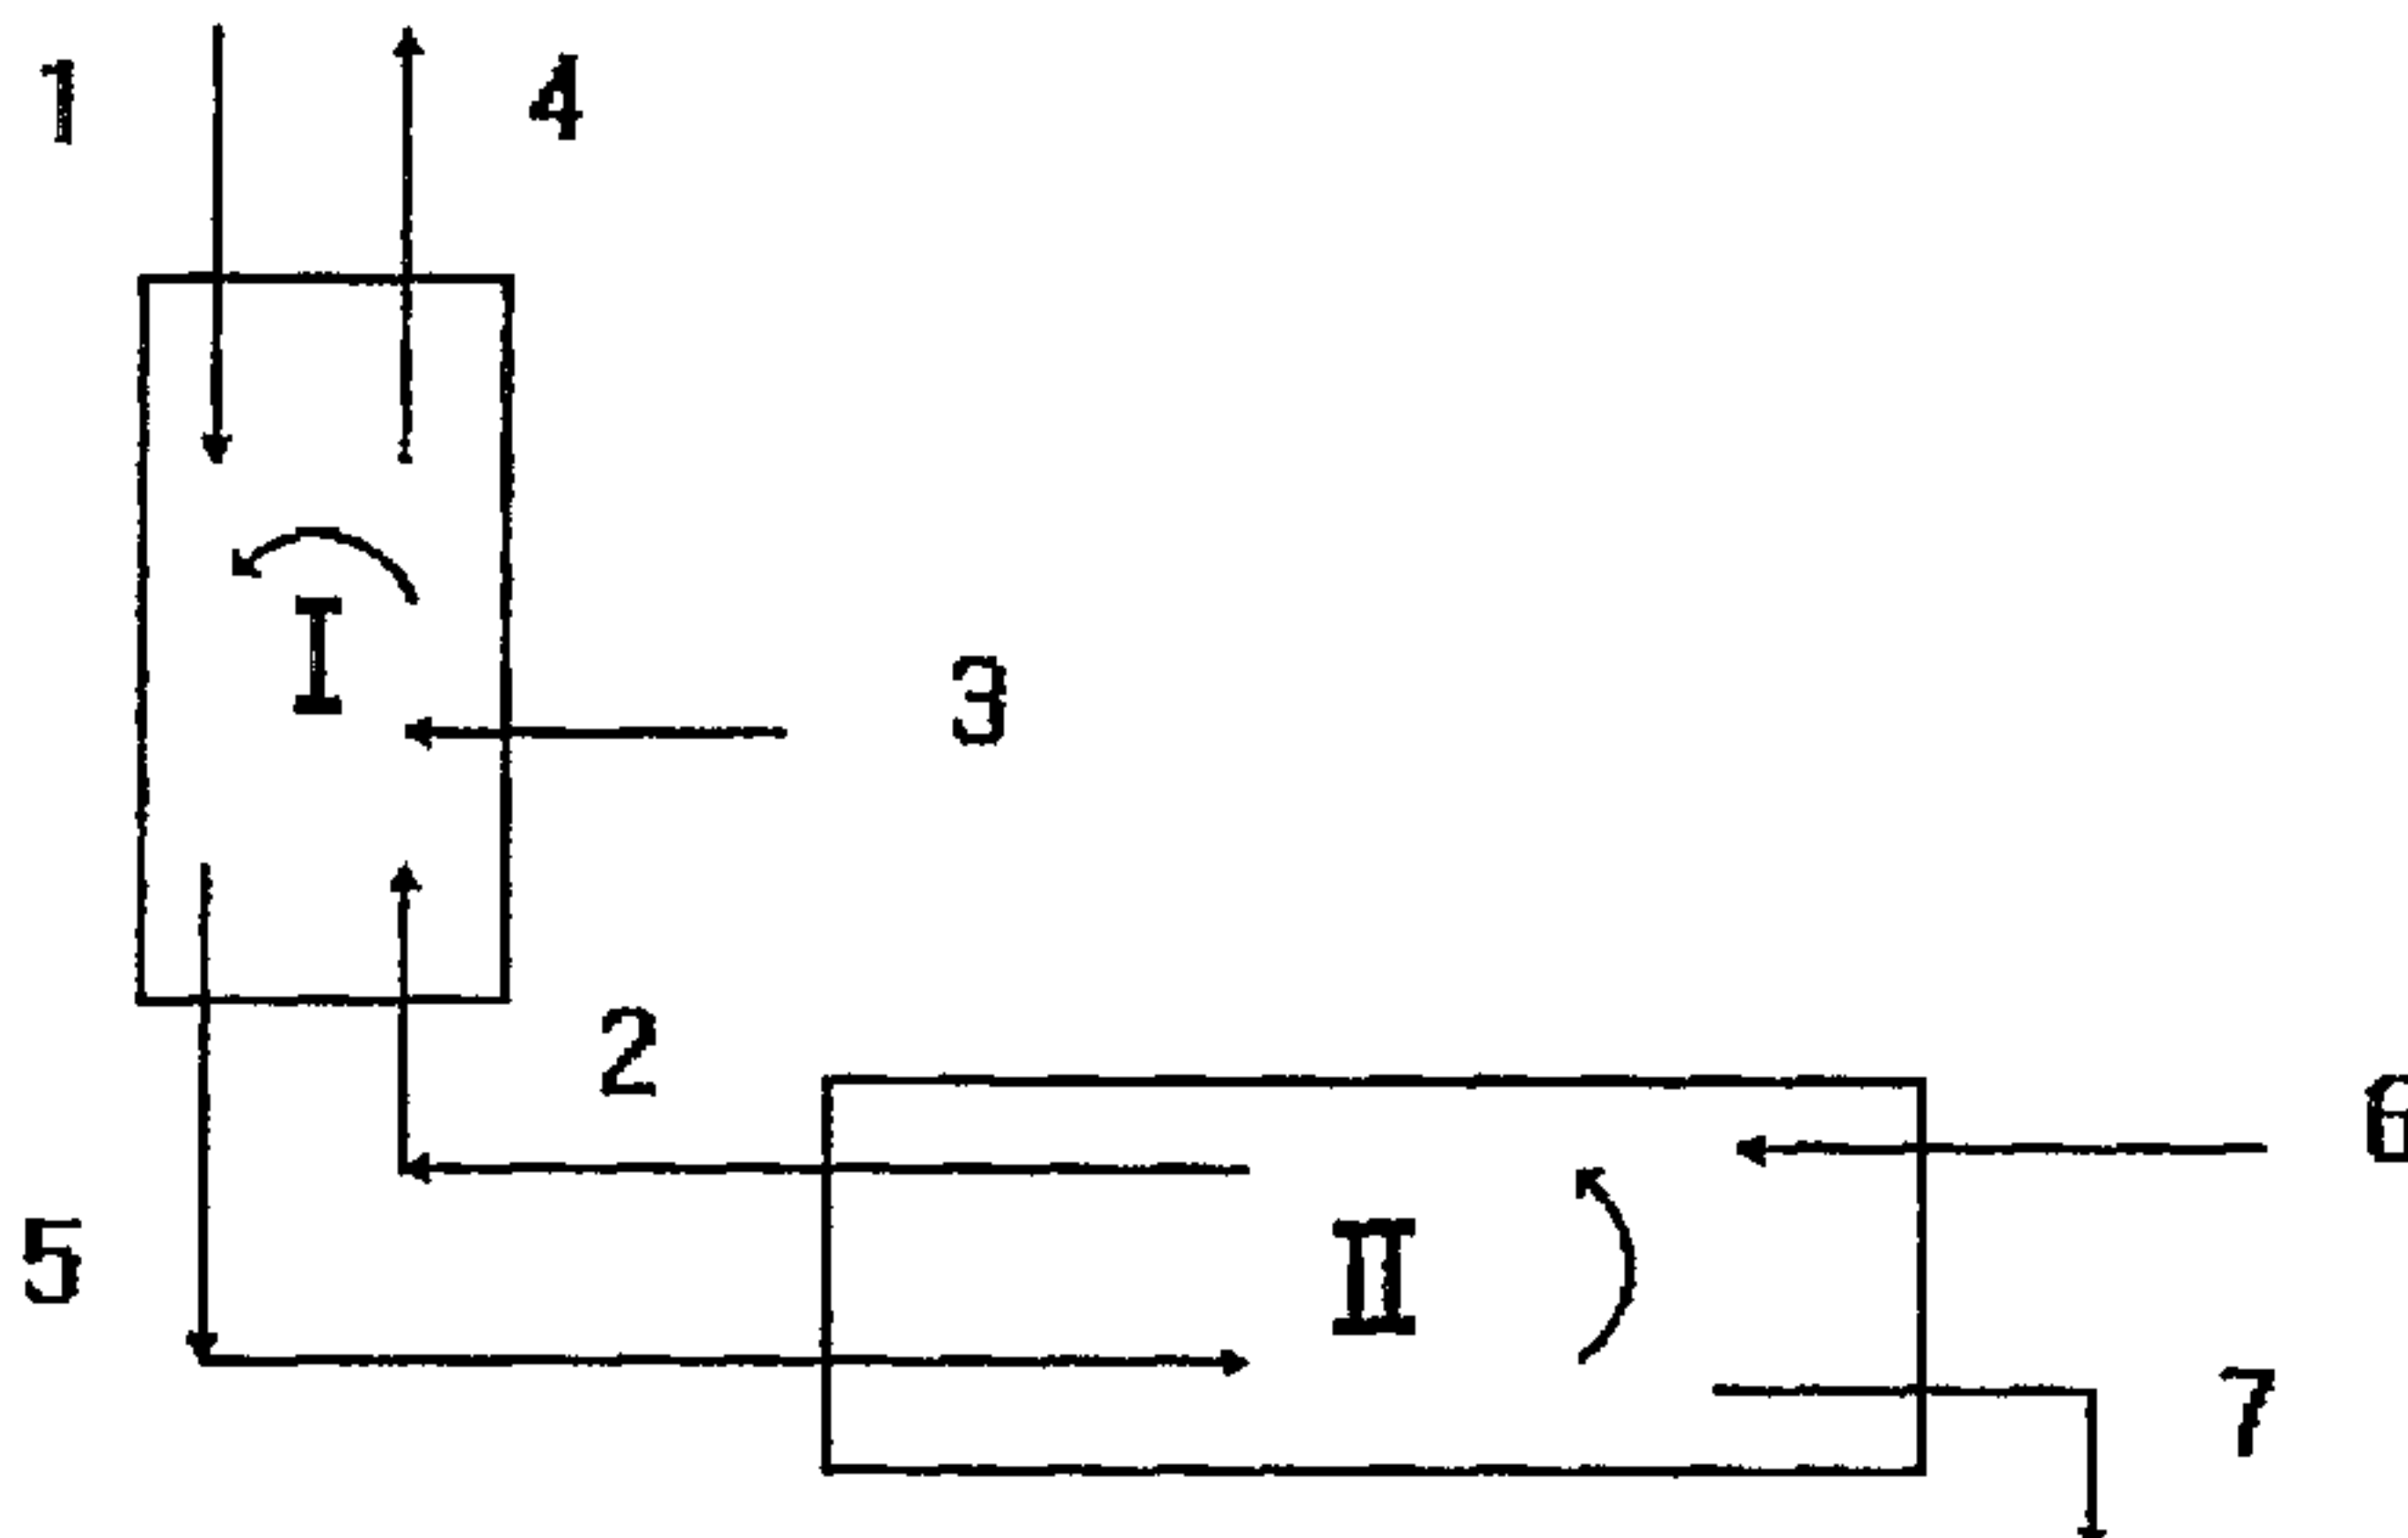


(57) Abstract

The invention relates to a method for controlling the temperature in a kiln in which cement clinker is manufactured, with a burning zone temperature within the range 1100-1500 °C. This invention makes it possible to control the temperature in the kiln, and hence to control the manufacture of the clinker which is produced in the cement kiln, while simultaneously reducing the NO_x-emission of the kiln to a minimum. By the method according to the invention, a calculation is made of the sulphur evaporation in the kiln, thereby obtaining a measure of the instantaneous temperature in the burning zone. The evaporation factor is calculated on the basis of measurements of the sulphur content in the cyclone material which passes to the kiln or a measurement of the sulphur content in the exit gases out of the kiln.

Metod for controlling the temperature in a kiln.

The present invention relates to a method for
controlling the temperature in a kiln for manufacturing
5 cement clinker.

It is common knowledge that cement is manufactured by a
number of raw materials, particularly lime (CaCO_3), clay,
sand, pyrite ash, fly ash and other materials being mixed
10 and interground into a raw meal in which the content of the
oxides CaO , SiO_2 , Al_2O_3 , Fe_2O_3 must be specifically adapted
within relatively narrow boundaries. The raw meal is
subsequently preheated and calcined, during which process
 H_2O and CO_2 are driven off. A range of reactions will then
15 occur between the oxides, first and foremost the following
reactions:

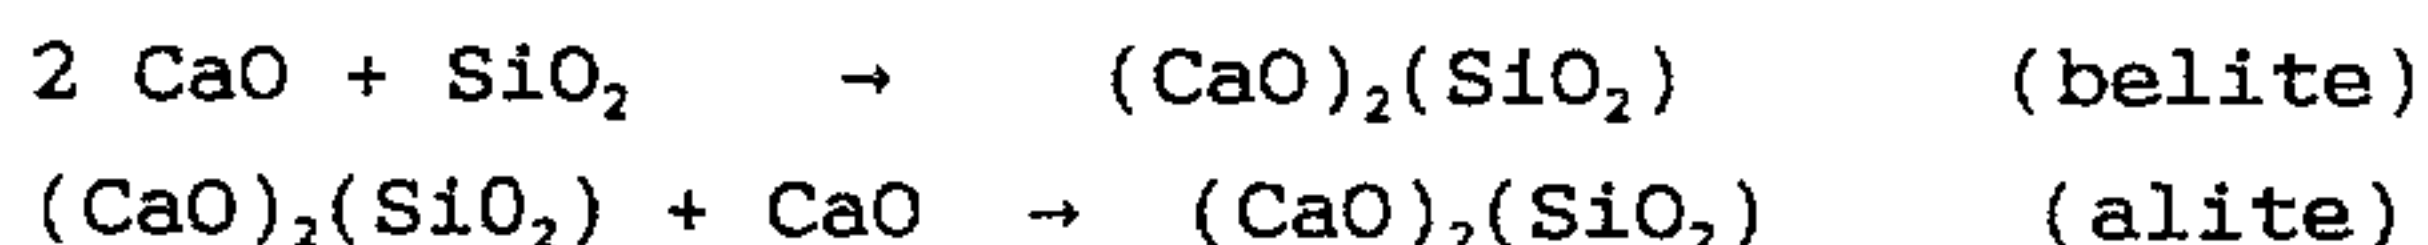

20

These reactions between solid substances take place in
a molten mass, with the aluminium and iron oxides which are
necessary for forming the molten mass.

25 For every burning process the overall objective is
always to ensure that the sufficient amount of alite is
formed and that, simultaneously, the volume of free, not
yet consumed CaO is reduced to an acceptably low level.
Traditionally the burning process takes place in a rotary
30 kiln and the final reaction occurs in the burning zone of
the rotary kiln, with the reaction process being controlled
by a regulation of the temperature by adjusting the firing
rate and the flame setting. The temperature during the
burning process approaches the $1400\text{-}1450^\circ\text{C}$ range for the
35 common types of clinker.

Accordingly, it will be necessary to perform a

measurement providing continuous indication of the temperature in the kiln, hence indicating also the composition and quality of the clinker, but so far it has not been possible to measure the interesting temperature
5 directly.

Thermocouples (Pt-PtRh) are impossible to install in a manner ensuring that they are not destroyed within a short period of time as a result of the contact with the hard
10 clinker.

Radiation pyrometers can be used, but only if there is good visibility in the burning zone, which is rarely the case since a certain dust load will inevitably be generated
15 during the burning process.

An indirect signal, which is extensively used to indicate the temperature, is a measurement of the force which is used to rotate the kiln. The reason why this
20 signal can be used is that the higher the temperature of the clinker, the greater the amount of molten mass being formed, hence causing more of the charge to be drawn higher upwards along the side of the rotary kiln during rotation. As a result, the moment of force (force x arm) will be
25 increased, hence increasing also the power required to rotate the kiln. However, the moment of force is a relative signal which is affected by a multitude of factors: arbitrary skewness in the crust formation, the adhesive properties of the raw materials along the entire length of
30 kiln etc.. Consequently, it is impossible to indicate exactly what the moment should be to ensure sufficient burning.

Another method for measuring the temperature in the
35 burning zone involves measurement of the NO_x-emission from the kiln. The NO_x formation in the burning zone relates specifically to the temperature level in the flame, and it

2182903

3

is influenced, at constant production and unaltered burner setting, only by the surplus air required for the burning process, and, since the overall aim is to keep the surplus air constant, the NO_x emission is a direct measure of the burning temperature. As it is, kilns have been operating for many years on the basis of NO_x -measurements, being controlled both manually and automatically, e.g. by means of Fuzzy logic.

However, it is a recognized fact that the emission of NO_x is detrimental to the environment, and, therefore, many efforts are mainly concentrated on reducing the emission of NO_x , including the emission of the rotary kiln, of a cement kiln plant.

15

These measures severely reduce the possibilities of controlling the kiln. This is best understood by considering a curve of the NO_x formation as a function of the temperature T ($^{\circ}\text{C}$) (see Figure 1). The curve is found by measuring the NO_x formation as a function of the final temperature of the clinker subject to a specific flame setting.

When burning common clinker, one has an operating point which is situated in much the same position as A. Here the formed NO_x is essentially of thermal origin, i.e. the nitrogen atom in NO_x originates from the N_2 of the air, and high/low deviations from the target temperature are markedly reflected in a significant change in the amount of formed NO_x .

When measures are introduced to reduce the NO_x level, corresponding to a lower temperature in the kiln, one will approach the operating point B, where the formed NO_x originates mainly from the fuel. In the proximity of point B, temperature dependence of the NO_x formation is negligible and, in actual practice, the NO_x measurement

2182903

4

cannot be used as a control parameter in such a low-NO_x operating mode.

5 In addition to lowering the NO_x emission, energy savings are also achieved when the flame temperature is lowered, which makes these conditions particularly desirable during the operation of the kiln.

10 In order to obtain operating conditions with a low degree of NO_x emission, the option of extending the flame in the kiln may be used, for example by reducing the primary airflow or primary velocity of the burner. By this method the clinker will have a lower final temperature, but, on the other hand, the clinker requires a longer
15 retention time at temperatures above the minimum limit where the alite formation may take place.

Another method for obtaining operating conditions with a low degree of NO_x emission and a lower necessary flame
20 temperature involves addition of a mineralizer to the raw meal, thereby lowering the temperature required for the alite formation to take place. Addition of sulphur and fluoride involves, for example, that the clinker burning process may occur at a temperature which is approximately
25 125° lower than normal, i.e. at 1275-1325°C.

So, the objective of the invention is to ensure capability of controlling the temperature in the kiln, and hence the manufacture of the clinker which is produced in
30 the cement kiln, achieving, simultaneously, a reduction of the NO_x emission from kiln to an absolute minimum.

This is obtained by a method according to the invention where the sulphur evaporation in the kiln is calculated,
35 thereby obtaining a measure of the instantaneous temperature in the burning zone.

2182903

5

The invention is described in further details in the following with reference being made to the drawings, where

Figure 1 shows the amount of formed NO_x as a function of the temperature,

Figure 2 shows the evaporation factor E as a function of the temperature,

Figure 3 shows an elementary sketch of the mass flow in a plant for manufacturing cement.

Here, evaporation is used to designate the decomposition reactions which basically occur at temperatures above 1100°C :



The evaporation factor E is defined as the fraction of the sulphur S which is fed to the burning zone of the kiln together with the calcined raw materials, and which is subject to evaporation. This factor is very interesting because it increases substantially when the temperature is lying within the range 1100°C - 1500°C (see Figure 2) and because this very temperature range is used for the clinker burning process.

An expression of the evaporation factor E can be found by making two mass balances for a plant for manufacturing cement clinker (see figure 3).

Such a plant consists of a system I where the raw materials are being prepared for burning, and a system II in which burning is taking place. System I may advantageously incorporate a cyclone preheater and possibly a calciner, and system II may advantageously incorporate a

2182903

6

rotary kiln.

The sulphur content of the different flows, i.e. the amount of sulphur S_x that passes in and out of the two systems I and II, can be measured as kg sulphur / hour or as kg sulphur / kg clinker produced at the plant.

Raw materials 1 with a sulphur content S_{feed} and exit gases 2 from the rotary kiln with a sulphur content $S_{kiln\ gas}$ gas are fed to system I.

Sulphur, $S_{sec, fuel}$, may also be supplied at 3, via secondary fuel to calciner or riser duct.

A flow of cooled exit gases 4 with a sulphur content $S_{exit\ gas}$ is discharged from system I, and the precalcined or merely preheated material flows at 5, normally from a cyclone, down into the kiln with the sulphur content S_{cyc} .

The input flows to system II consist of the preheated or precalcined material S_{cyc} 5 and kiln fuel 6, i.e. primary fuel, with the sulphur content $S_{prim, fuel}$. The output flows consist of the exit gases $S_{kiln\ gas}$ 2 from the kiln and of the finished clinker 7 with the sulphur content S_{clink} .

The evaporation factor E represents, at any particular time, the ratio between the amount of sulphur which evaporates in the burning zone and the amount of solid, combined sulphur which passes into the burning zone. However, the possibility of measuring the sulphur content of these two interesting flows in the burning zone does not exist.

Still, the situation will be such that the amount of sulphur which evaporates in the burning zone will approximately be equal to the amount of sulphur that passes out of the kiln at 2, $S_{kiln\ gas}$, minus the contribution coming from

2182903

7

the primary fuel, $S_{\text{prim.fuel}}$, and the amount of solid, combined sulphur which passes into the burning zone will approximately be equal to the amount which passes down from system I at 5, S_{cyc} . This involves that:

5

$$E \approx \frac{S_{\text{kiln gas}} - S_{\text{prim.fuel}}}{S_{\text{cyc}}}$$

The sulphur content in the primary fuel will be constant for a specific type of fuel and, therefore, the $S_{\text{prim.fuel}}$ is known if the fuel consumption during the time period t is known. S_{cyc} will vary with the time period because of fluctuations in the sulphur input to the burning zone and variations in the temperature in the burning zone. In a rotary kiln where the passage of the material from the inlet of the kiln where S_{cyc} is measured and to the burning zone may take a relatively long time, one has to apply a time delay τ to the measurements, in relation to the measurement of $S_{\text{kiln gas}}$, which happens almost instantaneously, which means that:

20

$$E(t) \approx \frac{S_{\text{kiln gas}}(t) - S_{\text{prim.fuel}}(t)}{S_{\text{cyc}}(t-\tau)}$$

25

At any particular point in time, the amount of sulphur down into kiln at 5 can be said to be roughly equal to the sum of the amount of sulphur which passes in at 7 (S_{feed}), 2 ($S_{\text{kiln gas}}$) and at 3 ($S_{\text{sec.fuel}}$), but minus the amount of sulphur which passes out at 4 ($S_{\text{exit gas}}$). Still, in most kiln systems, the sulphur content in the last-mentioned stream, $S_{\text{exit gas}}$, will be equal to 0:

30

$$S_{\text{cyc}} = S_{\text{feed}}(t) + S_{\text{kiln gas}}(t) + S_{\text{sec.fuel}}(t)$$

35

$$\text{or } S_{\text{kiln gas}} = S_{\text{cyc}}(t) - S_{\text{feed}}(t) - S_{\text{sec.fuel}}(t)$$

This entails that $E(t)$ can be calculated both by

2182903

8

measuring the sulphur content in the exit gas from the kiln and by measuring the sulphur content in the material being fed to kiln:

$$(A) \quad E(t) = \frac{S_{\text{kiln gas}}(t) - S_{\text{prim.fuel}}}{S_{\text{feed}}(t-\tau) + S_{\text{kiln gas}}(t-\tau) + S_{\text{sec.fuel}}(t-\tau)}$$

10 or

$$(B) \quad E(t) = \frac{S_{\text{cyc}}(t) - S_{\text{feed}}(t) - S_{\text{sec.fuel}}(t)}{S_{\text{cyc}}(t-\tau)}$$

15 These two expressions will only be valid when the kiln is a rotary kiln but similar expressions can be developed for other kilns, e.x. stationary kilns.

20 Generally, there is no point in fitting an SO₂-meter in the exit gas duct from the rotary kiln. This is because the emission of the kiln system into the atmosphere of this detrimental gas component is not in any way related to the measured value of S_{kiln gas} due to the almost 100% absorption efficiency of SO₂ in the lower preheater stage or in the
25 calciner where a relatively large air surplus exists.


Generally, it is uncomplicated to assess the contributions which the raw materials and fuel give to the amount of sulphur on the basis of the current analyses and the
30 dosage of feed input.

E(t) can then be calculated, either on the basis of (A) based on measurements of the SO₂ content in the kiln exit gas, S_{kiln gas}, or based on (B) if the sulphur content is
35 measured in the stream which passes from the separation cyclone after the calciner and down into the kiln, S_{cyc}.

Since SO₂ is the only sulphureous component at a high temperature and air surplus, the easiest method for
40 measuring S_{kiln gas} is to install an SO₂-meter, which continuously analyzes the kiln exit gas, in the kiln

outlet.

A major source of error associated with this method is that calcined raw meal is whirled up in the exit gas so that the sulphur dioxide is chemically combined through the reaction:



If the exit gas sample is cleaned and cooled with water, which is the basic operating principle in certain systems, a part of the SO_2 volume may also be bound by the water which is alkaline because of the CaO . As a result hereof, the gas analyzer signal will be too small.

However, if due attention is given to these sources of error, it will often be possible to assume that a fixed fraction of the SO_2 volume will disappear, and, accordingly, the signal can still be used for controlling the temperature since the real amount of evaporated SO_2 is proportional to the measured amount of SO_2 , $S_{\text{kiln gas, measured}} = \text{constant} \times S_{\text{kiln gas}}$.

The method cannot be used for control purposes, if the SO_2 stream out of the kiln (e.g. due to a bypass duct being established to reduce SO_2 and the chloride circulation in the kiln system) is of a size which is so limited that approximately all the SO_2 volume is absorbed by whirled-up CaO . In case of SO_2 presence here, this is more an expression of an air deficit in the kiln, cf. equation (C), than of a high burning zone temperature.

The amount of sulphur being fed to the rotary kiln can be determined by several known methods. For example by means of an Outokumpo x-ray analyzer capable of continuously determining the content of the elements Fe, Ca and S in the cyclone material. For this purpose, a sub-

2182903

10

stream of raw meal is extracted from the cyclone, cooled down and compacted before it is fed to the analyzer. The signal which is received for the S-content or the S/Ca ratio provides a precise indication of the amount of

5 sulphur that passes down into the rotary kiln.

PATENT CLAIMS

1. A method for controlling the temperature in a kiln for manufacturing cement clinker CHARACTERIZED IN THAT
5 the sulphur content $S(t)$ out of the kiln or into the kiln is measured relative to the time t , whereafter the fuel input to the kiln is controlled so that the desired evaporation factor E is maintained for the sulphur which is fed to the kiln.
- 10 2. A method according to claim 1, CHARACTERIZED IN THAT the sulphur content $S_{\text{kiln gas}}(t)$ is measured in the exit gas of the kiln.
- 15 3. A method according to claim 1, CHARACTERIZED IN THAT the sulphur content $S_{\text{cyc}}(t)$ is measured in the feed stream of material to kiln.
- 20 4. A method according to claim 1, 2 or 3, CHARACTERIZED IN THAT the temperature in the burning zone of the kiln is lying within the range 1100-1500°C.
- 25 5. A method according to claim 1, 2 or 3, CHARACTERIZED IN THAT the temperature in the burning zone of the kiln is lying within the range 1100-1350°C.
6. A method according to claim 1, 2 or 3, CHARACTERIZED IN THAT the temperature in the burning zone of the kiln is lying within the range 1275-1325°C.

7. A plant for manufacturing cement clinker in which the raw meal first passes a preheater, and then possibly a calciner, whereafter it is finally burned in a kiln, and the temperature conditions in the kiln can be adjusted by varying the fuel rate to the kiln CHARACTERIZED IN THAT a meter is fitted between the kiln and the preheater for recording the sulphur content out of and into the kiln and in that the fuel rate to the kiln is altered as a function of the measured amount of sulphur.
8. A plant according to claim 7 CHARACTERIZED IN THAT that the meter is located in the exit gas duct (2) of the kiln.
9. A plant according to claim 7, CHARACTERIZED IN THAT the the meter is located in the feed stream duct (5) to kiln.

1/2

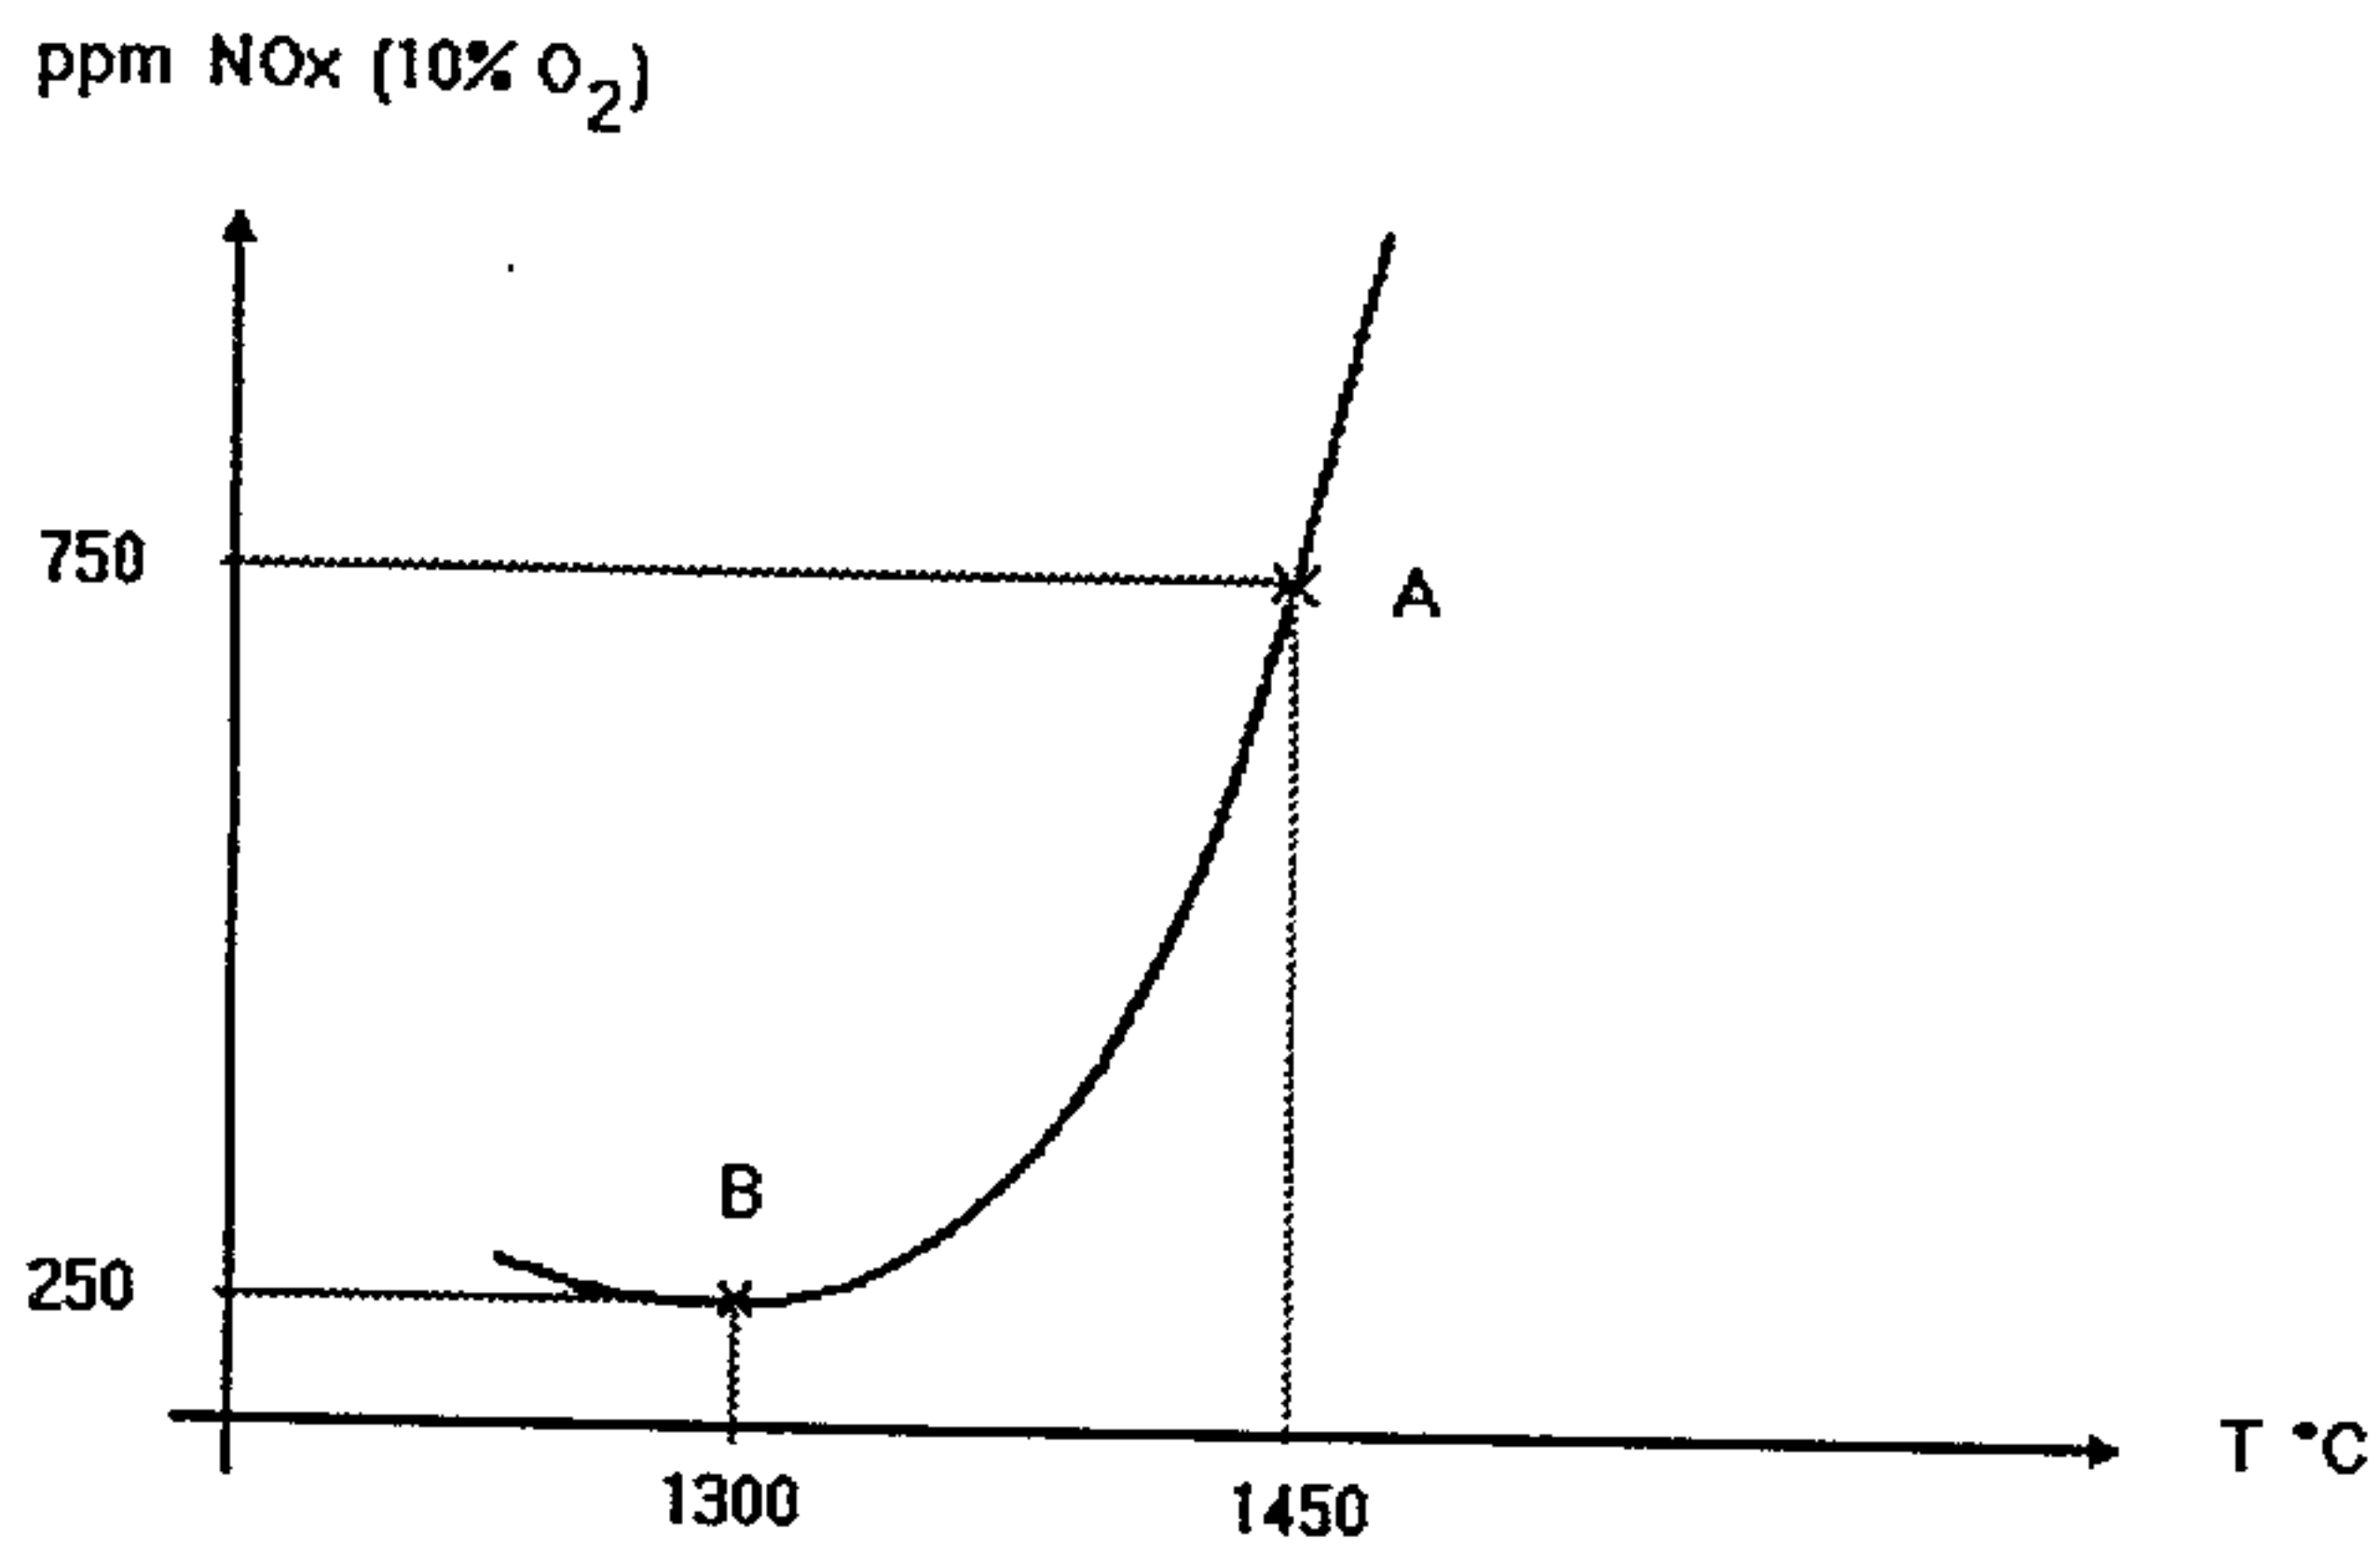


Fig. 1

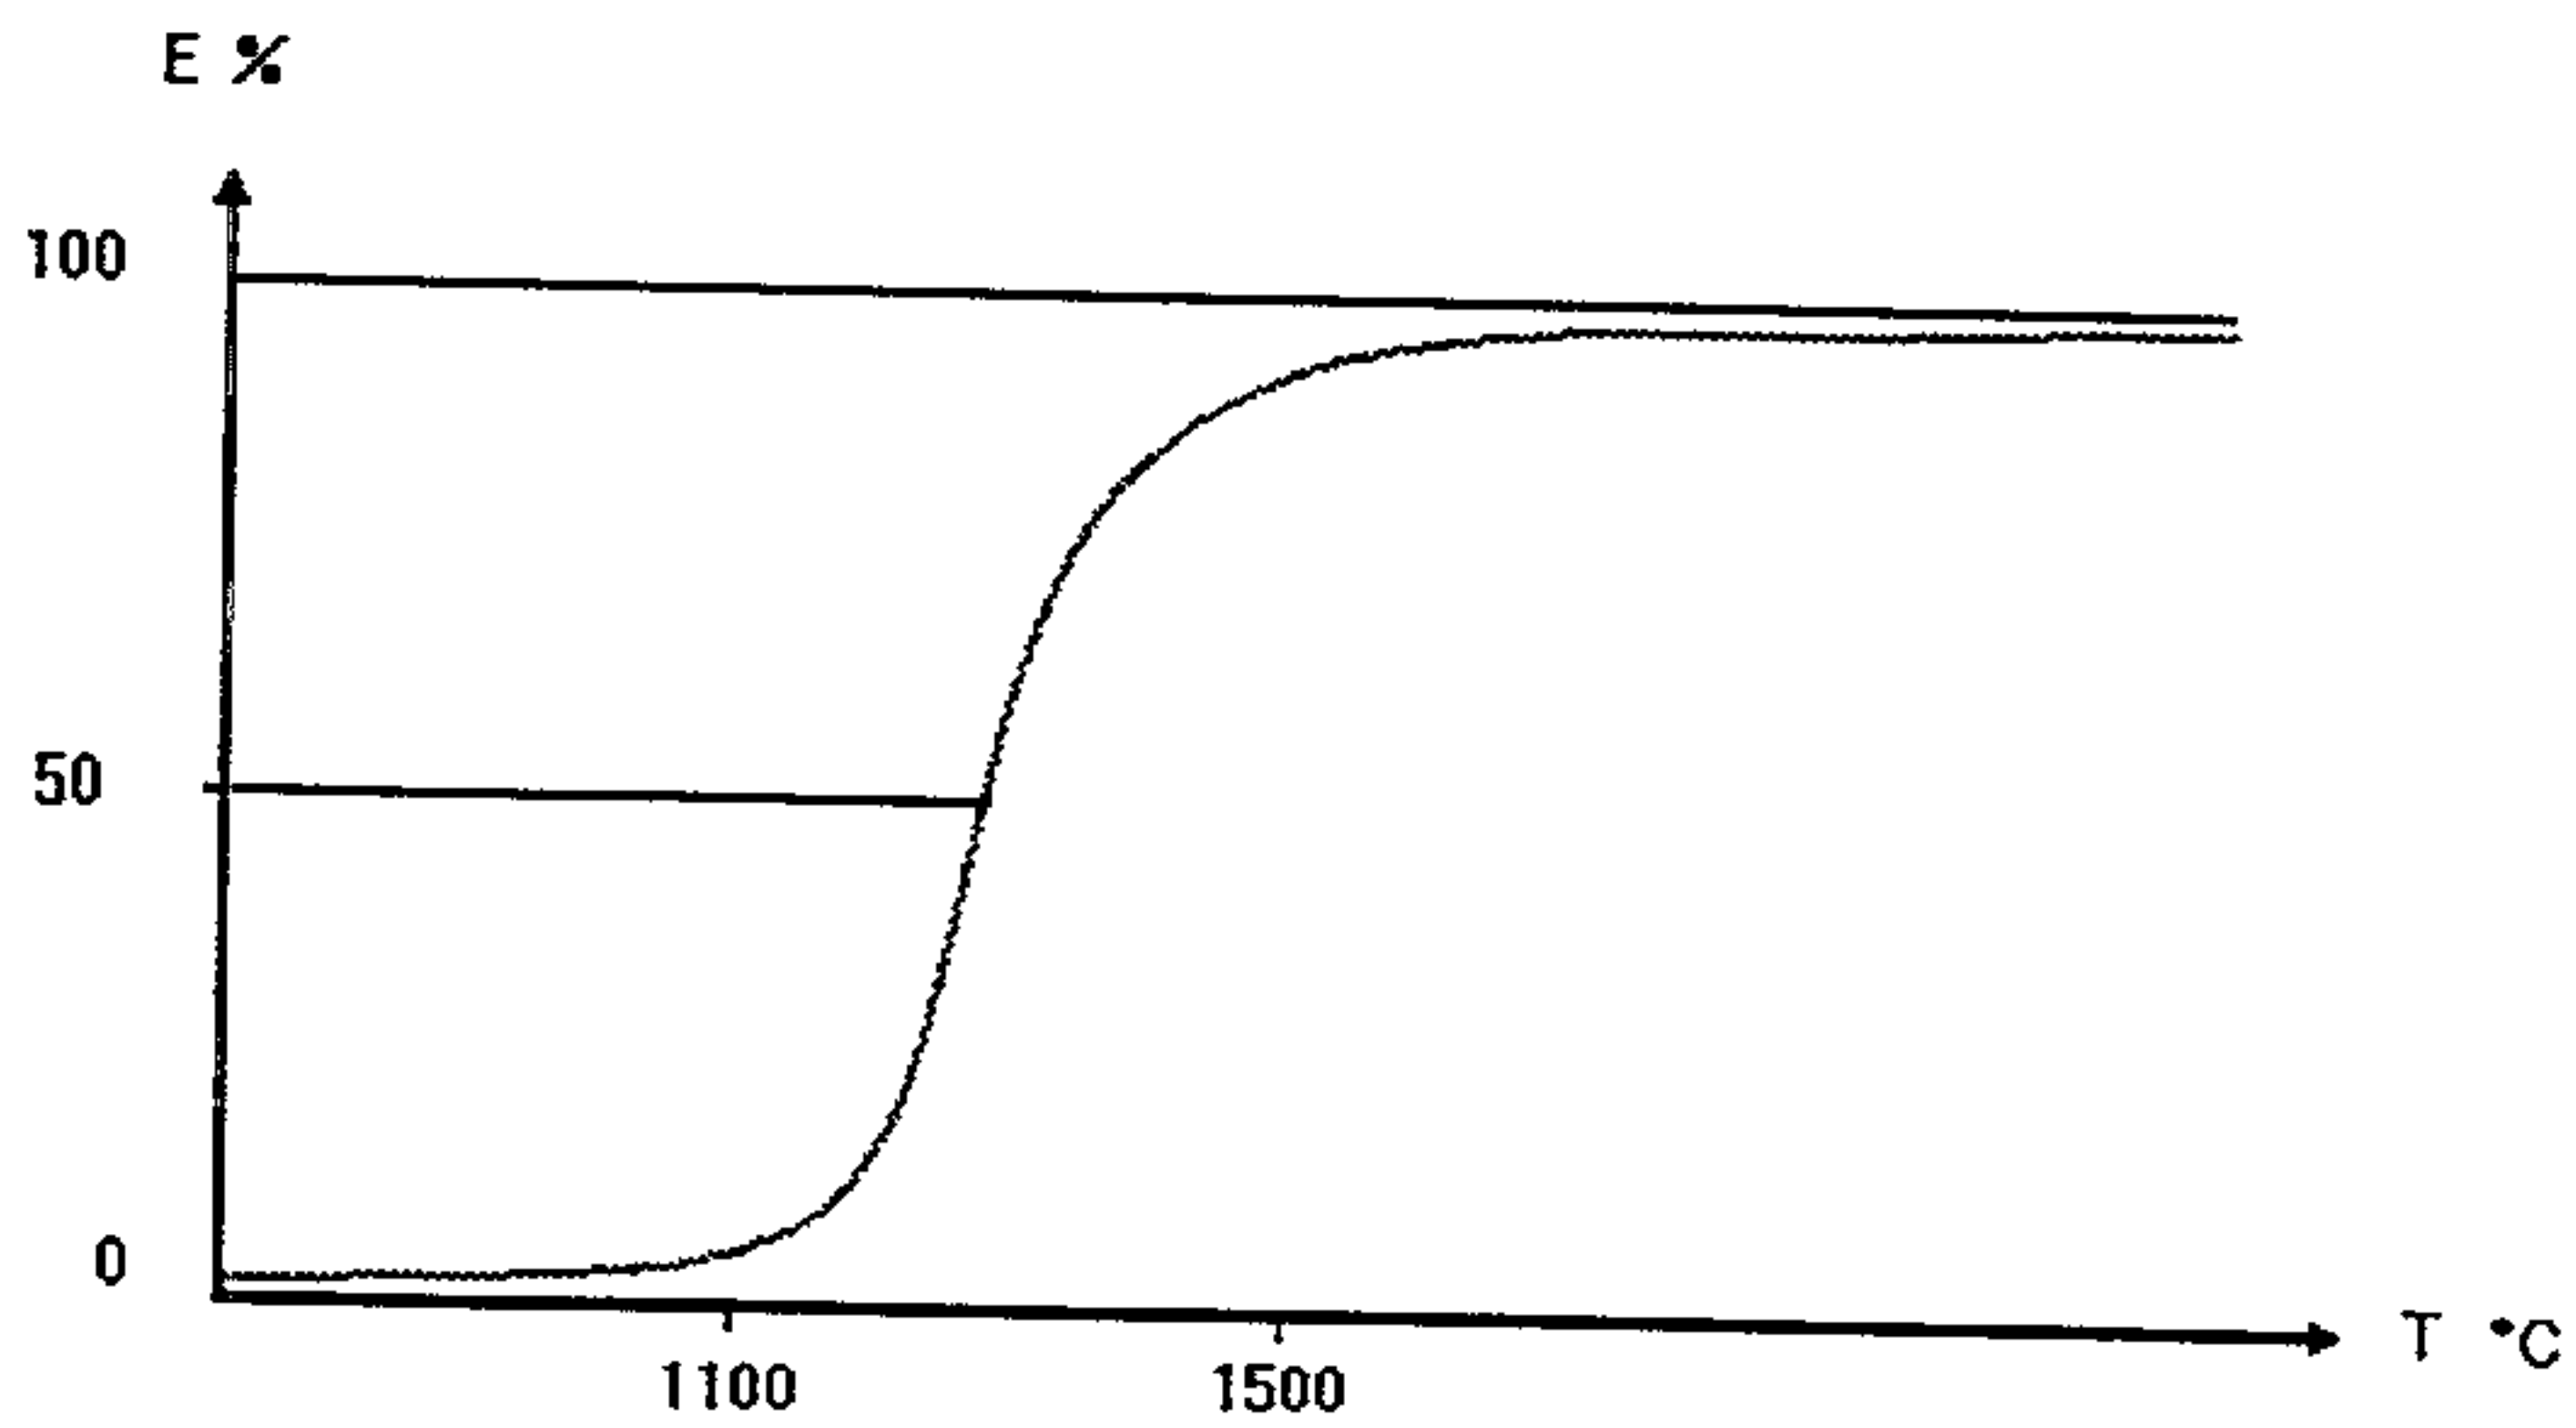


Fig. 2

2182903

2/2

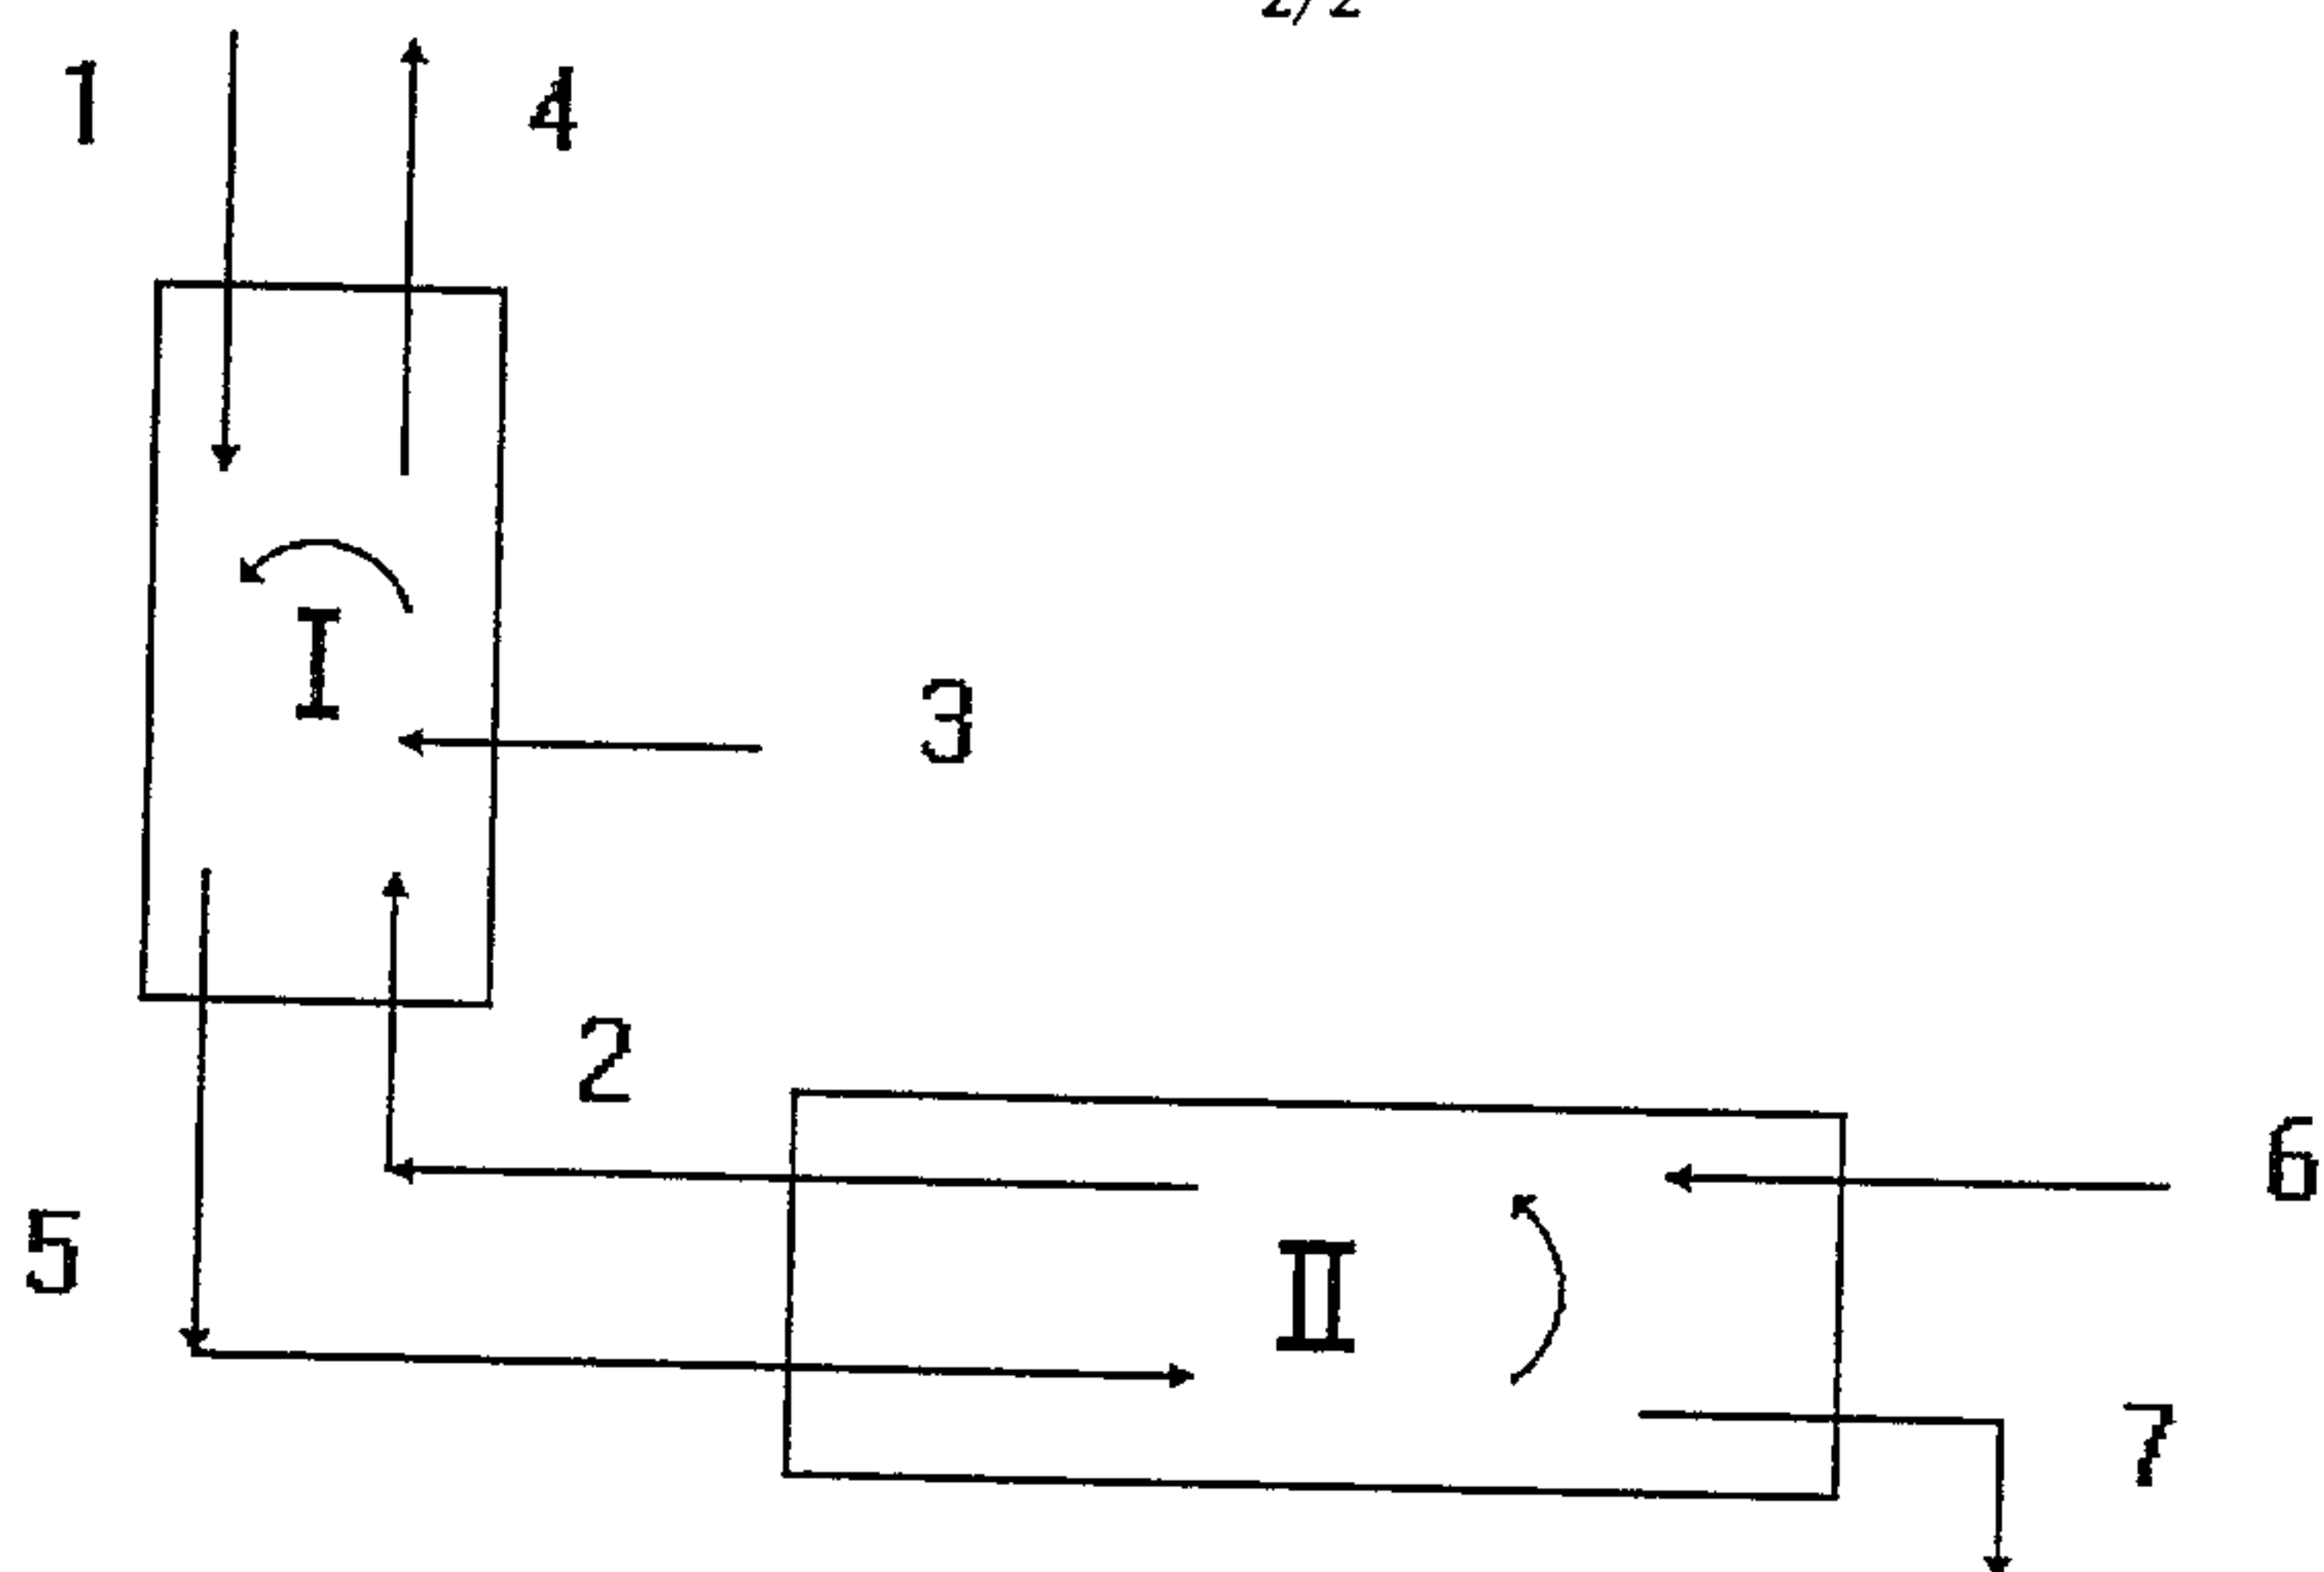


Fig. 3

