



(51) International Patent Classification:
G01R 29/10 (2006.01) *H04W 16/20* (2009.01)

(21) International Application Number:
PCT/EP2018/065402

(22) International Filing Date:
11 June 2018 (11.06.2018)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
17175719.8 13 June 2017 (13.06.2017) EP

(71) Applicants: **SWISS TIMING LTD** [CH/CH];
Rue de l'Envers 1, 2606 Corgémont
(CH). **FRIEDRICH-ALEXANDER-UNIVERSITÄT
ERLANGEN-NÜRNBERG** [—/DE]; Schlossplatz 4,
91054 Erlangen (DE).

(72) Inventor: **KAUTZ, Thomas**; Am Rosentalweg 10, 06526
Sangerhausen (DE).


(74) Agent: **ICB SA**; Faubourg de l'Hôpital 3, 2001 Neuchâtel
(CH).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: METHOD FOR ESTIMATING THE COVERED AREA OF A DIRECTIVE ANTENNA OF A LOCAL POSITIONING
SYSTEM WHILE SETTING UP SAID SYSTEM

Fig. 3

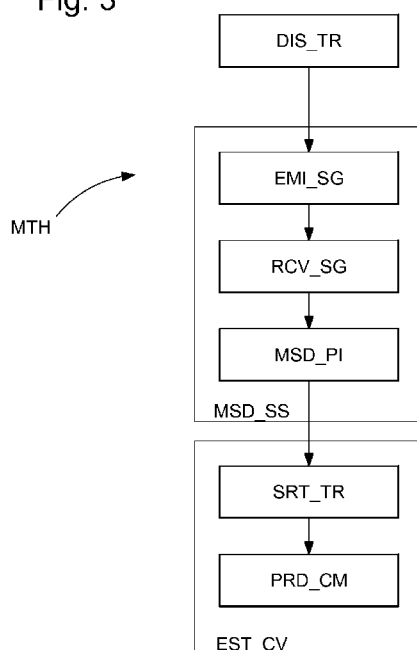

(57) Abstract: The invention relates to a method (MTH) for estimating the coverage area of a directive antenna of a local positioning system while setting up said system, said antenna being located in the vicinity of an area of interest, the method (MTH) comprising the following steps: - Distributing (DIS_TR) a plurality of transponders over the area of interest - Performing (MSD_SS) measurements of signal strength between the antenna and said transponders - Estimating (EST_CV) the coverage area by using said measurements.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

METHOD FOR ESTIMATING THE COVERED AREA OF A DIRECTIVE
ANTENNA OF A LOCAL POSITIONING SYSTEM WHILE SETTING UP SAID
5 SYSTEM

Field of the invention

The invention relates to the field of local positioning systems having directive antennae. In particular, the invention relates to a method for estimating
10 the covered area of a directive antenna of a local positioning system while setting up said system.

Background of the invention

In recent years, there has been an increasing demand for reliable and objective evaluation of sport specific data. The measurement and analysis of the
15 trajectories of athletes is one possible approach to gain such insights. It allows the assessment of the physical performance and tactical behavior of athletes. Thus, it can yield helpful feedback for athletes, coaches and referees. Furthermore, spectators can be supplied with additional information about the accomplishments of their idols.

20 Local Positioning Systems (LPS) provide a means for the measurement of athletes' positions and motion trajectories. State-of-the-art systems use time-of-arrival or time-difference-of-arrival measurements of electromagnetic waves. These electromagnetic waves travel between antennae with fixed and known positions and mobile transponders (tags) with unknown and variable positions.
25 Using the timing measurements from several antennae with respect to the mobile transponder, the position of the mobile transponder in the coordinate system of

- 2 -

the local positioning system can be determined. When such a mobile transponder is attached to an object or person, the position of this object or person can be determined from the position of the mobile transponder.

Usually, directive antennae are preferred over omnidirectional antennae
5 in order to extend the ranges of the radio coverage areas. Throughout this text, 'range' shall mean the maximum distance to the antenna to which the transponder may be located in order to receive electromagnetic waves from said antenna. In addition, 'coverage area' shall mean the area on which the transponder must be located to receive electromagnetic waves from said
10 antenna.

For illustrative purposes only, a radiation pattern of a typical directive antenna is given in Fig.1a and 1b. In particular, Fig.1a shows the horizontal radiation pattern and Fig.1b shows the vertical pattern. It is to be noted that 'radiation pattern' refers to the angular dependence of the strength of the
15 electromagnetic waves from the antenna.

An important issue regarding the antenna coverage of an area of interest is the difficulty of finding out which area can be covered by which antenna during system setup. The position and orientation of each antenna is of vital importance for optimal coverage of the area of interest and hence for accurate and
20 continuous position tracking. Although some heuristics for antennae placement have been proposed in the literature, finding the best positions and orientations is difficult in practice since the operator does not get any feedback about the current system coverage while setting up the system. Hence, the placement and orientation needs to be based on experience and rough manual estimates about
25 which area is covered by a given antennae. Estimating the covered area is made even more difficult by obstacles in the line-of-sight of the antenna (ceiling, flags, etc.). Simulation of the signal propagation could provide some guidance for the

- 3 -

operator, but these would require extensive modelling of the venue in order to obtain realistic results.

Summary of the invention

It is an object of the invention to overcome these drawbacks.

5 Hence, the invention relates to a method for estimating the coverage area of a directive antenna of a local positioning system while setting up said system, said antenna being located in the vicinity of an area of interest, the method comprising the following steps:

- Distributing a plurality of transponders over the area of interest
- 10 - Performing measurements of signal strength between the antenna and said transponders
- Estimating the coverage area by using said measurements.

According to the invention, multiple transponders are distributed over the area of interest and the strength/quality or the signal transmission between these
15 transponders and the antenna is measured. By combining these measurements, the coverage area of the antenna can be estimated. This approach facilitates the LPS setup because the operator can get feedback about the suitability of the installation while adjusting the antenna position and/or orientation. With this information, the coverage can be optimized by adapting the position and/or
20 orientation of the antenna in an automated or manual way.

Furthermore, the method according to the invention may comprise one or a combination of the following characteristics.

In a non-limited embodiment, the step of performing measurements comprises:

- 25 - Emitting a signal by each of the plurality of transponders
- Receiving at least two of said signals by the antenna

- 4 -

- Measuring a power indicator for each received signals.

In a non-limited embodiment, the power indicator is the Received Signal Strength Indicator.

5 In a non-limited embodiment, the step of estimating the coverage area comprises sorting the transponders according to whether or not the signal they have emitted has been received by the antenna and according to the power indicators for the received signals.

10 In a non-limited embodiment, the step of estimating the coverage area comprises producing a coverage map of the area of interest, according to the sorting.

In a non-limited embodiment, the step of distributing comprises homogeneously spreading the transponders on the area of interest.

Brief description of the drawing

15 Other features and advantages of the present invention will appear more clearly upon reading the following detailed description, made with reference to the annexed drawings, given by way of non-limiting example:

- Fig.1a shows the horizontal radiation pattern of a typical directive antenna
- Fig.1b shows the vertical radiation pattern of the antenna to which
20 reference has been made in Fig.1a
- Fig.2 shows an environment comprising an area of interest on which a plurality of transponders are distributed, a directive antennae being located in the vicinity of said area of interest
- Fig.3 shows a flow diagram illustrating the steps of a method according
25 to the invention.

Detailed description of the preferred embodiments

- 5 -

The method MTH offered by the invention addresses the difficulty in estimating the coverage area of a directive antenna of a local positioning system. Fig.2 shows such a directive antenna A1, located in the vicinity of an area of interest AOI. For illustrative purposes, the coverage area CVA of said antenna
5 A1 is approximated as a triangle.

In a first step DIS_TR of the method MTH according to the invention, a plurality of test transponders T1-T28 are distributed over the area of interest AOI, advantageously in a homogenous manner, that is to say spread all over the area of interest AOI and regularly spaced, as shown in Fig.2.

10 In a second step MSD_SS of the method MTH according to the invention, measurements of signal strengths are performed.

According to a sub-step EMT_SG of this second step MSD_SS, each of the test transponders T1-T28 emits a signal. Understandably, depending on its position and its orientation, the antenna A1 can only receive some of these
15 signals. In the example of Fig.2, only seven transponders T1-T7 out of the twenty-eight depicted transponders are in the coverage area CVA of the antenna A1.

According a subsequent sub-step RCV_SG of this second step MSD_SS, as already mentioned, the antenna A1 receives some of the signals emitted by
20 the transponders.

According to a subsequent sub-step MSD_PI of this second step MSD_SS, a power indicator relative to each received signal is measured. The power indicator is for instance calculated using the Received Signal Strength Indicator (RRSI), which is a measurement of the power present in a received
25 radio signal. Most positioning systems provide a value for the RSSI for each signal transmission between a transponder and an antenna. A high RSSI indicates good signal strength/quality and vice versa.

- 6 -

In a third step EST_CV of the method MTH according to the invention, the coverage area CVA of the antenna A1 is estimated, on the basis of said measurements.

According a sub-step SRT_TR of this third step EST_CV, the test
5 transponders T1-T28 are sorted in different categories, by using the measurements. For instance, the transponders the antenna received no signal from (T13-T28) are sorted in the category "no coverage", and the others (T1-T12) are sorted in the categories "good signal quality", "medium signal quality" and "poor signal quality". Of course, other categories and a different number of
10 categories are conceivable. In the example of Fig.2, five categories are represented: from white which is equivalent to a good signal quality to black which is equivalent to no coverage.

According a subsequent sub-step PRD_CM of this third step EST_CV, a coverage map is produced, by using the sorting. This provides intuitive feedback
15 about the coverage of the antenna which helps optimizing the setup of the positioning system, that is to say find the optimal positions and orientations of the antenna, find out which parts of the area of interest are sufficiently covered, etc.

Of course, the present invention is not limited to the illustrated example
20 but may be subject to various variants and alterations, which will be apparent to those skilled in the art.

CLAIMS

1. Method (MTH) for estimating the coverage area (CVA) of a directive antenna (A1) of a local positioning system while setting up said system, said antenna (A1) being located in the vicinity of an area of interest (AOI), the method
5 (MTH) comprising the following steps:

- Distributing (DIS_TR) a plurality of transponders (T1-T28) over the area of interest
- Performing (MSD_SS) measurements of signal strength between the antenna (A1) and said transponders
- 10 - Estimating (EST_CV) the coverage area (CVA) by using said measurements.

2. Method (MTH) according to claim 1, wherein the step of performing (MSD_SS) measurements comprises:

- Emitting (EMT_SG) a signal by each of the plurality of transponders (T1-T28)
- 15 - Receiving (RCV_SG) at least two of said signals by the antenna (A1)
- Measuring (MSD_PI) a power indicator for each received signals.

3. Method (MTH) according to claim 2, wherein the power indicator is the
20 Received Signal Strength Indicator.

4. Method (MTH) according to claim 2 or claim 3, wherein the step of estimating (EST_CV) the coverage area (CVA) comprises sorting (SRT_TR) the transponders (T1-T28) according to whether or not the signal they have emitted has been received by the antenna (A1) and according to the power indicators for
25 the received signals.

- 8 -

5. Method (MTH) according to claim 4, wherein the step of estimating (EST_CV) the coverage area (CVA) comprises producing (PRD_CM) a coverage map of the area of interest (AOI), according to the sorting.

6. Method (MTH) according to any of the previous claims, wherein the
5 step of distributing (DIS_TR) comprises homogeneously spreading the transponders (T1-T28) on the area of interest (AOI).

Fig. 1a

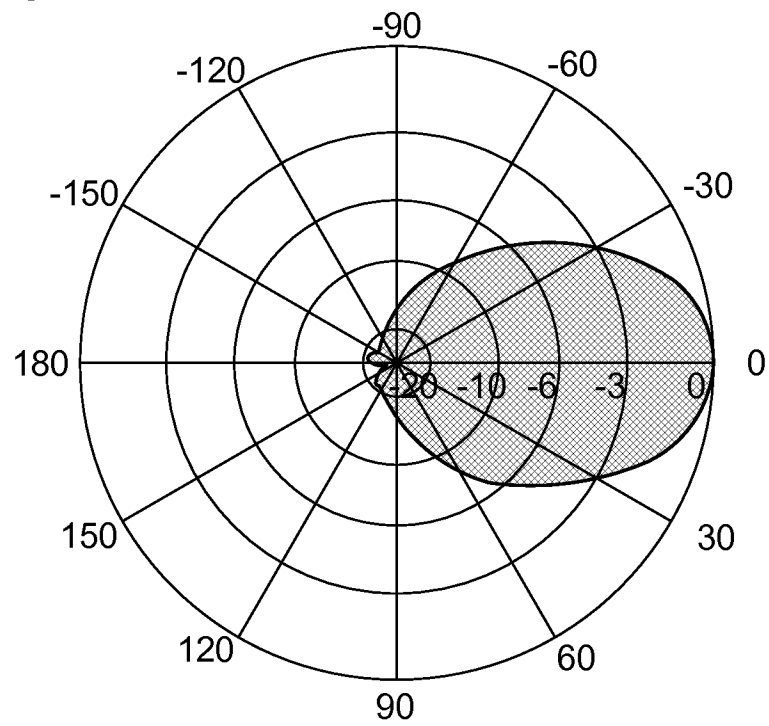


Fig. 1b

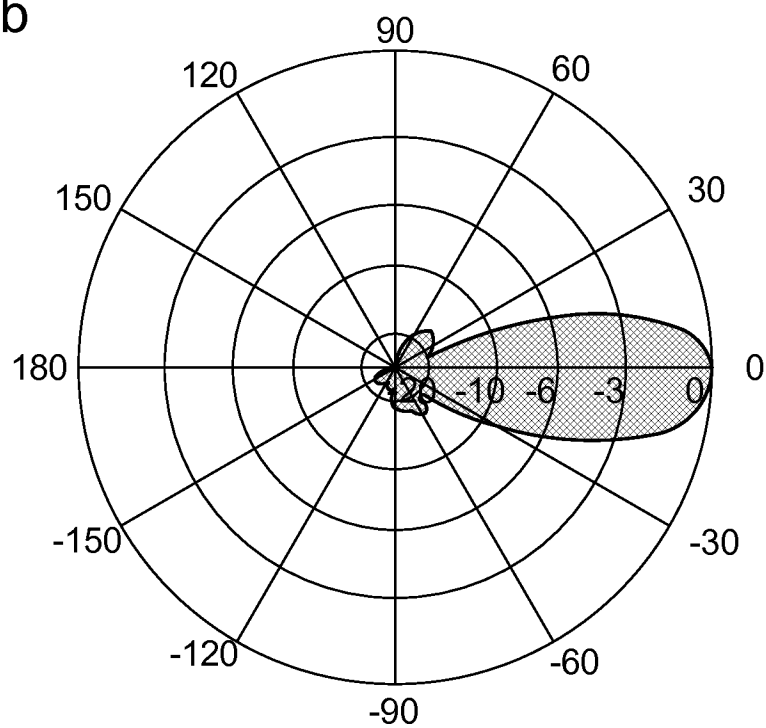


Fig. 2


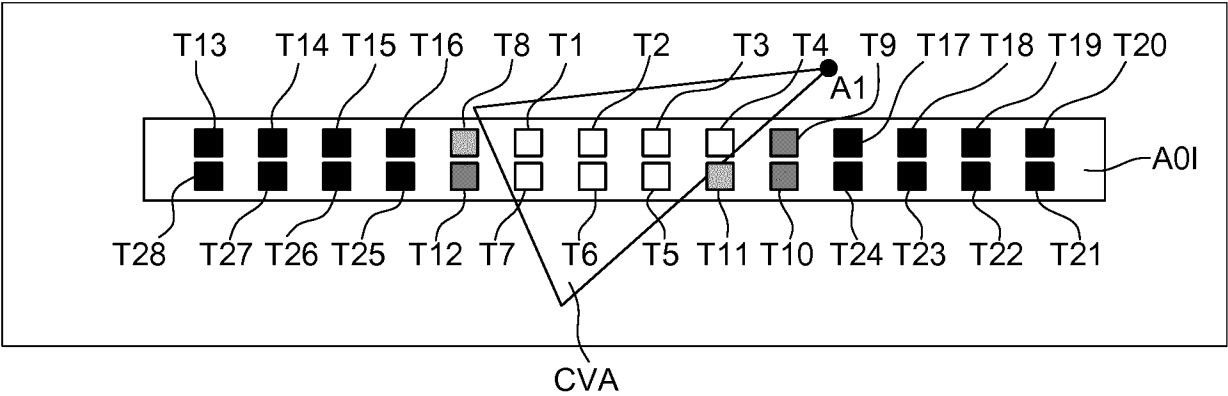


Fig. 3

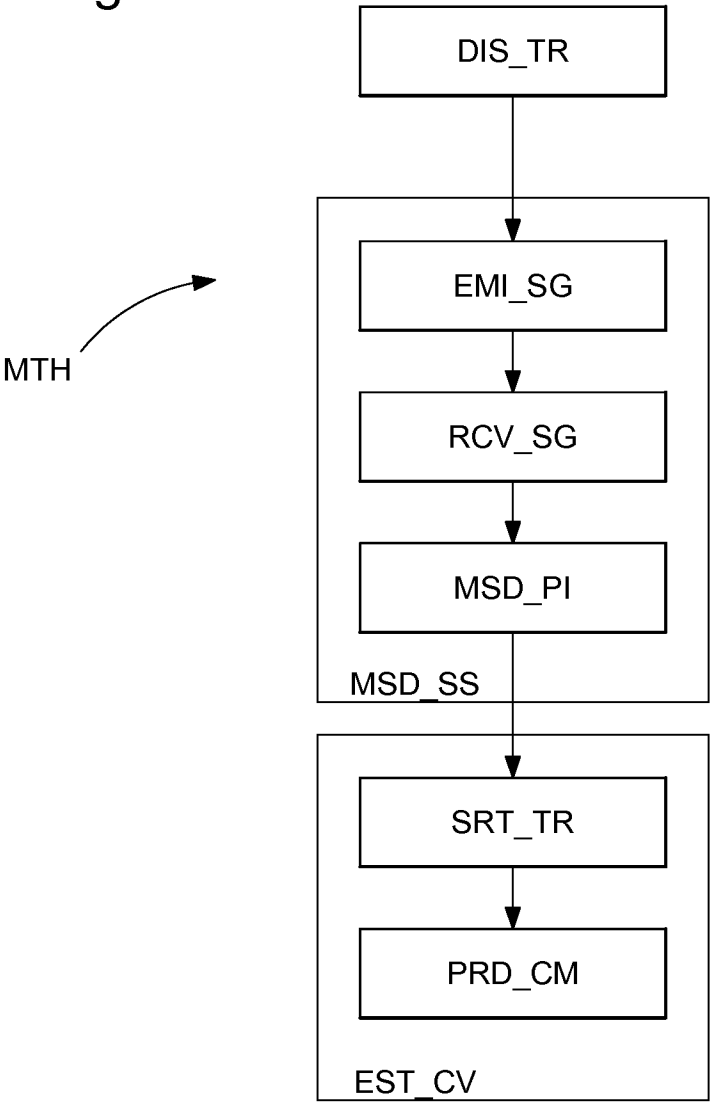

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2018/065402

A. CLASSIFICATION OF SUBJECT MATTER

INV. G01R29/10 H04W16/20
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01R H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 668 562 A (CUTRER DAVID M [US] ET AL) 16 September 1997 (1997-09-16) abstract; figures 3,6,8,9 column 2, line 61 - column 3, line 40 column 4, line 17 - column 6, line 20 column 7, line 4 - column 8, line 19 -----	1-6
A	US 2015/296388 A1 (BASSIRI MASOUD [SG] ET AL) 15 October 2015 (2015-10-15) abstract; figures 2-3 paragraphs [0021] - [0027], [0092] - [0109], [0141] - [0142], [0145] - [0147], [0151] -----	1-6
A	US 2008/182528 A1 (LE VINH [US]) 31 July 2008 (2008-07-31) paragraph [0016] - paragraph [0028]; figure 2 ----- -/--	1-6



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 June 2018

Date of mailing of the international search report

03/07/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Maric, Viktor

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/065402

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ZAHID FARID ET AL: "Recent Advances in Wireless Indoor Localization Techniques and System", JOURNAL OF COMPUTER NETWORKS AND COMMUNICATIONS, vol. 22, 31 January 2013 (2013-01-31), pages 39-12, XP055311162, US ISSN: 2090-7141, DOI: 10.1155/2013/185138 paragraphs [2.2.3], [3.2.3], [04.1] - [04.2]; figures 7-8; tables 1-3 -----	1-6

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2018/065402

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5668562	A	16-09-1997	AU 2741997 A 12-11-1997
			US 5668562 A 16-09-1997
			WO 9740547 A1 30-10-1997

US 2015296388	A1	15-10-2015	CA 2811396 A1 22-03-2012
			CA 2979242 A1 22-03-2012
			EP 2617224 A1 24-07-2013
			SG 188981 A1 31-05-2013
			US 2013183961 A1 18-07-2013
			US 2015296388 A1 15-10-2015
			WO 2012036640 A1 22-03-2012

US 2008182528	A1	31-07-2008	NONE
