

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 May 2002 (23.05.2002)

PCT

(10) International Publication Number
WO 02/40109 A1

(51) International Patent Classification⁷: A63B 49/02

(21) International Application Number: PCT/US01/45537

(22) International Filing Date:
15 November 2001 (15.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/715,762 17 November 2000 (17.11.2000) US

(71) Applicant and

(72) Inventor: BRANDT, Richard, A. [US/US]; 69 Fifth Avenue, Apartment 16A, New York, NY 10003 (US).

(74) Agent: WALDBAUM, Maxim, H.; Salans Hertzfeld heilbronn Christy & Viener, 620 Fifth Avenue, New York, NY 10020 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:
— with international search report

[Continued on next page]

(54) Title: SPORTS RACKET HAVING A UNIFORM STRING STRUCTURE

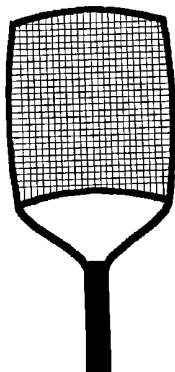

(57) Abstract: A sports racket has a head with four sides, forming a non-elliptical shape, in which the opposite sides are substantially parallel. Longitudinal strings, all of which are substantially identical in length and run essentially parallel to each other, and transversal strings, all of which are substantially identical in length and run essentially parallel to each other and perpendicular to the longitudinal axis, span the racket face. The racket has maximally long strings at all points on the racket face and strings substantially identical in length at all points on the racket face resulting in a uniformity of response for off-center hits. The racket has a greater moment of inertia than conventional rackets, resulting in reduced racket rotation and a reduction of injuries to players, such as "tennis elbow".

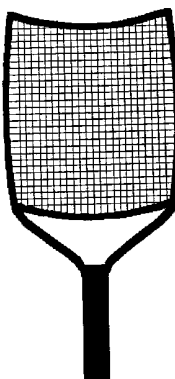

WO 02/40109 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SPORTS RACKET HAVING A UNIFORM STRING STRUCTURE

1 FIELD OF THE INVENTION

2 The present invention relates to a sports racket. In the preferred embodiment, the present
3 invention relates to a tennis racket having a uniform string structure such that all horizontal
4 (transversal) strings are of equal length and all vertical (longitudinal) strings are of equal length.

5

6 BACKGROUND OF THE INVENTION

7 A range of tennis rackets exist which have been designed to provide a more uniform,
8 powerful, forgiving and controlled response to all hits, and a larger optimal ("sweet spot") area
9 of the racket face.

10 Typically, when a tennis player swings his racket to hit the ball, he assumes that the
11 impact will be in the sweet spot of the racket face, and he swings accordingly. If the impact
12 location on a conventional racket is not on the sweet spot, or off-center, the ball encounters
13 strings of different length and the resultant ball trajectory is probably not going to be the desired
14 one. Errors such as hits into the net, beyond the baseline, or too near the opponent, will often
15 result. Further, balls hit off-center encounter strings of lengths that are different from one
16 another and different from the lengths of the central strings. The ball will rebound with less
17 speed than, and not consistent with, balls hit near the center of the racket face. Thus, for a given
18 racket swing, the hit ball velocity is highly dependent on where on the face of the racket the ball
19 is hit.

20 Additionally, with a conventional racket, when a ball strikes parallel strings of equal
21 tension but of different lengths, the strings vibrate with different frequencies, so that the
22 combined effect produces a less-than-optimal ball rebound speed.

1 In an effort to address some of the above deficiencies in conventional rackets, Woehrle et
2 al., U.S. Pat. No. 4,834,383, disclosed a tennis racket having equal string lengths for a limited
3 section of the racket. In order to achieve equal transversal string lengths over a limited section of
4 the racket, the side central regions of the head of this racket are formed differently than
5 conventional rackets. The side central regions have internal ridges forming flat inner faces and
6 extending parallel to the axis. Longitudinal strings of equal length in this limited section are
7 achieved by providing a reverse or crowned throat on the frame having a curvature identical to
8 the opposite end or crown of the head. The racket was designed with equal string lengths in a
9 limited section of the face of the racket so that, at least in this limited section, the strings would
10 provide substantially the same response.

11 Further, although the Woehrle et al. patent suggested making the racket strings of equal
12 length in the area of the sweet spot at least, a greater section of the racket face, such
13 consideration was not reduced to practice, but was rejected as unmarketable and unusable. The
14 Woehrle et al. patent stated that “no practical way of achieving this end has been found.”

15 Head, U.S. Pat. No. 3,999,756, suggested certain performance advantages provided by
16 rackets with larger (elliptical) faces compared to the conventional rackets then in use. In
17 particular, Head realized that the larger racket would move the racket face area in the beneficial
18 direction toward the racket center of mass, would move the center of the racket face near the
19 racket center of percussion, and would use longer strings which reduce the angular errors
20 resulting from off-center hits.

21 Since Head’s innovation, there have been numerous patents describing further
22 improvements, including the Woehrle et al. patent. Although these developments led to further

1 enhanced performance, the lack of serious computer modeling, as well as the lack of interesting
2 new ideas, have impeded significant progress.

3

4 **SUMMARY OF THE INVENTION**

5 It is an object of the present invention to provide an improved racket.

6 It is a further object of the present invention to provide a novel design for a racket, which
7 has a sweet spot that is considerably larger than that of conventional rackets, so that the racket
8 responds with the maximum possible degree of uniformity when a ball is struck almost anywhere
9 on the racket face.

10 It is a further object of the present invention to provide a novel design for a racket, having
11 a larger face area than conventional rackets, in order to produce more hits and better hits.

12 It is a further object of the present invention to provide a novel design for a racket, having
13 longer strings over the entire racket face, in order to reduce deflection error for off-center hits.

14 It is a further object of the present invention to provide a novel design for a racket, having
15 the frame material placed at maximal distance from the central (long) racket axes, in order to
16 increase the moment of inertia ("MOI") of the racket about this axis and minimize the resultant
17 racket rotation away from the ball for off-center hits and thereby increase forgiveness for off-
18 center hits and reduce "tennis elbow" and related injuries.

19 It is a further object of the present invention to provide a novel design for a racket which
20 provides greater ball control.

21 It is a further object of the present invention to provide a novel design for a racket in
22 which the tensions and/or mass densities for the transversal and longitudinal strings may be

1 chosen so that all of the strings on the racket vibrate with the same frequency in order to
2 optimize both consistency and performance.

3 Accordingly, the present invention is a racket having a non-elliptical shaped head and
4 racket face and an elongated handle. The overall width and length of the racket face are
5 comparable to those of conventional (generally oval shaped) racket faces, but the racket face area
6 is much larger. The racket face area is the largest possible for a given racket face width and
7 length, providing a much larger sweet spot than a conventional racket. The new invention
8 further provides maximally long strings at all points on the racket face.

9 The racket has a uniform string structure in which all of the transversal strings are equal
10 in length and all of the longitudinal strings are equal in length. The means of attaching the
11 strings to the frame of the present invention is the same as in conventional rackets.

12

13 **BRIEF DESCRIPTION OF THE DRAWINGS**

14 Figure 1 illustrates the front view of one embodiment of the racket according to this
15 invention, having a rectangular shaped head and racket face, with opposite sides parallel.

16 Figure 2 illustrates the front view of another embodiment of the racket according to this
17 invention in which the transversal sides of the racket face curve upward and are parallel
18 throughout their length.

19 Figure 3 illustrates the front view of another embodiment of the racket according to this
20 invention in which the transversal sides of the racket face curve upward and are parallel
21 throughout their length and the longitudinal sides, having a slight curvature outward.

1 Figure 4 illustrates the front view of another embodiment of the racket according to this
2 invention in which the transversal sides of the racket face curve downward and are parallel
3 throughout their length.

4 Figure 5 depicts the response of two strings, one of length 12" and the other having a
5 length of 14", on a tennis racket when they are struck by a tennis ball.

6 Figure 6 depicts the response of two strings, of different lengths but having equal
7 frequencies, on a tennis racket when they are struck by a tennis ball.

8 Figure 7 illustrates the comparison of the area of an elliptical face and a rectangular face
9 of the same width and length.

10 Figure 8 illustrates the backward rotation of a racket away from the ball during impact.

11 Figure 9 represents a graph of impact points on a racket face in which the racket is rigidly
12 fixed.

13 Figure 10 is a contour plot of the racket face illustrating the VR data of the present
14 invention with a fixed frame.

15 Figure 11 is a contour plot of the racket face illustrating the VR data of a conventional
16 racket with a fixed frame.

17 Figure 12 illustrates the racket face at the times of maximum string deflection for impacts
18 at three different locations on the racket face.

19 Figure 13 illustrates the racket face at three different times during the impact, at one
20 location.

21 Figure 14 illustrates the racket face at three different times during the impact, at one
22 location, together with the state of the ball's compression at each time.

23 Figure 15 illustrates VR behavior in relation to distance from the center.

1 Figure 16 is a three-dimensional graph of VR versus x and y, illustrating the VR behavior
2 of the present invention.

3 Figure 17 is a contour graph illustrating the variation in the VR values across the racket
4 face of the present invention.

5 Figure 18 is a contour graph illustrating the variation in the VR values across the racket
6 face of a conventional racket.

7 Figure 19 is a graph of the serve speed versus y for the present invention.

8 Figure 20 is a contour graph illustrating the variation in hit ball speed values across the
9 racket face for a typical serve with the present invention.

10 Figure 21 is a graph of the serve speed versus y for a conventional racket.

11 Figure 22 is a contour graph illustrating the variation in the service speed for the
12 conventional racket.

13

14 **DETAILED DESCRIPTION OF THE INVENTION**

15 The sports racket having a uniform string structure of the present invention will be
16 described in the context of a preferred embodiment, namely a tennis racket. The novel aspects of
17 the tennis racket described herein are applicable to other sports such as racquetball and squash.
18 Accordingly, all such sports rackets incorporating the novel elements of the present invention are
19 considered as within the scope of the present invention.

20 As seen in Figure 1, the sports racket includes a handle 5 and a head 10 having a racket
21 face 15 with transversal strings 25 and longitudinal strings 20.

22 As illustrated in Figure 1, in one preferred embodiment of the present invention, the
23 racket face 15 has a rectangular shape with opposite sides being parallel and equal in length. The

1 width of the racket face 15 is chosen to be 12", the length of the racket face 15 is 14.5", and the
2 length of the handle 5 is 8", so that the overall length of the racket is 28". As seen in Figures 2, 3
3 and 4, there are clearly other racket face shapes which will result in all of the longitudinal strings
4 20 of equal length and all of the transversal strings 25 of nearly equal length.

5 As seen in Figure 2, the transversal sides of the racket face 15 curve upward. These sides
6 remain parallel throughout their length so that the longitudinal strings 20 continue to all be the
7 same length. The maximum bend of the transversal sides is chosen to be 1". This frame may be
8 more visually appealing and easier to construct than the rectangular shaped frame.

9 As seen in Figure 3, the sides of the racket face 15 curve slightly outward, having such a
10 curvature so that the string tension brings the sides back to the straight and parallel position, or
11 nearly so. All of the transversal strings 25 would not be of exactly the same length, but, if the
12 curvature is sufficiently small, with a maximum bend less than 0.5", the affects of such small
13 length inequalities is negligible.

14 As seen in Figure 4, the transversal sides of the racket face 15 curve downward. These
15 sides remain parallel throughout their length so that the transversal strings 25 continue to all be
16 the same length. The resultant racket face 15 includes more of the optimal hitting surface.

17 Since the longitudinal strings 20 and transversal strings 25 are all the same length , they
18 will vibrate at the same frequency and will respond identically. A ball struck almost anywhere
19 on the racket face 15 will encounter the same grid of strings and will therefore respond with the
20 maximum degree of uniformity. As an illustration, the graph in Figure 5 depicts the response of
21 two strings, one 12" in length and the other 14" in length, on a tennis racket when they are struck
22 by a tennis ball. The strings vibrate with different frequencies, so that the combined effect
23 produces a less-than-optimal ball rebound speed. If the length of the second struck string were

1 the same as the first, then the responses would be in phase and so the combined effect would
2 produce a greater ball rebound speed, as provided by the present invention.

3 The uniform string structure of the present invention provides an advantage for central
4 impacts as well as non-central impacts. The speed of a hit ball depends not only on the strings
5 near the impact area, but, to some extent, on all of the strings of the racket. The impact with the
6 ball sets up a vibration pattern that spreads out from the impact area to the frame and back. The
7 uniform string structure of the present invention leads to a more unified propagation of these
8 vibrational waves, and to a consequent more powerful response. In addition, the longer string
9 lengths of the present invention cause the strings to deflect more and the ball to compress less,
10 leading to a greater return of energy to the ball. The present invention's constructive interference
11 of strings that vibrate with the same frequency gives rise to the best possible ball rebound speed
12 for all impact locations.

13 The uniform string structure of the present invention provides for the ability to select
14 different tensions and/or mass densities for the transversal strings 25 and the longitudinal strings
15 20 so that all of the strings on the racket face 15 vibrate with the same frequency. The
16 vibrational frequencies can be made equal by choosing the appropriate tension to mass ratio for
17 the transversal strings 25 and for the longitudinal strings 20. The result will be a racket all of
18 whose strings vibrate with the same frequency.

19 For example, if two strings of different length are given different tension values and/or
20 mass values, such that the frequencies are equal, the response of the strings, as represented in
21 Figure 6, are now in phase. The combined effect is optimal.

22 The present invention provides two geometrical advantages over a conventional racket,
23 larger racket face 15 area and greater moment of inertia. To quantify these advantages, consider

1 a conventional ellipsoidal racket face and a rectangular shaped racket face of the same width and
2 length, as shown in Figure 7. The rectangular racket face has over 27% more area than the
3 ellipsoidal racket face. In a preferred embodiment of the present invention, having a rectangular
4 shaped racket face 15, there will result a greater surface area for the ball to impact. The present
5 invention will produce more hits and better hits. The present invention will produce acceptable
6 hits in areas where the conventional racket completely misses the ball, and it will produce good
7 hits in areas where the conventional racket produces bad hits.

8 The greater area of the racket face 15 of the present invention leads to longer strings at
9 non-central locations. With a conventional racket, when a ball impact is off-center, in either the
10 transversal or longitudinal direction, the string deflections are not symmetrical. The ball
11 rebounds with an angular deflection error. It is obvious that the longer the strings are that are
12 encountered by a ball, the smaller the angular deflection error. Therefore, the present invention,
13 having longer strings, will reduce the angular deflection error.

14 Further, the moment of inertia of the present invention, having a rectangular shaped head
15 and face, is approximately 50% larger than the moment of inertia of an ellipse frame of equal
16 weight. As seen in Figure 8, in the left picture the tennis ball is approaching the racket from the
17 left, several inches above the centerline. In the right picture, the ball is leaving the racket after
18 the impact. The impacted racket is rotating clockwise as a consequence of the torque exerted by
19 the ball. When the ball leaves the racket, the racket has rotated through an angle A relative to its
20 initial direction, and this causes the ball to leave the racket face in a direction that is rotated
21 relative to the incident direction. The large moment of inertia of the present invention renders
22 the angle A, the racket rotation angle, and the ball's angular deviation, to be relatively small.
23 Since the moment of inertia of the present invention is 50% greater than that of conventional

1 rackets, the present invention will rotate away from the ball 50% less than will conventional
2 rackets of equal weight. The error introduced in the ball's rebound direction will consequently
3 be approximately 50% less. Numerically, A is about 4.5 degrees for a good ground stroke
4 impacted 3" from the centerline with a conventional racket. For the same hit with the present
5 invention, A is reduced to approximately 3 degrees.

6 The reduced rotation of the present invention, in addition to performance benefits, also
7 will reduce "tennis elbow" and related injuries, as the twist of the racket frame is believed to be a
8 major contributor in these injuries.

9 Computer modeling provides further support for the improvements and objects of the
10 present invention. First, the ball has been modeled. The equations describing the perpendicular
11 impact of a ball (which meets USTA specifications) on a rigid wall (an incompressible and
12 infinitely heavy flat surface) have been solved by computer. The results provide a complete
13 description of the position, shape and velocity of a ball, at all times during impact, as represented
14 in Table 1 below. The first column gives the impact speed, which is chosen to range from 20 to
15 100 mph. The second column gives the corresponding maximum inward compression distance
16 of the ball in inches, the third column gives the total time (in milliseconds) during which the ball
17 is in contact with the surface (the impact time, or dwell time), and the final column gives the
18 ratio of ball rebound speed to impact speed. This velocity ratio ("VR") is the coefficient of
19 restitution ("COR") of the ball at the given impact speed. This important quantity has been
20 normalized to 0.75 at the impact speed of 15.7 mph.

Table 1

BALL IMPACTS ON RIGID SURFACE			
Imp Speed (mph)	Ball Compr (in)	Imp Time (ms)	Vel Ratio VR
20	0.394	3.437	0.743
40	0.673	2.965	0.705
60	0.928	2.729	0.692
80	1.155	2.580	0.678
100	1.362	2.453	0.667

These data reveal the expected results that, as the impact speed increases, the ball's maximum compression increases, the impact time decreases, and the VR decreases. There have been no previous accurate theoretical or experimental determinations of these quantities at these speeds.

Further, the tennis racket has been modeled for the case when the racket face is rigidly clamped to a stationary flat surface. The equations describing the perpendicular impact between this racket face and the ball have been solved by computer, providing a complete description of the motions of the ball and racket for all times during the impact. The only relevant information about the racket is the string tension T , the string mass per unit length M , and the (essentially rectangular) shape of the string boundary (the inside perimeter of the face). The initial conditions are that the strings are at rest and the ball strikes the racket at $t = 0$ at a specified point on the face with a specified velocity v .

To specify positions on the rectangular racket face, the coordinate system shown in Figure 9 was used. The origin is at the center of the lower horizontal (short) face segment and the x-axis runs along this segment. The y-axis runs in the vertical (long) direction in the center of the racket face. Assume that at $t = 0$ the ball strikes the racket face with a given speed v , at a point (x,y) where two strings cross. The subsequent motion of the strings and the ball is then completely determined by the equations of motion, solved by computer. All of the

1 dynamics, including the compression of the ball as it spreads out on the strings, and the
 2 deflection of the strings, is thus predicted. Some of the results of these calculations are given in
 3 Table 2.

4 First, consider impacts at the nine points indicated by dots in Figure 9 of the racket face
 5 15. Because the frame is rigidly fixed, the results are symmetric about the y axis and about the
 6 horizontal centerline $y = 7.5$. It is therefore only necessary to consider impacts in the lower right
 7 quadrant of the face. Some of the results of these impacts are given in the following tables.

8 Table 2 represents the calculated ball velocity ratio (VR) at each of the coordinates ($x = 0.5, 2.5,$
 9 and 4.5 inches and $y = 1.5, 4.5,$ and 7.5 inches) in the case when the impact speed is 80 mph, the
 10 string tension is 60 pounds, and the distance between adjacent strings is 0.5 inches. (In the game
 11 situation, the impact speed is the relative speed between the ball and the racket, e.g., a ball speed
 12 of 30 mph and a racket speed of 50 mph.) This VR, the ratio of the rebound speed of the ball
 13 immediately after the impact to the incident speed of the ball immediately before the impact, is
 14 not the COR between the ball and racket. (The COR is the ratio of the rebound and incident
 15 relative speeds for a ball impacting on a free racket.)

16 **Table 2**

VELOCITY RATIOS ON FIXED RACKET			
vertical position	horizontal position		
	x = 0.5	x = 2.5	x = 4.5
y = 7.5	0.863	0.825	0.770
y = 4.5	0.868	0.835	0.774
y = 1.5	0.778	0.771	0.749

17
 18 These VRs range from a maximum of 0.87 near the center of the racket face 15 to a
 19 minimum of 0.75 near the corner of the racket face 15. These values are higher than those of
 20 conventional rackets, and the region of excellent performance ($VR \geq 0.80$) is much larger than

1 that of conventional rackets. The powerful and uniform response provided by this racket is thus
2 confirmed.

3 Figure 10 illustrates the above VR data more clearly on a contour plot of the racket face
4 15. The (lightest) central area is the region with VR greater than 0.85. The increasingly darker
5 subsequent outer rings correspond respectively to regions with VRs in the ranges 0.83-0.85,
6 0.81-0.83, 0.79-0.81, and 0.77-0.79. The darkest outer region corresponds to VRs less than 0.77.
7 The racket face area within one inch of the frame is not shown because balls that impact in this
8 area touch the frame. The sweet spot of this clamped racket, comprising the central region plus
9 the three adjacent rings, is seen to comprise almost the entire racket face 15, which remains true
10 for the hand-held racket. Note that, although the racket face region near the frame is an area of
11 lower performance, this region cannot be eliminated, rendering the racket face to be more
12 elliptical, without reducing performance on the rest of the racket face and reducing the MOI.

13 When the fixed frame VRs are similarly calculated for a conventional racket with an
14 elliptical frame, it is seen that the overall best performance, and especially the performance for
15 off-center hits, is significantly reduced. The VR contour plot for the conventional racket of the
16 same width, length, and string tension, and for the same ball and impact speed, is provided in
17 Figure 11. The region within 1" of the frame is excluded as before. The contour lines
18 correspond to the same VR values as in the plot for the present invention given above. Now the
19 maximum VR is reduced from 0.87 to 0.86, the size of the central best-performance region, with
20 $VR > 0.85$, is greatly reduced, as is the size of each of the outer regions. The size of the low-
21 performance (darkest) outer region, corresponding to $VR < 0.77$, is greatly increased. The
22 sweet-spot area, with $VR > 0.79$, which comprised most of the racket face of the present

1 invention, is now reduced to a relatively small region. The superiority of the present invention is
2 thus clearly exhibited.

3 The above VR data, along with additional results, are given in Table 3. The x and y
4 coordinates of the impact points are given in the first two columns. The maximum string
5 deflection is given in the third column. The maximum ball compression distance is given in the
6 fourth column, the total impact time is given in the fifth column, and the VR is given in the final
7 column.

8 **Table 3**

BALL IMPACTS ON FIXED RACKET					
Impact Point		String Defl	Ball Compr	Imp Time	Vel Ratio
x (in)	y (in)	(in)	(in)	(ms)	VR
0.5	1.5	0.196	1.121	2.772	0.778
0.5	4.5	0.330	1.039	2.928	0.868
0.5	7.5	0.333	1.018	3.089	0.863
2.5	1.5	0.185	1.128	2.749	0.771
2.5	4.5	0.296	1.087	2.915	0.835
2.5	7.5	0.296	1.066	2.968	0.825
4.5	1.5	0.145	1.128	2.720	0.749
4.5	4.5	0.196	1.114	2.779	0.774
4.5	7.5	0.196	1.100	2.794	0.770

9
10 The string deflections are seen to range from 0.333 inches near the center of the
11 face to 0.145 inches near the corner. The ball compressions range from 1.02" for impacts near
12 the center of the face to 1.13" for impacts near the corner. (The ball diameter is 2.5".) It is
13 expected that the more the strings deflect, the less the ball compresses, and so the less kinetic
14 energy the ball loses, and so the greater is the VR. This expectation is clearly borne out by
15 these data. The expected result that larger string deflections result in longer impact times is also
16 confirmed.

17 Computer generated pictures of some of the impacts are illustrated in Figures 12, 13 and
18 14. Figure 12 shows the racket face 15 at the times of maximum string deflection for impacts at

1 three different locations on the racket face. Figure 13 shows the racket face 15 at three different
 2 times during the impact, at one location near the center of the face. Figure 14 shows the same
 3 thing as in Figure 13, together with the state of the ball's compression at each time. For clarity,
 4 not all of the strings are shown, and the ball is shown larger than scale.

5 All of the above results were obtained for an incident ball speed of 80 mph and a string
 6 tension of 60 pounds. It is of considerable interest to see how the details of the impacts change
 7 when the speed or the tension changes. The impact point will be fixed at the central point $x=0.5$,
 8 $y=7.5$. The data for fixed (60 pound) tension and variable ball speed is provided in Table 4,
 9 along with, for purposes of comparison, the previously given data for impacts on a rigid surface.
 10 For impacts on the fixed frame, the maximum ball compression, the maximum string deflection,
 11 and the VR are all seen to increase as the impact speed increases from 20 to 100 mph, whereas
 12 the impact time decreases. This VR trend is in contrast to the decrease of VR with increasing
 13 speed in the rigid surface impacts. At all speeds, however, the VRs are larger than those of any
 14 other racket at this string tension.

15 **Table 4**

BALL IMPACTS ON RIGID SURFACE				IMPACTS ON FIXED FRAME (Ten = 60 lbs)			
Imp Speed	Ball Compr	Imp Time	Vel Ratio	Ball Compr	String Defl	Imp Time	Vel Ratio
(mph)	(in)	(ms)	VR	(in)	(in)	(ms)	VR
20	0.394	3.437	0.743	0.363	0.066	3.722	0.842
40	0.673	2.965	0.705	0.607	0.150	3.386	0.853
60	0.928	2.729	0.692	0.818	0.240	3.210	0.859
80	1.155	2.580	0.678	1.018	0.333	3.089	0.863
100	1.362	2.453	0.667	1.204	0.430	3.012	0.868

16
 17
 18 The data for fixed (80 mph) incident ball speed and variable tension is represented in
 19 Table 5. As the tension increases from 50 to 70 pounds, the maximum ball compression, the
 20 maximum string deflection, the impact time, and the velocity ratio are all seen to decrease.

1 Therefore, the racket becomes more powerful as the tension decreases. On the other hand, the
 2 maximum string deflection, and therefore the angular rebound error, increases as the tension
 3 decreases. Therefore, as also has been previously suggested, a decrease of control is the price
 4 paid for this increase of power with decreasing tension. At all tensions, however, the VRs
 5 reported here are larger than those of any other racket at this incident ball speed.

6 **Table 5**

BALL IMPACTS ON FIXED FRAME (Vel = 80 mph)				
Tension (lbs)	Ball Compr (in)	String Defl (in)	Imp Time (ms)	Vel Ratio VR
50	1.279	0.354	2.844	0.923
60	1.259	0.295	2.757	0.860
70	1.252	0.250	2.695	0.815

7
 8 With respect to fine tuning the racket, the tensions can be chosen differently in the
 9 transversal strings 25 and longitudinal strings 20 so that the string frequencies become equal. If
 10 the longitudinal strings 20 have length l and tension T , and the transversal strings 25 have length
 11 w and tension T' , then the equal frequency condition is $T/T'=(l/w)^2$. This requires that the
 12 transversal strings 25 and longitudinal strings 20 have different tensions. There is a good reason
 13 to choose the transversal string 25 tension to be less than the longitudinal string 20 tension. As
 14 seen directly above, a decrease in tension leads to an increase in power together with an increase
 15 in angular rebound error. However, the angular rebound error from the transversal strings 25 is
 16 (at least partly) compensated for by the backward rotation of the racket. Since there is no such
 17 compensation for the angular rebound error from the longitudinal strings 25, it is clearly best to
 18 reduce the transversal string tension. With $l = 15''$ and $w = 12''$, the tension ratio $T/T'=1.56$.
 19 With $T = 70$ lbs., this gives $T' = 45$ lbs. With this choice, the 70 lb. tension VR of 0.815

1 increases to 0.925, with no loss of control. All of the above results were obtained for a string
2 spacing of 0.5 inches.

3 The above fixed racket face data is the most appropriate for making comparisons between
4 the new class of rackets and conventional ones. This is because, when the face is clamped, only
5 the face geometry and the string tensions are relevant to performance and so comparisons can be
6 made under equal boundary conditions. The other racket characteristics (weights, moments of
7 inertia, frame rigidity, etc.), that in general also effect performance, can be chosen independently
8 of the new features that have been introduced heretofore. The performance of the present
9 invention under game conditions has also been evaluated in the case when the ball impacts a
10 free, instead of a clamped, racket at rest and in the case when the ball impacts a swinging racket.
11 It should be noted that since these transformations are the same for all rackets with the same
12 weight, etc., the fact that the present invention has superior performance at all locations in the
13 clamped situation implies that it will continue to be superior at all locations in the game
14 situation.

15 It is well established that a free and a hand-held racket behave the same during an impact
16 with a ball. In considering the perpendicular impacts of a regulation tennis ball onto a typical
17 new racket that is at rest and free, it will be assumed that the rectangular racket face 15 has
18 interior dimensions 12" by 15" as above. The other relevant racket characteristics are chosen as
19 follows. The racket weight (W) is 14 ounces. The center of mass (COM) is located at the center
20 of the edge of the racket face 15 above the handle 5. The MOI (I_0) about the horizontal axis
21 ($y=0$) parallel to this edge through the COM is 800 ounce-inch-squared. For numerical
22 convenience, these MOI units are based on weight instead of mass. The MOI value is thus the

1 product of the conventional value and the acceleration of gravity. The MOI (I) about the long
2 central longitudinal racket axis ($x=0$) is 200 ounce-inch-squared.

3 In the clamped face case, the VR was relatively large and had only small variations
4 across the racket face 15. With the racket free to move during the impact, smaller values and
5 larger variations of the VR will arise for the following reasons. Part of the kinetic energy of the
6 ball will now be transmitted into the backward translation of the COM of the racket. This will
7 reduce the VR by an amount that is inversely proportional to the racket weight W . Part of the
8 kinetic energy of the ball will now be transmitted into the backward rotation of the racket about
9 the horizontal axis ($y=0$) through the COM. This will reduce the VR by an amount that is
10 inversely proportional to the racket MOI I_o , and that is directly proportional to the perpendicular
11 distance (y) of the impact point from this axis. Part of the kinetic energy of the ball will now be
12 transmitted into the backward rotation of the racket about the vertical axis ($x=0$) through the
13 COM. This will reduce the VR by an amount that is inversely proportional to the racket MOI I ,
14 and that is directly proportional to the perpendicular distance (x) of the impact point from this
15 axis.

16 For the clamped-face case, the $VR=k(x,y)$ was maximal at the center of the racket face 15
17 ($x=0, y=7.5$) and slowly decreased in directions away from this center. When the above effects
18 are taken into account, this behavior is modified such that the VR maximum is shifted
19 downwards towards the COM ($x=0, y=0$) and the VR values tend to decrease with increasing
20 distance y from the transversal axis and with increasing distance x from the longitudinal axis.
21 This behavior is illustrated in the graphs in Figure 15, which plot the VR along three vertical
22 lines ($x=0, x=2, x=4$) and three horizontal lines ($y=3, y=7.5, y=12$). (From symmetry, the VR

1 value at $-x$ is the same as the value at x .) The maximum of the VR is seen to occur near the point
2 $(x=0, y=3)$.

3 The VR behavior is exhibited more clearly and completely by the three-dimensional
4 graph of VR versus x and y in Figure 16. The maximum near $x=0, y=3$, and the fall-off toward
5 the edges are clearly seen.

6 Another way to illustrate the variation in the VR values across the racket face 15 is with
7 the contour graph in Figure 17. The (lightest) central area is the region with VR greater than 0.5.
8 The increasingly darker subsequent outer rings correspond respectively to regions with VRs in
9 the ranges 0.4-0.5, 0.3-0.4, 0.2-0.3, and 0.1-0.2. The darkest outer region corresponds to VRs
10 less than 0.1. Each of these regions is significantly larger than the corresponding region of
11 conventional rackets.

12 When the free frame VRs are similarly calculated for a conventional racket with an
13 elliptical face, but with the same weight and MOIs, it is seen in Figure 18 that all of the
14 corresponding contour regions are significantly reduced in length and especially in width. The
15 (lightest) innermost region of best performance ($VR > 0.5$) is now reduced to a small oval, and
16 the (darkest) outer region of worst performance ($VR < 0.1$) is now much larger. The superiority
17 of the present invention is again clearly established.

18 To see how the above VR values translate to the hit ball speeds that the racket can deliver
19 in a tennis game, it is only necessary to make a transformation from the above coordinate frame,
20 with the racket at rest prior to the impact, to the tennis court frame, in which the racket is
21 swinging towards the moving ball prior to the impact. To this end, consider the perpendicular
22 impact between a ball moving with velocity v and the racket moving with velocity $V(y)$ at the
23 point of impact (x,y) on the face of the racket. In general, the racket velocity consists of a part

1 that is translational, arising from the motion of the COM, and a part that is rotational, arising
 2 from the rotation of the racket about the horizontal axis $y=0$ through the COM. The translational
 3 part is independent of x and y , and the rotational part is proportional to y (but independent of x).
 4 The general expression for the velocity $v'(x,y)$ of the ball as it leaves the racket is $v'(x,y) =$
 5 $V(y)[1+k(x,y)]+v$, where $k(x,y)$ is the velocity ratio function described above (the VR for a free
 6 racket at rest prior to the impact).

7 The explicit form of the racket velocity function $V(y)$ depends on the player's ability and
 8 his choice of stroke (forehand, backhand, serve, etc.). As a specific example, consider the first
 9 serve of a good player, with racket speed $V(y) = 65 + 2.25y$, in mph. The racket speed is thus 65
 10 mph at the COM ($y=0$), and nearly 82 mph at the center of the racket face ($y=7.5$). When this is
 11 substituted into the above equation (with incident ball speed $v=0$, appropriate to a serve), the hit
 12 ball speed v' is obtained for impacts at any point (x,y) on the face of the racket. The maximum of
 13 v' (the best place on the racket for this player to hit his serve) will be shifted upwards from the
 14 point ($x=0, y=3$) where the VR k is maximal, because the racket speed increases as y increases.
 15 The graph of the serve speed $v'(0,y)$ versus y is provided in Figure 19.

16 The maximum of the hit ball speed in this serve is seen to be 122 mph, obtained when the
 17 ball is struck at 8.3 inches above the lower edge of the frame. (Recall that the maximum of the
 18 VR occurred at 3 inches from this edge.) If the ball is struck off of the vertical centerline $x=0$,
 19 then the hit speed will be less than shown above because of the decrease of the VR function
 20 $k(x,y)$ as x increases. The variation in the hit ball speed values across the racket face is
 21 illustrated in the contour graph in Figure 20. The (lightest) central area is the region with hit
 22 speed greater than 120 mph. The increasingly darker subsequent outer rings correspond
 23 respectively to regions with speeds in the ranges 115-120, 110-115, 105-110, and 100-105 mph.

1 The darkest outer region corresponds to speeds less than 100 mph. Each of these regions is again
2 significantly larger than the corresponding region of conventional rackets. The sweet spot region
3 with speeds greater than 100 mph is now almost the entire racket face 15, and is centered near
4 the geometric center of the face. The performance of this racket is exceptional, and can be
5 increased even further using the fine-tuning techniques discussed above.

6 For a conventional racket of the same face width, face length, tension, weight, MOIs, and
7 for the same ball and service motion as above, the serve speed graph of $v'(0,y)$ illustrated in
8 Figure 21 shows a reduced maximum speed (121 mph instead of 122 mph), and a much faster
9 fall off from this maximum value.

10 The service speed contour plot represented in Figure 22 for the conventional racket also
11 confirms the performance advantages of the present invention. The (lightest) central region with
12 hit ball speed $v' > 120$ mph, is now much smaller, as are the surrounding rings with contours $v' =$
13 115, 110, 105, and 100 mph. The (darkest) outer region, with $v' < 100$ mph is now much larger.

WHAT IS CLAIMED IS:

- 1 1. A racket comprising:
 - 2 a frame with an elongated handle defining a longitudinal main axis;
 - 3 a head connected to the elongated handle;
 - 4 said head having parallel longitudinal sides and parallel transversal sides;
 - 5 said head having a racket face, to be spanned by strings;
 - 6 said head having a means for securing strings to the frame;
 - 7 a plurality of transversal strings, all being of substantially identical length, running
 - 8 essentially parallel to each other and generally perpendicular to said longitudinal axis and
 - 9 secured to the frame; and
 - 10 a plurality of longitudinal strings, all being of substantially identical length, running
 - 11 essentially parallel to each other and parallel to said longitudinal axis and secured to the
 - 12 frame, the transversal strings and longitudinal strings together covering the entire racket
 - 13 face.
- 14 2. The racket defined in claim 1 wherein said head and said racket face are rectangular
- 15 shaped.
- 16 3. The racket defined in claim 1 wherein the transversal sides of said racket face curve
- 17 upward with the sides remaining parallel throughout their length so that said longitudinal
- 18 strings continue to all be the same length.
- 19 4. The racket defined in claim 1 wherein the sides of said racket face curve slightly outward,
- 20 having such a curvature so that the string tension brings the sides back to the substantially
- 21 straight and parallel position.

- 22 5. The racket defined in claim 1 wherein the transversal sides of said racket face curve
23 downward and the sides remain parallel throughout their length so that said transversal
24 strings continue to all be the same length.
- 25 6. The racket defined in claim 1 wherein the distances between the intersection points of all
26 of said longitudinal strings and all of said transversal strings is equal.
- 27 7. The racket defined in claim 1 wherein the width of said racket face is 12", the length of
28 said racket face is 14.5", the length of said elongated handle is 8" and the total length of
29 the racket is 28".
- 30 8. The racket defined in claim 3 wherein the maximum curvature of the transversal sides of
31 said racket face is 1".
- 32 9. The racket defined in claim 4 wherein the maximum curvature of the sides of said racket
33 face is less than 0.5".
- 34 10. The racket defined in claim 1 wherein the space between the longitudinal strings varies
35 and the space between the transversal strings varies.
- 36 11. The racket defined in claim 1 wherein the tension and/or mass values of said longitudinal
37 strings and said transversal strings are selected so that the vibrational frequencies of the
38 strings are equal.
- 39 12. The racket defined in claim 1 wherein the tension and/or mass values of said longitudinal
40 strings and said transversal strings are selected in accordance with desired ball response
41 characteristics.
- 42 13. The racket of claim 1 wherein said racket is a tennis racket, a racquetball racket, a
43 badminton racket or a squash racket.

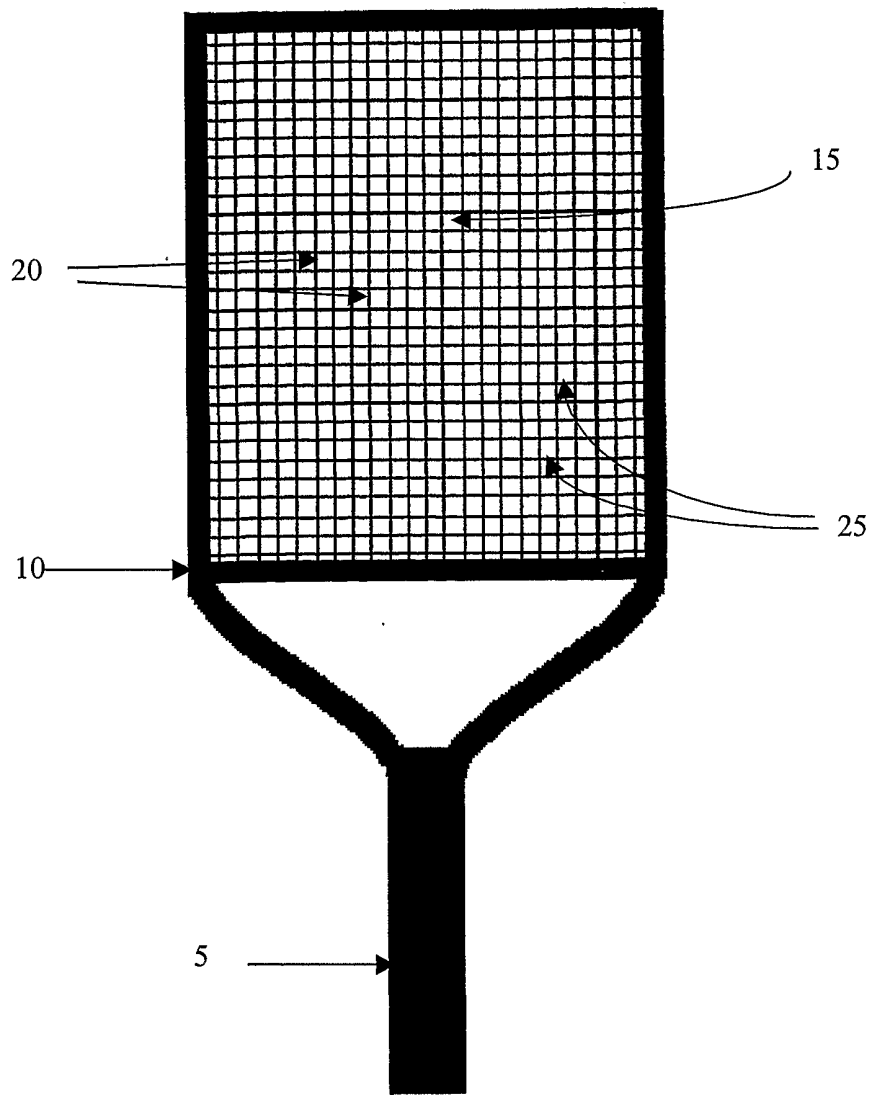


FIG. 1

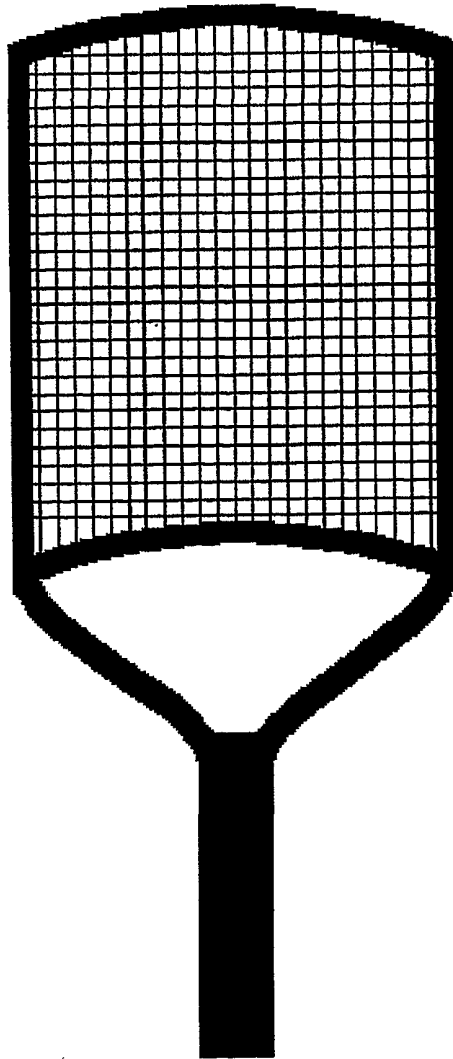


FIG. 2

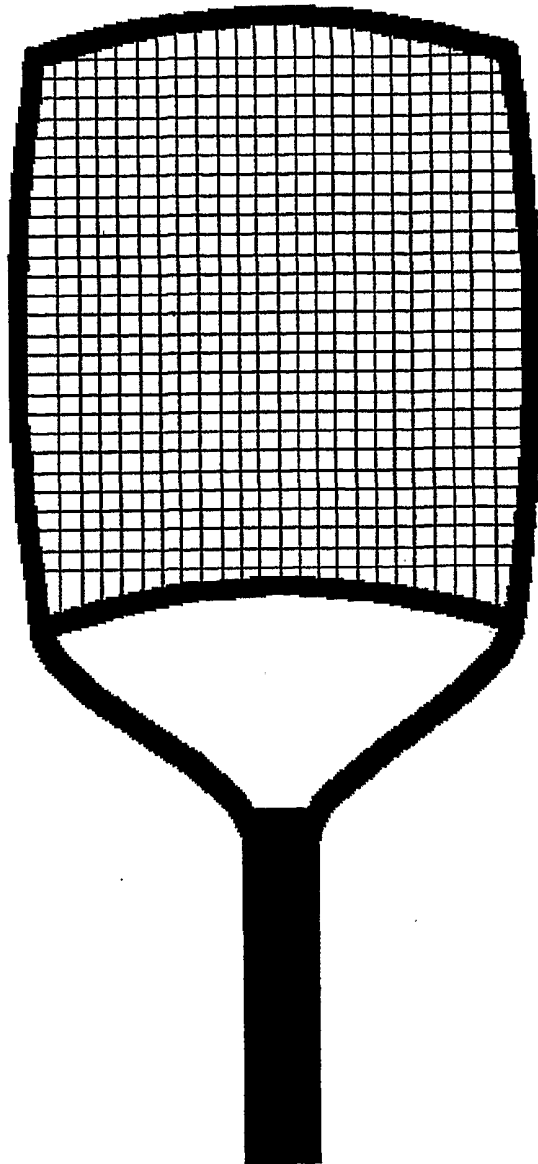


FIG. 3

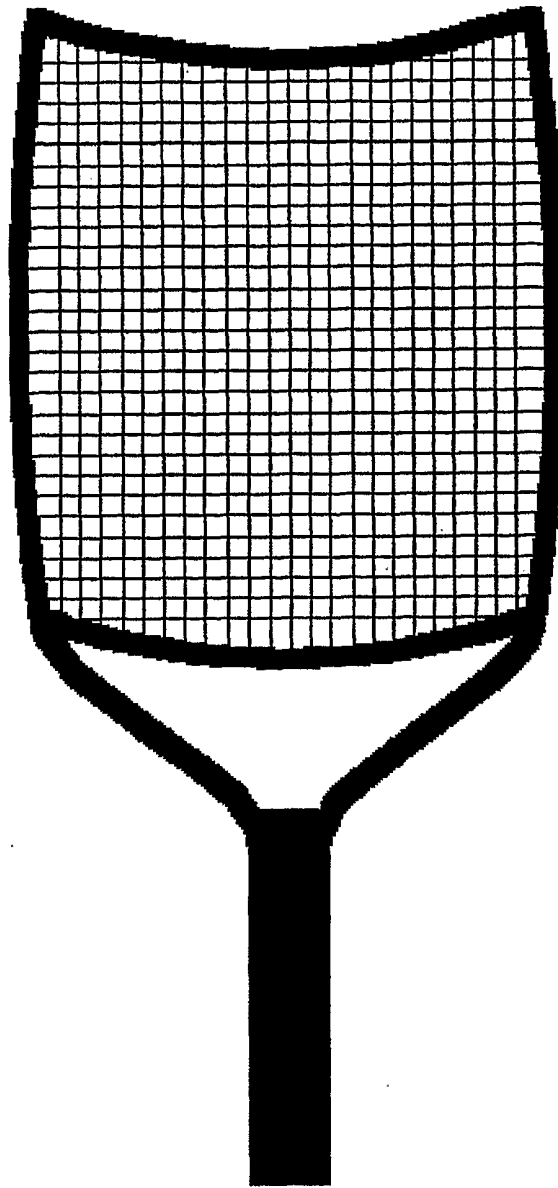


FIG. 4

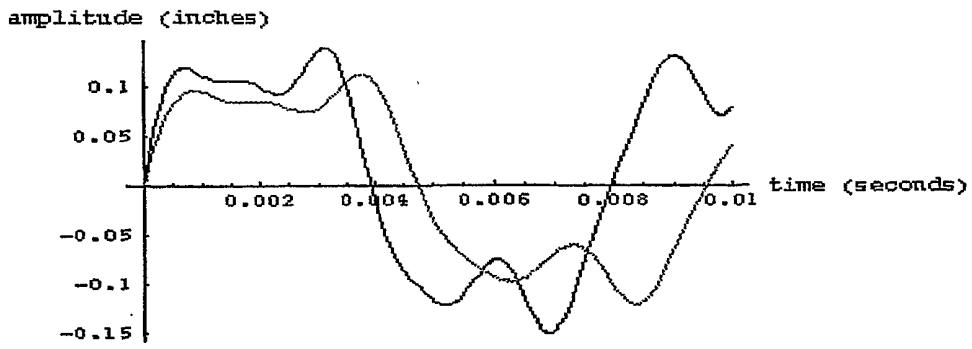


FIG. 5

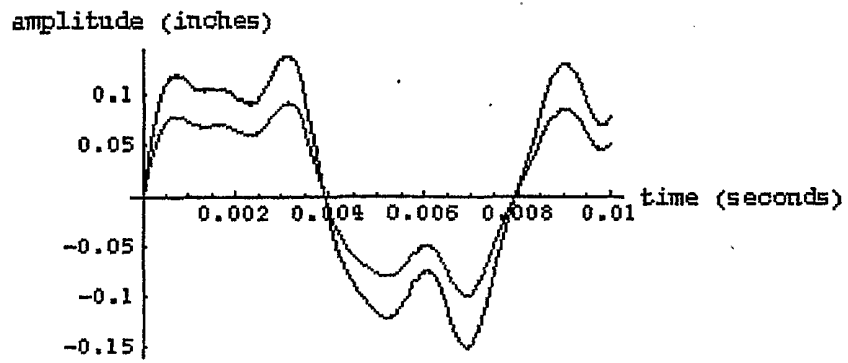


FIG. 6

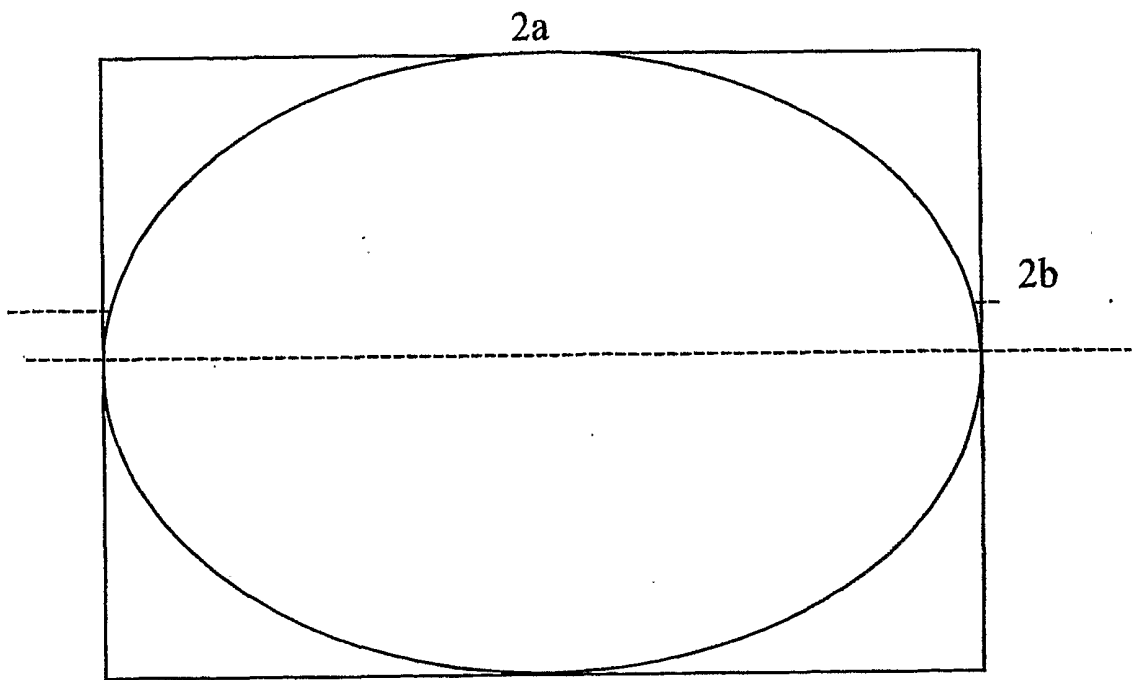


FIG. 7

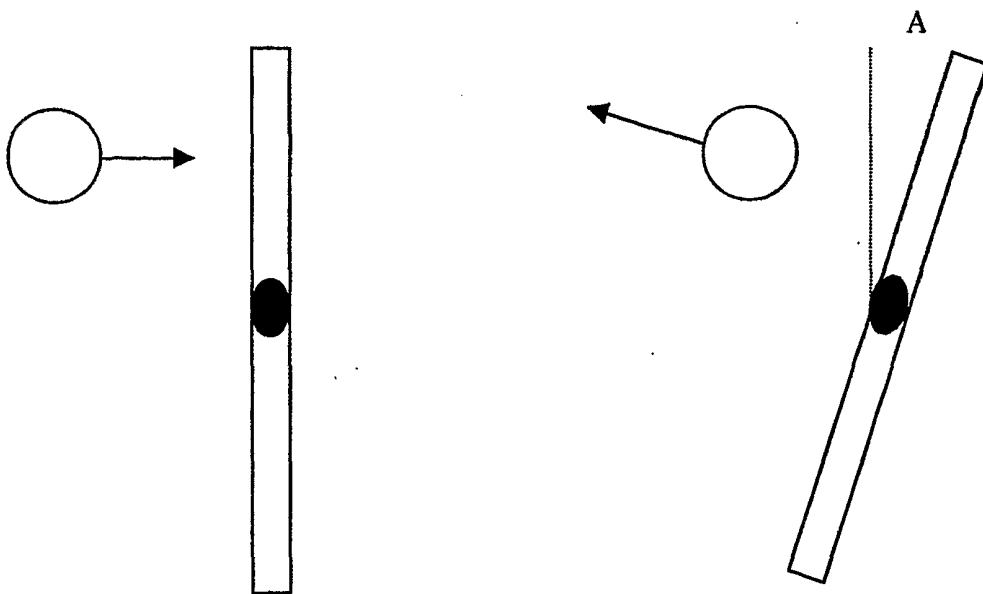


FIG. 8

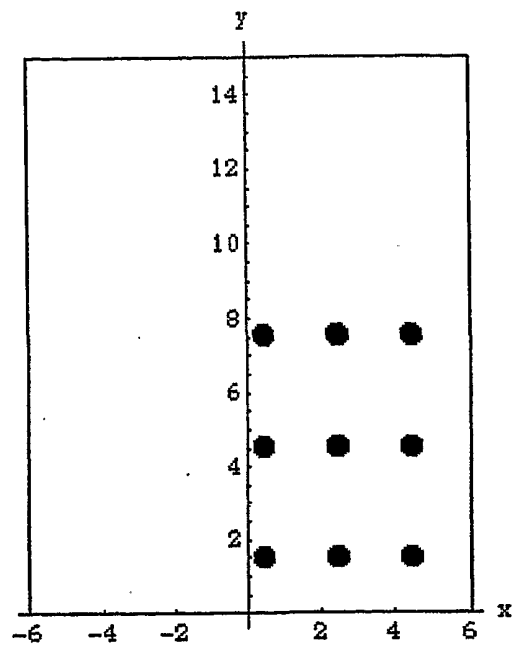


FIG. 9

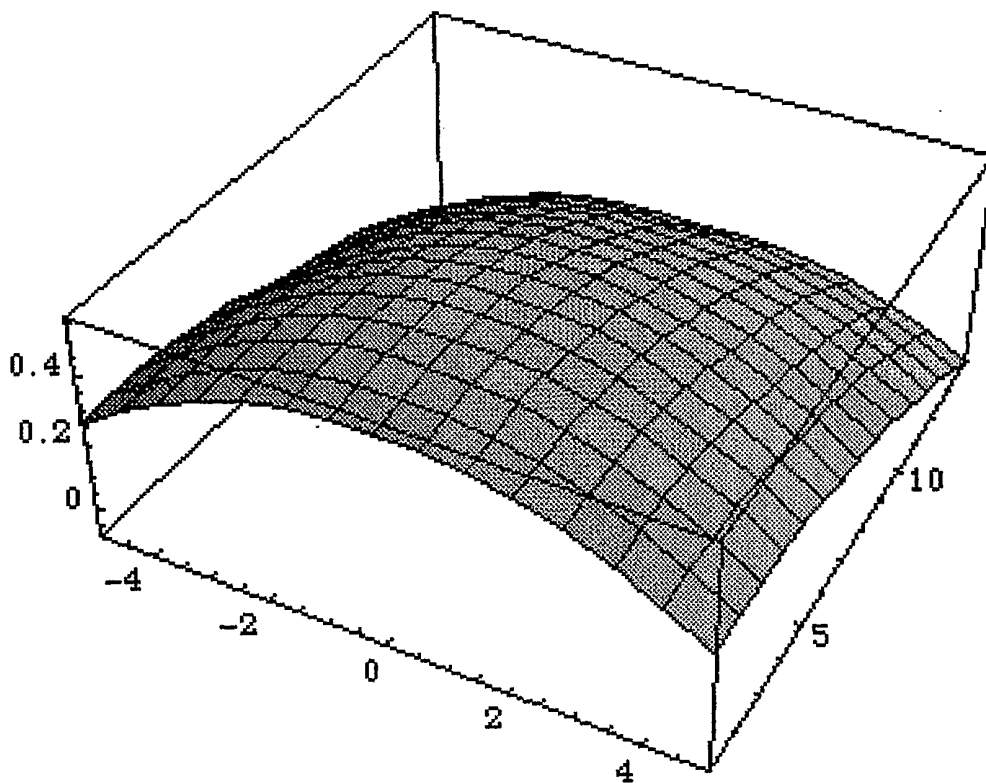


FIG. 16

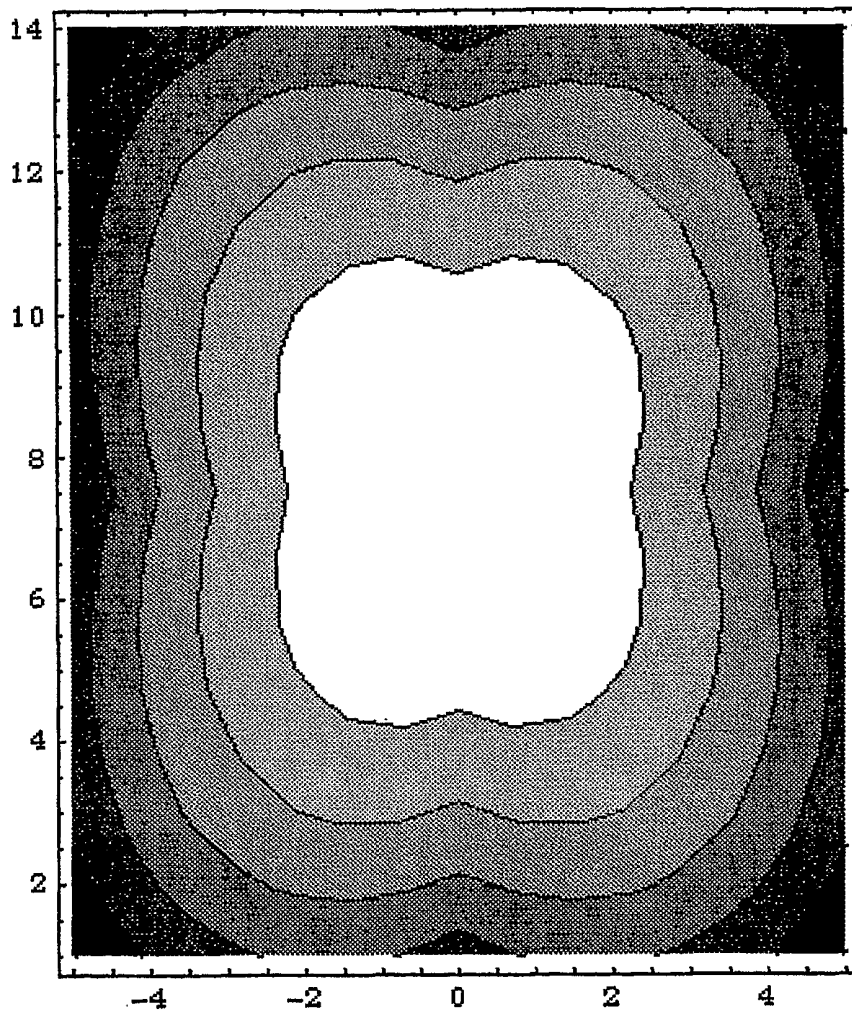


FIG. 10

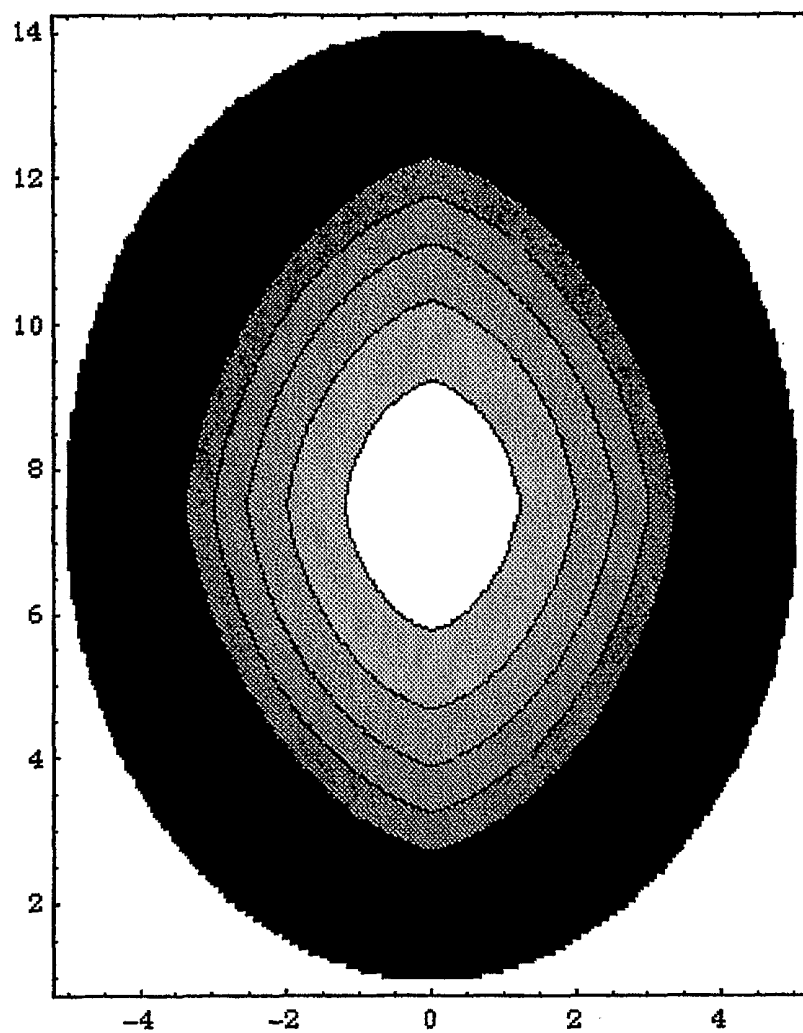


FIG. 11

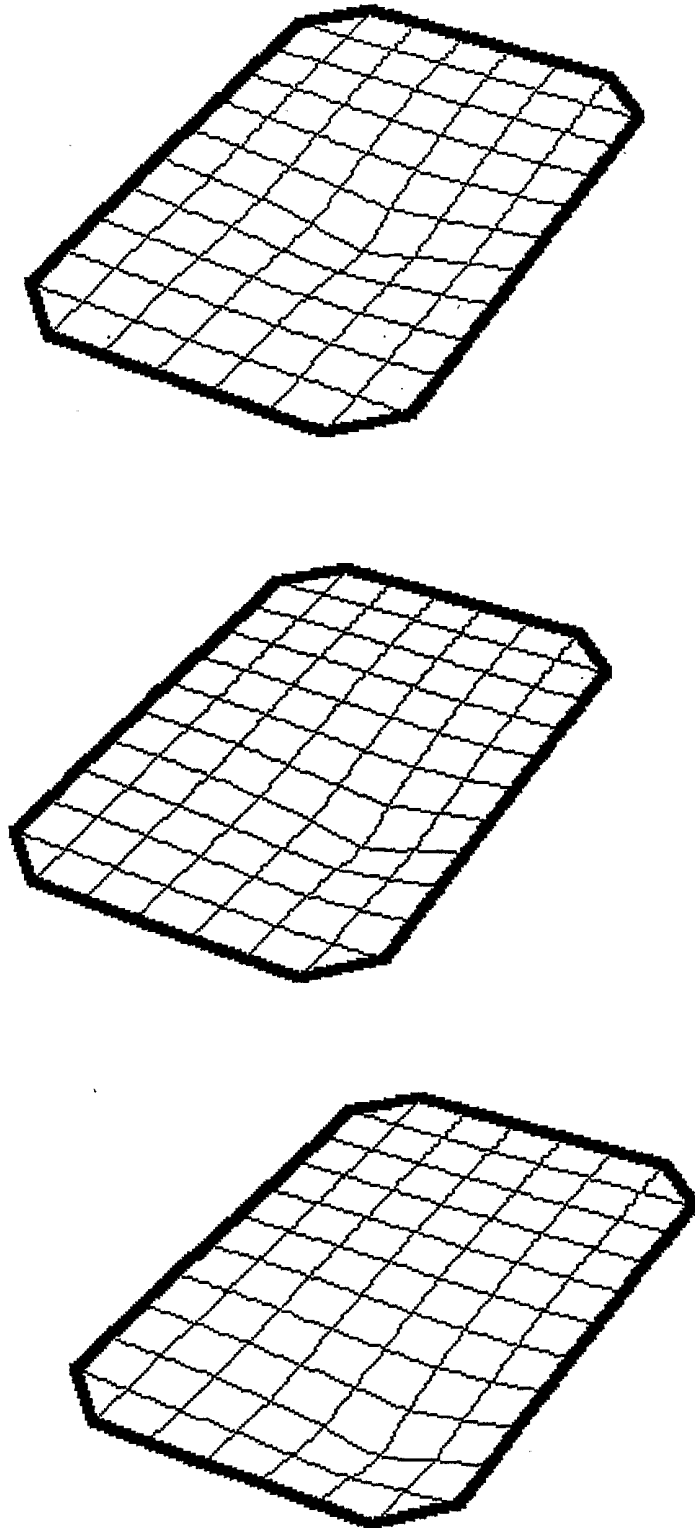


FIG. 12

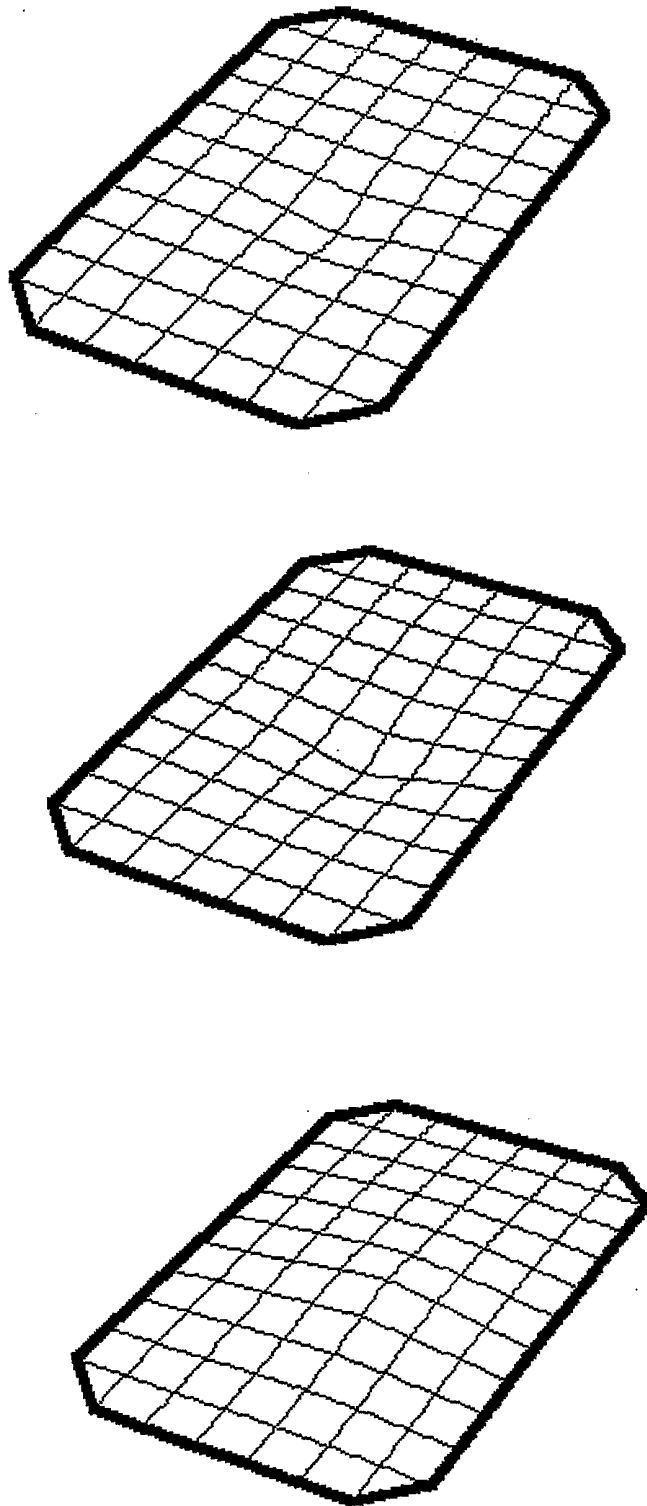


FIG. 13

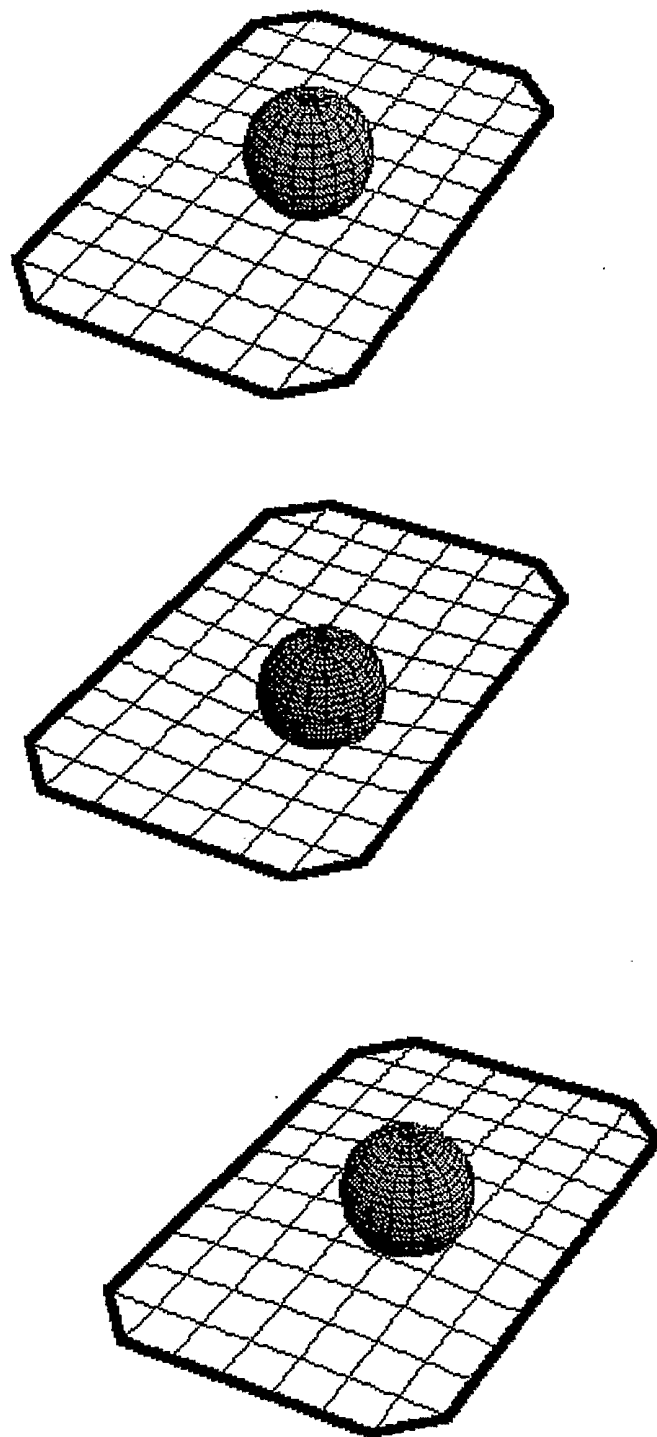


FIG. 14

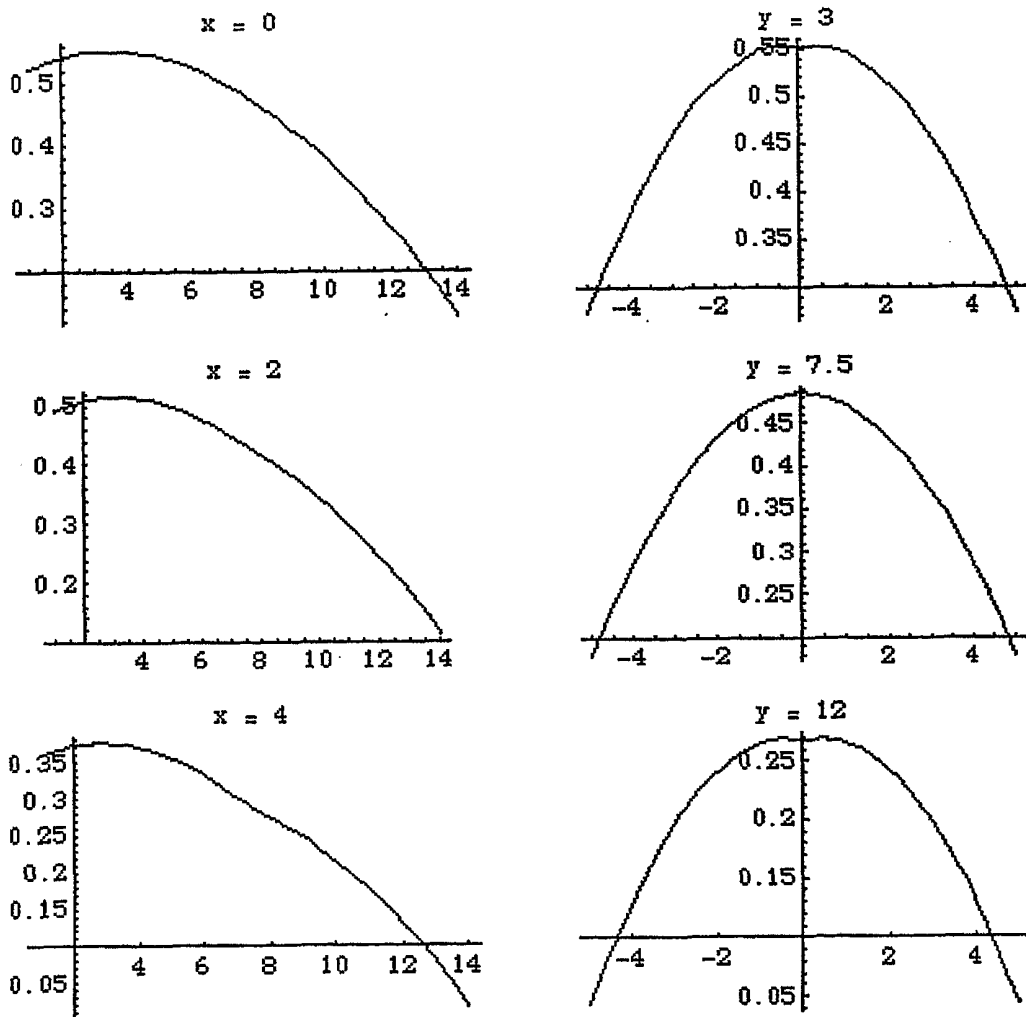


FIG. 15

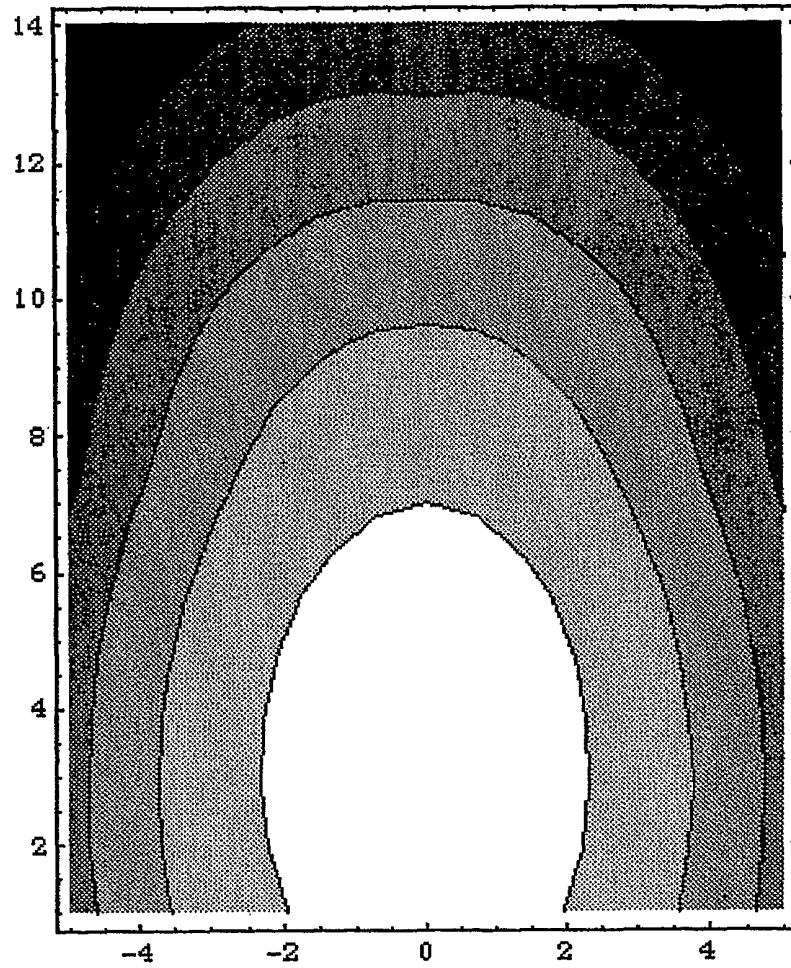


FIG. 17

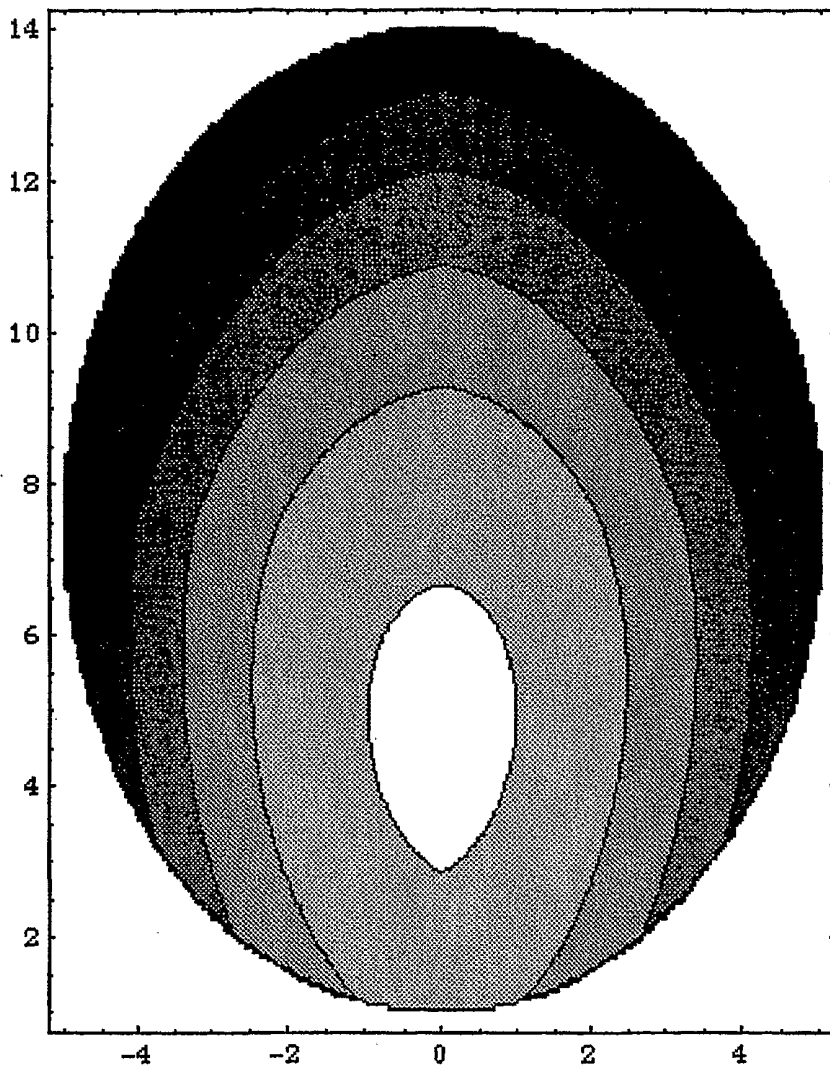


FIG. 18

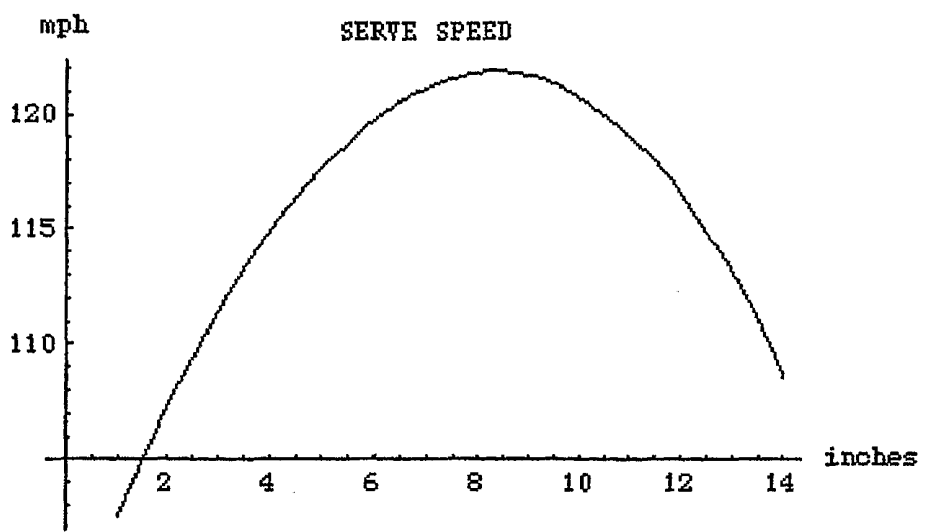


FIG. 19

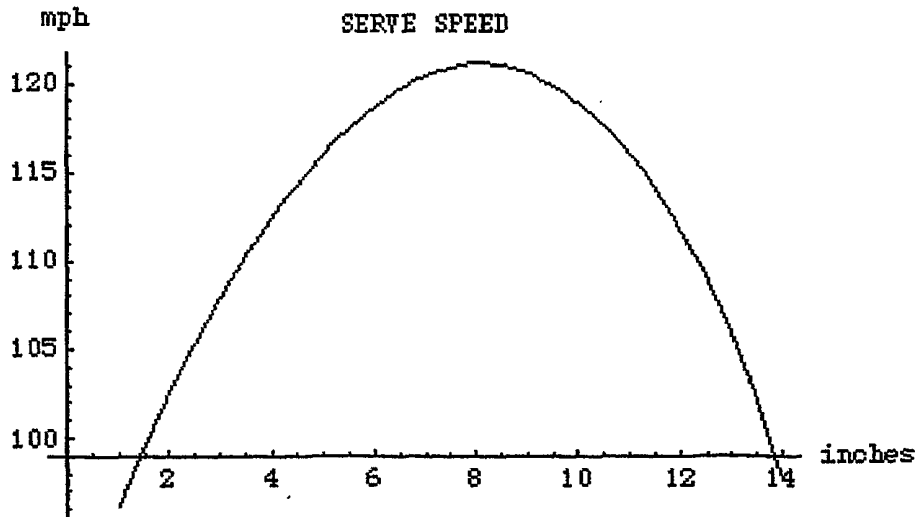


FIG. 21

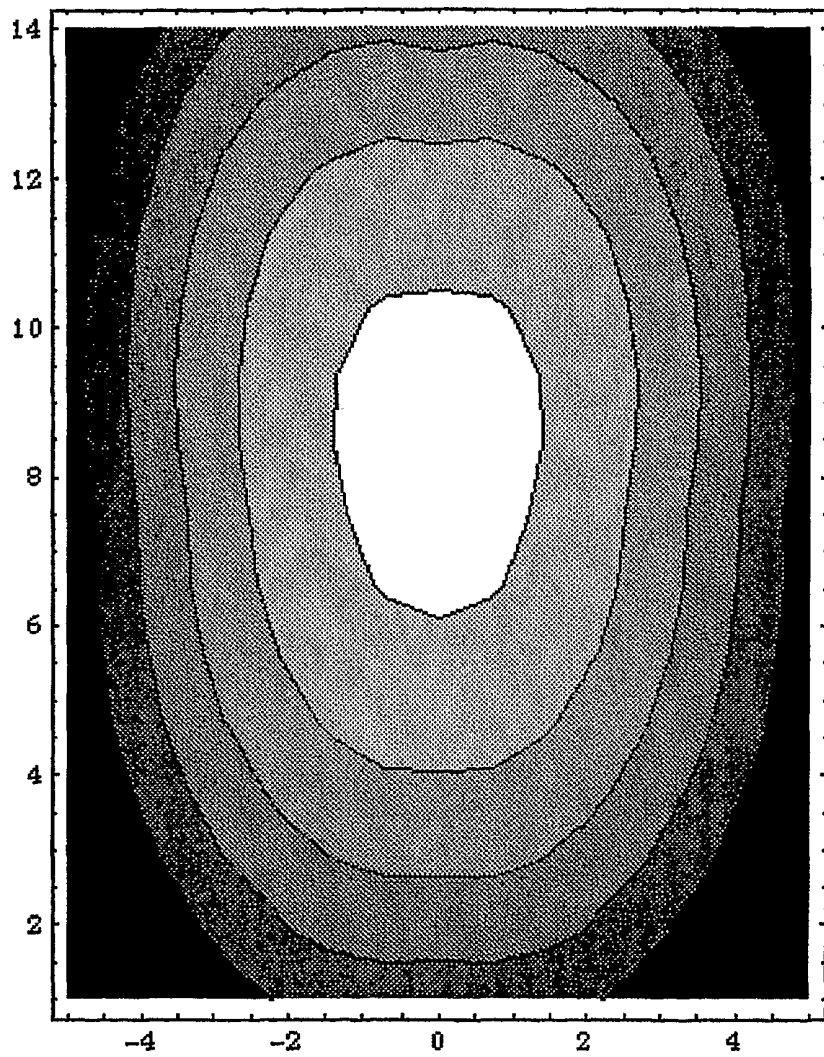


FIG. 20

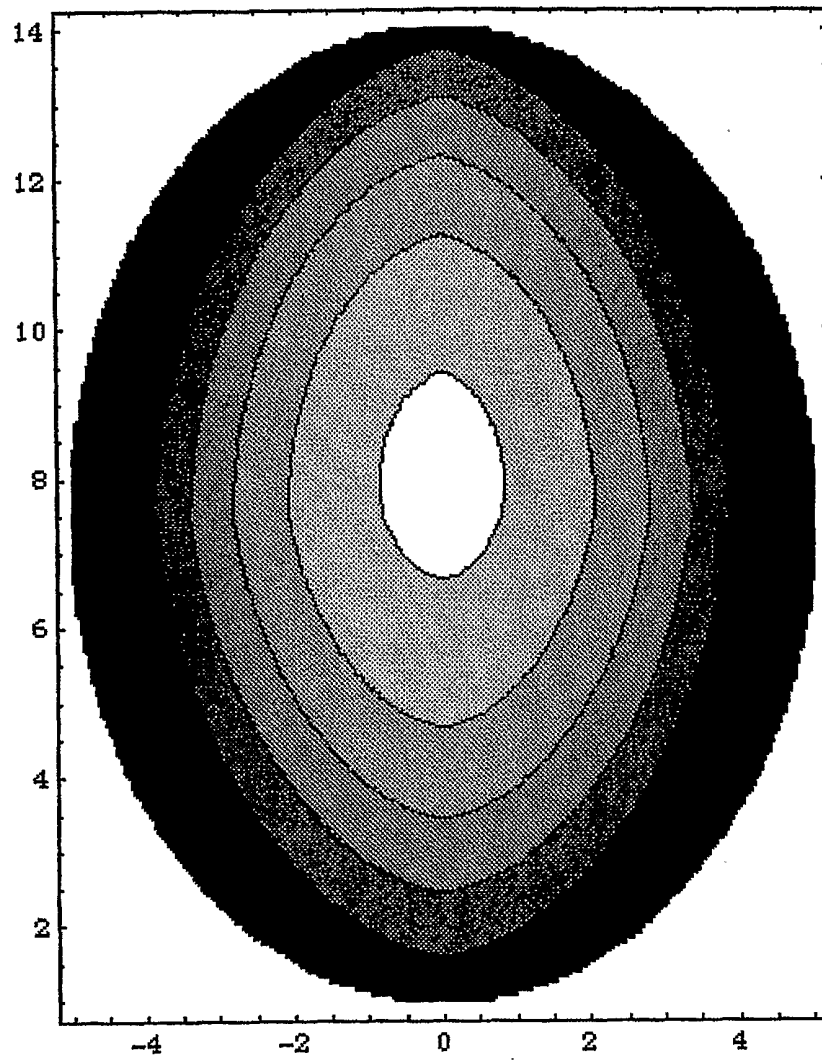


FIG. 22

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US01/45537

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :A63B 49/02
US CL :473/543

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 473/543, 524, 532, 537, 540, 539, 533, 534; D21/729

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4,861,029 A (TAKATSUKA) 29 August 1989, Figure 1.	1, 2, 4, 6, 7, 9, 11-13
---		---
Y		10
Y	US 4,013,289 (KAMINSTEIN) 22 March 1977, col. 3, lines 13-27.	10

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"G" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
20 FEBRUARY 2002

Date of mailing of the international search report
25 MAR 2002

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Authorized officer
RALEIGH W. CHIU

Facsimile No. (703) 305-3230

Telephone No. (703) 308-2244

Sheila Vesky
Paralegal Specialist
Technology Center 3700