




(86) **Date de dépôt PCT/PCT Filing Date:** 2010/01/14  
(87) **Date publication PCT/PCT Publication Date:** 2010/07/29  
(45) **Date de délivrance/Issue Date:** 2020/06/23  
(85) **Entrée phase nationale/National Entry:** 2011/07/22  
(86) **N° demande PCT/PCT Application No.:** US 2010/020998  
(87) **N° publication PCT/PCT Publication No.:** 2010/085413  
(30) **Priorité/Priority:** 2009/01/26 (US61/147,272)

(51) **Cl.Int./Int.Cl.** **C12Q 1/44** (2006.01),  
**C12Q 1/06** (2006.01), **C12Q 1/37** (2006.01),  
**G01N 21/81** (2006.01)  
(72) **Inventeurs/Inventors:**  
ZIMMERLE, CHRIS T., US;  
PUGIA, MICHAEL J., US  
(73) **Propriétaire/Owner:**  
SIEMENS HEALTHCARE DIAGNOSTICS INC., US  
(74) **Agent:** SMART & BIGGAR LLP

(54) **Titre : DISPOSITIF ET PROCEDE DE DETECTION DE BANDELETTES D'ESSAI D'URINE COMPROMISES PAR L'HUMIDITE**  
(54) **Title: DEVICE AND METHOD FOR DETECTION OF HUMIDITY-COMPROMISED URINE TEST STRIPS**

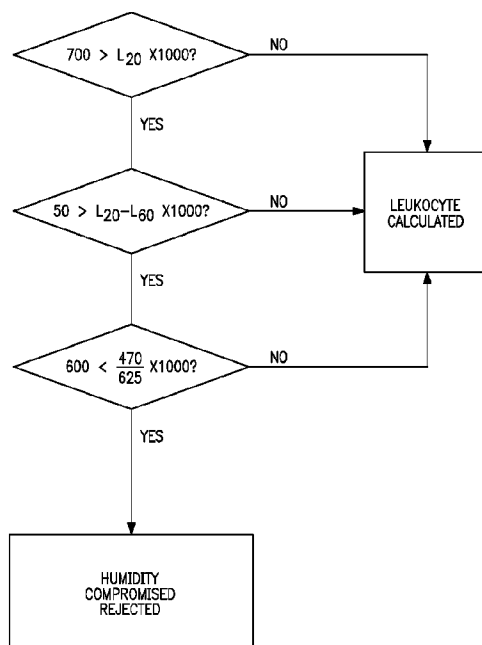

(57) **Abrégé/Abstract:**

The timing of the reaction of moisture-sensitive reagents for detecting the presence of analytes, e.g. leukocytes in urine samples, is used to detect when the reagents have been compromised by excess humidity. The ratio of light reflectance at wavelengths characteristic of the products of reaction between the reagents and the analyte and an infra-red reference dye is measured at two preset times after a urine sample has been applied to a test strip and used to determine whether the reagents have been compromised by excessive humidity. The presence of unusually dark samples is determined from the reflected light at 470 and 625 nm in order to confirm that the test strips are humidity-compromised.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
29 July 2010 (29.07.2010)(10) International Publication Number  
**WO 2010/085413 A1**

PCT

(51) International Patent Classification:  
*C12Q 1/00* (2006.01) *C12Q 1/44* (2006.01)(21) International Application Number:  
PCT/US2010/020998(22) International Filing Date:  
14 January 2010 (14.01.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
61/147,272 26 January 2009 (26.01.2009) US(71) Applicant (for all designated States except US):  
**SIEMENS HEALTHCARE DIAGNOSTICS INC.**  
[US/US]; 511 Benedict Avenue, Tarrytown, NY 10591 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZIMMERLE, Chris, T.** [US/US]; 58613 Glenriver Drive, Goshen, IN 46528 (US). **PUGIA, Michael, J.** [US/US]; 14342 Taddington Drive, Granger, IN 46530 (US).(74) Agent: **POLLACK, Noam, R.**; Siemens Corporation, Intellectual Property Dept., 170 Wood Avenue South, Iselin, NJ 08830 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DEVICE AND METHOD FOR DETECTION OF HUMIDITY-COMPROMISED URINE TEST STRIPS

FIG.1

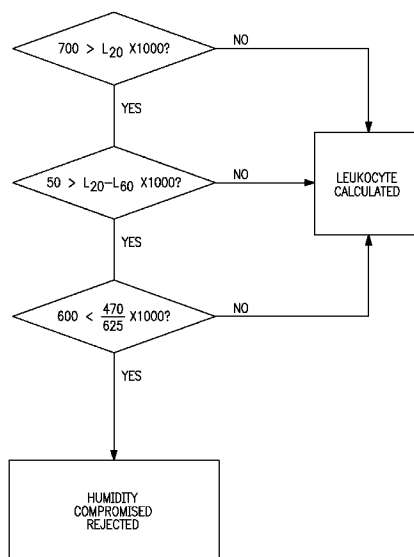

(57) Abstract: The timing of the reaction of moisture-sensitive reagents for detecting the presence of analytes, e.g. leukocytes in urine samples, is used to detect when the reagents have been compromised by excess humidity. The ratio of light reflectance at wavelengths characteristic of the products of reaction between the reagents and the analyte and an infra-red reference dye is measured at two preset times after a urine sample has been applied to a test strip and used to determine whether the reagents have been compromised by excessive humidity. The presence of unusually dark samples is determined from the reflected light at 470 and 625 nm in order to confirm that the test strips are humidity-compromised.

WO 2010/085413 A1

54106-819

**Device and Method For Detection of Humidity-Compromised Urine Test Strips****Background of the Invention**

[0001] This invention relates generally to improving the performance and reliability of test strips employing moisture-sensitive reagents, particularly those used to determine the presence of analytes in urine samples, such as albumin, protein, creatinine, nitrate, uristatin, leukocyte esterase (white blood cells), occult blood (red blood cells), ketones, glucose, bilirubin, urobilogen and others familiar to those skilled in the art. Measurement of proteases and protease inhibitors such as leukocyte esterase (human elastase) or urinary trypsin inhibitor (Bikunin, Uristatin) are especially important in that they may indicate infections of the kidney or urogenital tract. These proteases and protease inhibitor strips rely on hydrolysis of proteolytic substrates by proteases to generate detectable signals. Since the biochemical reactions require water for enzymatic hydrolysis to occur, they tend to be sensitive to moisture and may interfere with the detectable signals through background reactions.

[0002] U.S. Patent 5,663,044 describes the background art in the field of detecting leukocyte, esterase or protease and for teaching generally the use of a composition including a diazonium salt, one of a group of esters subject to hydrolysis in the presence of leukocyte, esterase or protease and an alkaline earth metal. The '044 patent teaches the measuring of reflectance of light at about 570 nm to determine the amount of leukocytes in the urine sample. The reflectance at 570 nm is compared with a standard measurement of reflectance at 690 nm. The patent indicates that the presence of alkaline earth metal promotes stability of the diazonium salt. It also suggests that the alkaline earth metal absorbs moisture which can cause background color change. Experience has shown that this reagent system is sensitive to moisture and that the test strips must be kept in a dry environment

54106-819

before use. The moisture content of test strips should be kept below 2 wt% to avoid degrading performance. However, measuring moisture in test strips is not very accurate. There is a particular need to measure moisture content very accurately to assure that test strips are stable in a closed dry container over several years.

- 5 **[0003]** Another example of the use of moisture-sensitive reagents is discussed in U.S. Patents 6,770,764; 6,955,921; and 7,001,737. In the reactions described, the presence of urinary trypsin inhibitors in a urine sample is detected by adding a sample to test strips containing a known amount of trypsin, a trypsin substrate, i.e. arginine esters hydrolyzed by trypsin to produce an alcohol, and a diazonium salt. When trypsin inhibitors are present they
- 10 inhibit the reaction between trypsin and the substrate. This reduces the color produced by diazonium salt from its reaction with the phenol produced when the trypsin substrate reacts with the known amount of trypsin. By measuring the color produced, the presence of trypsin inhibitors can be determined.

- [0004]** In U.S. Patent 6,316,264 an infra-red (IR) dye is added to a predetermined location on
- 15 reagent strips in order to assure that the strips are properly aligned in the instrument used to detect and/or measure the presence of analytes in a sample applied to the strip. The IR range for the dyes was broadly between 700 and 2500 nm, but dyes having strong absorbance in the range of 825-855 nm were said to be preferred, with absorbance in the visible range (400-700 nm) less than 20%.

- 20 **[0005]** As suggested above, it would be advantageous if urine test strips that are moisture-compromised could be identified with improved accuracy to prevent unsafe use and to correct for moisture-affected results. Since reagents which involve hydrolysis of proteolytic substrates are especially sensitive to moisture, if the reagents themselves could be used to indicate the presence

of undesirable moisture, significant improvement would have been obtained. The present invention provides such a method, which will be described in detail below.

### **Summary of the Invention**

**[0006]** The invention has application to moisture-sensitive test strips that are used to measure hydrolysis of proteolytic substrates used to detect protease or protease inhibitors. One example is found in the detection of leukocyte, esterase or protease, as described in U.S. Patent 5,663,044. Another example is found in the detection of urinary trypsin inhibitors described in U.S. Patents 6,770,764; 6,955,921; and 7,001,737.

**[0007]** In general, the invention is a method of detecting excessive moisture in test strips employing moisture-sensitive reagents. By measuring color or other response developed by moisture-sensitive reagents just after applying a sample and comparing the result to a known infra-red reference dye, moisture-compromised reagents are identified and the result can then be flagged or discarded.

**[0008]** When the developed color is measured by light reflectance, the value of the reflectance ratio (i.e. the ratio of the reflectance of the reagents to the reflectance of the reference dye) immediately after applying a sample is compared with the value of the reflectance ratio taken a short time later and used to determine the effect of excessive humidity and to reject the reagents if they are humidity-compromised. A second reflectance ratio may be measured to determine if the sample is unusually colored and may be affecting the results.

**[0009]** In one preferred embodiment, for detecting humidity-compromised leukocyte reagents, the reagents include a diazonium salt, e.g. DNSA (1-diazo-2-naphthol-4-sulfonic acid), that reacts with a hydrolysable ester, e.g. PPTA (2-hydroxy-5-phenyl-pyrrole-N-tosyl-L-alanine ester). When leukocyte esterase is present in the urine sample, a color is produced in proportion

to the amount of leukocytes present. In this embodiment, the reflectance at light wavelength of 520-570 nm is compared with the reflectance of about 825 nm characteristic of the reference dye.

**[0009a]** According to one aspect of the present invention, there is provided a method of detecting a humidity-compromised moisture-sensitive reagent, said reagent being contacted with a sample containing water and detecting the presence of an analyte in the sample by its reaction with said moisture-sensitive reagents, the method comprising: (a) measuring the reflectance of light at a first wavelength of the products of said reaction of said moisture-sensitive reagent with said analyte at two predetermined times after contacting said reagents with said sample; (b) measuring at the same two predetermined times the reflectance of light at a second wavelength characteristic of an infra-red reference dye, said dye being combined with said moisture-sensitive reagent on a test strip, the second wavelength being greater than the first wavelength by at least 120 nm; and (c) calculating a ratio of the reflectance measured in (a) and (b) for each of said two predetermined time; based on whether the change in said ratio between said two predetermined times is less than a first predetermined value concluding whether the moisture-sensitive reagent is humidity compromised.

**[0009b]** According to another aspect of the present invention, there is provided a method of measuring leukocytes in urine samples with test strips, said test strips containing reagents including a diazonium salt and an ester subject to hydrolysis in the presence of leukocytes, said method calculating the amount of leukocytes in a urine sample as a function of the reflection of light at a characteristic wavelength of the reaction product of said diazonium salt with hydrolyzed ester and with reference to the reflection of light at a preselected reference wavelength, said reflected light being measured about 1 to 3 minutes after applying a urine sample to said reagents, the improvement comprising detecting humidity-compromised reagents by: (a) adding an infra-red reference dye to said test strips, said reference dye having a characteristic reflectance wavelength greater than the characteristic wavelength of said reaction product by at least 120 nm; (b) measuring the reflectance of light at the wavelength of said reaction product and the characteristic wavelength of reference dye at about 20 seconds and about 60 seconds after applying said urine sample to said reagents; (c) calculating the ratio of the measured reflectance at the wavelength of said reaction product to the measured wavelength of said reference dye determined in (b) for each of said 20 and 60

seconds times and designating said ratios as  $L_{20}$  and  $L_{60}$ ; (d) when  $L_{20}-L_{60}$  is less than a first predetermined value and  $L_{20}$  is below a second predetermined value concluding that the composition-containing substrate was humidity-compromised; (e) measuring the reflectance of light at wavelengths of about 470 and about 625 nm and calculating the ratio 470/625 nm; (f) if the ratio 470/625 nm is above a third predetermined value concluding that the urine sample is not sufficiently colored to affect the conclusion reached in step (d); and (g) rejecting the calculated value for leukocyte concentration.

**[0009c]** According to another aspect of the present invention, there is provided a method of analyzing a moisture-sensitive reagent disposed on a test strip and contacted with a sample containing water to determine if the moisture-sensitive reagent is humidity compromised, the method comprising: (a) measuring the reflectance of light at a first wavelength and a second wavelength at a first predetermined time after contacting said reagent with said sample, the first wavelength being a wavelength of a product of a reaction of the moisture-sensitive reagent with an analyte in the sample, the second wavelength being a characteristic wavelength of an infra-red reference dye disposed on the test strip; (b) measuring the reflectance of light at the first wavelength and the second wavelength at a second predetermined time after contacting said reagent with said sample, the second predetermined time being after the first predetermined time; (c) calculating a first ratio of the reflectance measurements in (a) and a second ratio of the reflectance measurements in (b); (d) determining a level of activity of the reagent between the first and the second predetermined times by comparing the first ratio and the second ratio calculated in (c); (e) when the level of activity of the reagent determined in (d) is at or above a first predetermined level, determining a concentration of the analyte in the sample; and (f) when the level of activity of the reagent determined in (d) is less than the first predetermined level: (1) measuring the reflectance of light at a third wavelength in a blue region of a visible light spectrum and a fourth wavelength in a red region of the visible light spectrum at a third predetermined time; (2) calculating a third ratio of the reflectance measurements in (f)(1); (3) determining whether a primary cause of the less than expected activity is due to a color of the sample or a humidity reduced sensitivity of the moisture-sensitive reagent by comparing the third ratio to a second predetermined level; (4) when it is determined in (f)(3) that the primary cause is the color of

the sample, determining the concentration of the analyte in the sample; and (5) when it is determined in (f)(3) that the primary cause is the humidity reduced sensitivity of the moisture-sensitive reagent, rejecting the moisture-sensitive reagent as being humidity compromised.

**[0009d]** According to another aspect of the present invention, there is provided a method of measuring leukocytes in a urine sample with a test strip containing reagents including a diazonium salt and an ester subject to hydrolysis in a presence of leukocytes, the method comprising detecting humidity-compromised reagents by: (a) measuring, with electronics of an optical inspection apparatus, the reflectance of light at a first wavelength and a second wavelength at a first predetermined time after contacting said reagent with said urine sample, the second wavelength being a characteristic wavelength of an infra-red reference dye disposed on the test strip, the second wavelength being greater than the first wavelength by at least 120 nm; (b) measuring, with the electronics of the optical inspection apparatus, the reflectance of light at the first wavelength the second wavelength at a second predetermined time after contacting said reagent with the sample, the second predetermined time being after the first predetermined time; (c) calculating a first ratio of the reflectance measurements in (a) and a second ratio of the reflectance measurements in (b); (d) determining a level of activity of the reagent between the first and the second predetermined times by comparing the first ratio and the second ratio calculated in (c); (e) when the difference between the first ratio and the second ratio as determined in (d) is greater than a first predetermined value, determining a concentration of an analyte in the sample; and (f) when the difference between the first ratio and the second ratio determined in (d) is less than the first predetermined value, indicative of less than expected activity: (1) measuring the reflectance of light at a third wavelength in a blue region of visible light spectrum and a fourth wavelength in a red region of the visible light spectrum at a third predetermined time; (2) calculating a third ratio of the reflectance measurements in (f)(1); (3) determining whether a primary cause of the less than expected activity is due to a color of the sample or a humidity reduced sensitivity of the moisture-sensitive reagent by comparing the third ratio to a second predetermined value; (4) when it is determined in (f)(3) that the third ratio is less than the second predetermined value, identifying the primary cause as the color of the sample and determining the concentration of the analyte in the urine sample; and (5) when it is determined in (f)(3) that the third ratio greater than the

second predetermined value; identifying the primary cause as the humidity reduced sensitivity of the moisture-sensitive reagent and rejecting the moisture-sensitive reagent as being humidity compromised.

**[0009e]** According to another aspect of the present invention, there is provided a method of reading, using electronics of an optical inspection apparatus, a moisture-sensitive reagent contacted with a sample containing water and detecting a presence of an analyte in the sample by a reaction of the analyte with the moisture-sensitive reagent, the method comprising: (a) measuring the reflectance of light at a first wavelength and a second wavelength at a first predetermined time after contacting said reagent with said urine sample, the first wavelength being a wavelength of a product of the reaction of the analyte in the sample with the moisture-sensitive reagent, the second wavelength being a characteristic wavelength of an infra-red reference dye disposed on the test strip, the second wavelength being greater than the first wavelength by at least 120 nm; (b) measuring the reflectance of light at the first wavelength and the second wavelength at a second predetermined time after contacting said reagent with said sample, the second predetermined time being after the first predetermined time; (c) calculating a first ratio of the reflectance measurements in (a) and a second ratio of the reflectance measurement in (b); (d) determining a level of activity of the reagent between the first and the second predetermined times by comparing the first ratio and the second ratio calculated in (c); (e) when the difference between the first ratio and the second ratio as determined in (d) is greater than a first predetermined value, determining a concentration of the analyte in the sample and reporting the concentration to a user; and (f) when the difference between the first ratio and the second ratio determined in (d) is less than the first predetermined value: (1) measuring the reflectance of light at a third wavelength in a blue region of a visible light spectrum and a fourth wavelength in a red region of the visible light spectrum at a third predetermined time; (2) calculating a third ratio of the reflectance measurements in (f)(1); (3) determining whether a primary cause of the less than expected activity is due to a color of the sample or a humidity reduced sensitivity of the moisture-sensitive reagent by comparing the third ratio to a second predetermined value; (4) when it is determined in (f)(3) that the third ratio is less than the second predetermined value, identifying the primary cause as the color of the sample and determining the concentration of the analyte

in the urine sample and reporting the concentration to a user; and (5) when it is determined in (f)(3) that the third ratio is greater than the second predetermined value, identifying the primary cause as the humidity reduced sensitivity of the moisture-sensitive reagent and generating an error signal indicating the moisture-sensitive reagent is humidity-compromised.

[0009f] According to another aspect of the present invention, there is provided the use of an infra-red dye as a reference in a method of detecting a humidity compromised moisture-sensitive reagent disposed on a test strip, wherein the moisture-sensitive reagent is based on proteolytic substrates to detect protease enzymes or protease inhibitors, said moisture-sensitive reagent including a diazonium salt and developing a color response just after applying a sample, the method comprising applying a first wavelength within a visible light spectrum and a second wavelength in an infrared light spectrum to the test strip, measuring the color response of the moisture-sensitive reagent by reflectance of the first wavelength, measuring the infra-red dye by reflectance of the second wavelength, determining the moisture-sensitive reagent to be the humidity compromised moisture-sensitive reagent by comparing a first measurement of the first wavelength to a second measurement of the second wavelength; and at least one of flagging or discarding the first measurement of the moisture-sensitive reagent.

#### **Brief Description of the Drawings**

[0010] The sole figure is a flow chart for either determining leukocyte content of a sample or rejecting the result as humidity-compromised.

#### **Description of Preferred Embodiments**

[0011] The invention includes an improved method of measuring hydrolysis of proteolytic substrates in urine samples applied to test strips. In general, reagents based on proteolytic substrates can be used to detect any protease. The amino acid sequence of the reagents is matched to the type preferred by the protease being detected and the amino acid sequence is attached to a signal generating moiety that upon hydrolysis forms the signal. An example of this principle is detection of leukocyte esterase, which is used to detect the presence of leukocytes in a sample, as described in U.S. Patent 5,663,044. The presence of leukocytes is

correlated with the reflectance of light at the characteristic wavelength of the reagents with reference to the reflectance of light at a characteristic wavelength of an infra-red reference dye. The measured reflectance comparison is correlated with the presence of leukocytes after an incubation time of about 20 seconds to 3 minutes after application of a urine sample to the reagents. Such test strips may be compromised by excess humidity, which can reduce reagent activity and falsely show color development indicative of the presence of leukocytes in a urine sample. By measuring the ratio of reflectance from the reagents to the infra-red reference dye during the first minute after a urine sample has been applied to reagents, the method of the invention determines whether the reagents have been compromised by excess humidity.

**[0012]** Reagents based on proteolytic substrates can also be used to detect a protease inhibitor. Again the amino acid sequence is matched to the type preferred by the protease inhibitor, the

sequence being attached to a signal generating moiety that upon hydrolysis forms the signal. The protease is added to the reagent and therefore generates a signal when inhibitor is not present in the sample. The absence of a signal is used to determine the presence of protease inhibitor in a sample. An example of this principle is detection of urinary trypsin inhibitor as described in U.S. Patents 6,770,764; 6,955,921; and 7,001,737.

**[0013]** Hydrolysis of a proteolytic substrate does not reach the reaction endpoint in the short time frame of less than a few minutes needed for strips used in point-of-care applications. The hydrolysis reactions continue to create a signal with time and are typically measured kinetically to allow readings that are not dependent on timing by the operator. For example, the color developed by the reaction for leukocytes in urine can be measured at 20 and 60 seconds and the ratio the of signals at both times used as a kinetic result, that is, showing the rate of color change. This avoids the user having to wait for a full 3 minutes to obtain a result.

**[0014]** The invention is applicable to many formats in which the reagents are moisture-sensitive. That is, the reagents can react in the presence of moisture and falsely indicate the presence of an analyte, which is not actually present in the sample being measured. Examples of such moisture-sensitive reagents have been mentioned above. Of particular importance to the present inventors was the sensitivity of moisture of reagents used to detect leukocytes in urine samples by esterase in the leukocytes, as discussed below with reference to one preferred embodiment. However, it will be evident that the methods of the invention have application to other moisture-sensitive reagents, including, but not limited to, other reagents that can be used to measure the presence of leukocytes. It is understood that test strips can have many formats, including, but not limited to, dipsticks and lateral flow cartridges.

**Leukocyte Reagent Chemistry**

[0015] Leukocyte reagents useful in the invention that can provide a method of measuring the leukocyte content of urine samples are discussed in U.S. Patent 5,663,044 mentioned above. A preferred composition of the invention was described in Table 4 of the '044 patent. An alanine compound (PPTA; 2-hydroxy -5-phenyl -pyrrole -N-tosyl -L- alanine ester) served as a substrate for leukocyte esterase, which hydrolyzes PPTA, after which the hydrolyzed product reacts with the diazonum indicator (DNSA; 1-diazo-2-naphthol-4-sulfonic acid) to produce color. The color was measured by the degree of reflectance when examined at a light wave length of 520-570 nm (570 nm in the '044 patent). The reflectance at 520-570 nm was related to a standard wavelength at 690 nm. This comparison was used to compensate for differences in the white background color of the strip substrate, which was white cellulose on a white polystyrene having a reflectance >60%, and approaching colorless at wavelengths >~690 nm. The white background color is particularly sensitive to moisture and a small amount can cause a large change in reflectance ratio. The white background is also sensitive to the color of urine and small amounts can cause large changes in reflectance ratio. As a result, such a reflectance ratio cannot be used to accurately measure moisture after dipping the strip in urine.

[0016] In the present invention, an infra-red reference dye is added having a characteristic response to light at a wavelength at least 120 nm greater than the 520-570 nm range. It has been found that the wavelength of the IR dye and the amount used affect the accuracy of measurements by reducing background interference. The addition of an IR dye to the leukocyte reagents provides a lower background color of  $\leq 60\%$  reflectance at  $\geq 700$  and 2500 nm. This lower background reduces the effect of urine color on the reflectance ratio, but not the effect of moisture. Thus, the reflectance ratio can be used to accurately measure moisture after dipping a sample in urine.

[0017] However, this lower background color of  $\leq 60\%$  reflectance at  $\geq 700$  and  $2500$  nm can reduce ability of the reagents to detect the hydrolysis of proteolytic substrates. This effect is shown in the following table, where the effect of the reagent substrate background color is reduced as the amount of the IR dye is increased. The amount of IR dye that a reagent can tolerate depends on the reference wavelength used to measure the background, the signal wavelength of the substrates, the sensitivity of the substrate for moisture, and the sensitivity of the substrate for protease hydrolysis and the amount of background dye signal  $< 700$  nm. The tolerance of any given hydrolysis substrate can be determined as shown in Table 1 where the desired reduction of background interference relative to color in the sample occurs at greater than  $0.2$  mg/dL, or about  $0.5\text{wt}\%$  relative to the reference dye. However, when the dye quantity is raised as high as  $20$  mg/dL the reflectance ratio is increased to  $1.6$  and the signal is reduced from the  $\sim 1.0$  signal expected. Thus the amount of dye used should be limited to that needed to minimize background interference.

| <u>Table 1</u>                 |                                                   |                                    |
|--------------------------------|---------------------------------------------------|------------------------------------|
| <u>Dye (1)</u><br><u>mg/dL</u> | <u>Reflectance Ratio</u><br><u>570/690 nm (2)</u> | <u>Background Interference (3)</u> |
| 20                             | 1.649                                             | 3%                                 |
| 2                              | 1.042                                             | 4%                                 |
| 0.2                            | 0.976                                             | 5%                                 |
| 0.02                           | 0.967                                             | 22%                                |
| 0                              | 0.964                                             | 45%                                |

(1) DTO 141 which is Dye 3 in Table 2 of U.S. 6,316,264 and has the chemical name 3-(5-carboxypentyl)-2-[2-[3-[[3-(5-carboxypentyl)-1,3-dihydro-1, 1-dimethyl-2H-benz[e]indol-2-ylidene] ethylidene)-2-(n-hexylthio)-1-cyclohexen-1-yl] ethenyl]-1, 1-dimethyl-1H-benz[e] indolium, inner salt.

(2) Reaction to 42 cell/uL leukocytes in urine in medium specific gravity urine and measured using the CLINITEK Status® instrument (Siemens Healthcare Diagnostics).

(3) Difference between highly colored brown clinical urine and a typically colored yellow urine. Both urines lacked leukocytes and were measured using the CLINITEK Status® instrument.

**[0018]** In the above experiment the leukocyte reagent was made from two sequential saturations of filter paper. The first saturation was with an aqueous mix containing boric acid, Bio-Terge AS40, PVP polymer and NaCl to control ionic strength. The mix pH was adjusted to 8.8 to 9.3 using sodium hydroxide or hydrochloric acid. The second saturation was an acetone/DMSO solvent mix containing DNSA, PPTA, decanol and boric acid. Each ingredient's functions, preferred concentration and allowable range are given in Table below. The mix solutions were used to saturate filter paper, in this case 205C grade Ahlstrom filter paper, and the paper dried at 121°C for 9 minutes after the first saturation, and at 100°C for 7 minutes after the second saturation. The resultant dry reagent was processed into reagent strips which were tested using the CLINITEK Status® instrument.

54106-819

Table 2

| Ingredient                                                | Function            | Prefer Conc. used | Allowable Range |
|-----------------------------------------------------------|---------------------|-------------------|-----------------|
| 1 <sup>st</sup> Application                               |                     |                   |                 |
| Water                                                     | Solvent             | 1000 mL           | ---             |
| NaCl                                                      | Ion Strength Agent  | 14.6 g            | 1-30 g/L        |
| Bio-Terge AS40                                            | Surfactant          | 2g                | 0-4 g/L         |
| Boric acid                                                | Buffer              | 24.7g             | 5-35 g/L        |
| PVP                                                       | Polymer             | 20.0g             | 5-50 g/L        |
| 2 <sup>nd</sup> Application                               |                     |                   |                 |
| Acetone                                                   | Solvent             | 955 mL            | ---             |
| DMSO                                                      | Solvent             | 30 mL             | 10-60 mL        |
| DNSA                                                      | Diazonium indicator | 0.174g            | 0.050-0.5 g/L   |
| PPTA                                                      | Enzyme substrate    | 0.422g            | 0.10-0.8 g/L    |
| Decanol                                                   | Enzyme activator    | 15 mL             | 5-40 ml/L       |
| Boric Acid                                                | Buffer              | 0.5g              | 0-3.0 g/L       |
| DNSA = 1-diazo-2-naphthol-4-sulfonic acid                 |                     |                   |                 |
| PPTA = 2-hydroxy-5-phenyl-pyrrole-N-tosyl-L-alanine ester |                     |                   |                 |

[0019] Various dyes could be used, including those described in U.S. Patent 6,316,264 and having characteristic absorbance in the infrared region of about 700 to about 2500 nm.

- 5 Examples include phthalocyanine and naphthalocyanine compounds, metal complex dyes (e.g. dithiolen metal complex dyes) and polymethine dyes, including cyanine dyes. Other dyes include di and triphenylmethane dyes, quinone dyes, azo dyes, and charge transfer and charge resonance dyes. Their common characteristic being that reflectance of light at a unique wavelength is measured at least 120 nm above that of the reagent wavelength. In connection
- 10 with the leukocyte reagents discussed above, the dye should have a characteristic reflectance of at least 700 nm, preferably above 700 and less than 2500 nm.

[0020] Although including the reference dye with the leukocyte reagents is a preferred embodiment, it also is possible to place the reference dye at another location, as was done for purposes of aligning a test strip (U.S. 6,316,264). The changes due to moisture that occur when

the dye contacts the sample may differ from those that occur when the dye is within the reagents. However, such differences can be accommodated by those familiar with the art.

#### **Detecting Moisture Contamination in a Leukocyte Test Strip**

[0021] As discussed above, moisture causes the leukocyte reagents to degrade and produce a false color change. The enzymes in leukocytes are not needed to hydrolyze the proteolytic substrate, e.g. PPTA. It has been found that the reagents are sensitive to as little as 0.1% moisture on a leukocyte reagent pad. The rate of color change is essentially directly proportional to the amount of water present. The importance of humidity control is evident when after 10 minutes exposure to >60 Relative Humidity the test provides false positive results.

[0022] This sensitivity to moisture is used in the invention to determine whether a reagent pad has been contaminated with moisture. The color change is determined first at about 20 seconds after a urine sample has been applied. If color is detected after 20 seconds, then moisture contamination is suspected. This is confirmed if the color has not significantly increased after 60 seconds, that is, the activity of the reagents has been reduced. This method was confirmed in an experiment in which test strips were exposed to 30°C at 80% humidity for 10 minutes, conditions known to cause failure of the reagents. Twenty three of twenty four strips were found to have failed when the ratio of the reflectance at 520 nm to the reflectance at 820 nm was used. The amount of the DTO 141 dye applied was 0.2 mg/dL, relative to 42 mg/dL of PPTA of the leukocyte reagents. A parallel experiment in which only the reflectance at 520 nm was measured, i.e. without dye present, failed to detect moisture contaminated strips in 42% of the strips, this was also true when a reflectance ratio of 520 nm/870 nm was used, but without dye present.

[0023] The influence of color in the urine sample also is accounted for in the method of the invention. The sample color is measured by the absorbance of light at about 460 nm (within the

visible range). In order to affect the measurement of color developed by the leukocyte reagents a new ratio is determined, i.e. reflectance at about 460 nm (for sample color) divided by reflectance at about 625 nm. This ratio prevents dark urine samples from being considered to be humidity-compromised. If the ratio (times 1000) is above 600 the sample color is light and reflectance is high. If so, then the strip being tested will be confirmed as humidity-compromised if the reflectance ratios at 20 and 60 seconds have indicated that the strip is responding in an abnormal manner. If the ratio is below 600, the sample has a dark color which may have affected the results and the strip is not rejected if the results at 20 and 60 seconds have been satisfactory.

**[0024]** The difference between the ratio of reflectance at 525 nm to reflectance at 825 nm taken at 20 and 60 seconds after applying a sample is used to determine whether the reagents have been degraded by moisture. In general, if the first reading (20 sec) gives a ratio of less than about 700 (ratio  $\times$  1000), then excess humidity is indicated since reflectance at 525 indicates significant color had been already developed. If the second reading is taken at 60 seconds and compared with the first reading and the difference in the readings is less than about 50 (ratio  $\times$  1000), then the presence of excess humidity is confirmed since the reagents have lost their normal activity.

**[0025]** For example, three values are measured when the reagents include PPTA and DNSA and the reference dye is DTO 141.

Table 3

|                 | <u>Ratio, nm</u> | <u>Time</u>          | <u>Critical value<br/>ratio x 1000</u> | <u>meaning</u>                               |
|-----------------|------------------|----------------------|----------------------------------------|----------------------------------------------|
| L <sub>20</sub> | 525/845          | 20 sec.              | < 700                                  | High absorption<br>Excess humidity<br>likely |
| L <sub>60</sub> | 525/845          | 60 sec               | L <sub>20</sub> – L <sub>60</sub> <50  | Humidity<br>reducing reagent<br>activity     |
| H               | 470/625          | 40 and 60<br>seconds | > 600                                  | High reflectance<br>Sample light<br>colored  |

**[0026]** Applying those values to the readings according to the procedure shown in Fig. 1 provides for rejection of results as humidity-compromised or for reporting leukocyte measured in the sample. In an example, a CLINITEK Status® instrument is used to analyze the urine sample for the presence of leukocytes. An absorbent strip (e.g. filter paper) saturated with reagent solutions as described above in Table 2 has a urine sample applied to it and the resulting color changes are measured by light reflectance in the CLINITEK Status® instrument according to the inventive procedure.

**[0027]** If the measured value of L<sub>20</sub>-L<sub>60</sub> is less than 50, it is possible that excessive humidity has reduced leukocyte reagent activity. If above 50, then the value of L<sub>20</sub>-L<sub>60</sub> can be used in calculating leukocyte concentration in the sample. However even if below 50, the 525/845 nm ratio may still be able to provide a leukocyte concentration. The initial value of the 525/845 nm ratio (L<sub>20</sub>) is considered. If the value is below 700 (ratio x 1000) then high absorption of light at 525 nm is indicated, suggesting that excess humidity may have been present in the test pad. Combined with the result of L<sub>20</sub>-L<sub>60</sub> then, it is likely that the leukocyte reagents have been compromised by excess humidity. But, since the results may have been influenced by an

54106-819

unusually dark sample, the ratio  $H$ , 470/625 nm, is measured. If the result is above 600 (ratio  $\times 1000$ ) high reflectance is indicated, meaning that the sample is not highly colored. If so, then the leukocyte reagents are considered to have been compromised by high humidity. If the sample is dark, i.e. the critical ratio  $H$  is below 600, but the previously determined

5 values of  $L_{20}$ - $L_{60}$  and  $L_{20}$  were acceptable, then the sample is considered not to be compromised and the leukocyte content is calculated.

**[0028]** It should be understood that the specific light wavelengths and measurement times just described are useful for determining the presence of leukocytes in urine samples with the amounts of the reagents described. The method, however, has application more generally to

10 many other reagents that are moisture-sensitive and yet are used to detect samples that contain water. Appropriate detection protocols should be readily established by those that are skilled in the art after having reviewed the invention disclosed by the present inventors.

**[0029]** As illustrated above, the Clinitek Status ® instrument is useful in carrying out the method of the invention. Aspects of that instrument are described in US Patents 6,239,445;

15 5,877,863; 5,477,326; and 5,408,535. The Clinitek Status ® instrument is a reflectance spectroscope in which a test strip carrying a sample is illuminated by a light source and light reflected from the test strip is detected and used to determine the presence and amount of the analyte in the sample. The operation of spectrophotometers is also discussed in US Patent 6,316,264, referred to above. As noted therein, a camera-type instrument, which creates a

20 multipixel image may also be used to carry out the method of the invention.

CLAIMS:

1. A method of detecting a humidity-compromised moisture-sensitive reagent, said reagent being contacted with a sample containing water and detecting the presence of an analyte in the sample by its reaction with said moisture-sensitive reagents, the method comprising:

(a) measuring the reflectance of light at a first wavelength of the products of said reaction of said moisture-sensitive reagent with said analyte at two predetermined times after contacting said reagents with said sample;

(b) measuring at the same two predetermined times the reflectance of light at a second wavelength characteristic of an infra-red reference dye, said dye being combined with said moisture-sensitive reagent on a test strip, the second wavelength being greater than the first wavelength by at least 120 nm; and

(c) calculating a ratio of the reflectance measured in (a) and (b) for each of said two predetermined time;

based on whether the change in said ratio between said two predetermined times is less than a first predetermined value concluding whether the moisture-sensitive reagent is humidity compromised.

2. The method of Claim 1 wherein in combination whether the ratio of the first and second wavelengths is above a second predetermined value and the change in the ratio of the reflectance between the first and second predetermined times are used to determine if the moisture-sensitive reagents are humidity-compromised.

3. The method of Claim 2 further comprising the step of measuring the reflectance of light at two wavelengths predetermined to indicate the potential for sample color interference with the determined results.

4. The method of Claim 1 wherein said moisture-sensitive reagents are proteolytic substrates used to detect protease enzymes.

5. The method of Claim 1 wherein said moisture-sensitive reagents are proteolytic substrates used to detect protease inhibitors.
6. The method of Claim 4 wherein said sample is urine and said analyte is leukocytes.
7. The method of Claim 5 wherein said sample is urine and said analyte is urinary trypsin inhibitors.
8. The method of Claim 6 wherein said moisture-sensitive reagents include a diazonium salt and an ester subject to hydrolysis in the presence of leukocytes.
9. The method of Claim 1 further comprising rejecting humidity-compromised moisture-sensitive reagents.
10. A method of measuring leukocytes in urine samples with test strips, said test strips containing reagents including a diazonium salt and an ester subject to hydrolysis in the presence of leukocytes, said method calculating the amount of leukocytes in a urine sample as a function of the reflection of light at a characteristic wavelength of the reaction product of said diazonium salt with hydrolyzed ester and with reference to the reflection of light at a preselected reference wavelength, said reflected light being measured about 1 to 3 minutes after applying a urine sample to said reagents, the improvement comprising detecting humidity-compromised reagents by:
  - (a) adding an infra-red reference dye to said test strips, said reference dye having a characteristic reflectance wavelength greater than the characteristic wavelength of said reaction product by at least 120 nm;
  - (b) measuring the reflectance of light at the wavelength of said reaction product and the characteristic wavelength of reference dye at about 20 seconds and about 60 seconds after applying said urine sample to said reagents;
  - (c) calculating the ratio of the measured reflectance at the wavelength of said reaction product to the measured wavelength of said reference dye determined in (b) for each of said 20 and 60 seconds times and designating said ratios as  $L_{20}$  and  $L_{60}$ ;

(d) when  $L_{20}$ - $L_{60}$  is less than a first predetermined value and  $L_{20}$  is below a second predetermined value concluding that the composition-containing substrate was humidity-compromised;

(e) measuring the reflectance of light at wavelengths of about 470 and about 625 nm and calculating the ratio 470/625 nm;

(f) if the ratio 470/625 nm is above a third predetermined value concluding that the urine sample is not sufficiently colored to affect the conclusion reached in step (d); and

(g) rejecting the calculated value for leukocyte concentration.

11. The method of Claim 10 wherein the light reflectance of said reaction product is about 520-570 nm.

12. The method of Claim 10 wherein the light reflectance of said reference dye is about 825 nm.

13. The method of Claim 10 wherein the ratio of said reference dye to said hydrolysable ester is greater than about 0.5%, thereby reducing background interference of the color of said sample and said test strip.

14. The method of Claim 10 wherein said reference dye is selected from the group consisting of phthalocyanine and naphthalocyanine compounds, metal complex dyes, polymethine dyes, di and triphenylmethane dyes, quinine dyes, azo dyes, charge transfer dyes and charge resonance dyes.

15. The method of Claim 14 wherein said reference dye is DTO 141.

16. The method of Claim 10 wherein said hydrolysable ester is PPTA and said diazonium salt is DSNA.

17. The method of Claim 10 wherein  $L_{20}$ - $L_{60}$  is multiplied times 1000 and wherein said first predetermined value is 50.

18. The method of Claim 10 wherein  $L_{20}$  is multiplied times 1000 and wherein said second predetermined value is 700.
19. The method of Claim 10 wherein the ratio 470/625 nm is multiplied times 1000 and wherein said third predetermined value is 600.
20. The method of Claim 10 wherein said reference dye is combined with said reagents.
21. The method of Claim 10 wherein said reference dye is located separately from said reagents.
22. A method of analyzing a moisture-sensitive reagent disposed on a test strip and contacted with a sample containing water to determine if the moisture-sensitive reagent is humidity compromised, the method comprising:
  - (a) measuring the reflectance of light at a first wavelength and a second wavelength at a first predetermined time after contacting said reagent with said sample, the first wavelength being a wavelength of a product of a reaction of the moisture-sensitive reagent with an analyte in the sample, the second wavelength being a characteristic wavelength of an infra-red reference dye disposed on the test strip;
  - (b) measuring the reflectance of light at the first wavelength and the second wavelength at a second predetermined time after contacting said reagent with said sample, the second predetermined time being after the first predetermined time;
  - (c) calculating a first ratio of the reflectance measurements in (a) and a second ratio of the reflectance measurements in (b);
  - (d) determining a level of activity of the reagent between the first and the second predetermined times by comparing the first ratio and the second ratio calculated in (c);
  - (e) when the level of activity of the reagent determined in (d) is at or above a first predetermined level, determining a concentration of the analyte in the sample; and

(f) when the level of activity of the reagent determined in (d) is less than the first predetermined level:

(1) measuring the reflectance of light at a third wavelength in a blue region of a visible light spectrum and a fourth wavelength in a red region of the visible light spectrum at a third predetermined time;

(2) calculating a third ratio of the reflectance measurements in (f)(1);

(3) determining whether a primary cause of the less than expected activity is due to a color of the sample or a humidity reduced sensitivity of the moisture-sensitive reagent by comparing the third ratio to a second predetermined level;

(4) when it is determined in (f)(3) that the primary cause is the color of the sample, determining the concentration of the analyte in the sample; and

(5) when it is determined in (f)(3) that the primary cause is the humidity reduced sensitivity of the moisture-sensitive reagent, rejecting the moisture-sensitive reagent as being humidity compromised.

23. The method of claim 22 wherein said moisture-sensitive reagent is based on esterases hydrolyzing derivatized esters.

24. The method of claim 22 wherein said moisture-sensitive reagent is based on proteolytic substrates used to detect protease inhibitors.

25. The method of claim 23 wherein said sample is urine and said analyte is leukocytes.

26. The method of claim 24 wherein sample is urine and said analyte is urinary trypsin inhibitors.

27. The method of claim 25 wherein said moisture-sensitive reagent includes a diazonium salt and an ester subject to hydrolysis in a presence of leukocytes.

28. The method of claim 22 wherein each of (a) through (f)(5) are performed by an optical inspection apparatus.

29. A method of measuring leukocytes in a urine sample with a test strip containing reagents including a diazonium salt and an ester subject to hydrolysis in a presence of leukocytes, the method comprising detecting humidity-compromised reagents by:

(a) measuring, with electronics of an optical inspection apparatus, the reflectance of light at a first wavelength and a second wavelength at a first predetermined time after contacting said reagent with said urine sample, the second wavelength being a characteristic wavelength of an infra-red reference dye disposed on the test strip, the second wavelength being greater than the first wavelength by at least 120 nm;

(b) measuring, with the electronics of the optical inspection apparatus, the reflectance of light at the first wavelength the second wavelength at a second predetermined time after contacting said reagent with the sample, the second predetermined time being after the first predetermined time;

(c) calculating a first ratio of the reflectance measurements in (a) and a second ratio of the reflectance measurements in (b);

(d) determining a level of activity of the reagent between the first and the second predetermined times by comparing the first ratio and the second ratio calculated in (c);

(e) when the difference between the first ratio and the second ratio as determined in (d) is greater than a first predetermined value, determining a concentration of an analyte in the sample; and

(f) when the difference between the first ratio and the second ratio determined in (d) is less than the first predetermined value, indicative of less than expected activity:

(1) measuring the reflectance of light at a third wavelength in a blue region of visible light spectrum and a fourth wavelength in a red region of the visible light spectrum at a third predetermined time;

- (2) calculating a third ratio of the reflectance measurements in (f)(1);
  - (3) determining whether a primary cause of the less than expected activity is due to a color of the sample or a humidity reduced sensitivity of the moisture-sensitive reagent by comparing the third ratio to a second predetermined value;
  - (4) when it is determined in (f)(3) that the third ratio is less than the second predetermined value, identifying the primary cause as the color of the sample and determining the concentration of the analyte in the urine sample; and
  - (5) when it is determined in (f)(3) that the third ratio greater than the second predetermined value; identifying the primary cause as the humidity reduced sensitivity of the moisture-sensitive reagent and rejecting the moisture-sensitive reagent as being humidity compromised.
- 30. The method of claim 29 wherein the first wavelength is between about 520-570 nm.
  - 31. The method of claim 29 wherein the second wavelength is about 825 nm.
  - 32. The method of claim 29 wherein a ratio of said infra-red reference dye to said ester subject to hydrolysis in the presence of leukocytes is greater than about 0.5%.
  - 33. The method of claim 29 wherein said infra-red reference dye is selected from the group consisting of phthalocyanine and naphthalocyanine compounds, metal complex dyes, polymethine dyes, di and triphenylmethane dyes, quinine dyes, azo dyes, charge transfer dyes, and charge resonance dyes.
  - 34. The method of claim 33 wherein said infra-red reference dye is DTO 141.
  - 35. The method of claim 29 wherein said ester subject to hydrolysis in the presence of leukocytes is PPTA and said diazonium salt is DNSA.
  - 36. The method of claim 29 wherein the first predetermined time is about 20 seconds and the second predetermined time about 60 seconds.

37. The method of claim 29 wherein said first predetermined value is 700 when the first ratio is multiplied by 1000.

38. The method of claim 29 wherein the second predetermined value is 600 when the third ratio is multiplied by 1000.

39. The method of claim 29 further comprising:

(h) reporting, by the electronics of the optical inspection apparatus, the determination made in (f)(5) to a user.

40. The method of claim 29 wherein said infra-red reference dye is combined with said reagents.

41. The method of claim 29 wherein said infra-red reference dye is located separately from said reagents.

42. The method of claim 22, wherein the first predetermined time is immediately after the moisture-sensitive reagent has been contacted with the sample.

43. The method of claim 22, wherein the first predetermined time is within 20 seconds after the moisture-sensitive reagent has been contacted with the sample.

44. The method of claim 22, wherein the first predetermined time is within three minutes after the moisture-sensitive reagent has been contacted with the sample.

45. A method of reading, using electronics of an optical inspection apparatus, a moisture-sensitive reagent contacted with a sample containing water and detecting a presence of an analyte in the sample by a reaction of the analyte with the moisture-sensitive reagent, the method comprising:

(a) measuring the reflectance of light at a first wavelength and a second wavelength at a first predetermined time after contacting said reagent with said urine sample, the first wavelength being a wavelength of a product of the reaction of the analyte in the sample with the moisture-sensitive reagent, the second wavelength being a characteristic

wavelength of an infra-red reference dye disposed on the test strip, the second wavelength being greater than the first wavelength by at least 120 nm;

(b) measuring the reflectance of light at the first wavelength and the second wavelength at a second predetermined time after contacting said reagent with said sample, the second predetermined time being after the first predetermined time;

(c) calculating a first ratio of the reflectance measurements in (a) and a second ratio of the reflectance measurement in (b);

(d) determining a level of activity of the reagent between the first and the second predetermined times by comparing the first ratio and the second ratio calculated in (c);

(e) when the difference between the first ratio and the second ratio as determined in (d) is greater than a first predetermined value, determining a concentration of the analyte in the sample and reporting the concentration to a user; and

(f) when the difference between the first ratio and the second ratio determined in (d) is less than the first predetermined value:

(1) measuring the reflectance of light at a third wavelength in a blue region of a visible light spectrum and a fourth wavelength in a red region of the visible light spectrum at a third predetermined time;

(2) calculating a third ratio of the reflectance measurements in (f)(1);

(3) determining whether a primary cause of the less than expected activity is due to a color of the sample or a humidity reduced sensitivity of the moisture-sensitive reagent by comparing the third ratio to a second predetermined value;

(4) when it is determined in (f)(3) that the third ratio is less than the second predetermined value, identifying the primary cause as the color of the sample and determining the concentration of the analyte in the urine sample and reporting the concentration to a user; and

(5) when it is determined in (f)(3) that the third ratio is greater than the second predetermined value, identifying the primary cause as the humidity reduced sensitivity of the moisture-sensitive reagent and generating an error signal indicating the moisture-sensitive reagent is humidity-compromised.

46. The method of claim 45, wherein the first and second predetermined times are at least 40 seconds apart.

47. The method of claim 45, wherein the third wavelength is about 470 nm.

48. The method of claim 45, wherein the fourth wavelength is about 625 nm.

49. The method of claim 45, wherein the first predetermined time is immediately after the moisture-sensitive reagent has been contacted with the sample.

50. The method of claim 45, wherein the first predetermined time is within 20 seconds after the moisture-sensitive reagent has been contacted with the sample.

51. The method of claim 45, wherein the first predetermined time is within three minutes after the moisture-sensitive reagent has been contacted with the sample.

52. The method of claim 45, wherein the infra-red reference dye is combined with the moisture-sensitive reagent.

53. The method of claim 45, wherein the infra-red reference dye is located separately from the moisture-sensitive reagent.

54. The use of an infra-red dye as a reference in a method of detecting a humidity compromised moisture-sensitive reagent disposed on a test strip, wherein the moisture-sensitive reagent is based on proteolytic substrates to detect protease enzymes or protease inhibitors, said moisture-sensitive reagent including a diazonium salt and developing a color response just after applying a sample, the method comprising applying a first wavelength within a visible light spectrum and a second wavelength in an infrared light spectrum to the test strip, measuring the color response of the moisture-sensitive reagent by reflectance of the

first wavelength, measuring the infra-red dye by reflectance of the second wavelength, determining the moisture-sensitive reagent to be the humidity compromised moisture-sensitive reagent by comparing a first measurement of the first wavelength to a second measurement of the second wavelength; and at least one of flagging or discarding the first measurement of the moisture-sensitive reagent.

55. The use as claimed in claim 54, wherein the infra-red dye is combined with said moisture-sensitive reagent.

56. The use as claimed in claim 54, wherein the infra-red dye is selected from the group consisting of phthalocyanine, naphthalocyanine, metal complex dyes, preferably dithiolene metal complex dyes, polymethine dyes, cyanine dyes, diphenylmethane dyes, triphenylmethane dyes, quinone dyes, azo dyes, charge transfer dyes and charge resonance dyes.

57. The use as claimed in claim 54, wherein the infra-red dye has a characteristic absorbance in the infra-red region of about 700 to about 2500 nm.

58. The use as claimed in claim 54, wherein the moisture-sensitive reagent is a reagent to detect leukocytes in urine samples.

59. The use as claimed in claim 54, wherein the diazonium salt is 1-diazo-2-naphthol-4-sulfonic acid.

FIG.1

