



(51) International Patent Classification:
A61B 1/00 (2006.01)

(21) International Application Number:
PCT/US2009/046508

(22) International Filing Date:
5 June 2009 (05.06.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/059,171 5 June 2008 (05.06.2008) US

(71) Applicant (for all designated States except US): **CARDIOROBOTICS, INC.** [US/US]; One Oxford Center, Suite 4300, 301 Grant Street, Pittsburgh, PA 15219 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZUBIATE, Brett** [US/US]; 1600 Robin Court, Pittsburgh, PA 15237 (US). **CHOSSET, Howard** [US/US]; 102 Meadow Heights Drive, Pittsburgh, PA 15215 (US).

(74) Agent: **SINGER, James**; Pepper Hamilton LLP, One Mellon Center, 500 Grant Street, Pittsburgh, PA 15219 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

(54) Title: EXTENDABLE ARTICULATED PROBE DEVICE

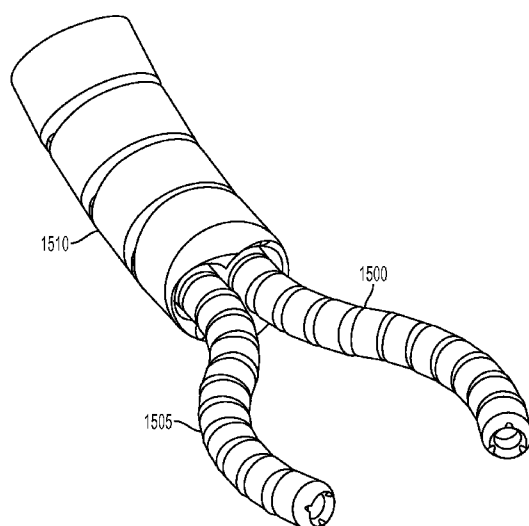


FIG. 10

(57) Abstract: An articulate probe device includes a first mechanism, a second mechanism, and an overtube mechanism. The first mechanism includes a proximal link which is movable coupled to a first intermediate link, a plurality of intermediate links, and a distal link which is moveably coupled to a second one of the intermediate links. The second mechanism includes a proximal link which is movable coupled to a first intermediate link, a plurality of intermediate links, and a distal link which is moveably coupled to a second one of the intermediate links. The overtube mechanism includes a proximal link which is movable coupled to a first intermediate link, a plurality of intermediate links, and a proximal link which is moveably coupled to a second one of the intermediate links. Further, at least one of the first mechanism, second mechanism, and overtube mechanism is steerable and extendable beyond the other mechanisms.

A. TITLE --EXTENDABLE ARTICULATED PROBE DEVICE

B. CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of the filing date of, and priority to, United States Provisional Patent Application No. 61/059,171 filed June 5, 2008.

C.-E. Not Applicable

F. BACKGROUND

[0002] This application discloses an invention that is related, generally and in various embodiments, to a multi-linked robotic device, a continuum robot, or other highly articulated device. This device may be used to deliver a tool such as a camera, probe, scalpel or other tool to an area of interest inside a patient's body during a surgical procedure. For minimally invasive procedures, such as cardiac ablation, a minimally complex articulated device is usually sufficient. However, for more complex procedures, a longer device may be necessary. A longer mechanism may require extra support along at least a portion of its length to counteract any increased loading. In addition, the device may need to accommodate additional tools needed to perform certain parts of a more complex procedure.

G. SUMMARY

[0003] Before the present methods are described, it is to be understood that this invention is not limited to the particular systems, methodologies or protocols described, as these may vary. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to limit the scope of the present disclosure which will be limited only by the appended claims.

[0004] It must be noted that as used herein and in the appended claims, the singular forms “a,” “an,” and “the” include plural reference unless the context clearly dictates otherwise. Unless defined otherwise, all technical and scientific terms used herein have the same meanings as commonly understood by one of ordinary skill in the art. As used herein, the term “comprising” means “including, but not limited to.”

[0005] In one general respect, the embodiments disclose an articulated probe device. The articulate probe device includes a first mechanism, a second mechanism, and at least one overtube mechanism. More specifically, the first mechanism includes a first link positioned at a proximal area of the first mechanism, a plurality of intermediate links, wherein a first one of the intermediate links is moveably coupled to the first link, and a second link positioned at a distal area of the second mechanism which is moveably coupled to a second one of the intermediate links. The second mechanism includes a first link positioned at a proximal area of the second mechanism, a plurality of intermediate links, wherein a first one of the intermediate links is moveably coupled to the first link, and a second link positioned at a distal area of the second mechanism and which is moveably coupled to a second one of the intermediate links. The at least one overtube includes a first link positioned at a proximal area of the overtube mechanism, a plurality of intermediate links, wherein a first one of the intermediate links is moveably coupled to the first link, and a second link which is moveably coupled to a second one of the intermediate links and positioned at a proximal area of the overtube mechanism. Further, at least one of the first mechanism, second mechanism, and overtube mechanism is configured to be steerable and extendable beyond the other mechanisms.

H. BRIEF DESCRIPTION OF DRAWINGS

[0006] Various embodiments of the invention are described herein by way of example in conjunction with the following figures.

[0007] FIGS. 1 and 2 illustrate various embodiments of a steerable multi-linked device.

[0008] FIG. 3 illustrates various embodiments of a core mechanism of the device of FIG 1.

[0009] FIGS. 4 and 5 illustrate various embodiments of an intermediate link of the core mechanism.

[0010] FIG. 6 illustrates various embodiments of a motion sequence of the device of Figure 1.

[0011] FIG. 7 illustrates an exemplary cross-section of an overtube according to an embodiment.

[0012] FIG. 8 illustrates an exemplary steerable multi-linked device having an overtube according to an embodiment.

[0013] FIGS. 9A-9C illustrates exemplary cross-sections of a steerable multi-linked device having an overtube according to an embodiment.

[0014] FIG. 10 illustrates exemplary steerable multi-linked devices having an overtube according to an embodiment.

[0015] FIG. 11 illustrates an exemplary cross-section of a steerable multi-linked device according to an embodiment.

[0016] FIG. 12 illustrates an exemplary tensioning cables and splice according to an embodiment.

[0017] FIG. 13A-13J illustrate exemplary port and through-hole configurations are according to an embodiment.

I. DETAILED DESCRIPTION

[0018] It is to be understood that at least some of the figures and descriptions of the invention have been simplified to focus on elements that are relevant for a clear understanding of the invention, while eliminating, for purposes of clarity, other elements that those of ordinary skill in the art will appreciate may also comprise a portion of the invention. However, because such elements are well known in the art, and because they do not necessarily facilitate a better understanding of the invention, a description of such elements is not provided herein.

[0019] According to various embodiments, the invention described herein may be utilized to control movement of an articulated device, which in the figures and description herein is described as a steerable multi-linked device. In an embodiment, a surgical probe may be an exemplary articulated device. A surgical probe may be used to perform surgical procedures, exploratory procedures and/or the like on humans and/or animals. For ease of explanation purposes, the invention will be described in the context of its use with various embodiments of the steerable multi-linked device described herein. However, one skilled in the art will appreciate that the invention may be utilized with other types of multi-linked devices as well as other types of devices such as, but not limited to, endoscopes, highly articulated devices and/or the like.

[0020] FIG. 1 illustrates a representative embodiment of a highly articulated extendible probe device **10**. The cross-section of such an embodiment is depicted in FIG. 1. According to the representative embodiment, the device may be a steerable multi-linked device such as a snake-like robot, a continuum robot or the like. Various embodiments of the device **10** may be utilized for medical procedures (e.g., as a robotic bore, positioning device, ablation tool, camera or instrument support, or guidance system for minimally invasive procedures), for surveillance applications, for inspection applications, for search and rescue applications, etc. For purposes of clarity only, the utility of the device **10** will be described

hereinbelow in the context of its applicability to medical procedures. However, a person skilled in the art will appreciate that the device **10** can be utilized in a variety of different applications.

[0021] The device **10** comprises a first mechanism **12** and a second mechanism **14**. According to the representative embodiment, a mechanism may be a series of articulated links, a snake-like robot, a continuum robot or the like. According to the representative embodiment, the second mechanism **14** is structured and arranged to receive and surround the first mechanism **12** as shown in FIG. 2. Thus, the first mechanism and second mechanism may be concentric. According to other embodiments, the first and second mechanisms **12**, **14** may be structured and arranged to have a relationship other than a concentric relationship. For example, the second mechanism **14** may surround the first mechanism **12**, however, the first mechanism **12** may be arranged eccentrically with respect to the second mechanism **14**. According to the representative embodiment, the first and second mechanisms **12**, **14** may be structured and arranged to operate in a side-by-side arrangement, where the first mechanism **12** operates alongside the second mechanism **14**. According to the representative embodiment, additional and/or alternate configurations may be used within the scope of this disclosure. According to the representative embodiment, a gap or three-dimensional space **240** may be provided between the first and second mechanisms. This space will be described in more detail below.

[0022] As described in more detail hereinbelow, the first mechanism **12** may operate in either a rigid mode or a limp mode, the second mechanism **14** may operate in either a rigid mode or a limp mode, and the first and second mechanisms **12**, **14** may operate independent of one another. At least one of the mechanism is rigid at all times during operation of the device **10**. Both the first mechanism **12** and the second mechanism **14** may be steerable mechanisms. Accordingly, it will be appreciated that the device **10** may be utilized to

navigate a luminal space as well as any path within a three-dimensional intracavity space, void, or an otherwise unconstrained three-dimensional volume. According to the representative embodiment, the device **10** may advance by alternating the operation of the first mechanism **12** and the second mechanism **14** between a limp mode and a rigid mode. Further, both mechanisms can both exist in the rigid mode at the same time.

[0023] According to the representative embodiment, the device **10** may also comprise one or more cables. According to the representative embodiment, one or more of the cables **10** may be steering cables and/or tensioning cables. For example, the device **10** may include three cables for steering disposed through the second mechanism and one cable for tensioning which is disposed through the first mechanism. Alternatively, the device **10** may include four steering cables. More, fewer, alternative and/or additional cables may be used within the scope of this disclosure.

[0024] FIG. 3 illustrates various embodiments of either mechanism of the device. Shown in FIG. 3 is the first mechanism **12** of the device **10**. The first mechanism **12** is a multi-linked mechanism and includes a first end **24** and a second end **26**. The first end **24** may be considered the proximal end and the second end **26** may be considered the distal end. The first mechanism **12** may comprise a first link **28**, a second link **30**, and one or more intermediate links **32** between the first and second links **28**, **30**. The first link **28** may be considered the proximal link, and the second link **30** may be considered the distal link. Any link between the proximal link **28** and distal link **30** may be considered an intermediate link **32**. Exemplar link structures are shown in, for example, U.S. Patent Application Publication No. 2008/0039690.

[0025] FIGS. 4 and 5 illustrate various views of an exemplary intermediate link **32** of the first mechanism **12** in an embodiment where the inner mechanism serves as the core. The intermediate link **32** is representative of the other intermediate links **32**. The intermediate

link **32** includes a first end **58** and a second end **60**, and defines a longitudinal axis **62** that passes through the center of the first end **58** and the center of the second end **60**. Link **32** includes a passage **76** or through-hole which may be positioned along the longitudinal axis, or it may be positioned elsewhere in the link parallel to, or substantially parallel to, the longitudinal axis.

[0026] As shown in FIG. 4, the intermediate link **32** also comprises a first surface **68** that extends from the first end **58** of the intermediate link **32** to the second end **60** of the intermediate link **32**. The first surface **68**, shown in FIG 5, may be considered the outer surface of the intermediate link **32**. The intermediate link **32** also defines one or more port portions, referred to herein as grooves. In the example shown, link **32** includes a first groove **70** parallel to the longitudinal axis **62** along the first surface **68**, a second groove **72** parallel to the longitudinal axis **62** along the first surface **68**, and a third groove **74** substantially aligned to the longitudinal axis **62** along the first surface **68**. Each of the first, second and third grooves **70**, **72**, **74** extend along the first surface **68** from the first end **58** of the intermediate link **32** toward the second end **60** of the intermediate link **32**. The first, second and third grooves **70**, **72**, **74** may be semi-tubular shaped and may be arranged in a radially symmetric manner around the longitudinal axis **62** on the first surface **68** of the intermediate link **32** as shown in FIGS. 4 and 5. The size of each of the grooves **70**, **72**, **74** may be identical to one another or may be different from one another. For example, according to various embodiments, the first and second grooves **70**, **72** are configured as segments of a cylinder having a diameter on the order of approximately 1.75 millimeters at the first end **58** of the intermediate link **32**, and the third groove **74** is configured as a segment of a cylinder having a diameter on the order of approximately 2.50 millimeters at the first end **58** of the intermediate link **32**. The first, second and third grooves **70**, **72**, **74** are each configured to provide a portion of a port structure that receives and partially surrounds any of a variety of

[0027] The intermediate link 32 also defines a through-hole or passage 76 extending from the first end 58 to the second end 60 and is parallel to the longitudinal axis. The through-hole or passage 76 may be of a size sufficient to allow one or more cables to pass there-through.

[0028] FIG. 6 illustrates various steps of a motion sequence of the steerable multi-linked device 10. At the start of the sequence, the second mechanism 14 surrounds the first mechanism 12 as shown in step "a" of FIG. 6, the longitudinal axes of the links 28, 30, 32 of the first mechanism 12 are substantially aligned with the respective longitudinal axes 134, 164, 212 of the links (e.g., link 126) of the second mechanism, and the second end 26 of the first mechanism 12 is at substantially the same position as the second end 122 of the second mechanism 14. A tensioning cable passes through a through-hole of the first mechanism. It is terminated on an actuation component at the proximal area or end of the first mechanism and at a next-to-last link at a distal end. The tensioning cable is pulled tight, thereby placing at least a portion of the first mechanism 12 in the rigid mode by placing a force on the distal link and at least a some intermediate links. The steering cables are not pulled tight, thereby placing the second mechanism 14 in the limp mode.

[0029] The second mechanism 14 is then advanced so that its second link 126 is positioned approximately one link ahead of the second end 24 of the first mechanism 12 as shown in step "b" of FIG. 6. The cables 16, 18, 20 may be utilized to orient the second link 126 to a particular orientation, where the longitudinal axis 134 of the first link 124 is no longer aligned with the longitudinal axes 164 of the intermediate links 128 of the second mechanism 14 or the longitudinal axis 90 of the second link 30 of the first mechanism 12. After the second link 126 is in the desired position and orientation, the steering cables are

pulled with appropriate forces in order to place the second mechanism **14** in the rigid mode, thereby preserving the position and orientation of the second mechanism **14** when the first mechanism is made limp.

[0030] The pulling force of the tensioning cable is then released to place the first mechanism **12** in the limp mode. After the first mechanism **12** is placed in the limp mode, the first mechanism **12** is advanced so that its second link **30** is at substantially the same position as the second end **122** of the second mechanism **14** as shown in step “c” of FIG. 6. After the second link **30** of the first mechanism **12** is in the desired position, the tensioning cable is pulled tight to place the first mechanism **12** back in the rigid mode, thereby preserving the position and orientation of the first mechanism **12**.

[0031] The pulling forces of the steering cables are then released to place the second mechanism **14** back in the limp mode. After the second mechanism **14** is placed back in the limp mode, the second mechanism **14** is advanced so that its second link **126** is once again positioned approximately one link ahead of the second end **26** of the first mechanism **12** as shown in step “d” of FIG. 6. After the second link **126** is in the desired position and orientation, the steering cables are pulled with identical force in order to place the second mechanism **14** in the rigid mode, thereby preserving the position and orientation of the second mechanism **14**.

[0032] The pulling force of the tensioning cable is then released to place the first mechanism **12** back in the limp mode. After the first mechanism **12** is placed back in the limp mode, the first mechanism **12** is advanced so that its second link **30** is once again at substantially the same position as the second end **122** of the second mechanism **14** as shown in step “e” of FIG. 6. After the second link **30** of the first mechanism **12** is in the desired position and orientation, the tensioning cable is pulled tight to place the first mechanism **12** back in the rigid mode, thereby preserving the position and orientation of the first mechanism

[0033] In an embodiment, the flexible, snake-like device **10** may include one or more overtubes. In an embodiment, an overtube may include a series of links in a similar fashion to the second mechanism. In an embodiment, an overtube may be a snake-like robot, a continuum robot or the like. An overtube may be fabricated from metal, plastic, fiber, reinforced fiber, any combination thereof and/or the like.

[0034] In an embodiment, an overtube may include one or more through-holes. A through-hole may extend along a length of the overtube. In an embodiment, a through-hole may be substantially cylindrically shaped. A through-hole may be configured to surround and receive a cable. For example, as illustrated by FIG. 13, a through-hole **1800** may receive a steering cable **1805**. In an embodiment, a steering cable may assist in controlling and guiding the movement of an overtube.

[0035] In an embodiment, an overtube **1820** may include one or more grooves, such as the grooves described above with respect to the intermediate link **32**. The grooves of an overtube may align with grooves on the outside of a second mechanism to form one or more ports such as port **1900**. A port may be a passageway that extends along a length of a device. In an embodiment, an overtube may wholly contain one or more ports. In an embodiment,

ports may be configured to surround and receive one or more tools. Additionally, overtube **1820** may include one or more through-holes **1800**. For example, FIG. 7 illustrates an exemplary through-hole **1905** receiving a tensioning cable **1915** and an exemplary port **1900** receiving a tool **1910**.

[0036] In an embodiment, an overtube may surround both the first mechanism **12** and the second mechanism **14**. For example, as illustrated by FIGS. 9A-9C, the second mechanism **1405** may surround the first mechanism **1415**, and the overtube **1400** may surround the second mechanism **1405**. In an embodiment, as shown in FIG. 2, the first mechanism **12** may be positioned concentrically with respect to the second mechanism **14**. Alternatively, as shown in FIGS. 9A-9C, the first mechanism **1415** may be positioned eccentrically with respect to the second mechanism **1405**. For example, the first mechanism **1415** may be located off-center from the second mechanism **1405**. In an embodiment, the second mechanism **1405** may be positioned concentrically with respect to the overtube **1400**. Alternatively, the second mechanism **1405** may be positioned eccentrically with respect to the overtube **1400**. In an embodiment, the overtube may be fabricated from plastic, such as polysulfone and/or the like.

[0037] In an embodiment, the first mechanism **1415** and the second mechanism **1405** may be collectively considered an inner mechanism, and the overtube **1400** may be considered an outer mechanism. In an embodiment, the device may operate in a first mode. The first mechanism **1415** and the second mechanism **1405** may operate substantially in unison and both mechanisms may alternate between a rigid and a limp state together. The operation of the first mechanism **1415** and second mechanism **1405** may be complimentary to the overtube **1400**. For example, the first mechanism **1415** and the second mechanism **1405** may both be made limp while the overtube **1400** is made rigid. Alternatively, the first

mechanism **1415** and the second mechanism **1405** may both be made rigid when the overtube **1400** is made limp. Still further, the all mechanism may be made rigid at the same time.

[0038] For example, while in a limp state, the first mechanism **1415** and second mechanism **1405** may advance into the overtube **1400** to a certain position. The first mechanism **1415** and the second mechanism **1405** may be made rigid, while the overtube **1400** may be made limp. The overtube **1400** may advance over the first mechanism **1415** and the second mechanism **1405**. This motion sequence is analogous to the motion sequence describe above and depicted in FIG 6.

[0039] In an embodiment, the device may operate in a second mode. In a second mode, the overtube **1400** may act as a steerable cannula that may be positioned with assistance from the first mechanism **1415** and the second mechanism **1405**. For example, after reaching a target location, the overtube **1400** may be made rigid. The first mechanism **1415** and second mechanism **1405** may continue to advance, while the overtube **1400** may remain stationary. As illustrated in FIG. 8, the overtube **1400** may provide additional length to the flexible, snake-like device **10**, allowing for more flexibility in its positioning and use. The overtube **1400** may also provide additional support to the first mechanism (contained within the second mechanism **1405**) and the second mechanism **1405**. As illustrated by FIG. 7, the radius of curvature associated with an overtube **1400** may, in some embodiments, be at least as large as the radius of curvature associated with the second mechanism **1405**.

[0040] FIGS. 9A – 9C illustrate exemplary cross-sections of an articulated device having an overtube according to an embodiment. In FIG. 9A, a cross-section of an overtube **1400** is highlighted. As illustrated by FIG. 9A, an overtube **1400** may include one or more through-holes **1401**, **1402**, **1403**. Steering cables used to control the overtube **1400** may be received by the through-holes **1401**, **1402**, **1403**.

[0041] In FIG. 9B, a cross-section of a second mechanism **1405** is highlighted. As illustrated by FIG. 9B, a second mechanism **1405** may include one or more through-holes **1408**, **1409**, **1410**. Steering cables used to control movement of the second mechanism **1405** may be received by the through-holes **1408**, **1409**, **1410**. In an embodiment, the second mechanism **1405** may include one or more ports **1406**, **1407**. A port may be a passageway that extends along the length of a device. In an embodiment, a port may be formed by the alignment of one or more grooves of a first mechanism and one or more grooves or walls of a second mechanism. In an alternate embodiment shown in FIG 9B, a port may be wholly formed in a first mechanism and/or a second mechanism. In an embodiment, one or more through-holes may be configured to surround and receive one or more tensioning cables and at least one port may be configured to surround tools and/or the like.

[0042] In FIG. 9C, a cross-section of the first mechanism **1415** is highlighted. As illustrated by FIG. 9C, a first device **1415** may include a through-hole **1420** for delivery of a tool.

[0043] In an embodiment, an overtube may be used to deliver a plurality of flexible, snake-like devices **10** to a location as illustrated by FIG. 10. Although FIG. 10 illustrates an overtube surrounding two devices **1500**, **1505** in a parallel configuration, additional devices and/or alternate configurations may be used within the scope of this disclosure.

[0044] In an embodiment, each device may be operated in a first mode, such as that described above. In an embodiment, each device may be operated in substantial unison with each of the other devices. For example, while in a limp state, a first device **1500** and a second device **1505** may advance into the overtube **1510** to a certain position. The first device **1500** and the second device **1505** may be made rigid, while the overtube **1510** may be made limp. The overtube **1510** may advance over the first device **1500** and the second device **1505**.

[0045] In an embodiment, the devices **1510**, **1505** and the overtube **1510** may operate in a second mode, similar to that described above. In an embodiment, the overtube **1510** may act as a steerable cannula that may be positioned with assistance from the first device **1500** and the second device **1505**. For example, after reaching a target location, the overtube **1510** may be made rigid. The first device **1500** and second device **1505** may continue to advance, while the overtube **1510** may remain stationary. The first device **1500** and the second device **1505** may be independently operated as they advance beyond the overtube **1310**. The overtube **1310** may provide additional length to the flexible, snake-like device **10**, providing for more flexibility in its positioning and use. The overtube **1510** may also provide additional support to the first device **1500** and the second device **1500**.

[0046] In an embodiment, a plurality of overtures arranged in a nested structure may be used in conjunction with one or more devices. FIG. 11 illustrates a cross-section of the device having n-overtures which are nested concentrically within each other according to an embodiment. As illustrated by FIG. 11, overtube n **1600** may surround at least a portion of overtube n-1 **1605**. Overtube n-1 **1605** may in turn surround at least a portion of overtube 4 **1610**, and so on. As illustrated by FIG. 11, with a nested arrangement, either concentrically or eccentrically, of n-overtures, a device may have a telescopic configuration. Any of the overtures may be steerable or non-steerable, and those which are steerable will have a plurality of associate steering cables. Non-steerable devices require only a tensioning cable in a through-hole, and no steering cable. In an embodiment, the added support provided by additional overtures may allow a device to reach lengths it otherwise would not be able to reach.

[0047] In an embodiment, a device may include one or more first mechanisms, one or more second mechanisms and/or one or more overtures. The first mechanisms, second mechanisms and/or overtures may be arranged in a nested, parallel and/or in any other

configuration or combination of configurations. In an embodiment, one or more first mechanisms, second mechanisms and/or overtubes may be arranged concentrically, eccentrically and/or the like. For example, a first mechanism may be positioned concentrically relative to a second mechanism. Similarly, a device may be positioned eccentrically relative to an overtube.

[0048] In an embodiment, when a first mechanism is disposed eccentrically relative to a second mechanism, the first mechanism may “break out” of the channel through which it is disposed during advancement when the device is highly curved. To resolve this problem, a passive section of inner links may be added to a distal end of the first mechanism. FIG. 12 illustrates a tensioning cable 1700 having a first cable portion 1705 and a second cable portion 1720 spliced together. For example, a hollow, braided cable 1700 may be used. In an embodiment, the distal end of the braided cable 1700 may be opened to form a sleeve 1715, and a shorter, separate section of the same type of cable may be inserted into the open weave of the sleeve 1715 as illustrated by FIG. 12. An active section of cable 1720 and a passive section 1705 may be combined such that their longitudinal axes are substantially aligned. After a portion of the shorter segment is inserted into the open braid of the longer cable, at least one running stitch 1710 may be run through both cables in the section where they overlap. In an embodiment, the portion may be approximately 3-5mm long. In an embodiment, the stitch may secure the cables together.

[0049] In an embodiment, the increased diameter of the longer cable with the shorter cable spliced into it may act as a force transmission point for the cable of the first mechanism on one of the intermediate links. The shorter section of cable may then have one or more links strung onto it. In an embodiment, three to five links may be strung onto the shorter section of cable. In an embodiment, the passive links may be secured with a stopper knot terminating the distal most end at the second link. Because the links of the active portion

of the first mechanism may be secured between the feeder and the splice point, the intermediate links that are strung on the shorter section beyond the splice point may not be subject to the same loads. As such, these intermediate links may not become rigid.

[0050] In an embodiment, an additional benefit of having the cable spliced may be increased cable strength. For example, with a 150 lb test cable, the cable may break close to the knot at approximately 60 lbs. With a splice, however, the cable may break far from the termination point at approximately 100 lbs.

[0051] In an embodiment, a first mechanism, a second mechanism and/or an overtube may have any number of ports, through-holes and/or the like. In an embodiment, the ports and/or through-holes may be arranged such that they are radially symmetric, radially asymmetric and/or the like.

[0052] In an embodiment, placement of ports and/or through-holes relative to the first mechanism 12 and/or the second mechanism 14 may vary. For example, one or more ports may be placed concentrically or eccentrically on the device 10. In addition, one or more ports may be fully contained within one or more mechanisms of the device 10. For example, one or more ports may be fully contained within the second mechanism 14. Similarly, one or more ports may be fully contained within the first mechanism 12. In an embodiment, one or more ports may be split between a plurality of mechanisms of the device 10. For example, one or more ports may be split between the first mechanism 12 and the second mechanism 14. In such an embodiment, when the internal grooves of the second mechanism are substantially aligned with the external grooves of the first mechanism, a number of larger ports equal to the number of grooves on the first/second mechanism will be shared by the two mechanisms. In another embodiment, when the internal grooves of the second mechanism are substantially misaligned with the external grooves of the first mechanism, a number of smaller ports equal to twice the number of grooves on the first/second mechanism will exist. In an embodiment,

one or more ports may be exposed to the exterior of a mechanism of the device **10**. For example, one or more ports may be exposed to the exterior of the second mechanism **14**. Additional and/or alternate port placements may be used within the scope of this disclosure.

[0053] Examples of different port and through-hole configurations are illustrated by FIGS. 13A-13J. For example, FIG. 13A illustrates an exemplary second mechanism **14** having four through-holes **1700**, **1702**, **1704**, **1706**. As illustrated by FIG. 13A, the through-holes may be eccentrically arranged in a radially symmetric manner. Steering cables may be delivered through the through-holes.

[0054] FIG. 13B illustrates an exemplary second mechanism **14** having three through-holes **1708**, **1710**, **1712** according to an embodiment. As illustrated by FIG. 13B, the through-holes **1708**, **1710**, **1712** may be arranged eccentrically in a radially symmetric manner inside the structure of the second mechanism **14**.

[0055] FIG. 13C illustrates an exemplary second mechanism **14** having three ports **1714**, **1716**, **1718** contained in an outer wall **1720** of the second mechanism **14**. The second mechanism **14** may also include one or more through-holes such as those **1713**, **1715**, **1717** illustrated by FIG. 13C. In an embodiment, the through-holes **1713**, **1715**, **1717** may be arranged eccentrically in a radially symmetric manner. In an embodiment, the through-holes may be evenly spaced within the arrangement of the ports **1714**, **1716**, **1718**.

[0056] FIG. 13D illustrates an exemplary second mechanism **14** having three ports **1722**, **1724**, **1726** located on the exterior of the second mechanism **14**. FIG. 13D also illustrates three through-holes **1764**, **1766**, **1768**. In an embodiment, the three through-holes **1764**, **1766**, **1768** may support three steering cables. The through-holes **1764**, **1766**, **1768** may be arranged eccentrically in a radially symmetric fashion as illustrated by FIG. 13D. In an embodiment, the triangle that is formed may include a center point of a cross-section of a mechanism. For example, the triangle formed by the through-holes **1764**, **1766**, **1768** in FIG.

13D include a center point **1770** of the second mechanism **14**. In an embodiment, the through-holes may be arranged as vertices of an equilateral triangle. In an embodiment, there may exist an even number of through-holes, such that each through-hole may have a corresponding through-hole located on the diametric opposite of a mechanism. In an embodiment, each through-hole and diametrically opposite through hole may oppose each other.

[0057] FIG. 13E illustrates an exemplary second mechanism **14** having two ports arranged eccentrically in a radially asymmetric manner **1728**, **1730**. As illustrated by FIG. 13E, the first mechanism **12** may be located eccentrically relative to the second mechanism **14**. The ports **1728**, **1730** may be located eccentrically relative to a first mechanism. As illustrated by FIG. 13E, the ports **1728**, **1730** may be completely contained in the second mechanism **14**. As such, no alignment/misalignment of the first mechanism and the second mechanism **14** may be necessary to define any plurality of ports **1728**, **1730**. As illustrated by FIG. 13E, the second mechanism **14** may include one or more through-holes **1727**, **1729**, **1731**. The through-holes **1764**, **1766**, **1768** may be spaced to form a triangle as illustrated by FIG. 12E. In an embodiment, the through-holes **1764**, **1766**, **1768** may be wholly contained in the second mechanism **14**.

[0058] FIG. 12F illustrates an exemplary first mechanism **12** having a single through-hole **1732** for, as an example, a tensioning cable. In an embodiment, the exemplary first mechanism **12** illustrated by FIG. 12F may correspond to the second mechanism **12** illustrated by FIG. 13E. If the through-hole is positioned concentrically, it is non-steerable, but is lockable when tension is applied. If the through-hole is positioned eccentrically, the first mechanism may be steerable, but not lockable.

[0059] FIG. 13G illustrates an exemplary first mechanism **12** having three through-holes **1734**, **1736**, **1738** for, as an example, three steering cables. In an embodiment, the first

mechanism **12** and/or the second mechanism **14** may be steered with the steering cables. In contrast to a single through-hole configuration from FIG 13F, the configuration depicted in FIG 13G is both steerable and lockable.

[0060] FIG. 13H illustrates exemplary ports **1740**, **1742**, **1744** defined by a first mechanism **12** and a second mechanism **14**. As illustrated by FIG. 12H, the ports **1740**, **1742**, **1744** may be located on an exterior portion of the first mechanism **12** and within the structure of the second mechanism **14**.

[0061] FIG. 13I illustrates exemplary ports **1746**, **1748**, **1750** defined by a first mechanism **12**. As illustrated by FIG. 12I, the ports **1746**, **1748**, **1750** may be located on an exterior portion of the first mechanism **12**. In an embodiment, the first mechanism may have a single through-hole **1747** for, as an example, a tensioning cable.

[0062] FIG. 13J illustrates exemplary ports **1758**, **1760**, **1762** defined by a first mechanism **12**. As illustrated by FIG. 13J, the ports may be located on an exterior portion of the first mechanism **12**. The first mechanism **12** may also include one or more through-holes **1752**, **1754**, **1756**. Additional and/or alternate port and through-hole locations may be used within the scope of this disclosure.

[0063] In an embodiment, a device **10** having two through-holes eccentrically arranged in a radially symmetric manner for steering cables may be capable of defining a 2D surface which is planar. In contrast, a device **10** having two through-holes for steering cables may be capable of defining a 2D surface which is non-planar if the through holes are radially asymmetric. In an embodiment, a device **10** having an odd number of radially symmetrically or asymmetrically arranged steering cables may require a dedicated actuator for each cable. For example, if a device **10** has n steering cables, where n is an odd number, or where n is an even number and the holes are arranged in a radially asymmetric fashion, n actuators may be necessary to load the n steering cables. In an embodiment, an actuator may be a device

capable of providing a load, a force and/or the like. Exemplary actuators may include DC motors, stepper motors, EPAM devices, muscles, MicroElectricalMechanical systems (“MEMS”) devices and/or the like.

[0064] For example, FIG. 13B illustrates a device **10** having three through-holes, each of which may support a steering cable. As the device in FIG. 13B has an odd number of steering cables (i.e., 3), each steering cable may require an actuator.

[0065] In an embodiment, a device **10** may have an even number of steering cables arranged in a radially symmetric manner. In an embodiment, each of the steering cables may have a corresponding actuator. Alternatively, diametrically opposing pairs of cables may be actuated with a single common actuator. For example, FIG. 13A illustrates a device **10** having four through-holes for four steering cables. A first steering cable associated with a first through-hole (e.g., **1700**) may be located opposite a second steering cable associated with a second through-hole (e.g., **1704**). The first steering cable and the second steering cable may be considered an opposing pair. In an embodiment, the first steering cable may be considered a counterpart to the second steering cable. In an embodiment, the first steering cable and the second steering cable may be loaded with a single actuator. In an embodiment, the number of actuators needed to load n steering cables (where n is an even number) may be a number greater than or equal to n and less than or equal to $\frac{n}{2}$ because each steering cable may have its own actuator or it may share an actuator with an opposing steering cable. An additional actuation element is necessary to simultaneously apply tension to all cables in order to lock the mechanism. In such an embodiment the total number of actuators necessary is $\frac{n}{2} + 1$

[0066] In an embodiment, one or more steering cables may be arranged to maximize workspace. For devices **10** having an even number of steering cables, as one steering cable is

made longer from the steering process, the length of its counterpart steering cable may be made shorter by an equal amount. For example, referring to FIG. 13A, a first steering cable associated with a first through-hole (e.g., **1700**) may be located opposite a second steering cable associated with a second through-hole (e.g., **1704**). As the first steering cable is made longer by x amount, the second steering cable may be made shorter by x amount.

[0067] While several embodiments of the invention have been described herein by way of example, those skilled in the art will appreciate that various modifications, alterations, and adaptations to the described embodiments may be realized without departing from the spirit and scope of the invention defined by the appended claims.

J. CLAIMS

What Is Claimed Is:

1. An articulated probe device, comprising:
 - a first mechanism comprising:
 - a first link positioned at a proximal area of the first mechanism,
 - a plurality of intermediate links, wherein a first one of the intermediate links is moveably coupled to the first link, and
 - a second link positioned at a distal area of the second mechanism which is moveably coupled to a second one of the intermediate links;
 - a second mechanism comprising:
 - a first link positioned at a proximal area of the second mechanism,
 - a plurality of intermediate links, wherein a first one of the intermediate links is moveably coupled to the first link, and
 - a second link positioned at a distal area of the second mechanism and which is moveably coupled to a second one of the intermediate links; and
 - a least one overtube mechanism, comprising:
 - a first link positioned at a proximal area of the overtube mechanism,
 - a plurality of intermediate links, wherein a first one of the intermediate links is moveably coupled to the first link, and
 - a second link which is moveably coupled to a second one of the intermediate links and positioned at a proximal area of the overtube mechanism;

wherein at least one of the first mechanism, second mechanism, and overtube mechanism is configured to be steerable and extendable beyond the other mechanisms.

2. The device of claim 1, wherein:

the first mechanism comprises a single concentrically positioned through-hole through which is disposed a tensioning cable;

a first end of the tensioning cable is configured to be terminated at an actuation component at the proximal area of the first mechanism; and

a second end of the tensioning cable is configured to be terminated at the second link of the first mechanism so that the tensioning cable transmits force to the second link of the first mechanism.

3. The device of claim 1, wherein the tensioning cable is configured to

transmit force to one of the intermediate links of the first mechanism, so that at least some portion of the first mechanism exists in a rigid state when the tensioning cable is under tension, and so that the first mechanism exists in a limp state when the cable is not under tension.

4. The device of claim 2, wherein the first mechanism further comprises

an eccentrically positioned through-hole through which is disposed an actuation cable, wherein:

a first end of the actuation cable is configured to be terminated on an actuation component at the proximal area of the first mechanism, and

a second end of actuation cable is configured to be terminated at the second link of the first mechanism so that the cable transmits force to the second link of the first mechanism.

5. The device of claim 1, wherein the actuation cable is configured to transmit force to one of the intermediate links of the first mechanism, so that at least some portion of the first mechanism develops a curvature as the length of the actuation cable is changed in the direction of the eccentricity.

6. The device of claim 5, further comprising a plurality of ports that are completely contained within walls of the links of the first mechanism.

7. The device of claim 4, further comprising a plurality of ports, each port partially formed by grooves within walls of the links of the first mechanism, and partially formed by structure of the walls of the links of the second mechanism or the overtube.

8. The device of claim 1, wherein the second mechanism further comprises:

at least two through-holes which are eccentrically arranged within the second mechanism in a radially symmetric pattern; and

a plurality of actuation cables, wherein each cable is positioned to correspond to and pass through one of the through-holes, wherein at least one of the actuation cables having a first end and a second end is configured to be terminated on the second end at the second link of the second mechanism, and on the first end at an actuation component in the proximal area of the second mechanism.

9. The device of claim 8, wherein all of the actuation cables are configured to transmit forces to the second link of the second mechanism

10. The device of claim 8, wherein all of the actuation cables transmit forces to at least one of the intermediate links of the second mechanism, such that the second mechanism exists in a limp state when the actuation cables are slack, and at least some portion of the second mechanism exists in a rigid state when all of the actuation cables are under equal tension.

11. The device of claim 8, wherein the actuation cables are configured so that changing the length of the actuation cables so that one is shorter than the other results in the development of a curvature in the second mechanism such that the curvature exists in a plane which is curving in the direction of the shorter of the actuation cables.

12. The device of claim 1, wherein the second mechanism further comprises:

an even number of through-holes, greater than two, which are eccentrically arranged in a radially symmetric pattern through which are disposed actuation cables; and

at least one of the actuation cables is configured to be terminated at a first end on the second link of the second mechanism, and at a second end and on a dedicated actuation component in the proximal area of the second mechanism.

13. The device of claim 8, wherein all of the actuation cables transmit forces to at least one of the intermediate links of the second mechanism, such that the second mechanism exists in a limp state when the actuation cables are slack, and at least some portion of the second mechanism exists in a rigid state when all of the actuation cables are under equal tension.

14. The device of claim 11, wherein the actuation cables are configured so that changing the length of the actuation cables results in the development of a curvature in the second mechanism such that the direction of the curvature is dependent on the lengths of the actuation cables.

15. The device of claim 1, wherein the second mechanism further comprises:

an even number of through-holes, greater than two, which are eccentrically arranged within the second mechanism in a radially asymmetric pattern; and

a plurality of actuation cables, wherein each cable is positioned to correspond to and pass through one of the through-holes,

wherein at least one of the actuation cables having a first end and a second end is configured to be terminated on the first end at the second link of the second mechanism, and on the second end at an actuation component in the proximal area of the second mechanism.

16. The device of claim 15, wherein all of the actuation cables transmit forces to at least one of the intermediate links of the second mechanism, such that the second mechanism exists in a limp state when the actuation cables are slack, and at least some

portion of the second mechanism exists in a rigid state when all of the actuation cables are under equal tension.

17. The device of claim 15, wherein the actuation cables are configured so that changing the length of the actuation cables results in the development of a curvature in the second mechanism such that the direction of the curvature is dependent on the lengths of the actuation cables.

18. The device of claim 8, wherein:
the through-holes comprise an odd number of through-holes, greater than two, which are eccentrically arranged in a radially symmetric pattern through which are disposed actuation cables; and

at least one of the actuation cables is configured to be terminated at a first end on the second link of the second mechanism, and at a second end and on a dedicated actuation component in the proximal area of the second mechanism.

19. The device of claim 18, wherein all of the actuation cables are configured to transmit forces to the second link of the second mechanism, and wherein all of the actuation cables transmit forces to at least one of the intermediate links of the second mechanism, such that the second mechanism exists in a limp state when the actuation cables are slack, and at least some portion of the second mechanism exists in a rigid state when all of the actuation cables are under equal tension.

20. The device of claim 18, wherein the actuation cables are configured so that changing the length of the actuation cables results in the development of a curvature in

the second mechanism such that the direction of the curvature is dependent on the lengths of the actuation cables.

21. The device of claim 8, further comprising a plurality of ports that are completely contained within walls of the links of the second mechanism.

22. The device of claim 8, further comprising a plurality of ports, each port partially formed by grooves within walls of the links of the second mechanism, and partially formed by structure of the walls of the links of the first mechanism or the overtube.

23. The device of claim 1, wherein the overtube mechanism further comprises:

at least two through-holes which are eccentrically arranged in a radially symmetric pattern through which are disposed actuation cables,

wherein at least one of the actuation cables is configured to be terminated at a first end on the second link of the overtube mechanism and at a second end and on an actuation component at the proximate area of the overtube mechanism so that said actuation cable transmits force to the second link of the overtube mechanism.

24. The device of claim 23, wherein the actuation cables transmit forces to at least one of the intermediate links of the overtube mechanism; so that the overtube mechanism exists in a limp state when the actuation cables are slack, and so that at least a portion of the overtube mechanism exists in a rigid state when all the actuation cables are under equal tension.

25. The device of claim 23, wherein actuation cables are configured so that changing the length of the actuation cables results in the development of a curvature in the overtube mechanism such that the curvature exists in a plane containing the cables which is curving in the direction of the shorter cable.

26. The device of claim 23, wherein:

- the through-holes comprise an even number of through-holes, greater than two;
- all of the cables are configured to connect and transmit forces to the second link of the overtube mechanism;
- all of the cables are configured to connect and transmit forces to at least one of the intermediate links of the overtube mechanism; and
- and the overtube mechanism is configured to exist in a limp state when all of the actuation cables are slack, and in a rigid state when all of the actuation cables are under equal amounts of tension.

27. The device of claim 26, wherein the overtube mechanism is configured so that changing the length of the cables results in the development of a curvature in the overtube mechanism, wherein the direction of the curvature is dependent on the lengths of the actuation cables.

28. The device of claim 1, wherein the overtube mechanism further comprises:

- an even number of through-holes, greater than two, which are eccentrically arranged in a radially symmetric pattern through which are disposed actuation cables,

wherein at least one of the actuation cables is configured to be terminated at a first end on the second link of the overtube mechanism and at a second end and on an actuation component at the proximate area of the overtube mechanism so that said actuation cable transmits force to the second link of the overtube mechanism,

wherein cables positioned opposite of each other terminate on a common actuation component.

29. The device of claim 28, wherein:

all of the cables are configured to connect and transmit forces to at least one of the intermediate links of the overtube mechanism; and

the overtube mechanism is configured to exist in a limp state when all of the actuation cables are slack, and in a rigid state when all of the actuation cables are under equal amounts of tension; and

the overtube mechanism is also configured so that changing the length of the actuation cables results in the development of a curvature in the mechanism, wherein the direction of the curvature is dependent on the lengths of the set of cables.

30. The device of claim 1, wherein the overtube mechanism further comprises:

an even number of through-holes, greater than two, which are eccentrically arranged in a radially asymmetric pattern through which are disposed actuation cables,

wherein at least one of the actuation cables is configured to be terminated at a first end on the second link of the overtube mechanism and at a second end and on a dedicated actuation component at the proximate area of the overtube mechanism so that said actuation cable transmits force to the second link of the overtube mechanism.

31. The device of claim 30, wherein:

all of the cables are configured to connect and transmit forces to at least one of the intermediate links of the overtube mechanism; and

the overtube mechanism is configured to exist in a limp state when all of the actuation cables are slack, and in a rigid state when all of the actuation cables are under equal amounts of tension; and

the overtube mechanism is also configured so that changing the length of the actuation cables results in the development of a curvature in the mechanism, wherein the direction of the curvature is dependent on the lengths of the set of cables.

32. The device of claim 1, wherein the overtube mechanism further comprises:

an odd number of through-holes, greater than two, which are eccentrically arranged in a radially symmetric pattern through which are disposed actuation cables,

wherein at least one of the actuation cables is configured to be terminated at a first end on the second link of the overtube mechanism and at a second end and on a dedicated actuation component at the proximate area of the overtube mechanism so that said actuation cable transmits force to the second link of the overtube mechanism.

33. The device of claim 32, wherein:

all of the cables are configured to connect and transmit forces to at least one of the intermediate links of the overtube mechanism; and

the overtube mechanism is configured to exist in a limp state when all of the actuation cables are slack, and in a rigid state when all of the actuation cables are under equal amounts of tension; and

the overtube mechanism is also configured so that changing the length of the actuation cables results in the development of a curvature in the mechanism, wherein the direction of the curvature is dependent on the lengths of the set of cables.

34. The device of claim 1, wherein the overtube mechanism further comprises a plurality of ports completely contained within walls of the links of the overtube mechanism.

35. The device of claim 1, wherein the overtube mechanism further comprises further comprising a plurality of ports, each port partially formed by grooves on an exterior lateral surface or interior lateral surface of the links of the overtube mechanism.

36. The device of claim 1, wherein the first mechanism is concentrically disposed in the second mechanism.

37. The device of claim 1, wherein the first mechanism is eccentrically disposed in the second mechanism.

38. The device from claim 1, wherein the first mechanism comprises grooves on an external lateral surface, such that each groove, along with surrounding structure of the second mechanism, defines a port.

40. The device from claim 1, wherein the second mechanism comprises grooves on an internal lateral surface, such that each groove, along with a groove-facing structure of the first mechanism, defines a port.

40. The device of claim 38 wherein the first mechanism with at least one external groove is properly aligned with a counterpart second mechanism with the same number of internal grooves to define a number of ports equal to the number of grooves on the first or second mechanism.

41. The device of claim 38, wherein the first mechanism with at least one external groove is misaligned with a counterpart second mechanism with the same number of internal grooves so that the second and overtube mechanisms define a number of ports equal to the total number of grooves on the first mechanism plus the second mechanism.

42. The device of claim 1, wherein the second mechanism comprises grooves on an external lateral surface such that each groove defines a port when the second mechanism is surrounded by the overtube mechanism.

43. The device of claim 42, wherein the overtube mechanism comprises grooves on an interior lateral surface, and the second mechanism is properly aligned with the overtube mechanism so that the grooves match and define a number of ports equal to the number of grooves on the second mechanism.

44. The device of claim 42, wherein the overtube mechanism comprises grooves on an interior lateral surface, and the second mechanism is properly aligned with the

overtube mechanism so that the second and overtube mechanisms define a number of ports equal to the total number of grooves on the overtube mechanism plus the second mechanism.

45. The device from claim 1, wherein at least one of the mechanisms comprises a rigid portion, at least one of the mechanisms comprises a steerable portion, and the steerable portion is configured to be extendible beyond a length of the rigid portion..

1. An articulated probe device, comprising:

a first mechanism comprising:

an inner mechanism and an outer mechanism, wherein the outer mechanism is configured to concentrically surround the inner mechanism, wherein the inner mechanism comprises:

a first link positioned at a proximal area of the first mechanism,

a plurality of intermediate links, wherein a first one of the intermediate links is moveably coupled to the first link, and

a second link positioned at a distal area of the second mechanism which is moveably coupled to a second one of the intermediate links;

a second mechanism comprising:

a first link positioned at a proximal area of the second mechanism,

a plurality of intermediate links, wherein a first one of the intermediate links is moveably coupled to the first link, and

a second link positioned at a distal area of the second mechanism and which is moveably coupled to a second one of the intermediate links; and

at least one overtube mechanism, comprising:

a first link positioned at a proximal area of the overtube mechanism,

a plurality of intermediate links, wherein a first one of the intermediate links is moveably coupled to the first link, and

a second link which is moveably coupled to a second one of the intermediate links and positioned at a proximal area of the overtube mechanism;

wherein the overtube mechanism is configured to surround at least a portion of the first mechanism and at least a portion of the second mechanism,

wherein at least one of the first mechanism, second mechanism, and overtube mechanism is configured to be steerable and extendable beyond the other mechanisms,

wherein at least one of the first mechanism and the second mechanism are configured to operate in a limp mode when the overtube mechanism is configured to operate in a rigid mode.

2. The device of claim 1, wherein:

the first mechanism comprises a single concentrically positioned through-hole through which is disposed a tensioning cable;

a first end of the tensioning cable is configured to be terminated at an actuation component at the proximal area of the first mechanism; and

a second end of the tensioning cable is configured to be terminated at the second link of the first mechanism so that the tensioning cable transmits force to the second link of the first mechanism.

3. The device of claim 1, wherein the tensioning cable is configured to transmit force to one of the intermediate links of the first mechanism, so that at least some portion of the first mechanism exists in a rigid state when the tensioning cable is under tension, and so that the first mechanism exists in a limp state when the cable is not under tension.

4. The device of claim 2, wherein the first mechanism further comprises an eccentrically positioned through-hole through which is disposed an actuation cable, wherein:

a first end of the actuation cable is configured to be terminated on an actuation component actuation component at the proximal area of the first mechanism, and

a second end of actuation cable is configured to be terminated at the second link of the first mechanism so that the cable transmits force to the second link of the first mechanism.

5. The device of claim 1, wherein the actuation cable is configured to transmit force to one of the intermediate links of the first mechanism, so that at least some portion of the first mechanism develops a curvature as the length of the actuation cable is changed in the direction of the eccentricity.

6. The device of claim 5, further comprising a plurality of ports that are completely contained within walls of the links of the first mechanism.

7. The device of claim 4, further comprising a plurality of ports, each port partially formed by grooves within walls of the links of the first mechanism, and partially formed by structure of the walls of the links of the second mechanism or the overtube.

8. The device of claim 1, wherein the second mechanism further comprises:

at least two through-holes which are eccentrically arranged within the second mechanism in a radially symmetric pattern; and

a plurality of actuation cables, wherein each cable is positioned to correspond to and pass through one of the through-holes, wherein at least one of the actuation cables having a first end and a second end is configured to be terminated on the second end at the second link of the second mechanism, and on the first end at an actuation component in the proximal area of the second mechanism.

9. The device of claim 8, wherein all of the actuation cables are configured to transmit forces to the second link of the second mechanism

10. The device of claim 8, wherein all of the actuation cables transmit forces to at least one of the intermediate links of the second mechanism, such that the second mechanism exists in a limp state when the actuation cables are slack, and at least some portion of the second mechanism exists in a rigid state when all of the actuation cables are under equal tension.

11. The device of claim 8, wherein the actuation cables are configured so that changing the length of the actuation cables so that one is shorter than the other results in the development of a curvature in the second mechanism such that the curvature exists in a plane which is curving in the direction of the shorter of the actuation cables.

12. The device of claim 1, wherein the second mechanism further comprises:
an even number of through-holes, greater than two, which are eccentrically arranged in a radially symmetric pattern through which are disposed actuation cables; and

at least one of the actuation cables is configured to be terminated at a first end on the second link of the second mechanism, and at a second end and on a dedicated actuation component in the proximal area of the second mechanism.

13. The device of claim 8, wherein all of the actuation cables transmit forces to at least one of the intermediate links of the second mechanism, such that the second mechanism exists in a limp state when the actuation cables are slack, and at least some portion of the second mechanism exists in a rigid state when all of the actuation cables are under equal tension.

14. The device of claim 11, wherein the actuation cables are configured so that changing the length of the actuation cables results in the development of a curvature in the second mechanism such that the direction of the curvature is dependent on the lengths of the actuation cables.

15. The device of claim 1, wherein the second mechanism further comprises:

an even number of through-holes, greater than two, which are eccentrically arranged within the second mechanism in a radially asymmetric pattern; and

a plurality of actuation cables, wherein each cable is positioned to correspond to and pass through one of the through-holes,

wherein at least one of the actuation cables having a first end and a second end is configured to be terminated on the first end at the second link of the second mechanism, and on the second end at an actuation component in the proximal area of the second mechanism.

16. The device of claim 15, wherein all of the actuation cables transmit forces to at least one of the intermediate links of the second mechanism, such that the second mechanism exists in a limp state when the actuation cables are slack, and at least some portion of the second mechanism exists in a rigid state when all of the actuation cables are under equal tension.

17. The device of claim 15, wherein the actuation cables are configured so that changing the length of the actuation cables results in the development of a curvature in the second mechanism such that the direction of the curvature is dependent on the lengths of the actuation cables.

18. The device of claim 8, wherein:

the through-holes comprise an odd number of through-holes, greater than two, which are eccentrically arranged in a radially symmetric pattern through which are disposed actuation cables; and

at least one of the actuation cables is configured to be terminated at a first end on the second link of the second mechanism, and at a second end and on a dedicated actuation component in the proximal area of the second mechanism.

19. The device of claim 18, wherein all of the actuation cables are configured to transmit forces to the second link of the second mechanism, and wherein all of the actuation cables transmit forces to at least one of the intermediate links of the second mechanism, such that the second mechanism exists in a limp state when the actuation cables are slack, and at least some portion of the second mechanism exists in a rigid state when all of the actuation cables are under equal tension.

20. The device of claim 18, wherein the actuation cables are configured so that changing the length of the actuation cables results in the development of a curvature in the second mechanism such that the direction of the curvature is dependent on the lengths of the actuation cables.

21. The device of claim 8, further comprising a plurality of ports that are completely contained within walls of the links of the second mechanism.

22. The device of claim 8, further comprising a plurality of ports, each port partially formed by grooves within walls of the links of the second mechanism, and partially formed by structure of the walls of the links of the first mechanism or the overtube.

23. The device of claim 1, wherein the overtube mechanism further comprises:
at least two through-holes which are eccentrically arranged in a radially symmetric pattern through which are disposed actuation cables,

wherein at least one of the actuation cables is configured to be terminated at a first end on the second link of the overtube mechanism and at a second end and on an actuation component at the proximate area of the overtube mechanism so that said actuation cable transmits force to the second link of the overtube mechanism.

24. The device of claim 23, wherein the actuation cables transmit forces to at least one of the intermediate links of the overtube mechanism; so that the overtube mechanism exists in a limp

state when the actuation cables are slack, and so that at least a portion of the overtube mechanism exists in a rigid state when all the actuation cables are under equal tension.

25. The device of claim 23, wherein actuation cables are configured so that changing the length of the actuation cables results in the development of a curvature in the overtube mechanism such that the curvature exists in a plane containing the cables which is curving in the direction of the shorter cable.

26. The device of claim 23, wherein:

the through-holes comprise an even number of through-holes, greater than two;

all of the cables are configured to connect and transmit forces to the second link of the overtube mechanism;

all of the cables are configured to connect and transmit forces to at least one of the intermediate links of the overtube mechanism; and

the overtube mechanism is configured to exist in a limp state when all of the actuation cables are slack, and in a rigid state when all of the actuation cables are under equal amounts of tension.

27. The device of claim 26, wherein the overtube mechanism is configured so that changing the length of the cables results in the development of a curvature in the overtube mechanism, wherein the direction of the curvature is dependent on the lengths of the actuation cables.

28. The device of claim 1, wherein the overtube mechanism further comprises:

an even number of through-holes, greater than two, which are eccentrically arranged in a radially symmetric pattern through which are disposed actuation cables,

wherein at least one of the actuation cables is configured to be terminated at a first end on the second link of the overtube mechanism and at a second end and on an actuation component at the proximate area of the overtube mechanism so that said actuation cable transmits force to the second link of the overtube mechanism,

wherein cables positioned opposite of each other terminate on a common actuation component,

29. The device of claim 28, wherein:

all of the cables are configured to connect and transmit forces to at least one of the intermediate links of the overtube mechanism; and

the overtube mechanism is configured to exist in a limp state when all of the actuation cables are slack, and in a rigid state when all of the actuation cables are under equal amounts of tension; and

the overtube mechanism is also configured so that changing the length of the actuation cables results in the development of a curvature in the mechanism, wherein the direction of the curvature is dependent on the lengths of the set of cables.

30. The device of claim 1, wherein the overtube mechanism further comprises:

an even number of through-holes, greater than two, which are eccentrically arranged in a radially asymmetric pattern through which are disposed actuation cables,

wherein at least one of the actuation cables is configured to be terminated at a first end on the second link of the overtube mechanism and at a second end and on a dedicated actuation component at the proximate area of the overtube mechanism so that said actuation cable transmits force to the second link of the overtube mechanism.

31. The device of claim 30, wherein:

all of the cables are configured to connect and transmit forces to at least one of the intermediate links of the overtube mechanism; and

the overtube mechanism is configured to exist in a limp state when all of the actuation cables are slack, and in a rigid state when all of the actuation cables are under equal amounts of tension; and

the overtube mechanism is also configured so that changing the length of the actuation cables results in the development of a curvature in the mechanism, wherein the direction of the curvature is dependent on the lengths of the set of cables.

32. The device of claim 1, wherein the overtube mechanism further comprises:

an odd number of through-holes, greater than two, which are eccentrically arranged in a radially symmetric pattern through which are disposed actuation cables,

wherein at least one of the actuation cables is configured to be terminated at a first end on the second link of the overtube mechanism and at a second end and on a dedicated actuation component at the proximate area of the overtube mechanism so that said actuation cable transmits force to the second link of the overtube mechanism.

33. The device of claim 32, wherein:

all of the cables are configured to connect and transmit forces to at least one of the intermediate links of the overtube mechanism; and

the overtube mechanism is configured to exist in a limp state when all of the actuation cables are slack, and in a rigid state when all of the actuation cables are under equal amounts of tension; and

the overtube mechanism is also configured so that changing the length of the actuation cables results in the development of a curvature in the mechanism, wherein the direction of the curvature is dependent on the lengths of the set of cables.

34. The device of claim 1, wherein the overtube mechanism further comprises a plurality of ports completely contained within walls of the links of the overtube mechanism.

35. The device of claim 1, wherein the overtube mechanism further comprises further comprising a plurality of ports, each port partially formed by grooves on an exterior lateral surface or interior lateral surface of the links of the overtube mechanism.

36. The device of claim 1, wherein the first mechanism is concentrically disposed in the second mechanism.

37. The device of claim 1, wherein the first mechanism is eccentrically disposed in the second mechanism.

38. The device from claim 1, wherein the first mechanism comprises grooves on an external lateral surface, such that each groove, along with surrounding structure of the second mechanism, defines a port.

39. The device from claim 1, wherein the second mechanism comprises grooves on an internal lateral surface, such that each groove, along with a groove-facing structure of the first mechanism, defines a port.

40. The device of claim 38 wherein the first mechanism with at least one external groove is properly aligned with a counterpart second mechanism with the same number of internal grooves to define a number of ports equal to the number of grooves on the first or second mechanism.

41. The device of claim 38, wherein the first mechanism with at least one external groove is misaligned with a counterpart second mechanism with the same number of internal grooves so that the second and overtube mechanisms define a number of ports equal to the total number of grooves on the first mechanism plus the second mechanism.

42. The device of claim 1, wherein the second mechanism comprises grooves on an external lateral surface such that each groove defines a port when the second mechanism is surrounded by the overtube mechanism.

43. The device of claim 42, wherein the overtube mechanism comprises grooves on an interior lateral surface, and the second mechanism is properly aligned with the overtube

mechanism so that the grooves match and define a number of ports equal to the number of grooves on the second mechanism.

44. The device of claim 42, wherein the overtube mechanism comprises grooves on an interior lateral surface, and the second mechanism is properly aligned with the overtube mechanism so that the second and overtube mechanisms define a number of ports equal to the total number of grooves on the overtube mechanism plus the second mechanism.

45. The device from claim 1, wherein at least one of the mechanisms comprises a rigid portion, at least one of the mechanisms comprises a steerable portion, and the steerable portion is configured to be extendible beyond a length of the rigid portion.

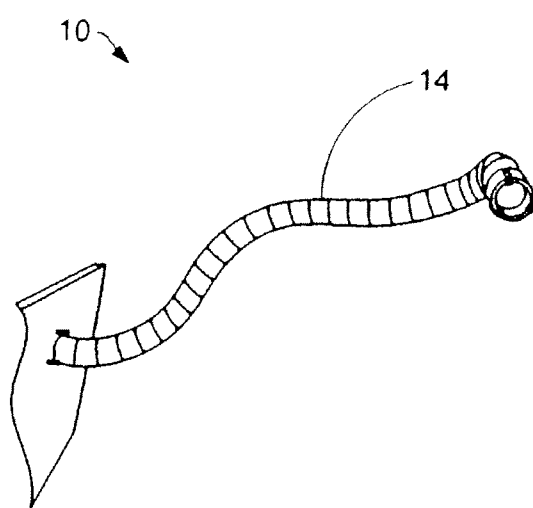


FIG. 1

2/13

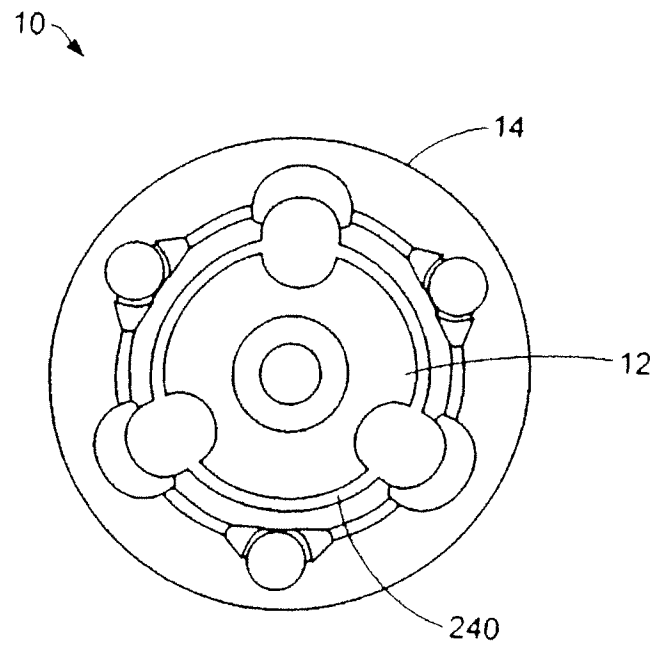


FIG. 2

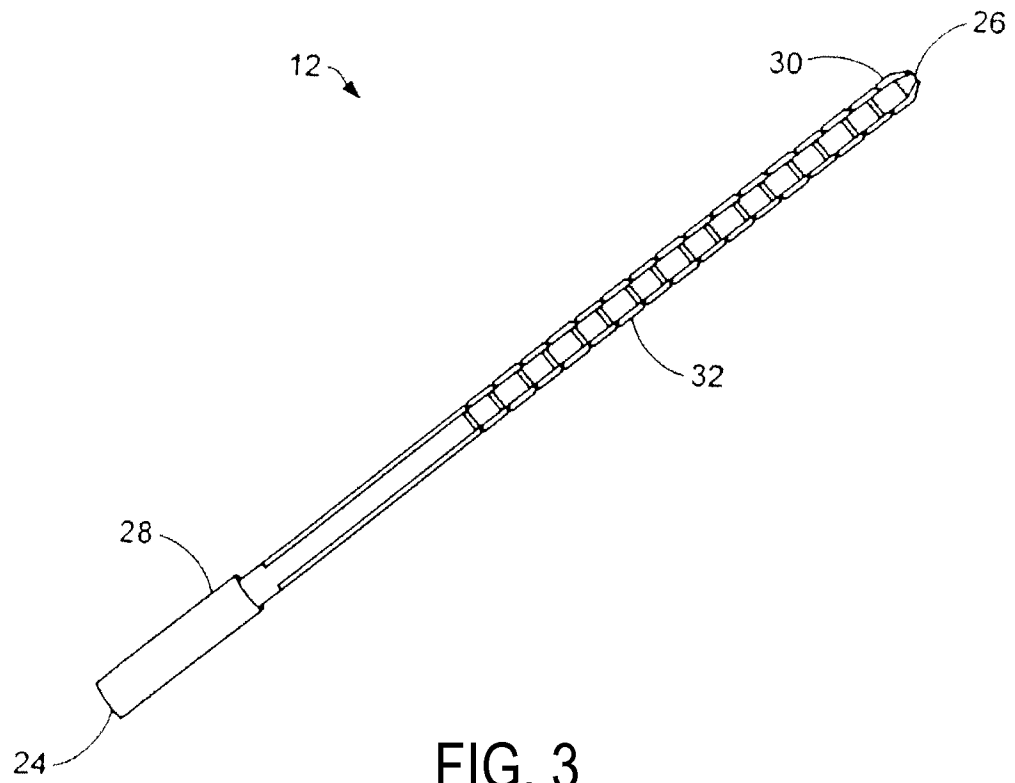


FIG. 3

4/13

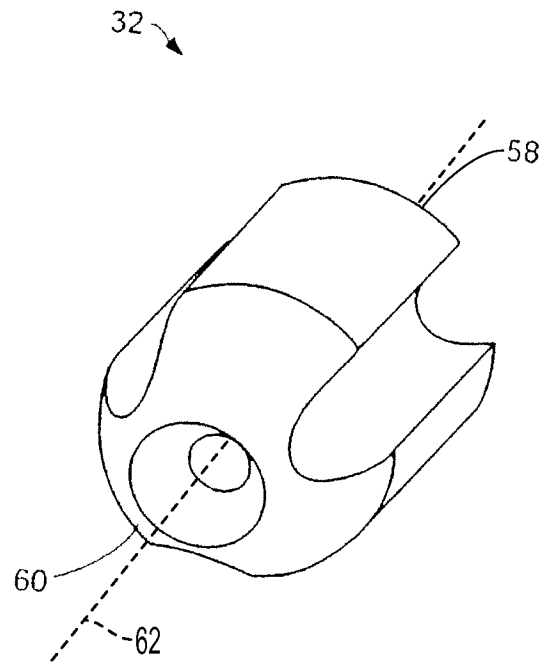


FIG. 4

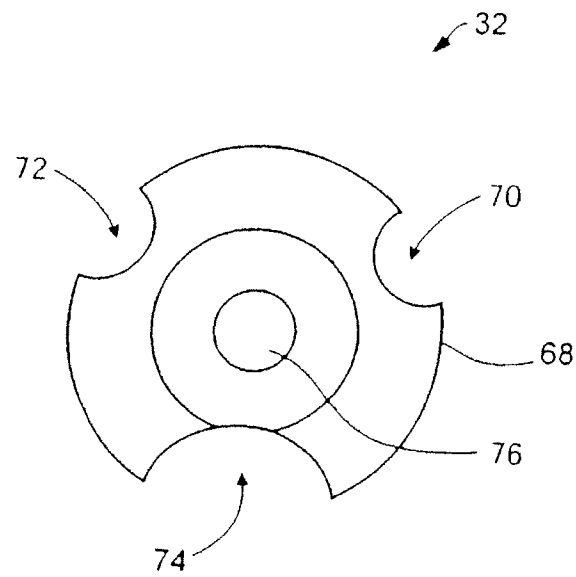


FIG. 5

6/13

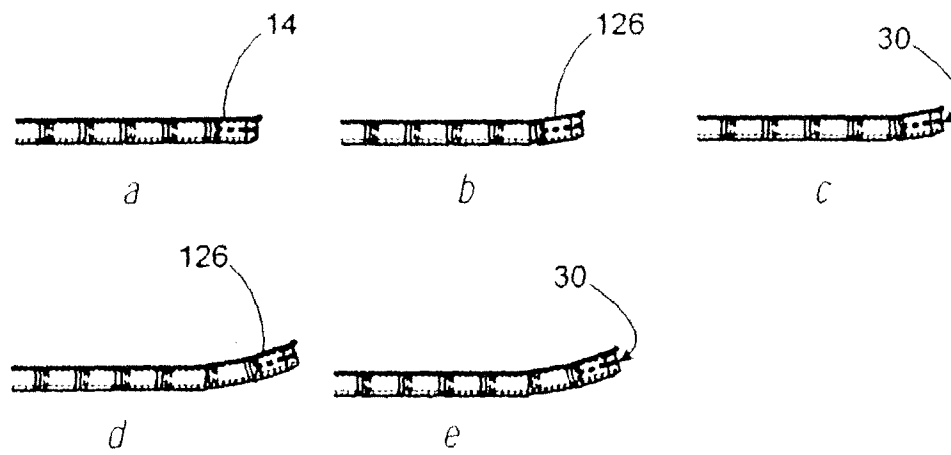


FIG. 6

7/13

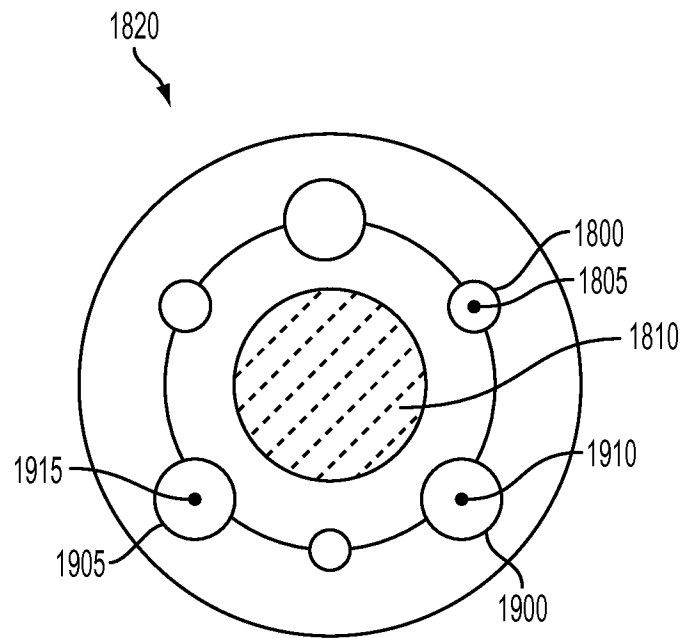


FIG. 7

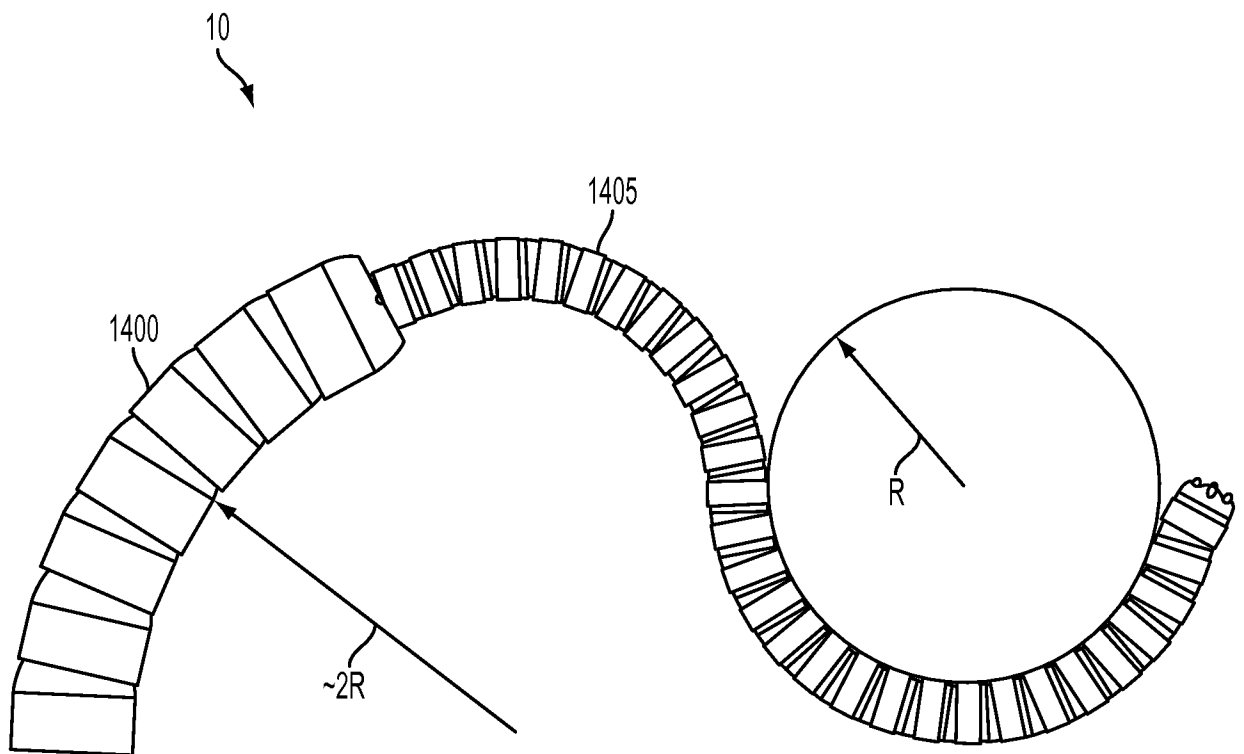


FIG. 8

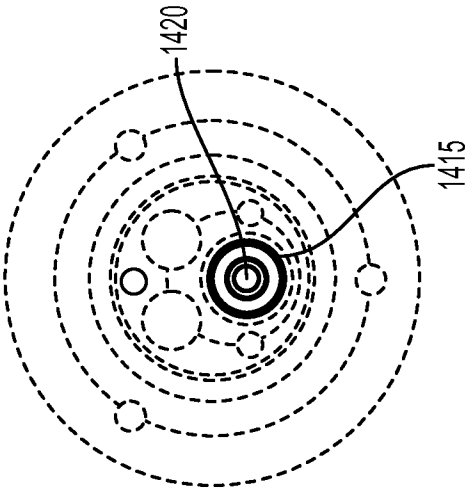


FIG. 9C

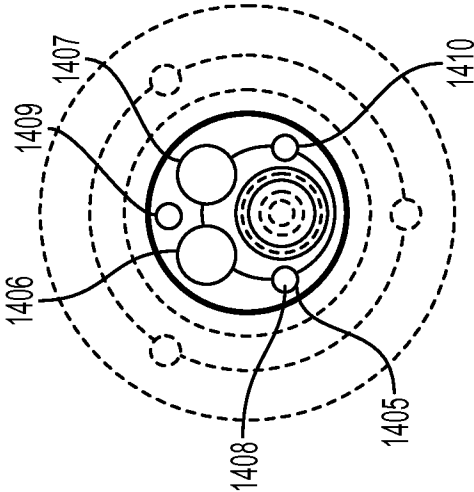


FIG. 9B

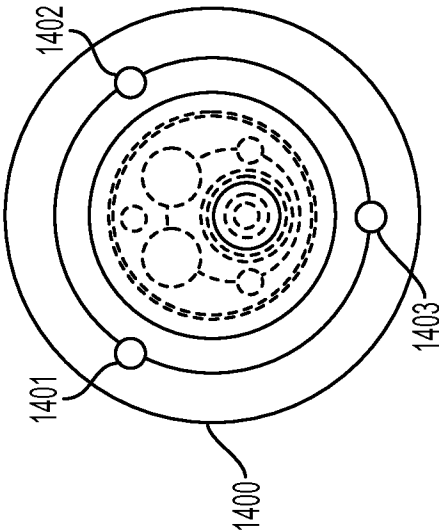


FIG. 9A

10/13

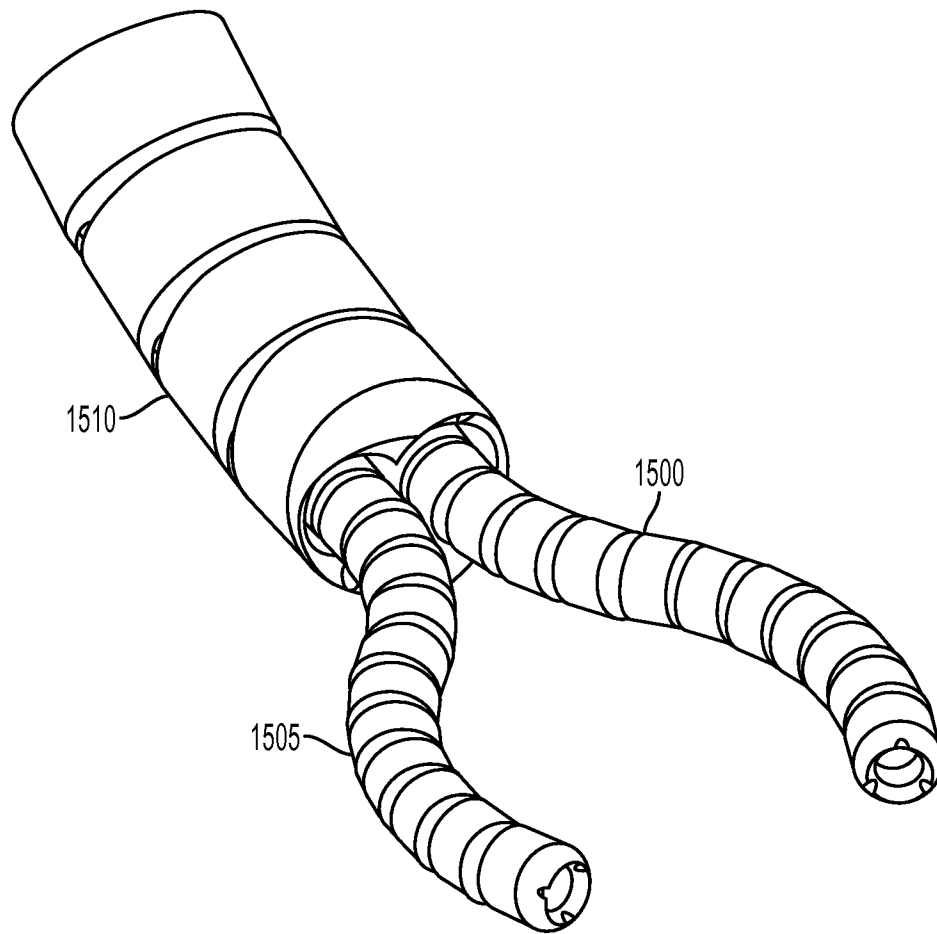


FIG. 10

11/13

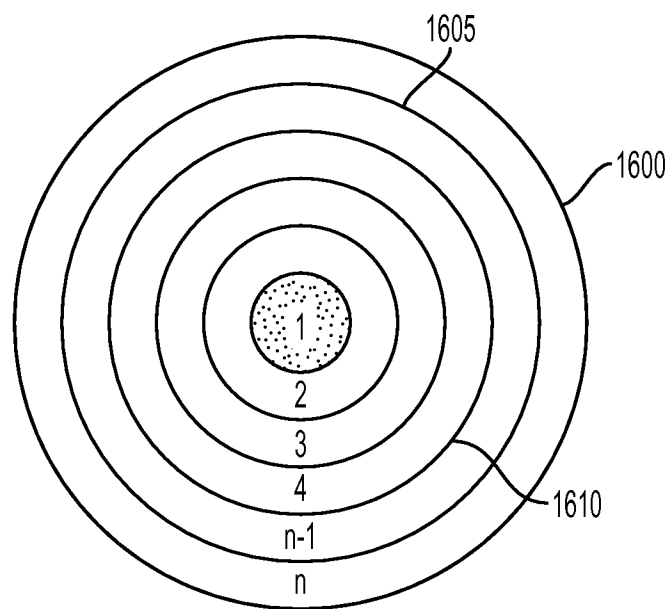


FIG. 11

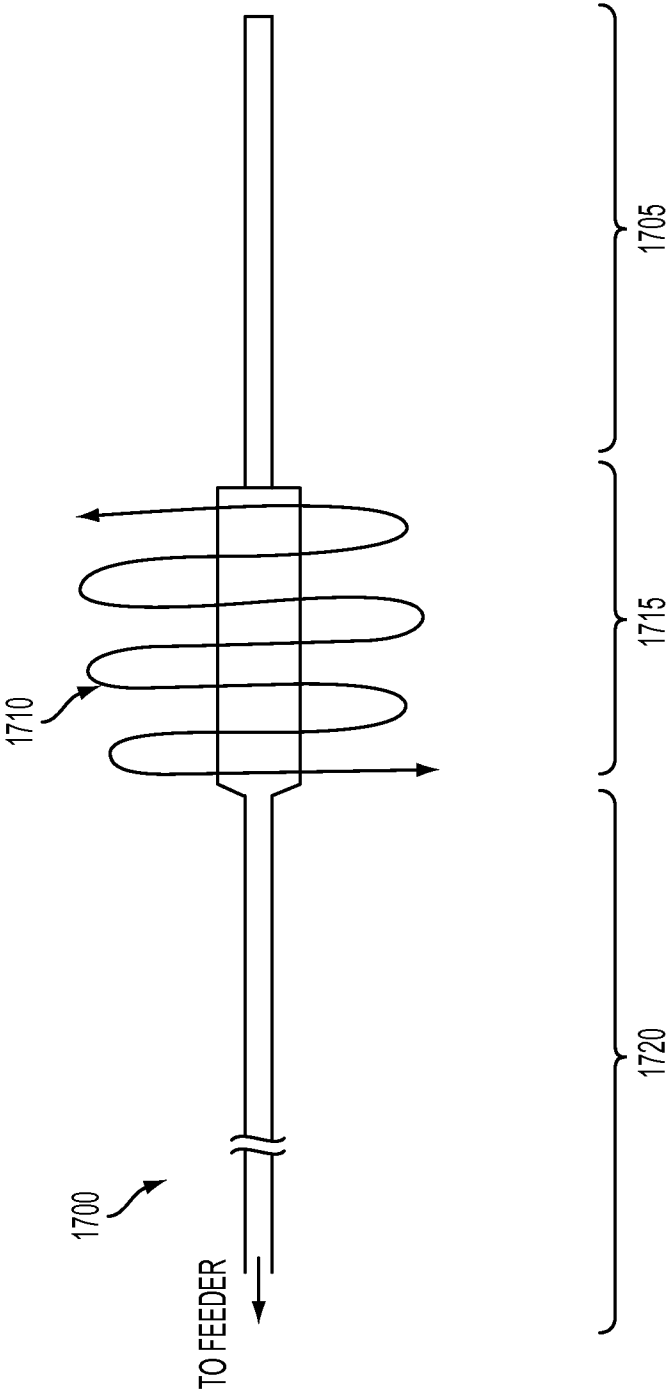


FIG. 12

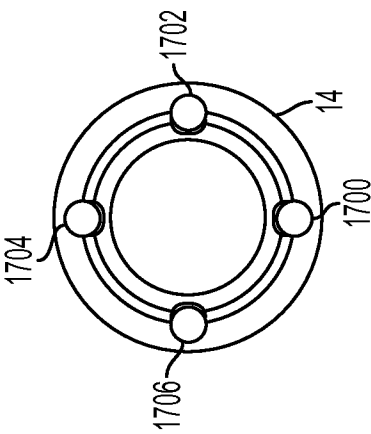


FIG. 13A

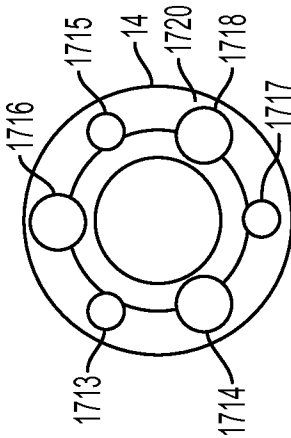


FIG. 13B

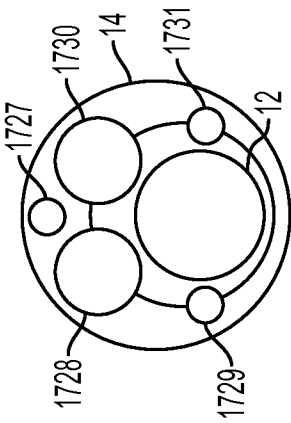


FIG. 13C

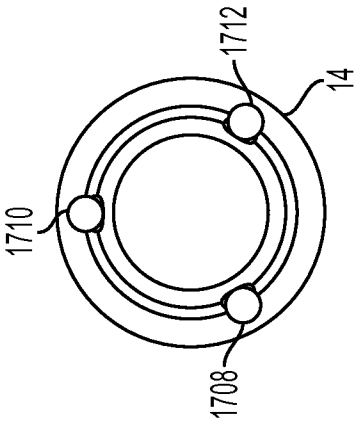


FIG. 13D

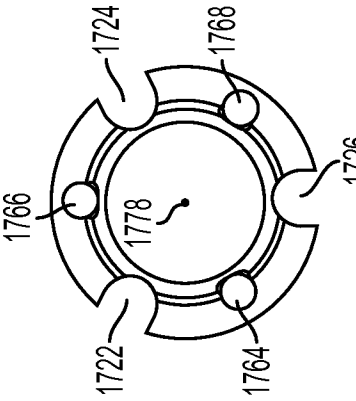


FIG. 13E

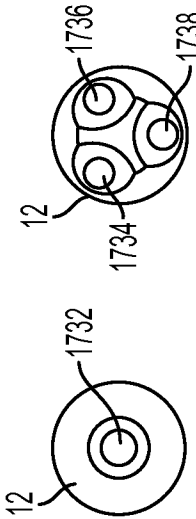


FIG. 13F

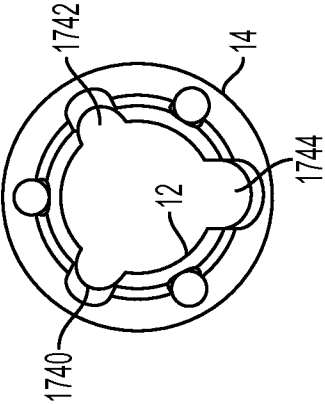


FIG. 13G




FIG. 13H




FIG. 13I

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2009/046508

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61B 1/00 (2009.01)

USPC - 600/141

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - A61B 1/00, 1/005, 1/008, 1/01, 1/018 (2009.01)

USPC - 74/469, 471R; 403/109.1, 361; 600/141, 142

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 2004/0138525 A1 (SAADAT et al) 15 July 2004 (15.07.2004) entire document	1-6, 8-17, 21, 23-31, 34, 45
Y	US 2008/0039690 A1 (ZUBIATE et al) 14 February 2008 (14.02.2008) entire document	7, 18-20, 22, 32, 33, 35-44
Y	US 4,726,355 A (OKADA) 23 February 1988 (23.02.1988) entire document	7, 18-20, 22, 32, 33, 35, 36, 38-44
		37

☐ Further documents are listed in the continuation of Box C.



* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 July 2009

Date of mailing of the international search report

28 JUL 2009

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774