



US00RE45995E

(19) **United States**
(12) **Reissued Patent**
Kim

(10) **Patent Number:** **US RE45,995 E**
(45) **Date of Reissued Patent:** **May 3, 2016**

(54) **MOBILE ELECTRONIC DEVICE HAVING
CONTENT TRANSMISSION INTERFACE**

H04N 21/43632 (2013.01); *H04N 5/38*
(2013.01); *H04N 5/63* (2013.01); *H04N 5/765*
(2013.01)

(71) Applicant: **Samsung Electronics Co., Ltd.**,
Suwon-Si, Gyeonggi-Do (KR)

(58) **Field of Classification Search**
USPC 713/300, 310, 320, 323, 324; 710/8, 13,
710/20, 21

(72) Inventor: **Chong-Sok Kim**, Seongnam-si (KR)

See application file for complete search history.

(73) Assignee: **SAMSUNG ELECTRONICS CO.,
LTD.**, Gyeonggi-Do (KR)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(21) Appl. No.: **14/197,789**

2002/0080091 A1* 6/2002 Acharya et al. 345/2.1
2005/0149651 A1* 7/2005 Doak et al. 710/52
2006/0109240 A1* 5/2006 Fu et al. 345/156
2006/0253707 A1* 11/2006 Lapstun et al. 713/176

(22) Filed: **Mar. 5, 2014**

(Continued)

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **8,539,258**
Issued: **Sep. 17, 2013**
Appl. No.: **12/662,570**
Filed: **Apr. 23, 2010**

FOREIGN PATENT DOCUMENTS

JP 2006-080816 3/2006
JP 2006-080816 A 3/2006

(Continued)

(30) **Foreign Application Priority Data**

OTHER PUBLICATIONS

Apr. 24, 2009 (KR) 10-2009-0036068

Korean Office Action dated Apr. 7, 2015 for corresponding Korean Application No. 10-2009-0036068.

(51) **Int. Cl.**

G06F 1/32 (2006.01)
G06F 1/26 (2006.01)
H04N 5/907 (2006.01)
H04N 5/44 (2011.01)
H04N 21/4363 (2011.01)
H04N 5/921 (2006.01)
H04N 21/418 (2011.01)
H04N 5/63 (2006.01)
H04N 5/765 (2006.01)
H04N 5/38 (2006.01)

Primary Examiner — Minh Dieu Nguyen

(74) *Attorney, Agent, or Firm* — Harness, Dickey & Pierce, P.L.C.


(57) **ABSTRACT**

The mobile electronic device for reproducing digital content includes a body and a content transmission interface connector. The body is configured to store and process the digital content, where the digital content includes high-quality uncompressed video data. The content transmission interface connector includes a male connector configured to be connected directly to an external display device and configured to output the digital content to the external display device.

(52) **U.S. Cl.**

CPC *H04N 5/907* (2013.01); *H04N 5/4401*
(2013.01); *H04N 5/921* (2013.01); *H04N*
21/4183 (2013.01); *H04N 21/4184* (2013.01);

29 Claims, 6 Drawing Sheets

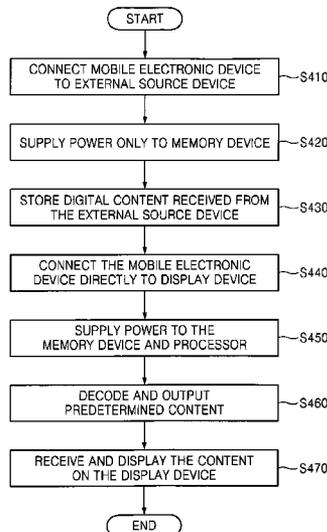

US RE45,995 E

Page 2

(56)

References Cited

FOREIGN PATENT DOCUMENTS

U.S. PATENT DOCUMENTS

2007/0171297	A1 *	7/2007	Nangoong	348/362
2008/0052439	A1	2/2008	Young et al.	
2008/0165291	A1	7/2008	Choi	
2008/0174595	A1 *	7/2008	Jatou et al.	345/418
2009/0231485	A1 *	9/2009	Steinke	348/425.1
2010/0185511	A1 *	7/2010	Nowacek	705/14.49

KR	10-2005-0080604	A	8/2005
KR	2005-0080604	A	8/2005
KR	20060111701	A	10/2006
KR	100839034	B1	6/2008
KR	10-2008-0064568	A	7/2008
KR	2008-0064568	A	7/2008

* cited by examiner

FIG. 1A

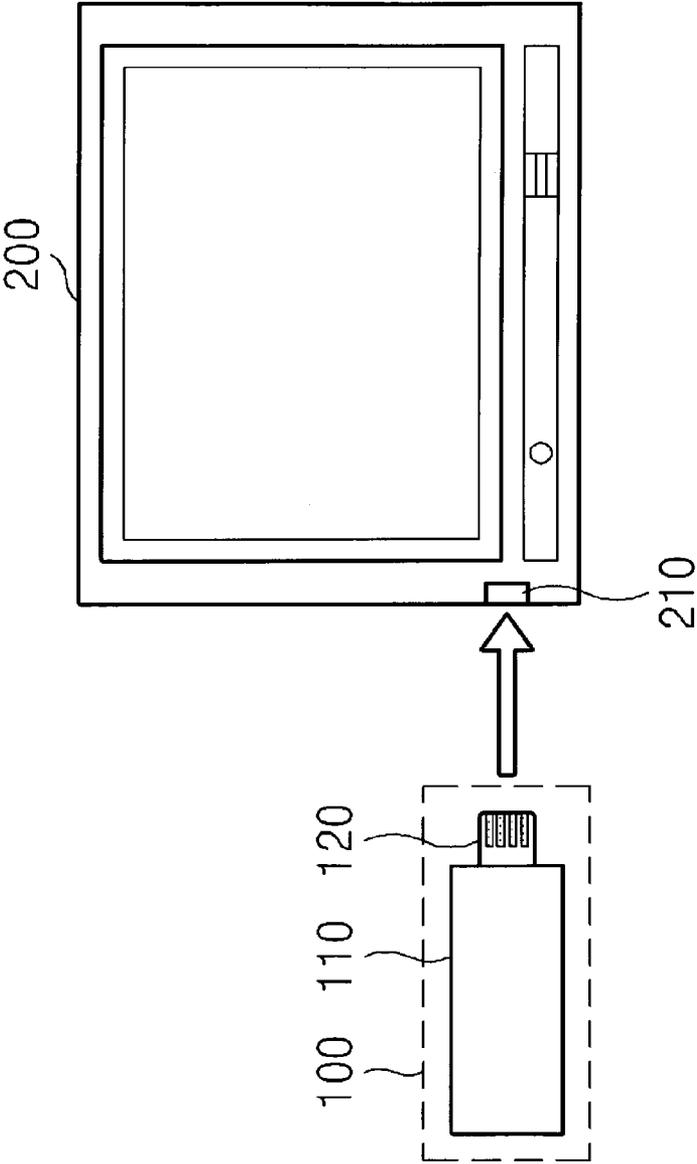


FIG. 1B

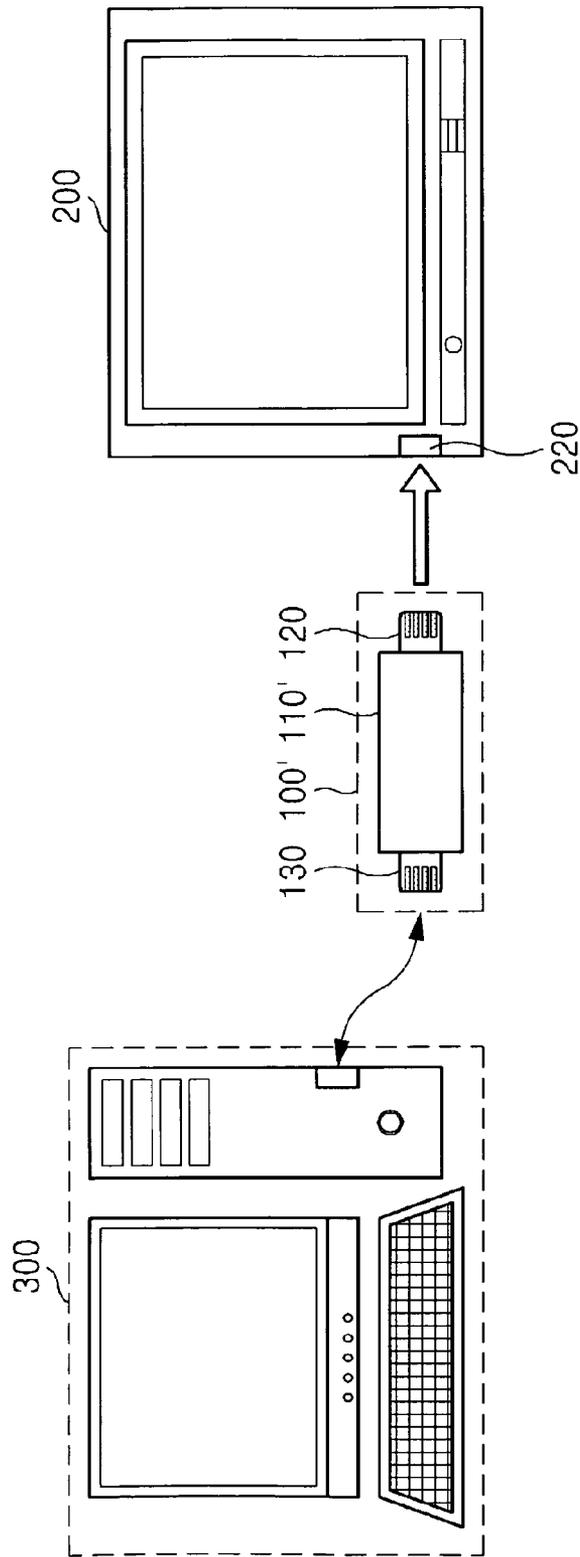


FIG. 2A

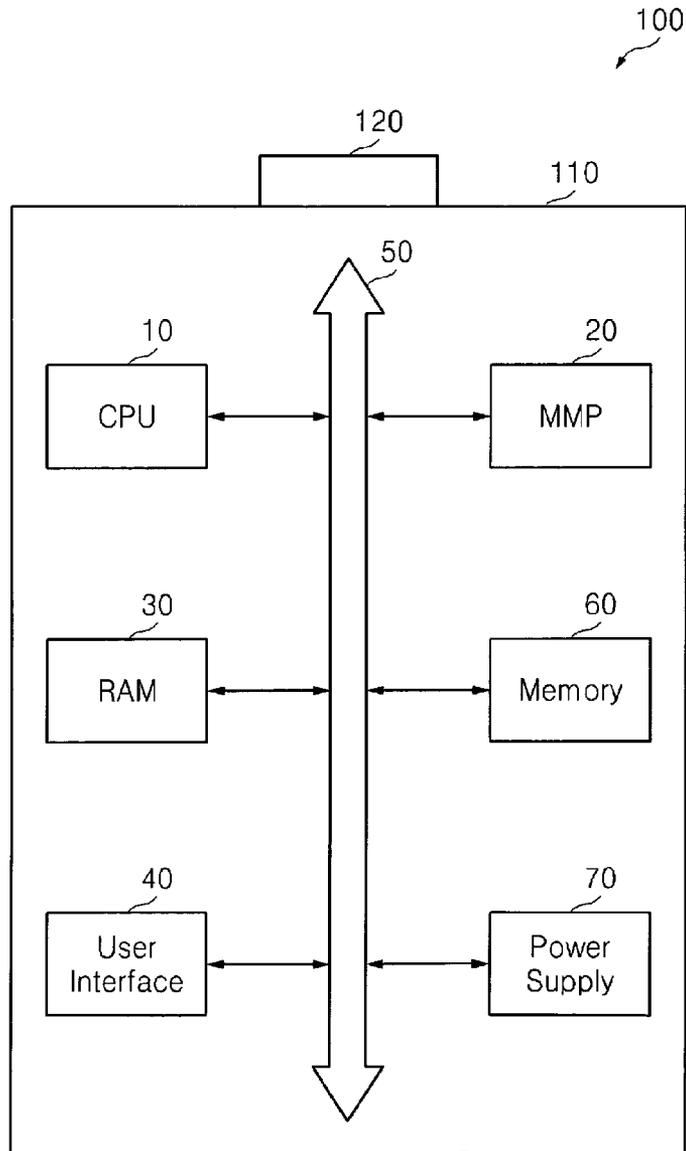


FIG. 2B

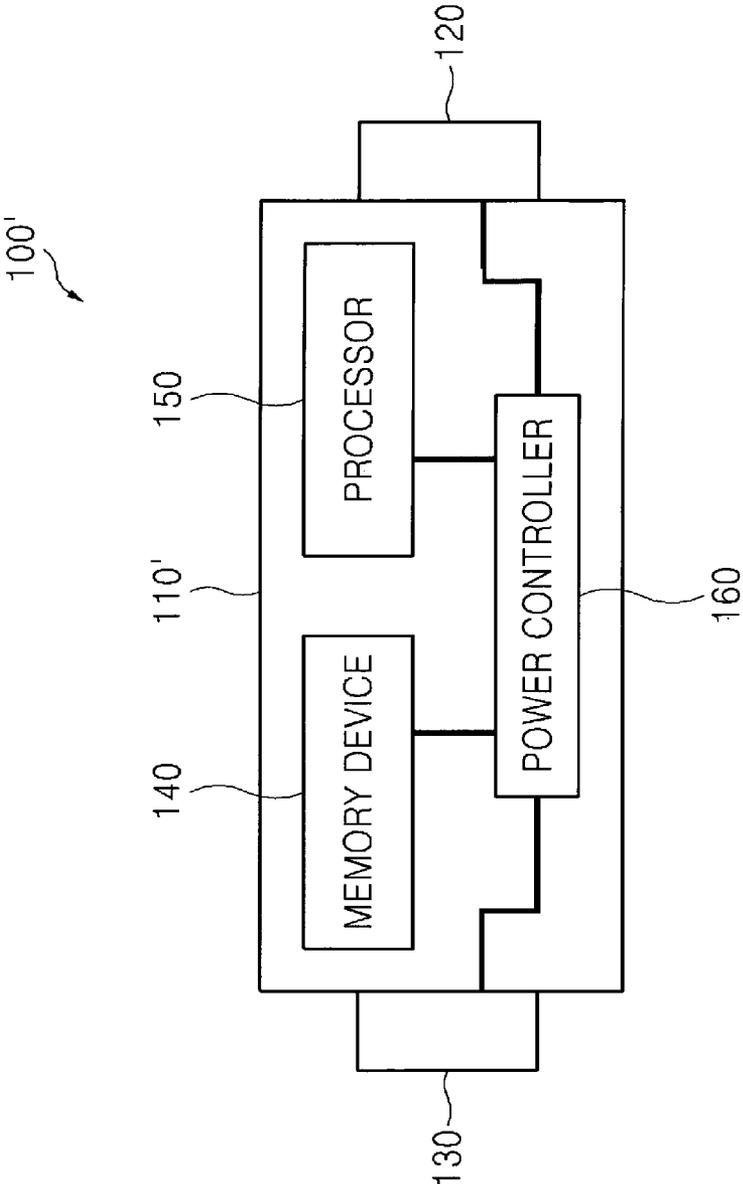


FIG. 3


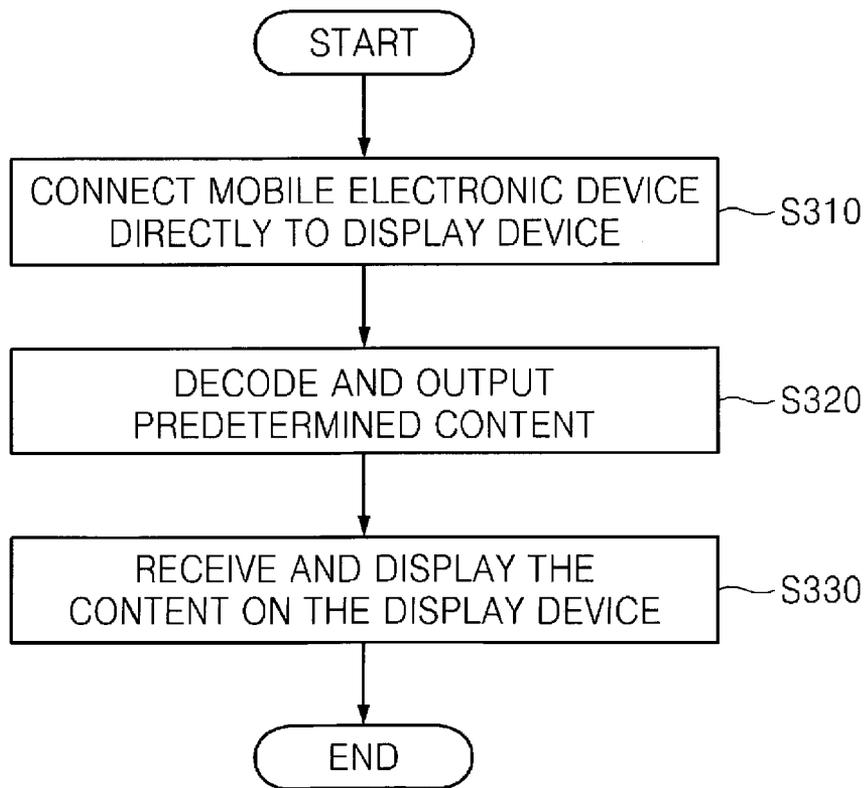


FIG. 4

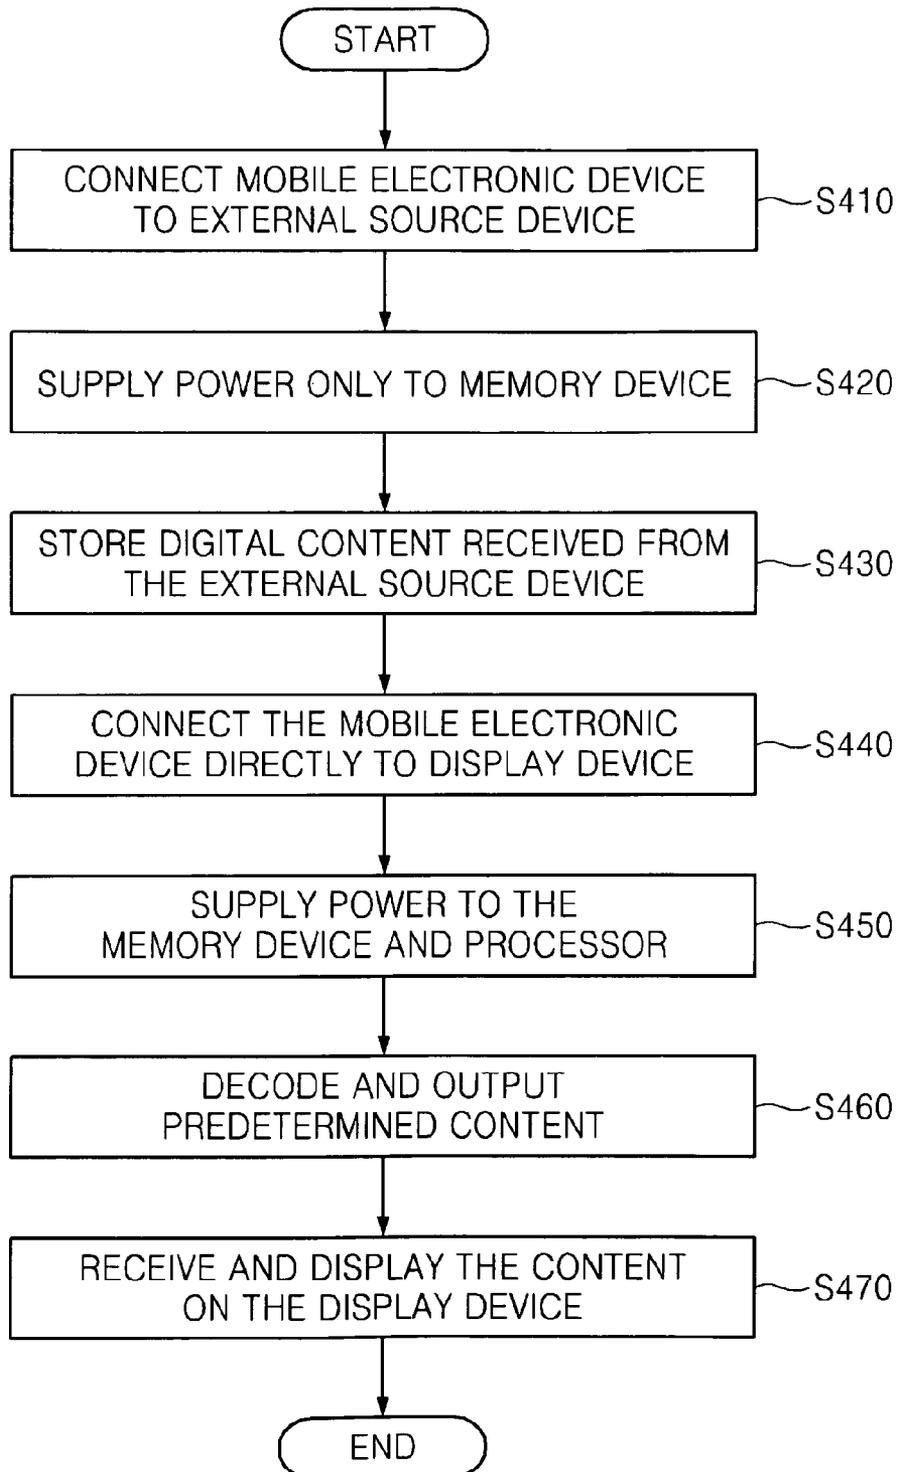

MOBILE ELECTRONIC DEVICE HAVING CONTENT TRANSMISSION INTERFACE

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

CROSS-REFERENCE TO RELATED APPLICATION(S)

This application is a reissue application for U.S. Pat. No. 8,539,258 issued on Sep. 17, 2013 on U.S. Ser. No. 12/662,570 filed Apr. 23, 2010 and claims the benefit of Korean Patent Application No. 10-2009-0036068, filed on Apr. 24, 2009, in the Korean Intellectual Property Office, the disclosure of each of which is incorporated herein in its entirety by reference.

BACKGROUND

1. Field

Example embodiments of inventive concepts relate to mobile electronic devices, for example, to a mobile electronic device having a content transmission interface that may be connected directly to an external display device.

2. Description of the Related Art

As digital multimedia content has come into widespread use, various types of mobile electronic devices, e.g., mobile phones, portable multimedia players (PMPs), MP3 players, and digital cameras, which are capable of reproducing digital multimedia content have become widely spread. However, such mobile electronic devices include relatively small-sized displays, which may inconvenience users watching content on such mobile electronic devices. Accordingly, various content transmission interface methods have been introduced in order to connect a mobile electronic device to an external display device, e.g., a monitor or a television (TV), so that a user can watch content on a relatively larger display device indoors. The HDMI (High-Definition Multimedia Interface) is a representative content transmission interface method. The HDMI is advantageous in that high-quality uncompressed data can be displayed securely on a display device based on the HDCP (High-bandwidth Digital Content Protection). However, the HDMI requires an HDMI cable in order to connect two devices to each other, thereby increasing installation costs and causing inconvenience to a user.

SUMMARY

Example embodiments of inventive concepts provide a mobile electronic device having a content transmission interface that can be connected directly to an external display device without having to use a cable.

Example embodiments of inventive concepts also provides a mobile electronic device having a content transmission interface for displaying content supplied from an external source device on an external display device while saving power consumption.

According to example embodiments of inventive concepts, a mobile electronic device for reproducing digital content includes a body and a content transmission interface connector. The body is configured to store and process the digital content, where the digital content includes high-quality

uncompressed video data. The content transmission interface connector includes a male connector configured to be connected directly to an external display device and configured to output the digital content to the external display device.

In example embodiments of inventive concepts, the content transmission interface connector is at least one of a high-definition multimedia interface (HDMI) connector, a D-sub connector, and a digital visual interface (DVI) connector, and the male connector of the content transmission interface connector is inserted directly into a corresponding port of the external display device.

In example embodiments of inventive concepts, the body includes a memory device configured to store the digital content, a processor configured to process the digital content, where processing of the digital content includes decoding and reproducing of the digital content, and a power controller configured to control supply of power to the memory device and the processor.

In example embodiments of inventive concepts, the mobile electronic device further includes a universal serial bus (USB) connector including a male connector configured to be connected to an external source device, wherein the mobile electronic device is configured to transmit data of the external source device to the external display device.

In example embodiments of inventive concepts, the power controller is configured to supply power to the memory device and configured to not supply power to the processor, when the USB connector is connected to the external source device, and the power controller is configured to supply power to both to the memory device and the processor when the content transmission interface connector is only connected to the external display device.

According to example embodiments of inventive concepts, a mobile electronic device for reproducing digital content includes a memory device, a processor, a content transmission interface connector and a central processing unit (CPU). The memory device is configured to store digital content. The processor is configured to process the digital content, where the processing of the digital content includes decoding and reproducing of the digital content. The content transmission interface connector including a male connector is configured to be connected directly to an external display device to output the digital content decoded by the processor. The central processing unit (CPU) is configured to control an overall operation of the mobile electronic device.

In example embodiments of inventive concepts, the mobile electronic device further includes a random access memory (RAM), a user interface unit configured to provide an interface between the mobile electronic device and a user, and a display unit for displaying the digital content.

According to example embodiments of inventive concepts, a mobile electronic device for reproducing digital content includes a body and a content transmission interface connector. The body is configured to store and process digital content, where the digital content includes high-quality uncompressed video data. The content transmission interface connector is configured to detachably connect to an external display device and is configured to output the digital content to the external display device without a cable, wherein the content transmission interface connector is at least one of a high-definition multimedia interface (HDMI) connector, a D-sub connector, and a digital visual interface (DVI) connector.

BRIEF DESCRIPTION OF THE DRAWINGS

Example embodiments of inventive concepts will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings in which:

FIG. 1A illustrates a manner in which a mobile electronic device having a content transmission interface is connected to a display device, according to example embodiments of inventive concepts;

FIG. 1B illustrates another manner in which a mobile electronic device having a content transmission interface is connected to a display device, according to example embodiments of inventive concepts;

FIG. 2A is a block diagram schematically illustrating an internal structure of a mobile electronic device having a content transmission interface, according to example embodiments of inventive concepts;

FIG. 2B is another block diagram schematically illustrating an internal structure of a mobile electronic device having a content transmission interface, according to example embodiments of inventive concepts;

FIG. 3 is a flowchart illustrating a method of operating the mobile electronic device of FIG. 2A, according to example embodiments of inventive concepts; and

FIG. 4 is a flowchart illustrating a method of operating the mobile electronic device of FIG. 2B, according to example embodiments of inventive concepts.

DETAILED DESCRIPTION

Example embodiments of inventive concepts may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. In the drawings, the size and relative sizes of layers and regions may be exaggerated for clarity. Like numbers refer to like elements throughout.

It will be understood that when an element is referred to as being “connected” or “coupled” to another element, it can be directly connected or coupled to the other element or intervening elements may be present. In contrast, when an element is referred to as being “directly connected” or “directly coupled” to another element, there are no intervening elements present. As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items and may be abbreviated as “/”.

It will be understood that, although the terms first, second, etc. may be used herein to describe various elements, these elements should not be limited by these terms. These terms are only used to distinguish one element from another. For example, a first signal could be termed a second signal, and, similarly, a second signal could be termed a first signal without departing from the teachings of the disclosure.

Spatially relative terms, such as “beneath,” “below,” “lower,” “above,” “upper,” and the like may be used herein for ease of description to describe the relationship of one component and/or feature to another component and/or feature, or other component(s) and/or feature(s), as illustrated in the drawings. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. The figures are intended to depict example embodiments and should not be interpreted to limit the intended scope of the claims. The accompanying figures are not to be considered as drawn to scale unless explicitly noted.

The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms “a,” “an” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms “comprises” and/or “comprising,” or “includes” and/or “including” when used in this

specification, specify the presence of stated features, regions, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, regions, integers, steps, operations, elements, components, and/or groups thereof.

Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and/or the present application, and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

FIG. 1A illustrates a manner in which a mobile electronic device **100** having a content transmission interface is connected to a display device **200** according to example embodiments of inventive concepts. FIG. 1B illustrates another manner in which a mobile electronic device **100'** having a content transmission interface is connected to a display device **200** according to example embodiments of inventive concepts.

Referring to FIG. 1A, the mobile electronic device **100** and the display device **200** may be connected directly to each other without an HDMI (High-Definition Multimedia Interface) cable. The mobile electronic device **100** includes a body **110** and an HDMI connector **120**. The HDMI connector **120** is a male connector. If the HDMI connector **120** that is a male connector is inserted directly into an HDMI port **210** that is a female port of the display device **200**, then the mobile electronic device **100** and the display device **200** are connected to each other. The HDMI connector **120** may be installed inside the body **110** in such a manner that the HDMI connector **120** may slide out of the body **110** or may be firmly attached to one end of the body **110**.

Referring to FIG. 1B, the mobile electronic device **100'** may include not only an HDMI connector **120** which is a male connector but also a universal serial bus (USB) connector **130** which is also a male connector. For example, the USB connector **130** and the HDMI connector **120** are respectively disposed at both ends of a body **110'** to be opposite to each other. Thus, the display device **200** may be connected to an external source device **300** having a USB interface, e.g., a computer, via the USB connector **130** and the HDMI connector **120** in order to receive content from the external source device **300**. The USB connector **130** may be installed inside the body **110'** in such a manner that the USB connector **130** may slide out of the body **110'** or may be firmly attached to one end of the body **110'**. The USB connector **130** may be connected directly to the external source device **300** or may be connected to the external source device **300** via a USB cable (not shown).

Although FIG. 1B illustrates that the HDMI connector **120** and the USB connector **130** are disposed at both ends of the body **110'**, respectively, example embodiments of inventive concepts are not limited thereto and the locations of the HDMI connector **120** and the USB connector **130** may vary according to the type or structure of the mobile electronic device **100'** or according to convenience of a user.

The mobile electronic device **100** or **100'** may be a device that can store and reproduce digital content, e.g., a mobile phone, a portable multimedia player (PMP), an MP3 player, a digital camera, or a personal digital assistant (PDA). Other various elements may further be included in the mobile electronic device **100** or **100'** according to the type of the mobile electronic device **100** or **100'**. For example, if the mobile electronic device **100** or **100'** is a mobile phone, then the

5

mobile electronic device **100** or **100'** may further include an antenna, a transmitting/receiving processing unit, a controller, an input unit, a display unit, and a universal subscriber identity module (USIM) card. Alternatively, if the mobile electronic device **100** or **100'** is a digital camera, then the mobile electronic device **100** or **100'** may further include a camera module, a lens, and a flash. However, example embodiments of inventive concepts are not limited by the above description and the mobile electronic device **100** or **100'** may be embodied as various devices and other various elements may further be included therein.

FIG. 2A is a block diagram schematically illustrating an internal structure of a mobile electronic device **100** according to an example embodiments of inventive concepts. Referring to FIG. 2A, the mobile electronic device **100** includes an HDMI connector **120**, a central processing unit (CPU) **10**, a multi-media processor (MMP) **20**, a random access memory (RAM) **30**, a user interface **40**, a memory device **60**, a power supply unit **70**, and a system bus **50** via which these elements are connected electrically to one another.

The CPU **10** controls an overall operation of the mobile electronic device **100**. The RAM **30** stores information needed to operate the mobile electronic device **100**, e.g., operating system (OS) information, an application program, and cache data.

The memory device **60** stores data that includes digital content, such as audio/video content. The memory device **60** may be a flash memory device but is not limited thereto. Although not shown in the drawings, the memory device **60** may include a memory unit and a memory controller that controls data to be written to or to be read from the memory unit.

For example, the MMP **20** unzips, decodes, and reproduces the digital content.

The user interface **40** provides an interface between the mobile electronic device **100** and a user. The power supply unit **70** supplies power to the internal constitutional elements of the mobile electronic device **100**, e.g., the CPU **10**, the MMP **20**, the RAM **30**, the user interface **40**, and the memory device **60**. The power supply unit **70** may receive power from a battery (not shown) and supply the power to the internal constitutional elements.

The HDMI connector **120** may be a male connector and may be connected directly to the HDMI port **210** of the external display device **200** of FIG. 1A.

The mobile electronic device **100** may further include other devices, such as a display unit (not shown). Also, as described above, various other elements may further be included in the mobile electronic device **100** according to the type of the mobile electronic device **100**.

FIG. 2B is another block diagram schematically illustrating an internal structure of a mobile electronic device **100'** according to example embodiments of inventive concepts. The mobile electronic device **100'** may be a multimedia drive. For example, the mobile electronic device **100'** may not only act as a data storage device, such as a USB memory, but also reproduce and display content stored therein on an external display device (not shown).

To this end, the mobile electronic device **100'** may include an HDMI connector **120**, a USB connector **130**, a memory device **140**, a processor **150**, and a power controller **160**.

Similar to the memory device **60** illustrated in FIG. 2A, the memory device **140** may store data that includes digital content, such as audio/video content. As described above, the memory device **140** may be a flash memory device but is not limited thereto.

6

The HDMI connector **120** may be a male connector and may be connected directly to the HDMI port **220** of the external display device **200** of FIG. 1B. The USB connector **130** may also be a male connector and may be connected to the external source device **300** of FIG. 1B.

The processor **150** unzips, decodes, and reproduces the digital content. The processor **150** may be the multi-media processor (MMP).

The power controller **160** controls supply of power to the memory device **140** and the processor **150**. If the USB connector **130** is connected to an external source device, e.g., a computer, then the power controller **160** supplies power only to the memory device **140** and does not supply power to the processor **150**. If the HDMI connector **120** is connected to an external display device, e.g., a plasma display panel (PDP) television, then the power controller **160** supplies power to both the memory device **140** and the processor **150**.

The power controller **160** may, for example, receive power via a power line, e.g., a 5V power line, of the HDMI connector **120** or the USB connector **130** and supply the power to the memory device **140** and the processor **150**.

FIG. 3 is a flowchart illustrating a method of operating the mobile electronic device **100** of FIG. 2A, according to example embodiments of inventive concepts. FIG. 4 is a flowchart illustrating a method of operating the mobile electronic device **100'** of FIG. 2B, according to example embodiments of inventive concepts.

Referring to FIGS. 1A, 2A, and 3, if the mobile electronic device **100** is connected directly to the display device **200** via the HDMI connector **120** at step S310, then the MMP **20** decodes and outputs predetermined content from among content stored in the memory device **60** at step S320. Next, the display device **200** receives and displays the output content at step S330.

Referring to FIGS. 1B, 2B, and 4, if the mobile electronic device **100'** is connected to the external source device **300** via the USB connector **130** at step S410, then the power controller **160** supplies power only to the memory device **140** and does not supply power to the processor **150** at step S420. Next, the memory device **140** receives digital content from the external source device **300** via the USB connector **130** and then stores the digital content at step S430.

Next, if the mobile electronic device **100'** is connected to the display device **200** via the HDMI connector **120** at step S440, then the power controller **160** supplies power to both the memory device **140** and the processor **150** at step S450. Next, the processor **150** decodes and output predetermined content from among the content stored in the memory device **140** at step S460.

Thereafter, the display device **200** receives the content from the processor **150** and displays the content at step S470.

Example embodiments of inventive concepts are not limited by the HDMI standards. For example, the mobile electronic device **100** or **100'** may include a D-sub connector or a digital visual interface (DVI) connector that is a male connector to be connected directly to an external display device according to the type or characteristics of the mobile electronic device **100** or **100'**.

Example embodiments of inventive concepts may be embodied in hardware, software, firmware or combination thereof.

While inventive concepts have been particularly shown and described with reference to example embodiments thereof, it will be understood that various changes in form and details may be made therein without departing from the spirit and scope of the following claims.

What is claimed is:

1. A mobile electronic device for reproducing digital content, the mobile electronic device comprising:
 - a body configured to store and process the digital content, the digital content including high-quality uncompressed video data, and the body including,
 - memory device,
 - a processor, and
 - a power controller configured to selectively control supply of power to the memory device and the processor;
 - a content transmission interface connector including a first male connector configured to be connected directly to an external display device and configured to output the digital content to the external display device; and
 - a universal serial bus (USB) connector including a second male connector configured to be connected to an external source device, wherein,
 - the mobile electronic device is configured to transmit data of the external source device to the external display device,
 - the content transmission interface connector is at least one of a high-definition multimedia interface (HDMI) connector, a D-sub connector, and a digital visual interface (DVI) connector,
 - the first male connector is configured to be inserted directly into a corresponding port of the external display device,
 - the memory device is configured to store the digital content,
 - the processor is configured to process the digital content, where processing of the digital content includes decoding and reproducing of the digital content, and
 - the power controller is configured to supply power to the memory device and configured to not supply power to the processor if the USB connector is connected to the external source device, and the power controller is configured to supply power to both [to] the memory device and the processor if the mobile electronic device is connected to only the external display device.
2. The mobile electronic device of claim 1, wherein the content transmission interface connector is the high-definition multimedia interface (HDMI) connector.
3. A mobile electronic device for reproducing digital content, the mobile electronic device comprising:
 - a memory device configured to store the digital content;
 - a processor configured to process the digital content, the processing of the digital content including decoding and reproducing of the digital content;
 - a content transmission interface connector including a first male connector configured to be connected directly to an external display device to output the digital content decoded by the processor;
 - a power controller configured to selectively control supply of power to the memory device and the processor;
 - a central processing unit (CPU) configured to control an overall operation of the mobile electronic device; and
 - a universal serial bus (USB) connector including a second male connector configured to be connected to an external source device to receive the digital content, wherein
 - the mobile electronic device is configured to transmit data of the external source device to the external display device,
 - the power controller is configured to supply power to the memory device and configured to not supply power to the processor if the USB connector is connected to the external source device, and the power controller is

configured to supply power to both [to] the memory device and the processor if the mobile electronic device is connected to only the external display device.

4. The mobile electronic device of claim 3, further comprising:
 - a random access memory (RAM);
 - a user interface unit configured to provide an interface between the mobile electronic device and a user; and
 - a display unit for displaying the digital content.
5. The mobile electronic device of claim 3, wherein,
 - the content transmission interface connector is at least one of a high-definition multimedia interface (HDMI) connector, a D-sub connector, and a digital visual interface (DVI) connector, and
 - the first male connector is configured to be inserted directly into a corresponding port of the external display device.
6. A mobile electronic device for reproducing digital content, the mobile electronic device comprising:
 - a body configured to store and process the digital content, the digital content including high-quality uncompressed video data, and the body including,
 - a memory device,
 - a processor, and
 - a power controller configured to selectively control supply of power to the memory device and the processor;
 - a content transmission interface connector configured to detachably connect to an external display device and configured to output the digital content to the external display device without a cable, the content transmission interface connector being at least one of a high-definition multimedia interface (HDMI) connector, a D-sub connector, and a digital visual interface (DVI) connector; and
 - a universal serial bus (USB) connector including a first male connector configured to be connected to an external source device, wherein,
 - the mobile electronic device is configured to transmit data of the external source device to the external display device,
 - the content transmission interface connector includes a second male connector configured to be inserted directly into a corresponding port of the external display device,
 - the memory device is configured to store the digital content,
 - the processor is configured to process the digital content, processing of the digital content including decoding and reproducing of the digital content, and
 - the power controller is configured to supply power to the memory device and configured to not supply power to the processor if the USB connector is connected to the external source device, and the power controller is configured to supply power to both [to] the memory device and the processor if the mobile electronic device is only connected to the external display device.
7. A mobile electronic device comprising:
 - a high definition multimedia interface connector configured to be connected to an external display device;
 - a universal serial bus connector configured to be connected to an external source device;
 - a power controller configured to supply power to the mobile electronic device, the power controller being configured to receive the power from a battery or to receive the power via a power line of the high definition

multimedia interface connector or via a power line of the universal serial bus connector;
 a controller configured to control an overall operation of the mobile electronic device;
 a multimedia processor configured to unzip, decode and reproduce contents;
 a random access memory configured to store information to operate the mobile electronic device;
 a user interface configured to provide an interface between the mobile electronic device and a user; and
 a memory device configured to store data including the contents,
 wherein if the universal serial bus connector is connected to the external source device, the power controller does not supply the power to the controller while supplying power to the memory device, and if the high definition multimedia interface connector is connected to only the external display device, the power controller supplies the power to the controller and the memory device.

8. A mobile electronic device comprising:
 a high definition multimedia interface connector configured to be connected to a display device;
 a universal serial bus connector configured to be connected to a source device;
 a power controller configured to supply power to the mobile electronic device, the power controller being configured to receive the power from a battery or to receive the power via a power line of the high definition multimedia interface connector or via a power line of the universal serial bus connector;
 a controller configured to control an overall operation of the mobile electronic device;
 a multimedia processor configured to unzip, decode and reproduce contents;
 a random access memory configured to store information to operate the mobile electronic device;
 a user interface configured to provide an interface between the mobile electronic device and a user; and
 a memory device configured to store data including the contents, wherein if the universal serial bus connector is connected to the source device, the power controller supplies the power only to the memory device and does not supply the power to the controller.

9. The mobile electronic device of claim 8, wherein the high definition multimedia interface connector is configured to be directly connected to the display device without a high definition multimedia interface cable.

10. The mobile electronic device of claim 8, wherein the universal serial bus connector is configured to be either directly connected to the source device without a universal serial bus cable or connected to the source device via the universal serial bus cable.

11. The mobile electronic device of claim 8, wherein each of the high definition multimedia interface connector and the universal serial bus connector is a male connector.

12. The mobile electronic device of claim 8, further comprising a display unit configured to display the contents.

13. The mobile electronic device of claim 8, wherein the memory device is a flash memory device.

14. The mobile electronic device of claim 8, wherein if the high definition multimedia interface connector is connected to the display device, the power controller supplies the power to both the memory device and the controller.

15. The mobile electronic device of claim 8, wherein if the high definition multimedia interface connector is connected to the display device, the power controller supplies the power to the controller.

16. The mobile electronic device of claim 8, wherein the contents include video data and audio data.

17. The mobile electronic device of claim 8, wherein the contents are digital contents.

18. The mobile electronic device of claim 8, wherein the display device is an external display device, and the source device is an external source device.

19. A mobile electronic device comprising:
 a high definition multimedia interface (HDMI) connector configured to be connected to a display device;
 a universal serial bus (USB) connector configured to be connected to a source device;
 a controller;
 a memory device; and
 a power controller configured to receive power from a battery or to receive the power via a power line of the high definition multimedia interface connector or via a power line of the universal serial bus connector,
 wherein the power controller is configured to selectively supply the power to the memory device and the controller such that the power controller is configured to supply power to the memory device and configured to not supply power to the controller if the USB connector is connected to the source device, and the power controller is configured to supply power to both the memory device and the controller if the mobile electronic device is connected to only the display device.

20. The mobile electronic device of claim 19, further comprising an antenna, a transmitting/receiving processing unit, an input unit, a display unit and a universal subscriber identity module card.

21. The mobile electronic device of claim 19, further comprising a camera module, a lens and a flash.

22. The mobile electronic device of claim 19, further comprising an antenna, a transmitting/receiving processing unit, an input unit, a display unit, a universal subscriber identity module card, a camera module, a lens and a flash.

23. A mobile electronic device comprising:
 an output interface connector configured to be connected to a first external device;
 an input interface connector configured to be connected to a second external device;
 a power controller configured to receive power from a battery or to receive the power via a power line of the output interface connector or via a power line of the input interface connector;
 a memory device; and
 a controller configured to control an overall operation of the mobile electronic device,
 wherein the power controller is configured to selectively supply the power to the memory device and the controller such that the power controller is configured to supply power to the memory device and configured to not supply power to the controller if the input interface connector is connected to the second external device, and the power controller is configured to supply power to both the memory device and the controller if the mobile electronic device is connected to only the first external device.

24. A mobile electronic device comprising:
 an output interface connector configured to be connected to a first device;
 an input interface connector configured to be connected to a second device;
 a controller configured to control an overall operation of the mobile electronic device;
 a memory device configured to store contents; and

11

a power controller configured to receive power from a battery or to receive the power via the first device or via the second device, wherein the power controller is configured to supply power to the memory device and configured to not supply power to the controller if the input interface connector is connected to the second device, and the power controller is configured to supply power to both the memory device and the controller if the mobile electronic device is connected to only the first device.

25. The mobile electronic device of claim 24, wherein the output interface connector is a high definition multimedia interface connector, a D-sub connector or a digital visual interface connector.

26. A method of operating a mobile electronic device comprising:

connecting, via a data transfer interface, the mobile electronic device to a first device;

supplying power to a memory device of the mobile electronic device and not to a controller of the mobile electronic device while the mobile electronic device is connected to the first device;

receiving contents from the first device through the data transfer interface;

storing the received contents into the memory device;

connecting, via a digital audio/video interface, the mobile electronic device to a second device;

supplying the power to the memory device and the controller while the mobile electronic device is connected to only the second device; and

outputting the stored contents to the second device through the digital audio/video interface.

12

27. A system for displaying contents comprising:
a display device configured to display contents;
a source device configured to supply the contents; and
a mobile electronic device including:

a high definition multimedia interface connector configured to be connected to the display device;

a universal serial bus connector configured to be connected to the source device;

a memory device configured to store contents; and

a power controller configured to receive power from a battery, to receive power via a power line of the high definition multimedia interface connector, or to receive power via a power line of the universal serial bus connector;

wherein if the universal serial bus connector is connected to the source device, the power controller supplies the power to the memory device and does not supply the power to the controller, and

if the high definition multimedia interface connector is connected to only the display device, the power controller supplies the power to the controller and the memory device.

28. The system of claim 27, wherein the each of the high definition multimedia interface connector and the universal serial bus connector is a male connector,

the display device includes a female port to which the high definition multimedia interface connector is inserted, and

the source device includes a female port to which the universal serial bus connector is inserted.

29. The system of claim 27, wherein the universal serial bus connector is indirectly connected to the source device.

* * * * *