PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : B65D 39/06, 47/06

A1

(11) International Publication Number: WO 94/19253

(43) International Publication Date: 1 September 1994 (01.09.94)

(21) International Application Number: PCT/DK94/00065

(22) International Filing Date: 17 February 1994 (17.02.94)

(30) Priority Data:

9300110	18 February 1993 (18.02.93)	DK
1082/93	27 September 1993 (27.09.93)	DK

(71)(72) Applicants and Inventors: ROEDHUS, Joergen [DK/DK]; Giliamshavevej 2, DK-9330 Dronninglund (DK). PETERSEN, Erik, Schelde [DK/DK]; Hedegaardsvej 29, Biersted, DK-9440 Aabybro (DK).


(74) Agent: LEHMANN & REE A/S; Grundtvigsvej 37, DK-1864 Frederiksberg C (DK).

(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, LV, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.
In English translation (filed in Danish).

(54) Title: SECURITY AND POURING STOPPER

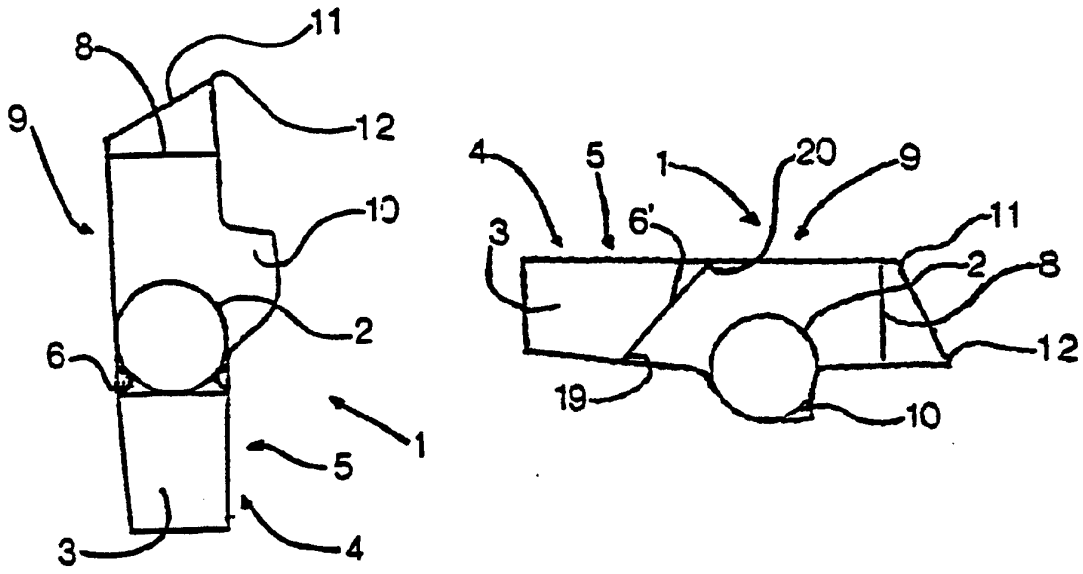

(57) Abstract

A security and pouring stopper is provided with a tubular channel (3) in which a ball (2) is situated which is able to move between two valve seats (6, 8). Next to the tubular channel (3) a radially outward chamber (10) is formed which is able to contain the ball (2) during ordinary pouring. The ball (2) has a diameter which is slightly less than the diameter of the tubular channel (3). If the bottle is overturned, the ball will be thrown or pressed through the tubular channel (3) to rest against the valve seat (8) situated at the outlet of the stopper. Here the ball will be stuck in friction or in a squeeze. When the stopper is subsequently to be made ready, the ball (2) is pressed free manually and then will place itself in position against the valve seat (6) next to the container (7) on which the stopper is mounted. The stopper will then be ready for use.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	**GB**	United Kingdom	**MR**	Mauritania
AU	Australia	**GE**	Georgia	**MW**	Malawi
BB	Barbados	**GN**	Guinea	**NE**	Niger
BE	Belgium	**GR**	Greece	**NL**	Netherlands
BF	Burkina Faso	**HU**	Hungary	**NO**	Norway
BG	Bulgaria	**IE**	Ireland	**NZ**	New Zealand
BJ	Benin	**IT**	Italy	**PL**	Poland
BR	Brazil	**JP**	Japan	**PT**	Portugal
BY	Belarus	**KE**	Kenya	**RO**	Romania
CA	Canada	**KG**	Kyrgystan	**RU**	Russian Federation
CF	Central African Republic	**KP**	Democratic People's Republic of Korea	**SD**	Sudan
CG	Congo			**SE**	Sweden
CH	Switzerland	**KR**	Republic of Korea	**SI**	Slovenia
CI	Côte d'Ivoire	**KZ**	Kazakhstan	**SK**	Slovakia
CM	Cameroon	**LI**	Liechtenstein	**SN**	Senegal
CN	China	**LK**	Sri Lanka	**TD**	Chad
CS	Czechoslovakia	**LU**	Luxembourg	**TG**	Togo
CZ	Czech Republic	**LV**	Latvia	**TJ**	Tajikistan
DE	Germany	**MC**	Monaco	**TT**	Trinidad and Tobago
DK	Denmark	**MD**	Republic of Moldova	**UA**	Ukraine
ES	Spain	**MG**	Madagascar	**US**	United States of America
FI	Finland	**ML**	Mali	**UZ**	Uzbekistan
FR	France	**MN**	Mongolia	**VN**	Viet Nam
GA	Gabon				

SECURITY AND POURING STOPPER

BACKGROUND OF THE INVENTION

The present invention relates to a security and pouring stopper comprising a tubular channel which contains a ball and which has a radially outward chamber in which the ball may be partly contained, said ball being retained in the channel.

Different types of pouring stoppers designed for bottles are known which make it possible to close off the contents of the bottle when not pouring. Such pouring stoppers may be opened and closed manually by means of lids or the like.

An example of a pouring stopper is known from U.S. patent No. 3,152,712. The pouring stopper known from that patent is able - when the bottle is in a normal upright position - to close the outlet and thus hinder evaporation etc. In an ordinary pouring situation, the ball is able to position itself in a circumferential and radially outwardly arranged chamber. In this manner liquid may run through the chamber past the ball. The stopper disclosed makes it possible to close the outlet if the bottle is placed upside down. However, the stopper will not function as a security stopper hindering liquid discharge if a bottle is overturned.

Another example of a stopper of the type mentioned in the introduction is known from European patent application No. 264,181. According to this application the stopper consists of a ball positioned in a recess in a bottle neck. The ball may be pressed in tightening contact in the bottle neck and thus ensure that a high pressure is maintained in the bottle. When the bottle is to be emptied of its contents, a manual pressure is conveyed to the ball which is consequently pressed down into the bottle neck which is provided with a circumferential and radially outwardly arranged chamber in which the ball is received while the content of the bottle is being poured out. Also this construction gives no security against unintended discharge if the bottle is overturned.

It is the object of the present invention to provide a security and pouring stopper which

will allow easy and effortless pouring when a container, preferably a bottle, is to be emptied of its content in an ordinary way and which will at the same time block any discharge when the container is overturned unintendedly.

According to the present invention this is achieved with a stopper of the type mentioned in the introduction which is characterized in that the inside of the tubular channel has a circular cross section with a diameter which is only slightly larger than the diameter of the ball, and that the ball is retained in the tubular channel by means of a valve seat in either end of the channel, of which at least the valve seat at the outlet of the channel is annular, and that the radial chamber has a size which is substantially equivalent to the half of the ball size, and that the chamber is positioned immediately above the ball when, in a resting position in use, it will in contact against the valve seat situated next to the container on which the stopper is mounted.

As the radial chamber is not a circumferentially extending annular chamber, the ball will with high certainty pass the chamber when, in case of overturning the bottle, it is thrown through the tubular channel. Even in case of a relatively slow fall the closure is obtained because the ball will only roll into the radial chamber when the latter is directed substantially downwards while overturning the container and when the "overturning" occurs as a slow overturning. If an initial slow overturning occurs, the ball may also roll into the radial chamber, but at increased speed of overturning before the container falls, the ball may be thrown back out of the chamber and ensure the closure.

During ordinary pouring the ball will, upon initial pouring, roll into and remain retained in the radially outward chamber. The stopper will preferably be asymmetric with a spout so that the user will always pour with the spout turning forward towards the glass, cup, etc. into which the content of the container is to be poured. In this manner particularly high certainty is obtained that the ball will always position itself in the radially outward chamber. Said radially outward chamber has a size which at least corresponds to half of the ball size. Thus, the ball will not be able to leave the radially outward chamber even when the container is being emptied in a position

substantially with the bottom up.

In practice it has turned out that the ball will not be dragged out of the chamber during pouring from the container. It is assumed that a pressure increase occurs at the position of the ball in the tubular channel. Moreover, it is assumed that said pressure increase will help to keep the ball in that position inside the radial chamber.

A closing effect during pouring is obtained in that the ball is thrown against the valve seat at the outlet of the channel. This may be achieved by means of an oblique thread-formed valve seat extending from a first point substantially at the end of the chamber next to the container and diametrically to the opposite side of the channel to a second point at a longer distance from the container than said first point. When ending the pouring, the container is rotated approx. 90 - 180° so that the ball will leave the radial chamber and hit the annular valve seat, which will close the stopper. In practice it has turned out that the ball will be thrown forward and close with high certainty even if a container "overturns slowly".

In order to obtain a particularly secure positioning of the ball in the radial chamber, said chamber preferably has a less steep side turning toward the container while the opposite side is more steep so that particularly secure retainment of the ball inside the radial chamber is achieved.

When the bottle overturns, the ball will be thrown through the tubular channel and get in contact with the valve seat situated at the outlet of the stopper.

The stopper is preferably made of a flexible yielding material so that the ball will be wedged or squeezed in its position against the valve seat at the outlet. This means that the stopper may also be used for liquids with a content of a gas, e.g. carbon dioxide. By throwing the ball against said valve seat a gas-proof closure is obtained so that the carbon dioxide or other gas is not released from the liquid.

As the tubular channel is only slightly larger than the diameter of the ball, it has

surprisingly turned out that the ball will always be thrown out and get in contact with the valve seat when the bottle overturns. It is assumed that this effect is obtained because the ball does not risk losing its kinetic inertia owing to shock effects which might occur if during its movement forward the ball is thrown back and forth between opposed lateral walls in the channel.

The invention thus achieves that in case of an accident the ball will automatically block unintended discharge when the bottle overturns. At the same time the stopper may be used as a pouring stopper as the ball will, in ordinary use, be placed in the radially outward chamber. In order to ensure rapid flow of the bottle content during pouring, the stopper may advantageously be provided with a ventilation pipe extending from a position inside the channel to a point in the inside of the container.

When after pouring, or after being raised, a container is put in its normal position, the stopper will be situated with the tubular channel, oriented substantially vertically. Thus, the ball is able to fall down automatically into contact with the valve seat situated next to the container. In case the container has been overturned, manually freeing the ball from a friction hold or an elastic squeeze may be required. Thereafter the ball will automatically be returned to its point of departure allowing resumed pouring or making the stopper ready again as a security stopper that will block unintended discharge if the container is overturned.

After the return of the ball to the valve seat next to the container, remaining liquid in the tubular channel may place itself on top of or around the ball. In order to permit this liquid to pass into the container, there may be provided one or several small incisions in said valve seat permitting liquid flow past the ball.

By designing the stopper with an oblique front end and a bevel to form a spout, drops are prevented from running down on the outside of the stopper and the container. At the same time this will also permit unproblematic pouring since the ball is automatically located in the radial chamber situated in the same radial position as the spout.

It has turned out that the stopper may have a length of approx. 2 to 7 times the diameter of the ball, however, the best results are obtained with a stopper in which the tubular channel has a length that is approx. 3 to 4 times the diameter of the ball.

Further embodiments and advantages appear from the attached claims.

DESCRIPTION OF THE DRAWING

The invention will now be described in further detail with reference to the attached schematic drawing, in which

- fig. 1 shows a section view through a security and pouring stopper in a vertical position (the starting position),
- fig. 2 a sectional view through a security and pouring stopper in ordinary use (pouring),
- fig. 3 a sectional view through a security and pouring stopper in an accident (bottle is overturned),
- fig. 4 illustrates the security and pouring stopper mounted on a bottle,
- fig. 5 shows a sectional view through a second and more detailed embodiment of a security and pouring stopper according to the invention, and
- fig. 6 shows a further embodiment of a stopper according to the invention.

Fig. 1 shows a sectional view through a first embodiment of a security and pouring stopper according to the invention. The stopper 1 comprises a ball 2 placed in a tubular channel 3 inside a tap 4.The tap 4 comprises a conic portion 5 for fastening to a container, preferably a bottle. Inside the tubular channel 3 the ball 2 is provided for movement between the position shown in fig. 1 and the position shown in fig. 3. In fig. 1 the ball rests against an annular valve seat 6 situated on the side of the channel turning towards the container, preferably a bottle 7 (see fig. 4). In the other position illustrated in fig. 3 the ball 2 rests against an annular valve seat 8 and will block unintended liquid flow through the tubular channel 3 in case the bottle 7 is overturned so that the ball 2 is thrown or pressed against the valve seat 8.

In the shown embodiment the ball 2 is manufactured from stainless steel and the tap 4 from a plastic material. The tap 4 is preferably produced from two different plastic materials. Thus, for the conic portion 5 it is preferred to use a soft plastic which will easily adapt to variations in the aperture of a bottle neck. In the remaining portion 9 of the tap 4 it is preferred to use a harder plastic material. Alternatively, it is possible to use other materials, it only has to be ensured that the ball has sufficient weight to be able to be thrown against the valve seat 8 and that the materials provide mutual tightening when the ball 2 is in a friction hold or a squeeze in the valve seat 8. Alternatively, the ball 2 may be covered with plastic.

The stopper 1 may also be used for ordinary pouring. This is illustrated in fig. 2. The tubular channel 3 is provided with a radially outward chamber 10. The chamber 10 has a size which approximately receives half of the ball 2. During ordinary pouring the ball 2 will roll slowly from its resting position against the seat 6 down into the chamber 10, permitting the liquid to pass through the tubular channel 3. The stopper 1 has preferably an obliquely cut front edge 11 with formation of a spout 12. The spout 12 is placed with the same radial position as the chamber 10 so that the user will always orient the chamber 10 turning towards the glass or the cup into which the pouring is done. In this manner particularly high certainty is achieved that during ordinary pouring the ball 2 will roll into the chamber 10. After use the ball will automatically roll back to rest against the valve seat 6 when the bottle 7 is placed in its upright position. In order to ensure rapid pouring, the stopper will be provided with a breather pipe 13 (see fig. 4) extending from the tubular channel 3 to the inside 14 of the bottle 7.

When the bottle overturns, the ball 2 will be thrown or pressed against the front valve seat 8. The ball will get stuck and block unintended discharge. In order to obtain that the ball gets stuck in its position against the valve seat 8, said seat is designed with a slight rise so that a wedging effect is achieved due to the inertia of the ball 2. After accidents, the ball 2 is easily pressed free and will return to its position against the valve seat 6.

Fig. 5 shows a further embodiment of a stopper 1 according to the invention. In fig. 5 the stopper is composed of several assembled parts. However, the stopper 1 may also be produced from two assembled parts or moulded in one piece. The spout 12 is provided with a bevel 15 for the formation of a sharp edge 16 in the spout 12. This ensures that liquid will run back in the tubular channel 3 and not down the outside of the stopper 1.

The embodiment shown in fig. 5 differs further from the embodiment shown in figs. 1-4 in the design of the radial chamber 10. In the first embodiment the radial chamber was designed with walls 17, 18 having sharp edges at the side turning towards the bottle and the end turning towards the spout 12, respectively. In fig. 5 the radial chamber 10 is designed with a shape which substantially corresponds to the shape of the ball. Furthermore, the front 17 of the chamber wall is less steep than the wall 18 turning towards the spout 12. Thus, the ball 2 is able more easily to roll into the chamber 10 during ordinary pouring and is prevented from rolling out and stopping the flow even if the bottle 7 and thus also the stopper 1 are placed approximately with the bottom up for complete emptying of the content of the bottle 7.

Fig. 6 shows a further embodiment of a stopper 1 according to the invention. In fig. 6 the valve seat 6 of the stopper, situated on the side of the channel turning towards the container, is formed by an oblique thread. The thread extends from a first point 19, approximately at the end of the radial chamber 10 which is next to the container, and diametrically to the opposite side of the channel 3 to a second point 20 situated at a longer distance from the container than said first point 19. When the stopper 1 is mounted on a container in a pouring position, the ball 2 is able to leave the radial chamber 10 if the container is rotated between 90 and 180°. As the ball 2 hits the obliquely extending valve seat 6', it will be guided to the front edge 11. In this manner the ball 2 will be pressed into contact with the annular valve seat 8 and close the stopper. The container may then be raised upright with a closed stopper. In practice it has turned out that during a slow overturn the ball 2 will be guided towards the valve seat 8 and ensure efficient closure of the stopper 1.

For cleaning, the ball 2 may be pressed out of the tubular channel 3. Alternatively, the stopper may be composed of several parts which may be separated from one another in order to allow taking out the ball for cleaning.

CLAIMS

1. A security and pouring stopper comprising a tubular channel which contains a ball and which has a radially outward chamber in which the ball may be partly contained, said ball being retained in the channel, c h a r a c t e r i z e d in that the inside of the tubular channel has a circular cross section with a diameter which is only slightly larger than the diameter of the ball, and that the ball is retained in the tubular channel by means of a valve seat in either end of the channel, of which at least the valve seat at the outlet of the channel is annular, and that the radial chamber has a size which is substantially equivalent to the half of the ball size, and that the chamber is positioned immediately above the ball when, in a resting position in use, it will be in contact against on the valve seat situated next to the container on which the stopper is mounted.

2. A stopper according to claim 1, c h a r a c t e r i z e d in that the diameter of the channel is between ½% and 5% larger than the diameter of the ball.

3. A stopper according to claims 1 and 2, c h a r a c t e r i z e d in that the ball is of metal, preferably stainless steel.

4. A stopper according to any of the preceding claims, c h a r a c t e r i z e d in that the tubular channel is made of an elastically flexible material which permits the ball to be pressed out for cleaning.

5. A stopper according to any of the preceding claims, c h a r a c t e r i z e d in that the radial chamber has a lateral wall turning towards the outlet of the stopper which is more steep than the lateral wall turning towards the container on which the stopper is mounted.

6. A stopper according to any of the preceding claims, c h a r a c t e r i z e d in that the outlet of the tubular channel is bevelled in order to form a spout with a sharp edge and provided in the same radial position as the radially outward chamber.

7. A stopper according to claim 6, c h a r a c t e r i z e d in that at the outlet the tubular channel has a substantially sloping direction so that the spout appears as a forward extension.

8. A stopper according to claim 1, c h a r a c t e r i z e d in that when resting on the valve seat next to the container, the ball is at the same time located at a front edge of the radially outward chamber.

9. A stopper according to any of the preceding claims, c h a r a c t e r i z e d in that the valve seat of the stopper at the outlet of the channel is an oblique thread-formed valve seat extending from a first point substantially at the end of the radial chamber next to the container and diametrically to the opposite side of the channel to a second point further away from the container than said first point.

10. A stopper according to any of the preceding claims, c h a r a c t e r i z e d in that the tubular channel has a length between two and seven times the diameter of the ball, preferably a length of approx. three to four times the diameter of the ball.

1/1

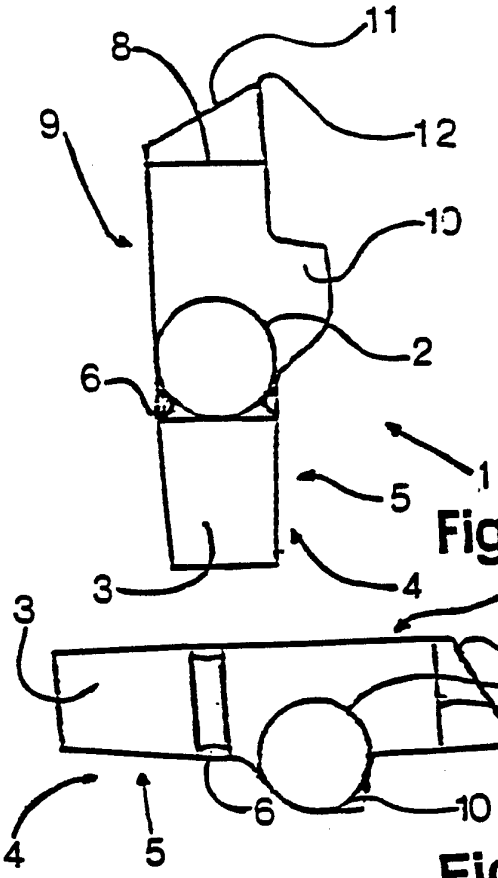


Fig. 1

Fig. 2

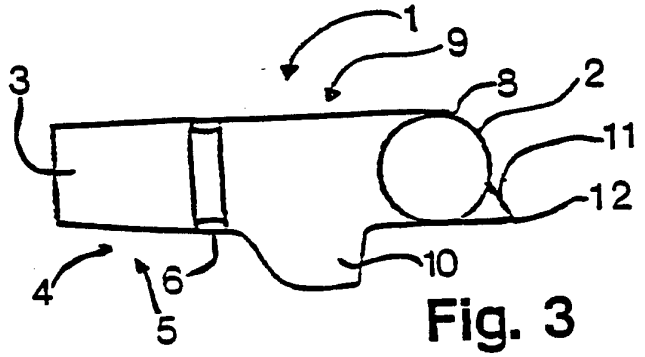


Fig. 3

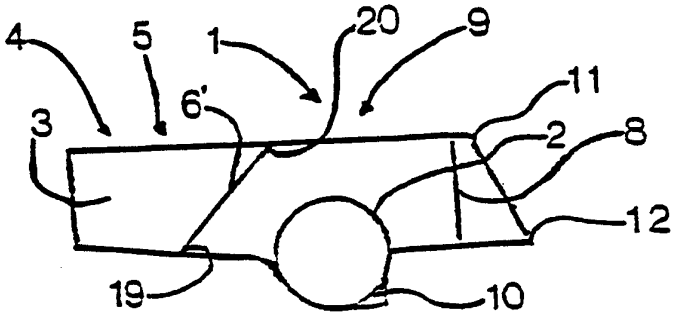


Fig. 6

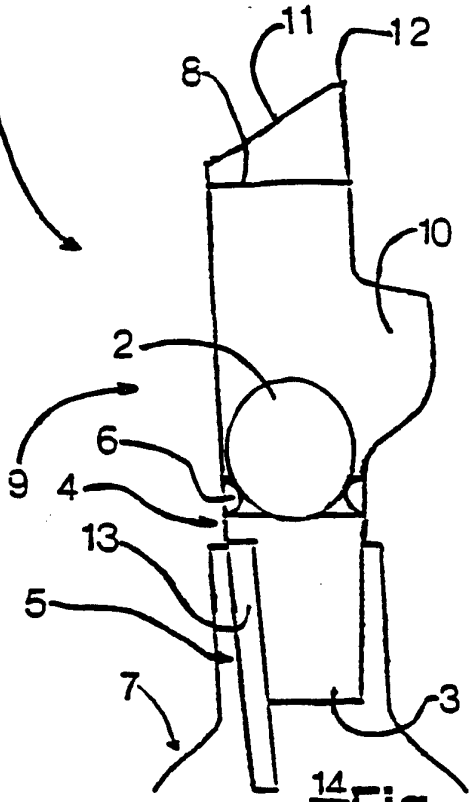


Fig. 4

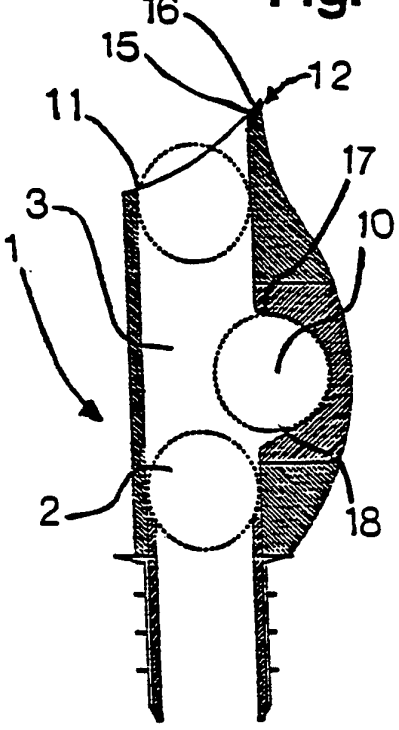


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/DK 94/00065

A. CLASSIFICATION OF SUBJECT MATTER

IPC : B65D 39/06, B65D 47/06
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC : B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

ORBIT

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 3152712 (K. RIESS), 13 October 1964 (13.10.64), column 2, line 5 - line 15, figures 3, 5	1
A	FR, B, 1445696 (JACQUES MOREAU), 6 June 1966 (06.06.66)	1-10
A	FR, B, 555632 (HANS BOLLIGER), 3 July 1923 (03.07.23)	1-10
A	US, A, 2113048 (W. GROSS), 5 April 1938 (05.04.38)	1-10

[X] Further documents are listed in the continuation of Box C. [X] See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" erlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
11 May 1994	20 -05- 1994
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Ivar Andréasson Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/DK 94/00065

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 5249714 (RICHARD D. MERHAR), 5 October 1993 (05.10.93) -- --------	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

16/04/94

International application No.
PCT/DK 94/00065

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 3152712	13/10/64	NONE	
FR-B- 1445696	06/06/66	NONE	
FR-B- 555632	03/07/23	NONE	
US-A- 2113048	05/04/38	NONE	
US-A- 5249714	05/10/93	NONE	