

(57) **Abrégé(suite)/Abstract(continued):**

piston is received within the damping chamber and is operatively connected between the first and second end members and within the first spring chamber. A suspension system that includes a gas spring and gas damper assembly as well as a method of assembly are also included.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
14 January 2010 (14.01.2010)(10) International Publication Number
WO 2010/006167 A3

(51) International Patent Classification:

F16F 9/34 (2006.01) *B60G 13/06* (2006.01)

(21) International Application Number:

PCT/US2009/050102

(22) International Filing Date:

9 July 2009 (09.07.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/079,276	9 July 2008 (09.07.2008)	US
61/120,719	8 December 2008 (08.12.2008)	US
61/140,495	23 December 2008 (23.12.2008)	US
61/165,781	1 April 2009 (01.04.2009)	US

(71) Applicant (for all designated States except US): **FIRESTONE INDUSTRIAL PRODUCTS COMPANY, LLC** [US/US]; 250 West 96th Street, Indianapolis, IN 46260 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MOULIK, Pradip-ta, N.** [US/US]; 13547 Ashbury Drive, Carmel, IN 46032 (US). **BOUNDS, Joseph, A.** [US/US]; 11148 Litchfield Place, Fishers, IN 46038 (US). **BROOKES, Graham, R.** [US/US]; 13128 Hazelwood Court, Carmel, IN 46033 (US).(74) Agent: **DUGAN, Matthew, P.**; BRIDGESTONE AMERICAS HOLDING, INC., 1200 Firestone Parkway, Akron, OH 44317-0001 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:

22 April 2010

(54) Title: GAS SPRING AND GAS DAMPER ASSEMBLY AND METHOD

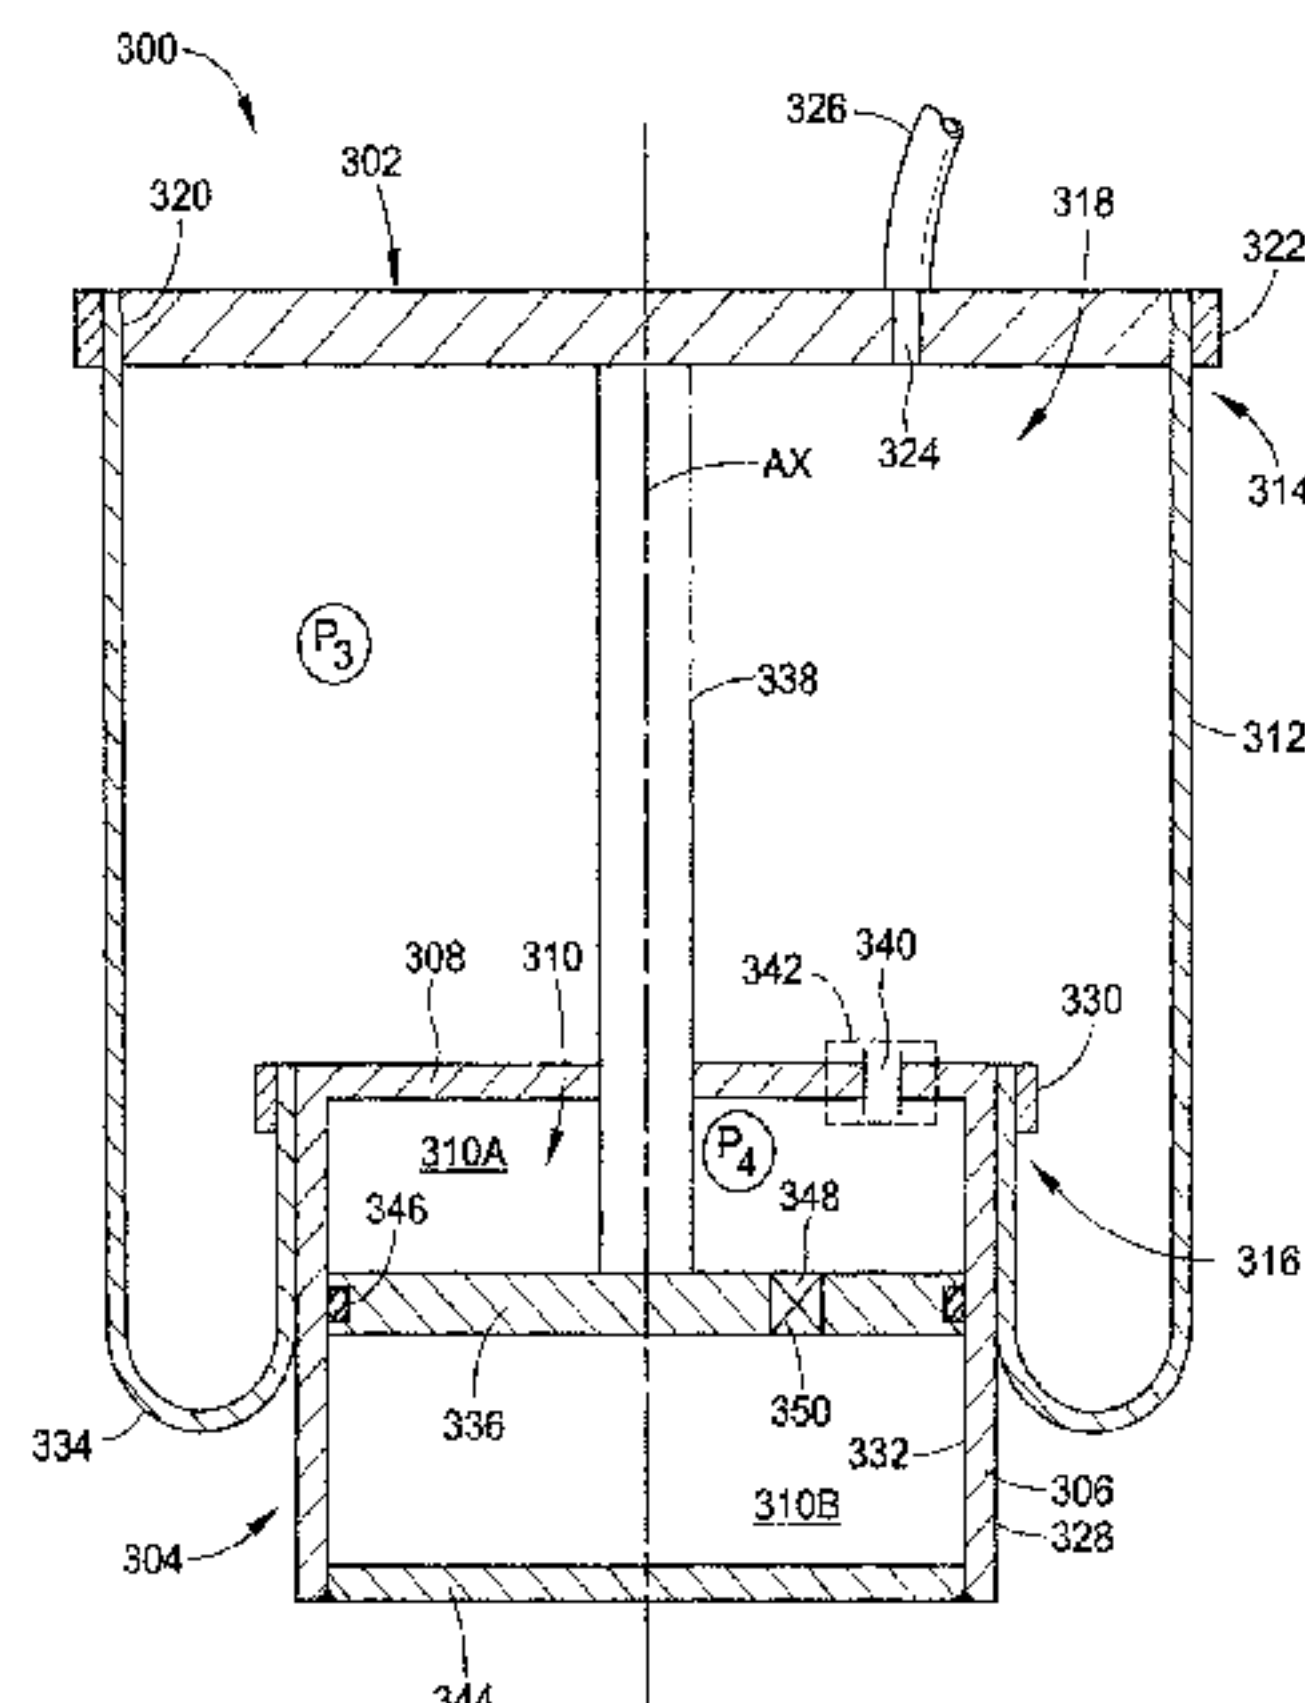


FIG. 4

(57) Abstract: A gas spring and gas damper assembly includes a first end member, a second end member and a flexible wall that at least partially defines a first spring chamber therebetween. A damping chamber wall at least partially defines a damping chamber. A damper piston is received within the damping chamber and is operatively connected between the first and second end members and within the first spring chamber. A suspension system that includes a gas spring and gas damper assembly as well as a method of assembly are also included.

GAS SPRING AND GAS DAMPER ASSEMBLY AND METHOD

BACKGROUND

[0002] The present disclosure broadly relates to the art of spring devices and, more particularly, to a gas spring and gas damper assembly that includes a gas spring used in combination with a gas damper, as well as a vehicle suspension system and a method of operating such a gas spring and gas damper assembly.

[0003] Suspension systems, such as may be used in connection with motorized vehicles, for example, typically include one or more spring elements for accommodating forces and loads associated with the operation and use of the corresponding system or device (e.g., a motorized vehicle). In such applications it is often considered desirable to select spring elements that have the lowest suitable spring rate, as this can favorably influence certain performance characteristics, such as vehicle ride quality and comfort, for example. That is, it is well understood in the art that the use of a spring element having a higher spring rate (i.e. a stiffer spring) will transmit a greater magnitude of inputs (e.g., road inputs) to the sprung mass and that, in some applications, this could undesirably affect the sprung mass, such as, for example, by resulting in a rougher, less-comfortable ride of a vehicle. Whereas, the use of spring elements having lower spring rates (i.e., softer, more-compliant springs) will transmit a lesser amount of the inputs to the sprung mass. In many cases, this will be considered a desirable affect on the sprung mass, such as by providing a more comfortable ride, for example.

[0004] Such suspension systems also commonly include one or more dampers or damping elements that are operative to dissipate undesired inputs and movements of the sprung mass, such as road inputs occurring under dynamic operation of a vehicle, for example. Typically, such dampers are liquid filled and operatively connected between a sprung and unsprung mass, such as between a body and axle of a vehicle, for example. In other arrangements, however, the damping element can be of a type and kind that utilizes gaseous fluid rather than liquid as the working medium. In such known constructions, the gas damper portion permits gas flow between two or more volumes of pressurized gas, such as through one or more orifices, as shown, for example, in U.S. Patent Application Publication No. 2004/0124571, or through one or more valve ports, as shown, for example, in U.S. Patent Application Publication No. 2003/0173723. Generally, there is some resistance to the movement of pressurized gas through these passages or ports, and this resistance acts to dissipate energy associated with the gas spring portion and thereby provide some measure of damping.

[0005] One difficulty with known gas spring and gas damper assemblies involves balancing spring rate with damping performance. It is generally understood that increased damping performance can be achieved through the use of increased differential pressure between the gas chambers of the gas damper. In some cases, this can be achieved by operating a gas damper at an increased internal gas pressure. However, this increased gas pressure can, in some cases, have an undesirable affect on the spring rate of the gas spring, such as by undesirably increasing the spring rate in applications in which a lower spring rate is desired, for example.

[0006] Accordingly, it is desired to develop a gas spring and gas damper assembly as well as a suspension system and method using the same that overcome the foregoing and other difficulties associated with known constructions.

BRIEF DESCRIPTION

[0007] One example of a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure can include a first end member and a second end member that is disposed in longitudinally-spaced relation to the first end member. A flexible wall is operatively connected between the first and second end members such that a spring chamber is at least partially defined therebetween. A damping chamber wall is on the first end member and is at least partially disposed within the spring chamber. The damping chamber wall at least partially defines a damping chamber. A damper piston is disposed within the damping chamber such that a first portion of the damping chamber is formed along one side of the damper piston and a second portion of the damping chamber is formed along an opposing side of the damper piston. The damper piston is operatively connected to the second end member and is capable of reciprocal movement within the damping chamber in an approximately longitudinal direction. The first portion of the damping chamber is disposed in fluid communication with the spring chamber such that gas can be transferred between the first portion and the spring chamber during reciprocal movement of the damper piston to thereby dissipate kinetic energy acting on the gas spring and gas damper assembly. The second portion of the damping chamber is disposed in fluid communication with one of the first portion of the damping chamber and an associated gas atmosphere external to the gas spring and gas damper assembly.

[0008] Another example of a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure can include a first end member and a second end member that is disposed in longitudinally-spaced relation to the first end member. The second end member includes an inner side wall and an outer side wall. The inner side wall at least partially defines an inner cavity. The assembly also includes a gas damper piston that has opposing piston surfaces and is at least partially received within the inner cavity such that first and second portions of the inner cavity are at least partially defined by said opposing piston surfaces. The gas damper piston slidably engages the inner

side wall and is adapted for longitudinal displacement therealong. The assembly further includes a gas damper connector rod that operatively connects the first end member and the gas damper piston such that relative longitudinal displacement between the first and second end members results in displacement of the gas damper piston along the inner side wall within the inner cavity. The assembly also includes flexible sleeve that is operatively connected between the first and second end members at least partially defining a spring chamber therebetween. The first portion of the inner cavity is in fluid communication with the spring chamber by way of at least one passage extending through the second end member.

[0009] A gas spring and gas damper assembly according to the preceding paragraph can be provided wherein a substantially fluid-tight seal is formed between the gas damper piston and the inner side wall of the second end member, and the second portion of the inner cavity is open to the external atmosphere.

[0010] A gas spring and gas damper assembly according to any one of the two preceding paragraphs can be provided wherein a substantially fluid-tight seal is formed between the gas damper piston and the inner side wall of the second end member, and the first and second portions of the inner cavity are in fluid communication with one another.

[0011] A further example of a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure can include a first end member and a second end member that is disposed in longitudinally-spaced relation to the first end member. The second end member includes an end wall and a side wall that at least partially define an inner cavity of the second end member. The end wall includes first and second passages extending therethrough. A third end member is at least partially disposed within the inner cavity of the second end member and is rigidly interconnected with the first end member through the first passage of the second member. A first flexible wall is operatively connected between the first and second end members such that a spring chamber is at least partially defined therebetween. A second flexible wall

is operatively connected between the second and third end members such that the inner cavity of the second end member is separated into first and second chambers that are substantially fluidically isolated from one another. The first chamber of the inner cavity is in fluid communication with the spring chamber by way of the second passage through the second end member. The second chamber of the inner cavity is in fluid communication with an external atmosphere.

[0012] Still another example of a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure can include a first end member having an end member wall and an opening extending through the end member wall. A second end member is disposed in longitudinally-spaced relation to the first end member, and a flexible wall is operatively connected to the first and second end members such that a substantially fluid-tight seal is formed between the flexible wall and each of the first and second end members to thereby at least partially define the spring chamber therebetween. A gas damper assembly is operatively connected to at least one of the first and second end members and is at least partially disposed within the spring chamber. The gas damper assembly includes a damper housing, a damper piston and a damper rod. The damper housing is supported on one of the first and second end members and includes a housing wall that at least partially defines a damping chamber. The housing wall includes first and second fluid passages extending therethrough. The damper piston includes a first piston side, a second piston side disposed in longitudinally-spaced relation to the first piston side and an outer peripheral wall that extends longitudinally between the first and second piston sides. The damper piston is received within the damper chamber of the damper housing such that the damping chamber is separated into a first chamber portion disposed along the first piston side and a second chamber portion disposed along the second piston side. The first and second chamber portions are substantially fluidically isolated from one another by the damper piston. The damper piston is adapted for reciprocal movement within the damping chamber in a longitudinal direction along at least a portion of the housing wall. The

damper rod extends longitudinally between opposing first and second ends. The first end of the damper rod is operatively connected to the damper piston, and the second end of the damper rod projects outwardly from the damper housing and is operatively connected to the other of the first and second end members. The first fluid passage is disposed in fluid communication between the first chamber portion of the damping chamber and an associated gas atmosphere external to the gas spring and gas damper assembly such that gas can be transferred into and out of the first chamber portion of the damping chamber through the first fluid passage during reciprocal movement of the damper piston. The second fluid passage is disposed in fluid communication between the second chamber portion of the damping chamber and the spring chamber such that gas can be transferred between the second chamber portion and the spring chamber during reciprocal movement of the damper piston to thereby dissipate kinetic energy acting on the gas spring and gas damper assembly.

[0013] One example of a vehicle suspension system in accordance with the subject matter of the present disclosure can include a gas spring and gas damper assembly according to any one of the foregoing paragraphs and a pressurized gas system. The pressurized gas system includes a pressurized gas source in fluid communication with the spring chamber of the gas spring and gas damper assembly.

[0014] One example of a method of operating a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure can include providing a first end member and a second end member with the second end member including a damping chamber wall that at least partially defines a damping chamber. The method can also include providing a damper piston received within the damping chamber such that the damping chamber has first and second portions on opposing sides of the damper piston, and forming a gas damper by operatively connecting the damper piston to the first end member such that relative displacement of the first and second end members results in displacement of the damper piston within the damping chamber. The method can further include forming a spring chamber about the gas damper from a first

flexible wall secured between the first and second end members. The method can also include transferring pressurized gas between the spring chamber and the first portion of the damping chamber to dissipate kinetic energy acting on the gas spring and gas damper assembly.

[0015] Another example of a method of operating a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure can include providing a first end member and a second end member with the first end member including a side wall at least partially defining an end member cavity. The method also includes forming a gas damper from a damper piston received within the end member cavity such that the end member cavity has first and second on opposing sides of the damper piston by operatively connecting the damper piston to the second end member such that relative displacement of the first and second end members results in displacement of the damper piston within the end member cavity along the side wall. The method further includes forming a spring chamber about the damper from a first flexible wall secured along the first and second end members. The method also includes transferring pressurized gas between the spring chamber and the first portion of the end member cavity to dissipate kinetic energy acting on the gas spring and gas damper assembly.

[0016] A further example of a method of operating a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure can include providing a first end member, a second end member, and a third end member. The second end member including an end wall and a side wall that at least partially defines an inner cavity of the second end member. The end wall includes at least a first passage and a second passage that extends therethrough. The third end member is at least partially received within the inner cavity of the second end member. The method also includes securing a first flexible wall between the first end member and the second end member to at least partially define a spring chamber in fluid communication with the inner cavity of the second end member through the first passage. The method further includes securing a second flexible wall between the second end member and

the third end member to separate the inner cavity into a first chamber in fluid communication with the spring chamber through the first passage and a second chamber in fluid communication with an external atmosphere. The method also includes interconnecting the first end member and the third end member such that: (1) upon movement of the first and second end members away from one another, a volume of the spring chamber increases and a volume of the first chamber decreases; and (2) upon movement of the first and second end members toward one another, the volume of the spring chamber decreases and the volume of the first chamber increases. The method further includes transferring pressurized gas between the spring chamber and the first chamber during the movements in (1) and (2) and thereby dissipating kinetic energy acting on the gas spring and gas damper assembly.

[0017] Still another example of a method of operating a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure can include providing a first end member, a second end member and flexible wall. The method also includes providing a gas damper assembly that includes a damper housing, a damper piston and a damper rod. The damper housing includes a housing wall at least partially defining a damping chamber. The housing wall includes first and second fluid passages that extend therethrough. The damper piston is received within the damper chamber such that the damping chamber is separated into first and second chamber portions that are fluidically isolated from one another with the first fluid passage in communication with the first chamber portion and the second fluid passage is in fluid communication with the second chamber portion. The damper rod includes a end operatively connected to the damper piston and a second end projecting outwardly from the damper housing. The method further includes interconnecting the damper housing to one of the first and second end members and interconnecting the second end of the damper rod to the other of the first and second end members such that the gas damper assembly is at least partially disposed therebetween. The method also includes securing the flexible wall between the first and second end members to at least partially define a spring chamber therebetween with the

gas damper assembly disposed at least partially within the spring chamber. The method further includes fluidically interconnecting the first fluid passage with a gas atmosphere external to the gas spring and fluidically interconnecting the second fluid passage with the spring chamber such that: 1) upon movement of the first and second end members toward one another, the second chamber portion increasing in volume such that gas within the spring chamber flows into the second chamber portion through the second fluid passage to thereby dissipate kinetic energy acting on the gas spring and gas damper assembly; 2) upon movement of the first and second end members away from one another, the second chamber portion decreasing in volume such that gas within the second chamber portion flows into the spring chamber through the second fluid passage to thereby dissipate kinetic energy acting on the gas spring and gas damper assembly. The method also includes transferring gas between the gas atmosphere external to the gas spring and the first chamber portion through the first fluid passage during movement of the first and second end members toward and away from one another as described in 1) and 2).

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a schematic representation of one example of a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure.

[0019] FIG. 2 is a graphical representation of gas pressure versus force.

[0020] FIG. 3 is a schematic representation of one example of a suspension system utilizing a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure.

[0021] FIG. 4 is a schematic representation of another example of a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure.

[0022] FIG. 5 is a schematic representation of a further example of a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure.

[0023] FIG. 6 is a schematic representation of still another example of a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure.

[0024] FIG. 7 is a schematic representation of yet another example of a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure.

DETAILED DESCRIPTION

[0025] Turning now to the drawings, wherein the showings are for the purpose of illustrating exemplary embodiments of the subject matter of the present disclosure only and not for the purposes of limiting the same, FIG. 1 illustrates a gas spring and gas damper assembly **100** that includes a first or upper end member **102** and a second or lower end member **104** disposed in longitudinally-spaced relation to the first end member. Assembly **100** also includes a longitudinally-extending axis **AX** that extends generally between first and second end members **102** and **104**. Second end member **104** includes a side wall **106** and an end wall **108** that at least partially define an end member cavity **110** within second end member **104**.

[0026] Assembly **100** also includes a first or inner flexible wall **112** and a second or outer flexible wall **114**, respectively. Inner flexible wall **112** is disposed circumferentially about axis **AX** and extends longitudinally between a first or upper end **116** and a second or lower end **118**. Similarly, outer flexible wall **114** is disposed circumferentially about axis **AX** and extends longitudinally between a first or upper end **120** and a second or lower end **122**. First end **116** of inner flexible wall **112** is operatively connected along first end member **102** and second end **118** of the inner flexible wall is secured along second end member **104** such that a first or inner spring chamber **124** is at least partially defined between the first and second end members by inner flexible wall **112**. Additionally, first end **120** of outer flexible wall **114** is secured along first end member **102** and second end **122** of the outer flexible wall is secured along second end member **104** such

that a second or outer spring chamber **126** is at least partially defined between the first and second end members by outer flexible wall **114**.

[0027] It will be appreciated that first end member **102** and second end member **104** can be of any suitable type, kind, configuration, arrangement and/or construction. In the exemplary embodiment shown in FIG. 1, first end member **102** is of a single or unitary construction and includes at least one side wall along which an end of a flexible wall is secured. Such an end member may be referred to in the art as a top plate or cap. First end member **102** differs from conventional top plates in that first end member **102** includes a first or inner side wall **128** and a second or outer side wall **130** that is spaced radially-outwardly from the inner side wall. First end member **102** is also shown as including a first passage **132** that extends through the first end member and is suitable for fluidically interconnecting inner spring chamber **124** with an external atmosphere (e.g., such as by way of a vent or exhaust) or pressurized gas system (e.g., an air compressor, a compressed air reservoir, a valve assembly or other device), such as by way of a gas transfer line **134** that is operatively connected to the first end member, for example. First end member **102** can also optionally include a second passage **136** that extends through the first end member and is suitable for fluidically interconnecting outer spring chamber **126** with an external atmosphere or pressurized gas system or device, such as by way of a gas transfer line **138**, for example. Additionally, it will be appreciated that any other suitable fittings, connectors and/or flow control devices (e.g., valves) can optionally be included.

[0028] Second end member **104**, which is sometimes referred to in the art as a piston, is shown in FIG. 1 as including side wall **106** that extends longitudinally toward first end member **102** from along end wall **108**. An outer surface **140** of side wall **106** is shown in FIG. 1 as being substantially cylindrical. However, it will be appreciated that the outer surface or outer profile of the second end member can be of any suitable size, shape and/or configuration, such as cylindrical, frustoconical, curvilinear or any combination thereof, for example. Side wall **106** also includes an inner surface **142** that at least partially defines

end member cavity **110**. In one preferred arrangement, inner surface **142** will be substantially cylindrical along the longitudinal length thereof.

[0029] Furthermore, inner flexible wall **112** and outer flexible wall **114** can be of any suitable kind, type, configuration, arrangement and/or construction. In the exemplary arrangement shown, the inner and outer flexible walls are both elongated flexible sleeves or bellows of a suitable construction. However, one or more convoluted bellow-type flexible walls could alternately, or additionally, be used. One example of a suitable construction for inner and/or outer walls **112** and/or **114** can include one or more layers of elastomeric material (e.g., rubber or thermoplastic elastomer) and can optionally include one or more fabric plies (e.g., plies of cotton, nylon or aramid fibers) or any other reinforcing elements, materials and/or components.

[0030] Also, it will be appreciated that the inner and outer flexible walls can be secured on or along the first and second end members in any suitable manner. For example, first ends **116** and **120** of inner and outer flexible walls **112** and **114**, respectively, are received along inner and outer side walls **128** and **130**, respectively, of first end member **102** and secured thereto using retaining rings **144A** and **144B**. However, it will be appreciated that any other suitable arrangement could alternately be used. As one example of an alternate construction, two bead plates could be used with the first bead plate being an inner bead plate crimped along a bead wire embedded within the first end of the inner flexible wall. The second bead plate could then be crimped along a bead wire embedded within the first end of the outer flexible wall. The first and second bead plates could then be secured to one another in any suitable manner.

[0031] Additionally, second ends **118** and **122** of inner and outer flexible walls **112** and **114**, respectively, can be secured along second end member **104** in any suitable manner. For example, second ends **118** and **122** are shown in FIG. 1 as being disposed along outer surface **140** of side wall **106** and secured thereto using retaining rings **144C** and **144D**, respectively. While outer surface **140** of side wall **106** is shown in FIG. 1 as being substantially cylindrical, it will be appreciated that, in practice, one or more features (e.g., steps, notches, grooves,

shoulders) may be provided for maintaining the ends of the flexible walls in the desired position along the side wall. Regardless of the manner in which the second ends of the inner and outer flexible walls are secured along second end member **104**, inner and outer flexible walls **112** and **114** are each shown as forming a rolling lobe, which are indicated respectively by reference numbers **112A** and **114A**, that rolls or is otherwise displaced along outer surface **140** of side wall **106** as the first and second end members are longitudinally displaced relative to one another.

[0032] Gas spring and gas damper assembly **100** is also shown in FIG. 1 as including a damper piston **146** that is received within end member cavity **110** for longitudinal displacement along inner surface **142** of side wall **106**. As such, inner spring chamber **124**, which is otherwise fluidically interconnected with end member cavity **110**, is separated into a main inner spring chamber, which is identified by reference number **124**, along one side of damper piston **146** and a secondary inner spring chamber **124A** formed within end member cavity **110** along the opposing side of damper piston **146** from the main inner spring chamber. A damper rod **148** operatively connects damper piston **146** to first end member **102** such that displacement of first and second end members **102** and **104** relative to one another will generate or otherwise result in movement of damper piston **146** within end member cavity **110**. Such movement of damper piston **146** can operate to dissipate kinetic energy acting on assembly **100** and, thus, damp vibrations and other inputs, as is understood by those of skill in the art.

[0033] It will be appreciated that the interconnection between damper rod **148** and first end member **102** can be made in any suitable manner and by way of any suitable connection and/or arrangement. For example, damper rod **148** is shown in FIG. 1 as being rigidly connected to first end member **102**, such as might be accomplished by a flowed-metal joint (e.g., a weld) or a threaded fastener connection, for example. As another example, a connection suitable for permitting pivotal movement or other angular displacement, represented by arrow **PVT** in FIG. 1, of the damping rod relative to the first end member can

optionally be used. Such a connection is schematically represented in FIG. 1 by dashed box **150**. Examples of connections that would permit pivotal movement could include ball and socket joints, spherical bearings and/or universal joints. It will be appreciated, however, that such a connection can be of any suitable type, kind, arrangement, configuration and/or construction.

[0034] In the present exemplary arrangement, assembly **100** acts to damp kinetic energy by allowing gas to flow between main inner spring chamber **124** and secondary inner spring chamber **124A** as damper piston **146** is displaced along inner surface **142** of side wall **106**. It will be appreciated that such a flow of gas can be provided for in any suitable manner, such as by providing a gap between the outer peripheral edge of the damper piston and the inner surface of the side wall and allowing gas to flow through the gap as the damper piston is displaced. An alternative arrangement is shown in FIG. 1 in which damper piston **146** includes a suitable sealing member **152** for forming a substantially fluid-tight seal between the damper piston and the inner surface of the side wall. Damper piston **146** also includes one or more passages formed therethrough that permit gas to flow between the main and secondary inner spring chambers as the damper piston is displaced. In the exemplary arrangement shown, damper piston **146** includes a first passage **154** and an optional second passage **156**.

[0035] In some cases it is desirable for the damper piston to provide different damping performance and/or output in one direction of movement than is provided in the opposite direction of movement. As such, first passage **154** can include a first property or characteristic (e.g., size, shape, configuration, direction of gas flow) operatively associated with a first direction of travel. Additionally, optional second passage **156**, if provided, can include a second property or characteristic (e.g., size, shape, configuration, direction of gas flow) that may be different from that of first passage **154** such that different damping performance can be provided in each direction of travel of damper piston **146**. As one example, such different properties and/or performance characteristics of passages **154** and **156** could be provided by optional valves **158** and **160** that

are schematically represented in FIG. 1 as being provided along the first and second passages, respectively.

[0036] As discussed above, it will be appreciated that, in the broadest sense, gas spring and gas damper assemblies are known and have been proposed for use in a variety of applications and/or operating environments. Additionally, it is generally understood that increased damping performance can be achieved from a gas damper by operating the same at an increased internal gas pressure. That is, damping performance increases as the gas pressure within the damper is increased. It has also been recognized, however, that known gas spring and gas damper assemblies may suffer undesirable effects due to extended operation thereof at elevated gas pressures, which would otherwise provide improved damping performance. As such, known gas spring and gas damper assemblies generally operate at lower nominal operating pressures, which undesirably results in lower damping performance. However, a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure, such as assembly **100**, for example, differs from known constructions in that substantially higher gas pressures can be used within the subject gas spring and gas damper assembly, which results in substantially improved damping performance.

[0037] FIG. 2 graphically represents the damping performance generated by a conventional gas spring and gas damper and the anticipated performance of a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure. More specifically, FIG. 2 illustrates variations in force as a gas spring and gas damper assembly is displaced and the gas damper piston thereof undergoes displacement within a damping chamber. In the present exemplary arrangement, inner spring chambers **124** and **124A** operate as such a damping chamber of gas spring and gas damper assembly **100**.

[0038] Plot A of FIG. 2 represents the expected performance of a conventional gas spring and gas damper assembly and includes peak force values, which are represented in FIG. 2 by reference characters F_1 and F_2 . Plot B of FIG. 2 represents the expected performance of a gas spring and gas

damper assembly in accordance with the subject matter of the present disclosure, such as assembly **100**, for example. Plot B includes peak force values, which are represented in FIG. 2 by reference characters F_3 and F_4 , that are substantially increased over corresponding peak values F_1 and F_2 of Plot A. As one exemplary estimate, it is expected that an increase in force within a range of from about 100 percent to about 200 percent can be obtained through the use of a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure in comparison with a similarly sized gas spring and gas damper assembly of a known construction.

[0039] Generally, a gas spring and gas damper assembly of a known construction will operate at relatively-low nominal operating pressures, such as at nominal pressures within a range of from about 60 psi to about 120 psi, for example. Thus, the damping performance of such known gas spring and gas damper assemblies is limited by this relatively-low nominal operating pressure. A gas spring and gas damper assembly in accordance with the subject matter of the present disclosure, however, is expected to include a damping chamber that will operate at substantially-higher nominal operating pressures, such as at nominal pressures within a range of from about 200 psi to about 350 psi, for example. Thus, the aforementioned increase in damping performance is expected to result for the subject gas spring and gas damper construction.

[0040] In an installed condition and during use, a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure, such as assembly **100**, for example, will include one spring chamber operating at a first nominal gas pressure and a second spring chamber operating at a second nominal spring chamber that is lower than the first nominal spring chamber. For example, inner spring chambers **124** and **124A** of gas spring and gas damper assembly **100** can operate at a first nominal gas pressure P_1 , such as a nominal gas pressure within a range of from approximately 200 psi to approximately 350 psi, for example. Outer spring chamber **126** can operate at a second nominal gas pressure P_2 , such as a nominal gas pressure within a range of from approximately 60 psi to approximately 175 psi, for example.

[0041] It will be appreciated that operation of a conventional flexible wall of a gas spring assembly at nominal pressures of greater than about 175 psi may result in decreased performance of the gas spring assembly and, as such, that operation of conventional gas spring assemblies at such pressure levels is generally avoided. It will be recognized, however, that outer spring chamber **126** of the subject gas spring and gas damper assembly surrounds and substantially encapsulates inner flexible wall **112**. As such, inner flexible wall **112** is only subjected to the differential pressure (i.e., according to a relationship in which $DP = P_1 - P_2$) between nominal operating pressure P_1 of inner spring chambers **124** and **124A** and nominal operating pressure P_2 of outer spring chamber **126**. By selectively inflating the inner and outer spring chambers to maintain the differential pressure within a predetermined range, any decrease in performance of inner flexible wall **112** due to the increased pressure in the inner spring chambers can be minimized while providing increased damping performance due to the substantially increased pressure within the damping chamber (i.e., within inner spring chambers **124** and **124A**).

[0042] The selective inflation and maintenance of the desired differential pressure can be provided in any suitable manner. As one example, inner spring chambers **124** and **124A** can be selectively filled and/or vented by way of passage **132** and outer spring chamber **126** can be selectively filled and/or vented by way of passage **136**. Such selective transfer of pressurized gas can be cooperatively performed by a suitable pressurized gas system and/or control device. As another example, a passage can be provided between the inner and outer spring chambers that is operative permit fluid flow therethrough and thereby alter the gas pressure in one chamber as the gas pressure in the other chamber varies. In the exemplary arrangement shown, a passage **162** extends through side wall **106** of second end member **104**. Additionally, a flow control device, such as a valve, for example, can optionally be provided for selectively controlling gas flow through passage **162**. A schematic representation of such a valve is illustrated in FIG. 1 and is identified by item number **164**. Such a flow

control device, if provided, can be of any suitable type and/or kind, such as a pressure release valve and/or a proportional flow valve, for example.

[0043] It will also be appreciated that a gas spring and gas damper assembly in accordance with the subject matter of the present disclosure, such as assembly **100**, or example, can be adapted for use in any application and/or operating environment in which a spring device and damping device are operated in parallel with one another. One example of such an application and use is in association with vehicle seat suspensions, such as may be used in heavy-duty vehicle cabs, tractor-trailer cabs and farm equipment cabs, for example. Another example of a suitable application and use is in operative association with a vehicle suspension system. One exemplary arrangement of a vehicle suspension system that includes a plurality of gas spring and gas damper assemblies in accordance with the subject matter of the present disclosure is shown in FIG. 3 and identified by item number **200**. Suspension system **200** is shown as being disposed between a sprung mass, such as an associated vehicle body **BDY**, for example, and an unsprung mass, such as an associated wheel **WHL** or an associated wheel-engaging member **WEM**, for example, of an associated vehicle **VHC**. It will be appreciated that any such suspension system can include any number of one or more systems, components and/or devices and that the same can be operatively connected between the sprung and unsprung masses of the associated vehicle in any suitable manner.

[0044] Suspension system **200** is shown as including a plurality of gas spring and gas damper assemblies that are supported between the sprung and unsprung masses of the associated vehicle. In the embodiment shown in FIG. 1, suspension system **200** includes four gas spring and gas damper assemblies **202**, one of which is disposed toward each corner of the associated vehicle adjacent a corresponding wheel **WHL**. However, it will be appreciated that any other suitable number of gas spring and gas damper assemblies could alternately be used in any other suitable configuration or arrangement.

[0045] As shown in FIG. 3, gas spring and gas damper assemblies **202** are supported between wheel-engaging members **WEM** and body **BDY** of associated

vehicle **VHC**. As discussed in detail hereinbefore, gas spring and gas damper assemblies **202** include first and second flexible walls **204** and **206** as well as a gas damper portion **208**. As discussed above, it will be recognized that the gas spring and gas damper assemblies shown and described herein (e.g., gas spring and gas damper assemblies **100** and **202**) are of a rolling lobe-type construction. However, it will be appreciated that the present novel concept can be utilized in association with gas spring and gas damper assembly arrangements and/or construction of any other suitable type and/or construction.

[0046] Suspension system **200** also includes a pressurized gas supply system **210** that is operatively associated with the gas spring and gas damper assemblies for selectively supplying pressurized gas (e.g., air) thereto and selectively transferring pressurized gas therefrom. In the exemplary embodiment shown in FIG. 3, gas supply system **210** includes a pressurized gas source, such as a compressor **212**, for example, for generating pressurized air or other gases. The gas supply system can also include any number of one or more control devices of any suitable type, kind and/or construction as may be capable of effecting the selective transfer of pressurized gas. For example, a valve assembly **214** is shown as being in communication with compressor **212** and can be of any suitable configuration or arrangement. In the exemplary embodiment shown, valve assembly **214** includes a valve block **216** with a plurality of valves (not shown) supported thereon. Valve assembly **214** can also optionally include a suitable exhaust, such as a muffler **218**, for example, for venting pressurized gas from the system. Optionally, pressurized gas supply system **210** can also include a reservoir **220** in fluid communication with valve assembly **214** and suitable for storing pressurized gas.

[0047] The one or more control devices, such as valve assembly **214**, for example, can be in communication with gas spring and gas damper assemblies **202** in any suitable manner, such as, for example, through suitable gas transmission lines **222**. As such, pressurized gas can be selectively transmitted to and/or from the gas spring and gas damper assemblies through valve

assembly **214**, such as to alter or maintain vehicle height at one or more corners of the vehicle, for example.

[0048] Suspension system **200** also includes a control system **224** that is capable of communication with any one or more other systems and/or components (not shown) of suspension system **200** and/or of which **VHC** for selective operation and control of the suspension system. Control system **224** includes a controller or electronic control unit (ECU) **226** in communication with compressor **212** and/or valve assembly **214**, such as through a conductor or lead **228**, for example, for selective operation and control thereof, including supplying and exhausting pressurized fluid to and from gas spring and gas damper assemblies **202**. Controller **226** can be of any suitable type, kind and/or configuration.

[0049] Control system **224** can also optionally include one or more height or distance sensing devices (not shown) as well as any other desired systems and/or components (e.g., pressure sensors and accelerometers). Such height sensors, if provided, are preferably capable of generating or otherwise outputting a signal having a relation to a height or distance, such as between spaced components of the vehicle, for example. It will be appreciated that any such optional height sensors or any other distance-determining devices, if provided, can be of any suitable type, kind, construction and/or configuration, such as mechanical linkage sensors, ultrasonic wave sensors or electromagnetic wave sensors, such as may operate using ultrasonic or electromagnetic waves, for example.

[0050] Another exemplary embodiment of a gas spring and gas damper assembly **300** is shown in FIG. 4 that includes a first or upper end member **302** and a second or lower end member **304** disposed in longitudinally-spaced relation to the first end member. Assembly **300** also includes a longitudinally-extending axis **AX** that extends generally between first and second end members **302** and **304**. Second end member **304** includes a side wall **306** and an end wall **308** that at least partially define an end member cavity **310** within the second end member.

[0051] Assembly **300** also includes a flexible wall **312** that is disposed circumferentially about axis **AX** and extends longitudinally between a first or upper end **314** and a second or lower end **316**. First end **314** of flexible wall **312** is operatively connected along first end member **302**, and second end **316** of the flexible wall is secured along second end member **304** such that a spring chamber **318** is at least partially defined between the first and second end members.

[0052] It will be appreciated that first end member **302** and second end member **304** can be of any suitable type, kind, configuration, arrangement and/or construction. In the exemplary arrangement shown in FIG. 4, first end member **302** includes an outer peripheral wall **320** along which first end **314** of flexible wall **312** is secured in a substantially fluid-tight manner, such as by using a conventional retaining ring **322**, for example. First end member **302** is also shown as including a passage **324** that extends through the first end member and is suitable for fluidically interconnecting spring chamber **318** with an external atmosphere (e.g., such as by way of a vent or exhaust) or a pressurized gas system (e.g., an air compressor, a compressed air reservoir, a valve assembly or other device), such as by way of a gas transfer line **326**.

[0053] Second end member **304**, which is sometimes referred to in the art as a piston, is shown in FIG. 4 as including side wall **306** that extends longitudinally away from first end member **302** from along end wall **308**. An outer surface **328** of side wall **306** is shown in FIG. 4 as being substantially cylindrical. However, it will be appreciated that the outer surface or outer profile of the second end member can be of any suitable size, shape and/or configuration, such as cylindrical, frustoconical, curvilinear or any combination thereof. Second end **316** of flexible wall **312** is disposed along outer surface **328** of side wall **306** and is secured thereto in a substantially fluid-tight manner, such as by using a retaining ring **330**, for example. Side wall **306** also includes an inner surface **332** that at least partially defines end member cavity **310**. In one preferred arrangement, inner surface **332** will be substantially cylindrical along the longitudinal length thereof.

[0054] It will be appreciated that flexible wall **312** can be of any suitable kind, type, configuration, arrangement and/or construction. In the exemplary embodiment shown, flexible wall **312** is an elongated flexible sleeve or bellows of a suitable construction. However, a convoluted bellows-type flexible wall having one or more convolutions could alternately be used. Flexible wall **312** is shown in the present exemplary embodiment as being of a rolling lobe-type construction in which a rolling lobe **334** rolls or is otherwise displaced along outer surface **328** of side wall **306** as the first and second end members are longitudinally displaced relative to one another.

[0055] Gas spring and gas damper assembly **300** is also shown in FIG. 4 as including a damper piston **336** that is received within end member cavity **310** for longitudinal displacement along inner surface **332** of side wall **306**. As such, end member cavity **310** is separated into a first portion **310A** and a second portion **310B** on opposing sides of damper piston **336**. A damper rod **338** operatively connects damper piston **336** to first end member **302** such that displacement of the first and second end members relative to one another will generate or otherwise result in movement of damper piston **336** within end member cavity **310**. Such movement of damper piston **336** can operate to dissipate kinetic energy acting on gas spring and gas damper assembly **300** and, thus, damp vibrations and other inputs, as is understood of those of skill in the art. It will be appreciated that the interconnection between damper rod **338** and first end member **302** can be made in any suitable manner and by way of any suitable connection and/or arrangement, as discussed above with regard to FIG. 1.

[0056] In the exemplary arrangement shown in FIG. 4, assembly **300** acts to damp kinetic energy by allowing gas to flow between spring chamber **318** and first portion **310A** of end member cavity **310**, as damper piston **336** is displaced along inner surface **332** of sidewall **306**. It will be appreciated that such a flow of gas can be affected in any suitable manner, such as by providing one or more passages **340** extending through end wall **308** of second end member **304**, for example. It will be appreciated, however, that any other suitable arrangement could alternately be used. Additionally, it will be appreciated that one or more

optional components and/or elements, which are represented by dashed box **342**, could be fluidically interconnected on or along passage **340** in any suitable manner, such as throttle elements, valves and/or porous filter elements, for example.

[0057] During use, a gas spring and gas damper assembly, in accordance with the subject matter of the present disclosure, such as assembly **300**, for example, will operate to dissipate kinetic energy acting on the assembly by causing gas flow between spring chamber **318** and end member cavity **310**. As first and second end members **302** and **304** are displaced toward one another, the volume of spring chamber **318** will decrease and the volume of first portion **310A** of end member cavity **310** will increase, the latter being due to the movement of damper piston **336** away from end wall **308** of second end member **304**. As discussed above, increased damping performance can be achieved through the use increased internal differential pressures within a gas damper. One desirable benefit of first portion **310A** of the end member cavity increasing in volume as spring chamber **318** decreases in volume is that the differential pressure between that of the spring chamber, as indicated by reference character **P3**, and the end member cavity pressure, indicated by reference character **P4**, is not expected to be significantly reduced.

[0058] In the exemplary embodiment in FIG. 4, an end wall **344** is secured across the open end (not numbered) of second end member **304**, generally opposite end wall **308**. This results in second portion **310B** of end member cavity **310** being a substantially captured or enclosed volume, which would act against damper piston **336** during displacement of the same away from end wall **308**. To minimize or at least reduce any such counter-acting forces, it is desirable permit or otherwise allow gas to flow between first portion **310A** and second portion **310B** of end member cavity **310** as the damper piston is displaced along side wall **332**.

[0059] It will be appreciated that such a flow of gas can be provided in any suitable manner, such as by providing a gap between the outer peripheral edge of the damper piston and the inner surface of the side wall and by allowing gas to

flow through the gap as the damper piston is displaced. Alternately, as shown in FIG. 4, damper piston **336** can include a suitable sealing member **346** for forming a substantially fluid-tight seal between the damper piston and the inner surface of the side wall. In such case, one or more fluid passages **348** can be provided through damper piston **336** in any suitable manner. Additionally, a throttle element, valve or other device can optionally be fluidically interconnected along passage **348**, such as is generally represented by reference number **350** in FIG. 4.

[0060] An alternate embodiment of gas spring and gas damper assembly **300** is shown in FIG. 5 as assembly **300'**. It will be appreciated that assemblies **300** and **300'** are similar and, as such, like reference numbers are used to describe common features and components. New or different features or components are shown and described in FIG. 5 using primed (') reference numbers.

[0061] Gas spring and gas damper assembly **300'** differs from assembly **300** in that second end member **304'** includes an end wall **344'** that has an opening or passage **352'** extending therethrough. As such, second portion **310B'** of end member cavity **310'** is open to external atmospheric pressure. In such case, gas within the second portion of the end member cavity does not significantly act against damper piston **336'** during movement thereof along inner surface **332** of side wall **306**. As such, passage **346** which is shown in FIG. 4 extending through damper piston **336** in assembly **300** can be omitted in the arrangement shown in FIG. 5.

[0062] Yet another example of an embodiment of a gas spring and gas damper assembly **400** in accordance with the subject matter of the present disclosure is shown in FIG. 6. Gas spring and gas damper assembly **400** includes a first end member, such as a bead plate **402**, for example, and an opposing second end member, such as a first piston **404**, for example, that is spaced longitudinally from the first end member such that an axis **AX** extends longitudinally therebetween. A first flexible wall **406** is disposed circumferentially about axis **AX** and extends longitudinally between opposing first and second ends **408** and **410**. The opposing first and second ends can be respectively

secured to the first and second end members in any manner suitable for forming a substantially fluid-tight seal between the flexible wall and the end member, such as by using a crimped connection **412** or a press-fit connection **414**, for example. A spring chamber **416** is at least partially defined by first flexible wall **406** between bead plate **402** and first piston **404**.

[0063] First piston **404** includes an end wall **418** that extends approximately transverse (e.g., perpendicular) to axis **AX** and a side wall **420** that extends generally longitudinally from the end wall. In the exemplary embodiment shown in FIG. 6, side wall **420** is approximately cylindrical. However, it will be appreciated that any other suitable shape and/or configuration could alternately be used, such as cylindrical, frustoconical, curvilinear or any combination thereof, for example. First flexible wall **406** forms a rolling-lobe **422** along an outer surface **424** of side wall **420** and is displaced therealong in a conventional manner as assembly **400** is extended and compressed during use. End wall **418** and an inner surface **426** of side wall **420** at least partially define a piston cavity **428** having an open end **430**. A cover wall **432** extends across open end **430** to further define piston cavity **428**. Cover wall **432** can be secured on or along the side wall in any manner suitable for withstanding the anticipated loads borne by assembly **400**, such as by using a flowed-material joint **434**, for example.

[0064] Gas spring and gas damper assembly **400** also includes a second flexible wall **436** that is disposed at least partially within piston cavity **428**. In the exemplary arrangement shown in FIG. 6, second flexible wall **436** is disposed circumferentially around axis **AX** and extends between opposing first and second ends **438** and **440**. First end **438** of second flexible wall **436** is shown as being secured on first piston **404** and can be attached thereto in any suitable manner. For example, a mounting plate **442** can be secured on end wall **418** within piston cavity **428**. The mounting plate can include an outer peripheral wall **444** to which first end **438** is secured, such as by using a crimp ring **446**, for example. Mounting plate **442** can be secured on or along first piston **404** in any suitable

manner, such as by attaching the mounting plate to end wall **418** using fasteners **448**, for example.

[0065] In gas spring and gas damper assembly **400**, second flexible wall **436** preferably extends or is otherwise connected across piston cavity **428** such that the piston cavity is separated into first and second chambers **450** and **452** that are substantially fluidically-isolated from one another. Such an arrangement can be provided in any suitable manner. For example, a third end member, such as a second or damper piston **454**, for example, can be disposed within piston cavity **428**. In the exemplary arrangement shown, second piston **454** includes a second end wall **456** disposed approximately transverse (e.g., perpendicular) to axis **AX** and a second side wall **458** that extends generally longitudinally from the second end wall. Second end **440** of second flexible wall **436** can be secured on or along second piston **454** in any suitable manner, such as along second side wall **458** using a crimp ring **460**, for example. In the exemplary arrangement shown, second flexible wall **436** can form a rolling lobe **462** between side wall **420** of first piston **404** and second side wall **458** of second piston **454**. In such case, rolling lobe **462** will roll or be otherwise displaced along side walls **420** and **458** as the second piston moves relative to the first piston, as will be discussed hereinafter.

[0066] In one preferred arrangement, spring chamber **416** and first chamber **450** of piston cavity **428** are in fluid communication with one another such that pressurized gas within the gas spring and gas damper assembly can flow between the spring chamber and the first chamber during dynamic operation and use of assembly **400**, as will be discussed in greater detail hereinafter. It will be appreciated, however, that the spring chamber and the first chamber can be placed into fluid communication with one another in any suitable manner. In the exemplary embodiment shown in FIG. 6, piston **404** includes a passage **464** extending through end wall **418** through which pressurized gas can flow to pass between the spring chamber and the first chamber. As discussed previously with regard to other embodiments, it will be appreciated that any suitable number of one or more passages can be used and that any such quantity of one or more

passages can be of any suitable size, shape, configuration, arrangement or combination thereof. Additionally, throttle elements, valves or other fluid flow-related devices can optionally be fluidically interconnected on or along any such one or more passage or otherwise fluidically interconnect the spring chamber and the first chamber.

[0067] In the exemplary arrangement shown in FIG. 6, second piston **454** is interconnected with the first end member (e.g., bead plate **402**) by way of a damper or connector rod **466**. The second piston can be secured to connector rod **466** in any suitable manner, such as by using a threaded connection or a flowed-material joint **468**, for example. Additionally, connector rod **466** can be secured to bead plate **402** in any suitable manner, such as by using a plurality of threads **470** formed along connector rod **466** and a threaded nut **472** that interengages the same, for example. A vibration isolating element **474** can optionally be interconnected between the connector rod and the bead plate. In the exemplary embodiment shown, vibration isolating element **474** includes an elastomeric body **476** that is received within an opening **478** formed through bead plate **402**. A first, comparatively-rigid washer **480** engages a shoulder **482** formed on the connecting rod. A second, comparatively-rigid washer **484** is disposed along the elastomeric body opposite the first washer and abuttingly engages threaded nut **472**, which captures connector rod **466** on bead plate **402**.

[0068] During use, the first and second end members (e.g., bead plate **402** and first piston **404**) move longitudinally relative to one another and it will be recognized that the first end member and connector rod are axially interconnected with one another in a substantially rigid manner. To accommodate such relative longitudinal movement, the second end member preferably permits the connector rod to pass into an out of the piston cavity formed thereby (e.g., piston cavity **428**) in a suitable manner, such as by way of a sliding joint **486** formed along end wall **418** of first piston **404**, for example. Additionally, it will be appreciated that the movement of the first and second end members relative to one another may not be purely axial. Rather, the second end member may move along an arcuate or other path as the first and second

members are displaced toward and away from one another. In some cases, vibration isolating element **474** may be capable of accommodating such movement paths. However, first piston **404** can optionally include a spherical bearing **488** or other element suitable for permitting relative pivotal movement or rotation between the first piston and the connector rod.

[0069] As mentioned above, gas spring and gas damper assembly **400** is extended and collapsed in the generally longitudinal direction during normal operation and use. As the first and second end members (e.g., bead plate **402** and first piston **404**) of the assembly are displaced toward one another, the spring chamber (e.g., spring chamber **416**) is decreased in volume, which results in a dynamic pressure increase of the gas contained therein. This same movement of the first and second end members toward one another, however, also causes the first chamber (e.g., first chamber **450**) of the piston cavity (e.g., cavity **428**) to increase in volume, which results in a dynamic pressure reduction of the gas contained therein. The differential pressure between the spring chamber and the first chamber causes, at least in part, the flow of gas from the spring chamber into the first chamber of the piston cavity, such as through the one or more passages fluidically interconnecting the same. As discussed above, this fluid flow can be used to dissipate kinetic energy acting on gas spring and gas damper assembly **400**.

[0070] In a similar, but opposite manner, as the first and second end members of assembly **400** are displaced away from one another, the spring chamber is increased in volume, which results in a dynamic pressure decrease of the gas contained therein. This same movement of the first and second end members away from one another also causes the first chamber of the piston cavity to decrease in volume, which results in a dynamic pressure increase of the gas contained therein. Again, this differential pressure between the spring chamber and the first chamber results in the flow of gas from the first chamber of the piston cavity into the spring chamber, and can be used to convert kinetic energy into heat, as discussed above.

[0071] In the exemplary embodiment shown, the increase in volume of the first chamber (e.g., first chamber **450**) is due to the displacement of connector rod **466** into the piston cavity **428**, which displaces second piston **454** toward cover wall **432** and thereby increases the volume of first chamber **450** and decreases the volume of second chamber **452** of the piston cavity. To reduce resistance to movement of second piston **454** within piston cavity **428**, one or more vent holes **490** can be provided through cover wall **432** and/or side wall **420** to permit fluid communication between second chamber **452** and an external atmosphere **ATM**.

[0072] Still another example of an embodiment of a gas spring and gas damper assembly **500** in accordance with the subject matter of the present disclosure is shown in FIG. 7. Gas spring and gas damper assembly **500** includes a gas spring, which is generally identified by item number **502**, and a gas damper, which is generally identified by item number **504**. In the exemplary arrangement shown, gas damper **504** is at least partially received within or otherwise encapsulated by gas spring **502**. It will be appreciated, however, that other configurations and/or arrangements could alternately be used.

[0073] In the exemplary embodiment shown, gas spring **502** includes a first or upper end member **506**, such as a bead plate or top cap, for example, that includes an end member wall **508**, an outer peripheral wall portion **510** and a passage wall **512** that at least partially defines a passage (not numbered) extending through end member wall **508**. Gas spring **502** also includes a second or lower end member **514**, such as a bead plate or piston, for example, that is disposed in spaced relation to first end member **506** such that an axis **AX** extends longitudinally therebetween. In the exemplary arrangement shown in FIG. 7, second end member **514** is shown as being a piston. As such, it will be appreciated that gas spring **502** is of a rolling lobe-type construction. It should be understood, however, that the subject matter of the present disclosure is equally applicable for use in association with gas springs of other types, kinds, constructions and/or arrangements, such as convoluted bellows-type designs, for example.

[0074] Second end member **514** is shown as including a side wall **516** that extends generally longitudinally between a first end **518** and an opposing second end **520** of the second end member. An end wall **522** extends approximately transverse (e.g., perpendicular) to axis **AX** across side wall **516** along first end **518** to form a substantially closed end of the second end member. In the exemplary arrangement shown in FIG. 7, side wall **516** at least partially defines an open end along second end **520**. Additionally, side wall **516** is shown as being approximately cylindrical in shape. It will be appreciated, however, that any other arrangement, configuration and/or construction could alternately be used, such as cylindrical, frustoconical, curvilinear or any combination thereof, for example.

[0075] End wall **522** is shown as including a first or inner wall portion **524** and a second or outer wall portion **526** that is disposed radially outwardly from the inner wall portion. Additionally, inner wall portion **524** is disposed axially outwardly from (i.e., in longitudinally-spaced relation to) outer wall portion **526** such that an inner side wall portion **528** extends longitudinally between the inner and outer wall portions.

[0076] Gas spring **502** also includes a flexible wall **530**, which is shown in FIG. 7 as being an elongated sleeve-type flexible wall that extends between a first or upper end **532** and a second or lower end **534**. In the exemplary arrangement shown, first end **532** of flexible wall **530** is received along outer peripheral wall portion **510** of first end member **506** and secured thereon using a suitable retaining member, such as a crimp ring **536**, for example, such that a substantially fluid-tight seal is formed therebetween. Second end **534** of the flexible wall is received along second end member **514**, such as along side wall **516** adjacent first end **518**, for example, and is secured thereon using a suitable retaining member, such as a crimp ring **538**, for example, such that a substantially fluid-tight seal is formed therebetween. Flexible wall **530** is disposed circumferentially about axis **AX** and at least partially defines a spring chamber **540** between the first and second end members. Additionally, flexible wall **530** forms a rolling lobe **542** along an outer surface **544** of side wall **516** of

the second end member and is displaced therealong in a conventional manner as assembly **500** is extended and compressed during use.

[0077] Gas damper **504** includes a damper housing **546** and a damper piston **548** disposed within the damper housing. Gas damper **504** can also include a damper rod **550** or other suitable element that is operatively connected to damper piston **548**. In the exemplary arrangement shown, damper housing **546** includes a housing wall **552** that at least partially defines a damping chamber **554**. Housing wall **552** is shown as including a first or upper wall portion **556**, a second or lower wall portion **558** that is disposed in longitudinally-spaced relation to the first wall portion and a side wall portion **560** that extends in a generally longitudinal direction therebetween.

[0078] Damper piston **548** includes a piston body **562** with a first side **564** and an opposing second side **566** that is spaced axially from the first side. An outer peripheral side wall **568** extends longitudinally between the first and second sides of the damper piston. An annular groove **570** can optionally be included that extends radially inwardly into the piston body, such as may be suitable for receiving a sealing member **572**, for example.

[0079] Damper piston **548** is received within damping chamber **554** of damper housing **546** such that the damper piston separates the damping chamber into a first or upper chamber portion **574** and a second or lower chamber portion **576**. In the exemplary embodiment shown in FIG. 7, the outer peripheral extent of damper piston **548** is complimentary to an inner surface **578** of side wall portion **560** of housing wall **552** such that the damper piston is capable of reciprocal movement in an axial direction (i.e., longitudinally along at least a portion of side wall portion **560**) within the damper housing. Additionally, the complimentary relationship between the outer peripheral extent of damper piston **548** and the inner surface of side wall portion **560** results in the damper piston at least partially fluidically isolating the first and second portions of damping chamber **554** from one another. In the exemplary arrangement shown in FIG. 7, sealing member **572** can operate to form a substantially fluid-tight seal with inner surface **578** of side wall portion **560** such that first and second chamber portions **574** and

576 of damping chamber **554** are substantially fluidically-isolated from one another.

[0080] It will be appreciated that gas damper **504** can be operatively connected within the gas spring between the first and second end members thereof in any suitable manner for causing relative movement between the damper piston and the damper housing to thereby dissipate kinetic energy acting on the gas spring and gas damper assembly during dynamic operation and use thereof. For example, the damper housing could be rigidly attached or otherwise operatively connected to one of the first and second end members of the gas spring with the damper piston attached or otherwise operatively connected to the other of the first and second end members.

[0081] In the exemplary embodiment shown in FIG. 7, damper housing **546** includes a connector wall **580** that projects longitudinally from upper wall portion **556** and is received within the passage defined by passage wall **512** in first end member **506**. Connector wall **580** can be attached or otherwise operatively connected to end member wall **508** in any suitable manner, such as by using a threaded connection or a flowed-material joint **582**, for example. In this manner, damper housing **546** could be considered a part of first end member **506**. In an alternate arrangement, the damper housing could be integral to or otherwise be a part or portion of the end member.

[0082] Additionally, damper rod **550** is shown as being operatively connected between damper piston **548** and second end member **514** such that relative movement between the first and second end members results in relative movement between the damper piston and the damper housing to thereby dissipate kinetic energy acting on the gas spring and gas damper assembly during dynamic operation and use thereof. In the exemplary embodiment shown in FIG. 7, damper rod **550** extends longitudinally between a first end **584** and an opposing second end **586**. First end **584** is shown as being operatively connected to damper piston **548**, such as along second side **566** thereof, for example. Second end **586** of the damper rod projects outwardly from damper

housing **546**, such as by way of a rod opening **588** that extends through lower wall portion **558** of the housing wall, for example.

[0083] Second end **586** can be operatively connected to damper piston **548** and second end member **514** in any suitable manner. For example, first end **584** of damper rod **550** could be rigidly connected to damper piston **548**, such as by using a threaded connection or a flowed-material joint, for example. As another example, second end **586** of the damper rod could be rigidly connected to second end member **514**, such as by using a threaded connection or a flowed-material joint, for example. It will be appreciated, however, that the movement of the first and second end members relative to one another often does not act in a purely axial direction. Rather, the first and second end members are often disposed at an angle relative to one another and/or move along an arcuate or other path as the first and second end members are displaced toward and away from one another. As such, a connection capable of permitting pivotal movement or other angular displacement, as is represented by arrows **PVT** in FIG. 7, could be utilized along the first and/or second ends of damper rod **550**. Such connections are schematically represented in FIG. 7 by dashed boxes **590** and **592** along first and second ends **584** and **586**, respectively, of damper rod **550**. It will be appreciated that any such connection, if provided, can be of any suitable type, kind, arrangement, configuration and/or construction, such as a ball and socket joint, spherical bearing and/or universal joint, for example.

[0084] As discussed above, gas spring and gas damper assembly **500** is extended and collapsed in a generally longitudinal direction during normal operation and use thereof. As first and second end member **506** and **514** are displaced toward one another, damper piston **548** is longitudinally displaced toward first wall portion **556** of housing wall **560**. Movement of the damper piston in this first or collapsing direction results in first chamber portion **574** decreasing in volume and second chamber portion **576** is increasing in volume. Additionally, as the first and second end members are displaced away from one another, damper piston **548** is longitudinally displaced toward second wall portion **558** of housing wall **560**. Movement of the damper piston in this second or extending

direction results in first chamber portion **574** increasing in volume and second chamber portion **576** decreasing in volume.

[0085] It is desirable for the movement of damper piston **548** to generate differential pressures that result in gas flow into and out of damping chamber **554** to thereby dissipate kinetic energy acting on the gas spring and gas damper assembly. It will be appreciated that such gas flow can be accomplished in any suitable manner and through the use of fluid passages of any suitable size, shape, quantity, configuration and/or arrangement. Additionally, it will be appreciated that additional components, connectors and/or other elements could be fluidically interconnected with damping chamber **554** in any suitable manner. Furthermore, flow control devices and/or elements of any suitable type and/or kind can also, optionally, be included in fluid communication with damping chamber **554**, such as throttle elements, valves and/or porous filter elements, for example.

[0086] In the exemplary embodiment shown, damper housing **548** includes a plurality of fluid passages extending therethrough that are suitable for transferring gas into and out of damping chamber **554**. For example, housing wall **560** is shown in FIG. 7 as including a first or upper fluid passage **594** that extends through upper wall portion **556** and one or more second fluid passages that extend through lower wall portion **568**. In the exemplary embodiment shown, a plurality of second fluid passages **596** extend through the lower wall portion.

[0087] It will be appreciated that a gas atmosphere **ATM** will typically exist that is external to gas spring and gas damper assembly **500**. In a preferred arrangement, one of first fluid passage **594** and second fluid passage **596** is disposed in fluid communication with the external gas atmosphere and the other of the first and second fluid passages is disposed in fluid communication with the spring chamber of gas spring **502**. In the exemplary embodiment shown, connector wall **580** at least partially defines a connector passage **598** that is open to gas atmosphere **ATM** at one end and is in fluid communication with first chamber portion **574** of damping chamber **554** at the other end through first fluid passage **594**. In this way, gas from atmosphere **ATM** can be transferred into and

out of first chamber portion **574**, as is represented by arrows **FL1**, in response to movements of damper piston **548** within damping chamber **554**.

[0088] Additionally, in the exemplary embodiment shown in FIG. 7, second chamber portion **576** is in fluid communication with spring chamber **540** through second fluid passages **596**. As such, pressurized gas within spring chamber **540** can flow into and out of second chamber portion **576** of damping chamber **554**, such as is represented by arrows **FL2**, for example. As discussed above with regard to other embodiments, such fluid flow can be used to dissipate kinetic energy acting on gas spring and gas damper assembly **500**. Furthermore, the characteristics of such fluid flow between spring chamber **540** and second chamber portion **576** of damping chamber **554** can be varied or otherwise controlled in any suitable manner, such as by including one or more flow control devices and/or elements in fluid communication with either or both of the first and second fluid passages. Such flow control devices are schematically represented in FIG. 7 by dashed boxes **600**, **602** and **604**. It will be appreciated that such flow control devices can be substantially similar to one another, or different from one another such that different fluid flow characteristics can be achieved in different areas and/or directions of fluid flow, such as has been discussed above with regard to other embodiments, for example.

[0089] As used herein with reference to certain elements, components and/or structures (e.g., "first end" and "second end"), numerical ordinals merely denote different singles of a plurality and do not imply any order or sequence unless specifically defined by the claim language. Additionally, the term "gas" is used herein to broadly refer to any gaseous or vaporous fluid. Most commonly, air is used as the working medium of suspension systems and the components thereof, such as those described herein. However, it will be understood that any suitable gaseous fluid could alternately be used.

[0090] While the subject novel concept has been described with reference to the foregoing embodiments and considerable emphasis has been placed herein on the structures and structural interrelationships between the component parts of the embodiments disclosed, it will be appreciated that other embodiments can

be made and that many changes can be made in the embodiments illustrated and described without departing from the principles of the subject novel concept. Obviously, modifications and alterations will occur to others upon reading and understanding the preceding detailed description. Accordingly, it is to be distinctly understood that the foregoing descriptive matter is to be interpreted merely as illustrative of the present novel concept and not as a limitation. As such, it is intended that the subject novel concept be construed as including all such modifications and alterations insofar as they come within the scope of the appended claims and any equivalents thereof.

CLAIMS:

1. A gas spring and gas damper assembly comprising:
 - a first end member;
 - a second end member disposed in longitudinally-spaced relation to said first end member;
 - a flexible wall operatively connected between said first and second end members such that a spring chamber is at least partially defined therebetween;
 - a damping chamber wall on said first end member and at least partially disposed within said spring chamber, said damping chamber wall at least partially defining a damping chamber; and,
 - a damper piston disposed within said damping chamber such that a first portion of said damping chamber is formed along one side of said damper piston and a second portion of said damping chamber is formed along an opposing side of said damper piston, said damper piston operatively connected to said second end member and capable of reciprocal movement within said damping chamber in an approximately longitudinal direction;
 - said first portion of said damping chamber disposed in fluid communication with said spring chamber such that gas can be transferred between said first portion and said spring chamber during reciprocal movement of said damper piston to thereby dissipate kinetic energy acting on said gas spring and gas damper assembly; and,
 - said second portion of said damping chamber disposed in fluid communication with one of said first portion of said damping chamber and an associated gas atmosphere external to said gas spring and gas damper assembly.
2. A gas spring and gas damper assembly according to claim 1, wherein said damping chamber wall includes one or more passages extending therethrough and said first portion of said damping chamber is in fluid communication with said spring chamber through said one or more passages.

3. A gas spring and gas damper assembly according to claim 2 further comprising one of a throttle element, a valve and a porous metal filter disposed in fluid communication along one of said one or more passage extending through said damping chamber wall.
4. A gas spring and gas damper assembly according to claim 1, wherein said damper piston includes one or more passages extending therethrough and said second portion of said damping chamber is in fluid communication with said first portion through said one or more passages.
5. A gas spring and gas damper assembly according to claim 4 further comprising one of a throttle element, a valve and a porous metal filter disposed in fluid communication along one of said one or more passage extending through said damping chamber wall.
6. A gas spring and gas damper assembly according to claim 1, wherein said damping chamber wall is a first wall of said second end member, and said second end member includes a second wall with one or more passages extending through said second wall, said second portion of said damping chamber disposed in fluid communication with the associated external atmosphere through said one or more passages extending through said second wall.
7. A gas spring and gas damper assembly according to claim 1 further comprising a damper rod operatively connecting said damper piston and said first end member.
8. A gas spring and gas damper assembly according to claim 7, wherein said damper rod is pivotally attached to at least one of said first end member and said damper piston.

9. A gas spring and gas damper assembly according to claim 7, wherein said second end member includes a pivot joint and said damper rod operatively engages said second end member at said pivot point such that said second end member can pivot with respect to said damper rod.

10. A gas spring and gas damper assembly according to claim 1, wherein a substantially fluid-tight seal is formed between said damper piston and said second end member.

11. A gas spring and gas damper assembly according to claim 10, wherein a sealing element is compressively positioned between said damper piston and said damping chamber wall to form said substantially fluid-tight seal with said sealing element slidingly engaging said damping chamber wall during reciprocal movement of said damper piston within said damping chamber.

12. A gas spring and gas damper assembly according to claim 10, wherein said flexible wall is a first flexible wall and said gas spring and gas damper assembly further comprises a second flexible wall operatively connected between said damper piston and said second end member to form said substantially fluid-tight seal, said second flexible wall forming a rolling-lobe that rolls along said damping chamber wall during reciprocal movement of said damper piston.

13. A suspension system comprising:

a gas spring and gas damper assembly according to any one of claims 1-12; and,

a pressurized gas system including a pressurized gas source in fluid communication with at least said spring chamber of said gas spring and gas damper assembly.

14. A suspension system according to claim 13, wherein said gas spring and gas damper assembly is one of a plurality of gas spring and gas damper assemblies in fluid communication with said pressurized gas system.
15. A suspension system according to claim 13 further comprising a control system in electrical communication with said pressurized gas system and operative to control said pressurized gas system to selectively transfer pressurized gas into and out of said gas spring and gas damper assembly.
16. A method of operating a gas spring and gas damper assembly, said method comprising:
- a) providing a first end member and a second end member with said second end member including a damping chamber wall at least partially defining a damping chamber;
 - b) providing a damper piston received within said damping chamber such that said damping chamber has first and second portions on opposing sides of said damper piston and forming a gas damper by operatively connecting said damper piston to said first end member such that relative displacement of said first and second end members results in displacement of said damper piston within said damping chamber;
 - c) forming a spring chamber about said gas damper from a first flexible wall secured between said first and second end members; and,
 - d) transferring pressurized gas between said spring chamber and said first portion of said damping chamber to dissipate kinetic energy acting on said gas spring and gas damper assembly.
17. A method according to claim 16 further comprising:
- e) transferring gas between said second portion of said damping chamber and one of said first portion of said damping chamber and an associated atmosphere external to said gas spring and gas damper assembly.

1/7


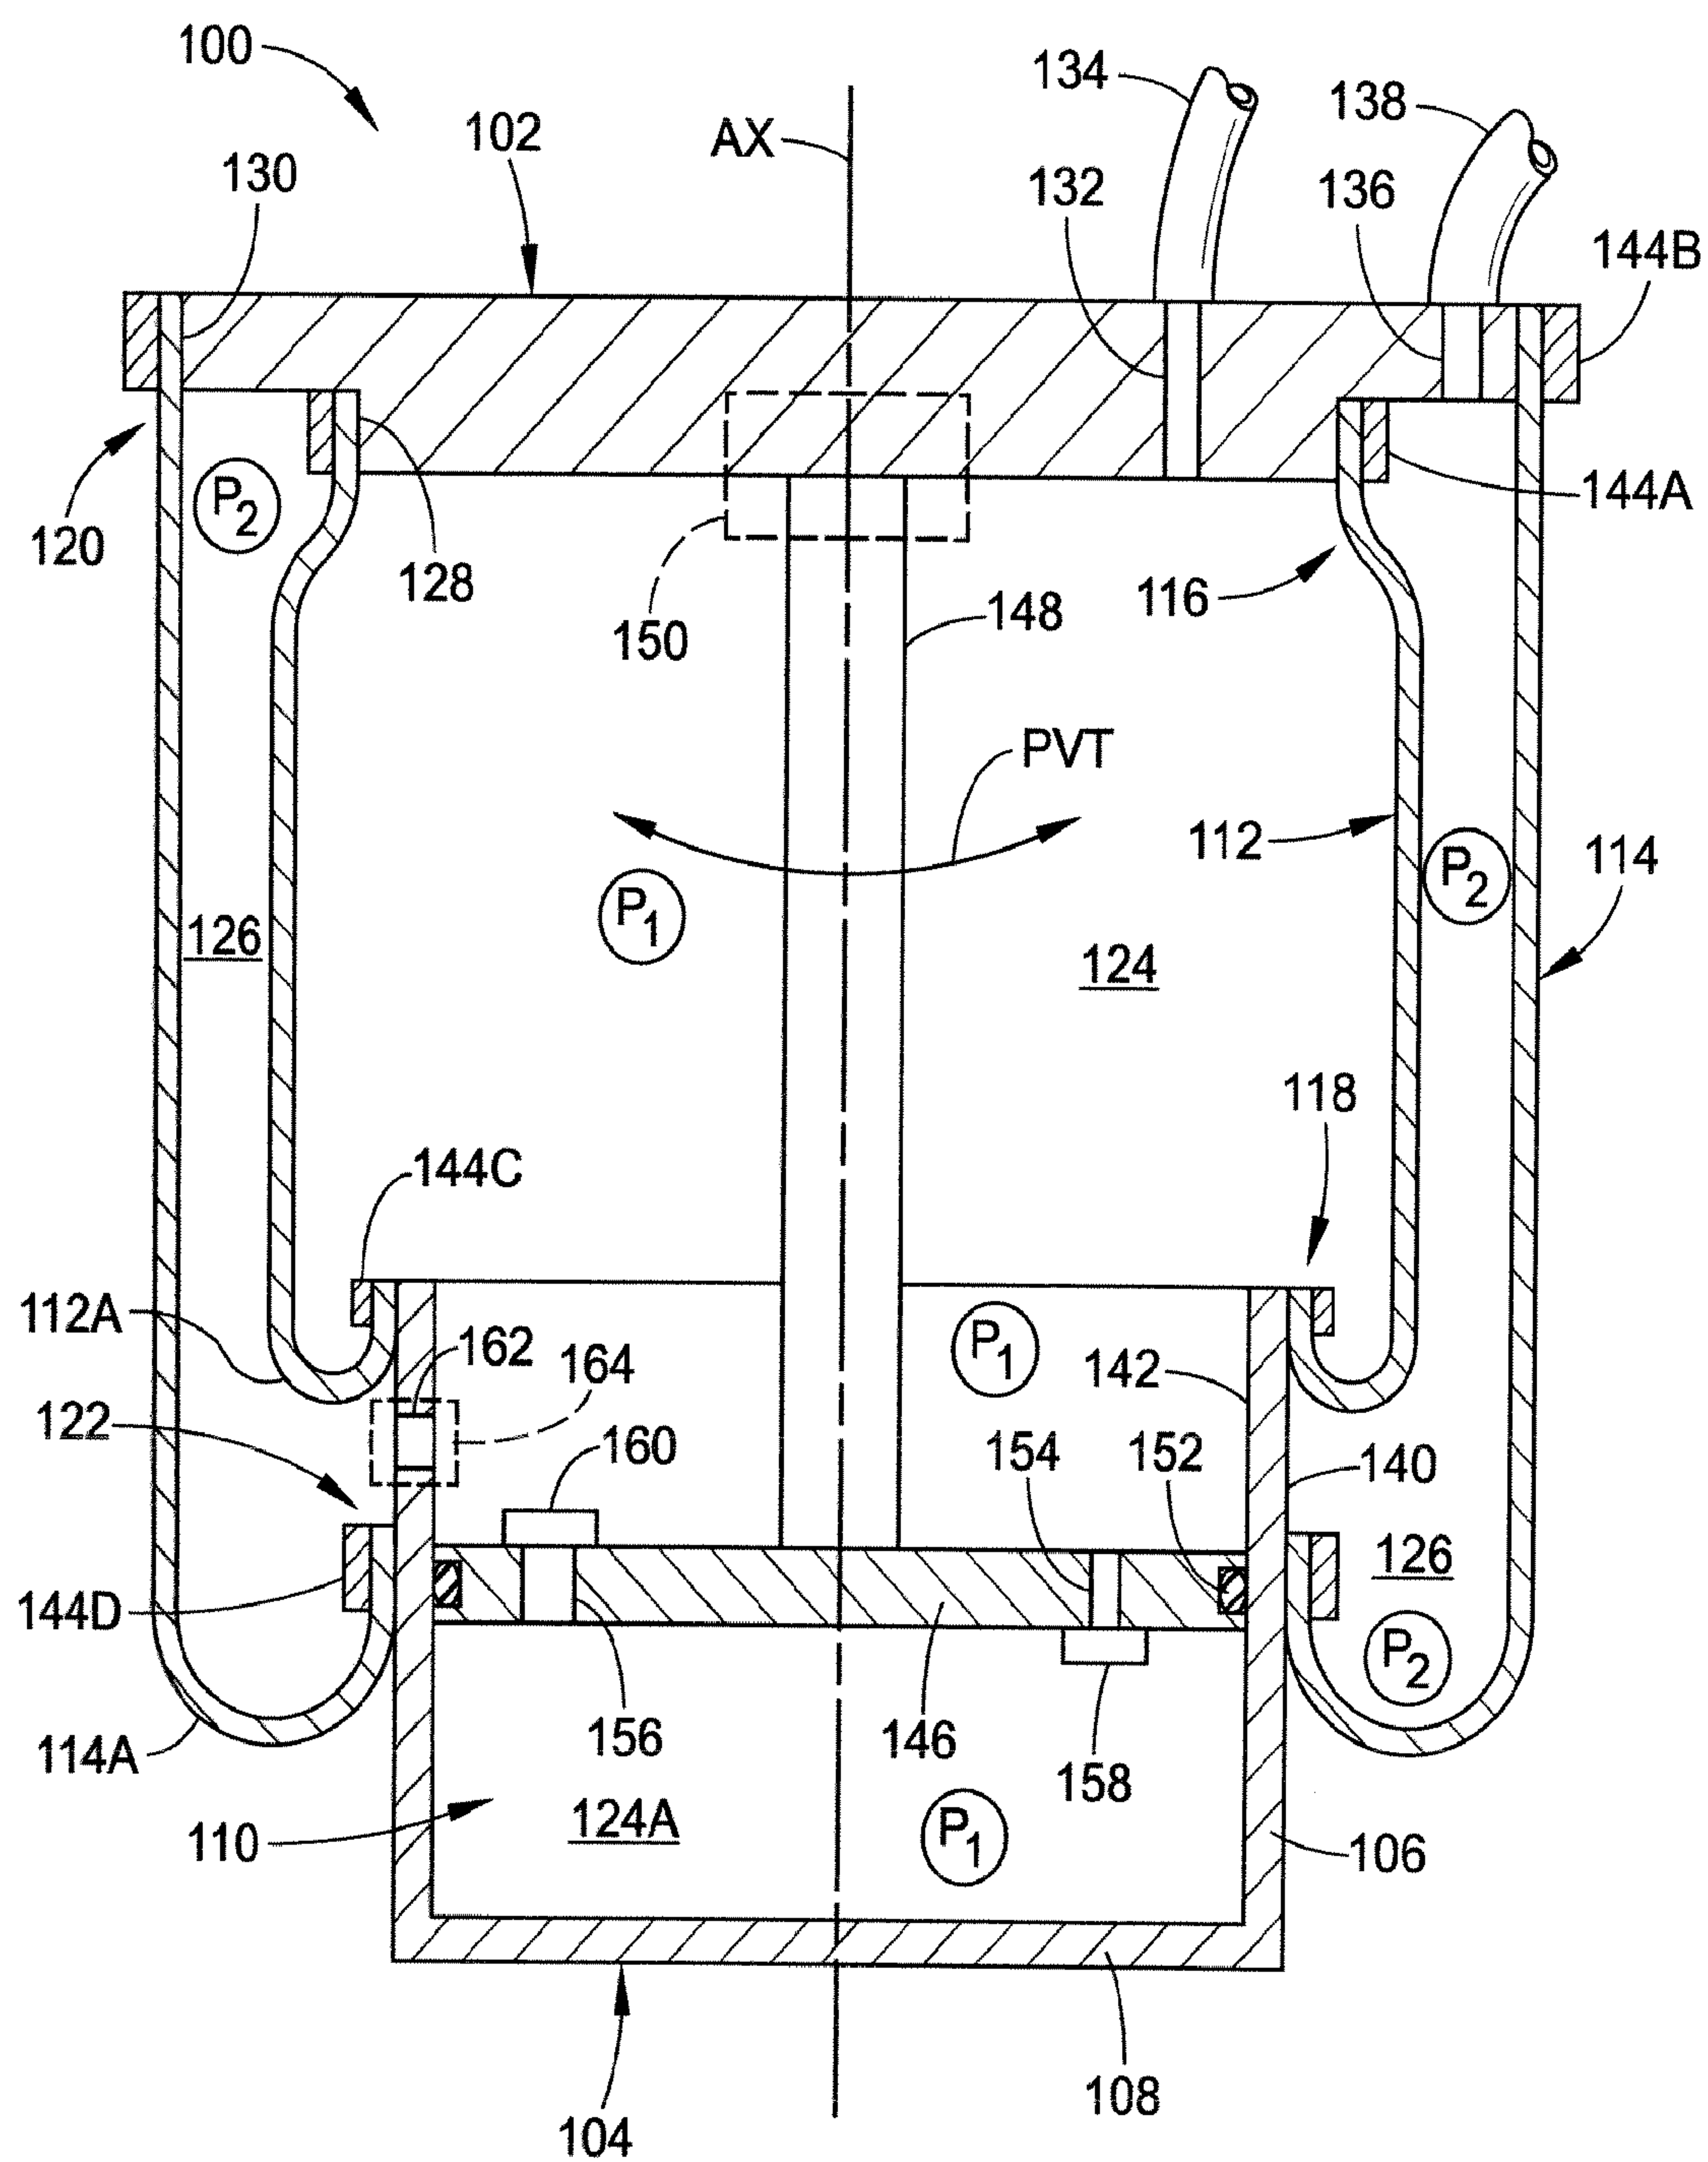


FIG. 1

2/7

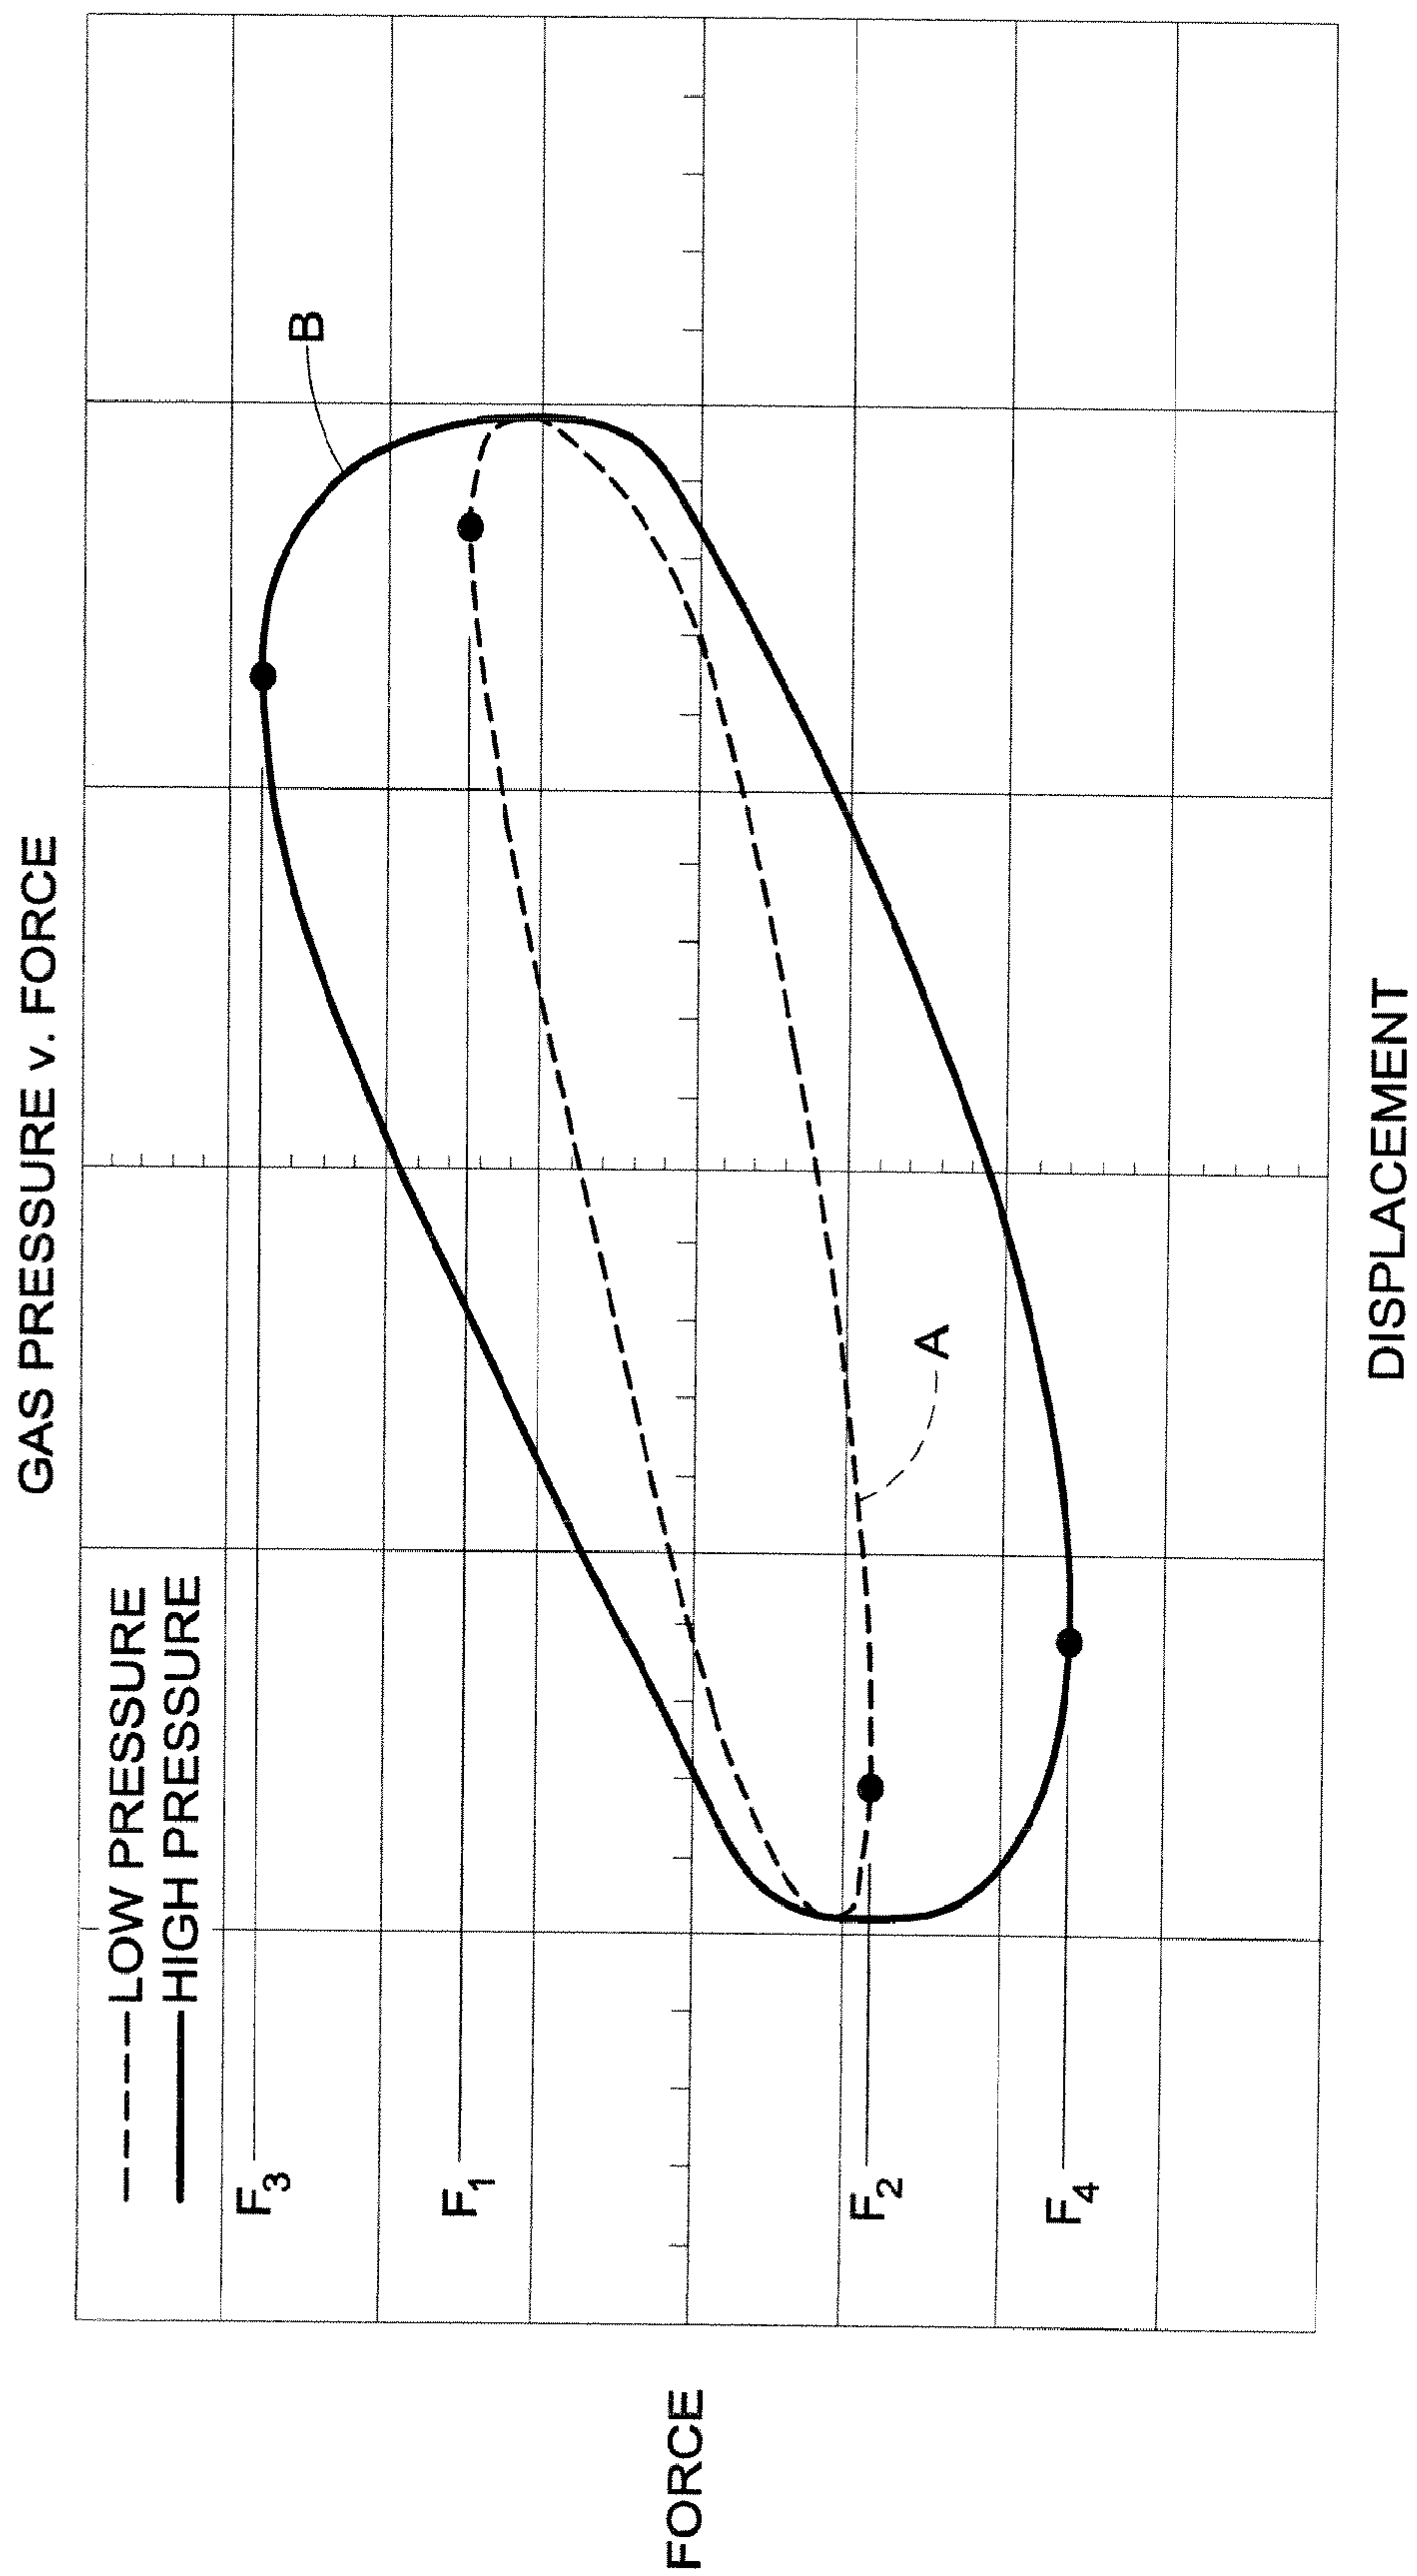

3/7

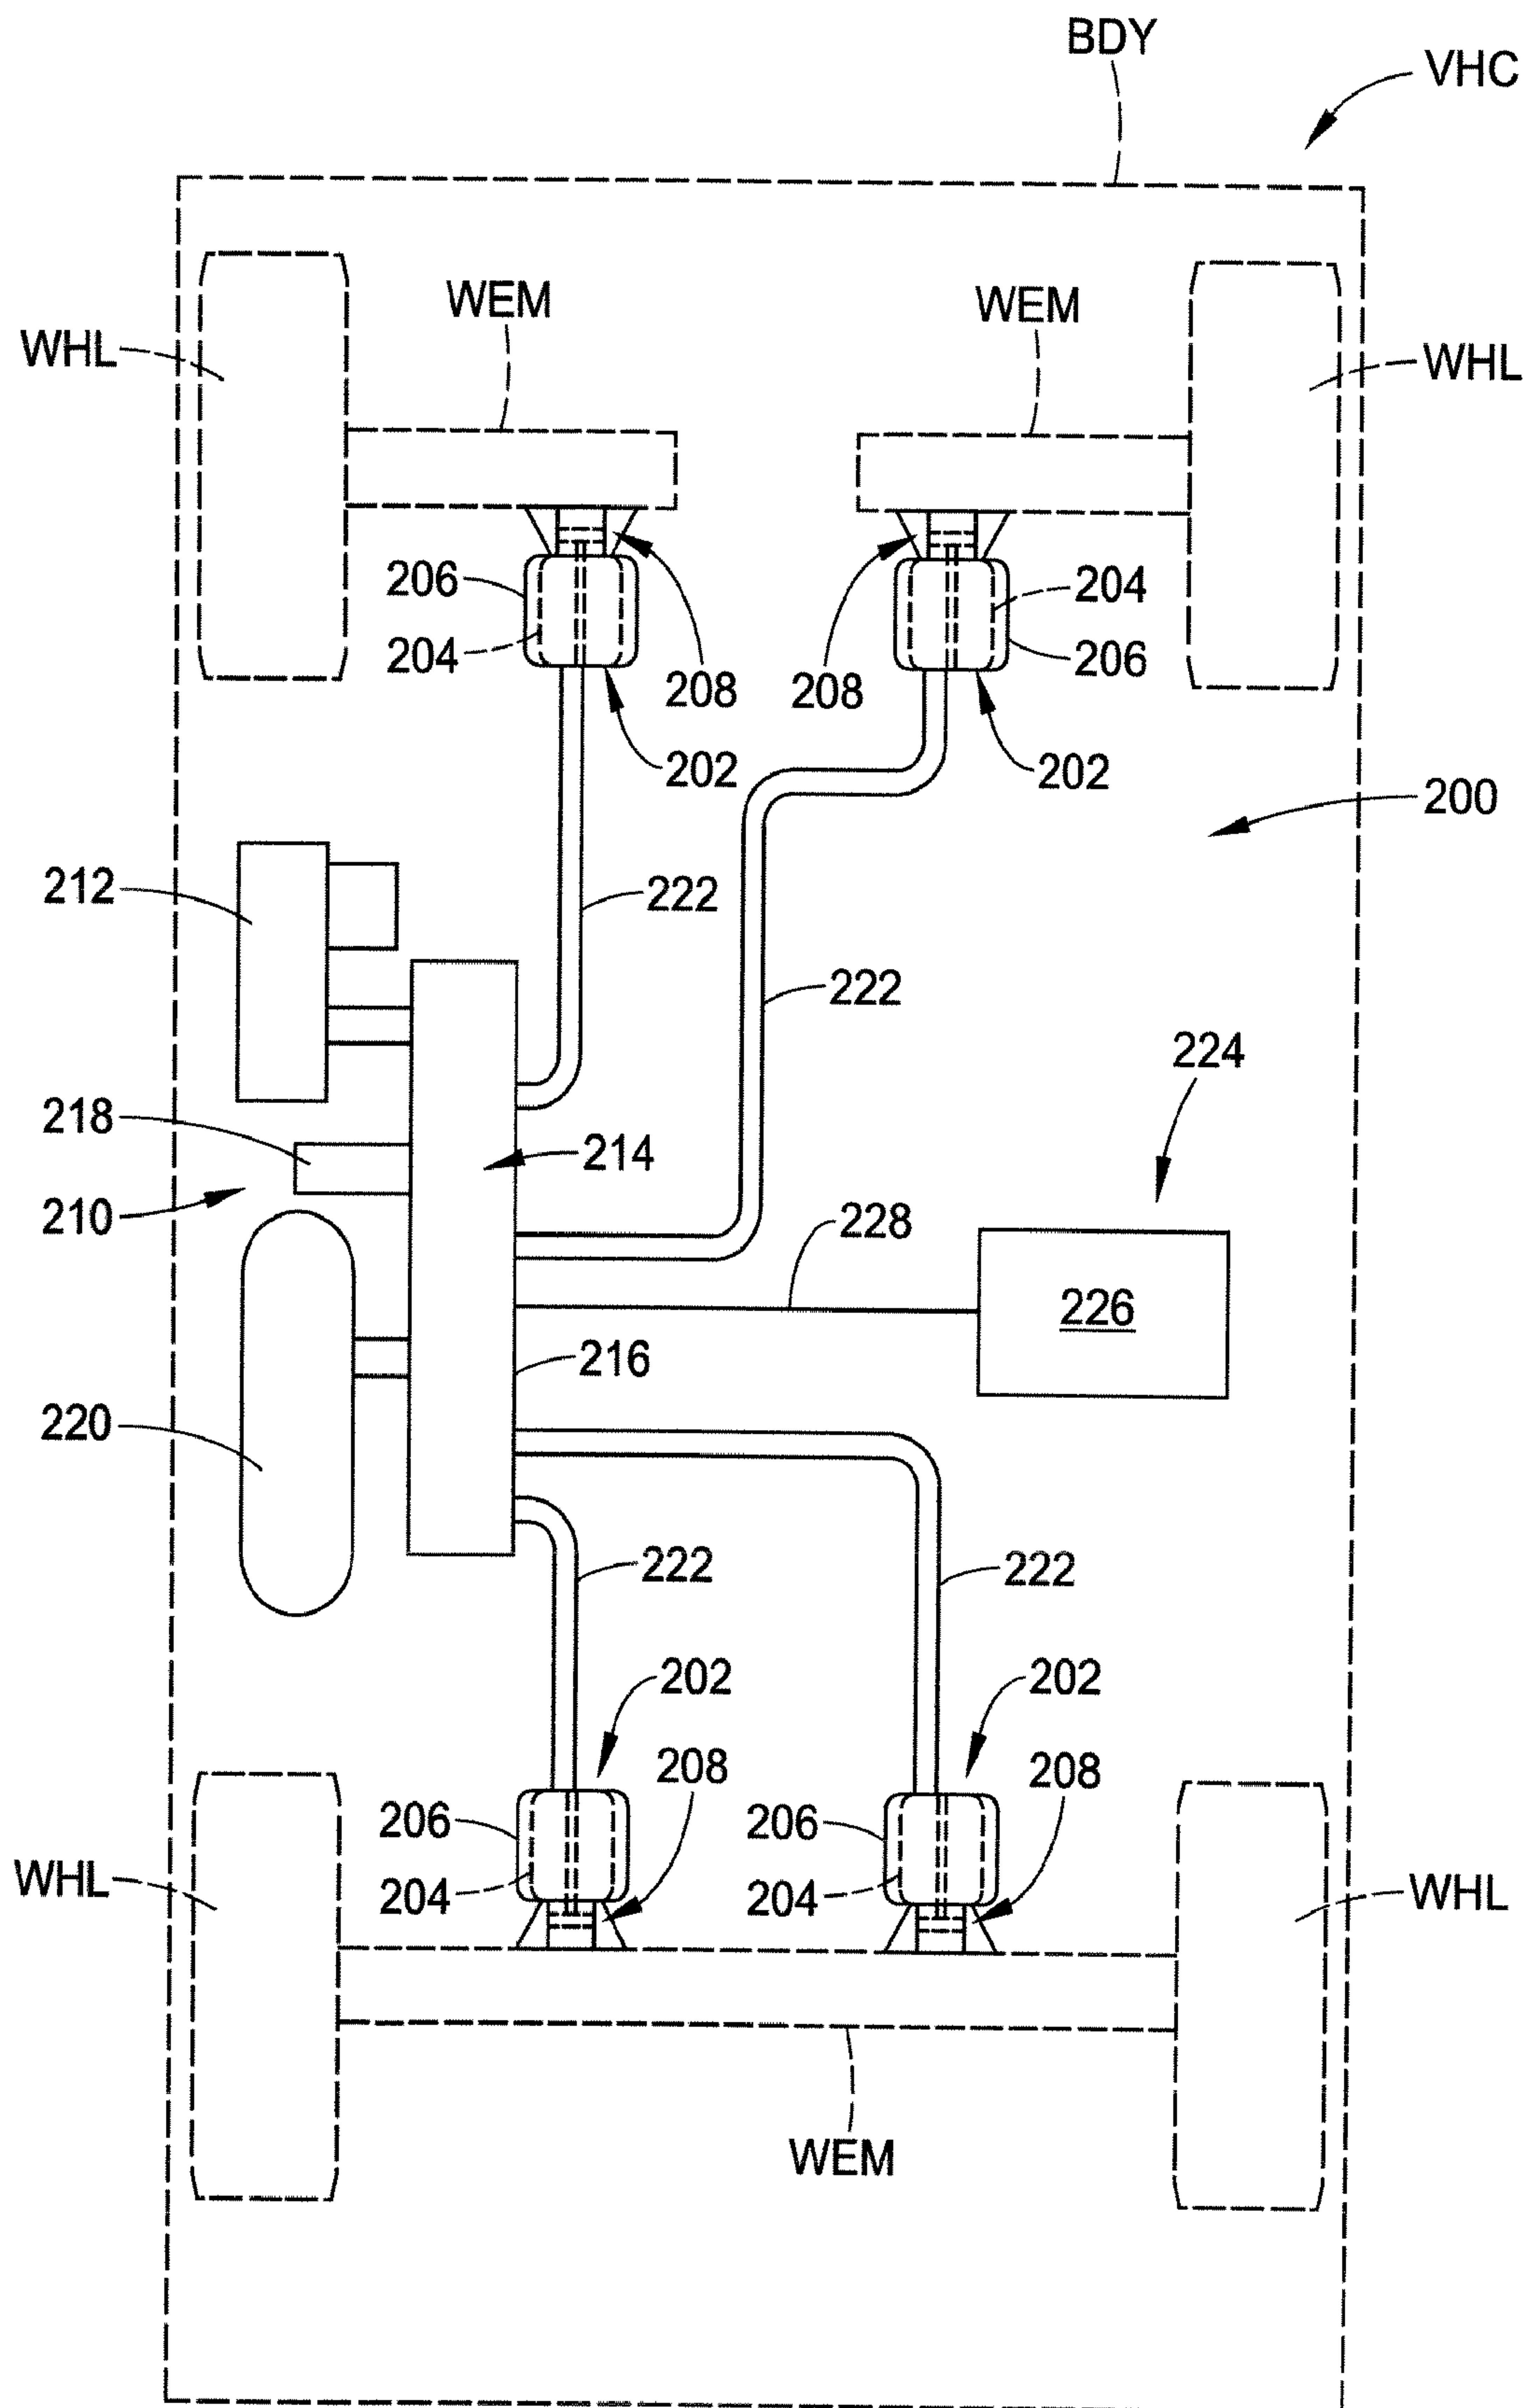


FIG. 3

4/7

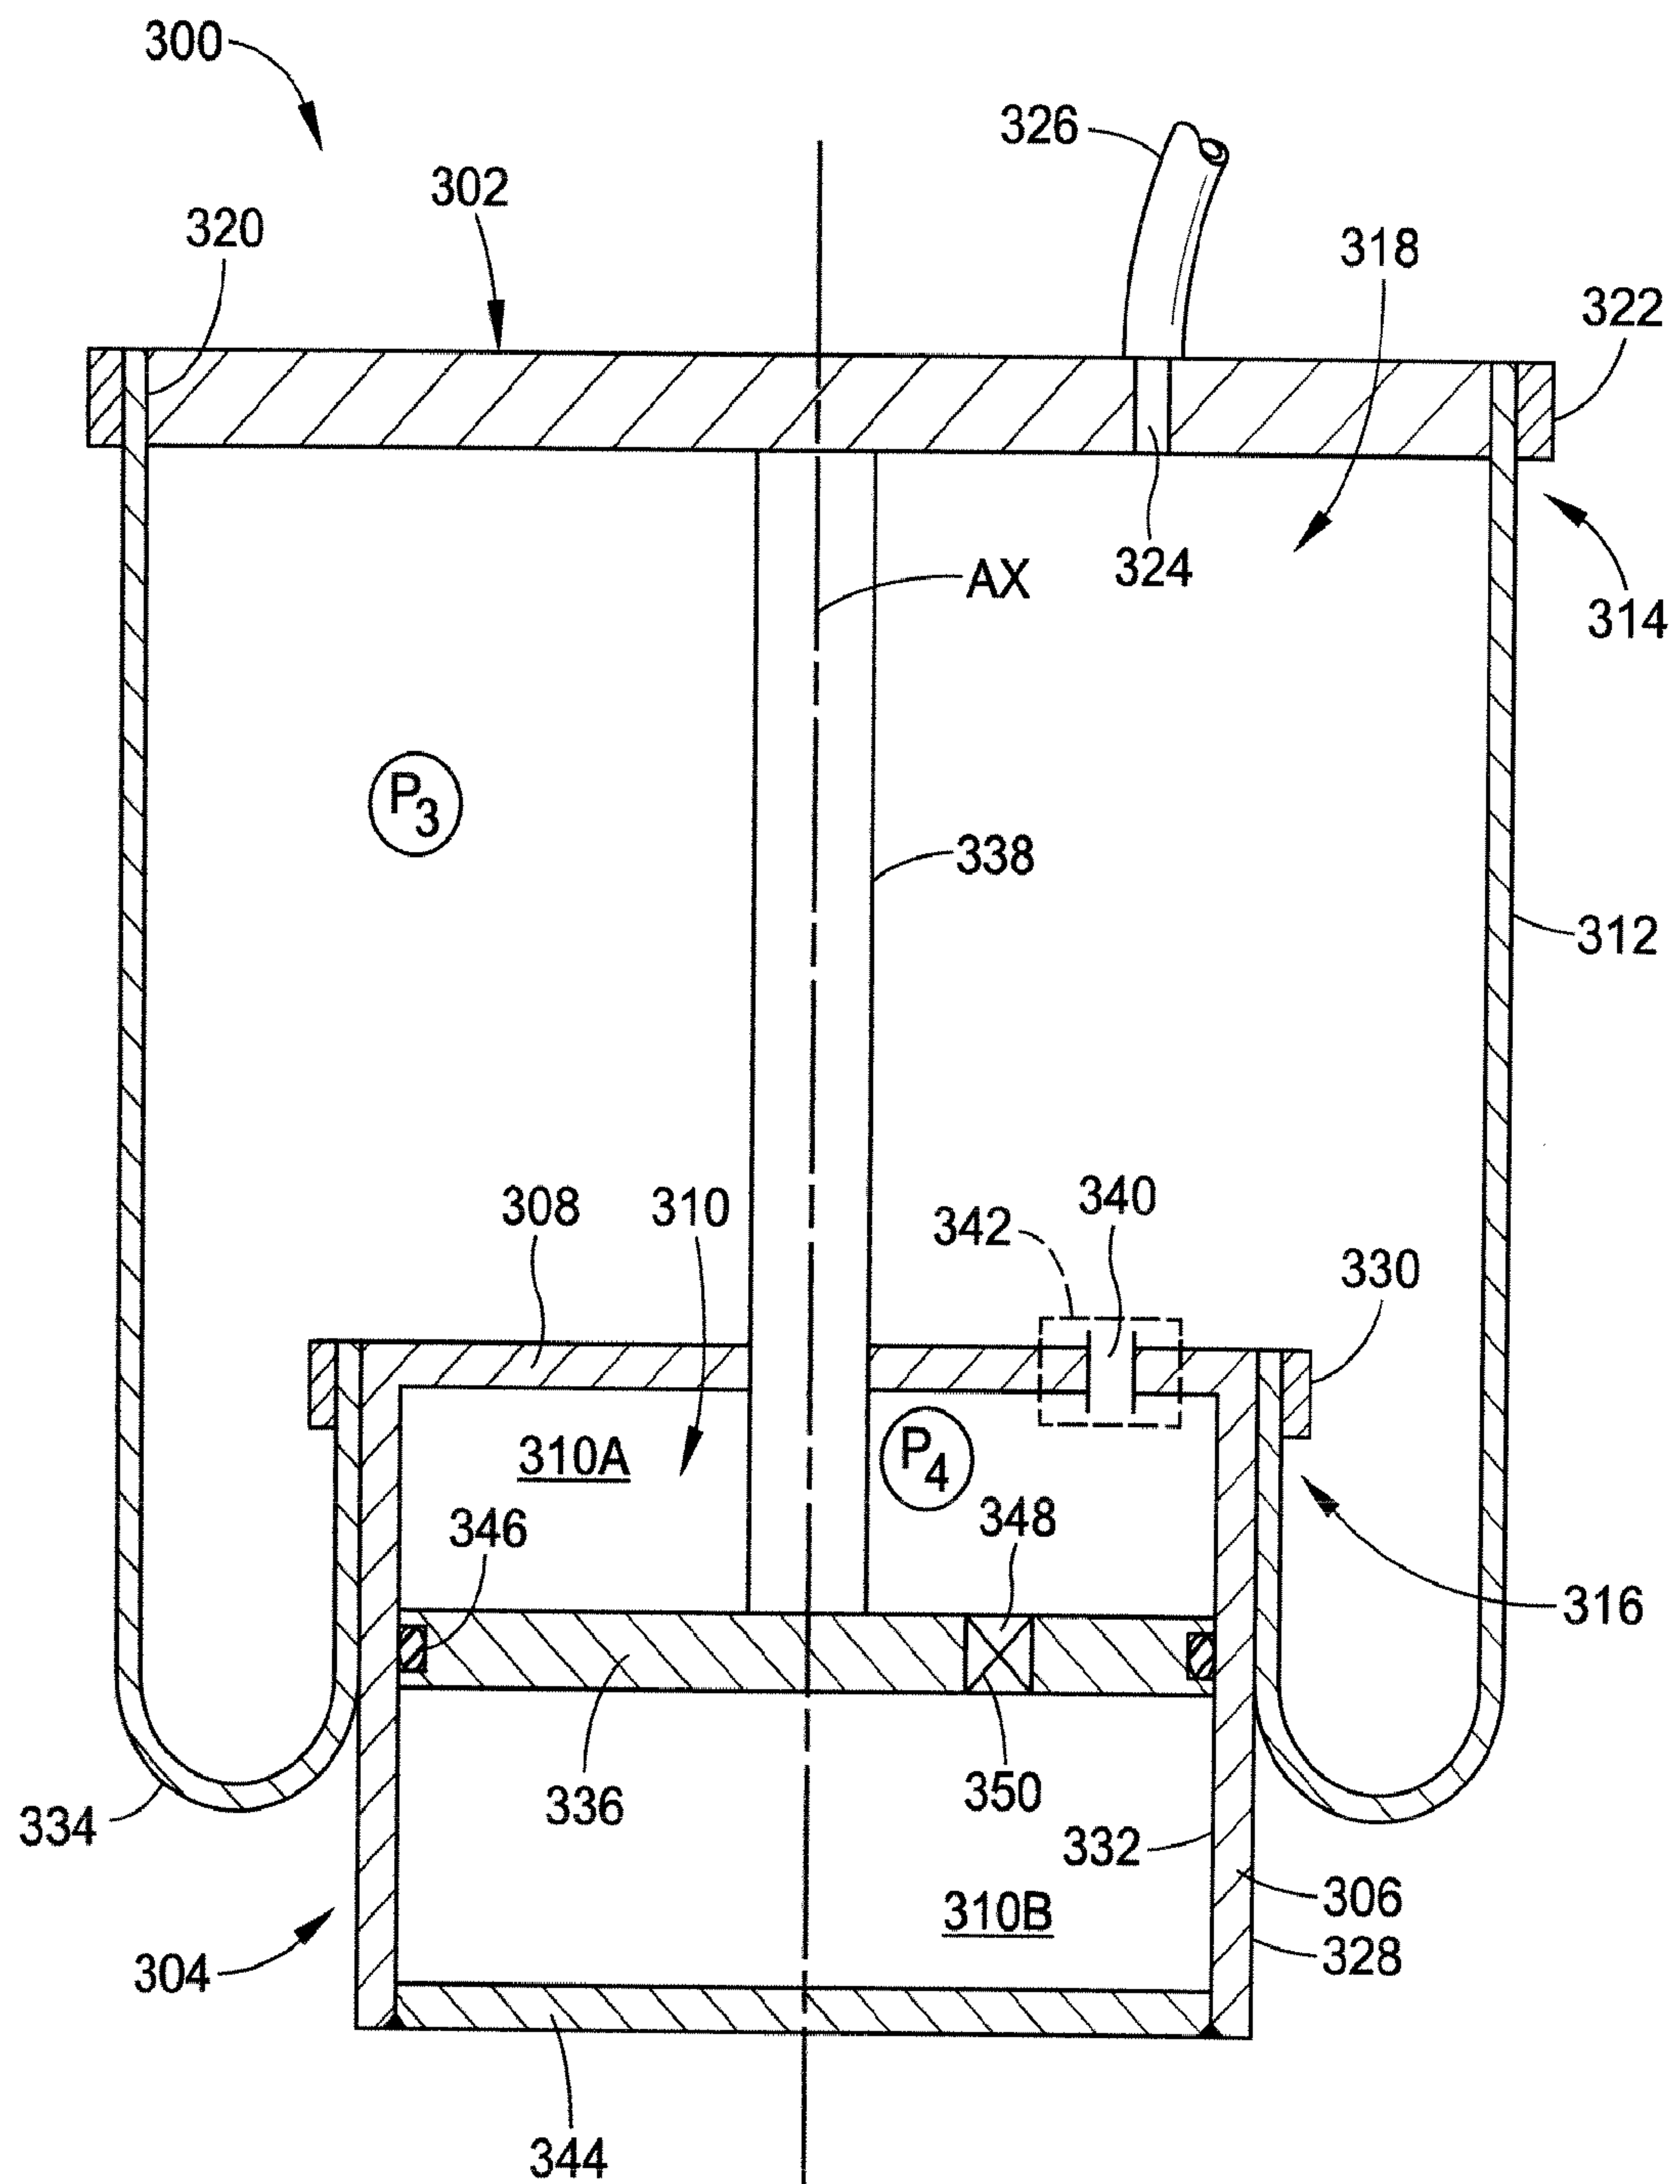


FIG. 4

5/7

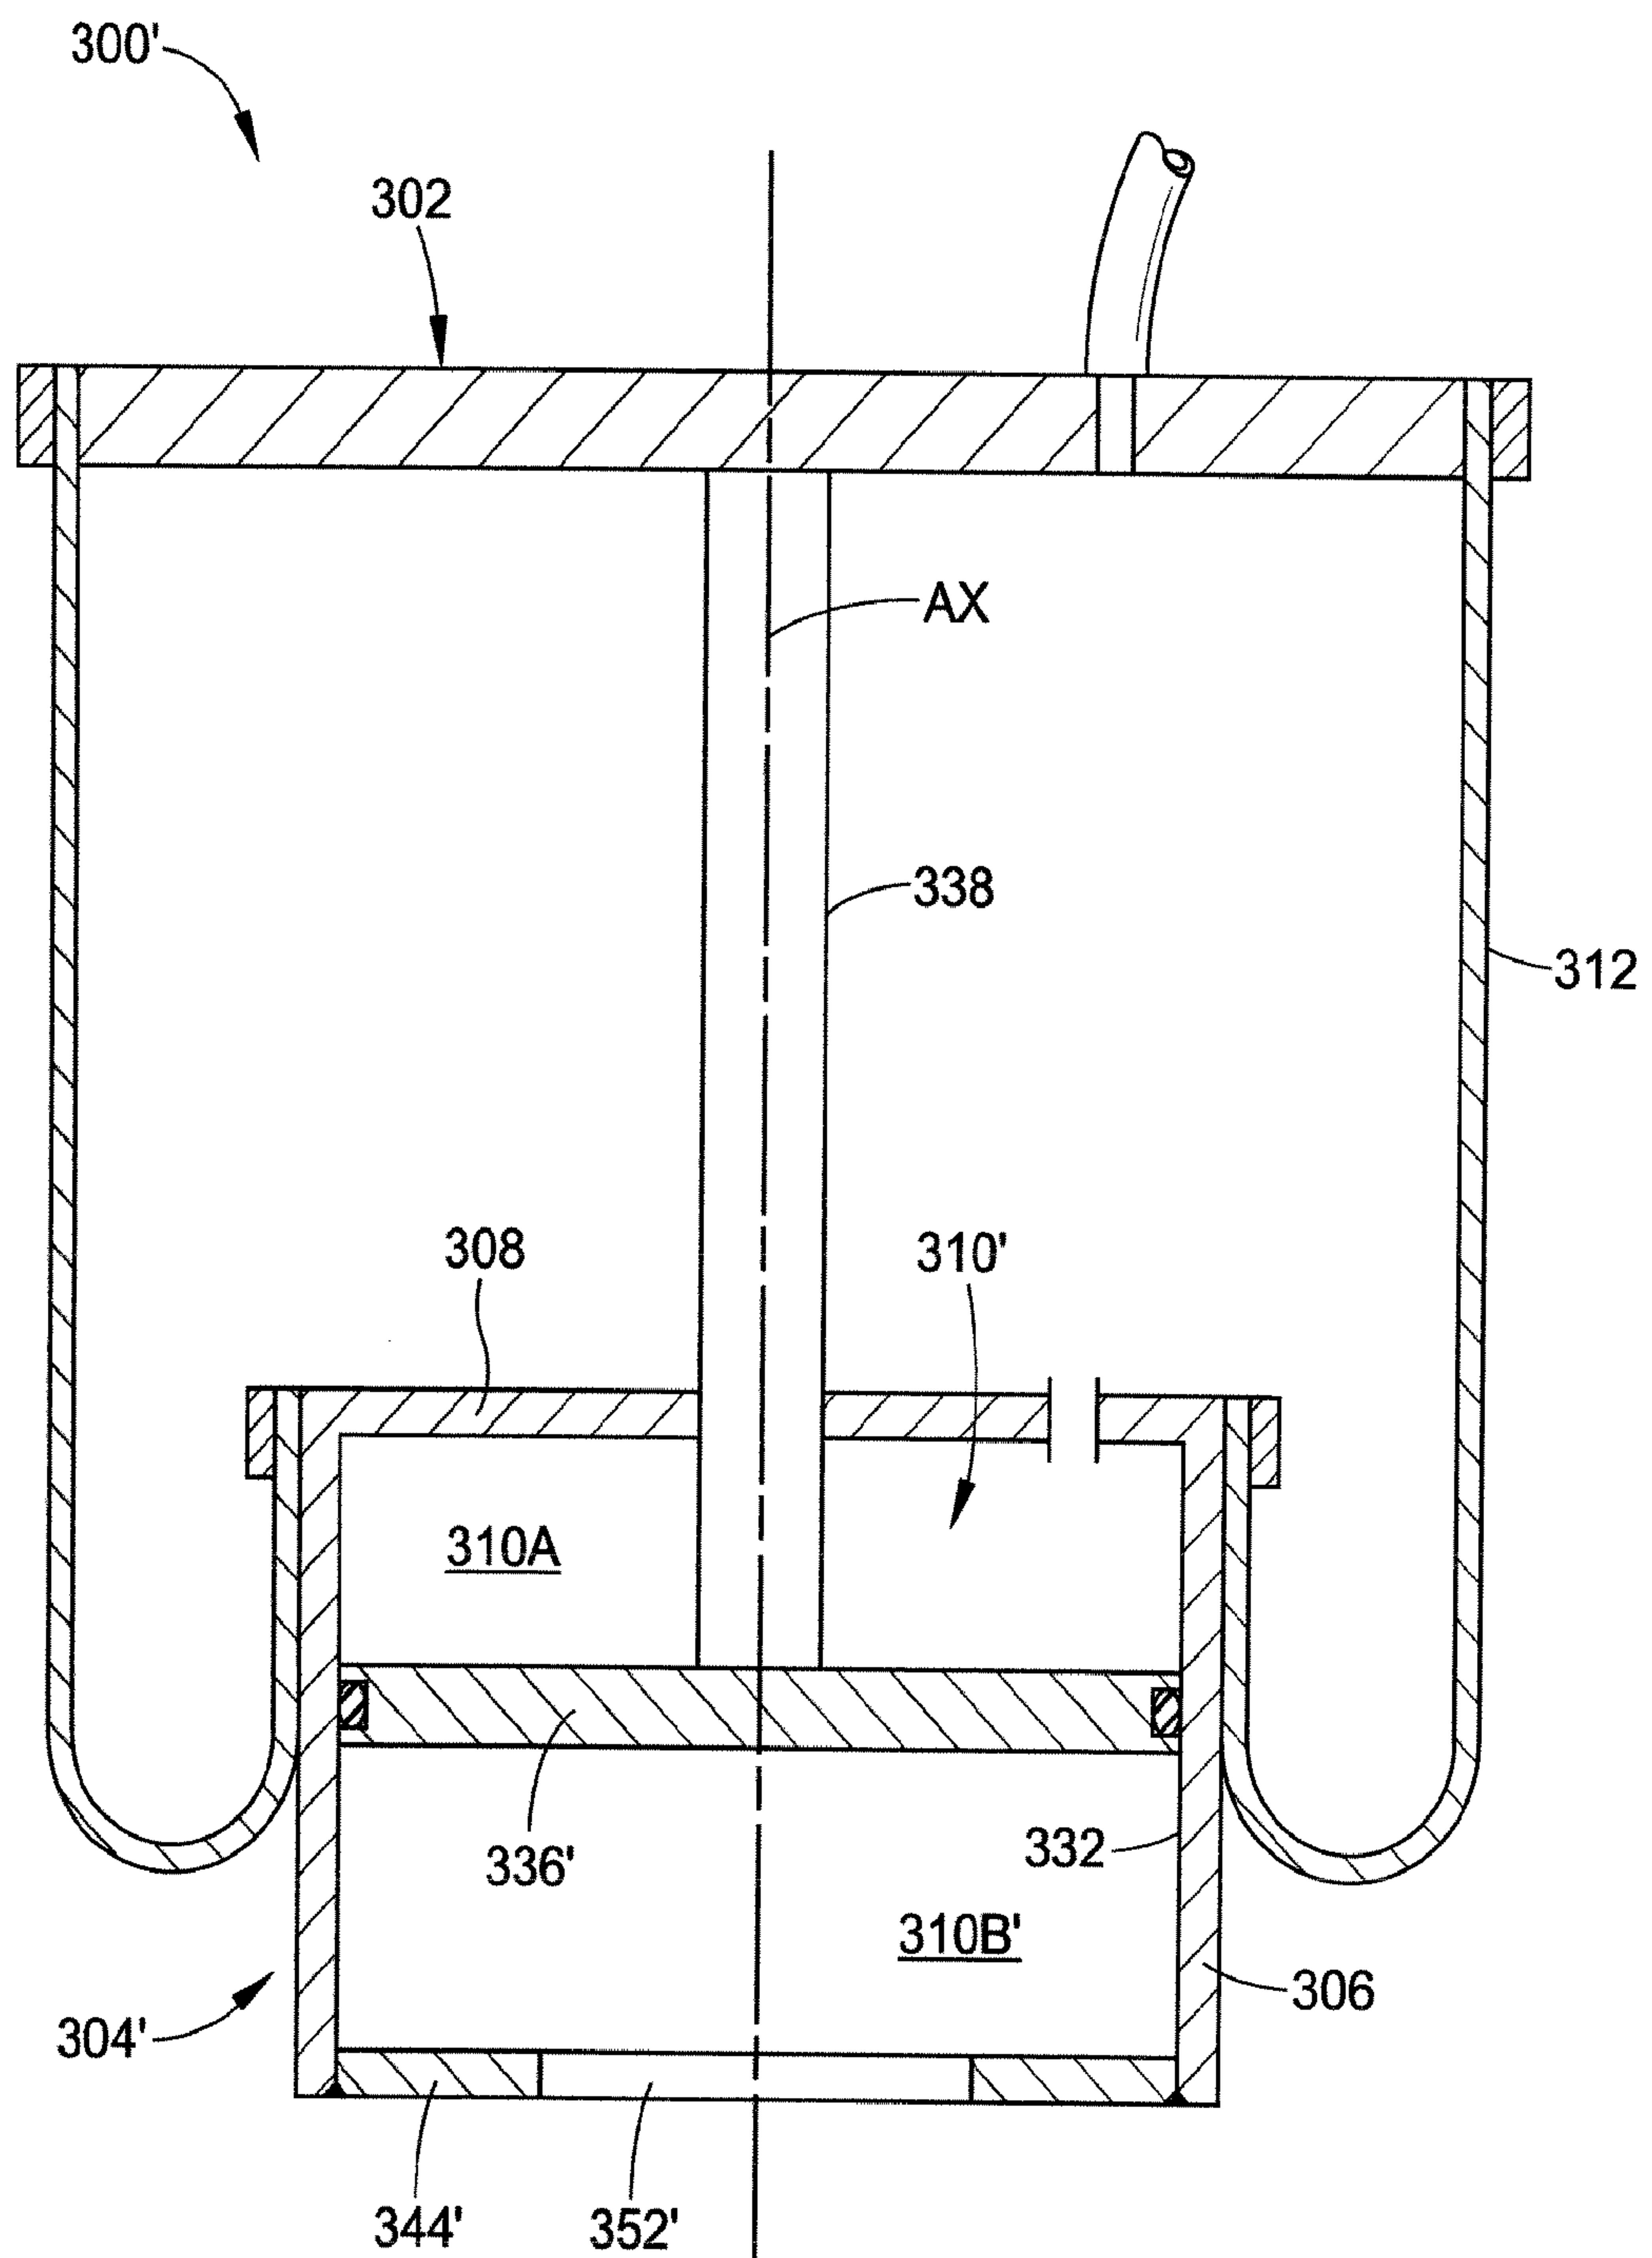


FIG. 5

6/7

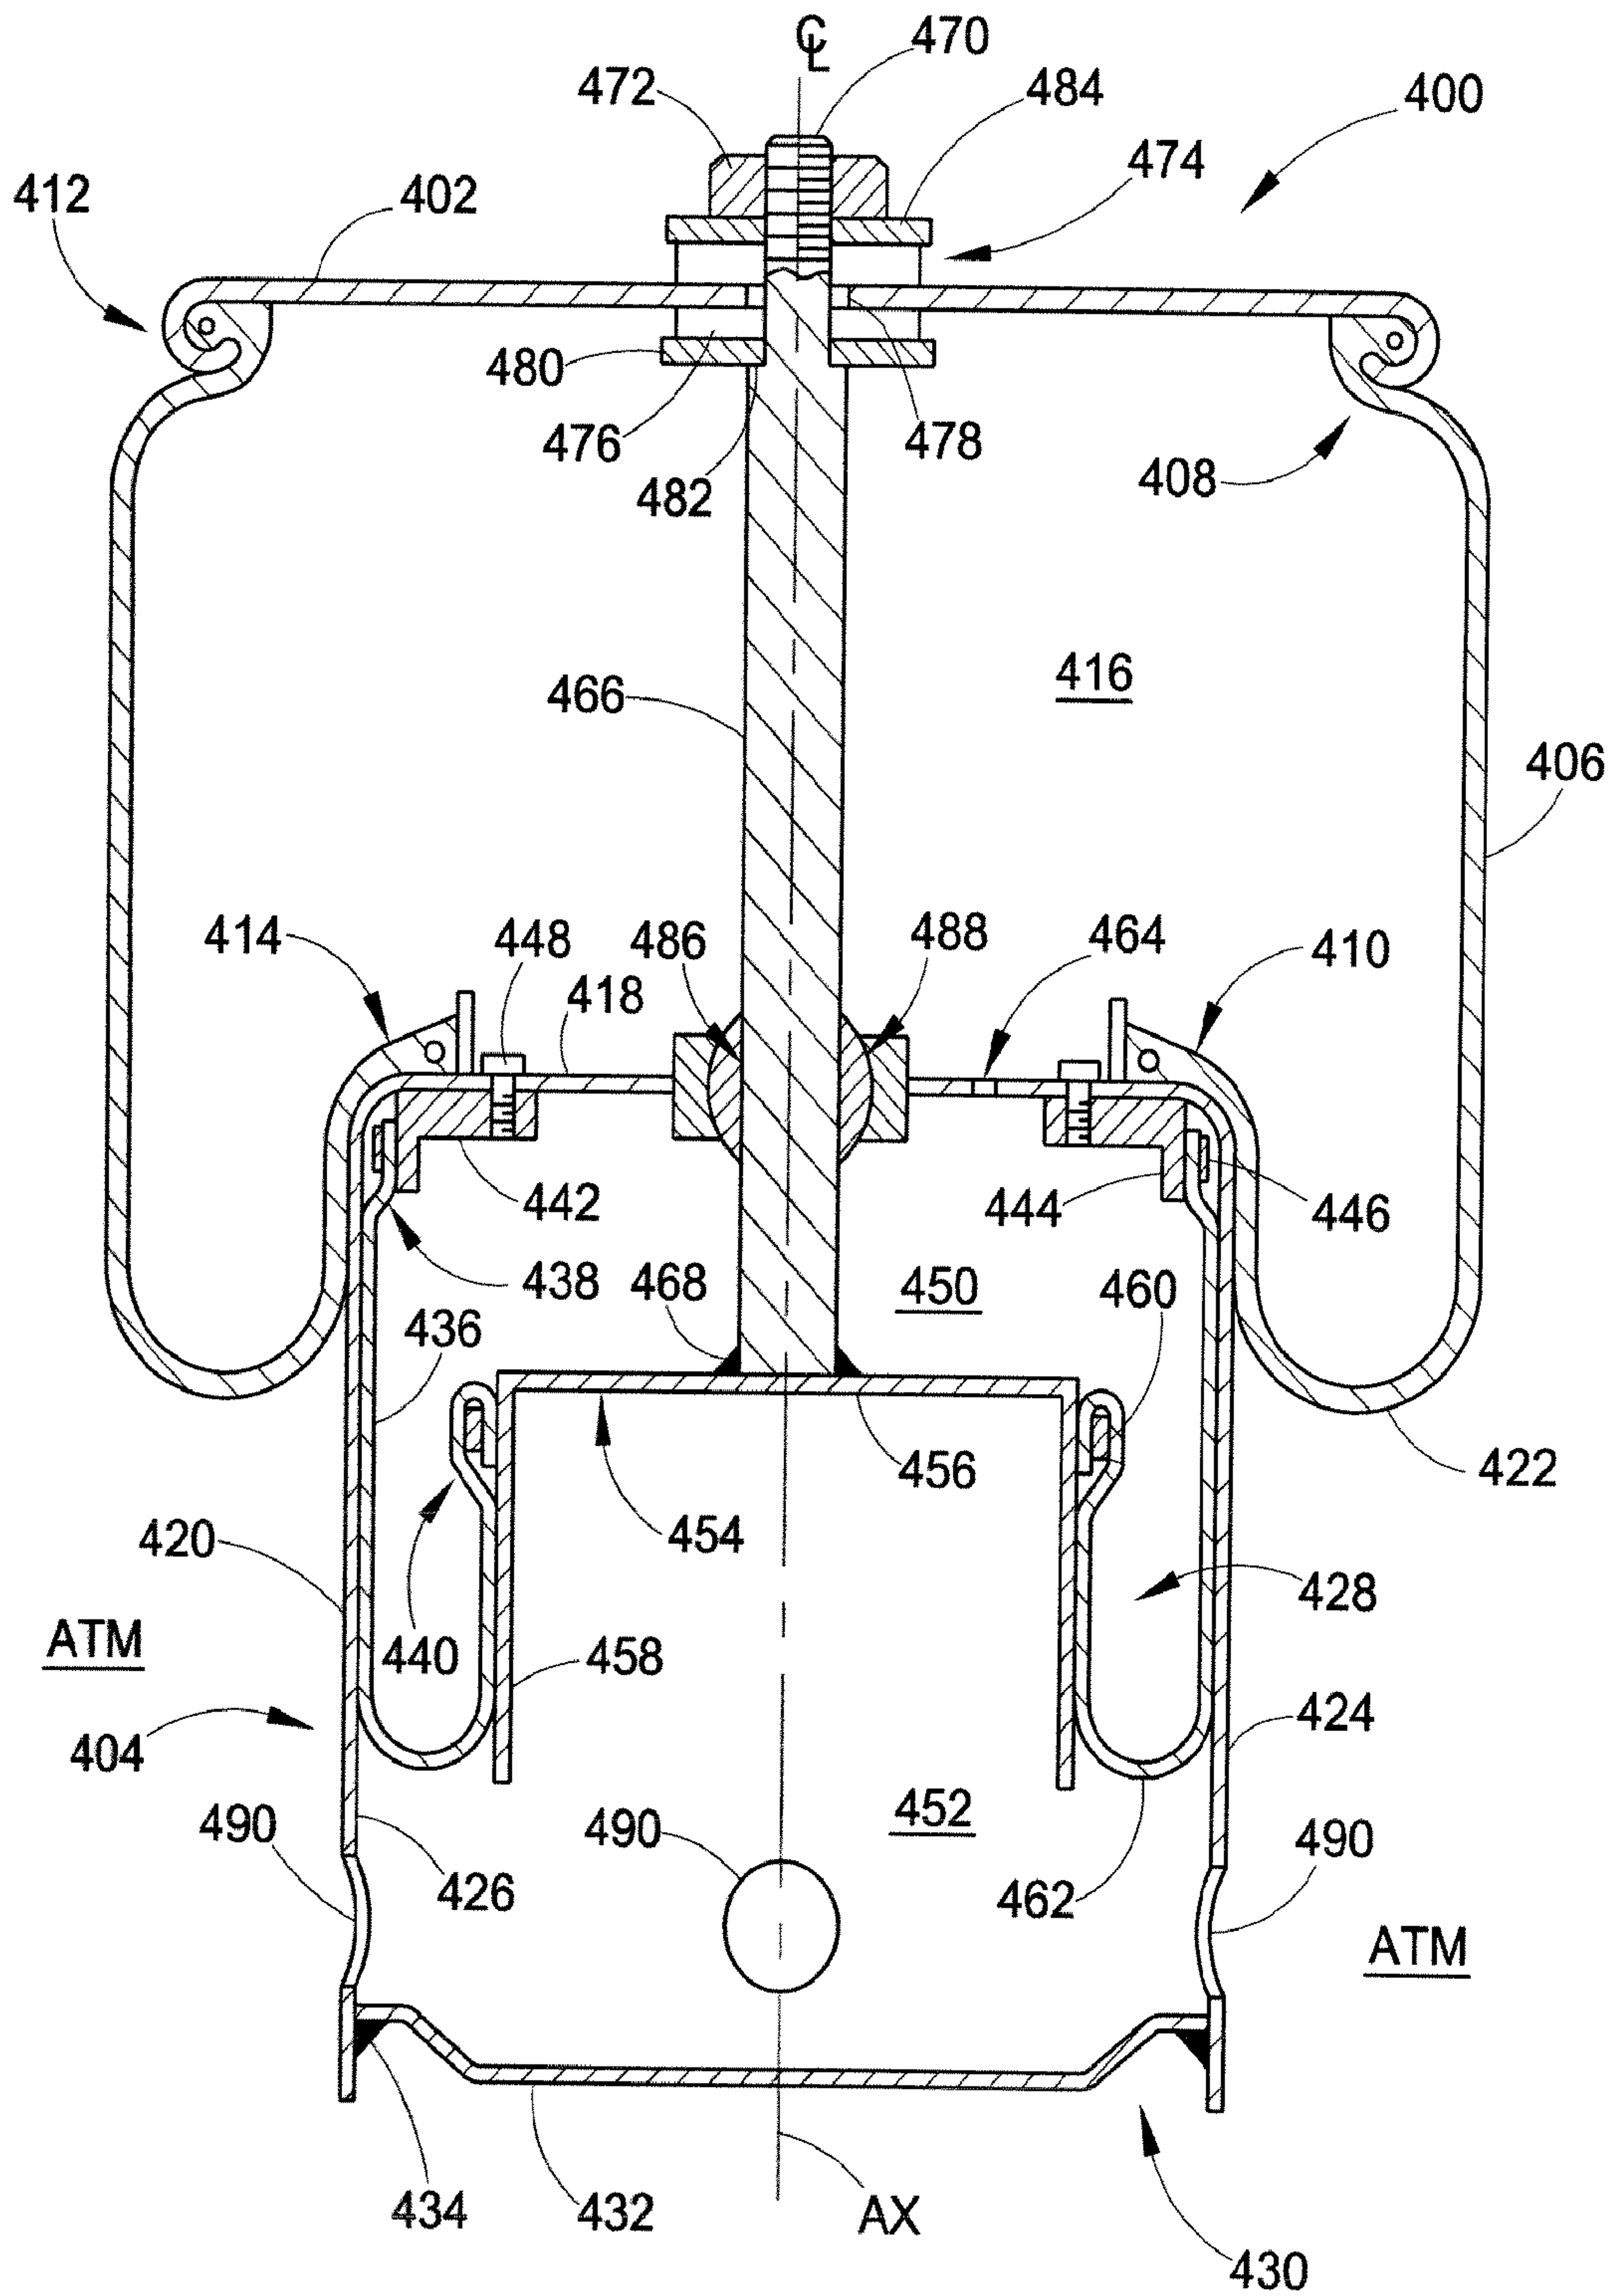


FIG. 6

7/7

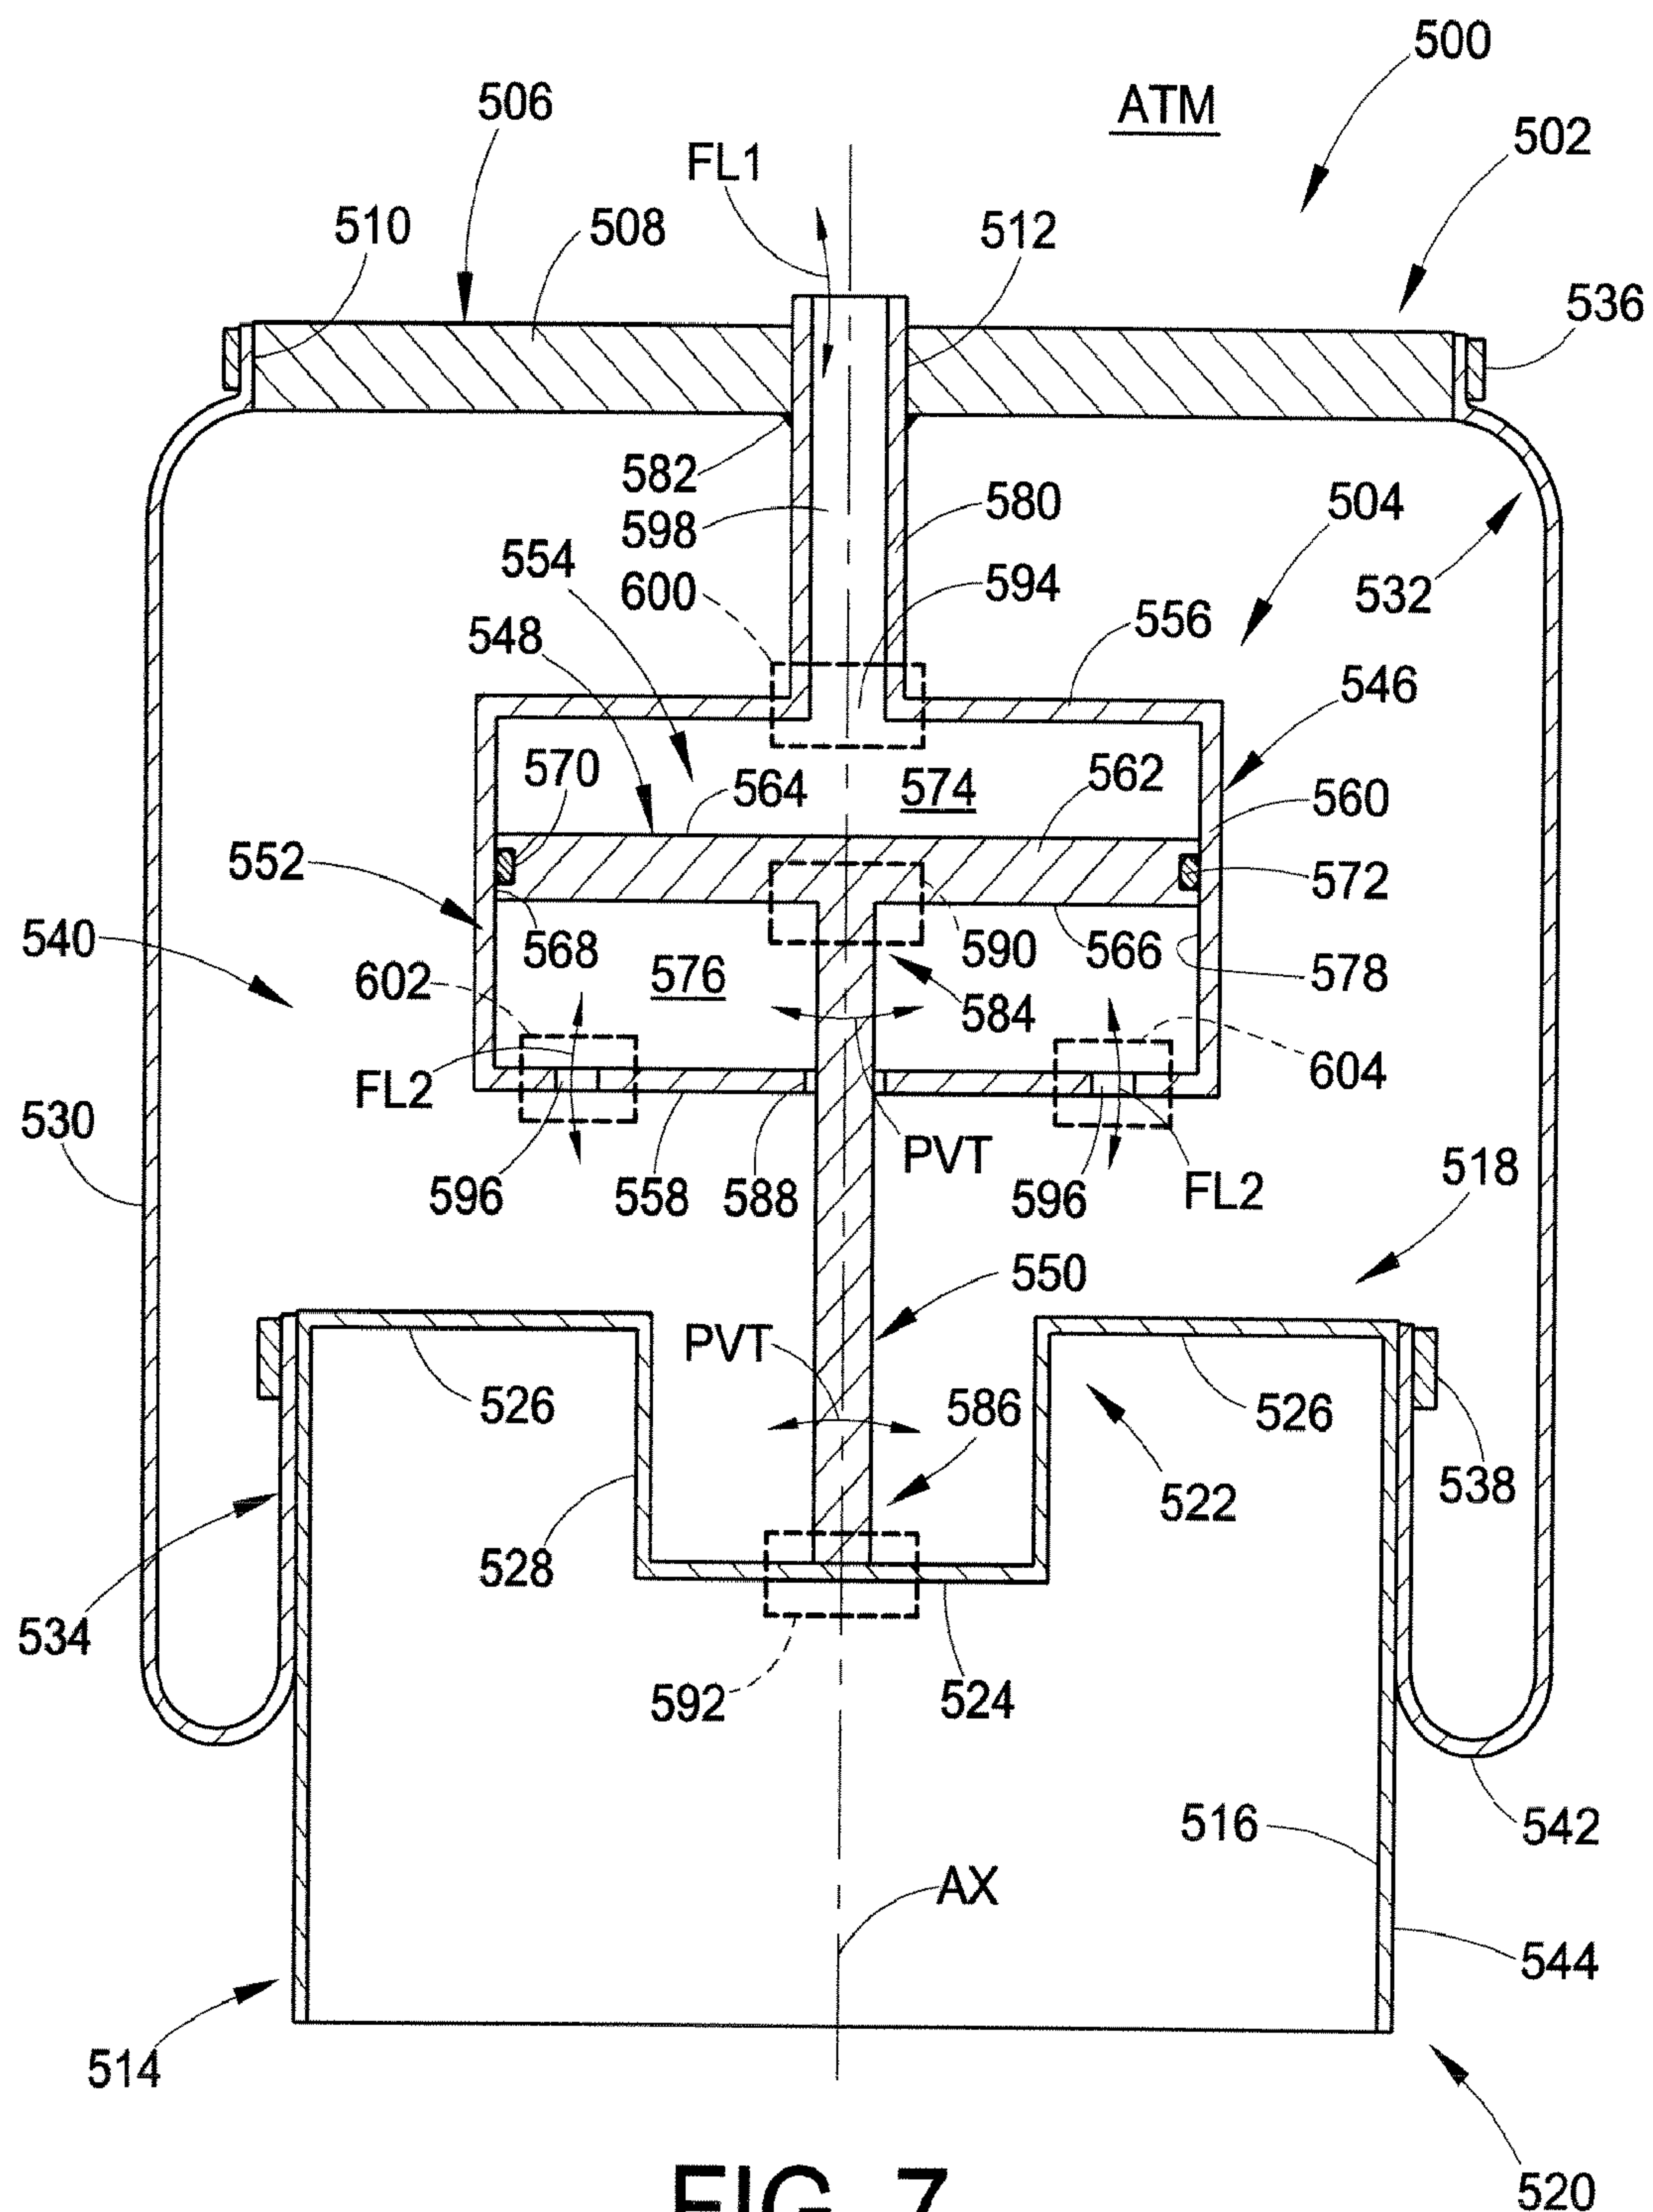


FIG. 7

