



(51) International Patent Classification:

B01D 53/02 (2006.01) *B01J 20/22* (2006.01)
B01D 53/00 (2006.01) *B01J 20/28* (2006.01)
B01J 20/00 (2006.01)

(21) International Application Number:

PCT/US2017/068995

(22) International Filing Date:

29 December 2017 (29.12.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/440,550 30 December 2016 (30.12.2016) US

(71) Applicant: RUTGERS, THE STATE UNIVERSITY
OF NEW JERSEY [US/US]; 83 Somerset Street, New
Brunswick, NJ 08901 (US).

(72) Inventors: LI, Jing; 3 Shady Brook Lane, Cranbury, NJ
08512 (US). LI, Baiyan; 85 Tices Lane, Apt. #30, East
Brunswick, NJ 08816 (US).

(74) Agent: BUTCH, III, Peter, J. et al.; Fox Rothschild
Llp, 997 Lenox Drive, Building 3, Lawrenceville, NJ
08648-2311 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: METAL-ORGANIC FRAMEWORK BASED MOLECULAR TRAPS FOR CAPTURE OF RADIOACTIVE ORGANIC
IODIDES FROM NUCLEAR WASTE

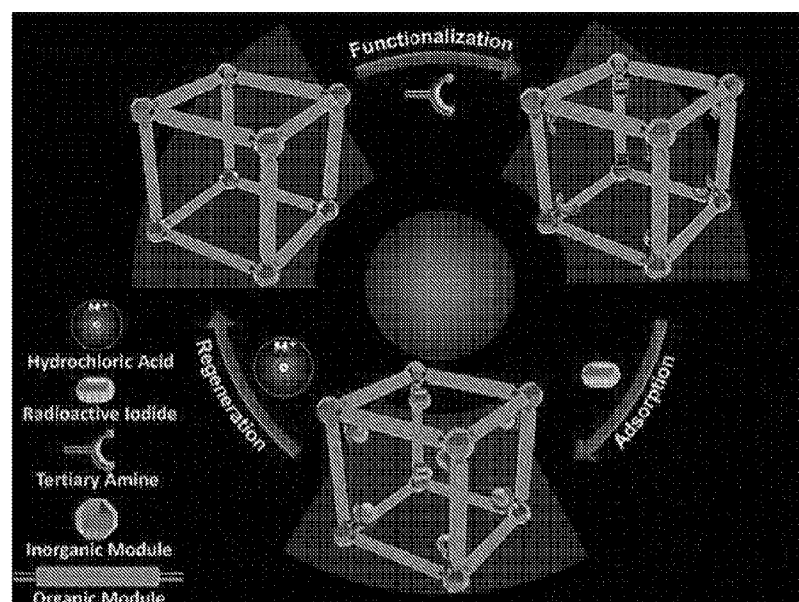


Figure 1

(57) Abstract: Novel radioactive iodide molecular traps, in which one or more metal atoms are functionalized by coordinating to an amine containing two or more nitrogens, and methods of using the molecular traps to capture radioactive iodide.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

METAL-ORGANIC FRAMEWORK BASED MOLECULAR TRAPS FOR CAPTURE OF RADIOACTIVE ORGANIC IODIDES FROM NUCLEAR WASTE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority under 35 U.S.C. § 119(e) to U.S. Provisional Patent Application Serial No. 62/440,550, filed on December 30, 2016, which is hereby incorporated by reference in its entirety.

STATEMENT REGARDING FEDERALLY FUNDED RESEARCH

[0002] This invention was made in part with government support under Grant No. DE-FG02-08ER46491 awarded by the Department of Energy. The government has certain rights in the invention.

FIELD OF THE INVENTION

[0003] The present invention relates to the field of capture of radioactive organic iodides (ROI) from nuclear waste streams with metal-organic framework (MOF) materials.

BACKGROUND OF THE INVENTION

[0004] Currently, nuclear power provides ~11% of the world's electricity, offering a cost effective option compared to other energy sources. Rapidly increasing global energy needs will likely increase the demand for nuclear energy in the future. Under normal operating conditions, fuel rods used in nuclear power plants need to be reprocessed. This procedure involves the production of complex off-gas mixtures consisting of HNO₃, NO₂ and N₂O₅ along with radioactive molecular iodine (I₂) and organic iodides (ROIs, e.g. methyl iodide and ethyl iodide) at elevated temperatures (e.g. 150 °C). Radioactive I₂ and ROI species must be selectively captured and sequestered to ensure safe nuclear energy usage. ROI species are known to be particularly difficult to capture and thus tends to leak into the environment more easily. Among various current capture technologies, solid sorbent-based fixed-bed methods have proven superior due to their simplicity and relatively low cost. Examples of solid adsorbents for capturing ROIs from off-gas mixtures include triethylenediamine (TED), impregnated activated carbon (AC), and silver impregnated/exchanged solid supports such as silica, alumina and zeolites. Typically the temperature of the off-gas is about

150 °C in order to accelerate the chemical reactions and to remove adsorbed water from the narrow pores of the supports. Activated carbon (AC) based adsorbents, however, can only be used under 120 °C and are limited to specific applications absent of NO_x because of low ignition temperatures and the risk of formation of explosive compounds. Silver functionalized porous materials are capable of performing at higher temperatures, but the high costs associated with the noble metal limits their widespread application. Additionally, much to their detriment, chemical adsorption of CH₃I—necessary for its high uptake at high temperature in such systems—makes the silver-based adsorbents poorly recyclable.

[0005] A need thus exists for safe and efficient capture of radioactive organic iodides.

SUMMARY OF THE INVENTION

[0006] The present invention meets such a need. Described herein are novel types of crystalline porous materials based on a metal-organic framework (MOF) as tunable and recyclable solid adsorbents for ROIs capture. These adsorbent materials are noble metal free, highly efficient, cost effective, recyclable, and safe to use in ROI capture. Furthermore, the adsorbent can be recycled multiple times without loss of capacity, making full recyclability a reality. This presents a major advance of today's capture technology as a fully recyclable system is unachievable by current industrial adsorbents. In combination with its excellent chemical and thermal stability, as well as its exceptionally high capture efficiency and low cost, the adsorbent demonstrates significant promise for industrial ROI capture from nuclear waste.

[0007] One aspect of the invention provides a compound having a formula of $M_3(O)X_b[(O_2C)-Y-(CO_2)]_3(Z)_a$. M is a transition metal with an oxidation state of +3 or +4. In some embodiments, the metal M is Cr, Mo, Fe, or Al having +3 oxidation state. In some embodiments, the metal M is Zr or Ti having +4 oxidation state. In some embodiments, one of the metal M is +4 oxidation state and the other M is of +3 transition state. Y is an optionally substituted aryl or heteroaryl. The (O₂C) or (CO₂) are each a carboxy substituent on Y. The optional substituents on Y include -OR¹, -SR¹, -C₁-C₄ alkyl, -NO₂, -CN and -NR^aR^b, wherein R¹ at each occurrence is independently hydrogen (H) or C₁-C₄ alkyl, and R^a and R^b are independently hydrogen, or C₁-C₄ alkyl. X is an anion carrying one or two negative charges. Z is a neutral molecule coordinating to the open site of the metal. The subscript integer a is 1, 2 or 3. The subscript integer b is 1, 2 or 3.

[0008] In some embodiments, Y is an optionally substituted ring which can be an aryl (e.g. phenyl) or heteraryl (e.g. pyridinyl or pyrimidinyl). In some embodiments, X is F, OH, or another anion with one negative charge. In some embodiments, M is Cr^{3+} and Y is phenyl.

[0009] The value of a and b depend on the oxidation state of M. In some embodiments, a is 2. In some embodiments, a is 2 and b is 1. In some embodiments, a is 1 and b is 2. In some embodiments, b is 2 and a is 2. In some embodiments, a is 3 and b is 0. In some embodiments, Z is a water molecule or an organic solvent molecule that can coordinate to M with a lone electron pair.

[0010] Another aspect of the invention provides a complex comprising

a) a compound of Formula $\text{M}_3(\text{O})\text{X}_b[(\text{O}_2\text{C})-\text{Y}-(\text{CO}_2)]_3(\text{Z})_c$ wherein c is 0 or 1, b is 0, 1, or 2 and M, X, Y and Z are the same as described above, and

b) one, two or three nitrogen-containing functional molecules, wherein the functional molecules each contain at least two nitrogens, and one of the at least two nitrogens is coordinated to M. The functional molecule can only coordinate to the metal when at least an X or a Z is removed to free the binding site.

[0011] In some embodiments, the Z (e.g. H_2O molecules) can be removed (to free the binding site) so that amine functional molecules can coordinate to the metals. In some embodiments, c is 0 and both Z molecules in the compound above are replaced with the nitrogen-containing functional molecules. In some embodiments, Z is H_2O .

[0012] In some embodiments, M is selected from the group consisting of Cr, Fe, or Al having +3 oxidation state, and Y is optionally substituted with a substituent selected from the group consisting of $-\text{OR}^1$, $-\text{SR}^1$, $-\text{C}_1\text{-C}_4$ alkyl, $-\text{NO}_2$, $-\text{CN}$ and $-\text{NR}^a\text{R}^b$, wherein R^1 at each occurrence is independently hydrogen (H) or $\text{C}_1\text{-C}_4$ alkyl, and R^a and R^b are independently hydrogen, or $\text{C}_1\text{-C}_4$ alkyl. In some embodiments, M is a group IV transition metal and X is phenyl. In some embodiments, the complex is a porous crystalline.

[0013] In some embodiments, each of the functional molecules independently have a formula of $\text{R}^1\text{R}^2\text{NLNR}^3\text{R}^4$, wherein,

L is void or a C_{1-4} linker optionally substituted with a C_{1-4} alkyl; and

each of R^1 , R^2 , R^3 and R^4 are independently selected from the group consisting of H, methyl, ethyl, propyl, and isopropyl, or

R^1 and R^3 and / or R^2 and R^4 link up to form a C_{2-4} alkyl chain, wherein each of the C_{2-4} alkyl chain optionally and independently has a carbon replaced with a heteroatom or group selected from the group consisting of NR^5 , S, and O, wherein R^5 is H or C_{1-4} alkyl, or two R^5 link up to form a C_{1-2} alkyl chain.

[0014] In some embodiments, L is void and each of R^1 , R^2 , R^3 , and R^4 is independently H or methyl. In some embodiments, L is a C_2 linker. In some embodiments, L is a C_2 linker, and R^1 and R^3 link up to form a C_2 linker.

[0015] In some embodiments, the functional molecules each contain at least two tertiary amines. In some embodiments, the functional molecules each contains at least one tertiary amine and at least one primary or secondary amine. In some embodiments, the functional molecules are selected from the group consisting of triethylenediamine (TED), hexamethylenetetramine (HMTA), N,N-dimethylethylenediamine (DMEDA), N,N-dimethyl-1,3-propanediamine (DMPDA) and N, N-dimethyl-1,4-butanediamine (DMBDA).

[0016] In some embodiments, the complex has an average pore diameter greater than about 10 Å. In some embodiments, the complex has an average pore diameter between about 16 Å and 21 Å. In some embodiments, the complex is stable at a temperature above 150 °C for more than 10 hours.

[0017] In some embodiments, the complex has a Brunauer–Emmett–Teller (BET) surface area of greater than 2000 $m^2 g^{-1}$. In some embodiments, the complex has a Brunauer–Emmett–Teller (BET) surface area ranging from about 2200 $m^2 g^{-1}$ to about 3500 $m^2 g^{-1}$.

[0018] In some embodiments, the complex has an uptake capacity of more than about 50 wt% for methyl iodide. In some embodiments, the uptake capacity decreases by less than about 35% when relative humidity is increased from less than about 20% to more than about 70%. In some embodiments, the temperature is at room temperature, higher than about 40 °C, higher than about 60 °C, higher than about 80 °C, higher than about 100 °C, or higher than about 150 °C.

[0019] In some embodiments, the complex has a decontamination factor of more than about 3500. In some embodiments, the complex retains more than about 95% of uptake capacity for the methyl iodide after at least three cycles.

[0020] Another aspect of the invention provides a method of removing radioactive iodide, by exposing the complex described herein to a substance containing a radioactive iodide.

[0021] In some embodiments, the radioactive iodide is methyl iodide. In some embodiments, the substance is collected from a source at a nuclear power plant. In some embodiments, the radioactive iodide forms an irreversible bonding with the complex.

[0022] In some embodiments, the substance has a temperature of above about 100 °C. In some embodiments, the iodide is substantially uniformly dispersed in the complex when captured in the complex. In some embodiments, the substance is in an environment having a relative humidity of more than about 70%.

[0023] In some embodiments, the method further include treating the complex after capturing the radioactive iodide to regenerate the $M_3(O)X_b[(O_2C)-Y-(CO_2)]_3(Z)_a$.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] Figure 1 illustrates the design of a recyclable MOF molecular trap for effective capture of radioactive organic iodides from nuclear waste.

[0025] Figure 2 illustrates the synthetic route to MIL-101-Cr-TED (left) and MIL-101-Cr-HMTA (right).

[0026] Figure 3 illustrates the PXRD patterns of MIL-101-Cr, MIL-101-Cr-TED and MIL-101-Cr-HMTA.

[0027] Figure 4 illustrates BJH pore size distribution in MIL-101-Cr, MIL-101-Cr-TED and MIL-101-Cr-HMTA calculated from nitrogen adsorption isotherms at 77 K.

[0028] Figure 5 illustrates adsorption isotherms of CH_3I in MIL-101-Cr-TED, MIL-101-Cr-HMTA and selected benchmark sorbent materials collected at 30 °C with a CH_3I partial pressure of 0.2 atm.

[0029] Figure 6 illustrates saturated CH_3I uptake in MIL-101-Cr-TED, MIL-101-Cr-HMTA and selected benchmark sorbent materials at 30 °C with a partial pressure of 0.2 atm for CH_3I .

[0030] Figure 7 illustrates the CH_3I capture performance. (A) Sorption isotherms of CH_3I in MIL-101-Cr-TED, MIL-101-Cr-HMTA and selected benchmark sorbent materials at 150 °C with partial pressure of 0.2 atm for CH_3I . (B) Comparison of the saturated CH_3I uptake in MIL-101-Cr-TED, MIL-101-Cr-HMTA and selected benchmark sorbent materials at 150 °C with partial pressure of 0.2 atm for CH_3I . (C) The CH_3I uptake at 150 °C under dry and humidity (RH = 81%) conditions by breakthrough experiment (back row: dry conditions; front row: humid conditions), (Insert) the uptake drop ratio by comparing the CH_3I uptake of dry and humid conditions. (D) Decontamination factors of CH_3I by MIL-101-Cr-TED under simulated conditions representing gas mixtures produced during CH_3I reprocessing, which include H_2O , HNO_3 , NO_2 , and NO at 150 °C. (E) The recyclability of MIL-101-Cr-TED for CH_3I capture.

[0031] Figure 8 illustrates the PXRD patterns of MIL-101-Cr and MIL-101-Cr after recycle.

[0032] Figure 9 illustrates the 77K N_2 sorption isotherms of MIL-101-Cr and MIL-101-Cr after recycle.

[0033] Figure 10 illustrates the adsorption and desorption curves of CH_3I for MIL-101-Cr-TED at 150 °C. Desorption of CH_3I was performed at 150 °C under 90 mL/min N_2 stream.

[0034] Figure 11 illustrates the adsorption and desorption curves of CH_3I for MIL-101-Cr-HMTA at 150 °C. Desorption of CH_3I was performed at 150 °C under 90 mL/min N_2 stream.

DETAILED DESCRIPTION OF THE INVENTION

[0035] Various embodiments of the present invention provide novel types of highly efficient ROI molecular traps that are obtained *via* amine grafting to binding sites within a MOF framework. These highly efficient ROI molecular traps demonstrate a significantly improved uptake capacity for organic iodides in comparison with conventional approaches in ROI capture. In addition, they can be reused multiple times without a decrease in uptake capacity. Coupled with their high chemical and thermal stability, these molecular traps demonstrate the best performance for ROI capture materials reported to date and sets a new benchmark for the ROI capture technology.

[0036] Structurally, the ROI molecular traps described herein also feature the following advantages: (i) large and adjustable surface area and pore size enable accommodation of a large

amount and a variety of ROI molecules and thus result in high and selective ROI loading capacity; (ii) modular nature allows for rational design and tailoring of structural topology and functional sites; (iii) multivariate syntheses offer possibilities for obtaining topologically identical yet functionally diverse crystalline frameworks; (iv) modifiable open metal sites (OMSs) that form reversible coordination bonds with amines provide an effective means for recyclability.

[0037] While the following text may reference or exemplify specific components of a complex or absorbent material, it is not intended to limit the scope of the invention to such particular references or examples. Various modifications may be made by those skilled in the art, in view of practical and economic considerations, such as the ligand and the method of preparing the compounds of the present invention.

[0038] The articles "a" and "an" as used herein refers to "one or more" or "at least one," unless otherwise indicated. That is, reference to any element or component of the present invention by the indefinite article "a" or "an" does not exclude the possibility that more than one element or component is present.

[0039] The term "about" as used herein refers to the referenced numeric indication plus or minus 10% of that referenced numeric indication.

[0040] The term "uptake capacity" is in weight percentage, namely the adsorbed weight amount of an adsorbed substance (e.g. CH₃I) per unit weight of MOF adsorbent (×100%).

[0041] The term "C₁₋₄ alkyl" includes alkyl of 1, 2, 3 or 4 carbons.

[0042] The ROI molecular traps generally contain a transition metal-containing (MOF) compound coordinated / complexed to a nitrogen-containing molecule. In some embodiments, the crystalline structures of compounds remain intact after the complexation between the transition metal to the amine. As illustrated in Figure 1, the ROI traps can be constructed by functionalization of a transition metal-containing compound with an amine. The resulting complex has the amines aligned in a certain configuration inside the porous crystalline structure and entraps ROI through the formation of a quaternary salts.

[0043] The transition metal-containing compound, prior to coordinating to one or more functional molecules to form a complex as a ROI trap, can be represented with the following formula: $M_3(O)X_b[(O_2C)-Y-(CO_2)]_3(Z)_a$. In some embodiments, M is a group IV, V or VI transition metal

with an oxidation state capable of coordinating to an amine. In some embodiments, M is a transition metal with an oxidation state of +3 or +4. In some embodiments, the metal is Cr, Mo, Zr, Fe, or Al having +3 oxidation state. In some embodiments, the metal M is Zr or Ti having +4 oxidation state. The subscript "a" is 0, 1 or 2. The subscript "b" is 0, 1 or 2. In some embodiments, a is 2 and b is 1. Each X in X_b can be the same or different. Each Z in $(Z)_a$ can be the same or different.

[0044] In some embodiments, each M in the compound is a metal of +3 oxidation state. In some embodiments, one M in the compound is a metal of +4 oxidation state, the other M in the compound are each a metal of +3 oxidation state, X is an anion of two negative charges. In some embodiments, one M in the compound is a metal of +4 oxidation state, the other M in the compound are each a metal of +3 oxidation state, and the compound contains two anions of one negative charge.

[0045] In some embodiments, a is 2. In some embodiments, a is 2 and b is 1. In some embodiments, a is 1 and b is 2. In some embodiments, a is 3 and b is 0. In some embodiments, Z is a water molecule or an organic solvent molecule that can coordinate to M with a lone electron pair.

[0046] In some embodiments, M is Cr. In some embodiments, M is Cr, a is 2 and b is 1. In some embodiments, Z is H₂O. In some embodiments, M is Cr and X is phenyl. In some embodiments, X is an anion of one negative charge, b is 1 and a is 2.

[0047] Y is an optionally substituted aryl (e.g. phenyl, naphthyl) or heteraryl (e.g. pyridinyl or pyrimidinyl). The optional substituents include, for example, halogens, -OR¹, -SR¹, -SR¹, -C₁-C₄ alkyl, -NO₂, -CN and -NR^aR^b, wherein R¹ at each occurrence is independently hydrogen (H) or C₁-C₄ alkyl, and R^a and R^b are independently hydrogen or C₁-C₄ alkyl. The (O₂C) or (CO₂) are each a carboxy substituent on Y. X is an anion carrying one or two negative charges. In some embodiments, X is F, OH, or an anion with one negative charge.

[0048] ROI traps of the present invention generally derives from the above described compound complexed to one or more nitrogen-containing functional molecules through the coordination of the metal atom (M) to the nitrogen at OMS. It is noted that some metal sites are fully coordinated and are not available for coordination with nitrogen. Only open metal sites are capable of coordination to nitrogen. The functional molecule contains at least two nitrogens.

While one of the nitrogens is involved in the coordination to the metal, the other forms quaternary ammonium salt with an organic iodide, thereby effectively trapping the radioactive material.

[0049] Therefore, when a complex is formed, one or more of Z and / or X are replaced by the functional molecules. The complex is represented by the formula $M_3(O)X_b[(O_2C)-Y-(CO_2)]_3(Z)_c$ wherein the subscript c is 0 or 1 and b is 0 or 1. In some embodiments of the complex, subscript c is 0 and subscript b is 1. In some embodiments of the complex, subscript c is 1 and subscript b is 1. In some embodiments, c is 0 and b is 2 in the complex. In some embodiments, Y is phenyl and the two carboxy groups on Y are positioned para to each other. In some embodiments, M is Cr^{3+} , Y is phenyl, c is 0 and b is 1. Each X in X_b can be the same or different. In some embodiments, X is Fluoride or OH. In some embodiments, X is an anion of two negative charges and one of the metals (M) is of +4 oxidation state.

[0050] In some embodiments, each M in the complex is a metal of +3 oxidation state, and the complex contains one anion X of one negative charge. In some embodiments, one M in the complex is a metal of +4 oxidation state, the other M in the complex are a metal of +3 oxidation state, b is 1 and X is an anion of two negative charges. In some embodiments, one M in the complex is a metal of +4 oxidation state, the other M in the complex are each a metal of +3 oxidation state, and the complex contains two anions each of one negative charge.

[0051] Z is a molecule coordinating to the open site of the metal. Each Z in $(Z)_c$ can be the same or different. Examples of Z includes water, acetonitrile, dimethylformamide (DMF) or other organic molecules capable of coordinating to the metal and being replaced with an amine-containing functional molecule.

[0052] One, two, or three functional molecule can coordinate to one or more metal M in the complex. The functional molecule can be represented by a formula of $R^1R^2NLNR^3R^4$. L is void or a C_{1-4} linker optional substituted with a C_{1-4} alkyl. Each of R^1 , R^2 , R^3 , and R^4 , are independently selected from the group consisting of H, methyl, ethyl, propyl, and isopropyl. The pair of R^1 and R^3 and / or the pair of R^2 and R^4 link up to form a C_{2-4} alkyl chain or bridge, wherein each of the C_{2-4} alkyl chain optionally has a carbon replaced with a heteroatom selected from the group consisting of NR^5 , S, and O. Each R^5 is independently H or C_{1-4} alkyl. Alternatively, two R^5 link up to form a C_{1-2} alkyl chain or bridge. In some embodiments, both pairs of “ R^1 and R^3 ” and “ R^2 and R^4 ” link up to form a C_2 alkyl chain or bridge.

[0053] In some embodiments, L is void and each of R^1 , R^2 , R^3 , and R^4 is independently H or methyl. Examples include NH_2NH_2 , $NHMeNHMe$, and NMe_2NMe_2 .

[0054] In some embodiments, L is a C_2 linker. R^1 and R^3 can link up to form a C_2 linker or bridge. Similarly, R^2 and R^4 can link up to form a C_2 linker or bridge. Non-limiting examples of the functional molecules include trimethylene-diamine (TED), hexamethylenetetramine (HMTA), N,N-dimethylethylenediamine (DMEDA), N,N-dimethyl-1,3-propanediamine (DMPDA) and N,N-dimethyl-1,4-butanediamine (DMBDA).

[0055] The functional molecule can contain a primary amine, a secondary amine and / or a tertiary amine. In some embodiments, the functional molecule contains at least two tertiary amines. In some embodiments, the functional molecule contains at least one tertiary amine and at least one primary or secondary amine. Non-limiting examples include N,N-dimethylethylenediamine (DMEDA), N,N-dimethyl-1,3-propanediamine (DMPDA), and N,N-dimethyl-1,4-butanediamine (DMBDA). Additional examples include $NH_2(CH_2)_nNMe_2$, wherein n is 0, 1, 2, 3 or 4.

[0056] As confirmed in various experiments, the resulting complex demonstrates a crystalline structure consistent with that of the pre-coordination compound. The pore diameter of the crystalline structure is large enough for effective mass transfer during nuclear waste reprocessing. In some embodiments, the average pore diameter ranges from about 5 Å to about 30 Å, from about 10 Å to about 25 Å, from about 10 Å to about 22 Å, from about 12 Å to about 25 Å, from about 15 Å to about 25 Å, from about 15 Å to about 22 Å, from about 16 Å to about 22 Å, from about 16 Å to about 20 Å, or from about 18 Å to about 20 Å. In some embodiments, the average pore diameter is greater than about 5, 8, 10, 12, 14, 16, 18, 20, 22, 24, or 26 Å. The complex described herein also features a higher Brunauer–Emmett–Teller (BET) surface area than other benchmark porous materials. In some embodiments, the complex has a Brunauer–Emmett–Teller (BET) surface area of greater than about 2000 $m^2 g^{-1}$, 2200 $m^2 g^{-1}$, 2400 $m^2 g^{-1}$, 2600 $m^2 g^{-1}$, 2800 $m^2 g^{-1}$, 3000 $m^2 g^{-1}$, 3200 $m^2 g^{-1}$, 3400 $m^2 g^{-1}$, 3600 $m^2 g^{-1}$, 3800 $m^2 g^{-1}$, or 4000 $m^2 g^{-1}$. In some embodiments, the complex has a Brunauer–Emmett–Teller (BET) surface area ranging from about 2000 to about 4000 $m^2 g^{-1}$, from about 2000 to about 3600 $m^2 g^{-1}$, from about 2000 to about 3400 $m^2 g^{-1}$, from about 2000 to about 3200 $m^2 g^{-1}$, from about 2000 to about 3000 $m^2 g^{-1}$, from about 2200 to about 3600 $m^2 g^{-1}$, from about 2200 to about 3400 $m^2 g^{-1}$, from about 2400 to about 3400 $m^2 g^{-1}$, from about

2400 to about 3200 m² g⁻¹, from about 2400 to about 3000 m² g⁻¹, or from about 2600 to about 3000 m² g⁻¹.

[0057] As a result of its large porosity and high surface area, the uptake capacity of the complex is significantly higher than conventionally used ROI absorbents. In some embodiments, the capacity is more than about 40 wt%, more than about 45 wt%, more than about 50 wt%, more than about 60 wt%, more than about 65 wt %, more than about 70 wt%, more than about 75 wt%, more than about 80 wt%, or more than about 85 wt% at a temperature of higher than about 100 °C, higher than about 150 °C, higher than about 200 °C, higher than about 250 °C, higher than about 300 °C, higher than about 350 °C, higher than about 400 °C, or higher than about 500 °C.

[0058] While many of the conventional capturing agents suffer a drastic decrease of uptake capacity at high humidity environment, the complex of the present invention has a much smaller drop in uptake capacity. In some embodiments, the uptake capacity decreases by less than about 30%, less than about 35%, less than about 40%, less than about 45%, or less than about 50% when relative humidity is increased from less than about 20% to more than about 70% or more than about 80%.

[0059] The decontamination factors (DFs) of CH₃I obtained under simulated reprocessing conditions reach a range significantly higher than that of the facility regulatory requirement (DF = 3000). In some embodiments, the complex of the present invention has a DF of more than about 300, more than about 3500, more than about 3700, more than about 4000, more than about 4500, more than about 5000.

[0060] In some embodiments, the complex of the present invention forms a partially reversible bonding with radioactive iodide. In some embodiments, the adsorption or desorption of ROI is not reversible. In some embodiments, full reversibility occurs between OMS of the metal and N of the amines during recycle process, which regenerates MOF (e.g. MIL-101-Cr) after removal of amines attached to ROI (e.g. CH₃I). The complex is also superior over conventional ROI absorbents in terms of its recyclability. In some embodiments, the complex retains at least about 70%, at least about 80%, at least about 90%, at least about 95%, at least about 99%, or about 100% of the uptake capacity after being recycled 1, 2, 3, 4, 5, 6, 7 or more times.

[0061] Also provided herein is a method of capturing radioactive iodides. The method includes contacting the complex of the present invention with a substance containing a radioactive iodide.

The method is particularly efficient in capturing organic iodides due to the formation of quaternary ammonium salt. Of course, one or more of the nitrogen in tertiary amines of the complex may react with the organic iodide. For example, when the functional molecule is HMTA, 1, 2, or 3 nitrogen may each form a quaternary ammonium salt with the organic iodide.

[0062] The organic iodide can have a C1 to C10 alkyl chain, which is linear or branched and optionally substituted with one or more heteroatoms. Examples of the organic group include methyl, ethyl, propyl, isopropyl, isobutyl, butyl, pentyl, isopentyl, and hexyl.

[0063] The radioactive iodide can be captured by physisorption and chemisorption. In some embodiments, more than about 70%, more than about 80%, or more than about 90% or substantially all the captured iodide is by chemisorption means, where the radioactive iodide forms an irreversible bonding with the amine of the complex. In some embodiments, the captured iodide is substantially uniformly dispersed in the complex.

[0064] The source of the iodides includes, for example, nuclear power plants, research labs, and other industry facilities. The stability of the complex allows it to be employed in high temperature environment. For example, the temperature of the iodide-containing substance can be more than about 100 °C, more than about 150 °C, more than about 200 °C, more than about 250 °C, or more than about 300 °C. In some embodiments, the substance is in an environment having a relative humidity of more than about 50%, more than about 60%, more than about 70%, or more than about 80%.

[0065] The complex after capturing the iodide can be recycled to regenerate the $M_3(O)X[(O_2C)-Y-(CO_2)]_3(H_2O)_a$, which upon coordination to the amine will form the complex again. As explained above, the complex can be recycled multiple times and retain the uptake capacity. The removal the iodide from the complex can be achieved by any method known in the art. For example, the complex can be treated with an acid (e.g. hydrochloric acid) to regenerate the compound.

EXAMPLES


Example 1

[0066] Highly efficient ROI molecular traps were obtained *via* tertiary amine grafting to binding sites within a MOF framework. One such designed molecular trap, MIL-101-Cr-TED,

exhibits an exceptionally high uptake capacity of 71 wt% for methyl iodide at 150 °C. Under identical capture conditions, this performance is more than 340% higher than that of the industrial adsorbent Ag⁰@MOR, a leading material in the United States for ROI capture. Furthermore, it can be reused multiple times without a decrease in uptake capacity. Coupled with its high chemical and thermal stability, high capture efficiency and lower cost, MIL-101-Cr-TED demonstrates the best performance for ROI capture materials reported to date and sets a new benchmark for the current ROI capture technology. It was shown that the construction and optimization of such molecular traps can be generalized by a suitable combination of a MOF with a tertiary amine molecule, which leads to an unlimited choice of structures. This strategy thus paves the way for further research and advancement on MOF-based molecular traps for their ultimate utility in ROI capture from nuclear waste.

[0067] To construct high performance molecular traps for capturing organic iodides, MIL-101-Cr was chosen as a model support material because of its large surface area ($> 3300 \text{ m}^2 \text{ g}^{-1}$), high acid and moisture stability, thermal stability (stable up to $\sim 300 \text{ }^\circ\text{C}$), and relatively low cost. Two tertiary amines, triethylenediamine (TED) and hexamethylenetetramine (HMTA), were selected as functional molecules for post-synthetic modification (PSM) of the MOF framework. Both species can use a single nitrogen to bind to the OMSs on the Cr trinuclear secondary building unit (SBU) of MIL-101-Cr, with the remaining nitrogen atoms available as binding sites for organic iodides (Figure 2). MIL-101-Cr-TED and MIL-101-Cr-HMTA were obtained by stirring MIL-101-Cr with TED or HMTA in benzene or chloroform at 110 °C for 24 h in a re-sealed flask under nitrogen atmosphere. Transmission electron microscopy (TEM) images of both functionalized MOFs show similar crystal morphology when compared to as-made MIL-101-Cr, suggesting retention of crystallinity and morphology after amine functionalization.

[0068] Synthetic route for the preparation of MIL-101-Cr-DMEDA ($n = 2$), MIL-101-Cr-DMPDA ($n = 3$), and MIL-101-Cr-DMBDA ($n = 4$):

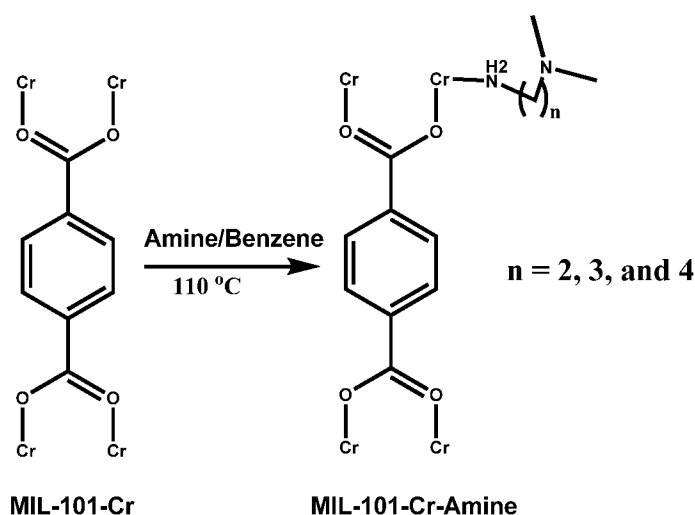

[0069] The successful grafting of tertiary amine groups onto MIL-101-Cr was confirmed by powder X-ray diffraction (PXRD), Fourier transform infrared (FT-IR) spectroscopy, X-ray photoelectron spectroscopy (XPS), solid-state ^1H NMR and elemental analysis. PXRD analysis shows that the diffraction profiles are unchanged after amine functionalization (Figure 3), indicating that the crystal structure of the functionalized material remains intact. Elemental analysis reveals a nitrogen content of 6.38 wt% and 12.15 wt% for MIL-101-Cr-TED and MIL-101-Cr-HMTA, respectively. This is equivalent to $\sim 2/3$ TED or HMTA molecules grafted to each Cr, which is consistent with the previous report of two available open metal sites on each Cr_3O cluster (2:3).

[0070] Nitrogen gas adsorption-desorption isotherms collected at 77 K indicate that the modification of TED and HMTA molecules onto MIL-101-Cr leads to a decrease in the Brunauer–Emmett–Teller (BET) surface area from $3342\text{ m}^2\text{ g}^{-1}$ to $2282\text{ m}^2\text{ g}^{-1}$ and $2272\text{ m}^2\text{ g}^{-1}$ for MIL-101-Cr-TED and MIL-101-Cr-HMTA, respectively. Despite such decreases, the surface areas of the two amine-functionalized samples are significantly higher than any other benchmark porous materials, which usually exhibit moderate surface areas of $\sim 300\text{--}1000\text{ m}^2\text{ g}^{-1}$. Based on the pore size distribution (Figure 4), both MIL-101-Cr-TED and MIL-101-Cr-HMTA have pore diameters of about 16 Å and 21 Å, which are large enough for effective mass transfer during nuclear waste reprocessing.

[0071] Thermogravimetric analysis (TGA) showed that MIL-101-Cr-TED and MIL-101-Cr-HMTA are stable up to 280 and 220 °C, respectively. Isothermal TG analysis of amine grafted MIL-101-Cr samples clearly show that both TED and HMTA remain attached to the framework without losing mass upon prolonged heating at 150 °C for 12 h. The high thermal stability of the

two compounds enables their use at the elevated working temperature (150 °C) required for nuclear waste treatment. The calculations also show that the TED and HMTA bind significantly more strongly to the OMSs compared to H₂O molecules, further suggesting the feasibility of their application under humid conditions. The large surface area coupled with the high thermal and chemical stability of both MIL-101-Cr-TED and MIL-101-Cr-HMTA makes it highly feasible to evaluate their performance as molecular traps for the removal of ROIs from off-gas mixtures.

[0072] To evaluate the performance of MIL-101-Cr-TED and MIL-101-Cr-HMTA for ROIs capture, as-made samples (~20 mg of each) were placed in a thermogravimetric analyzer and a CH₃I steam with partial pressure of 0.2 atm was passed through the sample cell using N₂ as a carrier gas. The adsorption amount was monitored by recording sample mass as a function of time. As shown in Figure 5, MIL-101-Cr-TED and MIL-101-Cr-HMTA rapidly absorb 120 and 136 wt% CH₃I within 10 min at 30 °C and reach their maximum uptake amount of 160 and 174 wt% by 120 min, respectively. The absorption amounts are significantly higher than all benchmark materials used for CH₃I adsorption under the same conditions, such as TED- and HMTA-impregnated activated carbon (TED@AC and HMTA@AC) and silver functionalized zeolites [including ZSM-5, 13X and mordenite (Ag⁺@ZSM-5, Ag⁺@13X, Ag⁺@MOR and Ag⁰@MOR) with CH₃I uptake amounts of 52, 54, 28, 45, 29, and 25 wt%, respectively (Figure 6)].

[0073] Since the capture of organic iodides from off-gas mixtures is typically performed at elevated temperatures (~150 °C), the CH₃I uptake capacity was tested at 150 °C for both samples and several benchmark materials. At this temperature, the maximum uptake amounts at 0.2 atm are 71 and 62 wt% for MIL-101-Cr-TED and MIL-101-Cr-HMTA, respectively (Figure 7A). These values are 4.4 and 3.9 times that of Ag⁰@MOR (16 wt%), a leading adsorbent material for capturing ROIs in the US nuclear fuel reprocessing industry. We also compared the performance of MIL-101-Cr-TED with Ag⁺@13X, a zeolite with the highest silver content. Ag⁺@13X has a higher CH₃I uptake amount (max. 48 wt%) compared to Ag⁰@MOR, but its low acid resistance presents a serious drawback. MIL-101-Cr-TED adsorbs 1.5 times more CH₃I than Ag⁺@13X under identical conditions. The capture capacity of MIL-101-Cr-TED is also much higher than the other benchmark materials such as TED@AC, HMTA@AC, Ag⁺@ZSM-5, and Ag⁺@MOR, with uptake amounts of 17, 14, 24, and 16 wt%, respectively (Figure 7B). Compared to the performance of pristine MIL-101-Cr (CH₃I uptake: 13 wt%), TED functionalization leads to a remarkable increase of ~5.5

times. Based on these comparisons, MIL-101-Cr-TED clearly ranks as the top candidate for adsorbent-based capture and removal of ROIs during nuclear fuel reprocessing. The exceptionally high uptake capacity of tertiary amine functionalized MIL-101-Cr can be attributed to two main factors: (a) relatively high surface area of the adsorbent after functionalization, and more importantly, (b) effective grafting of TED and HMTA onto the MOF pore surface (*via* OMSs) creating molecular traps that offer greatly enhanced bonding interactions toward organic iodides.

[0074] To assess the influence of humidity on the organic iodide uptake capacity, a crucial aspect for a sorbent's performance metrics in real-world applications, column breakthrough tests were performed at 150 °C under both dry and humid conditions (RH = 81% at 23 °C). For $\text{Ag}^+@13\text{X}$, the zeolite with the best performance to date, the uptake drops from 41.3 to 16.1 wt%, a significant decrease of 61% (Figure 7C and Figure 7C insert). A dramatic decrease was observed of 63.7% for $\text{Ag}^0@MOR$, with an uptake of 21.2 wt% under dry conditions and 7.7 wt% under humid conditions. For MIL-101-Cr-TED and MIL-101-Cr-HMTA, however, the extent of decrease is much smaller (42.4% and 40.8%, respectively). Based on the breakthrough data, the uptake capacities of MIL-101-Cr-TED and MIL-101-Cr-HMTA are 2.2 and 2.3 times higher than that of $\text{Ag}^+@13\text{X}$, and 4.6 and 4.8 times greater than $\text{Ag}^0@MOR$ at 150 °C under humid conditions, underscoring the robustness of MIL-101-Cr-TED and MIL-101-Cr-HMTA adsorbents in humid environments. The higher hydrophilicity of zeolites compared to MOF materials may account for this difference, which makes MOFs are an advantageous platform for CH_3I adsorption over conventional silver functionalized zeolites.

[0075] Nuclear processing facilities' regulatory standards require a 'decontamination factor' (DF) of 3000 (99.967% of active species removed) for CH_3I reprocessing, which is defined as the ratio of radioactivity before and after decontamination procedures. To evaluate the efficiency of MIL-101-Cr-TED as a molecular trap for capturing CH_3I from nuclear waste, breakthrough experiments were performed under conditions simulating the gas mixtures produced during CH_3I reprocessing, which include H_2O , HNO_3 , NO_2 , and NO at 150 °C. As shown in Figure 7D, the DFs of MIL-101-Cr-TED are as high as 3700-7300, which are substantially higher than the reprocessing facility regulatory requirements. This means that about 99.973~99.986% CH_3I can be removed by MIL-101-Cr-TED under such conditions. The result further illustrates that the

MOF-based molecular traps are highly suitable for ROIs capture from nuclear waste off-gas mixtures.

[0076] After CH₃I adsorption, MIL-101-Cr-TED can be regenerated by washing with 3 M HCl followed by ethanol solution, resulting in complete recovery of MIL-101-Cr (Figures 8 and 9). The framework can then be re-functionalized to MIL-101-Cr-TED following the initial procedure. The regenerated MIL-101-Cr-TED retains 100% of the original loading capacity after the five full cycles (Figure 7E). As silver based adsorbents often suffer from a dramatic loss of adsorption capacity after only a few cycles (e.g. 50% loss for Ag@13X after five cycles), a fully recyclable system was established for ROI capture from nuclear waste that is unprecedented and unattainable by any other known adsorbents. The CH₃I capture cost was estimated for MIL-101-Cr-TED and Ag⁰@MOR. As shown in Table 1, for each cycle the cost for the latter is 35 times of the former, a significant saving for MIL-101-Cr-TED.

[0077] Table 1: Comparison of performance and cost of MIL-101-Cr-TED and industrial adsorbent Ag⁰@MOR.

Material	Stability ^a	Maximum uptake capacity at 150 °C (wt%) ^b	Decrease in uptake capacity under humidity ^c	Nuclear processing facilities' regulatory standards ^d	Full recyclability	Cost (\$/g _{CH₃I}) ^e
MIL-101-Cr-TED	Yes	71 wt%	42.4%	Yes	Yes	0.29
Ag ⁰ @MOR	Yes	16 wt%	63.7%	Yes	No	10.2

[a] Including both acid stability and thermal stability; [b] based on adsorption isotherm data; [c] RH = 81%; [d] Nuclear processing facilities' regulatory standards require a DF of 3000 (99.967% of active species removed) for CH₃I reprocessing; [e] The estimated cost is based on the consumption of TED and Ag⁰@MOR, respectively, for a single cycle. The cost of MIL-101-Cr is not included as it is fully recyclable. The uptake amount of CH₃I used for cost calculation is based on the data obtained under humid conditions. The prices used for cost calculations are from Sigma-Aldrich (TED and silver, 500 g/pack) and Alfa Aesar (MOR, 500 g/pack).

[0078] The outstanding performance of MIL-101-Cr-TED and MIL-101-Cr-HMTA prompted the investigation of the possible interaction mechanisms between CH₃I molecules and the MOF host. Gas adsorption experiments carried out at 150 °C show evidence of both physisorption and chemisorption for CH₃I, but chemisorption is the dominant mode of interaction (76 and 68 wt%

for MIL-101-Cr-TED and MIL-101-Cr-HMTA, respectively) at that temperature, with most CH₃I molecules being chemically trapped within the framework.

[0079] Incorporating tertiary amine molecules within MIL-101-Cr gives rise to function-adjustable ROI molecular traps with record-high uptake capacities for ROI capture from nuclear waste. In addition, these molecular traps exhibit excellent recyclability, which is not available for any currently known industrial adsorbents. Coupled with its exceptionally high chemical and thermal stability, high efficiency, and low cost, such molecular traps offer significant promise for ROI capture from nuclear waste.

[0080] Materials and measurements. Commercially available reagents were purchased in high purity and used without further purification. Powder X-ray diffraction (PXRD) data were collected on a Rigaku Ultima-IV diffractometer or a Bruker AXS D8 Advance A25 Powder X-ray diffractometer. N₂ gas sorption experiments were carried out on a Micromeritics 3Flex volumetric adsorption analyzer. Elemental analyses were performed on a Perkin-Elmer 2400 element analyzer. Thermogravimetric analysis (TGA) was analyzed by a Q5000 thermogravimetric analyzer. UV-Vis data were collected using a Shimadzu UV-3600 spectrophotometer. HRTEM-EDS analysis was performed in a FEI Tecnai G2 S-Twin with a field emission gun operating at 200 kV. Images were acquired digitally on a Gatan multiple CCD camera. The FEI Tecnai G2S-Twin is equipped with an EDS detector, which was used for elemental analysis of the nanocrystal composition. The ¹H NMR data was collected on a Bruker AVANCE IIIHD console with 1.9 mm MAS probe. ICP was performed on a Perkin-Elmer Elan DRC II Quadrupole Inductively Coupled Plasma Mass Spectrometer (ICP-MS) analyzer. CH₃I adsorption experiments were carried out on a homemade gravimetric adsorption analyzer modified from a Thermogravimetric Analyzer Q50 (TA Instruments).

[0081] Synthesis of MIL-101-Cr. MIL-101-Cr was synthesized according to the reported procedure with minor modifications. Typically, a solution containing chromium(III) nitrate Cr(NO₃)₃·9H₂O (800 mg, 2.0 mmol), HNO₃ (2.0 mmol), benzene-1,4-dicarboxylic acid (328 mg, 2.0 mmol), and 10 mL H₂O was transferred to the PTFE/Teflon liner in a hydrothermal autoclave which was heated at 210 °C for 8 h and cooled afterwards slowly to room temperature. The solid product was isolated as a green powder by centrifugation and washed three times with DMF, water and ethanol for 12 h at 80 °C, respectively. The final product was dried under vacuum at 150 °C for 24 h.

[0082] Synthesis of MIL-101-Cr-TED. MIL-101-Cr was synthesized according to previously reported method. A resealable flask was charged with MIL-101-Cr (1.0 g), TED (1.5 g), and benzene (50 mL). The flask was sealed and heated to 110 °C for 3 days. The green solid of MIL-101-Cr-TED was collected after washing the product with dry benzene, and then drying under vacuum at 200 °C for 3 h. Elemental Analysis: C: 47.58%; H: 4.14%; N: 6.38%. ICP: Cr: 16.89%.

[0083] Synthesis of MIL-101-Cr-HMTA. A resealable flask was charged with MIL-101-Cr (1.0 g), HMTA (1.5 g), and chloroform (50 mL). The flask was sealed and heated to 110 °C for 3 days. The product was collected, washed with dry chloroform, and then dried under vacuum at 200 °C for 3 h to yield the green solid, MIL-101-Cr-HMTA. Elemental Analysis: C: 44.87%; H: 4.08%; N: 12.15%. ICP: Cr: 15.87%.

[0084] Synthesis of Ag⁺@13X. Ag⁺@13X was synthesized according to the previously reported procedure. ICP: Ag: 27.4%.

[0085] Synthesis of Ag⁺@ZSM-5. The same synthetic procedure for Ag⁺@13X was used except that zeolite 13X was replaced by ZSM-5. ICP: Ag: 9.71%.

[0086] Synthesis of Ag⁺@MOR. The same synthetic procedure as for Ag⁺@13X was used except that zeolite 13X was replaced by MOR. Ag: 7.4%.

[0087] Synthesis of Ag⁰@MOR. Ag⁰@MOR was synthesized by hydrogenation of Ag⁺@MOR under H₂ environment at 200 °C for 12 h (4). ICP: Ag: 7.7%.

[0088] Synthesis of TED@AC (5% TED). TED (100 mg) was added into a 100 mL methanol to form a solution. Then commercial AC (1.9 g) was added into the above solution to form a slurry. The mixture was stirred for two days to evaporate all the solvent to obtain the final TED@AC (5).

[0089] Synthesis of HMTA@AC (5% HMTA). The same synthetic procedure for TED@AC was used here except that TED was replaced by HMTA.

Example 2

[0090] Three amine molecules, N,N-dimethylethylenediamine (DMEDA), N,N-dimethyl-1,3-propanediamine (DMPDA), and N,N-dimethyl-1,4-butanediamine (DMBDA) were selected for MOF functionalization. MIL-101-Cr was synthesized following reported route. MIL-101-Cr-DMEDA, MIL-101-Cr-DMPDA and MIL-101-Cr-DMBDA were obtained by stirring MIL-101-

Cr with DMEDA, DMPDA, and DMBDA in extra dry benzene at 110 °C for 24 h in a re-sealed flask under nitrogen atmosphere. Transmission electron microscopy (TEM) images show that sample crystallinity and morphology were well retained after tertiary amine functionalization.

[0091] The successful grafting of amine groups onto MIL-101-Cr was also confirmed by powder X-ray diffraction (PXRD). PXRD analysis shows that the diffraction profiles of all three samples remain the same after amine functionalization, indicating that their structures are kept intact. The IR absorption spectra show that the weak bands at 1059, 1045 and 1047 cm^{-1} are associated with the stretching vibration of C-N in DMEDA, DMPDA and DMBDA in MIL-101-Cr-DMEDA, MIL-101-Cr-DMPDA and MIL-101-Cr-DMBDA respectively, but are not present in pristine MIL-101-Cr, confirming the linkage of amine molecules to OMSs of the Cr_3O clusters. The presence of nitrogen was further confirmed by N(1s) core level peak at ~400 eV in XPS spectra of MIL-101-Cr-DMEDA, MIL-101-Cr-DMPDA and MIL-101-Cr-DMBDA samples. Elemental analysis reveals a nitrogen content of 6.48, 6.43 and 6.15 wt% for MIL-101-Cr-DMEDA and MIL-101-Cr-DMPDA, and MIL-101-Cr-DMBDA, respectively. This indicates that all the OMSs of Cr_3O clusters are modified by different amine molecules.

[0092] The porosity of the amine grafted MIL-101-Cr samples was analyzed based on nitrogen gas adsorption-desorption isotherms collected at 77 K. Brunauer–Emmett–Teller (BET) surface area and pore volume data are summarized in Table 1. Compared to the pristine MOF, the BET values of the amine functionalized MIL-101-Cr are reduced from 3342 $\text{m}^2 \text{g}^{-1}$ to 2287, 2399 and 2323 $\text{m}^2 \text{g}^{-1}$ for MIL-101-Cr-DMEDA, MIL-101-Cr-DMPDA and MIL-101-Cr-DMBDA, respectively. There is also a clear correlation between the chain length of amine molecules and pore volume of the functionalized MOFs. Amines having longer chains take up more space, resulting in smaller pore volume. It is worth noting that despite a decrease in their surface area, all three amine-functionalized samples remain highly porous, with the porosity significantly higher than any other benchmark adsorbent materials used for ROI capture, which usually have a moderate surface area range of ~300-1000 $\text{m}^2 \text{g}^{-1}$.

[0093] Thermogravimetric (TG) analysis shows that all amine grafted samples are stable up to 300 °C. Isothermal TG analysis performed at 150 °C confirms that all of them withstand prolonged heating without losing weight. The high thermal stability of these compounds warrants their use for nuclear waste treatment at the required elevated working temperature (150 °C).

[0094] Methyl iodide sorption. Since the capture of organic iodides from reprocessing off-gas mixtures is typically performed at elevated temperatures (~ 150 °C), the CH_3I uptake capacity was tested at 150 °C for both amine grafted samples and several benchmark materials. At this temperature, MIL-101-Cr-DMEDA, MIL-101-Cr-DMPDA and MIL-101-Cr-DMBDA have a maximum CH_3I uptake amount of 80, 72 and 49 wt% at 0.2 atm, respectively. These values are 5.3, 4.8 and 3.3 times of that for $\text{Ag}^0\text{@MOR}$ (15 wt%), a leading adsorbent material in the United States for capturing radioactive organic iodides during nuclear fuel reprocessing. In addition, the capture capacity of MIL-101-Cr-DMEDA is much higher than other benchmark materials such as TED@AC, HMTA@AC, and $\text{Ag}^+\text{@ZSM-5}$, with uptake amounts of 17, 14, and 24 wt%, respectively. It is also higher than those of triethylenediamine (TED) and hexamethylenetetramine (HMTA) functionalized MIL-101-Cr with an uptake amount of 71 and 62 wt% for MIL-101-Cr-TED and MIL-101-Cr-HMTA, respectively. The added uptake capacity of MIL-101-Cr-DMEDA can be attributed to its higher surface area and pore volume. Compared to the performance of pristine MIL-101-Cr (CH_3I uptake: 13 wt%), DMEDA functionalization leads to a remarkable increase of ~ 6.2 times. This uptake amount is by far the highest value among all materials that have been assessed for CH_3I capture from nuclear waste.

[0095] Breakthrough experiments. A crucial aspect for a sorbent's performance metrics in real applications is its sustainability towards moisture. To assess the influence of humidity on the organic iodide uptake capacity, we performed column breakthrough tests at 150 °C under dry and humid conditions ($\text{RH} = 81\%$ at 23 °C). For $\text{Ag}^+\text{@13X}$, the zeolite with the best performance, the uptake drops from 40.3 to 15.3 wt%, a substantial decrease of 62%. A dramatic decrease of 64% was also observed for $\text{Ag}^0\text{@MOR}$ comparing its uptake of 21.2 wt% under dry conditions and 7.7 wt% under humid conditions. For MIL-101-Cr-DMEDA and MIL-101-Cr-DMPDA, however, significantly less effect was found under the same conditions, with a decrease of 30.9% and 26.2%, respectively. These values are also lower than those of MIL-101-Cr-TED and MIL-101-Cr-HMTA (decrease of 42.4% and 40.8%, respectively). These results indicate that MIL-101-Cr-DMEDA and MIL-101-Cr-DMPDA represent the best candidates for real-world applications which are under highly humid environment. Based on the breakthrough data, the uptake capacities of MIL-101-Cr-DMEDA and MIL-101-Cr-DMPDA under humidity are 3.5 and 3.1 times higher than that of $\text{Ag}^+\text{@13X}$, and 7.3 and 6.5 times of $\text{Ag}^0\text{@MOR}$ at 150 °C.

[0096] In addition to loading capacity, another important metric to measure the efficiency of a given adsorbent is decontamination factor (DF), which relates to the percentage removal of the activity of a radionuclide. To obtain DF values for MIL-101-Cr-DMEDA and MIL-101-Cr-DMPDA, breakthrough experiments were performed on a gas mixture that mimics the composition during nuclear reprocessing of used (spent) fuel. The mixture includes CH₃I, H₂O, HNO₃, NO₂, and NO at 150 °C. The DF values are 4100-5000 and 4100-4400 for MIL-101-Cr-DMEDA and MIL-101-Cr-DMPDA, respectively, which are significantly higher than that of the reprocessing facility regulatory requirement (DF = 3000). This means that at least 99.98% CH₃I can be removed by MIL-101-Cr-DMEDA and MIL-101-Cr-DMPDA under such conditions. These results suggest that both MIL-101-Cr-DMEDA and MIL-101-Cr-DMPDA meet all four performance metrics for CH₃I capture: high loading capacity, low penetration, high efficiency and high CFs.

[0097] The recyclability of MIL-101-Cr-DMEDA was evaluated after CH₃I adsorption. The sample was treated by concentrated HCl and ethanol solution, which resulted in complete recovery of MIL-101-Cr. The recovered MOF sample can then be re-functionalized again to form MIL-101-Cr-DMEDA. The regenerated MIL-101-Cr-DMEDA retained 100% of the original loading capacity after the three cycles.

[0098] Synthesis of MIL-101-Cr-DMEDA. MIL-101-Cr was synthesized according to previously reported method. (Zhao, T. *et al.* High-yield, fluoride-free and large-scale synthesis of MIL-101(Cr). *Dalton Transactions* **44**, 16791-16801, doi:10.1039/c5dt02625c (2015). A resealable flask was charged with MIL-101-Cr (1.0 g), DMEDA (1.5 g), and benzene (50 mL). The flask was sealed and heated to 110 °C for 3 days. The resulting solid was collected, washed with dry benzene, and then dried under vacuum at 200 °C for 3 h to produce the green solid, MIL-101-Cr-DMEDA. Elemental Analysis: C: 44.52%; H: 4.34%; N: 6.48%. ICP: Cr: 18.29%.

[0099] Synthesis of MIL-101-Cr-DMPDA. A similar procedure was used by replacing DMPDA with DMEDA. Elemental Analysis: C: 45.87%; H: 4.68%; N: 6.43%. ICP: Cr: 17.67%.

[00100] Synthesis of MIL-101-Cr-DMBDA. A similar procedure was used where DMEDA was replaced by DMBDA. Elemental Analysis: C: 47.32%; H: 4.78%; N: 6.15%. ICP: Cr: 17.17%.

[00101] Methyl iodide adsorption experiments. For a typical CH₃I adsorption measurement, ~20 mg MOF sample was loaded and activated at 200 °C for 2 hours under N₂ flow to ensure complete removal of residue solvents in the pores. The temperature was then reduced to 150 °C and the gas flow was switched from pure N₂ to a combination of pure N₂ and another N₂ gas stream passing through a CH₃I bubbler. The flow rates of the two gas streams were controlled via two gas flow controllers to achieve a partial pressure of 0.2 atm for CH₃I. The adsorption amount was monitored by recording the sample weight.

[00102] Porosity characterization experiments. Nitrogen adsorption experiments were carried out at 77 K to characterize the porosity of various samples using a Micromeritics 3Flex adsorption analyzer. Nitrogen gas of ultra-high purity was used in the measurements. For each experiment, 50 mg of sample was activated at 150 °C under dynamic vacuum overnight prior to adsorption measurement. The BET surface area, pore volume, and BJH pore size distribution are derived from the adsorption isotherms (see Table 2 and Fig. X (S1†)).

[00103] Table 2: Adsorption summary of pristine and amine grafted MIL-101–Cr

Compound	BET surface area (m ² g ⁻¹)	Pore volume (cm ³ g ⁻¹)	CH ₃ I uptake ^a (wt%)		
			Total	Physisorbed ^b	Chemisorbed ^c
MIL-101–Cr	3429.2	1.729	13.5	11.6	1.9
MIL-101–Cr–DMEDA	2459.8	1.191	79.6	40.8	38.8
MIL-101–Cr–DMPDA	2372.6	1.105	72.1	35.0	37.1
MIL-101–Cr–DMBDA	2217.9	1.064	48.6	16.2	32.4

^a Temperature = 150 °C and CH₃I partial pressure = 0.2 atm. ^b The amount of chemisorption was estimated from the desorption branch of the isotherm. ^c The remaining part after desorption was attributed to chemisorption.

[00104] Breakthrough experiments with or without humidity. The breakthrough experiment was conducted using a lab-scale fixed-bed reactor at 150 °C. In a typical experiment, the powder sample was activated at 150 °C for 3 h. Then 1.0 g of material was packed into a quartz column (5.8 mm I.D. × 150 mm) with silane treated glass wool filling the void space. A helium flow (5 cm³ min⁻¹) was used to purge the adsorbent. The flow of He was then turned off while dry N₂ at a rate of 5 mL min⁻¹ bubbled through CH₃I and was allowed to flow into the column. The flow rate of CH₃I was 8.872 mg min⁻¹ (1.4 cm³ min⁻¹), determined through trial and error. The

experiment was run in the stable system without any sample and the flow rate of CH₃I weighed by mass difference. The effluent from the column was monitored using an online mass spectrometer (MS). Experiments in the presence of humidity were performed by injecting water into the gas mixture at a rate of 0.12 $\mu\text{L min}^{-1}$ using a Fusion 100 syringe pump at 20 °C, keeping other conditions the same.

[00105] The absolute adsorbed amount of gas i (q_i) is calculated from the breakthrough curve by the equation:

$$[00106] \quad q_i = \frac{F_i \times t_0 - V_{dead} - \int_0^{t_0} F_e \Delta t}{m}$$

[00107] where F_i is the influent flow rate of the specific gas ($\text{cm}^3 \text{min}^{-1}$); t_0 is the adsorption time (min); V_{dead} is the dead volume of the system (cm^3); F_e is the effluent flow rate of the specific gas ($\text{cm}^3 \text{min}^{-1}$); and m is the mass of the sorbent (g).

[00108] It will be understood by those of skill in the art that numerous and various modifications can be made without departing from the spirit of the present invention. Therefore, it should be understood that the various embodiments of the present invention described herein are illustrative only and not intended to limit the scope of the present invention.

Claims

1. A complex comprising

a) a compound of Formula $M_3(O)X_b[(O_2C)-Y-(CO_2)]_3(Z)_c$, wherein

M is a transition metal with an oxidation state of +3 or +4;

Y is an optionally substituted aryl or heteroaryl;

X is an anion having 1 or 2 negative charges;

Z is a neutral molecule capable of coordinating to M;

b is 1 or 2;

c is 0 or 1;

and

b) one or more nitrogen-containing functional molecules, wherein said one or two functional molecules each contain at least two nitrogens, and one of said at least two nitrogens is coordinated to the M.

2. The complex of Claim 1, wherein b is 1.

3. The complex of any one of Claims 1 to 2, wherein c is 0 and two of the functional molecules are coordinated to the M.

4. The complex of any one of Claims 1 to 3, wherein the M is selected from the group consisting of Cr, Mo, Fe, Al, Zr and Ti.

5. The complex of any one of Claims 1 to 4, wherein the M is a +3 oxidation state metal selected from the group consisting of Cr, Mo, Fe, and Al, and Y is optionally substituted with a substituent selected from the group consisting of $-OR^1$, $-SR^1$, $-C_1-C_4$ alkyl, $-NO_2$, $-CN$ and $-NR^aR^b$, wherein R^1 at each occurrence is independently hydrogen (H) or C_1-C_4 alkyl, and R^a and R^b are independently hydrogen, or C_1-C_4 alkyl.6. The complex of any one of Claims 1 to 5, wherein M is Cr^{3+} .

7. The complex of any one of Claims 1 to 6, wherein the complex is a porous crystalline.

8. The complex of any one of Claims 1 to 7, wherein said one or more functional molecules independently have a formula of $R^1R^2NLNR^3R^4$, wherein,
L is void or a C_{1-4} linker optionally substituted with a C_{1-4} alkyl; and
each of R^1 , R^2 , R^3 and R^4 are independently selected from the group consisting of H, methyl, ethyl, propyl, and isopropyl, or
 R^1 and R^3 and / or R^2 and R^4 link up to form a C_{2-4} alkyl chain, wherein each of said C_{2-4} alkyl chain optionally and independently has a carbon replaced with a heteroatom or group selected from the group consisting of NR^5 , S, and O, wherein R^5 is H or C_{1-4} alkyl, or two R^5 link up to form a C_{1-2} alkyl chain.
9. The complex of any one of Claims 1 to 8, wherein L is void and each of R^1 , R^2 , R^3 , and R^4 is independently H or methyl.
10. The complex of any one of Claims 1 to 8, wherein L is a C_2 linker.
11. The complex of any one of Claims 1 to 8, wherein L is a C_2 linker, and R^1 and R^3 link up to form a C_2 linker.
12. The complex of any one of Claims 1 to 11, wherein said one or more functional molecules each contain at least two tertiary amines.
13. The complex of any one of Claims 1 to 11, wherein said one or more functional molecules each contains at least one tertiary amine and at least one primary or secondary amine.
14. The complex of any one of Claims 1 to 8, wherein said one or more functional molecules are selected from the group consisting of triethylenediamine (TED), hexamethylenetetramine (HMTA), N,N-dimethylethylenediamine (DMEDA), N,N-dimethyl-1,3-propanediamine (DMPDA) and N,N-dimethyl-1,4-butanediamine (DMBDA).
15. The complex of any one of Claims 1 to 14, having an average pore diameter between about 10 Å and 21 Å.

16. The complex of any one of Claims 1 to 15, wherein the complex is stable at a temperature above 150 °C for more than 10 hours.
17. The complex of any one of Claims 1 to 16, wherein the complex has a Brunauer–Emmett–Teller (BET) surface area ranging from about 2200 m² g⁻¹ to about 3500 m² g⁻¹.
18. The complex of any one of Claims 1 to 17, wherein the complex has a decontamination factor of more than about 3500.
19. The complex of any one of Claims 1 to 18, wherein the complex has an uptake capacity of more than about 50 wt% for radioactive iodide.
20. The complex of any one of Claims 1 to 19, wherein the uptake capacity decreases by less than about 35% when relative humidity is increased from less than about 20% to more than about 70%.
21. The complex of any one of Claims 1 to 20, wherein the complex retains more than about 95% of the uptake capacity for the radioactive iodide after at least three cycles.
22. A method of capturing radioactive iodide, comprising contacting the complex of any one of Claims 1 to 21 with a substance containing a radioactive iodide.
23. The method of Claim 22, wherein the radioactive iodide is methyl iodide.
24. The method of any one of Claims 22 to 23, wherein the substance is collected from a source at a nuclear power plant.
25. The method of any one of Claims 22 to 24, wherein the radioactive iodide forms an irreversible bonding with the complex.
26. The method of any one of Claims 22 to 25, wherein the substance has a temperature of above about 100 °C.
27. The method of any one of Claims 22 to 26, wherein the iodide is substantially uniformly dispersed in the complex when captured in the complex.

28. The method of any one of Claims 22 to 27, further comprising treating the complex after capturing the radioactive iodide to regenerate $M_3(O)X_b[(O_2C)-Y-(CO_2)]_3(Z)_a$, wherein

M is a transition metal with an oxidation state of +3 or +4;

Y is an optionally substituted aryl or heteroaryl;

X is an anion having 1 or 2 negative charges;

Z is a neutral molecule capable of coordinating to the M;

a is 1 or 2;

b is 1 or 2.

29. The method of any one of Claims 22 to 28, wherein the substance is in an environment having a relative humidity of more than about 70%.

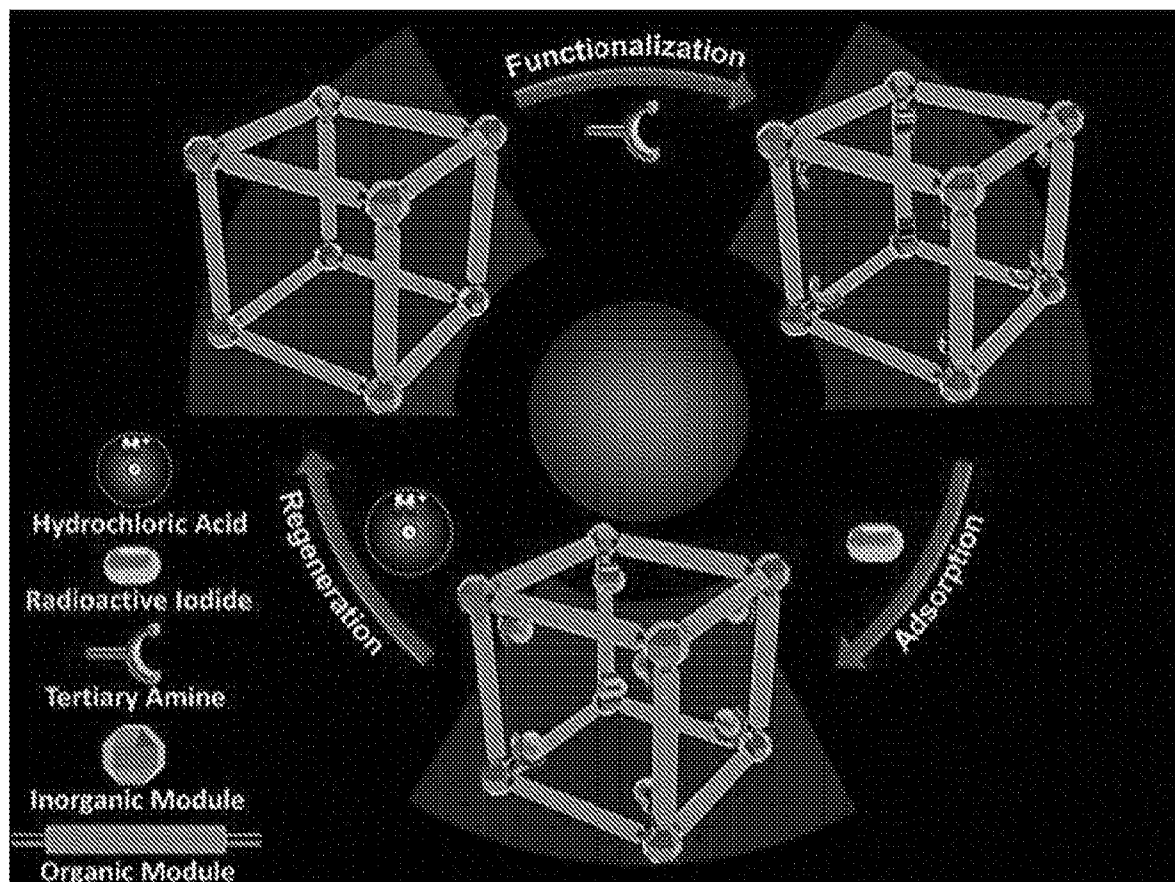


Figure 1

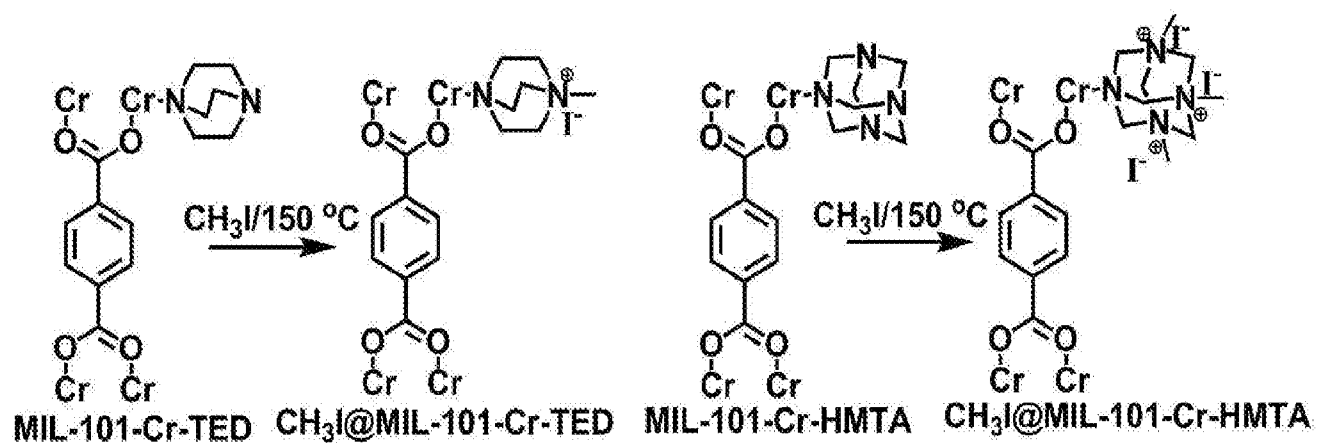


Figure 2

2/9

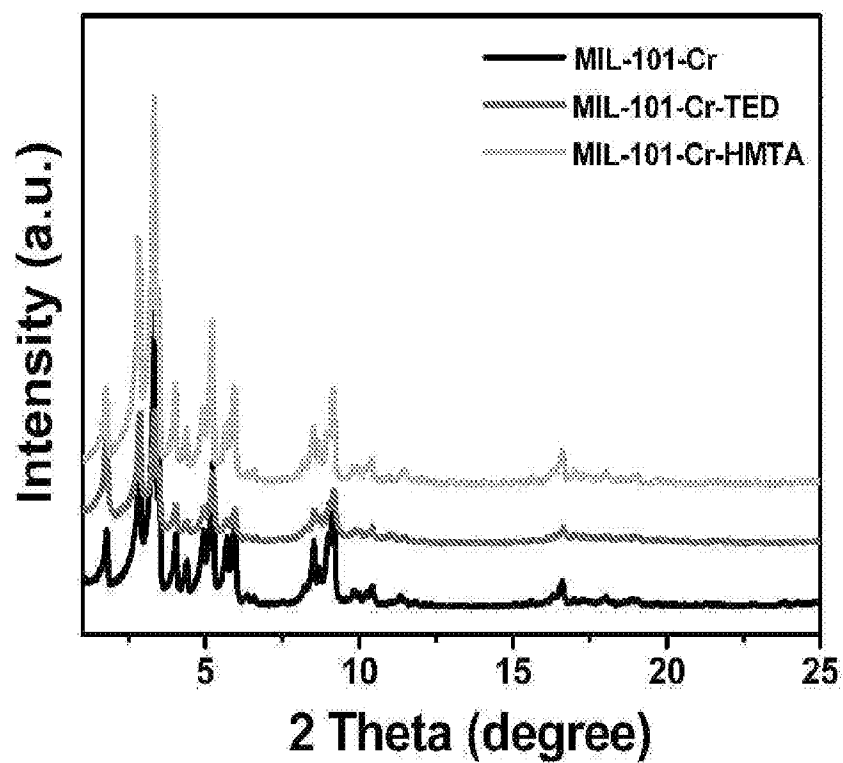


Figure 3

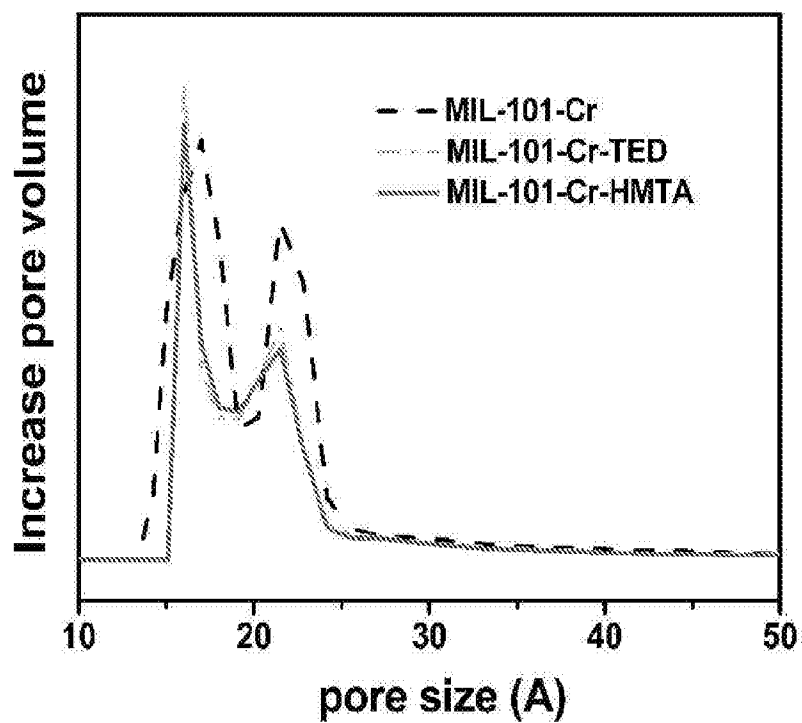


Figure 4

3/9



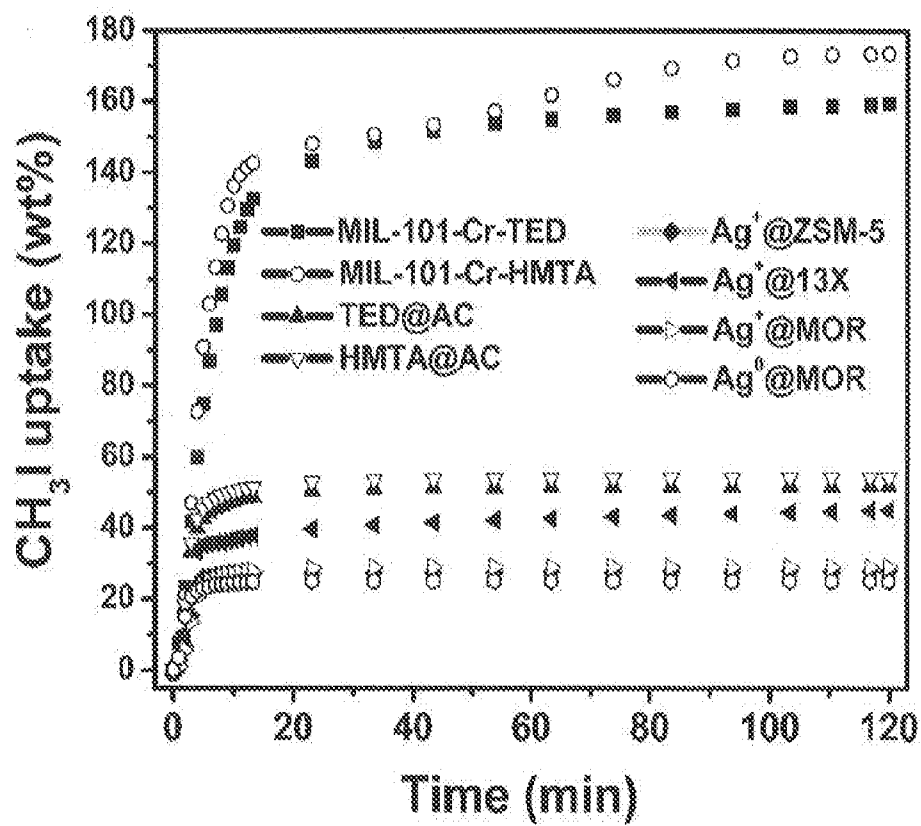



Figure 5


Figure 6

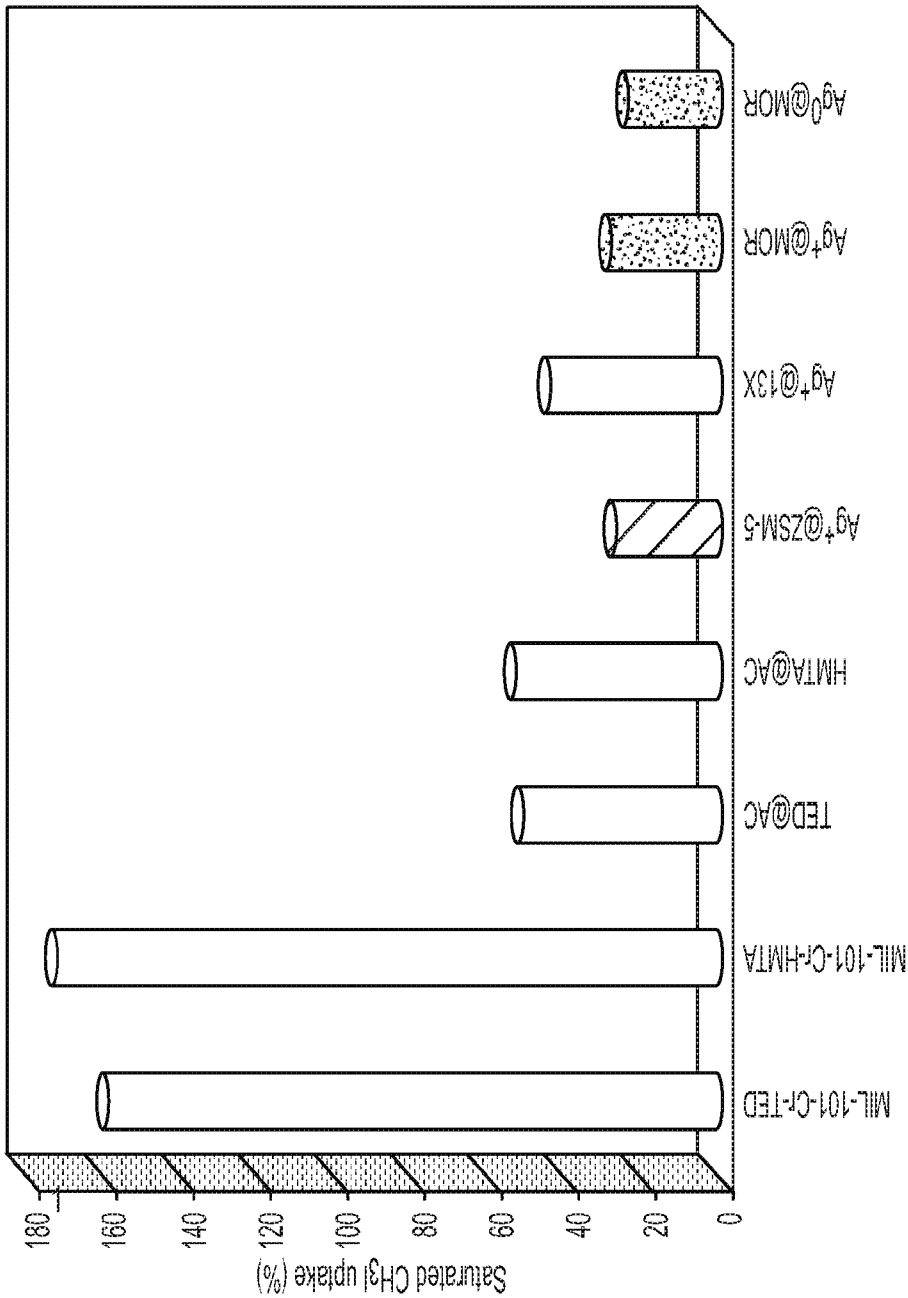

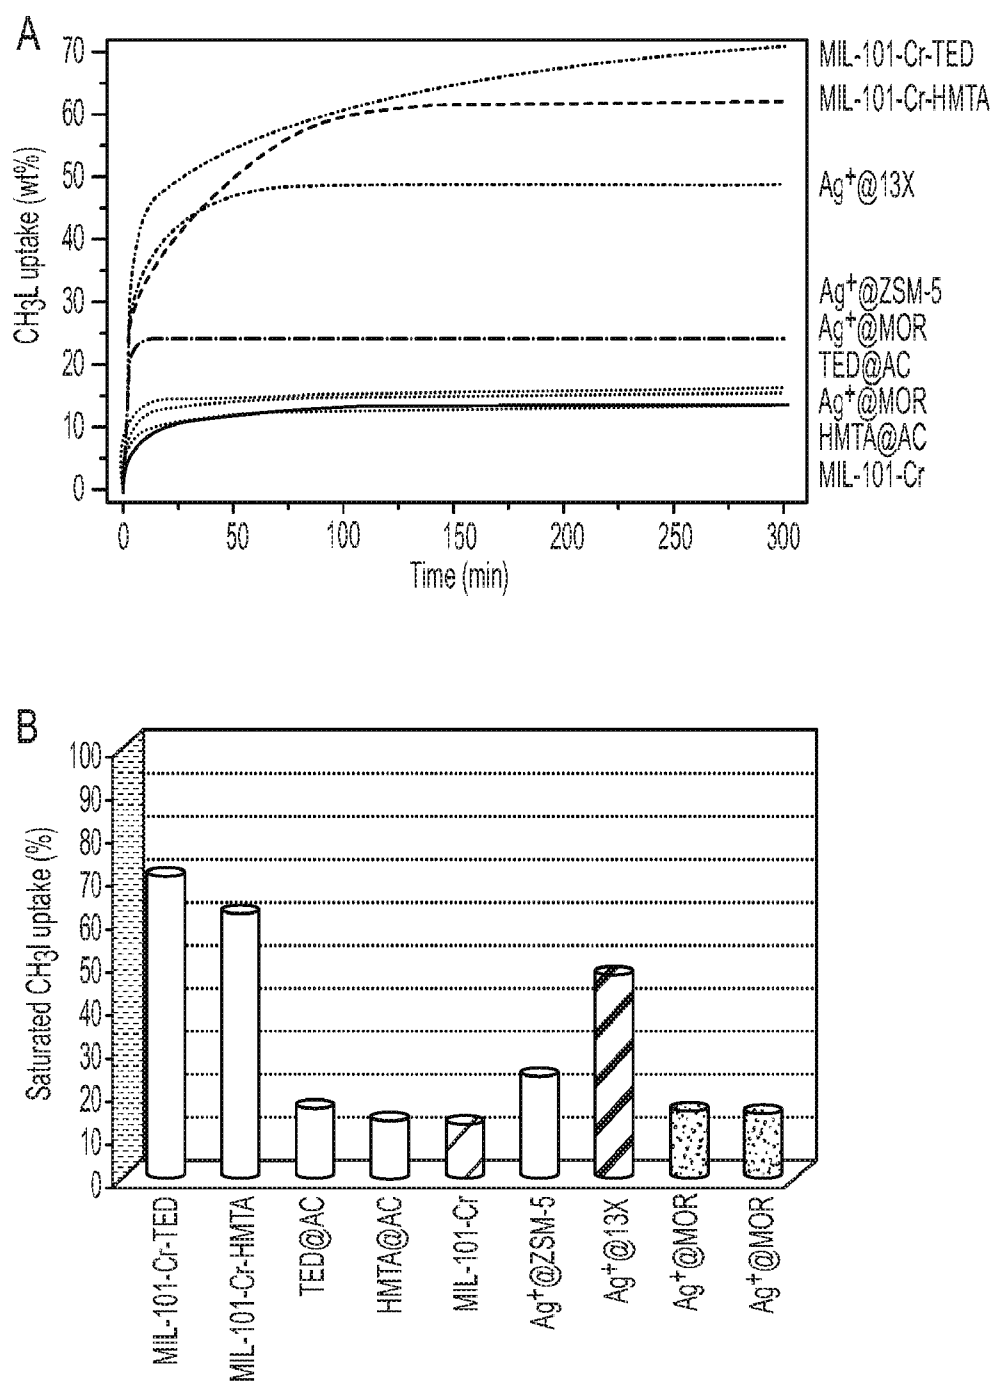

Figures 7A–7B

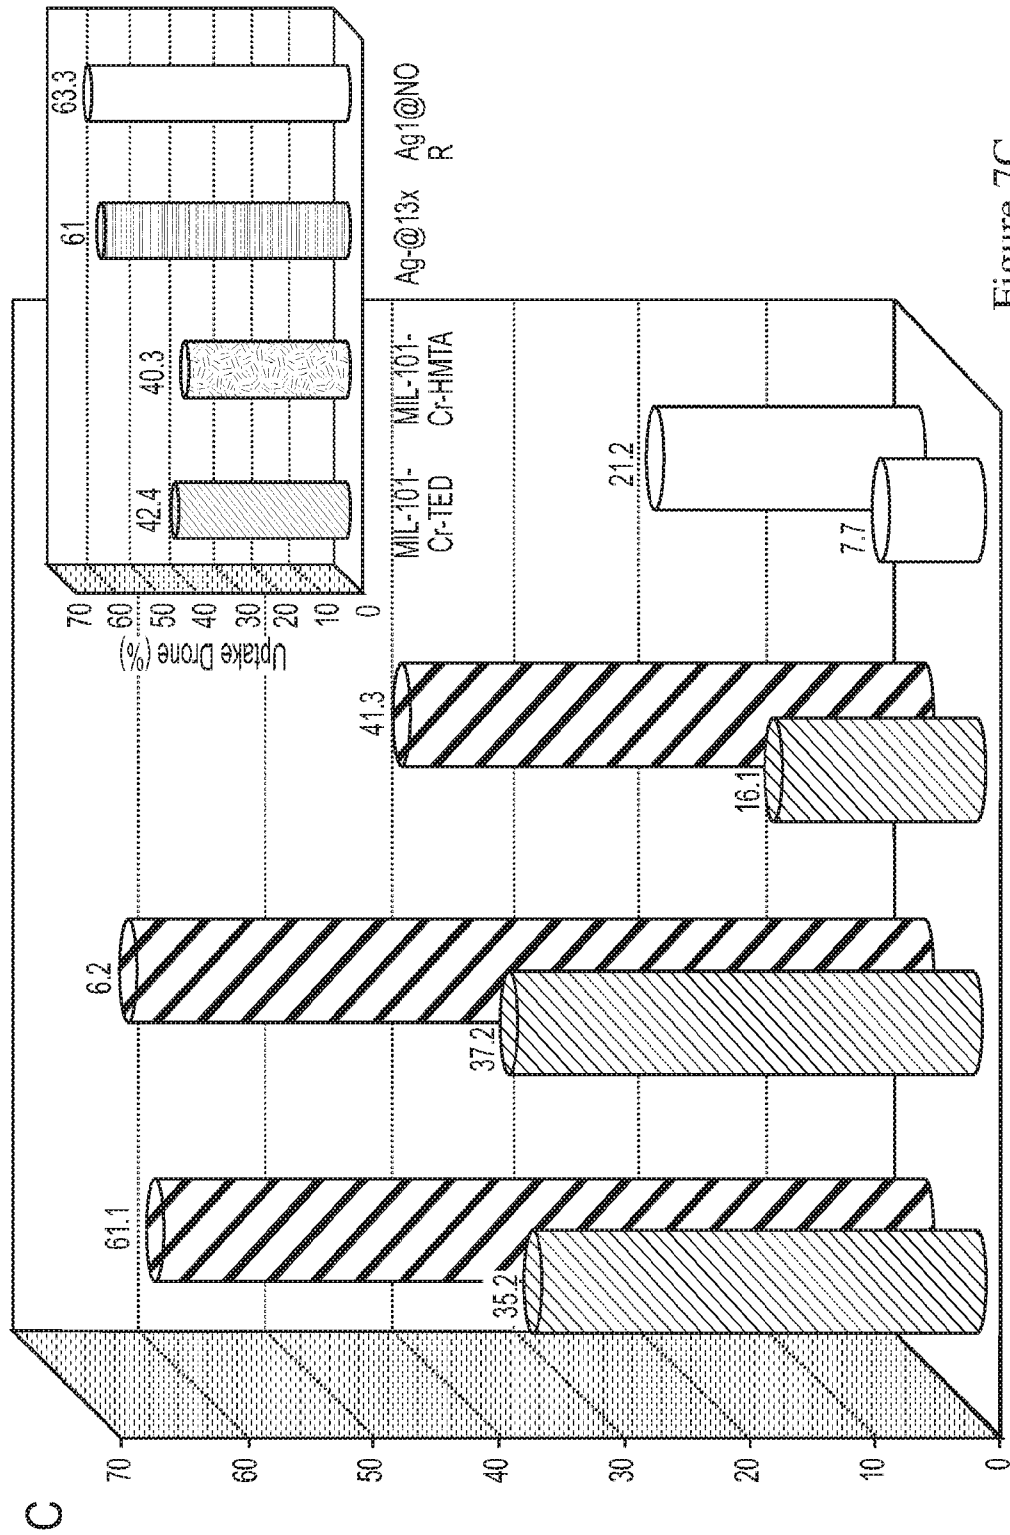

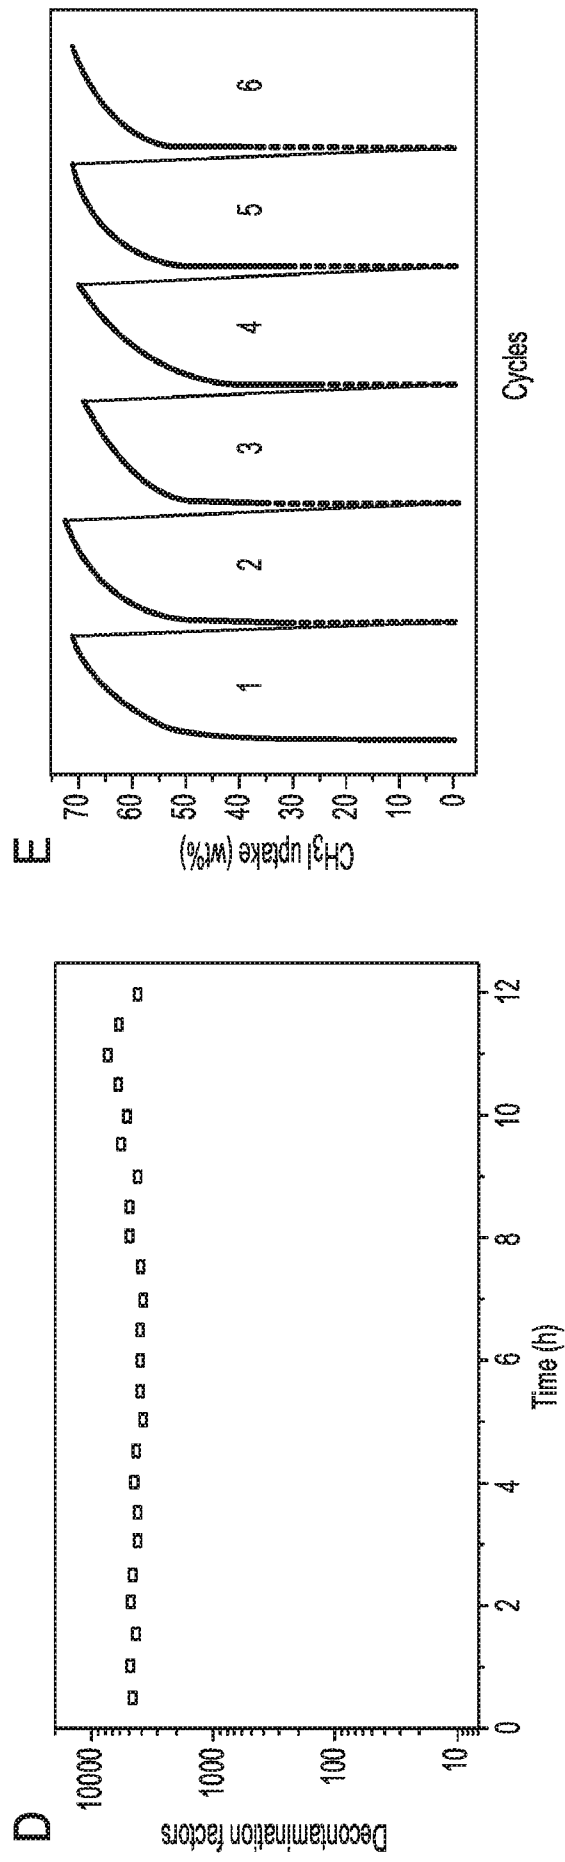

Figures 7D-7E

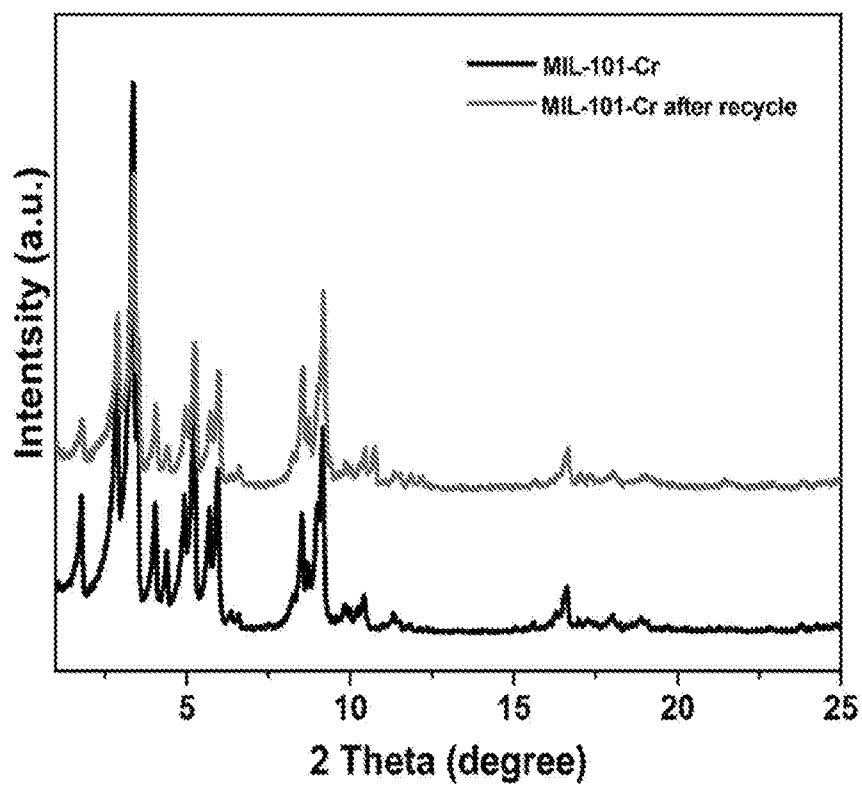


Figure 8

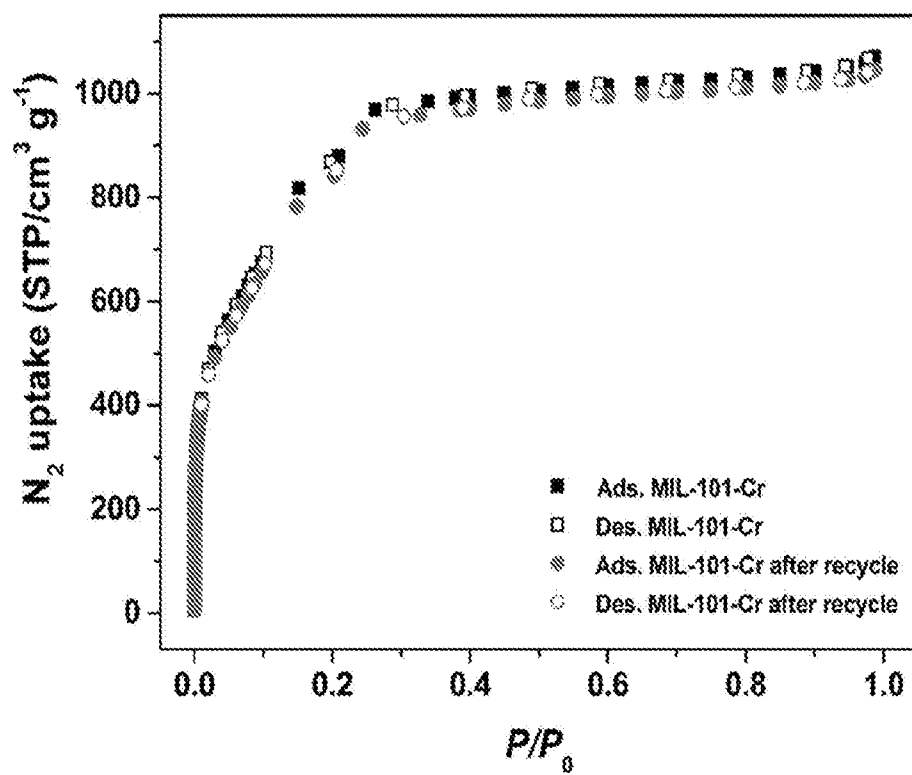


Figure 9

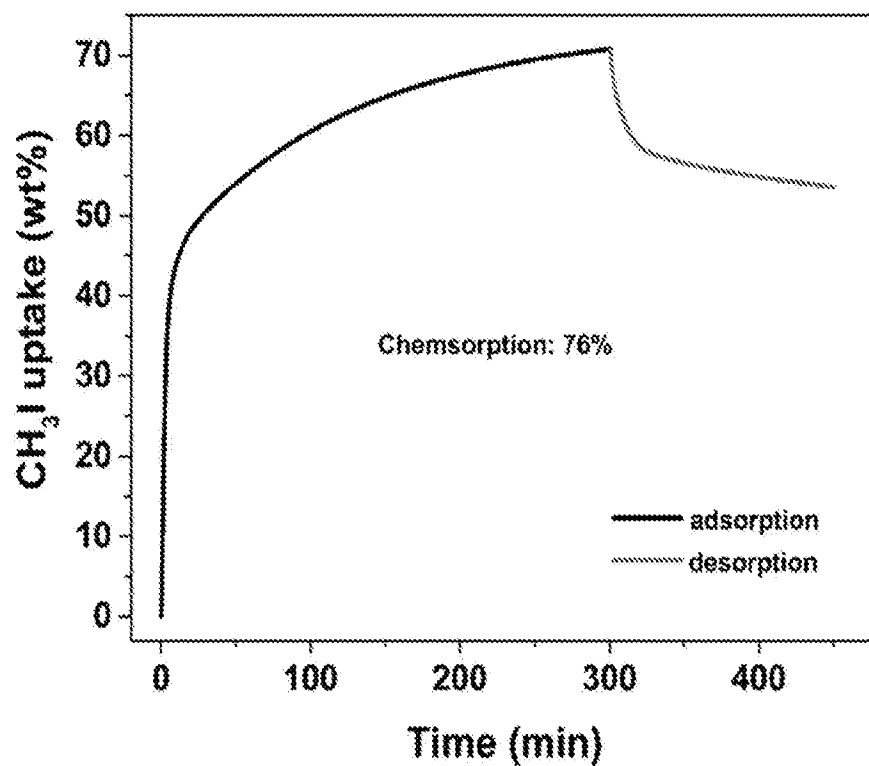


Figure 10

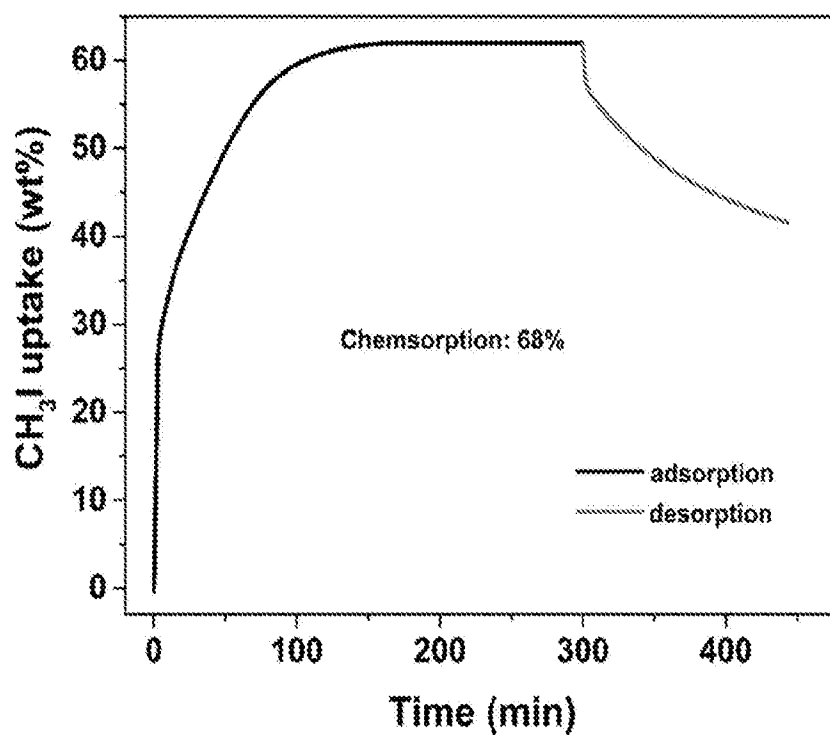


Figure 11

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2017/068995

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - B01D 53/02; B01D 53/00; B01J 20/00; B01J 20/22; B01J 20/28 (2018.01)

CPC - B01D 2253/204; B01D 53/00; B01D 53/02; B01D 2253/00; B01D 2253/20 (2018.08)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2014/0294709 A1 (THE REGENTS OF THE UNIVERSITY OF CALIFORNIA) 02 October 2014 (02.10.2014) entire document	1-3
A	US 2014/0212944 A1 (BEIJING STAR NEW MATERIAL CO LTD) 31 July 2014 (31.07.2014) entire document	1-3
A	MOTKURI et al., Fluorocarbon adsorption in hierarchical porous frameworks, Nature Communications, Vol. 5, 09 July 2014 [retrieved on 03 August 2018]. Retrieved from the Internet: <URL: https://www.nature.com/articles/ncomms5368 >. entire document	1-3
P, X	LI et al., Capture of organic iodides from nuclear waste by metal-organic framework-based molecular traps, Nature Communications, Vol. 8, 07 September 2017 [retrieved on 03 August 2018]. Retrieved from the Internet: <URL: https://www.ncbi.nlm.nih.gov/pmc/articles/PMC5589857/ >. entire document	1-3

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

03 August 2018

Date of mailing of the international search report

29 AUG 2018

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, VA 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2017/068995

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☒ Claims Nos.: 4-29
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.