




(86) Date de dépôt PCT/PCT Filing Date: 2002/07/08
(87) Date publication PCT/PCT Publication Date: 2004/01/15
(85) Entrée phase nationale/National Entry: 2005/01/04
(86) N° demande PCT/PCT Application No.: US 2002/021611
(87) N° publication PCT/PCT Publication No.: 2004/004980

(51) Cl.Int.⁷/Int.Cl.⁷ B25B 23/16
(71) Demandeur/Applicant:
CARROLL, SEAN M., US
(72) Inventeurs/Inventors:
CARROLL, SEAN M., US;
CARROLL, SEAN, M., US
(74) Agent: FURMAN & KALLIO

(54) Titre : SYSTEME A RALLONGE DE DOUILLE D'ENTRAINEMENT A CANNELURES
(54) Title: EXTENDABLE SPLINE-DRIVE SOCKET SYSTEM

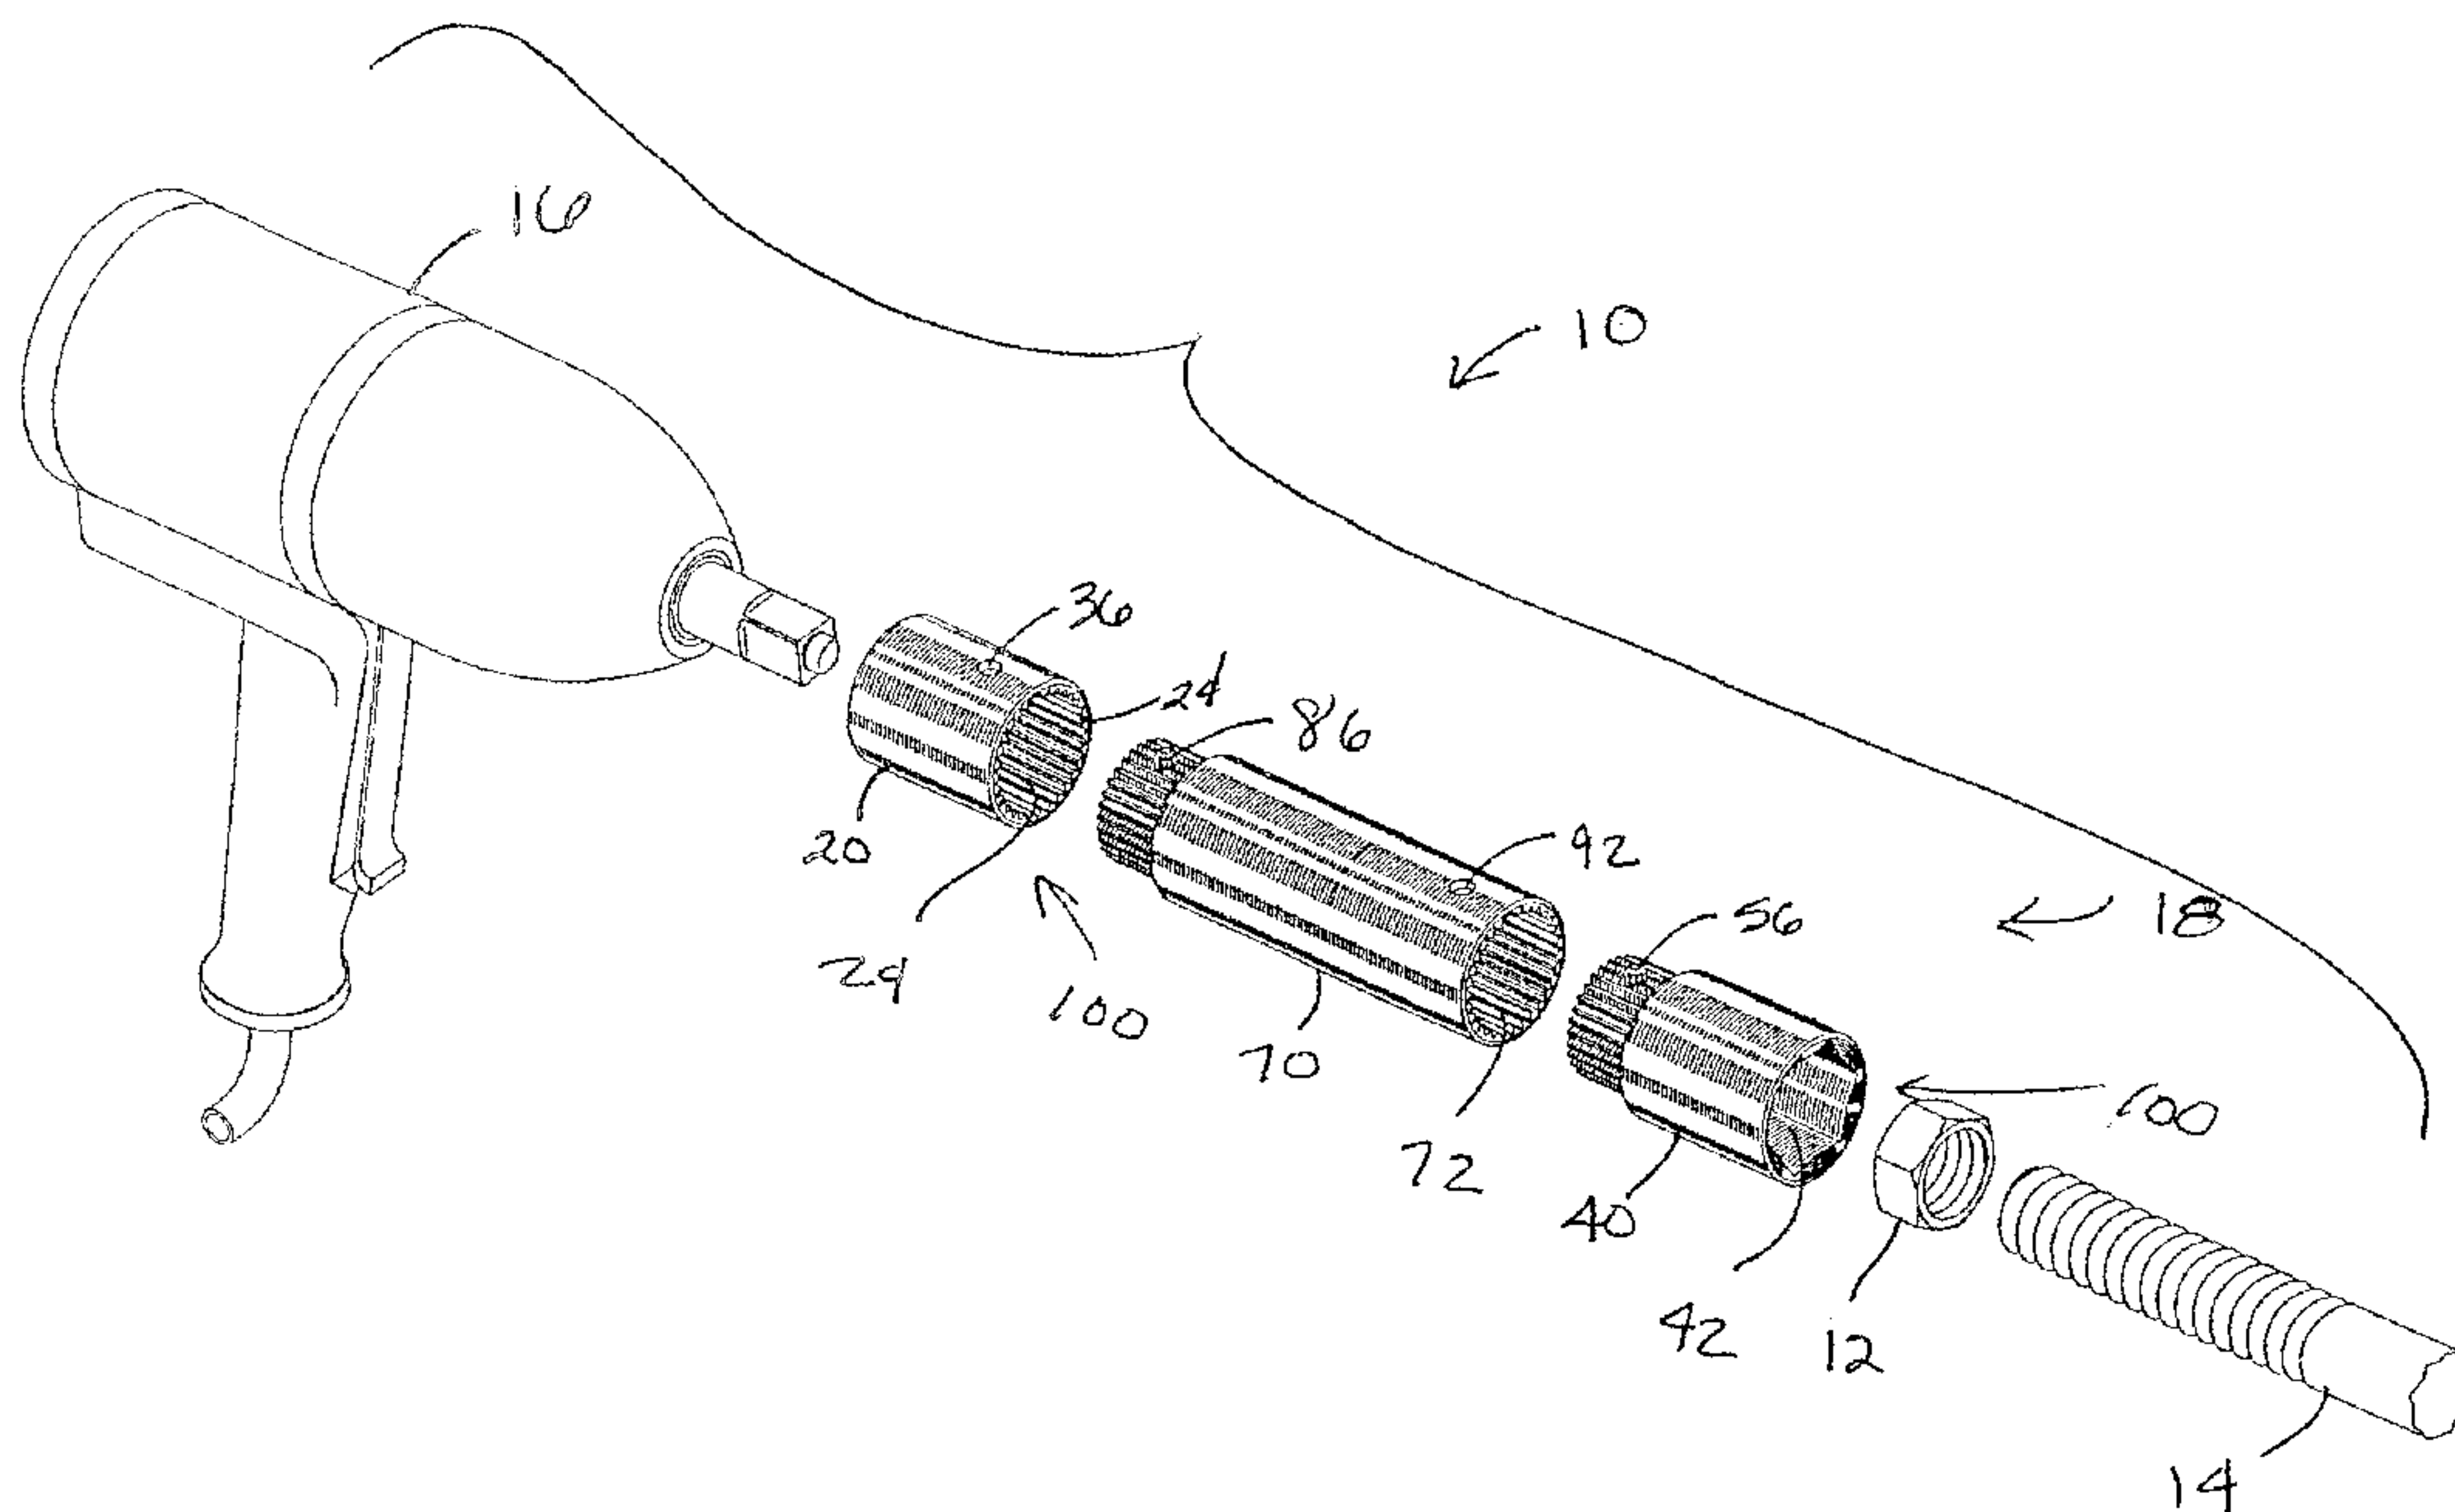

(57) **Abrégé/Abstract:**

A multi-piece socket system (10) having a large internal cavity to allow a protrusion of a long rod or other workpiece to extend into the socket system (10). The socket section (18) has at least two pieces: a drive adaptor (20) and a socket (40), extension collar(s) (70) if used, and drive adaptor (20) form a long tubular body into which a rod or other central member may enter while the nut is being driven onto the rod. The drive adaptor (20), extension collars (70), and sockets (40) preferably attach together using a plurality of interlocking teeth on the ends of each member. For further stability, a spring biased pin (56, 86) extends from the wall of one member and through a hole (36) in the wall of the mating member. Additional attachments, such as a threaded rod (100) and drill chuck (110, 120), may also be used.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/004980 A1

(51) International Patent Classification⁷: **B25B 23/16**

(71) Applicant and

(21) International Application Number:

PCT/US2002/021611

(72) Inventor: **CARROLL, Sean, M.** [US/US]; 1145 El Camino Real #2, Burlingame, CA 94010 (US).

(22) International Filing Date: 8 July 2002 (08.07.2002)

(74) Agents: **TITUS, Carol, D.** et al.; Gregory Smith & Associates, 3900 Newpark Mall Road, Third Floor, Suite 317, Neward, CA 94560 (US).

(25) Filing Language: English

(26) Publication Language: English

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier applications:


US	29/160,446 (CON)
Filed on	9 May 2002 (09.05.2002)
US	29/160,447 (CON)
Filed on	9 May 2002 (09.05.2002)
US	29/155,019 (CON)
Filed on	1 February 2002 (01.02.2002)
US	29/136,362 (CON)
Filed on	29 January 2001 (29.01.2001)
US	09/189,235 (CON)
Filed on	3 November 1998 (03.11.1998)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: EXTENDABLE SPLINE-DRIVE SOCKET SYSTEM

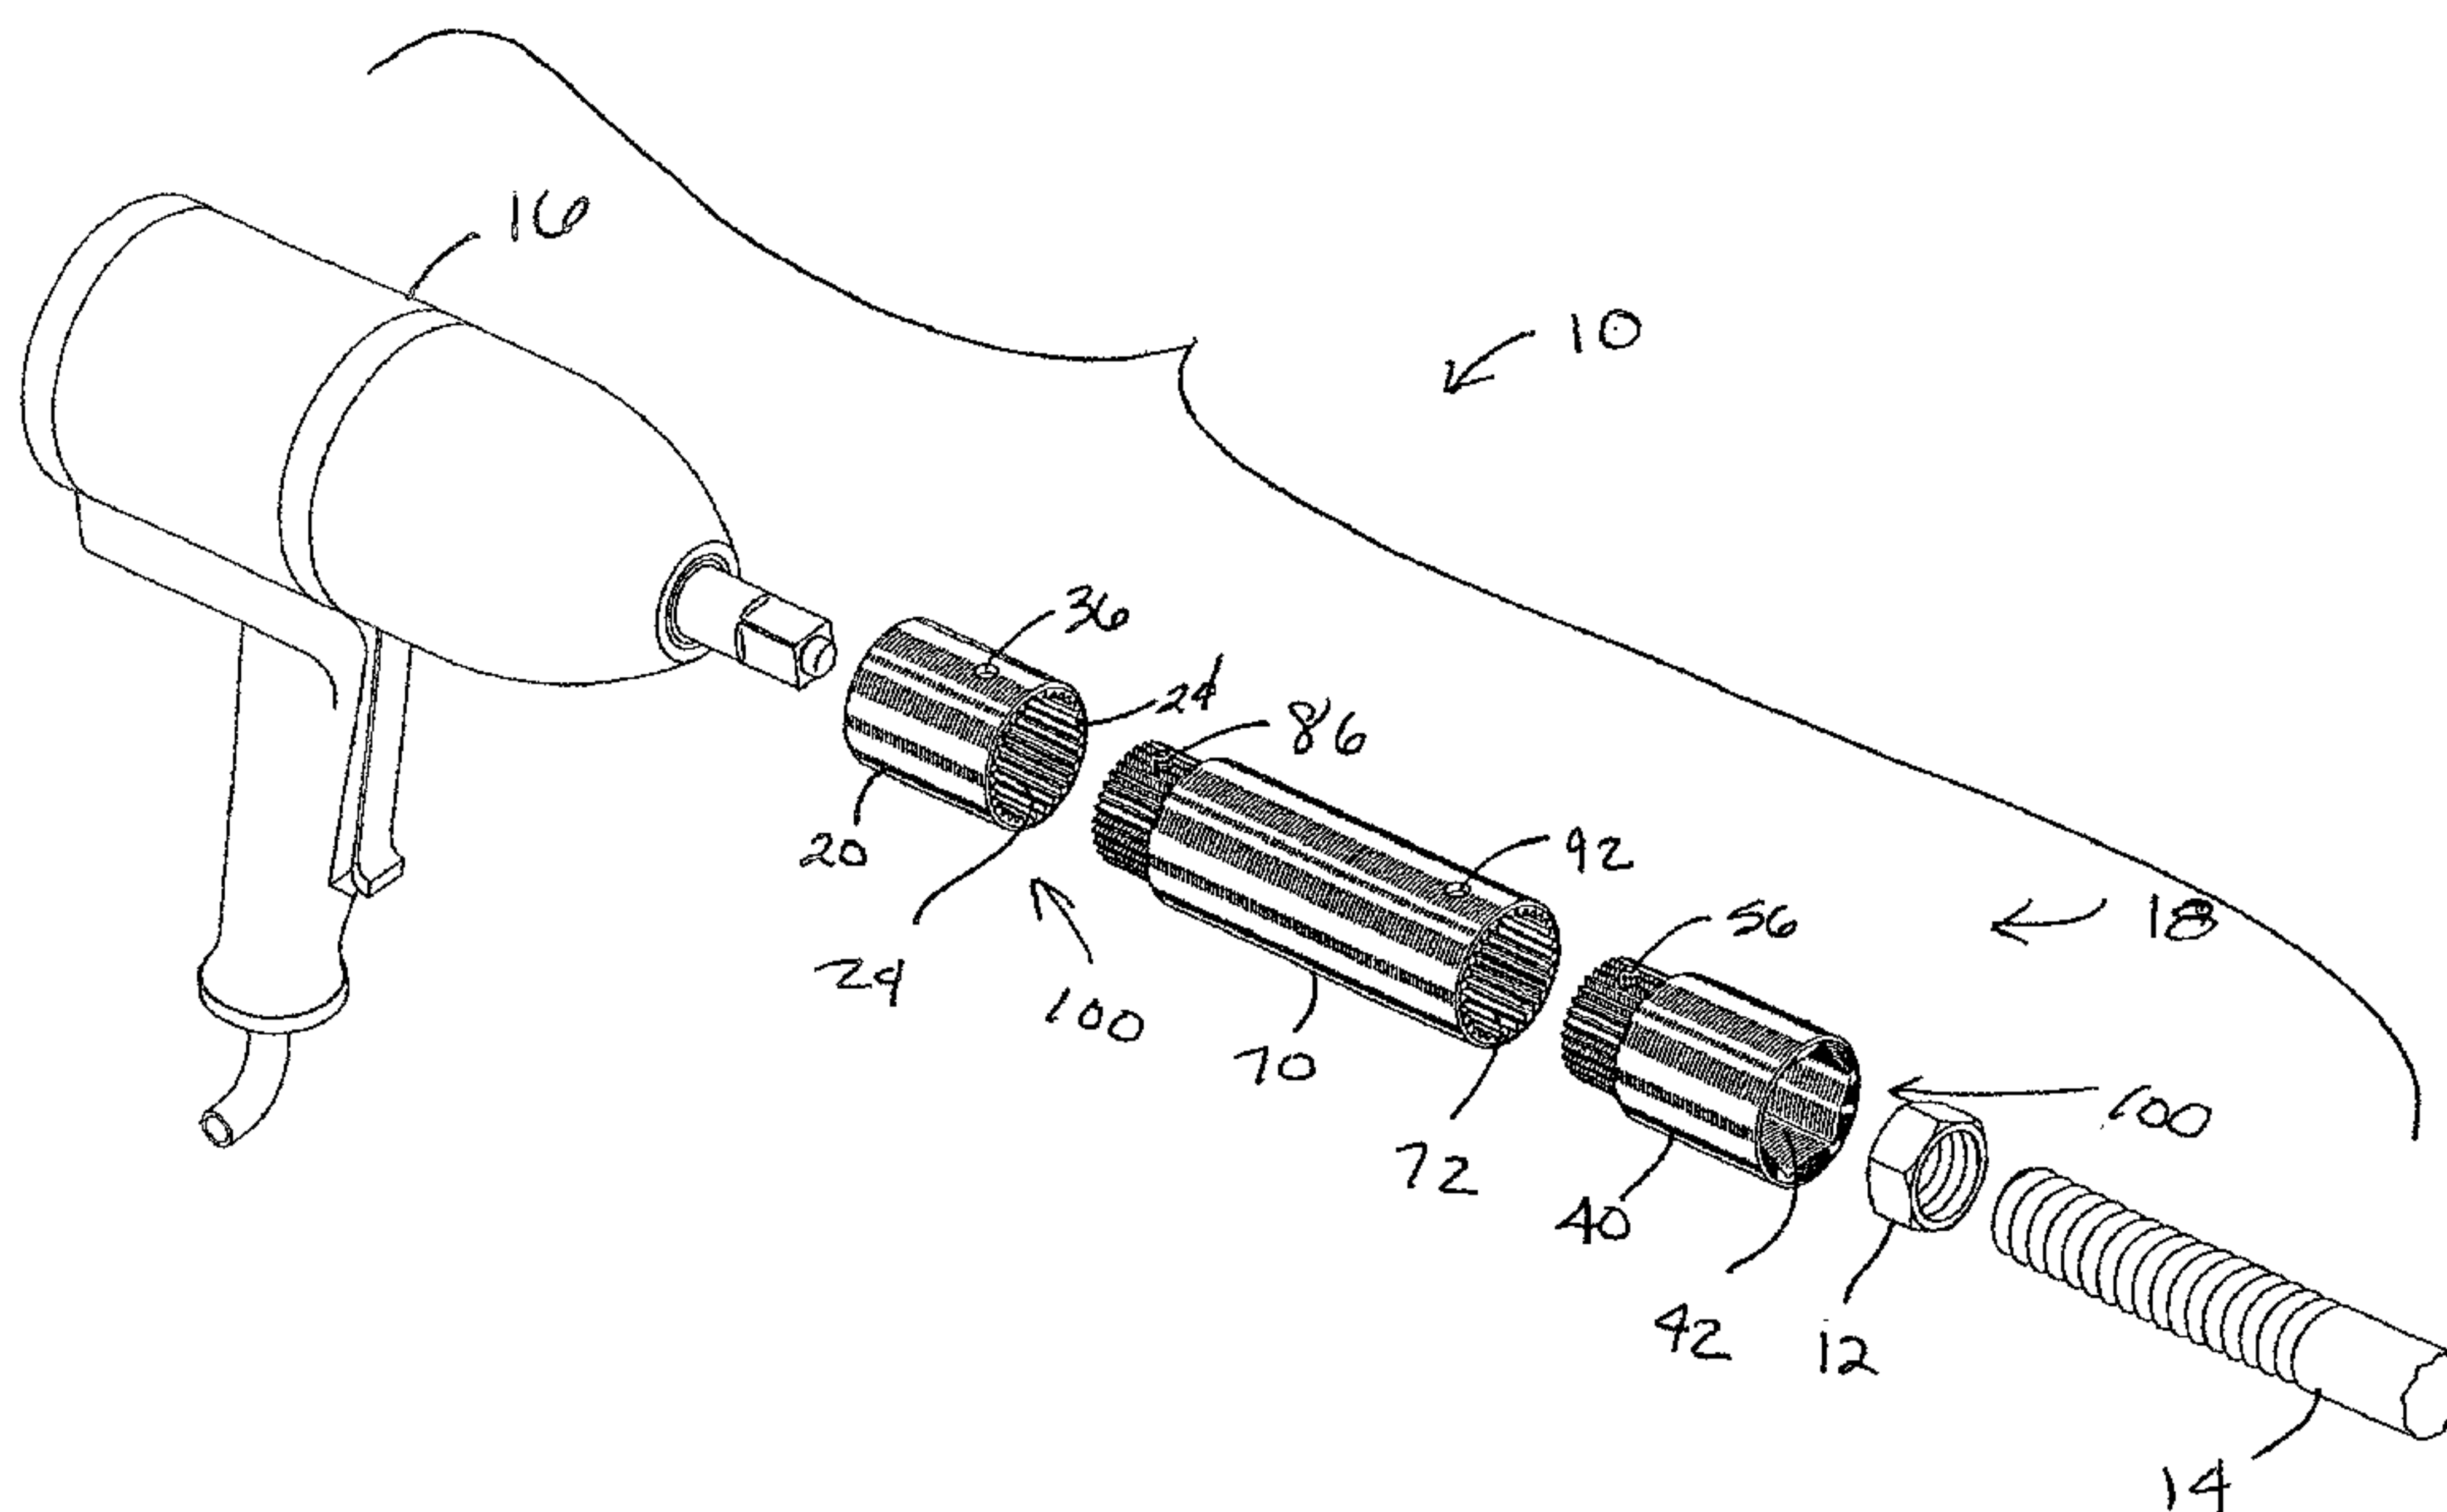

(57) Abstract: A multi-piece socket system (10) having a large internal cavity to allow a protrusion of a long rod or other workpiece to extend into the socket system (10). The socket section (18) has at least two pieces: a drive adaptor (20) and a socket (40), extension collar(s) (70) if used, and drive adaptor (20) form a long tubular body into which a rod or other central member may enter while the nut is being driven onto the rod. The drive adaptor (20), extension collars (70), and sockets (40) preferably attach together using a plurality of interlocking teeth on the ends of each member. For further stability, a spring biased pin (56, 86) extends from the wall of one member and through a hole (36) in the wall of the mating member. Additional attachments, such as a threaded rod (100) and drill chuck (110, 120), may also be used.

WO 2004/004980 A1

WO 2004/004980 A1



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Sean M. Carroll

for

EXTENDABLE SPLINE-DRIVE SOCKET SYSTEM

FIELD OF INVENTION

The present invention relates generally to socket systems. More particularly, it relates to a tool system for use in deep cavities or with long rods. The socket tool has a long internal cavity to allow threaded members to be driven onto a long rod, which may extend into an internal cavity.

BACKGROUND OF THE INVENTION

Socket systems for turning or rotating nuts, bolts, etc. have existed in many forms for many years. These systems typically take the form of a wrench or impact tool having a square drive which interlocks with a socket having a square drive opening. Opposite the drive opening is a hexagonal or 12 pointed opening for a nut or bolt. The drive tool is either manually, pneumatically, or electrically driven to rotate the socket, thereby rotating the nut or bolt the socket is engaging.

These types of systems are only useful in cases where nuts are driven only a short distance onto a rod or for bolts. If a nut is to be driven down a substantial length of rod, the rod begins to interfere with the operation of the driving tool. Deep sockets provide some additional depth into which a rod may feed and provide better access to slightly deeper holes, however, the additional space is minimal, usually only approximately 1 or 2 inches. For the most part, the deep sockets are intended for use in deep openings.

Another tool designed for deep openings is the extension bar. The extension bar is a solid bar that connects a socket to a wrench. However, there is no additional space within the socket or extension bar to allow for a rod or other protrusion. So, although these devices provide better access to nuts and bolt within deep openings, they have no provision for threading a nut any substantial distance onto a threaded rod. Also, with longer devices there may be substantial torque lost due to twisting of the extension bar.

Therefore, there is a need for a tool system that allows the user to turn a nut or other rotational member onto a rod or other protruding member without the rod interfering with the

driving mechanism. There is also need of a system that may be used in deep cavities without any substantial loss of torque.

SUMMARY OF THE INVENTION

The present invention takes the form of a multi-piece tool with a standard drive attachment opening. The socket system has at least two pieces: a drive adaptor and a socket. Optionally, one or more extension collars may also be used. When assembled, the socket, extension collar(s) if used, and drive adaptor form a long tubular body having an internal opening into which a rod or other member may enter while the nut is being driven onto the rod. The drive adaptor, extension collars, and sockets preferably attach together using a plurality of interlocking teeth on the inside and outside of the ends of each member. For further stability, a spring biased pin extends from the wall of one member and through a hole in the wall of the mating member. Alternate systems use other attachments, such as a threaded attachment or a drill chuck. Other objects and advantages of the invention will no doubt occur to those skilled in the art upon reading and understanding the following detailed description along with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an exploded perspective view of the socket drive system in use.

Figures 2A-E are views of the drive adaptor.

Figures 3A-E show views of the socket.

Figures 4A-C are views of an alternate socket.

Figures 5A-D show views of the extension collar.

Figure 6 is an exploded perspective view of a socket system with the splines reversed.

Figures 7A-G are views of threaded attachment.

Figures 8A-E show views of a first chuck attachment.

Figures 9A-E show views of a second chuck attachment.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 is an exploded perspective view of the socket system 10 in use driving a nut 12 onto a threaded rod 14. The drive wrench 16 shown is a corded electric version although other versions such as cordless electric, pneumatic, or manual wrenches or ratchet wrenches may also

be used. The socket section 18 of the system is made of at least two parts: the drive adaptor 20 and the socket 40. Optionally, one or more extension collars 70 may be used to extend the length of the internal opening 100. Figure 1 shows a system 10 in which the drive adaptor 20, a single extension collar 70, and the socket 40 are used. The additional length provided by using the drive adaptor 20 and optionally the extension collar(s) 70 allows the user to drive a nut 12 onto a long threaded rod 14. The opening extending through or into each of the sections 20, 40, 70 allows the rod 14 to extend up into the opening while the nut 12 is driven farther down the rod 14. In most cases, the nut is approximately the same size or is smaller than the internal opening, thereby leaving room for the rod to extend into the entire length of the internal opening through the drive adaptor 20, extension collar 70 and socket 40. The diameter of the internal opening may be anywhere in the range of 0.5 inches to 5 inches or more. Typically the larger diameter is used in situation where the socket 40 is larger and therefore the internal opening needs to be correspondingly larger or where greater torque transmission is required. More preferably, the internal opening has a diameter of 0.75 to 3 inches, most preferably between 1 and 2 inches.

Figures 2A and 2B are perspective views of the drive adaptor 20. Figure 2C is a cross-section thereof, figure 2D is a side view, and figure 2E is an end view thereof. The drive adaptor 20 shown is a generally cylindrical member having a drive opening 22 at one end and a connector opening 24 at the other end. If preferred, these openings 22, 24 may meet, forming an internal opening 26 through the entire length of the drive adaptor 20. The drive opening 22 may be any desired or functional shape, but is currently shown as an opening 22 for a standard drive such as a 1/4", 3/8", or 1/2" square drive. In order to assist the user in placing the drive opening 22 onto the drive of the drive wrench 16, the drive opening 22 is set in a shallow depression 28, which helps guide the drive to the drive opening 22. The connector opening 24 has a multiplicity of ridges or splines 30 on the interior surface 32 of the wall 34. These ridges 30 interlock with a matching set of ridges or splines 50, 80 on the exterior 52, 82 of the socket 40 or on the extension collar 70. A hole 36 passes through the wall 34 of the connector opening 24 which interlocks with a pin 56, 86 on the socket 40 or on the extension collar 70.

Figure 3A is a socket end perspective view of the socket 40. Figure 3B is a cross-section thereof, figure 3C is a side view, figure 3D an end view, and figure 3E is an opposing end view. The socket 40 is a generally cylindrical member having a connector 44 on one end, and a socket opening 42 on the other end. The connector 44 is a multiplicity of ridges or splines 50 that are

located on a necked down portion 46 of the connector end of the socket 40. These ridges 50 interlock with ridges 30, 76 in the connector opening 24, 72 in the drive adaptor 20 or in the extension collar 70. A pin 56 extends from the necked down connector portion 46 of the socket 40 and fits into the connector opening 24, 72 of the drive adaptor 20 or the extension collar 70. The pin 56 is spring biased to be in an extended position. When the user wants to release the socket 40 from the drive adaptor 20 or extension collar 70, the pin 56 is depressed and the socket 40 is slid off. Although other shapes and configurations may be used, the socket opening 42 shown is a standard hexagonal socket opening 42. The socket opening 42 extends a portion of the way through the socket 40, at which point it connects to the internal opening 48 that extends through the remainder of the socket 40.

Figure 4A is a socket end perspective view of an alternate socket 60. Figure 4B is a cross-section thereof and figure 4C is a side view of the alternate socket. In this embodiment, the socket opening 62 is smaller, and the diameter of the socket opening 62 end of the socket 60 has been reduced to conserve material and allow the tool to be functional in smaller openings. A thicker ring 64 is located around the socket 60 to prevent the extension collar 70 or drive adaptor 20 from extending too far onto the socket 60. The end wall 38, 88 of the connector opening 24, 72 of the drive adaptor 20 or the extension collar 70 abuts the edge 66 of the ring 64 and is prevented from progressing any farther onto the socket 60.

Figure 5A is a perspective view of the extension collar 70. Figure 5B is a cross-section thereof. Figure 5C is a side view and figure 5D is an end view of the extension collar 70. The extension collar 70 is a generally cylindrical member, which fits between the drive adaptor 20 and the socket 40 when a longer internal opening 100 is desired, or when the opening into which the socket system 10 is being used is deeper. The internal opening 90 of the extension collar 70 extends through the entire length of the collar 70 and connects to the internal opening 48 in the socket 40. When attached to the drive adaptor 20, the internal opening 90 ends at the base 39 of the connector opening 24 in the drive adaptor 20. The extension collar 70 may be any suitable length, such as from one to twenty inches in length, more preferably between two and fifteen inches in length, most preferably between three and ten inches in length.

Alternate embodiments may have a deeper section extending from the connector opening 24 in the drive adaptor 20 to provide further depth for the internal opening 100. In other designs, the internal opening 100 may connect to the drive opening 22 so that the internal opening 100 passes through the entire length of the socket section 18.

When in use, the user may choose to use the pieces of the multi-piece socket section 18 in different configurations depending on the application. For example, if a standard socket is too shallow, but only by a small amount, the socket 40, 60 may be connected directly to a drive adaptor 20. This is applicable in cases where the socket 40, 60 of the present invention has a greater length than a standard socket. If a greater depth is required, the socket 40, 60 may be attached to an extension collar 70 which is then attached to the drive adaptor 20. If the length necessary is greater still, one or more additional extension collars 70 may be inserted between the socket 40, 60 and the drive adaptor 20 until the length is sufficient for the application.

The number of ridges or splines 30, 50, 76, 80 may be anywhere between ten and a hundred, with a smaller number typically used for smaller diameter drives and a larger number used for large diameter drives. More preferably, between fifteen and fifty ridges 30, 50, 76, 80 are used. Most preferably, between twenty and forty ridges 30, 50, 76, 80 are used. In the embodiments shown, there are thirty-two ridges 30, 50, 76, 80 which provide the rotational connection between the drive adaptor 20, socket 40, 60, and extension collar(s) 70. With larger numbers of ridges 30, 50, 76, 80, the user must be more careful to properly align the pins 56, 86 and holes 36, 92 such that each pin 56, 86 properly aligns and extends through the corresponding hole 36, 92. However, a larger number of ridges 30, 50, 76, 80 increases the gripping surface between the drive adaptor 20, socket 40, 60, and extension collar 70, as well as increasing the maximum possible size of internal opening 100, thereby allowing a larger rod to fit within the internal opening 100.

A further benefit of the present design is the increased moment of inertia, which is created by using a collar type of design instead of the narrower rods found in the extension bars of the prior art. The increased moment of inertia is created by placing the material farther away from the center of rotation in a collar formation instead of a rod that is focused around the centerpoint. Force transmission is also improved by placing the splines on the exterior surface of one collar and the interior surface of a slight larger collar. These design features create a system in which the torque transmission is less likely to damage the parts of the socket drive system 10, while providing greater torque transmission.

Alternate connections may be formed between the pieces of the socket section 18. For example, the embodiments shown have the female portions of the connections on the socket 40 end of the members, and the male portions on the wrench 16 end of the members. These may be reversed if desired, as shown in figure 6.

Additional attachments may also be included in the socket system or they may be additional separate attachments. Examples of the additional attachments include a threaded attachment 100, as seen in figures 7A-G. Figure 7A is a top perspective view, figure 7B is a bottom perspective view, figure 7C is a back end view, figure 7D is a right side view, figure 7E is a front end view, figure 7F is a cross-sectional view, figure 7G is a left side view and. The threaded attachment 100 may have any suitable diameter, such as from 0.1 to 2 inches, more preferably between 0.25 to 1 inch. The length of the attachment 100 is approximately in the range of 0.25 and 5 inches, more preferably between 0.5 inches and 3 inches, and most preferably between 0.5 and 1.5 inches. The threaded attachment 100 is used to connect threaded tools, such as core bits, sanding or grinding wheels or other tools with a female threaded attachment opening. The diameter and length of the threaded attachment 100 used is determined by the opening in the tool to be attached to the threaded attachment 100.

Figure 8A is a top perspective view of a first chuck attachment 110, figure 8B is a bottom perspective view, figure 8C is a left side view, figure 8D is a front end view and figure 8E is a back end view thereof. Figure 9A is a top perspective view of a second chuck attachment 120, figure 9B is a bottom perspective view, figure 9C is a left side view, figure 9D is a front end view and figure 9E is a back end view thereof. The chuck attachments 110, 120 allow a user to use standard or specialty drill bits with the system, thereby making it possible to drill a hole within a deep opening or other hard to reach location.

Another option would be an angled drive. In this case the user would be able to use any of the sockets or other attachments, but the drive mechanism would have a fixed or adjustable angle built-in one of the sections. Although other fixed angles may be used, a typical configuration would have the socket or drill acting at a right angle to the longitudinal axis of the drill's rotation. The angle may be achieved by a special extension collar with a fixed or adjustable angle mechanical interface or within a special attachment such as a socket, drill chuck or other attachment with the angle incorporated therein.

Although a generally cylindrical socket section 18 is optimal for providing the maximum internal opening 100 for the least rotational footprint, other shapes of socket sections 18 may also be used, such as square, hexagonal, and other geometric and nongeometric shapes may be used. A further variation could use one or more keys that fit in corresponding keyways. The keyways could be straight with a locking pin, or the keyways could be a labyrinth forming an

interlock with a key, with or without spring biasing. Locking rings, and other types of interlocks may be substituted for the hole and pin and/or the interlocking ridges.

Many features have been listed with particular configurations, options, and embodiments. Any one or more of the features described may be added to or combined with any of the other embodiments or other standard devices to create alternate combinations and embodiments.

Although the examples given include many specificities, they are intended as illustrative of only one possible embodiment of the invention. Other embodiments and modifications will, no doubt, occur to those skilled in the art. Thus, the examples given should only be interpreted as illustrations of some of the preferred embodiments of the invention, and the full scope of the invention should be determined by the appended claims and their legal equivalents.

I claim:

1. A socket system, comprising:

an elongated, generally hollow drive adaptor having a first end and a second end, a drive opening extending into said drive adaptor from said first end,

a socket having a first end and a second end, a socket opening extending through said socket,

and a connector means for detachably connecting said second end of said drive adaptor to said first end of said socket,

wherein, when said drive adaptor, said connector means and said socket are connected, a continuous, internal opening is formed which extends through said socket and said connector means and into said drive adaptor.

2. The socket system of claim 1, wherein said connector means comprises a plurality of teeth on an outer wall of one of said drive adaptor and said socket and a set of mating teeth on an inner wall of the other of said drive adaptor and said socket.

3. The socket system of claim 2, wherein said connector means further comprises a pin in one of said drive adaptor and said socket and a corresponding hole in the other of said drive adaptor and said socket, said pin having a depressed position and an extended position, wherein said pin is biased towards said extended position.

4. The socket system of claim 1, wherein said connector means is an extension collar connectable between said drive adaptor and said socket.

5. The socket system of claim 1, wherein said connector means comprises an extension collar and wherein an opening through said extension collar forms a part of said continuous internal opening.

6. The socket system of claim 1, wherein said drive adaptor and said socket are generally cylindrical.

7. The socket system of claim 1, wherein said socket has a socket length and said connector has a connector length and wherein said connector length is less than a majority of said socket length.
8. The socket system of claim 1, wherein said internal opening has a generally constant diameter.
9. A socket system, comprising:
- a drive adaptor having a first end and a second end, a drive opening extending into said drive adaptor from said first end,
 - a socket having a first end and a second end, a socket opening extending into said socket from said second end,
 - a generally hollow, tubular extension collar having a first end, a second end, and a collar length,
 - a first connector means for detachably connecting said second end of said drive adaptor to said first end of said extension collar, said first connector means having a first length along a longitudinal axis of passing through said drive adaptor, said socket and said collar,
 - and a second connector means for detachably connecting said second end of said extension collar to said first end of said socket, said second connector means having a second length along said longitudinal axis,
- wherein a sum of said first and second lengths is less than a majority of said collar length.
10. The socket system of claim 9, wherein said first connector means comprises a plurality of teeth on an outer wall of one of said drive adaptor and said extension collar and a set of mating teeth on an inner wall of the other of said drive adaptor and said extension collar.
11. The socket system of claim 10, wherein said connector means further comprises a pin in one of said drive adaptor and said extension collar and a corresponding hole in the other of said drive adaptor and said extension collar, said pin having a depressed position and an extended position, wherein said pin is biased towards said extended position.

12. The socket system of claim 9, wherein said second connector means comprises a plurality of teeth on an outer wall of one of said extension collar and said socket and a set of mating teeth on an inner wall of the other of said extension collar and said socket.

13. The socket system of claim 12, wherein said second connector means further comprises a pin in one of said extension collar and said socket and a corresponding hole in the other of said extension collar and said socket, said pin having a depressed position and an extended position, wherein said pin is biased towards said extended position.

14. The socket system of claim 9, wherein said socket has a first internal opening extending in from said first end, wherein said extension collar has a second internal opening extending therethrough, and wherein when said extension collar and said socket are connected, said first internal opening aligns with said second internal opening.

15. The socket system of claim 9, wherein said socket has a first internal opening extending in from said first end, wherein said extension collar has a second internal opening extending therethrough, wherein said drive adaptor has a third internal opening extending in from said second end, and wherein when said drive adaptor, said extension collar, and said socket are connected, said first internal opening aligns with said second internal opening, and said second internal opening aligns with said third internal opening.

16. The socket system of claim 9, further comprising a second extension collar located adjacent said first extension collar, and having an internal opening extending through said socket and both of said extension collars.

17. The socket system of claim 9, wherein said drive adaptor, said extension collar, and said socket are generally cylindrical.

18. The socket system of claim 9, wherein said first connector means comprises thirty-two teeth on an outer wall of one of said drive adaptor and said extension collar and a set of mating teeth on an inner wall of the other of said drive adaptor and said extension collar.

19. In combination:

a drive adaptor having a first end and a second end, a drive opening extending into said drive adaptor from said first end,
a socket having a first end and a second end, a socket opening extending through said socket,
a connector means for detachably connecting said drive adaptor to said socket,
and a socket driving means for driving said drive adaptor and said socket.

20. The combination of claim 19 wherein said connector means comprises a plurality of teeth on an outer wall of one of said drive adaptor and said socket and a set of mating teeth on an inner wall of the other of said drive adaptor and said socket.

21. The combination of claim 20 wherein said connector means further comprises a pin in one of said drive adaptor and said socket and a corresponding hole in the other of said drive adaptor and said socket, said pin having a depressed position and an extended position, wherein said pin is biased towards said extended position.

22. The combination of claim 19 having an internal opening extending through said socket and into said drive adaptor.

23. The combination of claim 19 further comprising an extension collar located between said drive adaptor and said socket.

24. The combination of claim 19 wherein said connection means is an extension collar.

25. The combination of claim 24 further comprising an internal opening extending through said socket, said extension collar and into said drive adaptor.


26. A tool set, comprising:

a drive adaptor having a first end and a second end, a drive opening extending into said drive adaptor from said first end,


a extension collar having a first end and a second end, said first end of said extension collar designed and configured to connect to said second end of said drive adaptor,
a plurality of socket, each socket having a first end and a second end, a socket opening extending through said socket, said first end of said socket designed and configured to connect to said second end of said drive adaptor and said second end of said extension collar,
a threaded attachment having a first end and a second end, said second end being threaded, said first end of said threaded attachment being designed and configured to connect to said second end of said drive adaptor and said second end of said extension collar,
and a drill chuck attachment having a first end and a second end, said second end having holder designed and configured to hold bits, said first end of said drill chuck attachment being designed and configured to connect to said second end of said drive adaptor and said second end of said extension collar.


27. The tool set of claim 26 further comprising a socket driving means for driving said drive adaptor and said socket.

1/9

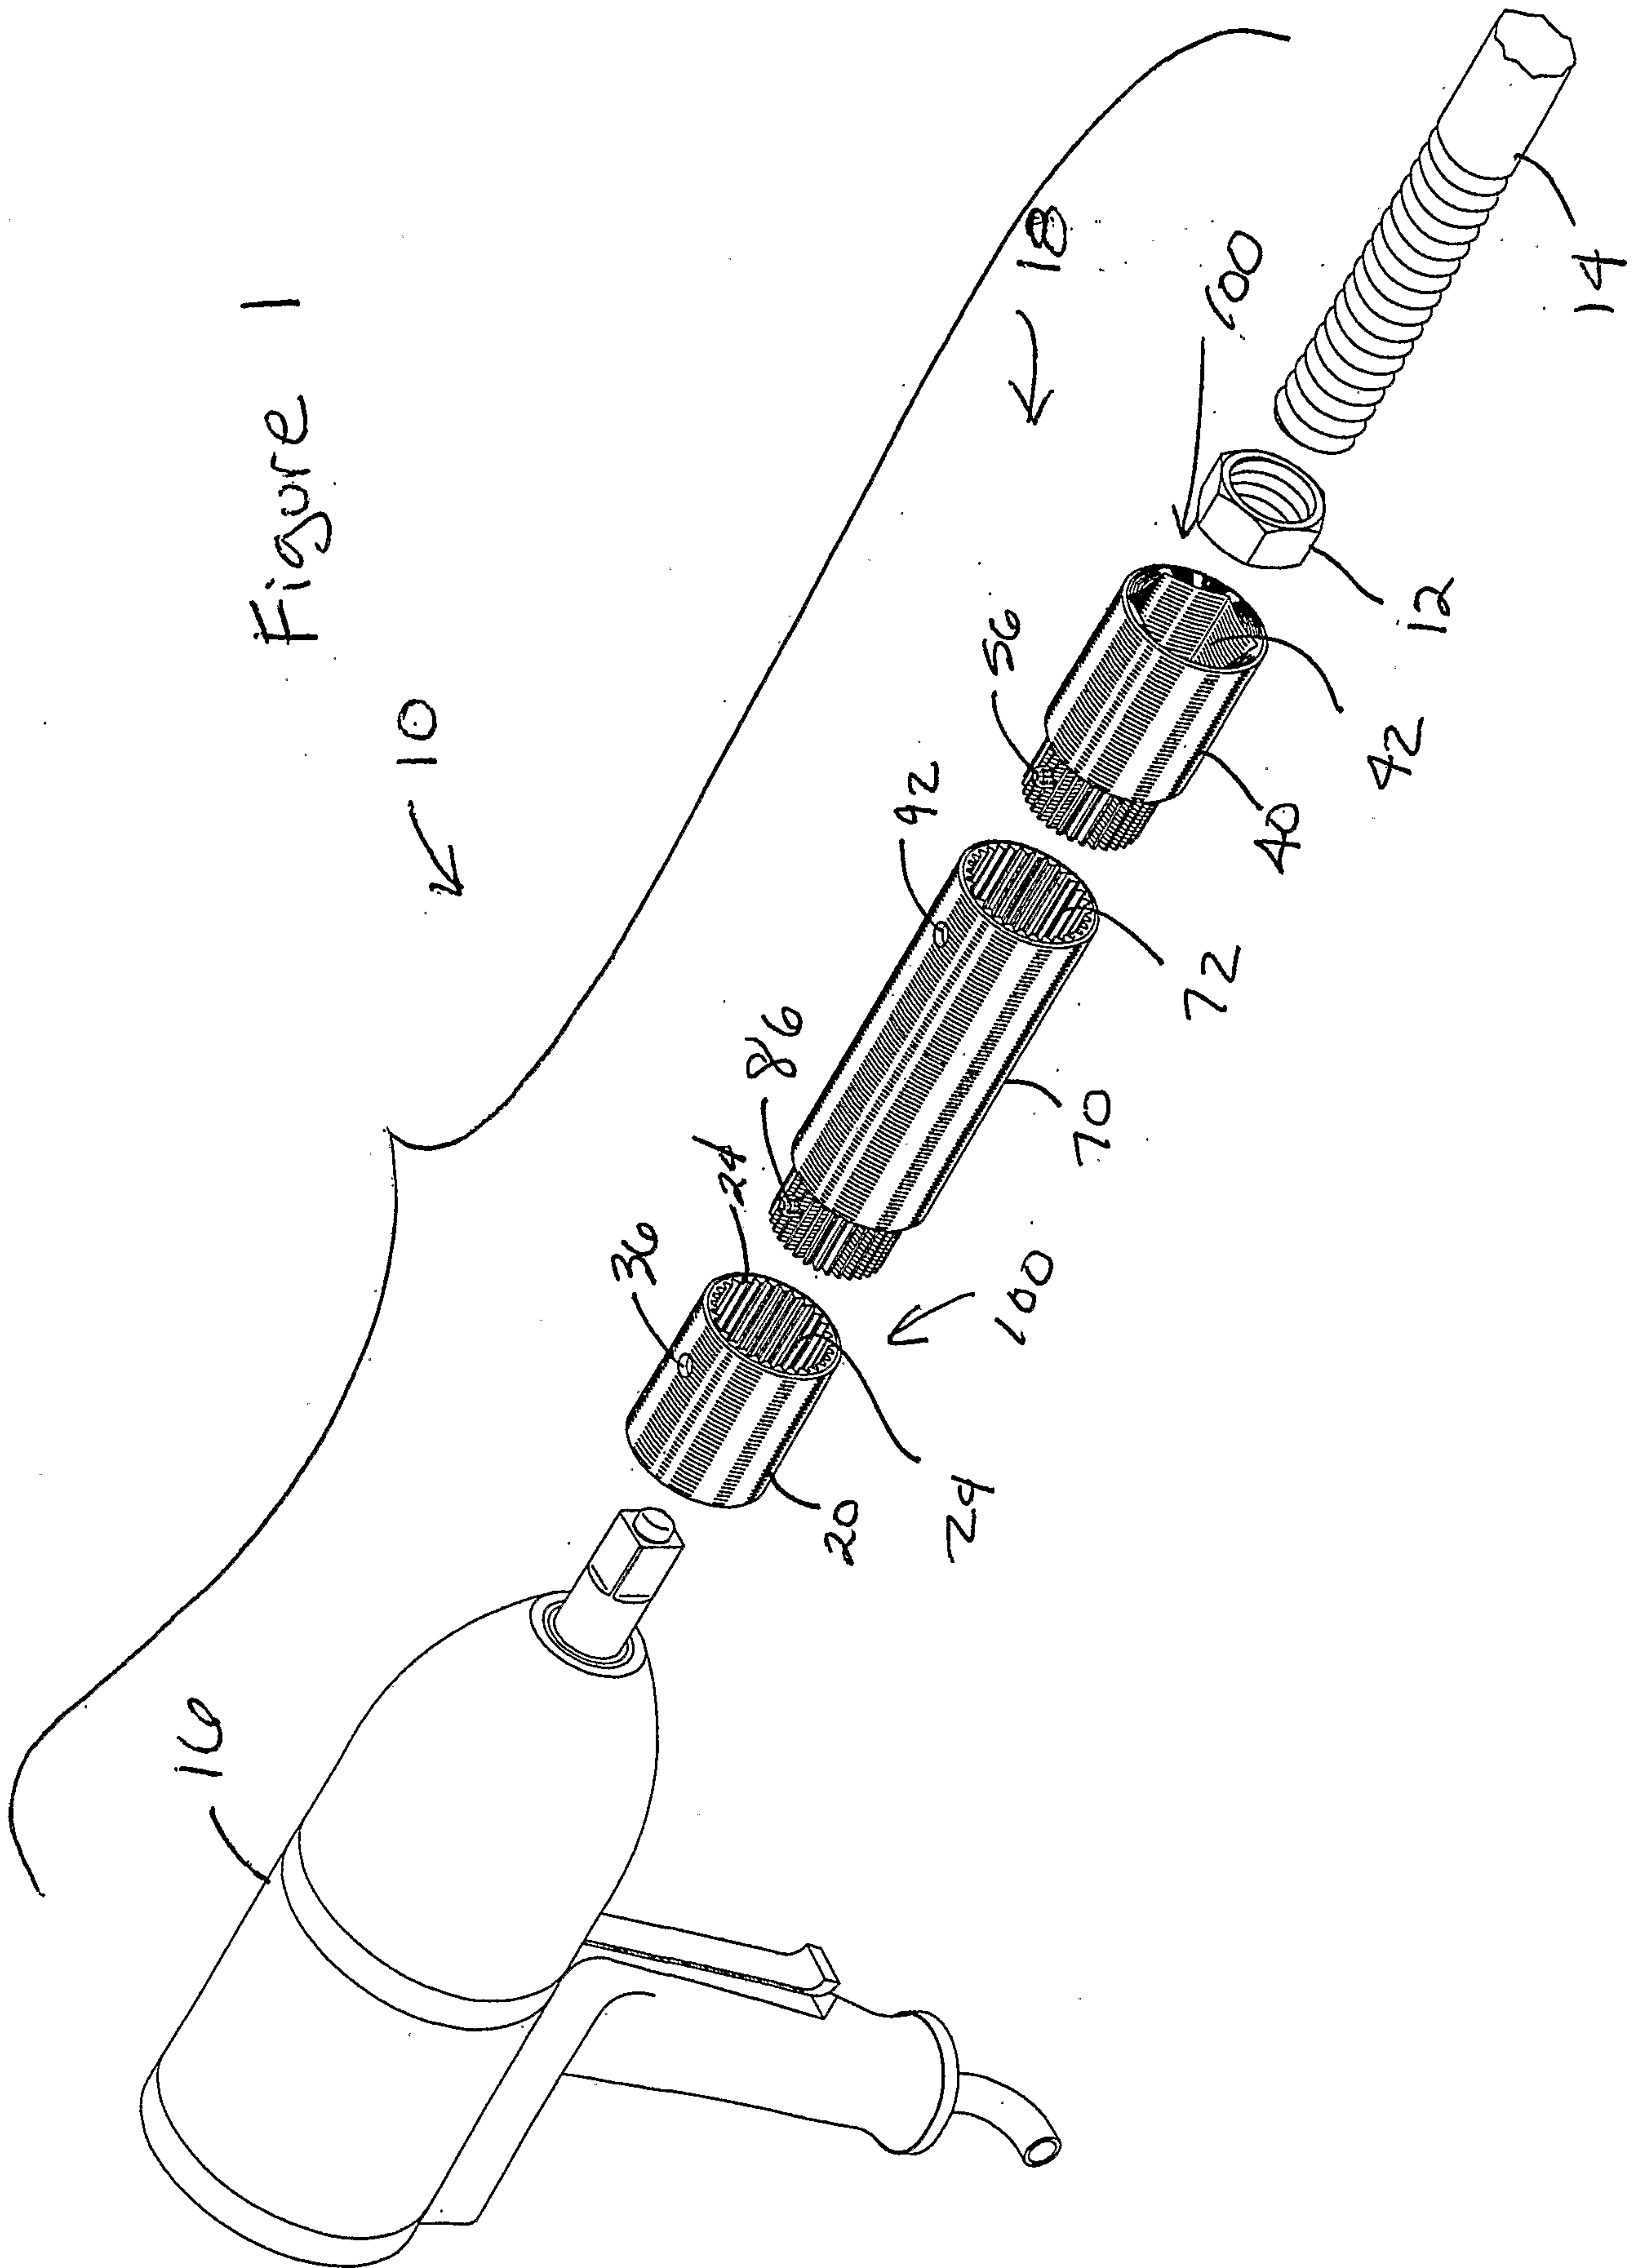

2/9

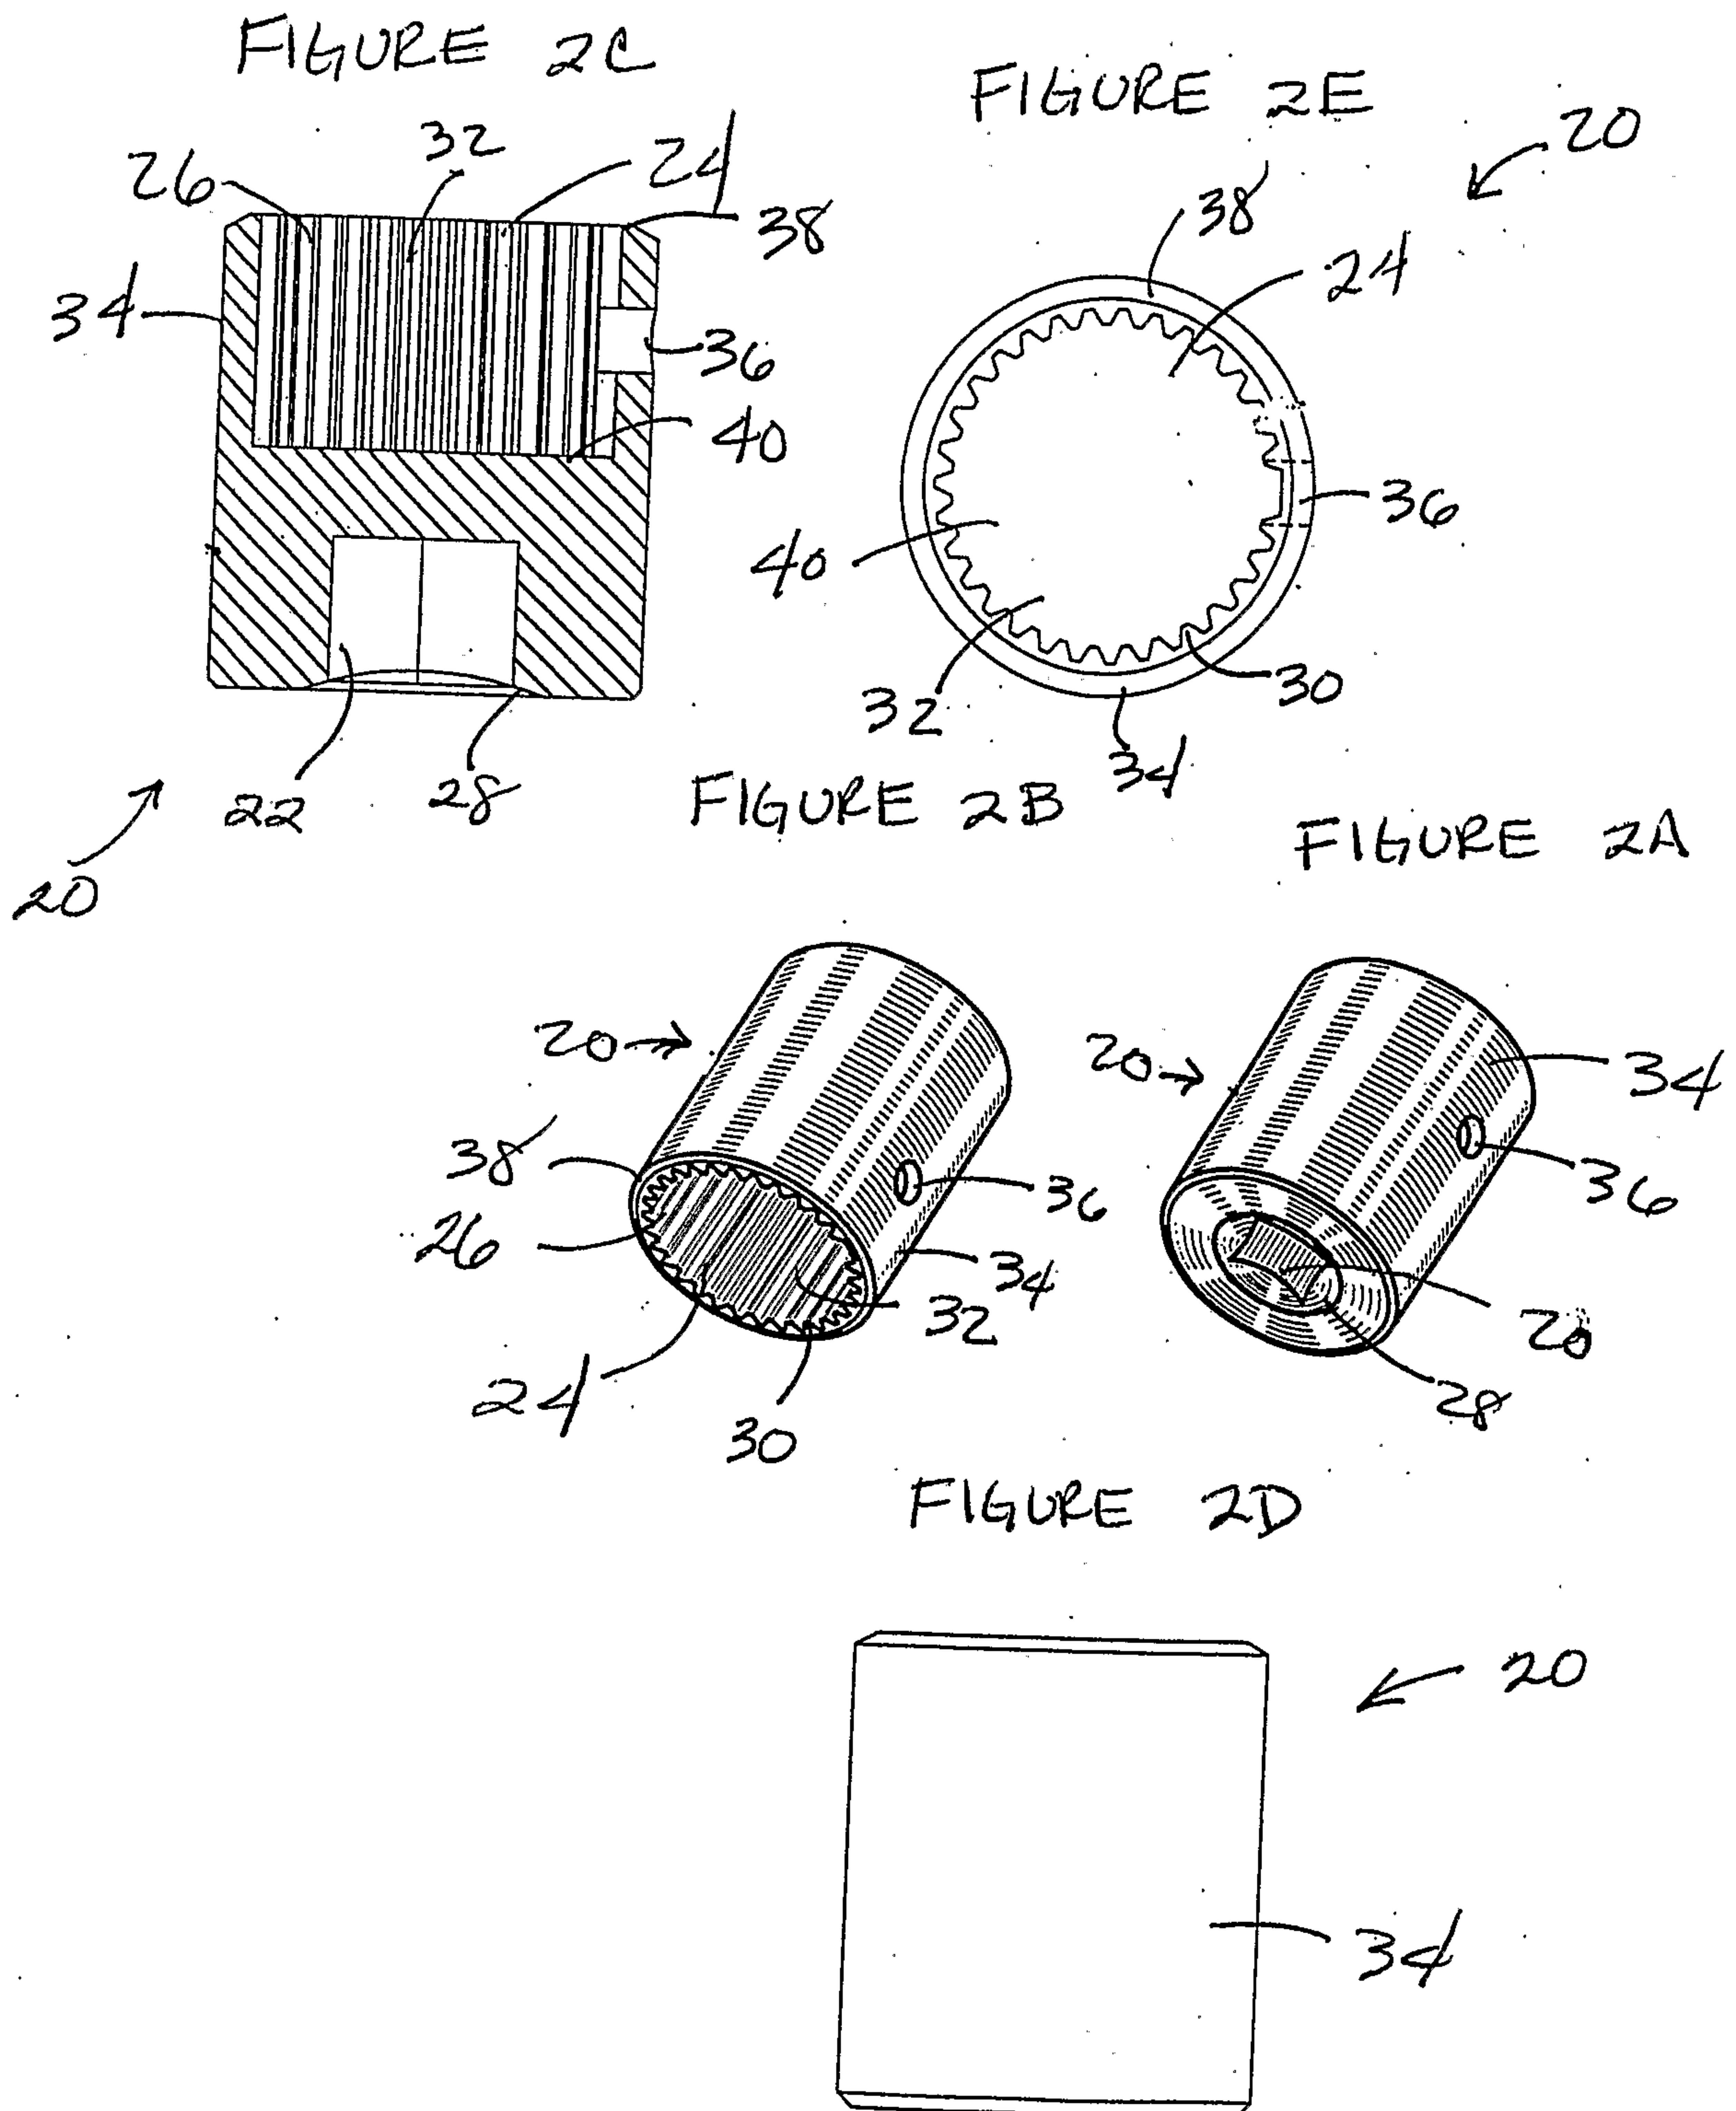

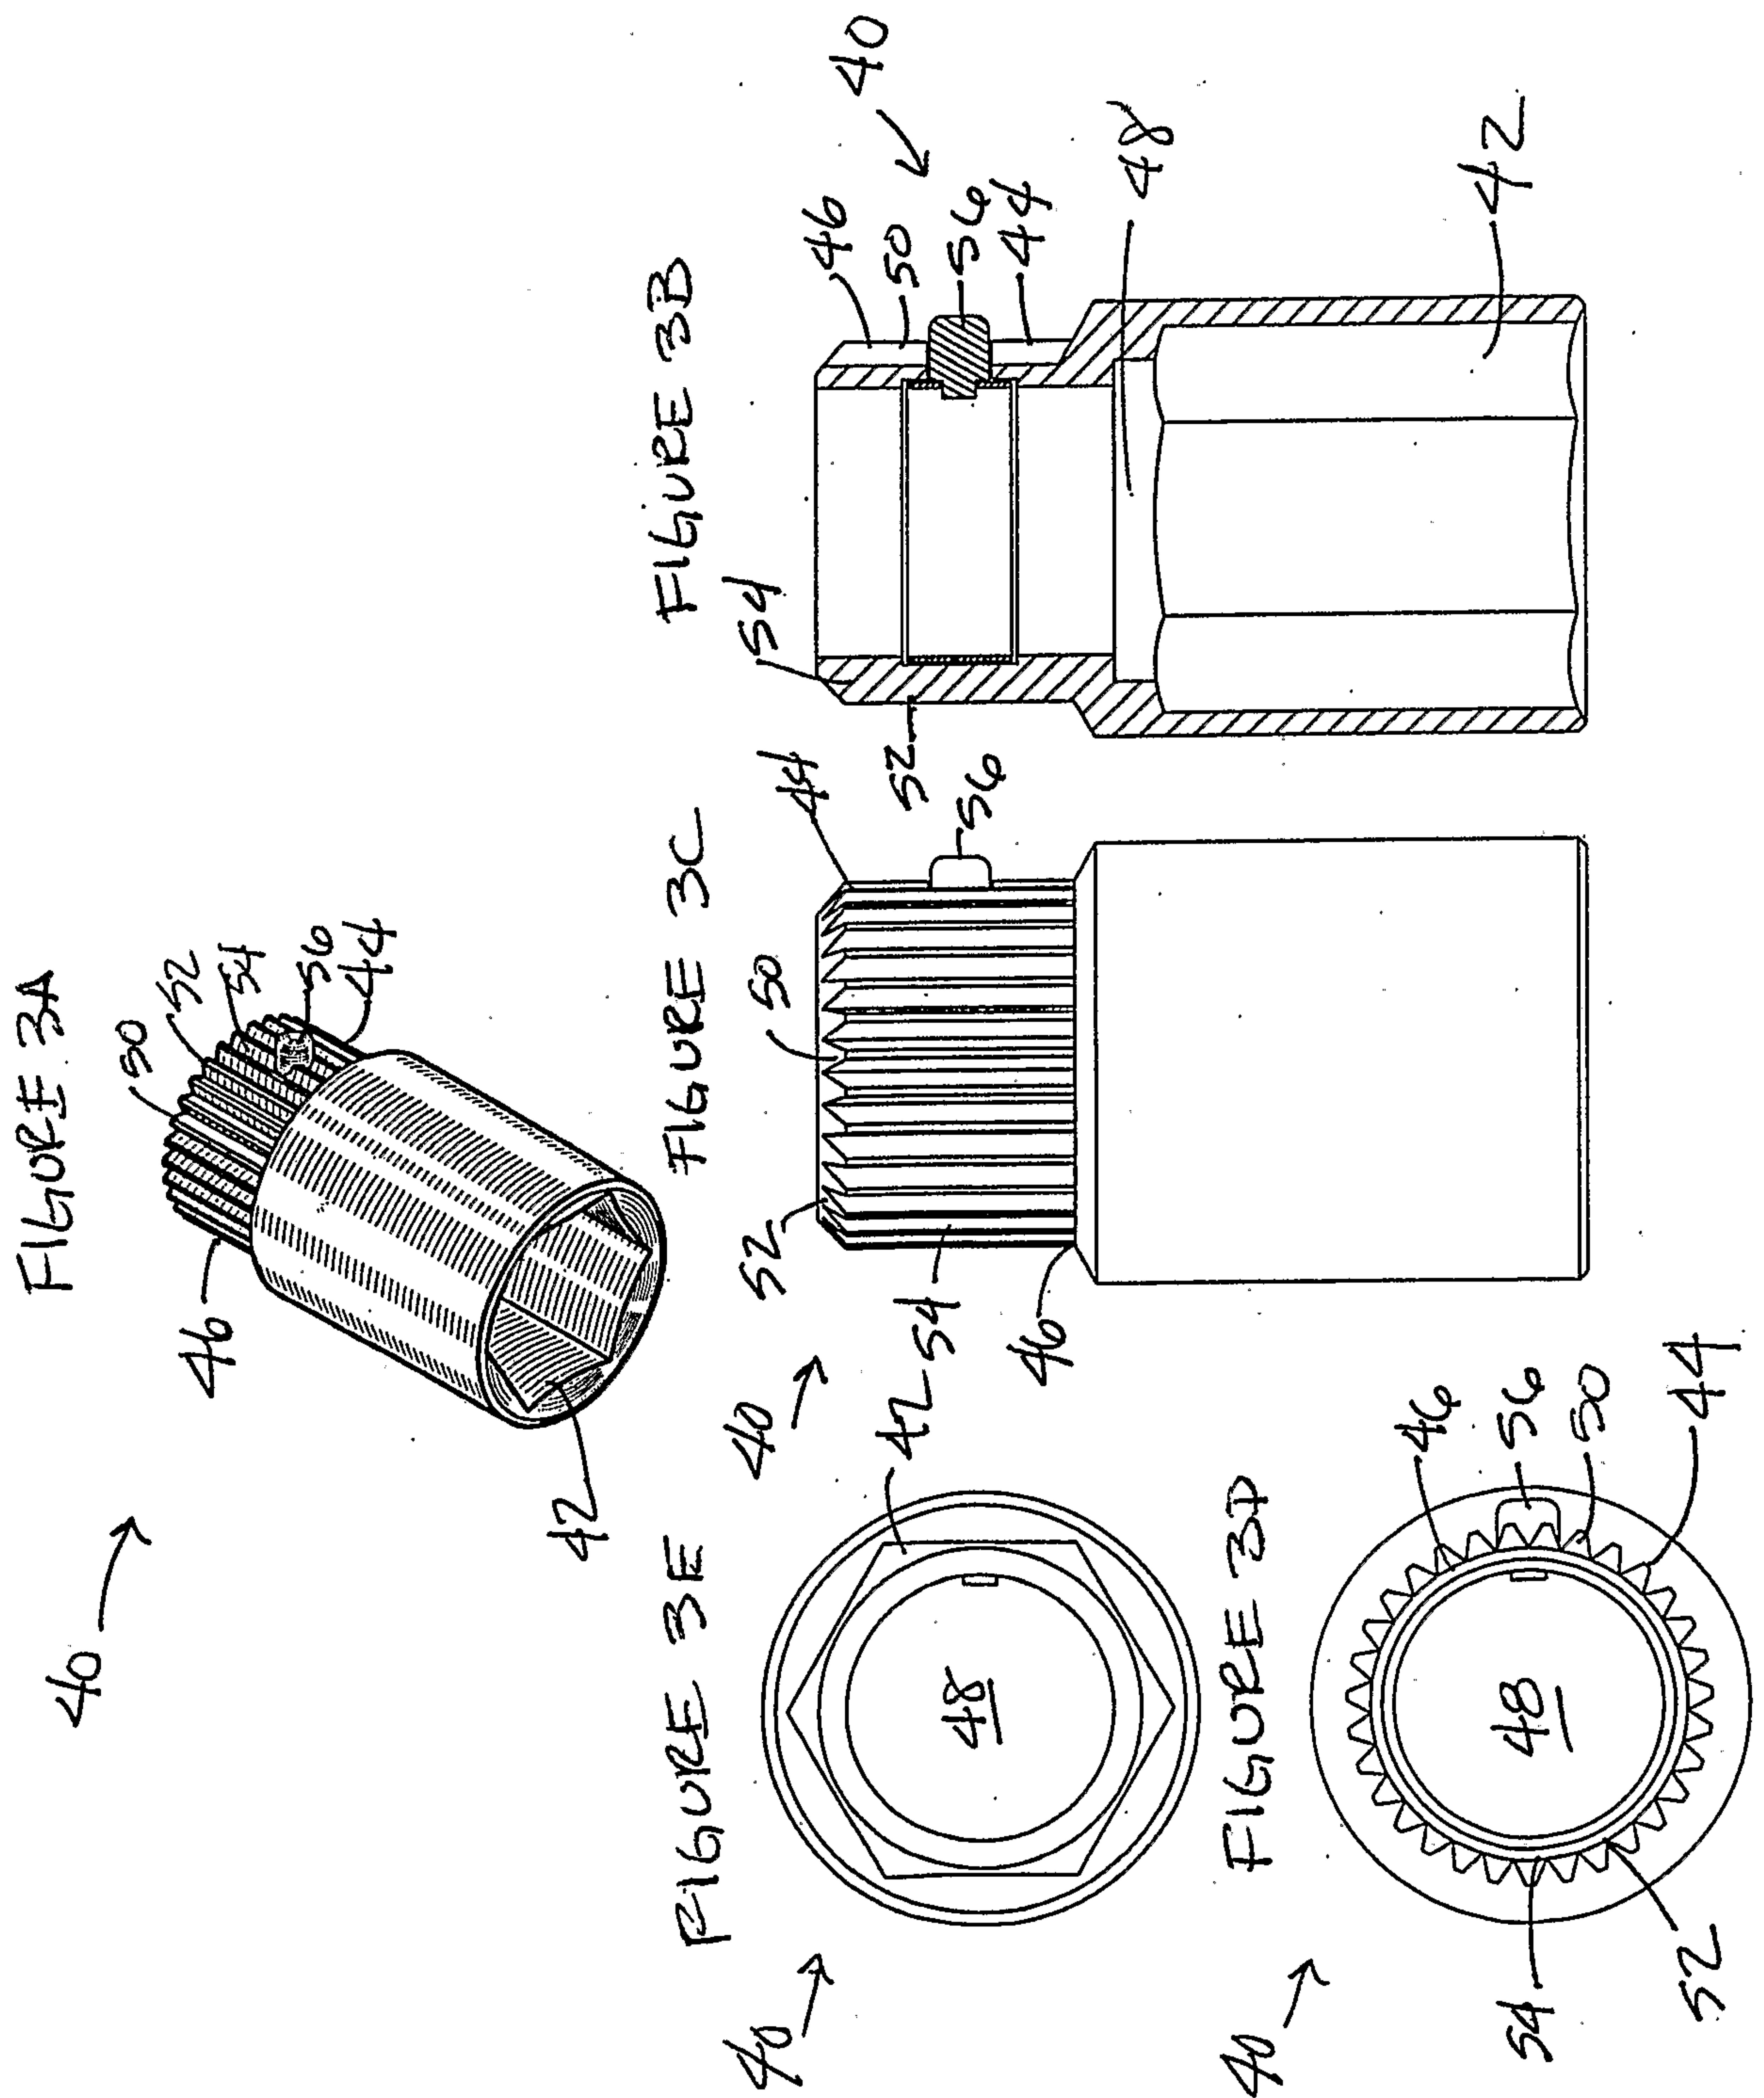

4/9

FIGURE 4A



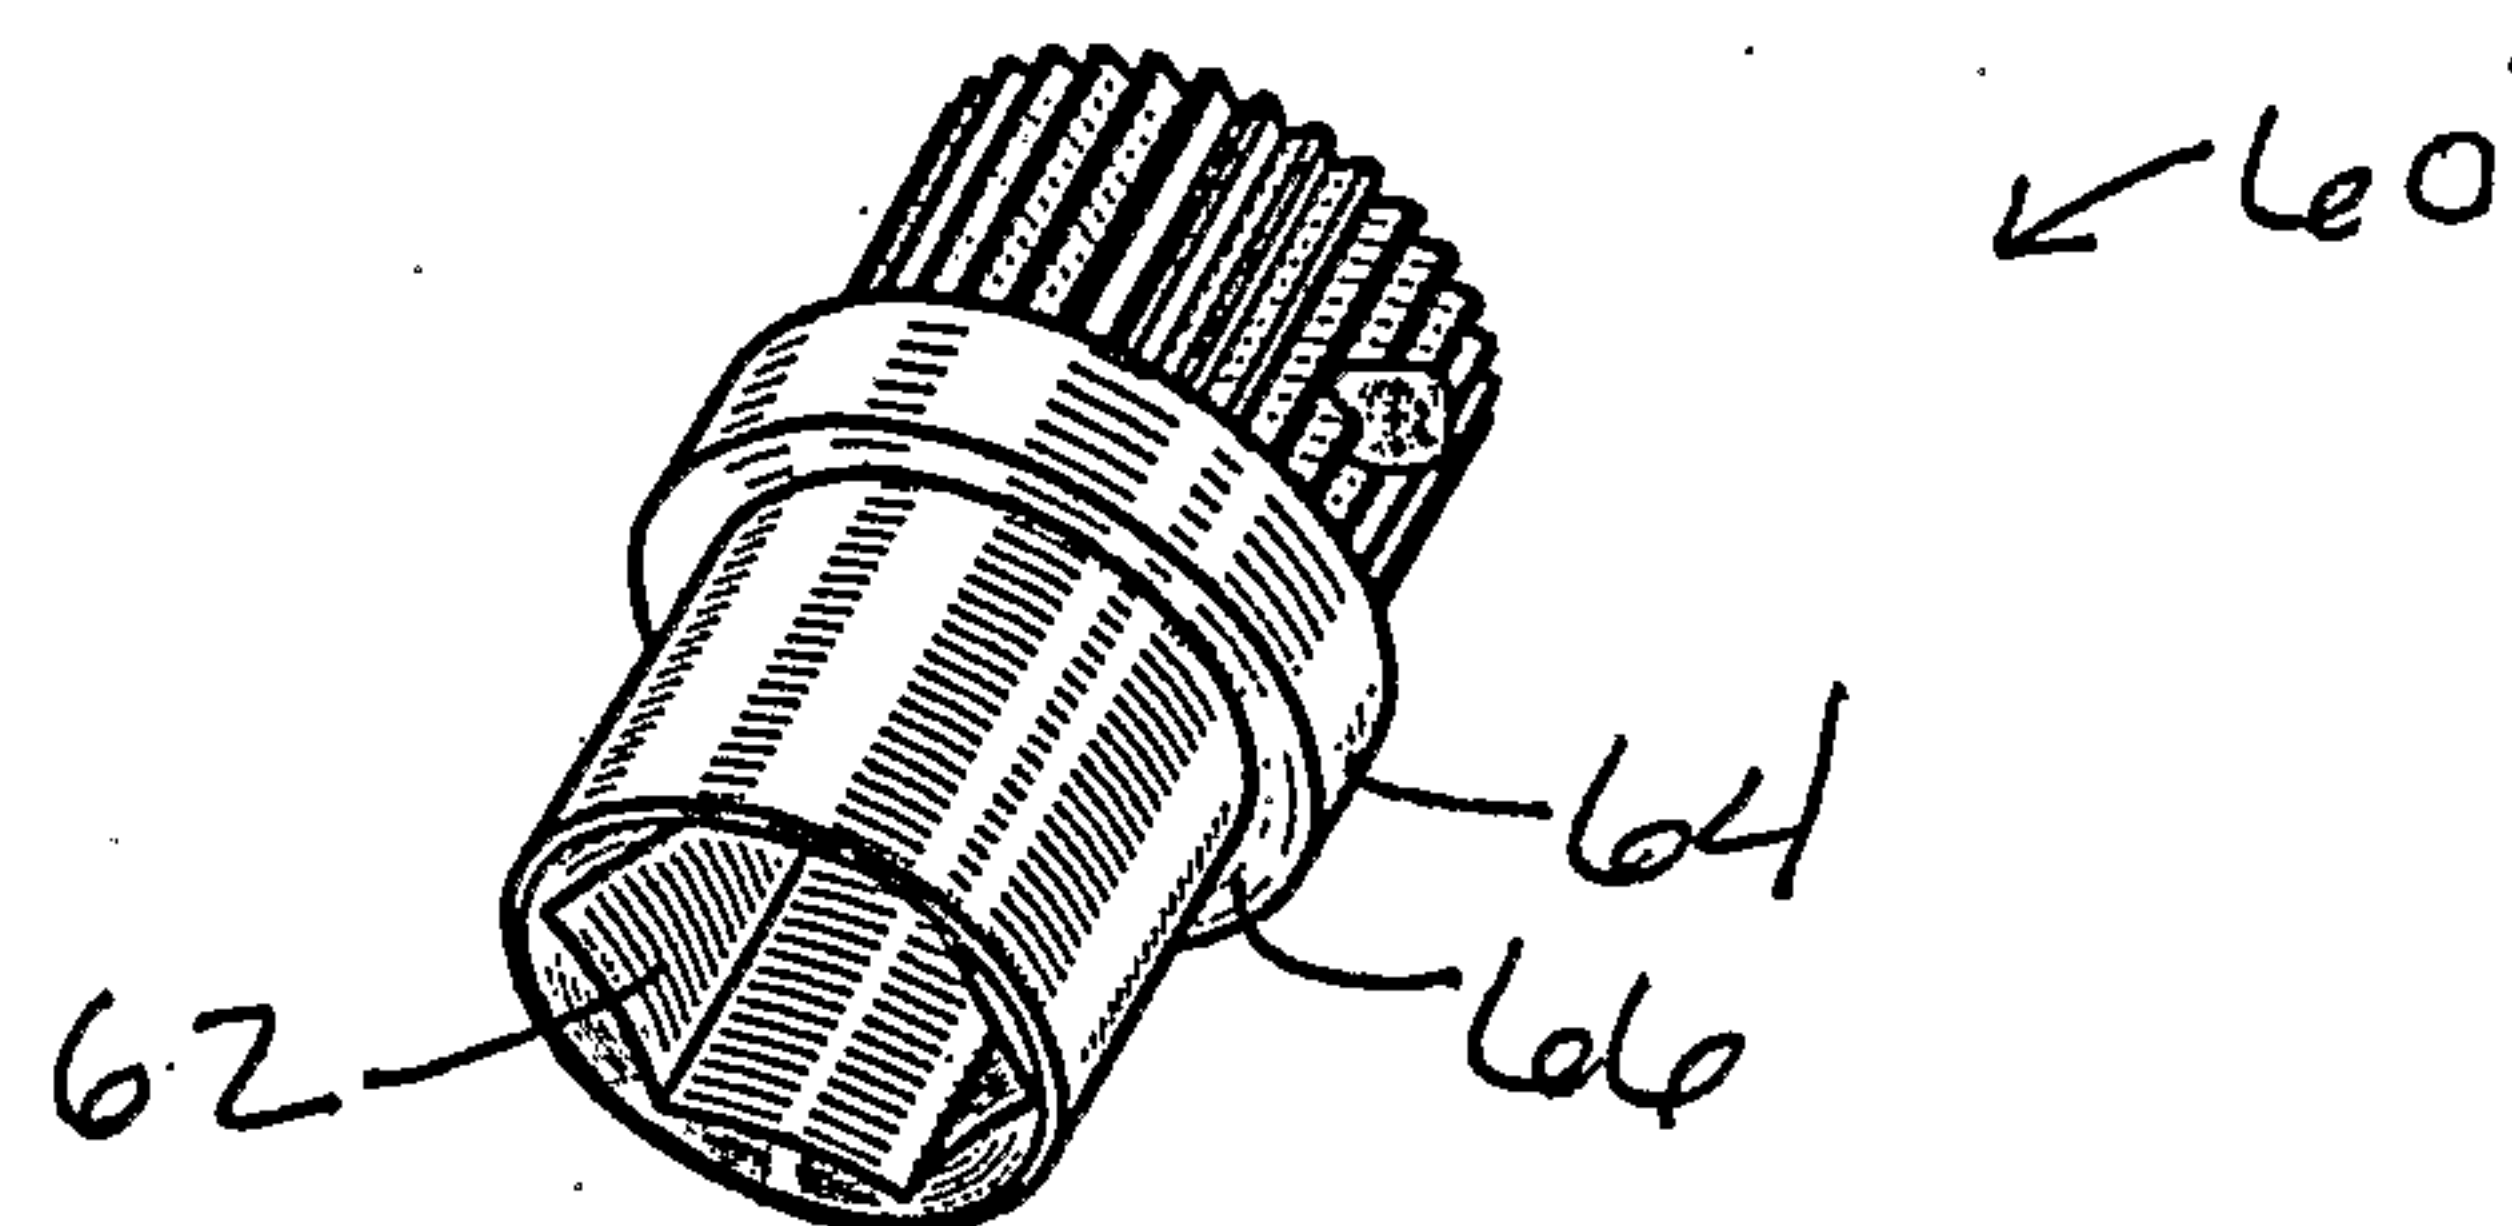


FIGURE 4C


FIGURE 4B

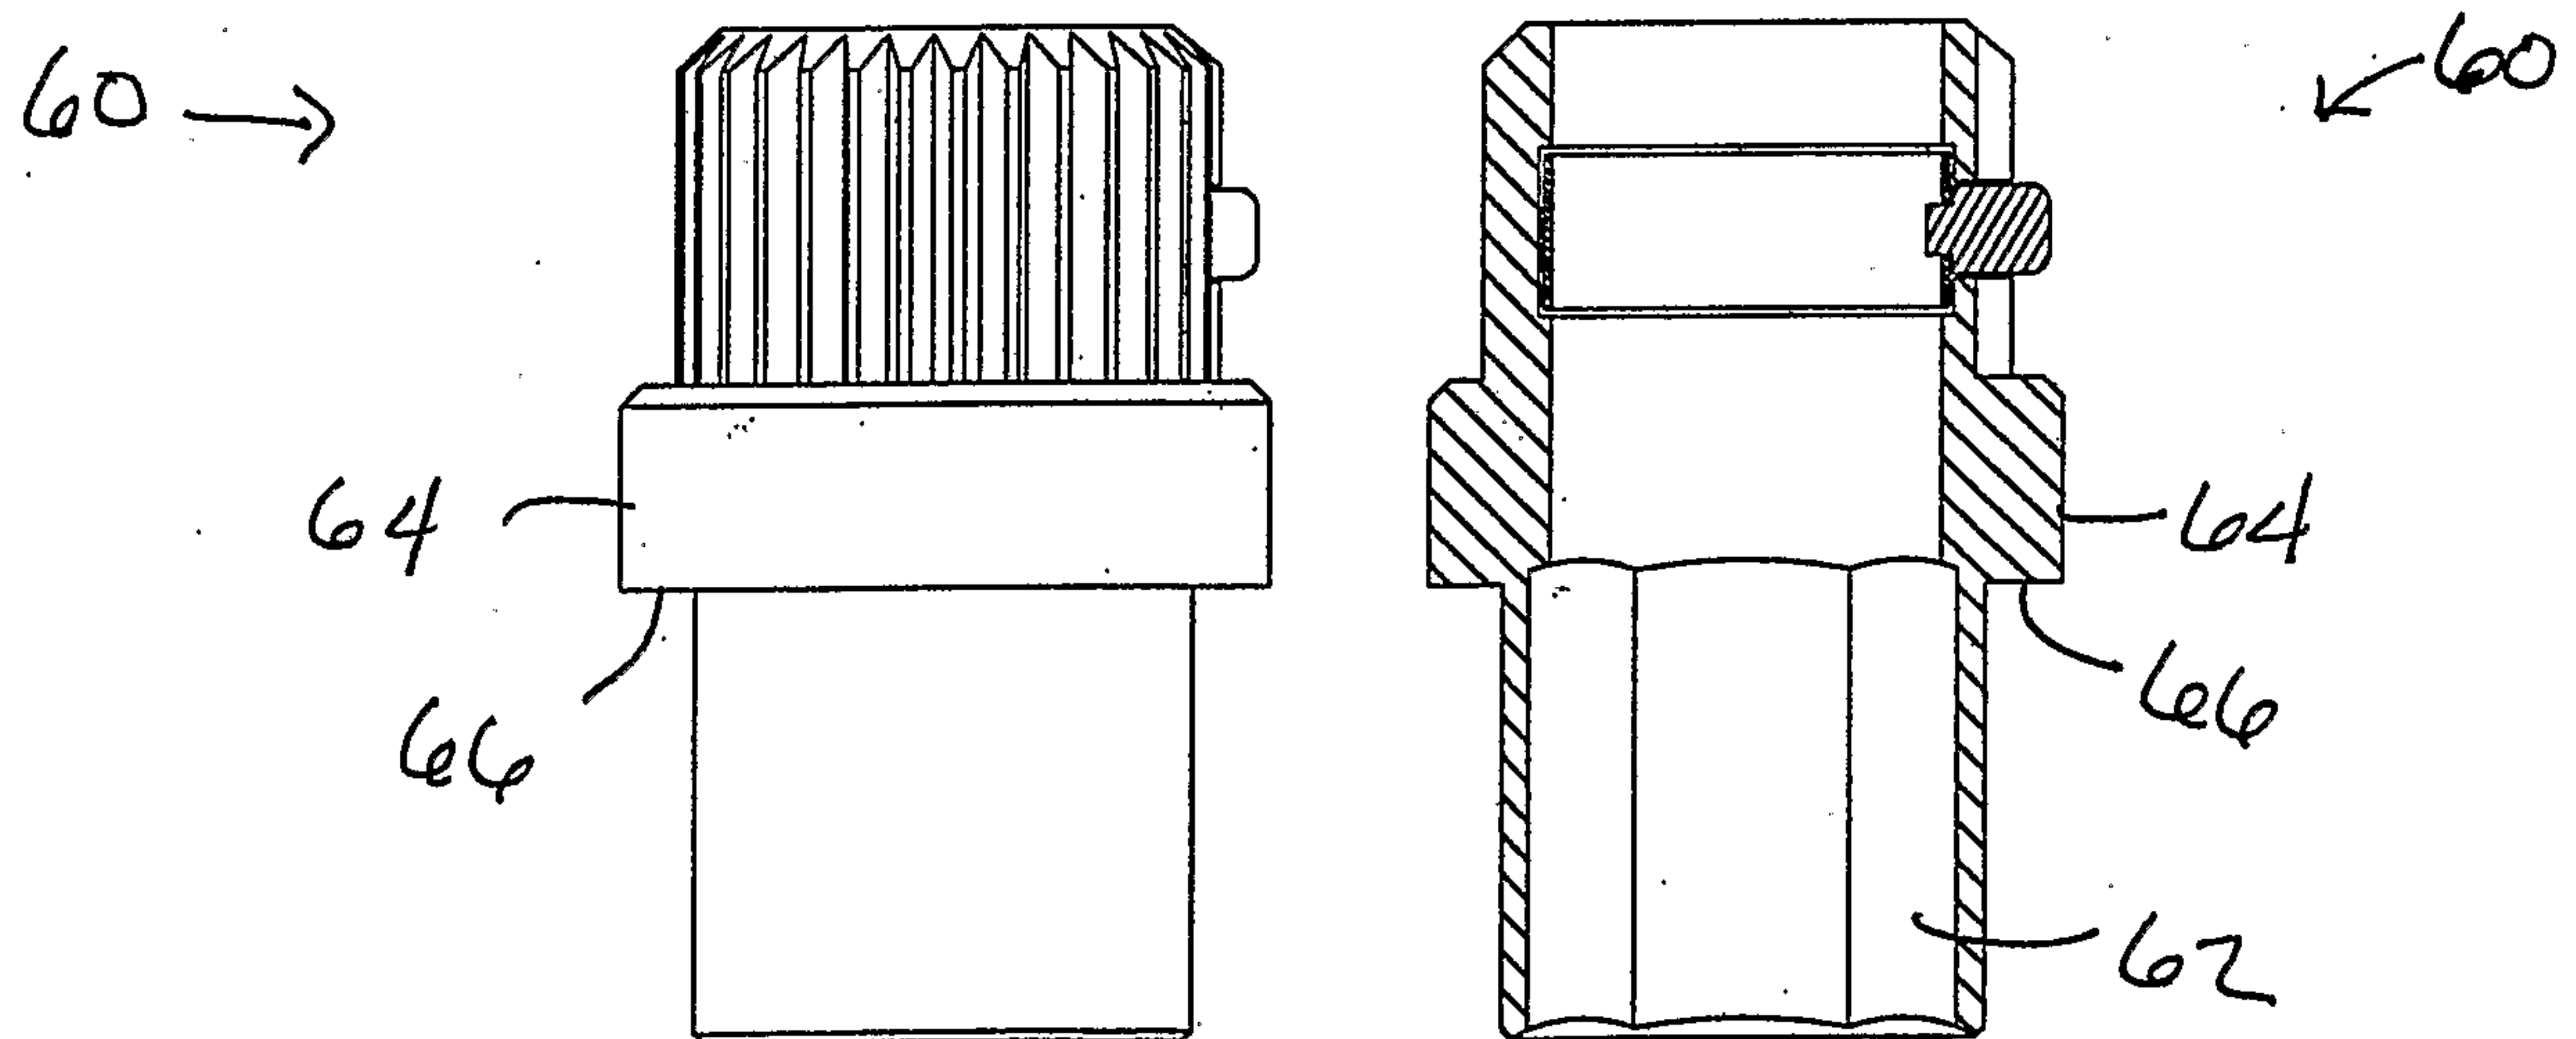

5/9

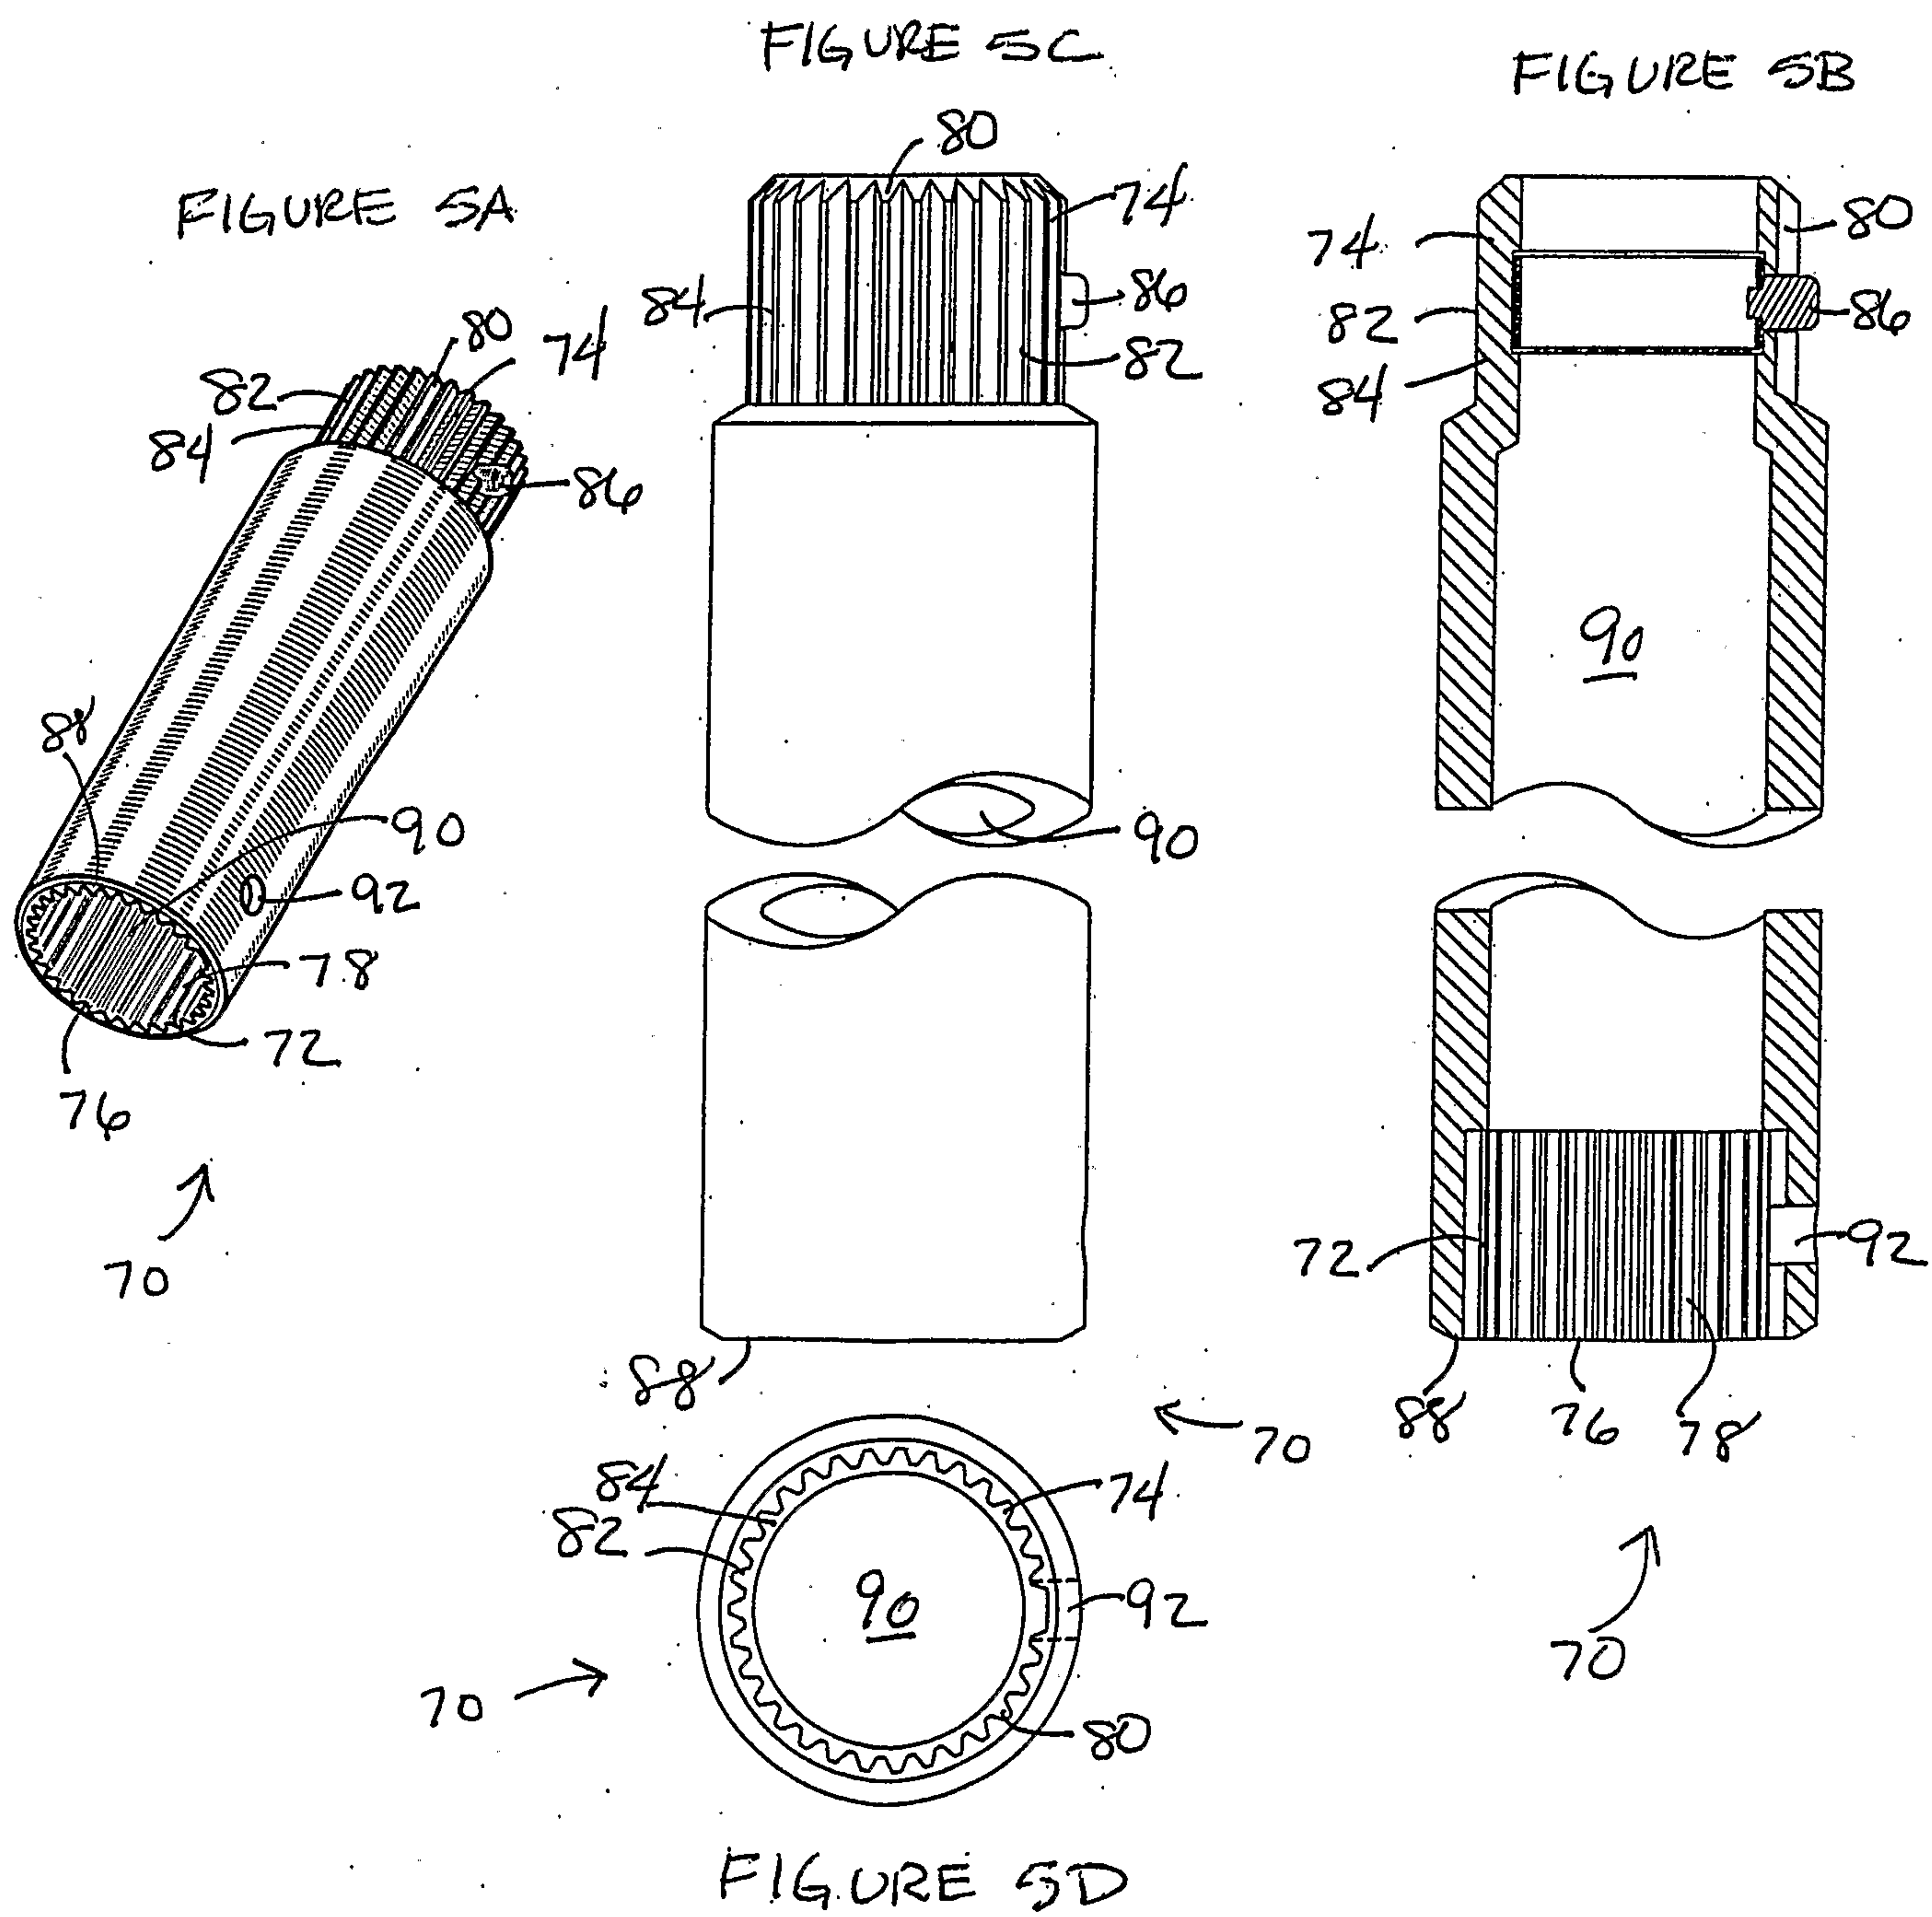

6/9

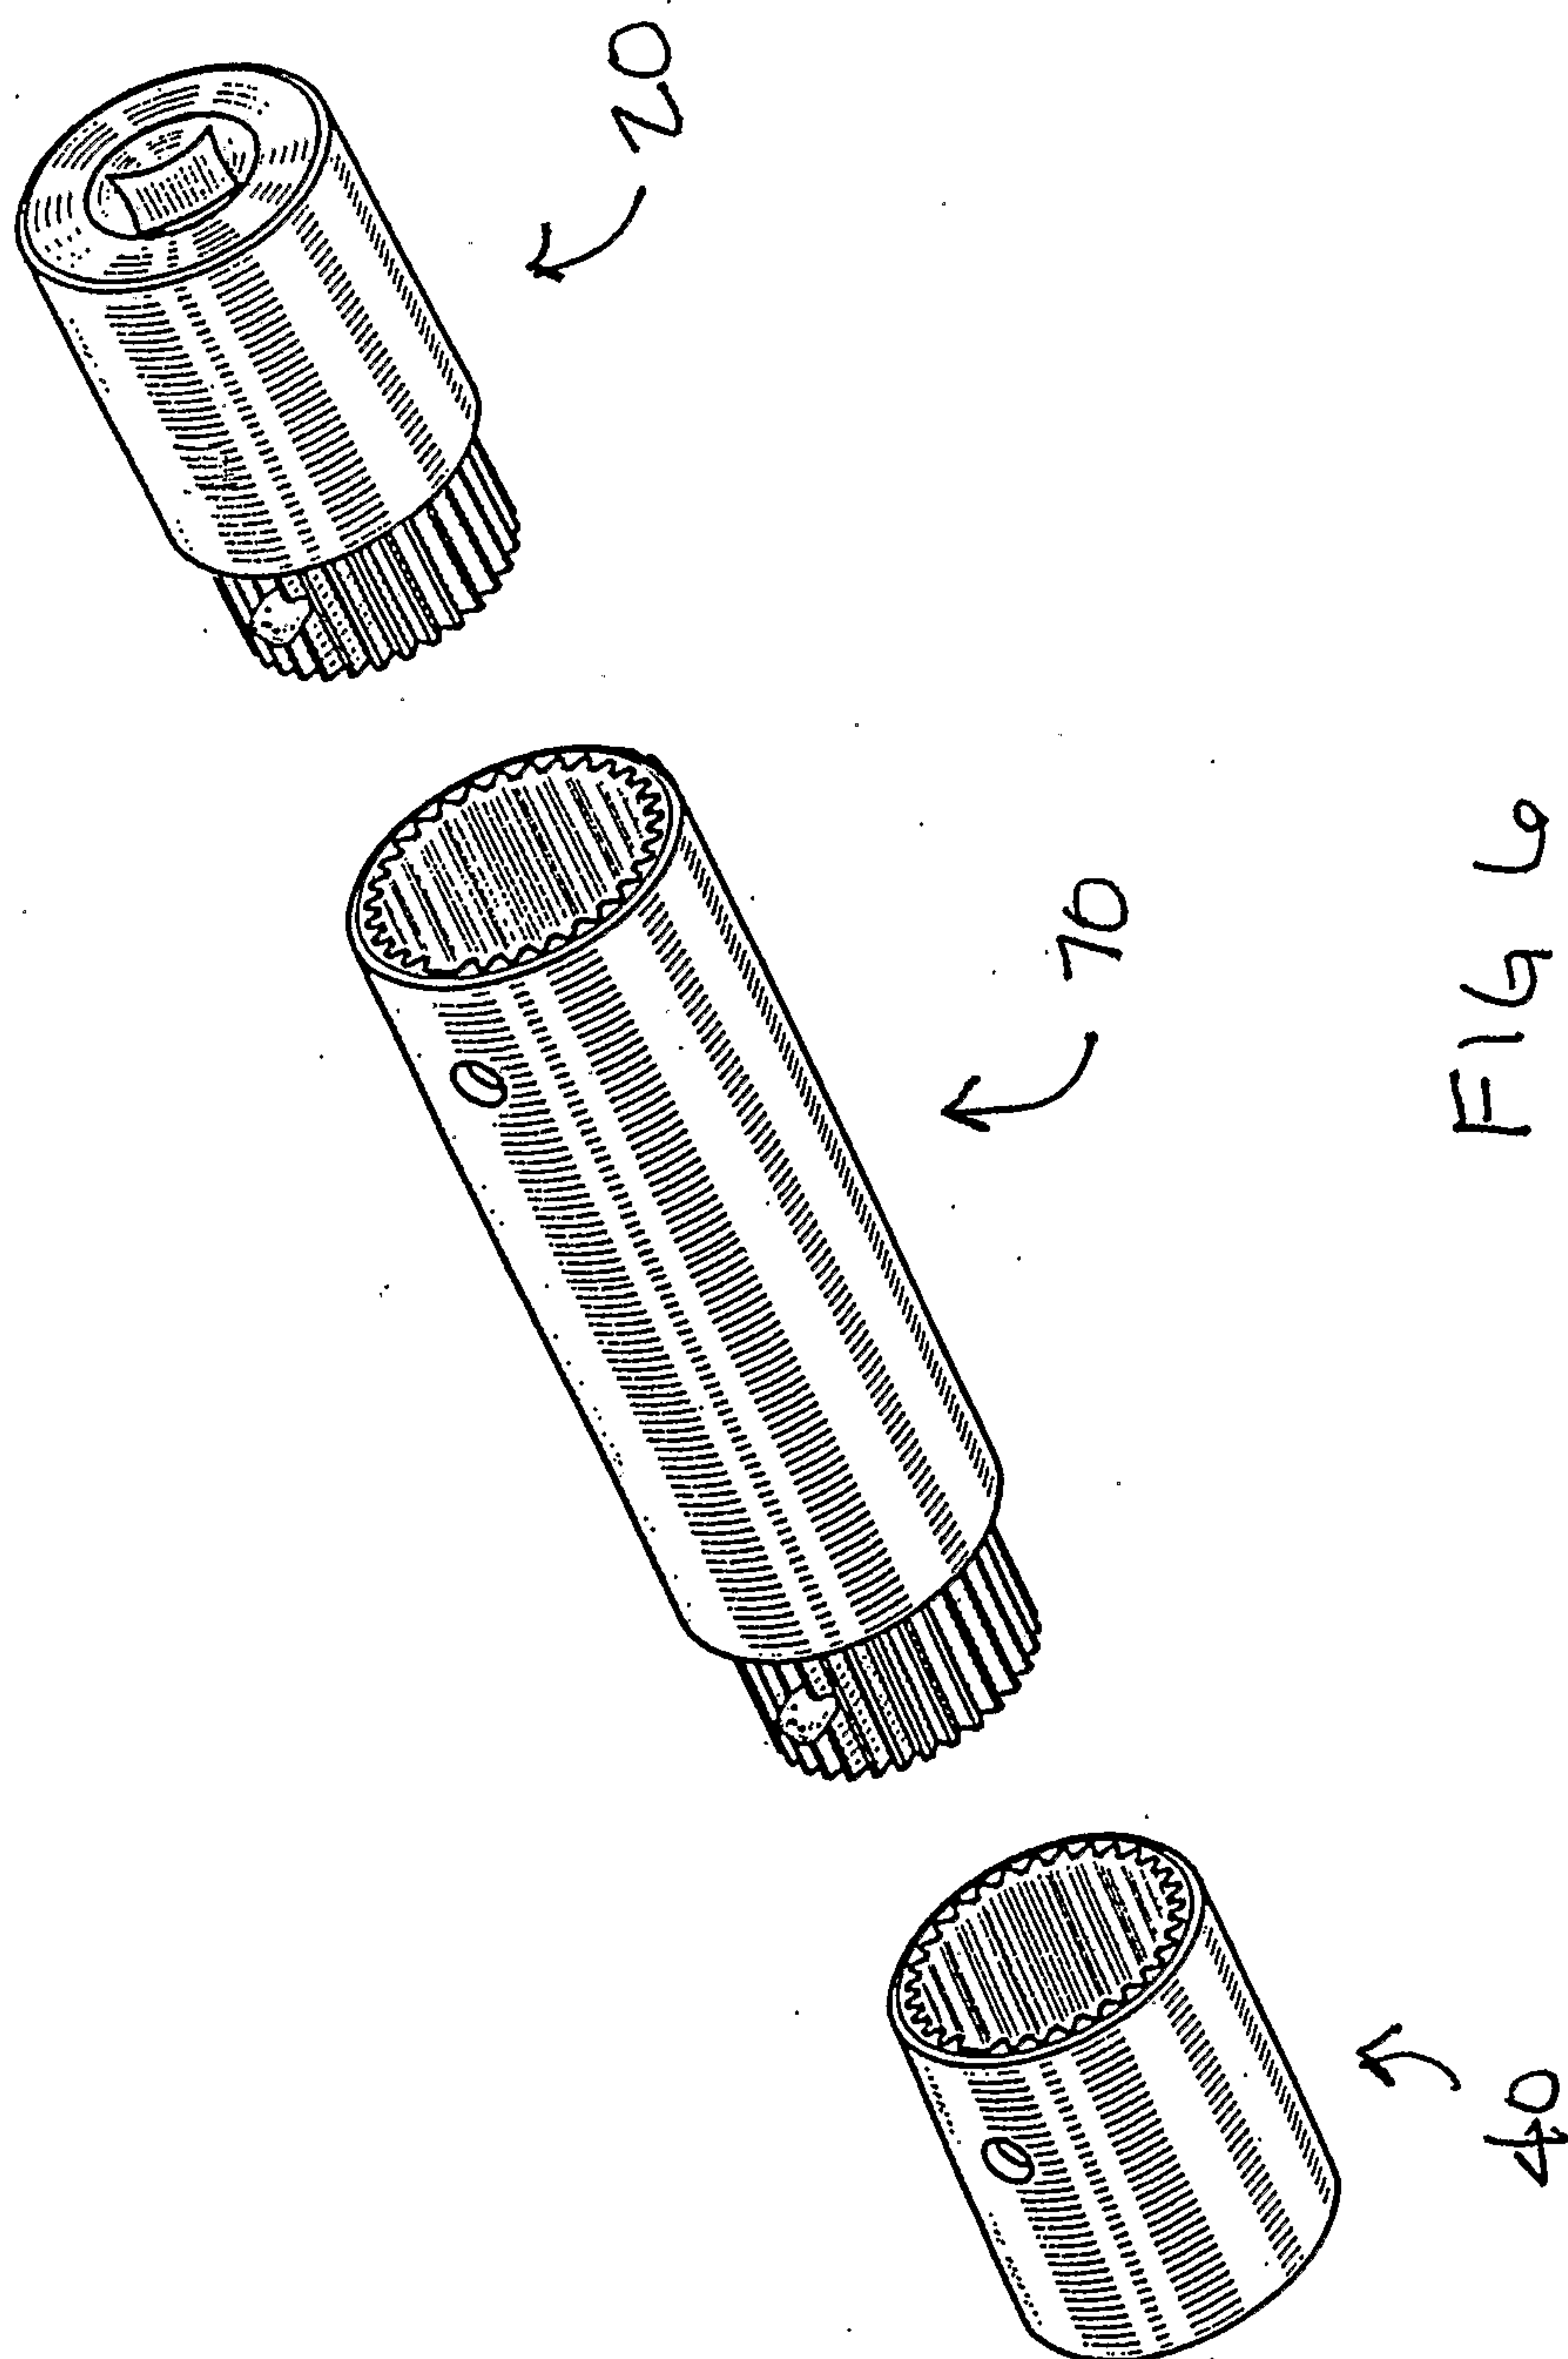

7/9

figure 7A

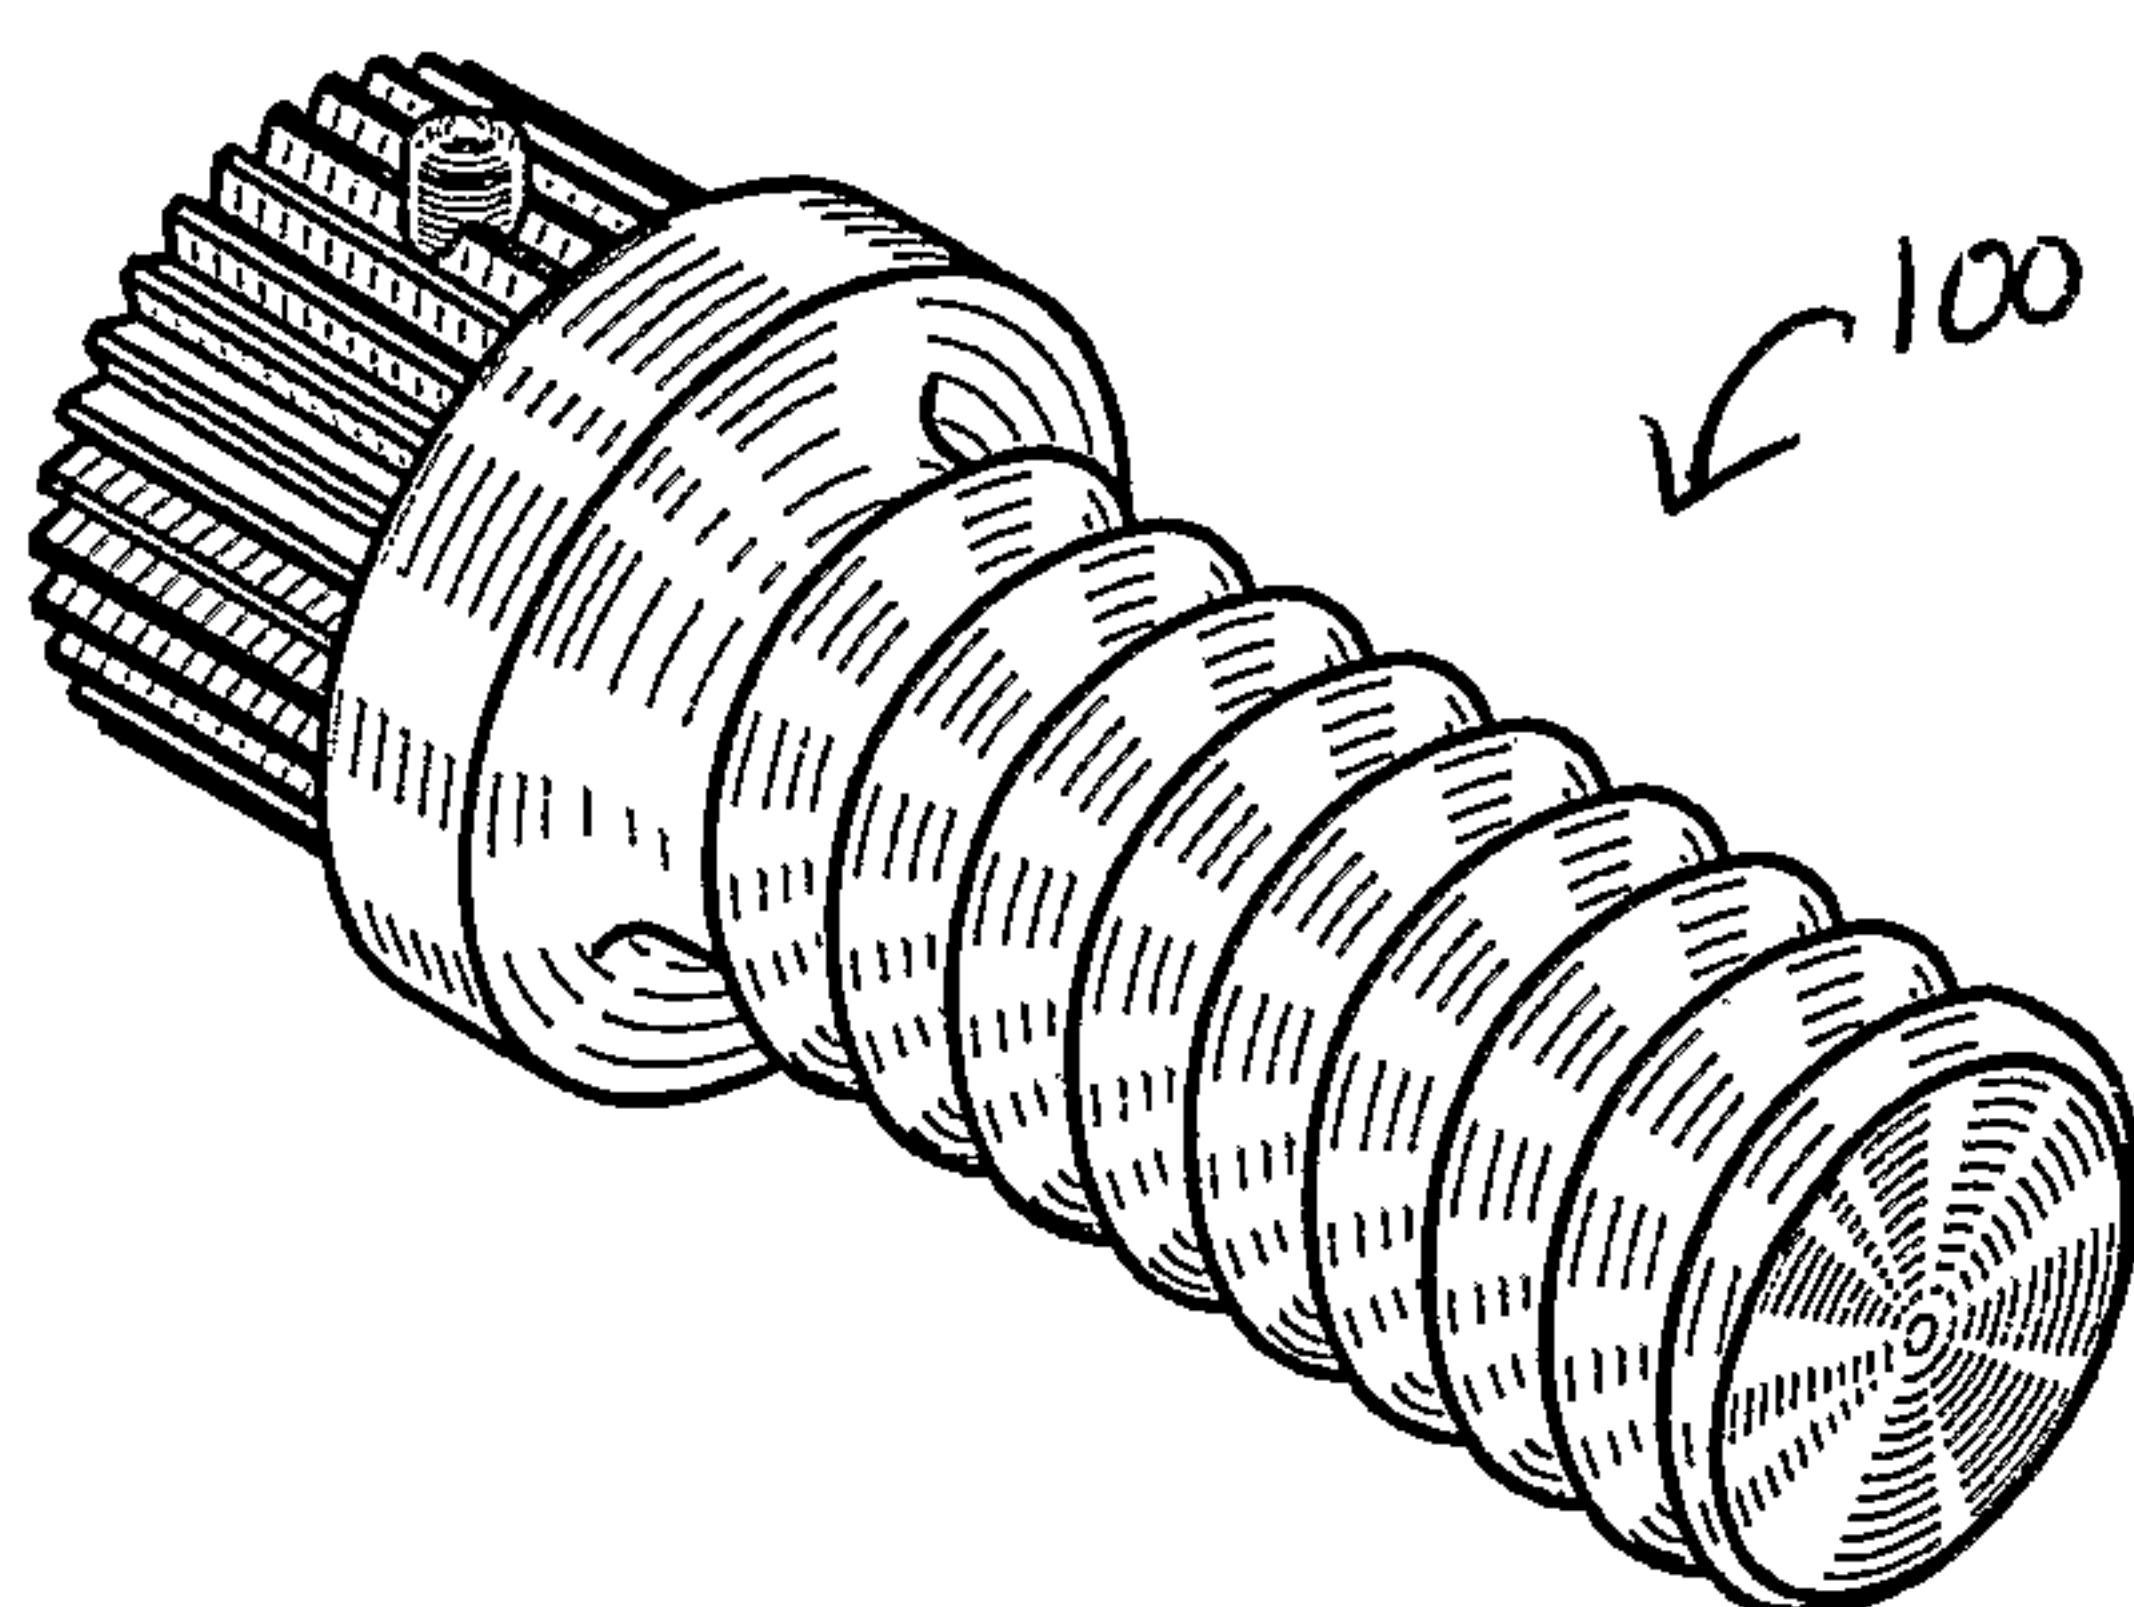


figure 7B

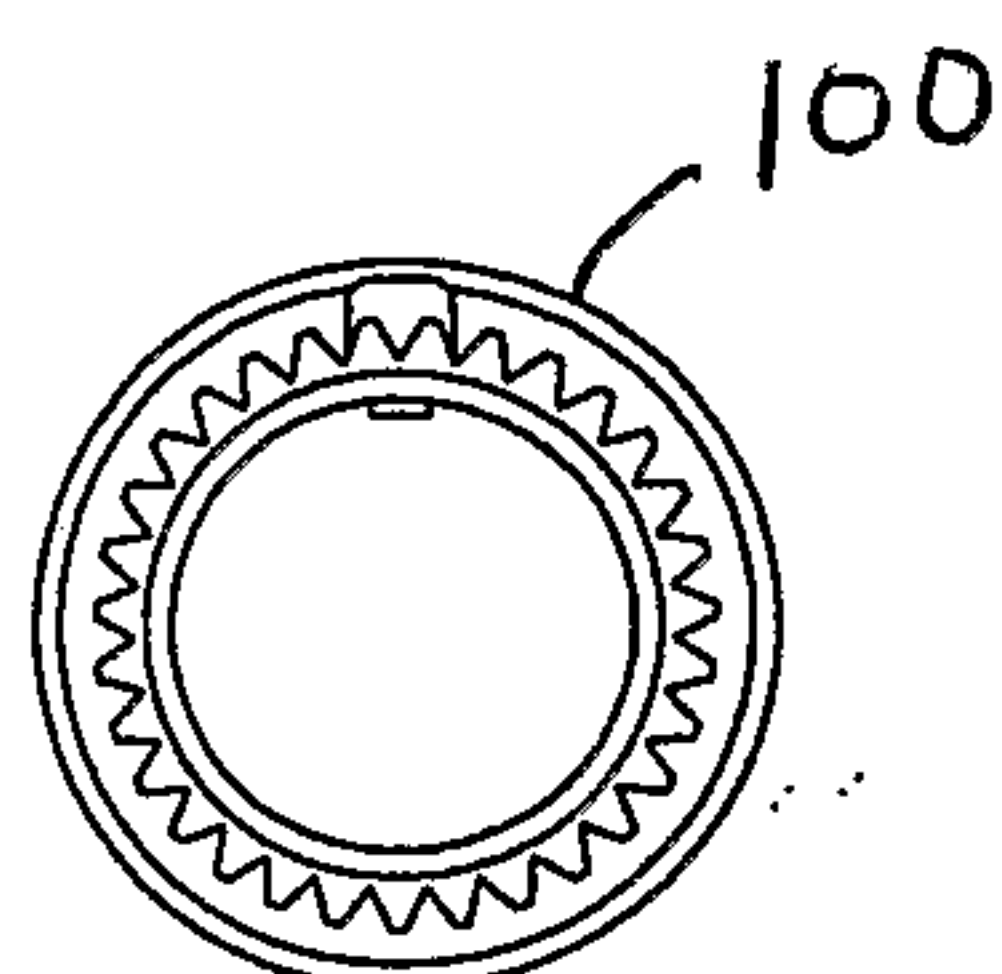
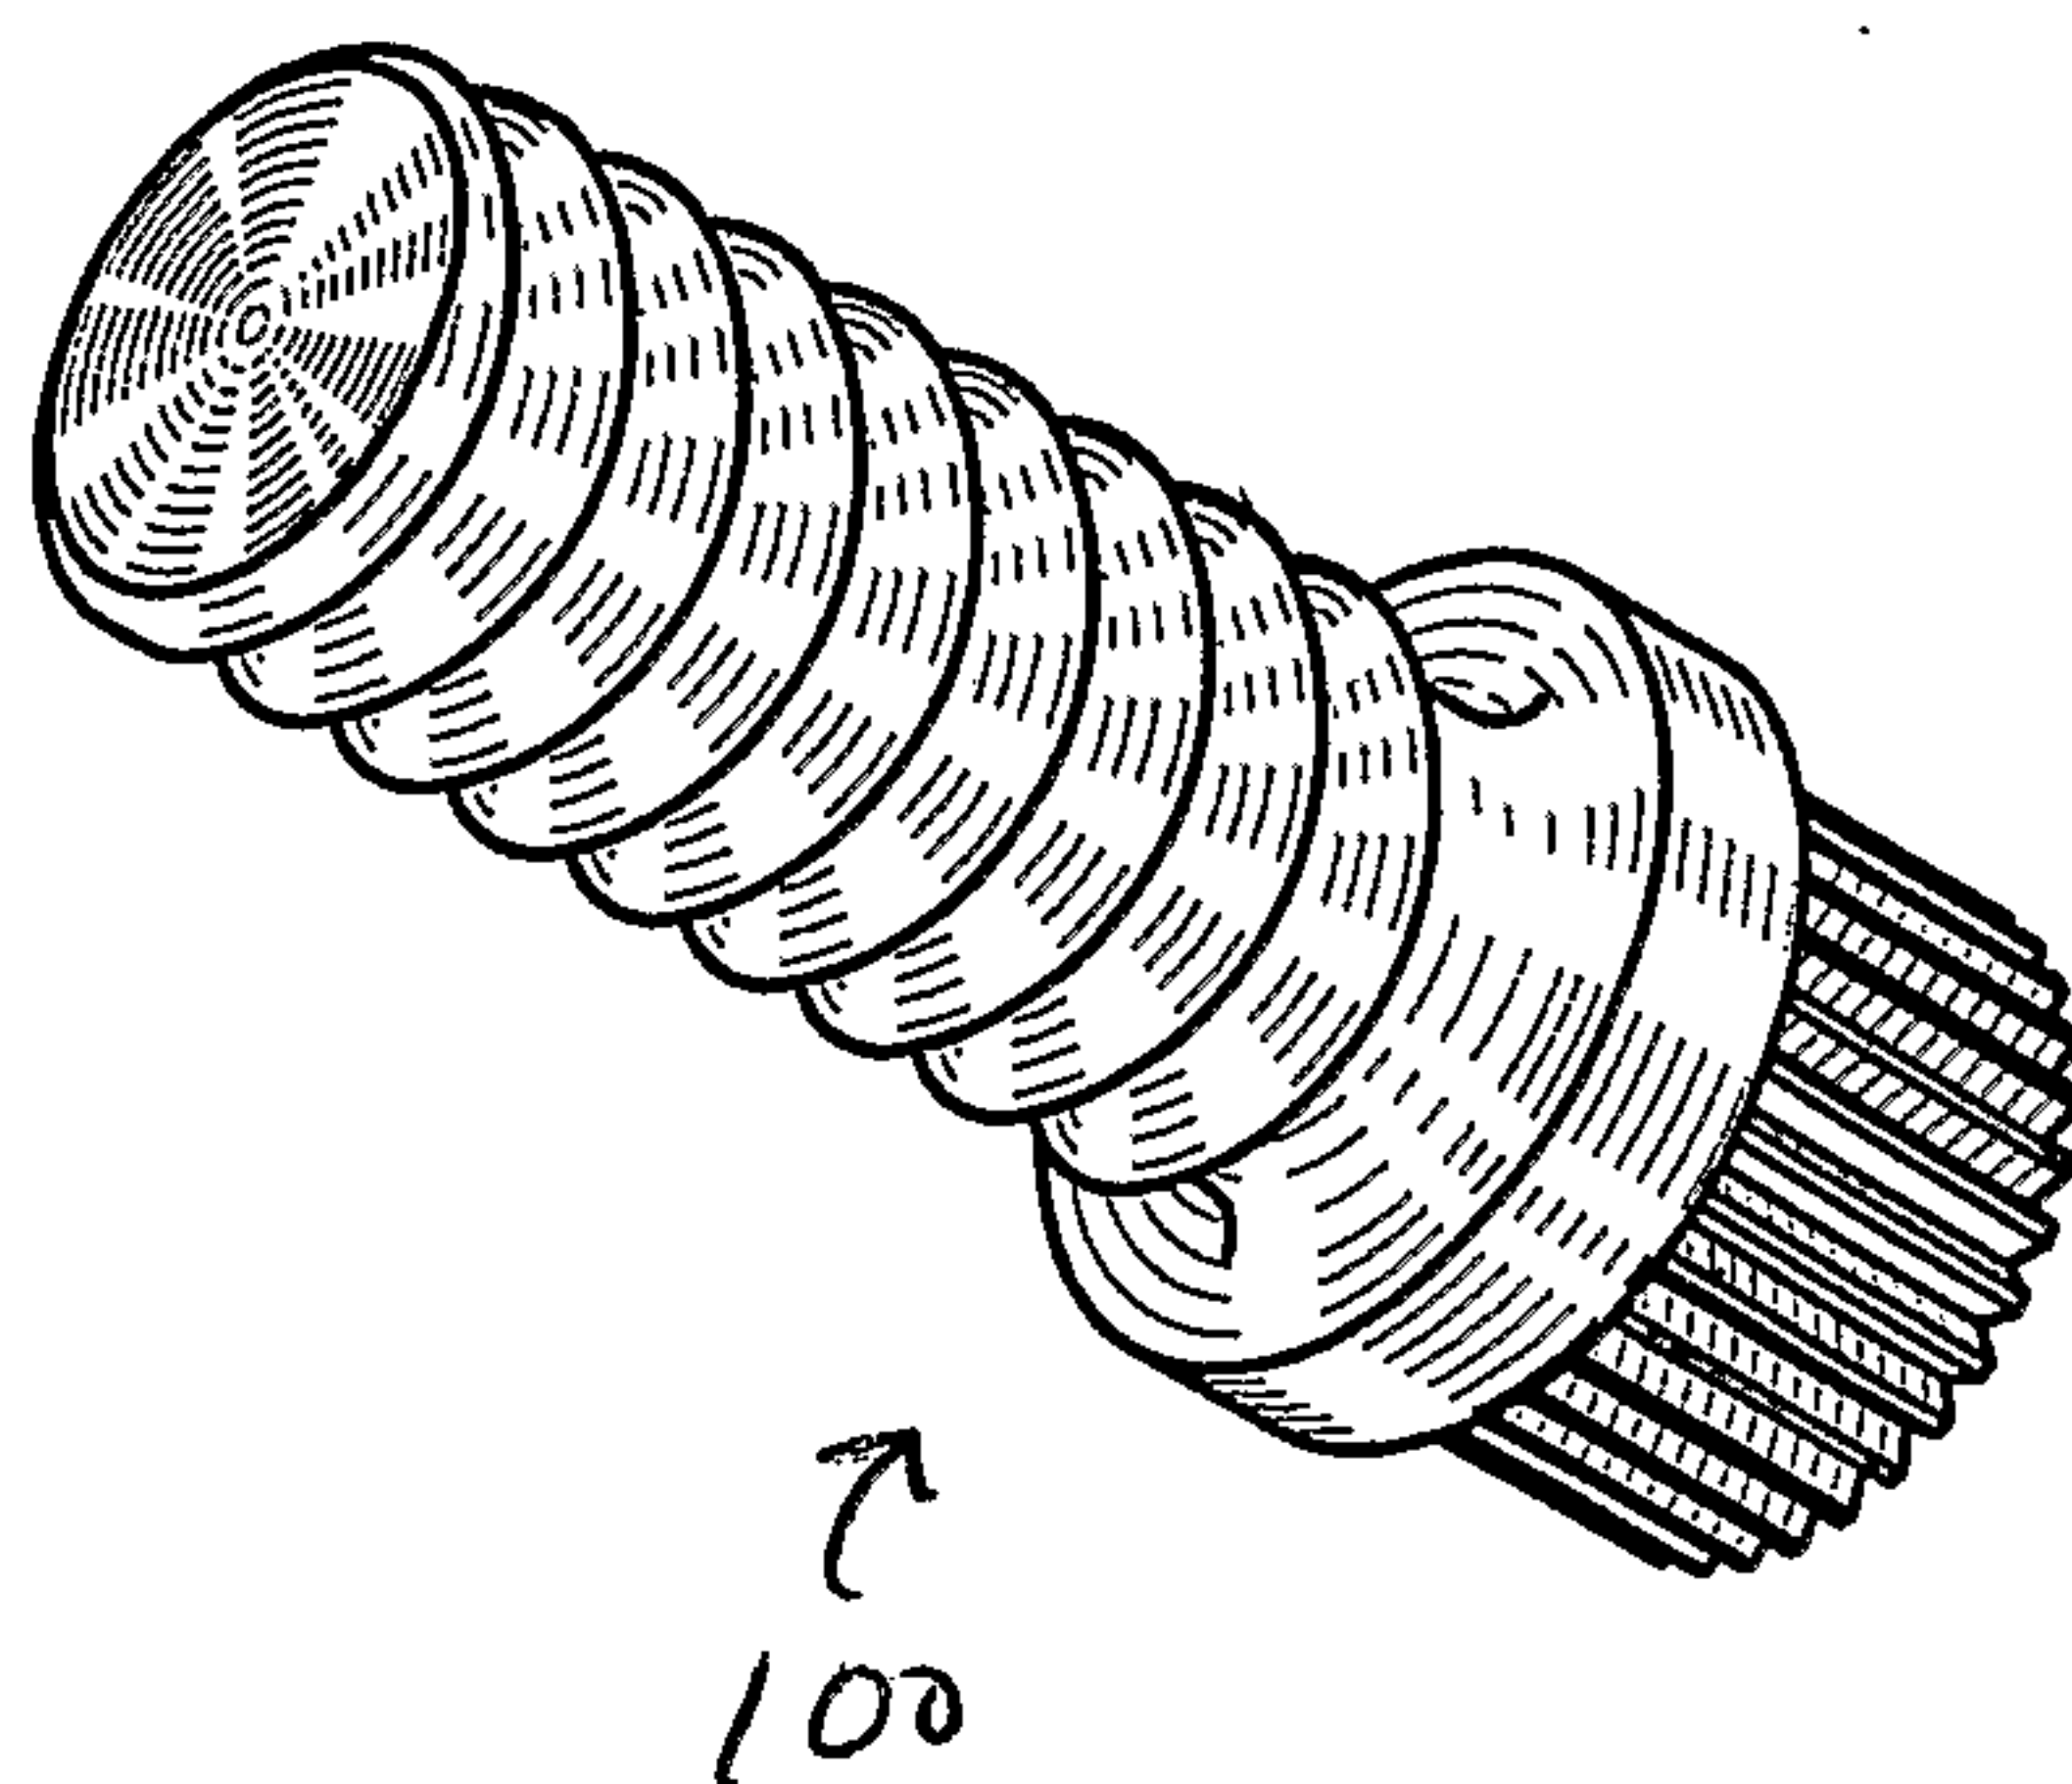


figure 7C

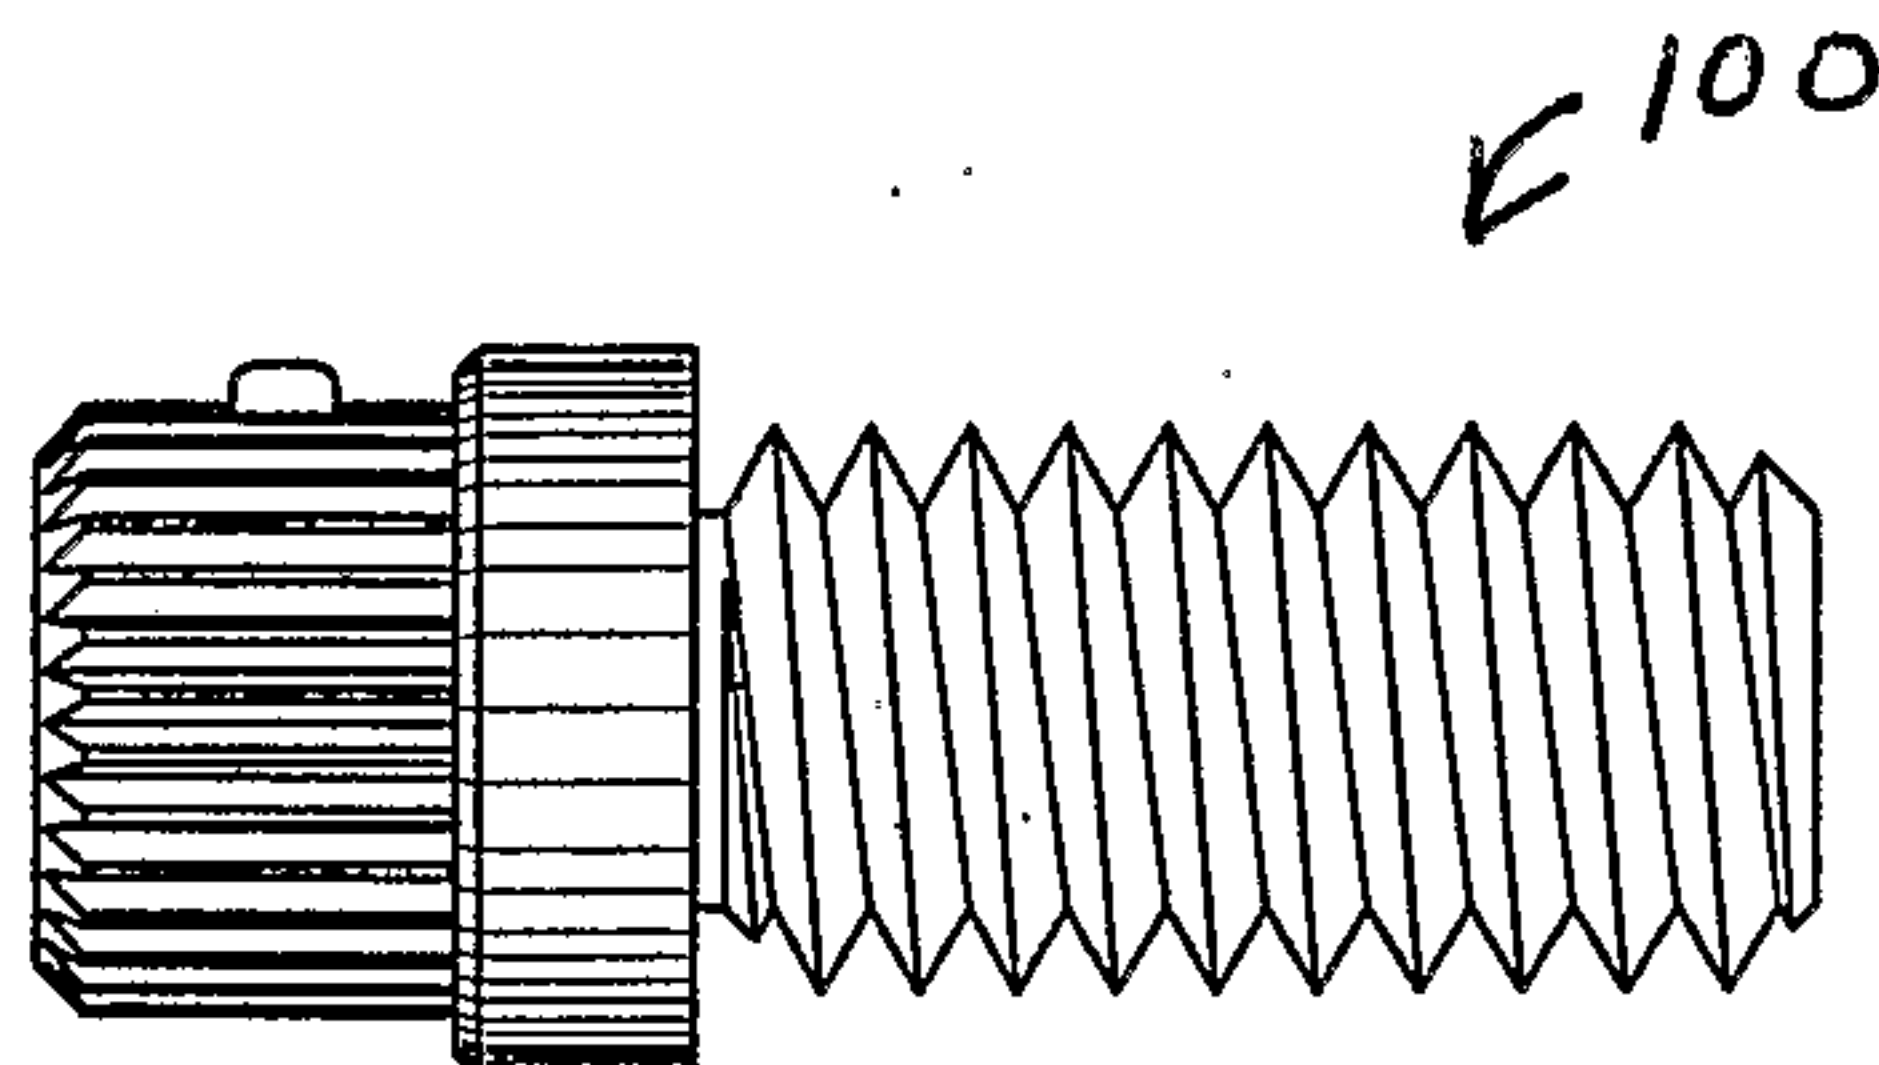


figure 7D

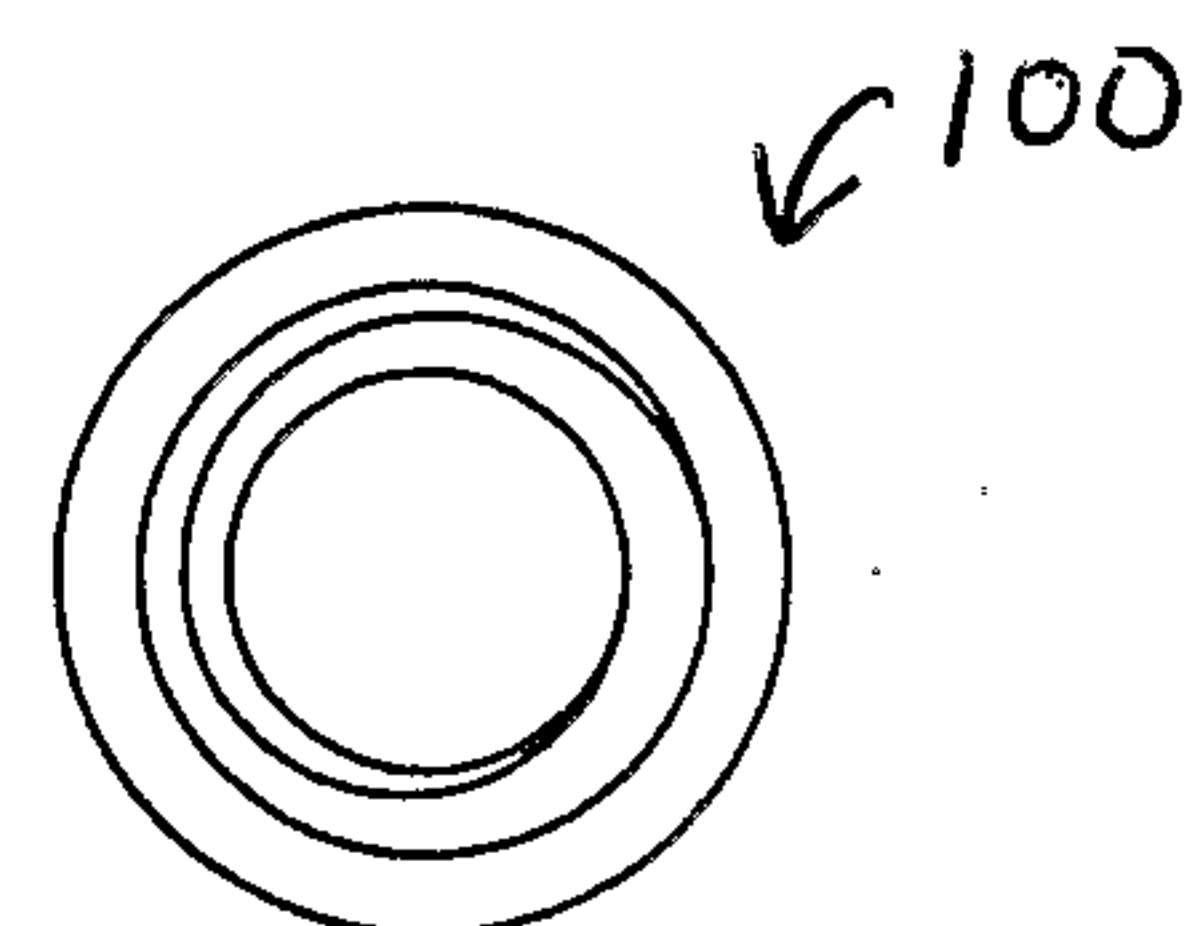


figure 7E

figure 7F


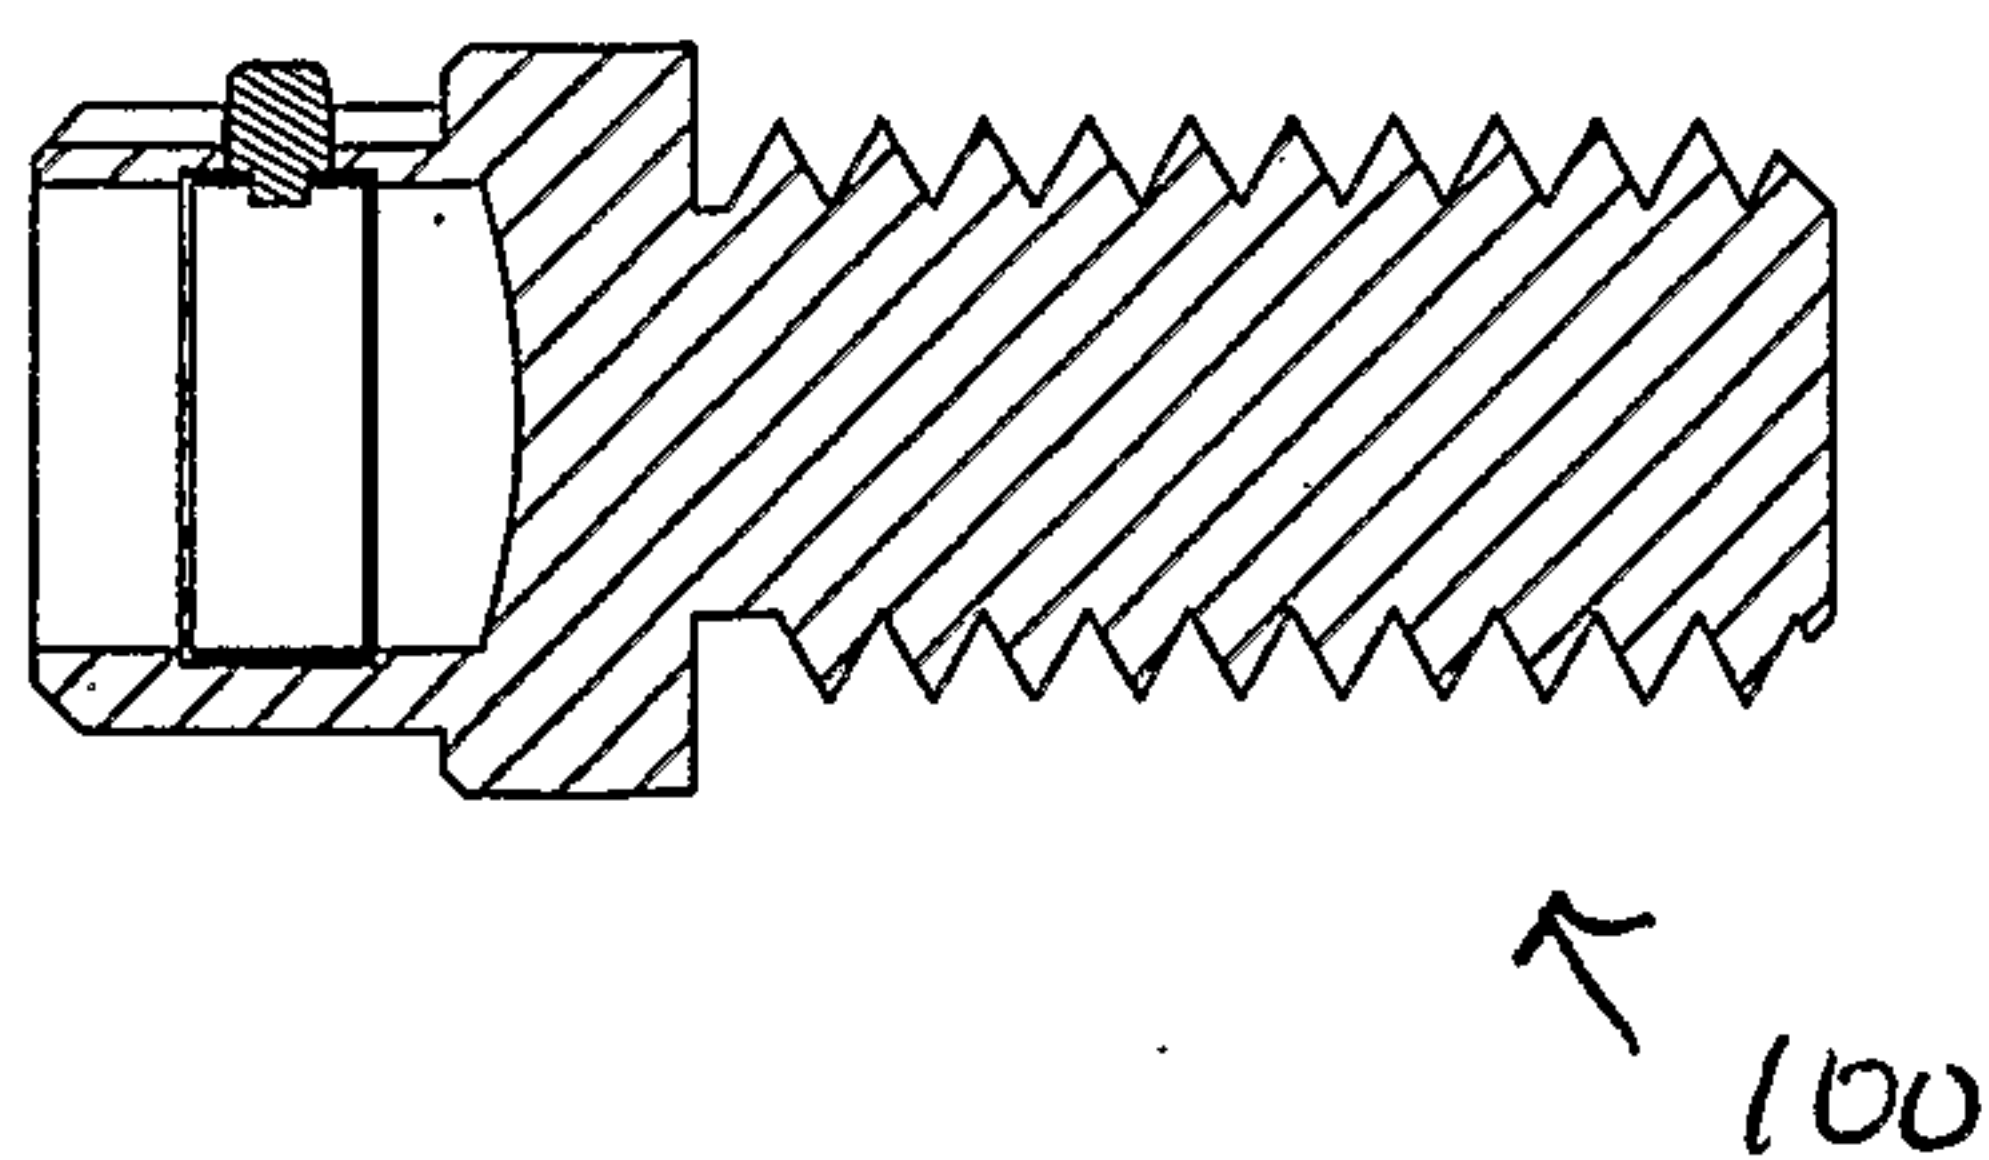


figure 7G

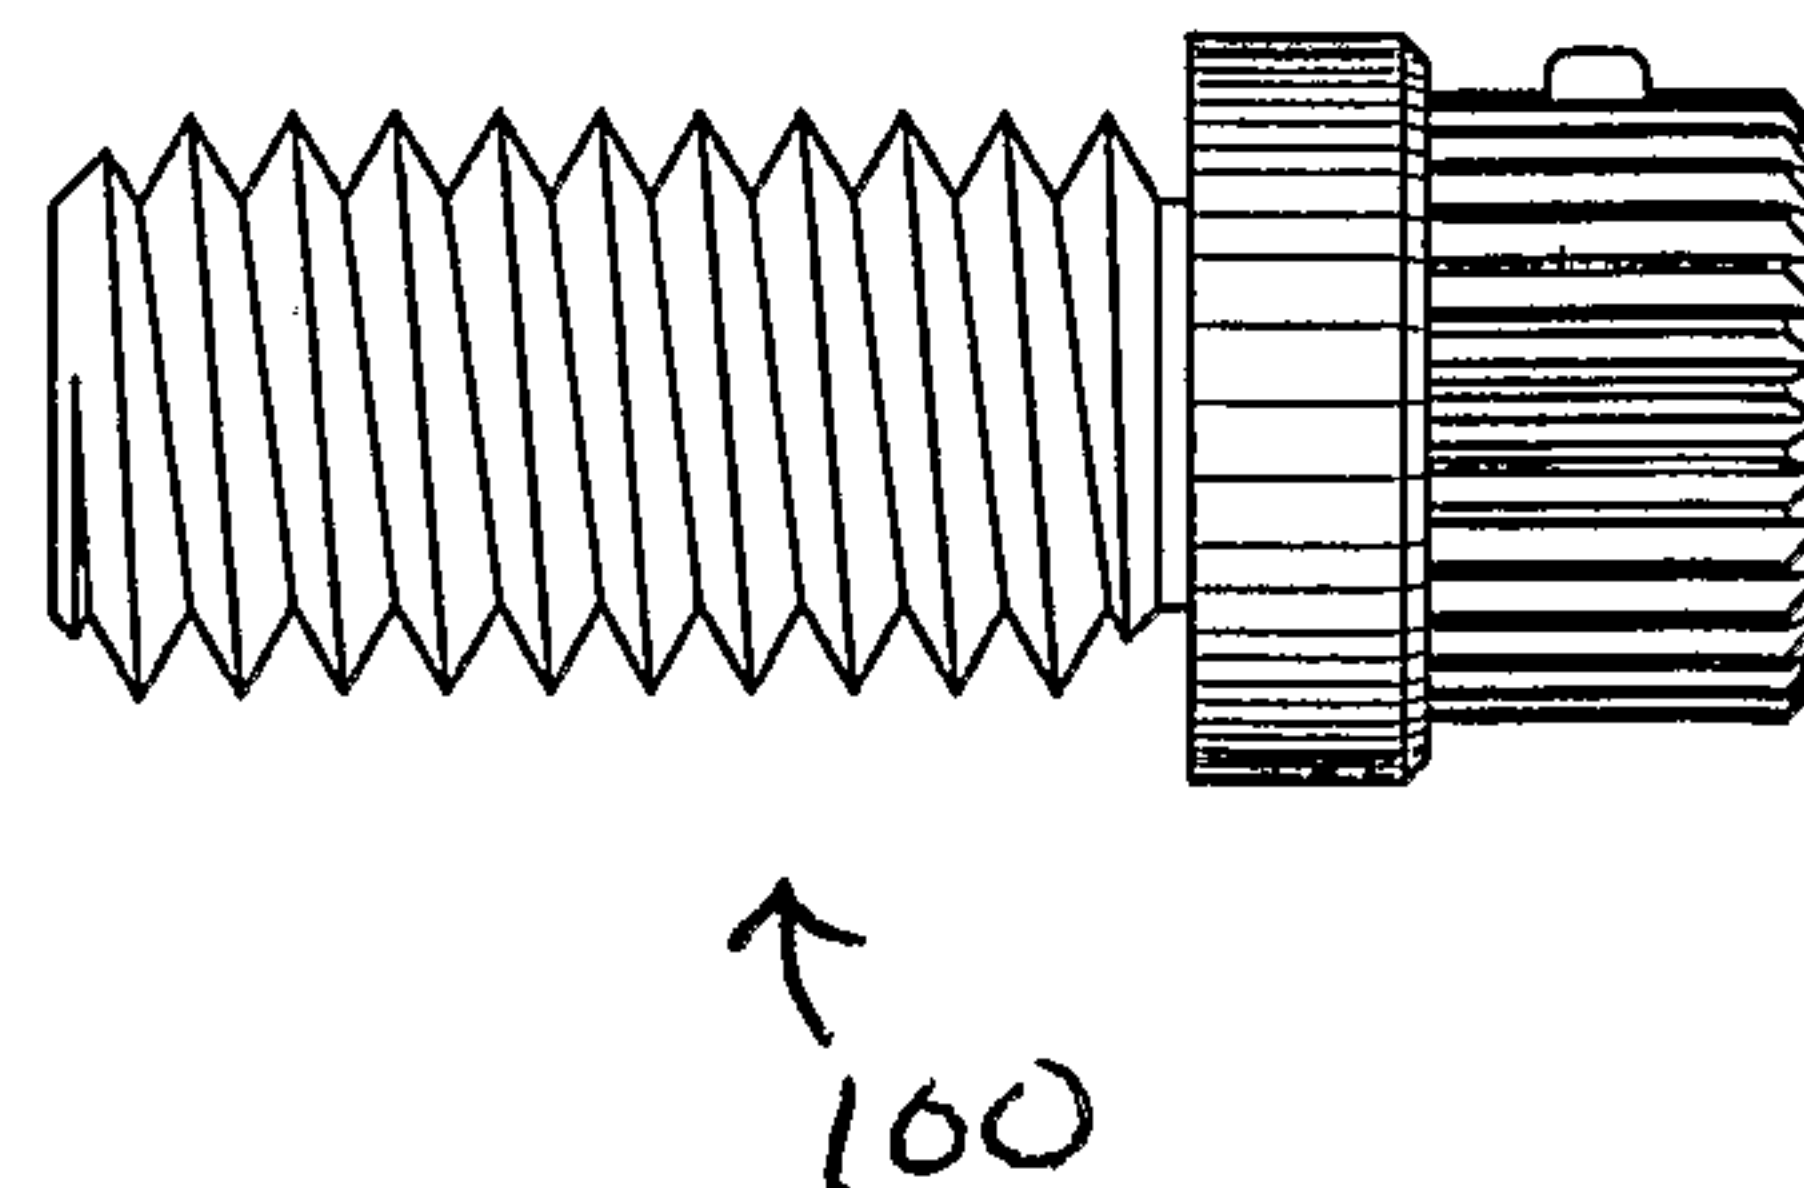

8/9


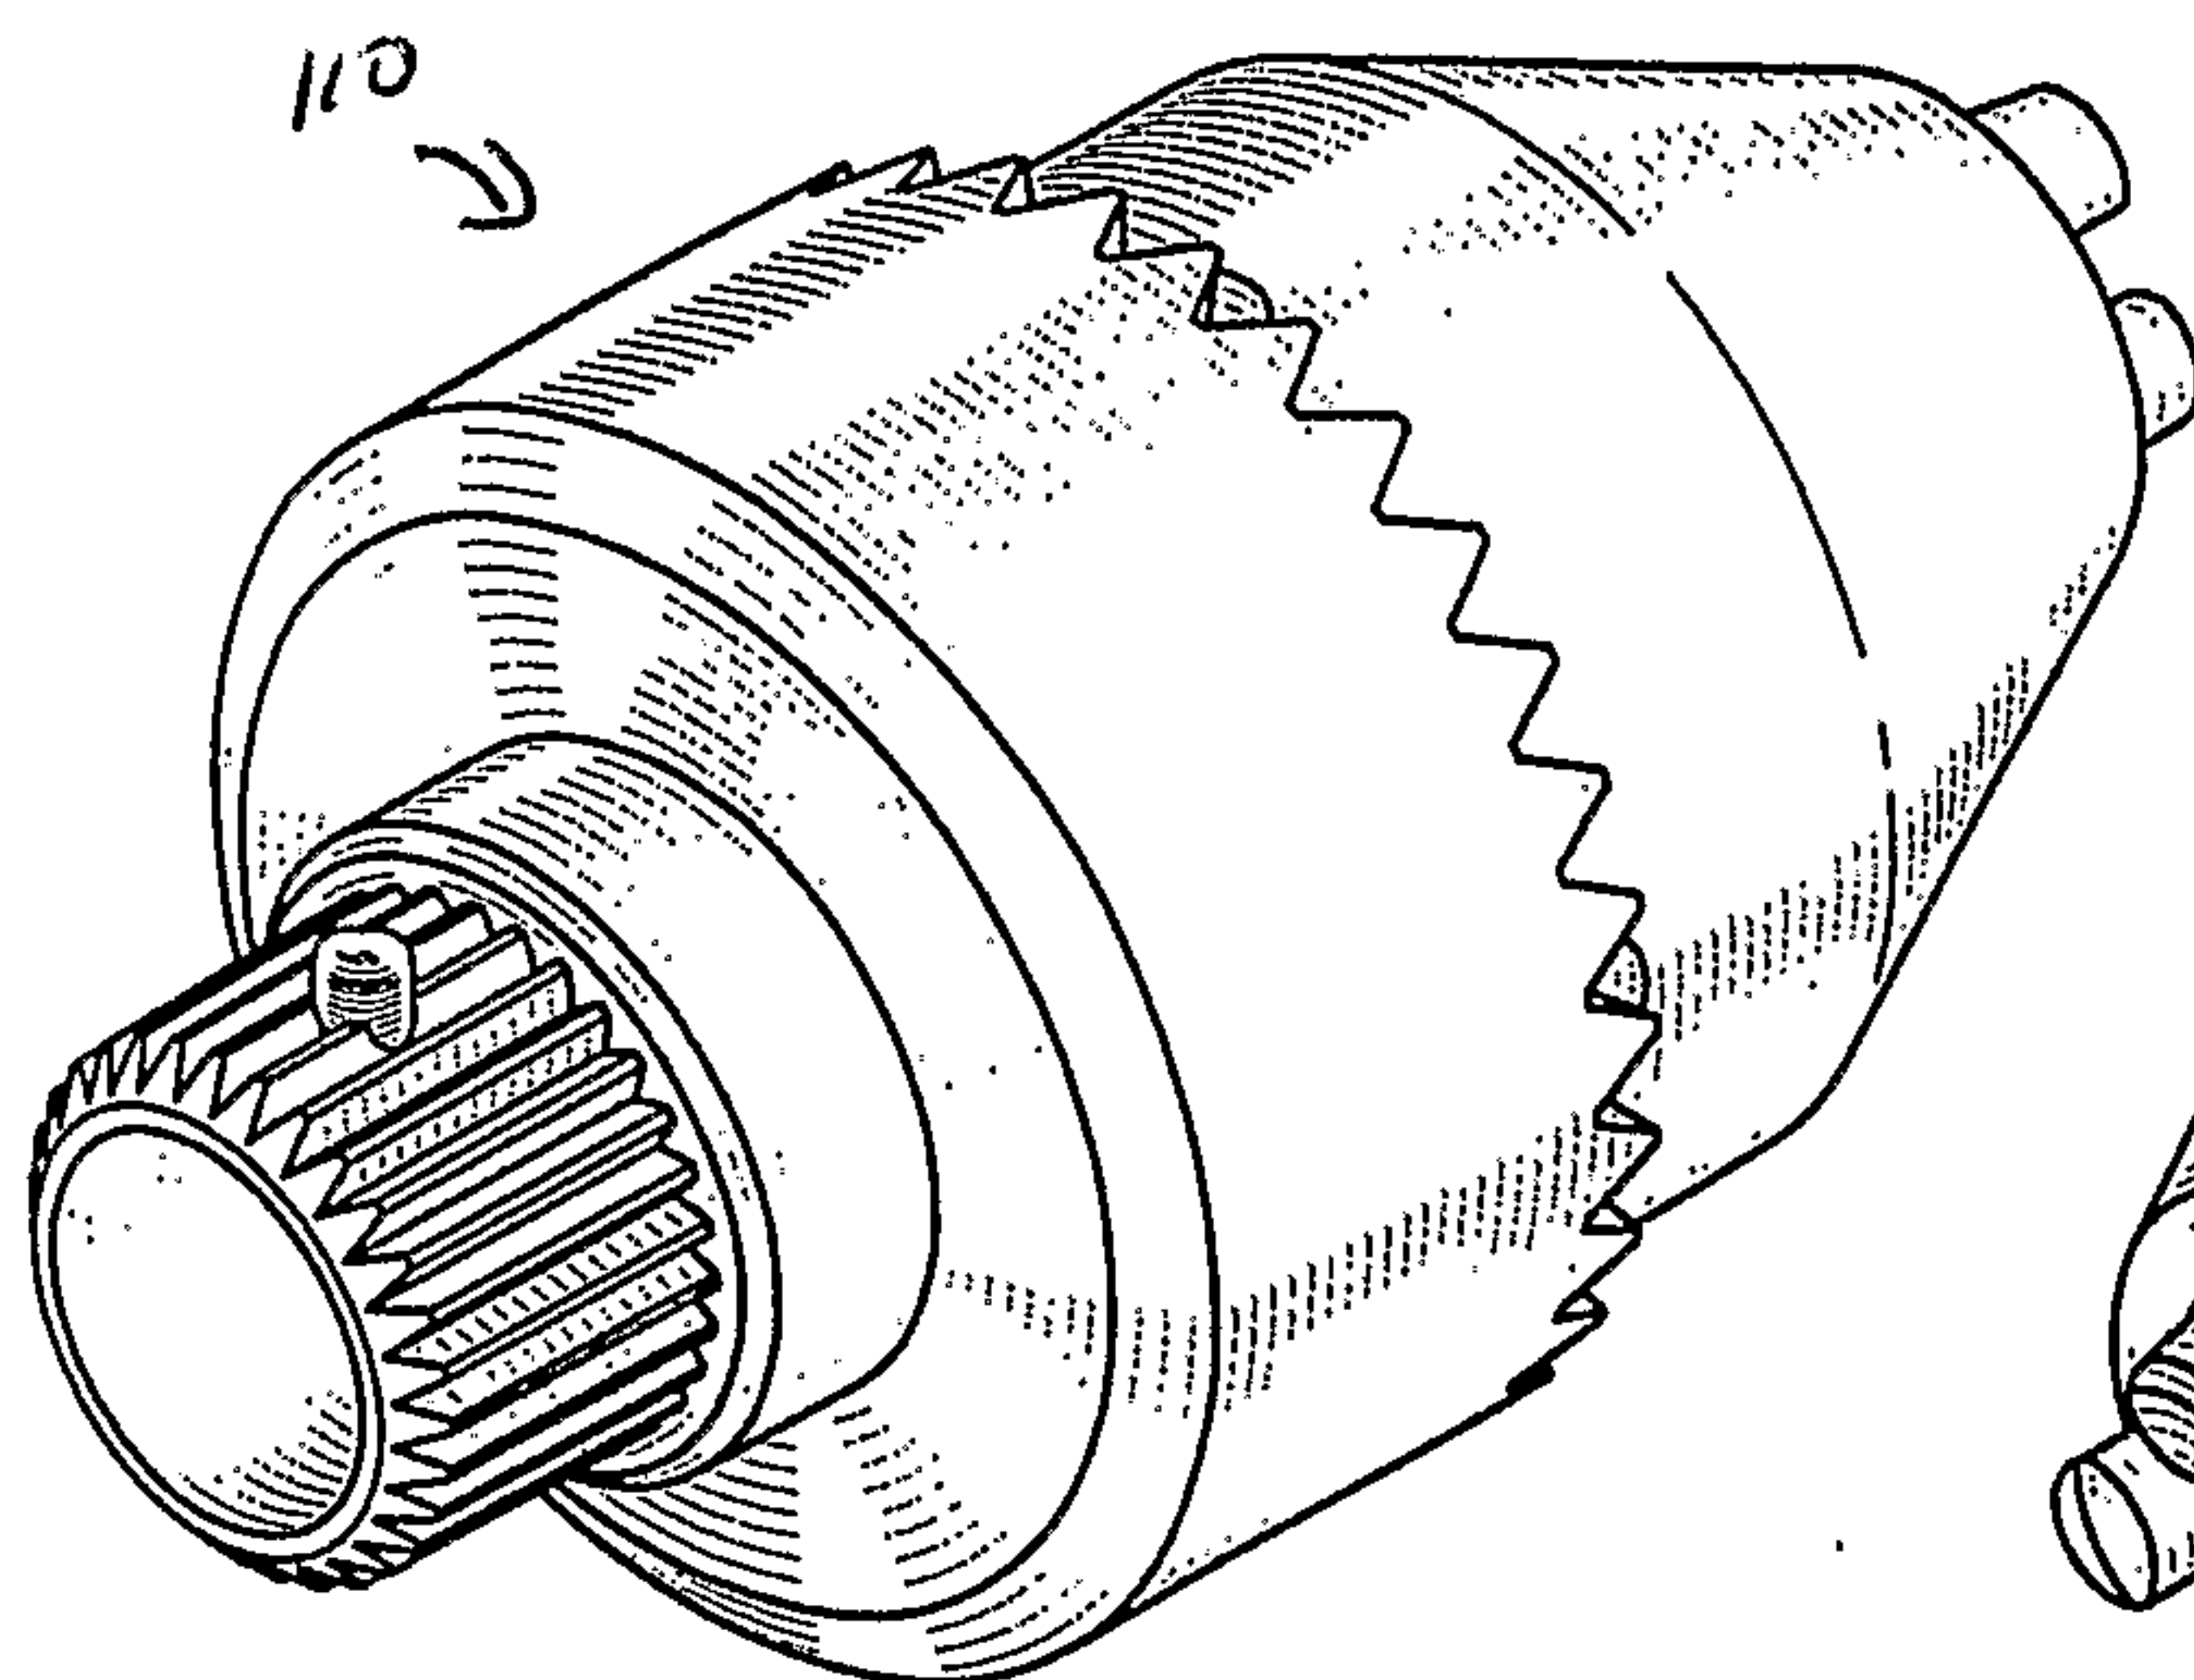


figure 8A

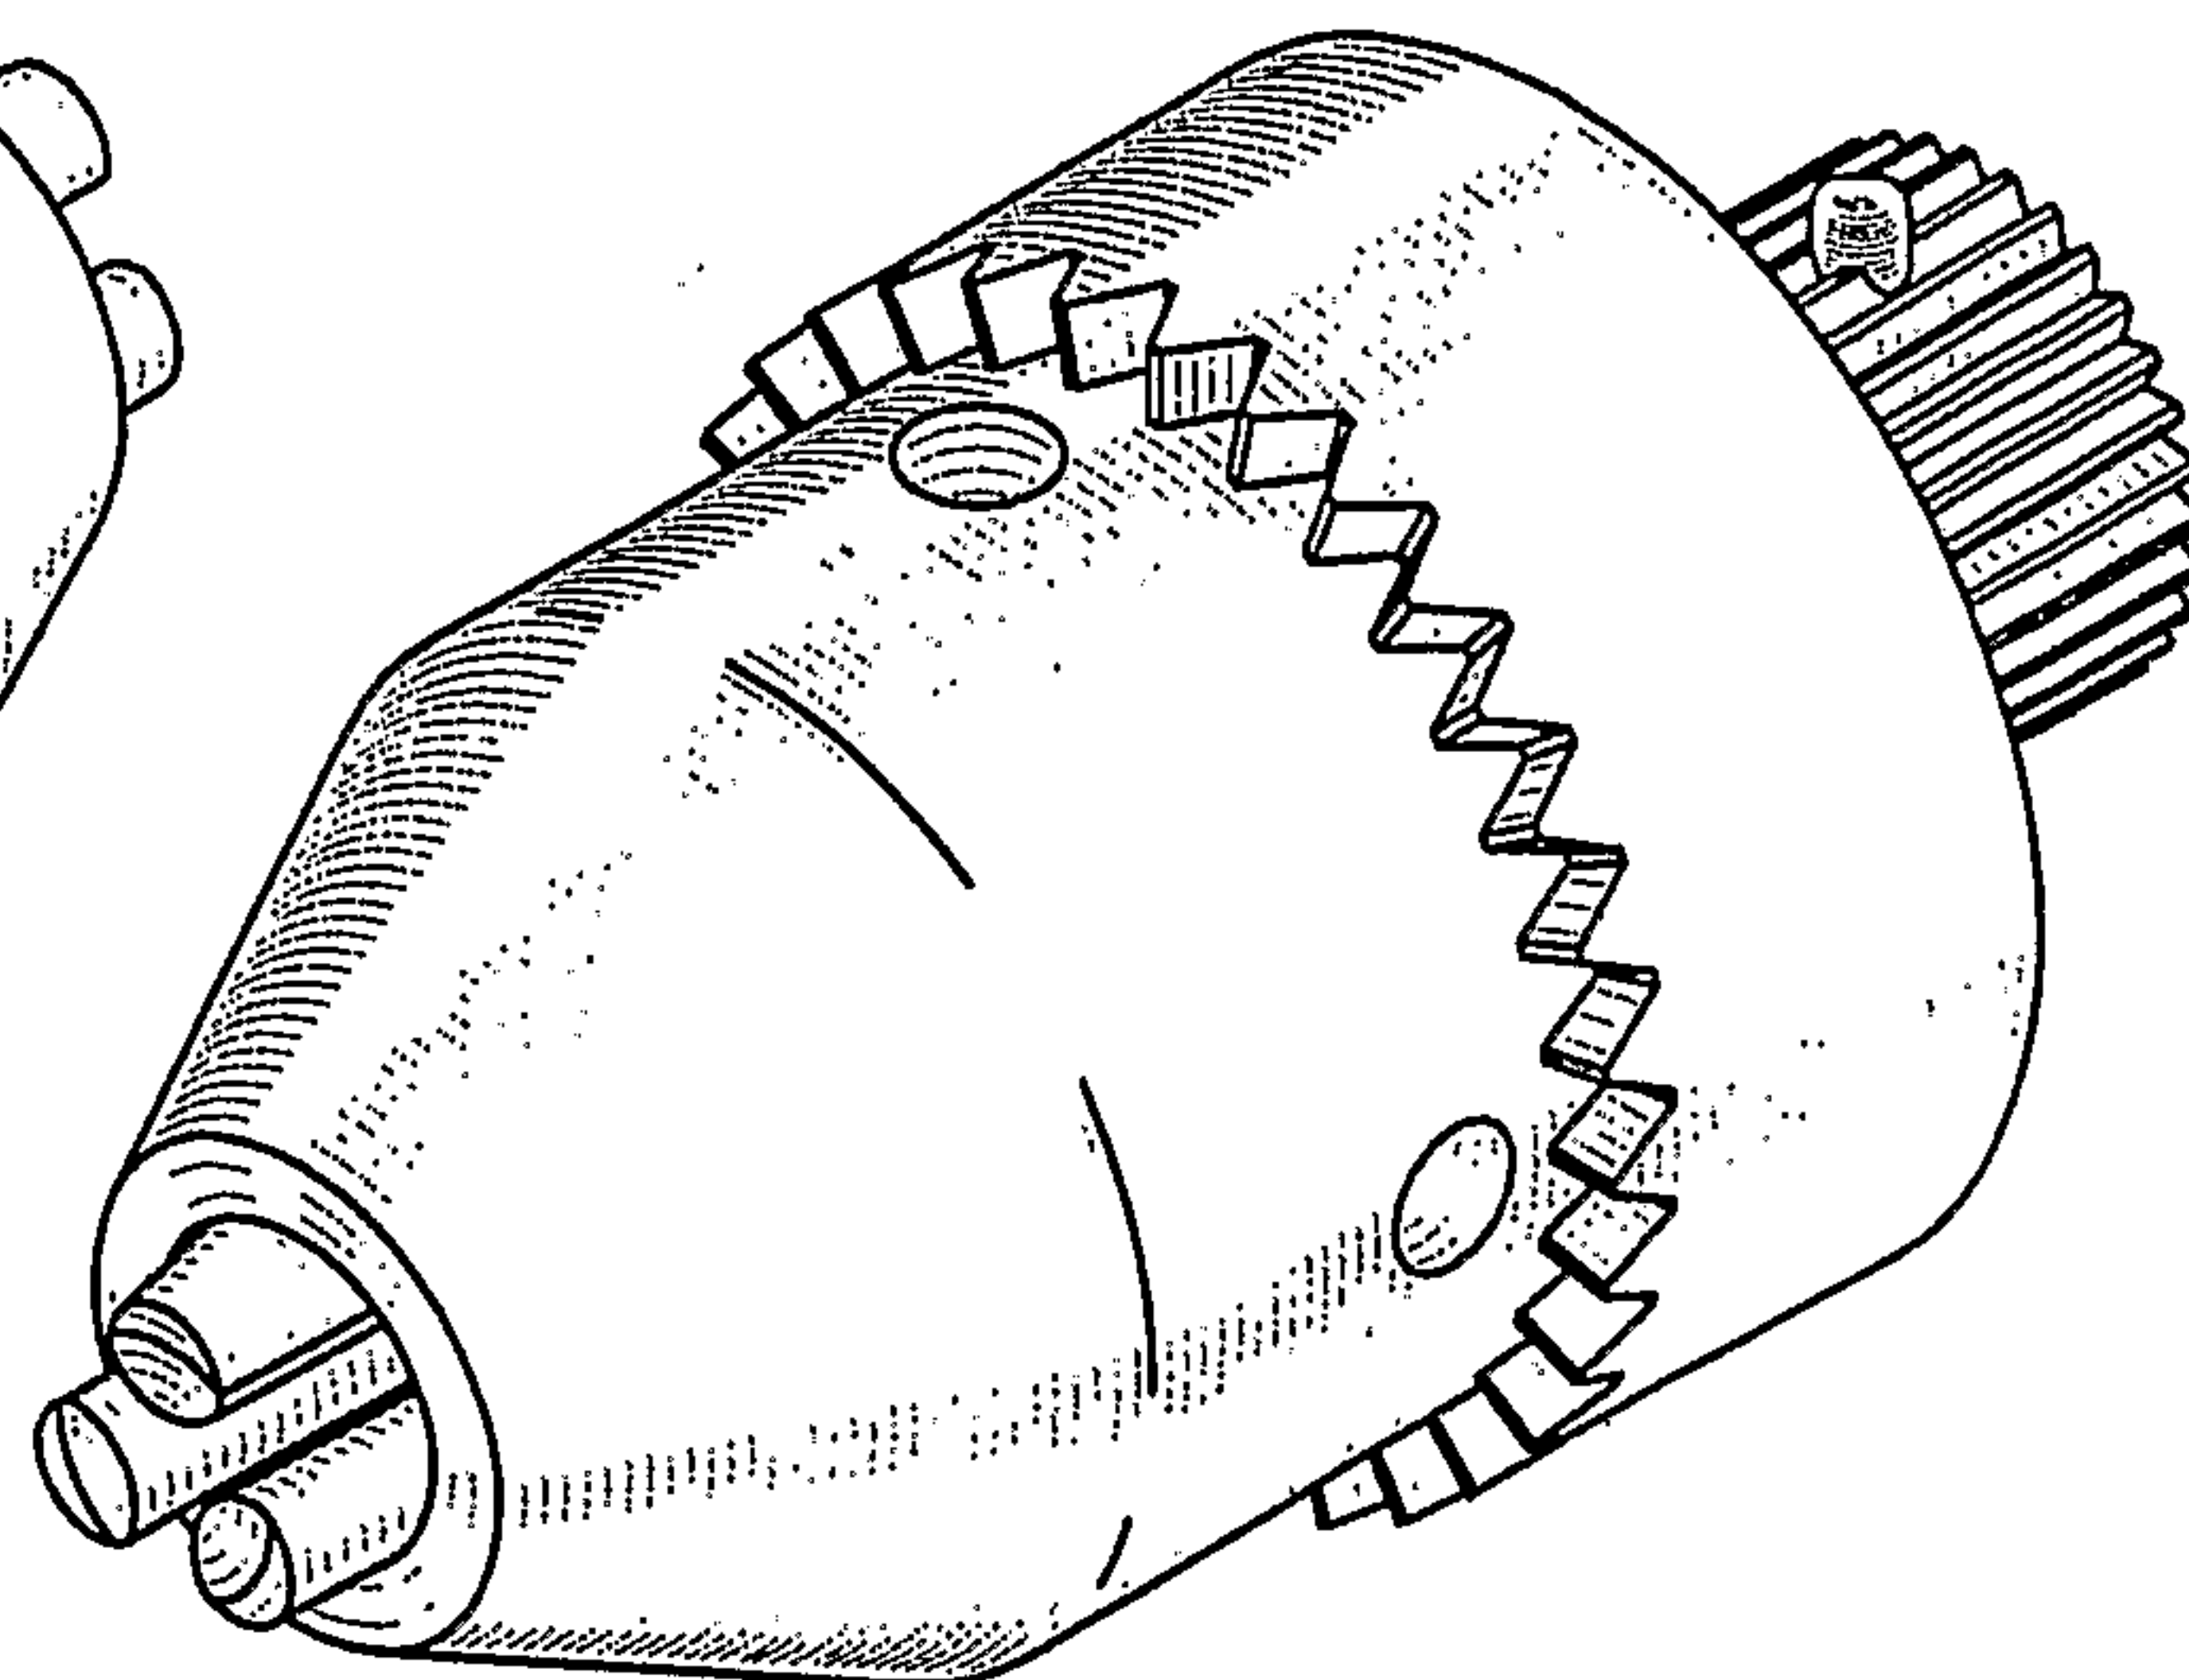

110

figure 8B

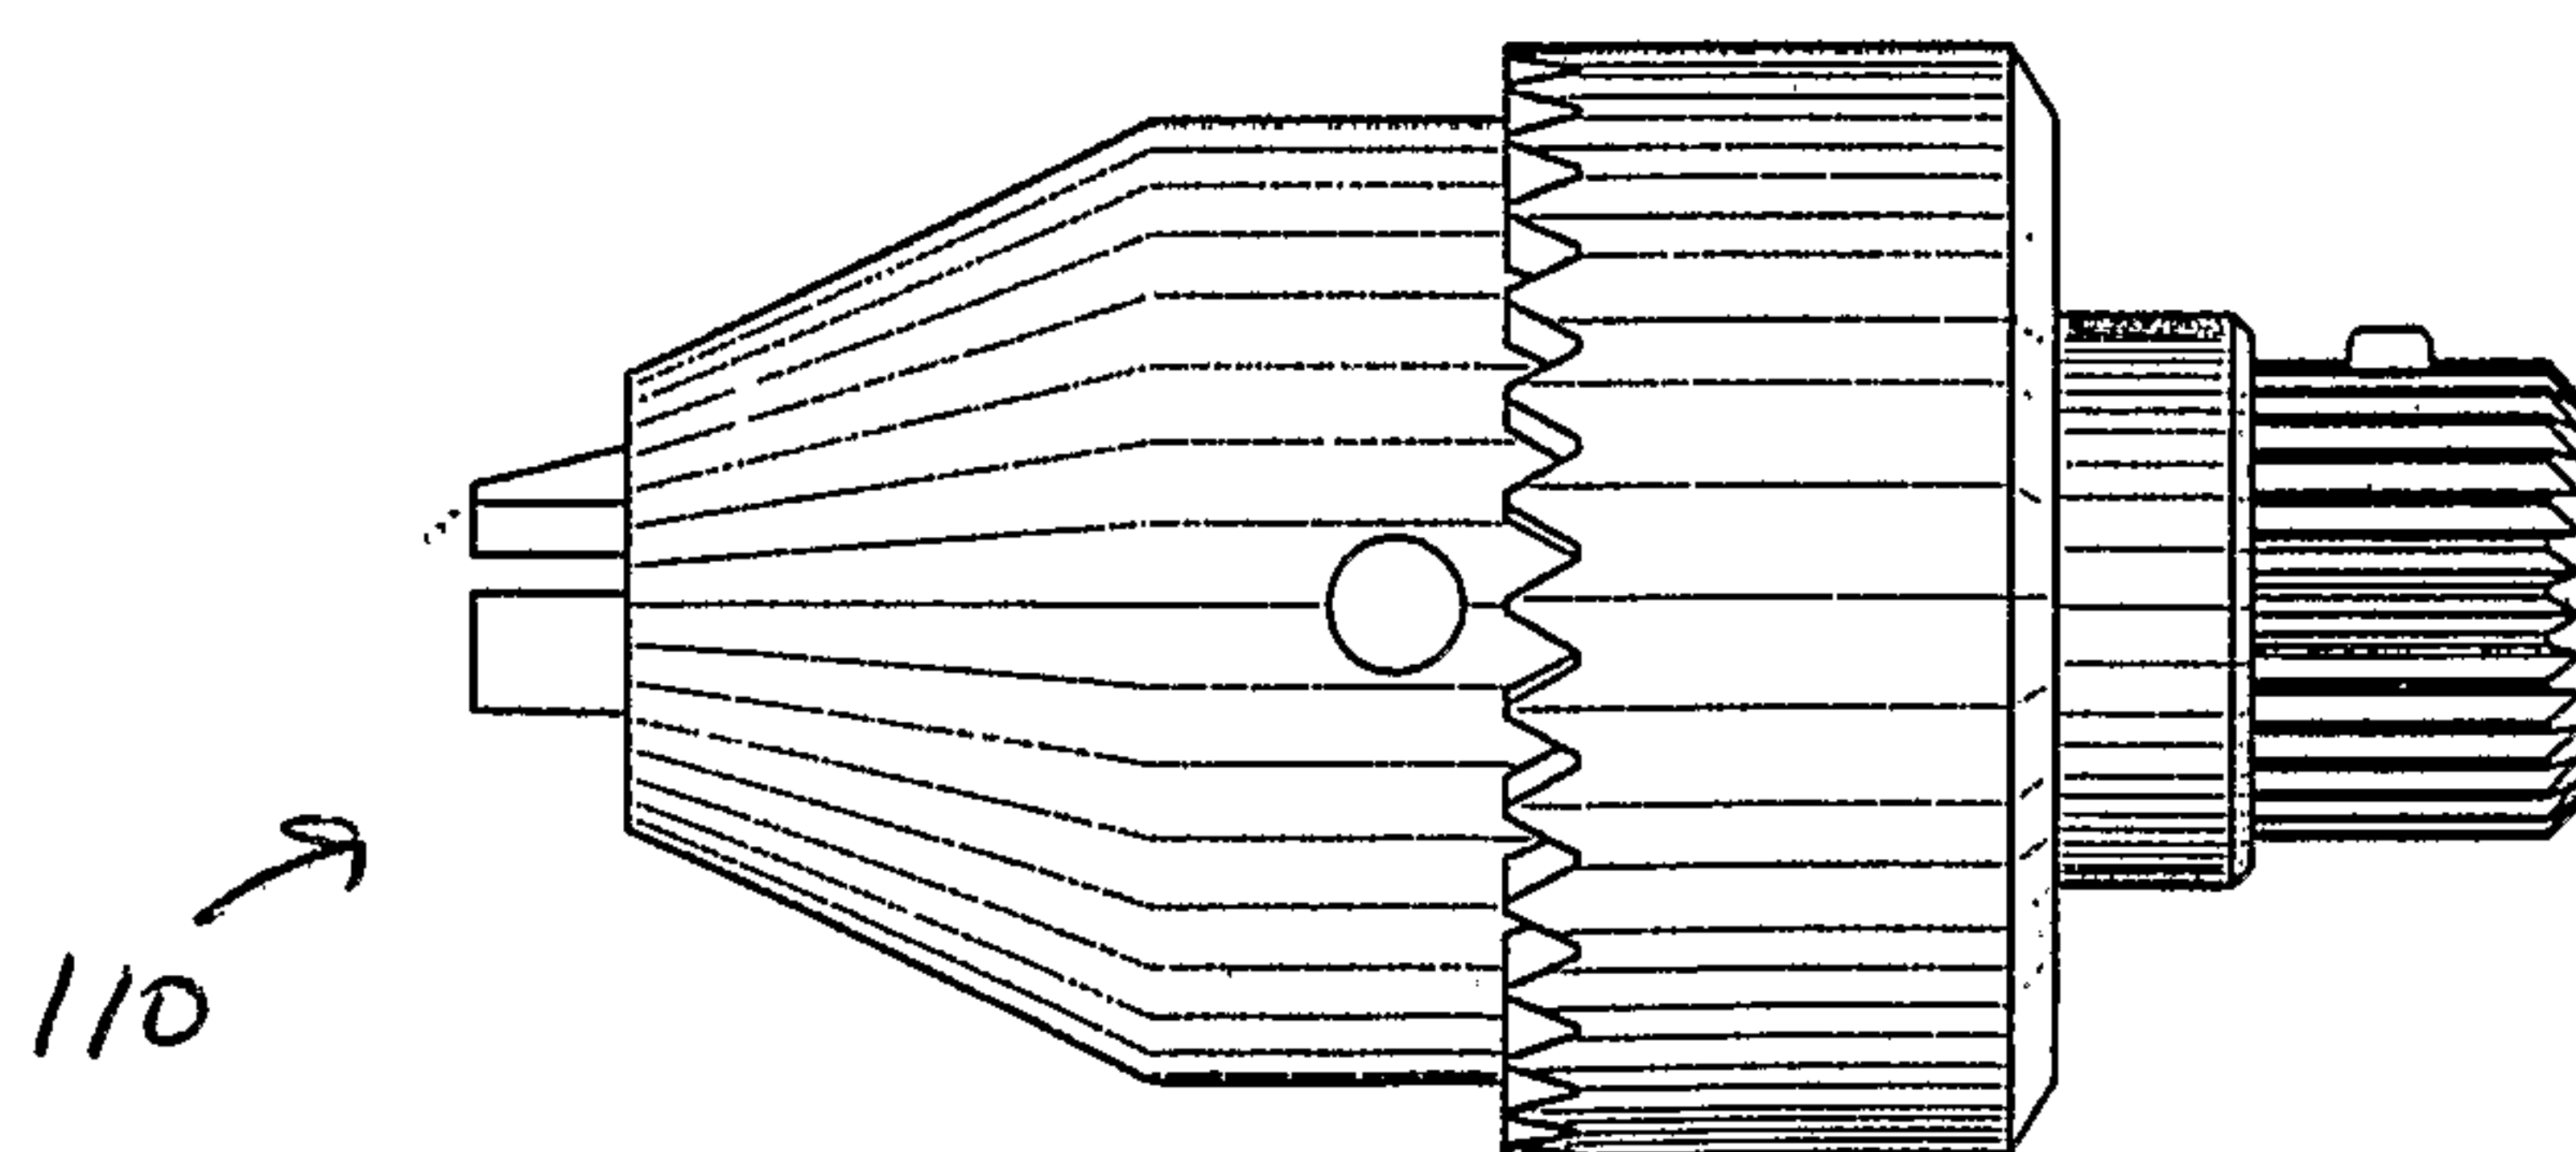


figure 8C

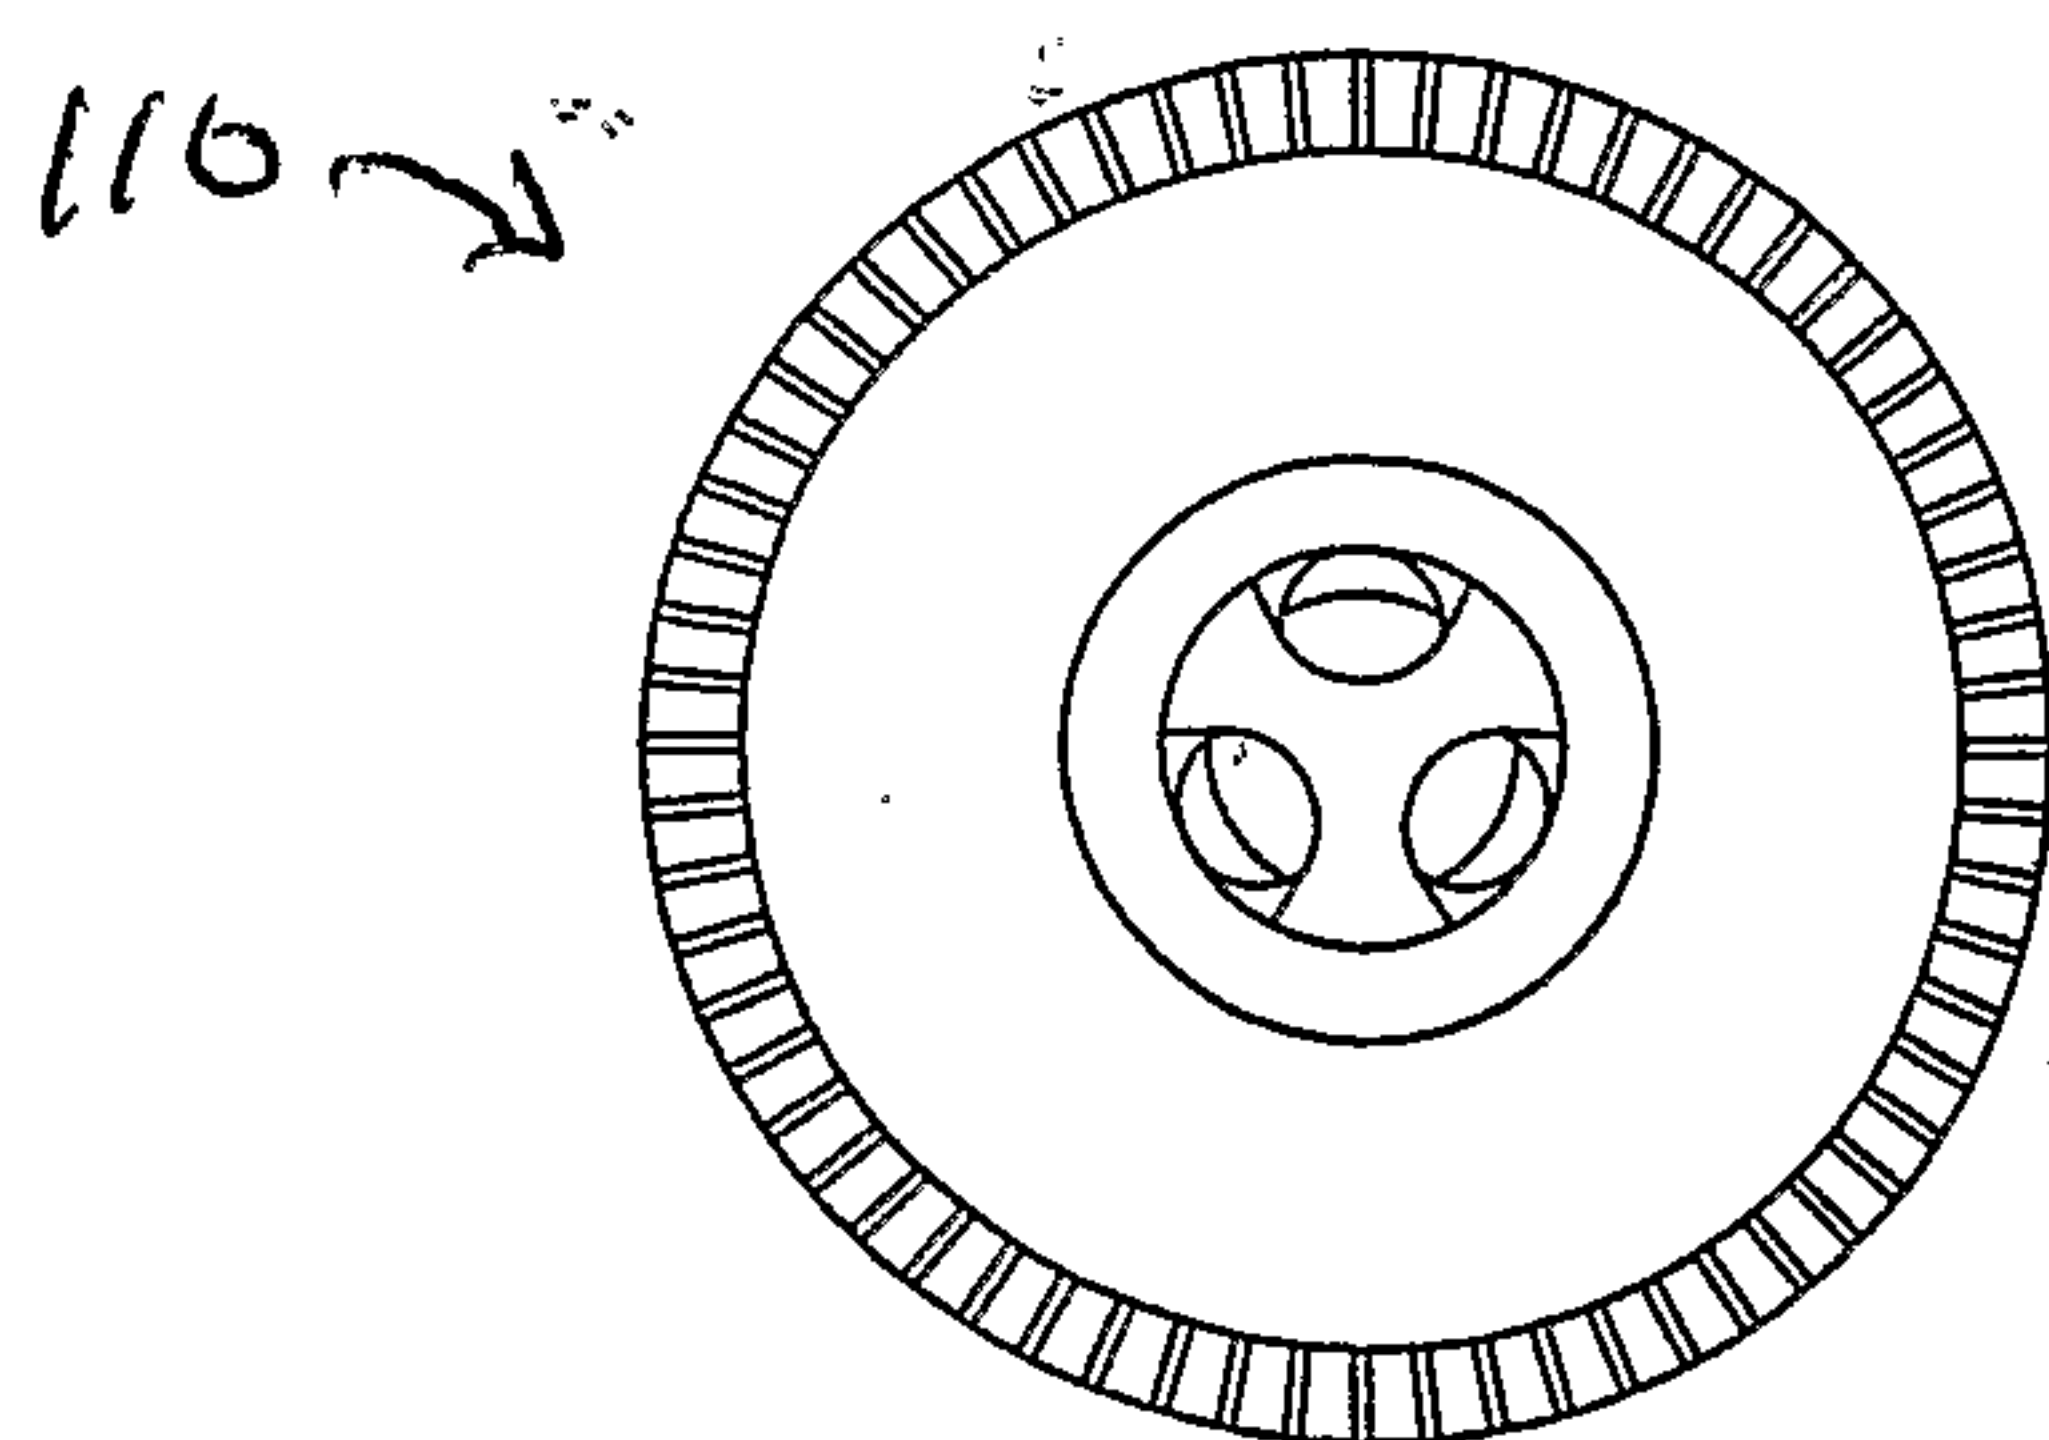


figure 8D

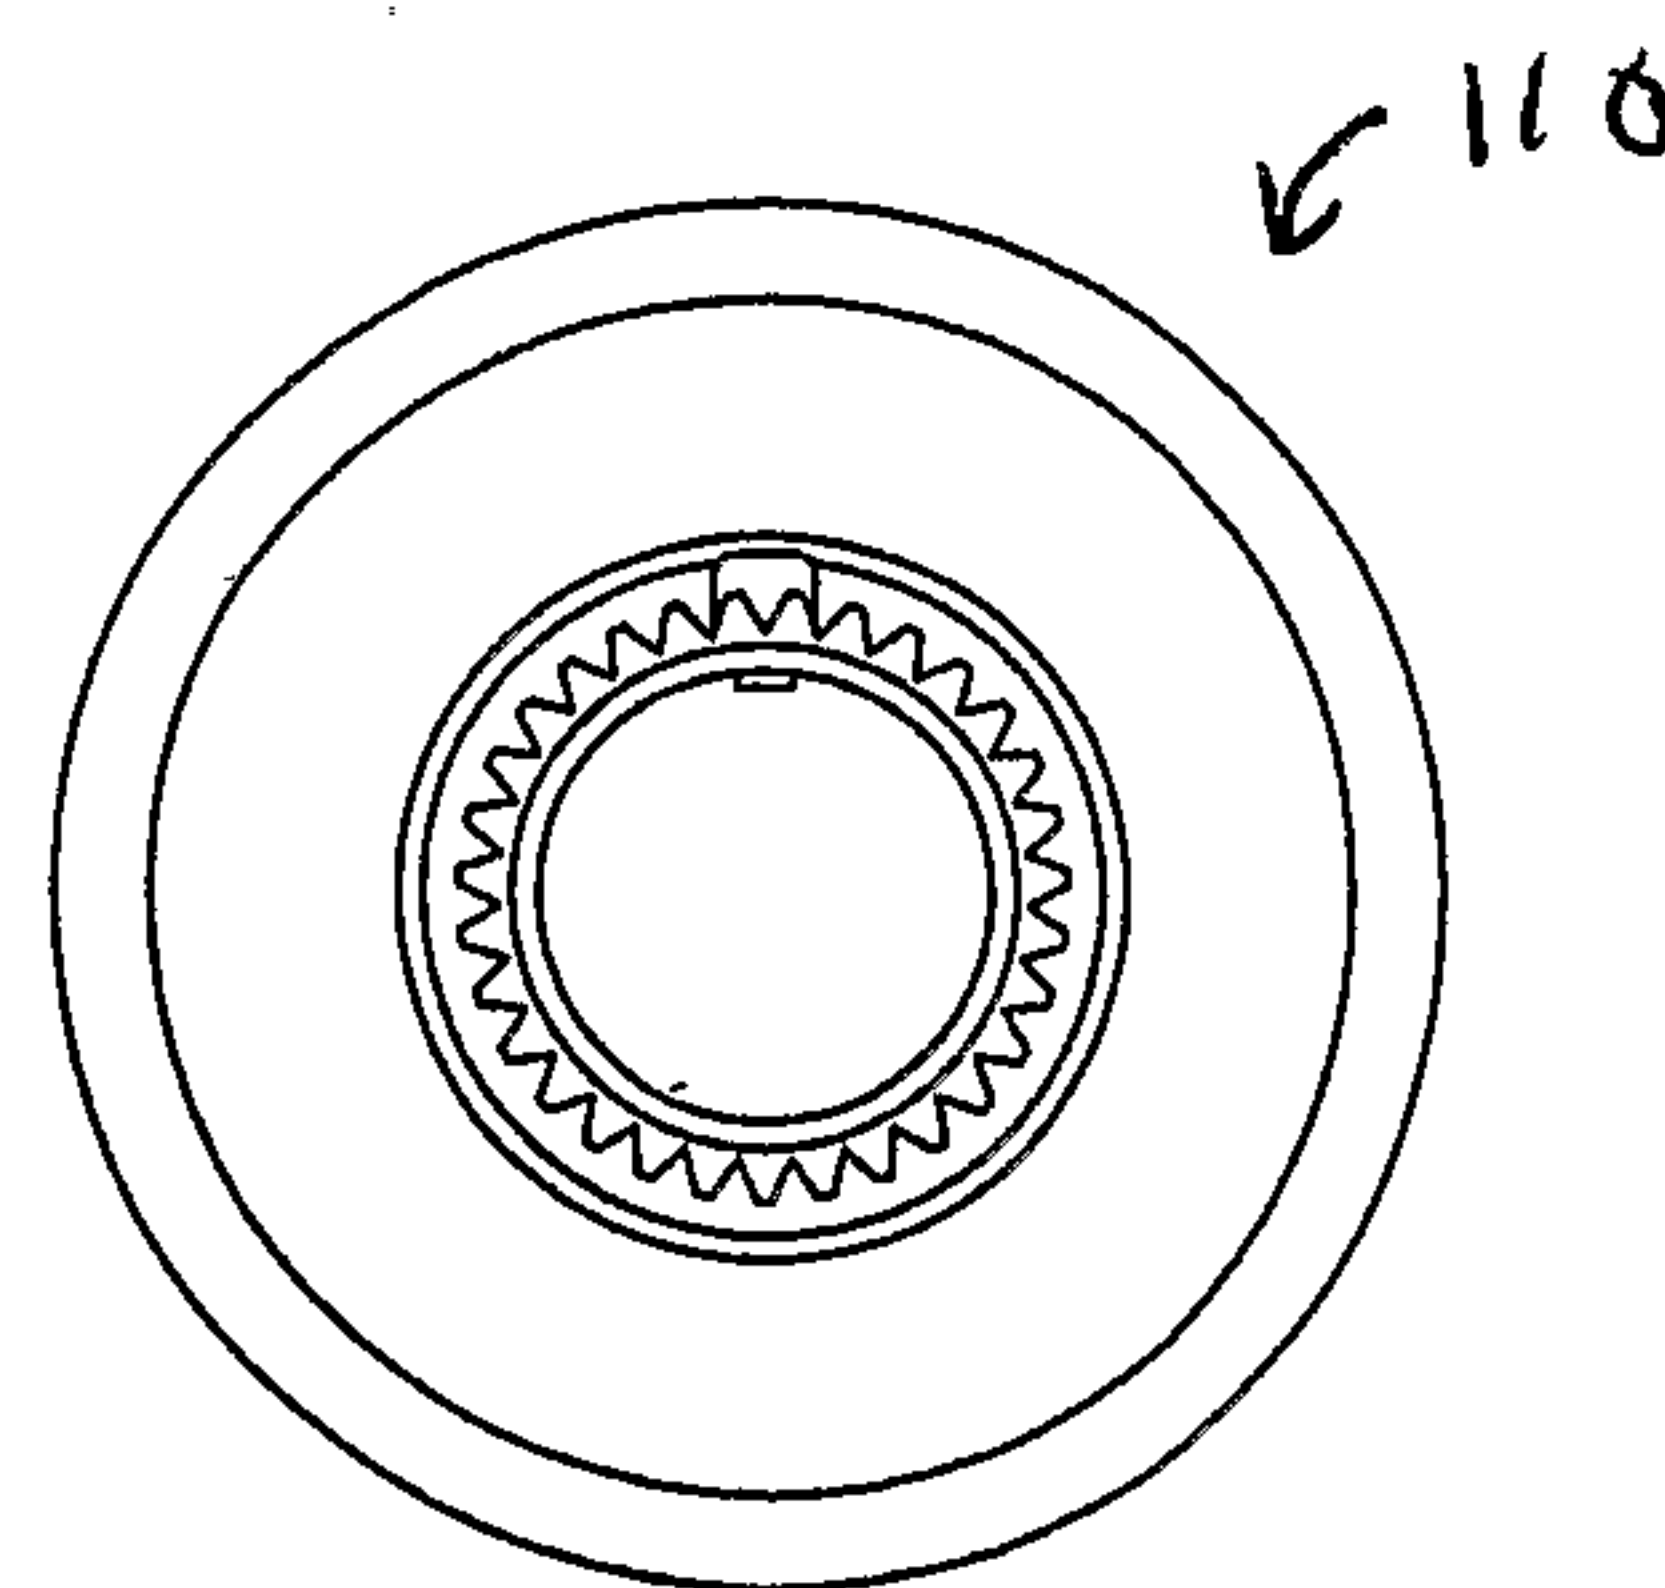


figure 8E

9/9

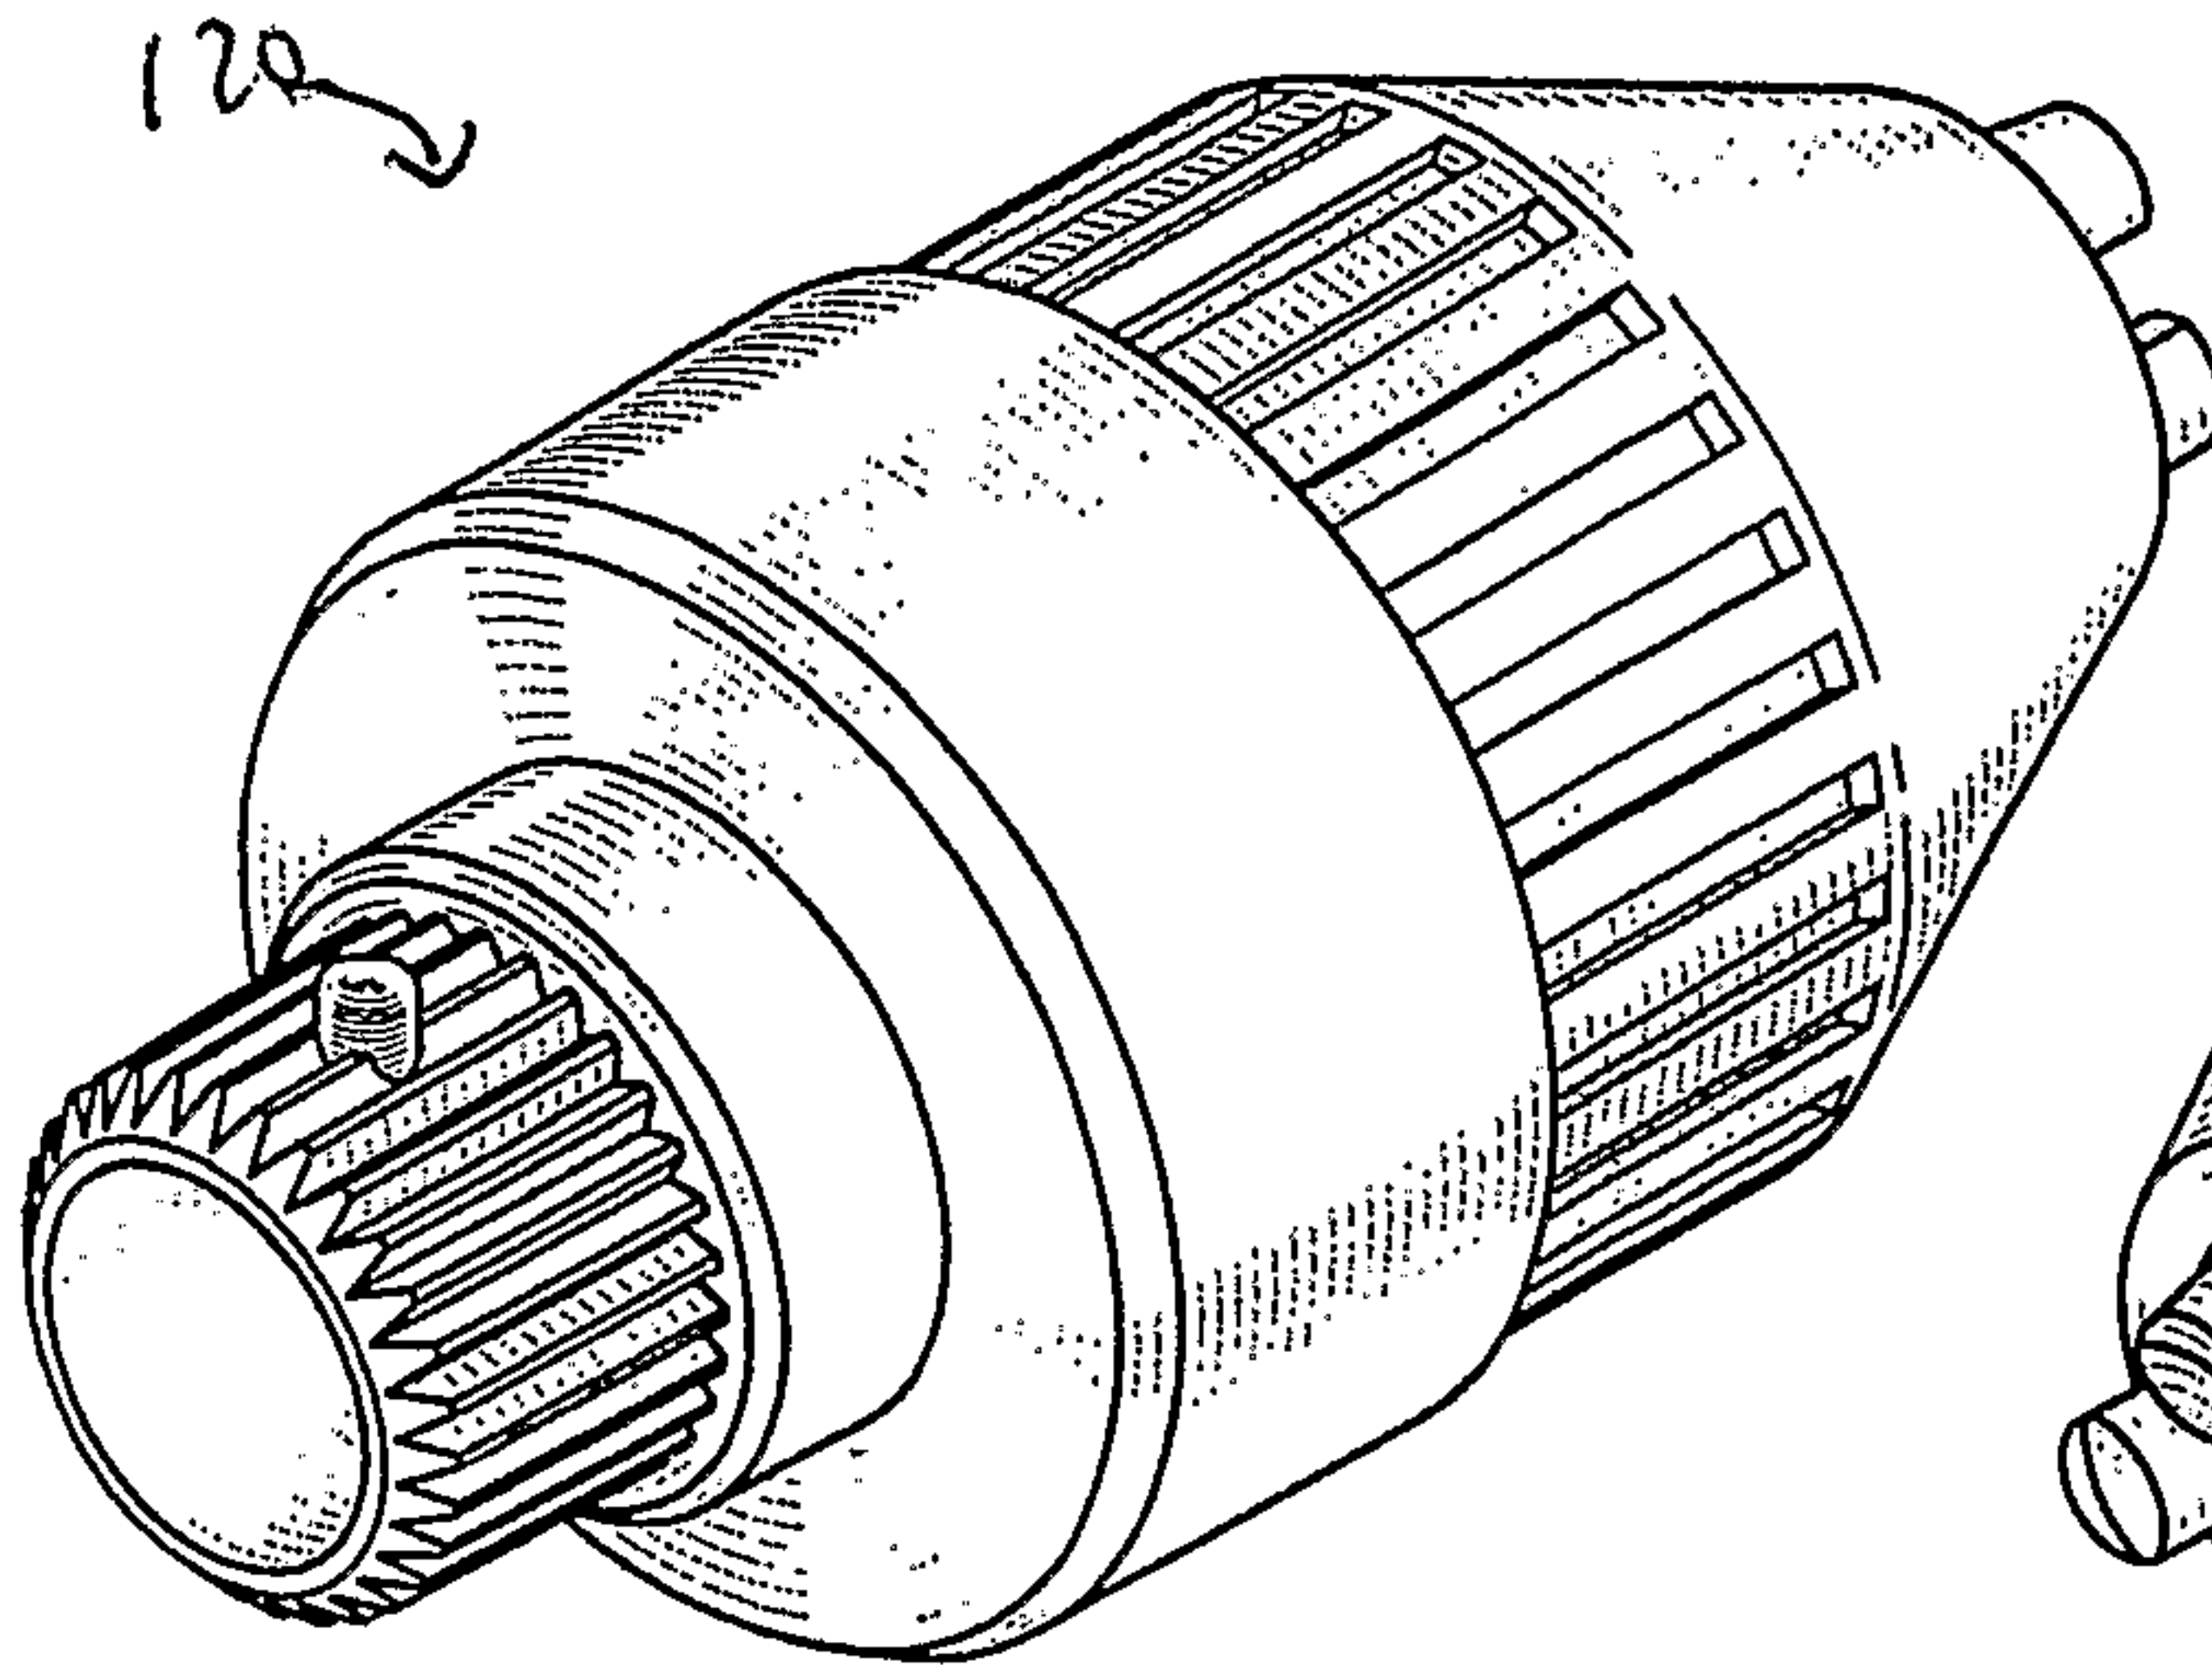


figure 9A

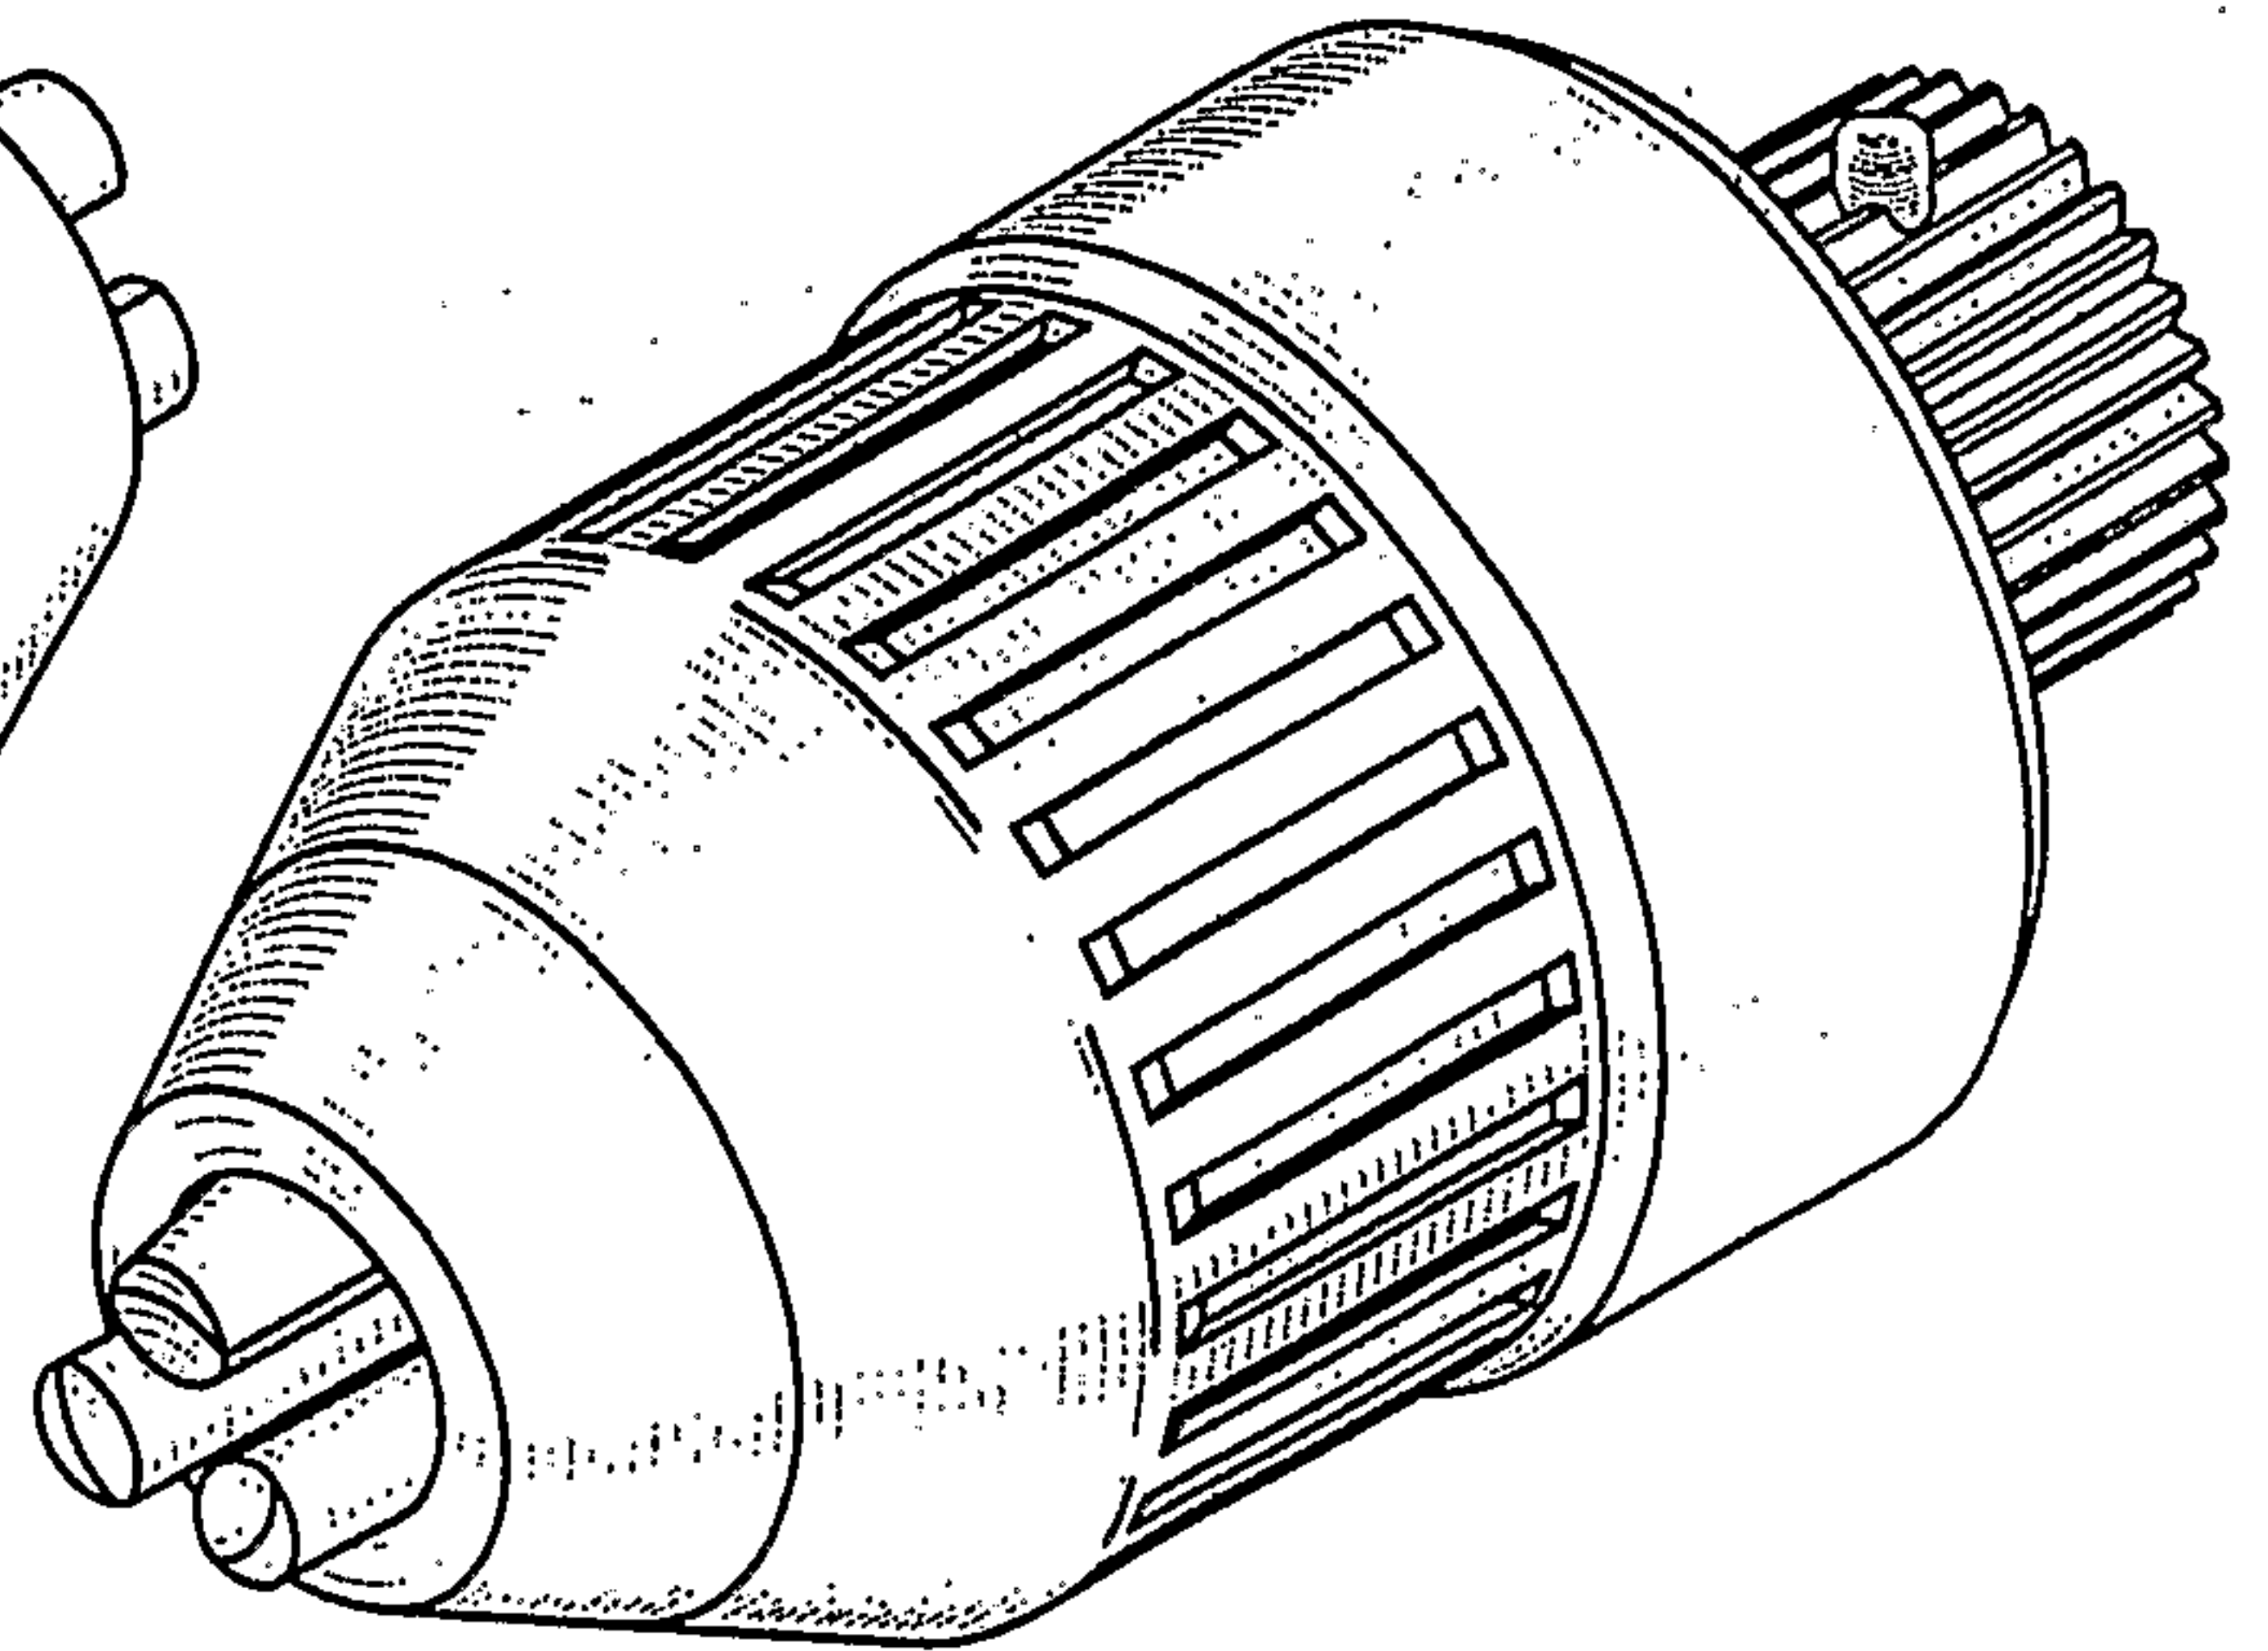


figure 9B

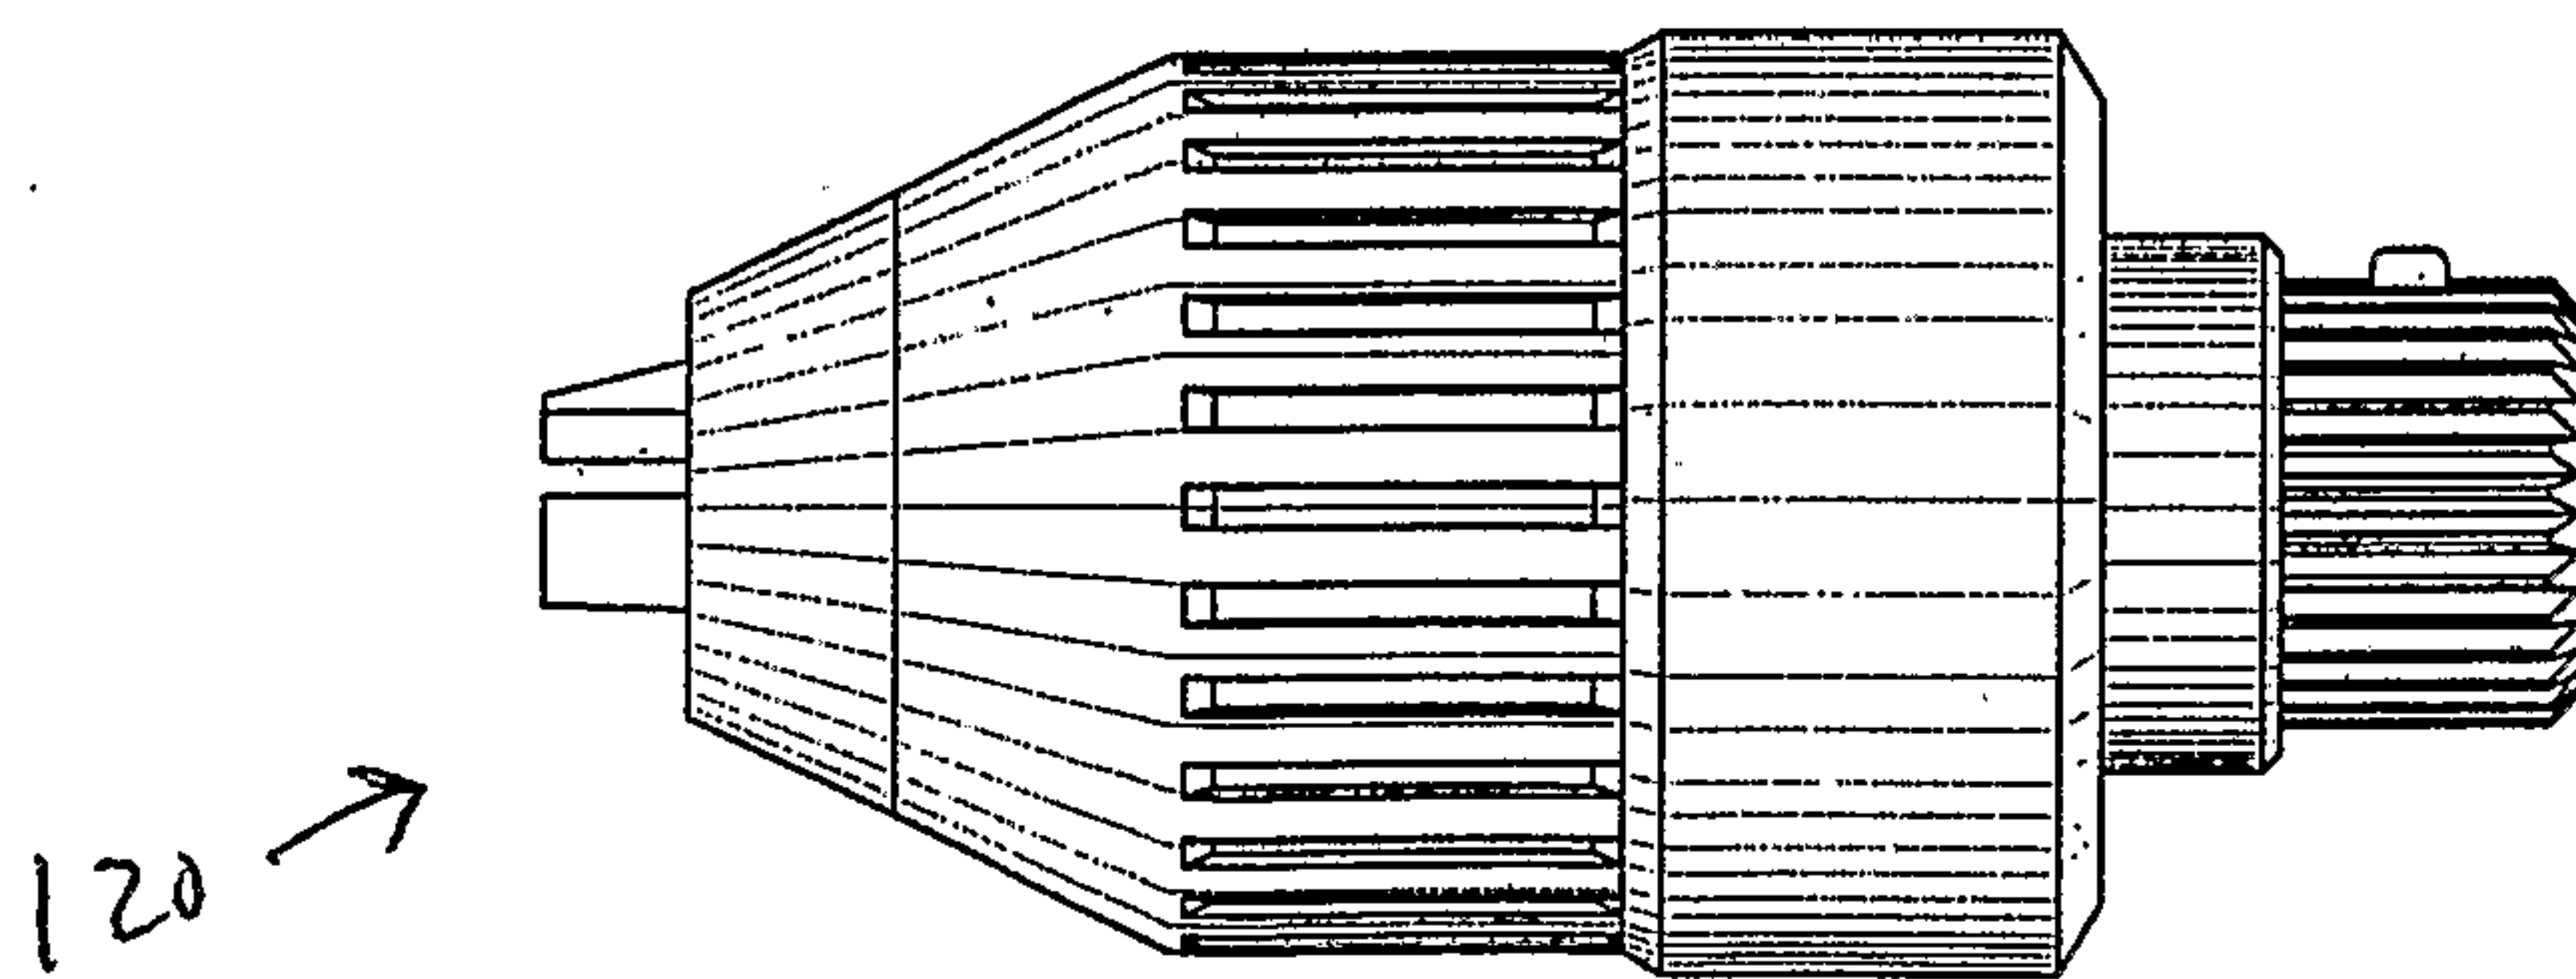


figure 9C

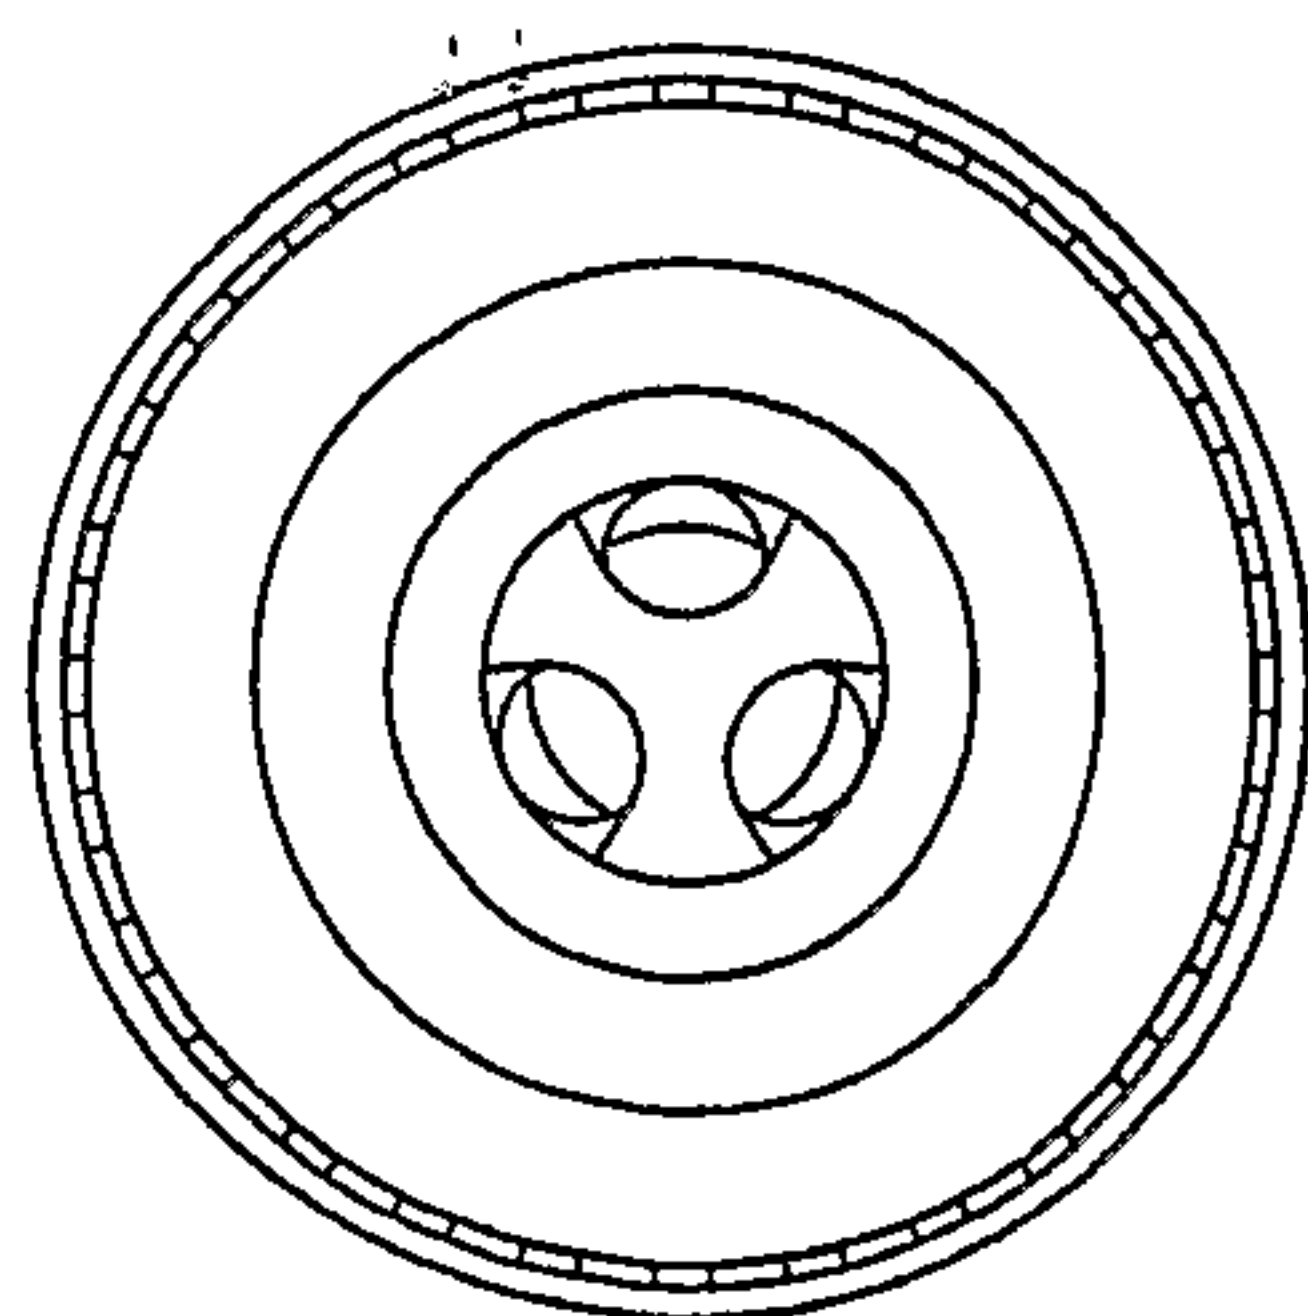


figure 9D

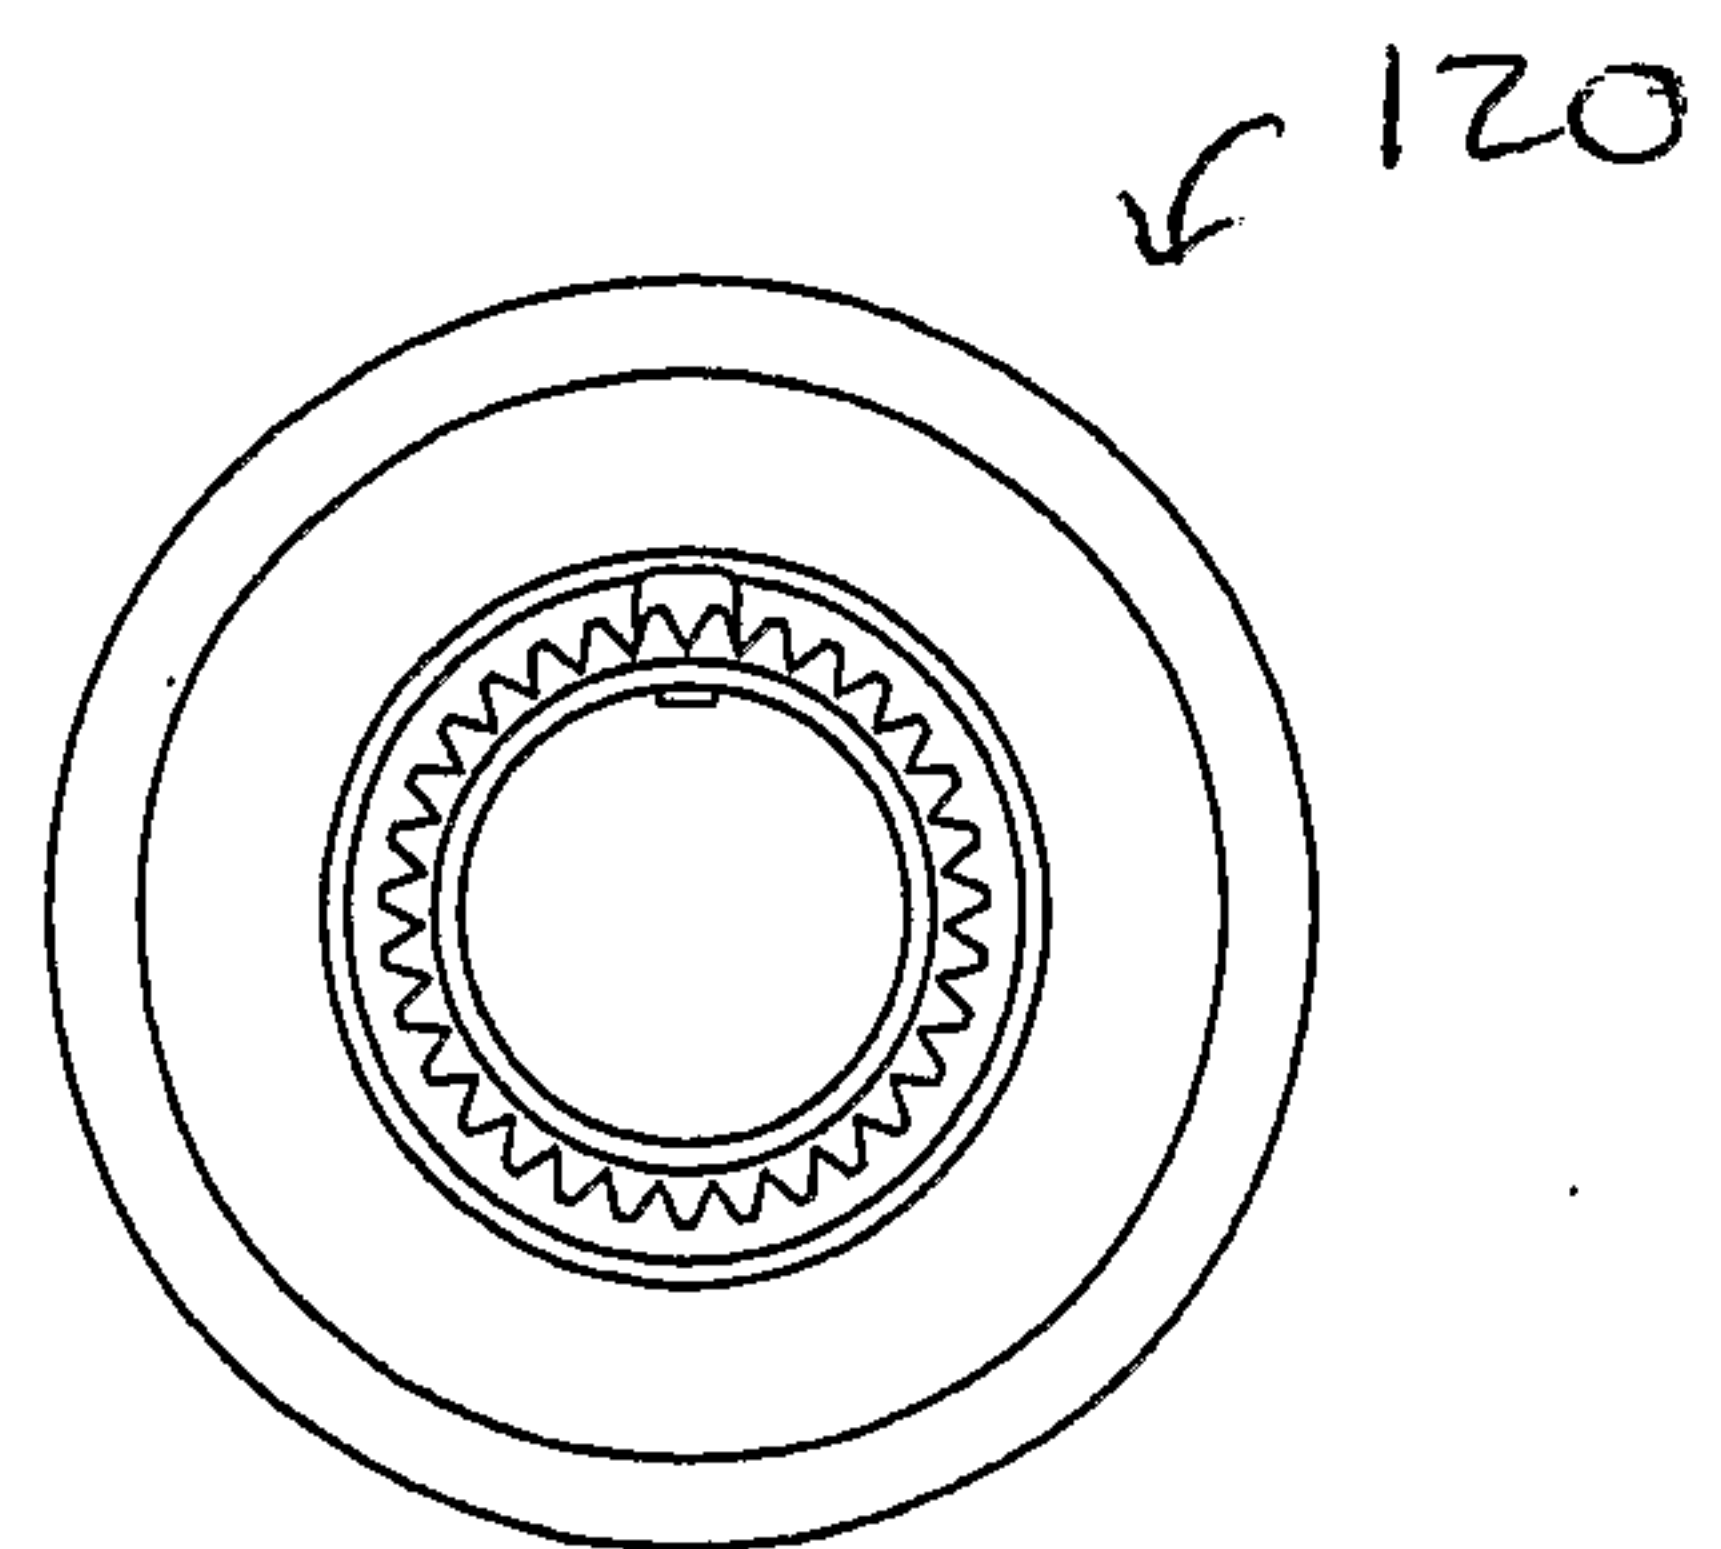


figure 9E

