



(51) International Patent Classification:

G06T 7/20 (2006.01) *A61B 3/113* (2006.01)
A61B 5/11 (2006.01)

(21) International Application Number:

PCT/US2013/030441

(22) International Filing Date:

12 March 2013 (12.03.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/675,481 25 July 2012 (25.07.2012) US

(71) Applicant: MASSACHUSETTS INSTITUTE OF TECHNOLOGY [US/US]; 77 Massachusetts Avenue, Cambridge, MA 02139 (US).

(72) Inventors: RAJAN, Nandini; 5 Smith Hill Road, Lincoln, MA 01773 (US). SIEGEL, Andrew M.; 7 Crawford Street, Arlington, Massachusetts 02474 (US).

(74) Agents: SOLOMON, Mark, B. et al.; Hamilton, Brook, Smith & Reynolds, P.C., 530 Virginia Rd, P.O. Box 9133, Concord, MA 01742-9133 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: TEMPORAL STRUCTURED-ILLUMINATION MOTION-DETECTION SYSTEM

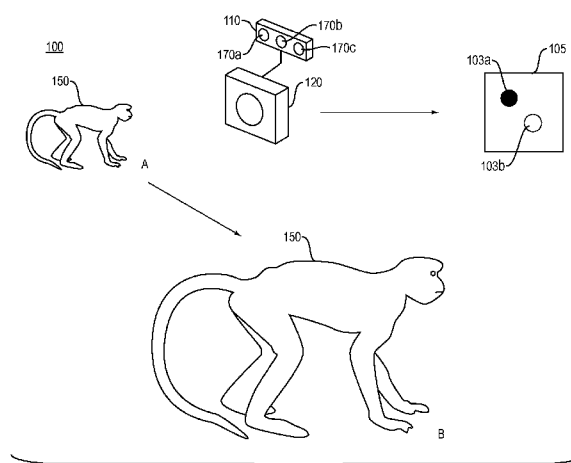


FIG. 1A

(57) Abstract: The present invention provides devices and methods for detecting and tracking fast-moving-object. In one application, the present invention can be employed to detect and track fast eye movements (saccades). An example device of the present invention tracks a moving object by generating, within a single frame of a detector (e.g., a video camera) two or more images of the moving object. The images are generated by illuminating the moving objects with sequentially activated light sources (e.g. sequentially strobed light-emitting diodes). The rate at which the light sources are sequentially activated exceeds the frame rate of the detector, resulting in generating multiple images of the moving object within a single frame of the detector. The devices and methods described herein, including a saccadometry system, can utilize off-the-shelf components and does not require expensive high-frame-rate video equipment. These devices and methods can be used to track a moving object with a temporal resolution far greater than that normally achievable with standard 15fps to 30fps frame-rate imagers.

- 1 -

TEMPORAL STRUCTURED-ILLUMINATION MOTION-DETECTION SYSTEM

RELATED APPLICATION(S)

This application claims the benefit of U.S. Provisional Application No.
5 61/675,481, filed on July 25, 2012. The entire teachings of the above application(s)
are incorporated herein by reference.

GOVERNMENT SUPPORT

This invention was made with government support under MIT Lincoln
Laboratory Allocated Biomedical Program IR40-012 awarded by the United States
10 Air Force. The government has certain rights in the invention.

BACKGROUND OF THE INVENTION

Numerous technologies and processes require tracking rapidly moving
objects. An example of such application is saccadometry, tracking and measuring
rapid eye movements. Saccadometry is important, in particular, as a tool for
15 monitoring health conditions that influence the saccadic motion of the eyes.
Saccadometry requires temporal sampling of eye position at rates of 300Hz or
greater in order to detect these rapid changes in gaze.

Traditionally, saccadometry relies on fast-framing imagers of some type to
solve this temporal sampling rate problem. Existing eye tracker systems acquire
20 high format, high speed video (500 – 1500 fps), some utilizing IR light reflection
from the pupil. They tend to be expensive (on the order of \$45,000 USD and higher
at today's prices), cumbersome (due to head-mounts/restraints and accompanying
hardware), and have large data storage requirements making it unlikely to be
deployed in the field. Saccadometers are typically less expensive (\$20,000 – 35,000
25 USD), but can record only horizontal eye movements, and require both IR and laser
sources. In addition, existing saccadometers provide only an average cyclopean

position of the two eyes in the horizontal plane. These are specialized systems used for medical research and diagnostics. Sophisticated tracking software is required to extract saccade information from full frame imagery.

SUMMARY OF THE INVENTION

5 An embodiment of the present invention provides for a fast-moving-object detection and tracking system, including a saccadometry system that can utilize off-the-shelf components and does not require high-frame-rate video equipment.

 Accordingly, one example embodiment of the present invention is a device that comprises a detector, a focusing element, and an illumination source. The
10 detector is configured to capture frames according to a frame acquisition time. The illumination source is configured, in cooperation with the focusing element and the detector, to generate at least first and second images of the illumination source on the detector within a given frame. During the operation of the device, the first image and the second image are generated in a temporal sequence and form a spatial
15 sequence on the focal plane of the detector. The first and the second images are spatially separated from each other on the focal plane of the detector by at least one pixel. The illumination source has a time delay between generating the first image and the second image. The time delay is less than or equal to the frame acquisition time of the detector.

20 Another example embodiment of the present invention is a method of detecting relative motion of an object and an illumination source. A position tag and a time tag are assigned to representation of each of at least three spatially distinct images of the illumination source captured in a spatial sequence and a temporal sequence in a first frame. The corresponding position tags and time tags are
25 compared to each other and to reference position tags and reference time tags. Relative motion of the object and the illumination source is then detected based on the comparing.

 In another example embodiment of the present invention is a method of detecting saccades in a subject. At least a first image and a second image of a
30 reflection of an illumination source in at least one eye of the subject are generated by the illumination source in cooperation with a focusing element. The first and second images are generated in a temporal sequence and are disposed on a focal plane of a

detector in a spatial sequence. The detector has a frame acquisition time, the illumination source has a time delay between generating the first image and the second image, and the first image and the second image are spatially separated from each other on the focal plane of the detector by at least one pixel. The time delay of the illuminating source is less than or equal to the frame acquisition time of the detector.

Using the detector, the first and the second images are detected so that the first and the second images are detected within a given frame. The motion of the at least one eye is determined based on the spatial sequence and the temporal sequence of the first image and the second image.

Another example embodiment of the present invention is a method of detecting saccades in a subject. A position tag and a time tag are assigned to representations of each of at least three spatially distinct images of a reflection of an illumination source from an eye of the subject captured in a spatial sequence and a temporal sequence in a first frame of a detector. Corresponding position tags and time tags are compared to each other and to reference position tags and reference time tags. Saccades in the subject are detected based on the comparing.

The devices and methods described herein provide a number of advantages over the existing systems. For example, the methods and devices described herein can be constructed by using standard off-the-shelf components, such as LEDs, and standard frame-rate CCD or CMOS imagers. These devices and methods can be used to monitor the saccadic motion of the eye (or of any other reflecting surface, for example, a convex reflecting surface) with a temporal resolution far greater than that normally achievable with standard 15fps to 30fps frame-rate imagers. For example, if ten LEDs are used together with a 30fps imager, then the temporal sampling of saccadic motion using the methods and devices described herein can approach 300Hz (*i.e.* ten temporal samples per image frame).

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing will be apparent from the following more particular description of example embodiments of the invention, as illustrated in the accompanying drawings in which like reference characters refer to the same parts

throughout the different views. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating embodiments of the present invention.

FIG. 1A is a schematic diagram illustrating the use of an example device of the present invention to detect a moving object.

5 FIG. 1B is a schematic diagram illustrating an example of a device described herein.

FIG. 2A and FIG. 2B are schematic diagram illustrating generation of images on a focal plane of a detector employed by devices described herein.

10 FIG. 2C is a flow diagram further illustrating the operation of an example method of the present invention.

FIG. 3 is an illustration of a hand-held example of a device of the present invention that includes strobed light sources and a personal digital assistant (PDA) or cell phone containing a standard CCD or CMOS imager with a recording capability.

15 FIG. 4 is an illustration of an example embodiment of a device described herein.

FIG. 5A and FIG. 5B are photographs showing raw input image and a processed image of the reflections of strobed light emitters from a human eye. The pattern indicates a stationary eye.

20 FIG. 6 is a series of photographs showing reflection of the strobed light emitters from a human eye during the eye movement.

FIGs. 7A-7C are the photographs of strobed emitters reflecting from a human eye, representing raw input data (7A) and partially (7B) and fully processed image (7C). These photographs illustrate how the deviation from a linear pattern of reflection was used to detect eye saccades.

25 FIG. 8 is a plot showing the results of a saccade measurement using the methods and devices described herein. The plot is an image deviation from a reference position (in pixels) as a function of time.

30 FIG. 9 is a photograph of the reflection of strobed light emitters from a human eye taken with hand-held iPhone 2.

DETAILED DESCRIPTION OF THE INVENTION

A description of example embodiments of the invention follows.

An example embodiment of the present invention is device 100 shown in FIG. 1A. Device 100 includes detector 120 that captures at least a first and a second images 103a and 103b of object 150 within a single frame 105. Device 100 includes
5 illumination source 110 configured to generate at least the first image 103a and the second image 103b.

Referring to FIG. 1B, device 100 includes illumination source 110, detector 120, and focusing element 130. Detector 120 is configured to capture frames according to a frame acquisition time. Illumination source 110 is configured, in
10 cooperation with focusing element 130 and detector 120, to generate at least first and second images of illumination source 110 on the detector 120 within a given frame. Such images are shown in FIG. 2A as images 204 and 206 within frame 202 and in FIG. 2B as images 224 and 226 in frame 222.

Referring to FIG. 2A, the first image 204 and the second image 206 form a
15 spatial sequence and are spatially separated from each other on focal plane 200 of detector 120 by at least one pixel 208.

Because illumination source 110 has a time delay between generating the first image and the second image, the first and the second images 204 and 206 are generated in a temporal sequence. The time delay is less than or equal to the frame
20 acquisition time of detector 120.

In one example, device 100 further includes processing module 140, configured to determine motion of object 150 relative to illumination source 110 based on the spatial sequence and the temporal sequence of the first image (204,
224) and the second image (206, 226).

25 In one example, device 100 further including transmitter 160 configured to transmit at least the first image (204, 224) and the second image (206, 226) to a remote storage site (not shown).

In certain example embodiments, illumination source 110 can be located on object 150. In other example embodiments of device 100 shown in FIG. 1,
30 illumination source 110 can be configured to emit electromagnetic energy at the object causing the electromagnetic energy to reflect, refract or diffract from object 150 to detector 120.

In one example, detector 120, focusing element 130, and illumination source 110 can be integrated in a handheld device.

In certain example embodiments of device 100, illumination source 110 is further configured, in cooperation with focusing element 130 and detector 120, to
5 generate a third image (210 in FIG. 2A, 230 in FIG. 2B) of illumination source 110 on detector 120 within the given frame (frame 202 in FIG. 2A, frame 222 in FIG. 2B). The first image, second image, and third image each being spatially separated from each other on the focal plane of the detector by at least one pixel, as shown in FIG. 2(A). Referring to FIG. 2A, in this example, illumination source 110 has a first
10 time delay between generating the first image 204 and the second image 206, and a second time delay between generating the second image 206 and the third image 210. The first time delay and the second time delay are each less than or equal to the frame acquisition time of the detector.

In certain example embodiments, illumination source 110 includes at least
15 two light emitters 170a, 170b, and 170c, shown in FIG. 1. For example, light emitters 170a, 170b, and 170c can form an array of sequentially activated light emitters. Light emitters 170a, 170b, and 170c can be activated in a sequence that is free-running, synchronous, or plesiochronous with respect to the detector.

As used herein, the terms “free-running,” “synchronous,” and
20 “plesiochronous” refer to interrelationship between two or more cyclic events. “Free-running” is when both events (for example, the LED repetition rate and the camera frame rate) are completely independent of each other. Their rates could be very different from each other or very close to each other – but neither one is influenced by the other. “Synchronous” is when both events are coupled such that
25 they both run at exactly the same rate, and with the same time relationship to each other. For example, the detector can be used to control the LED repetition rate such that each LED turns on and off at a specific time in each frame. “Plesiochronous” is when both events run at rates which are very close to, but not exactly the same as, each other. For example, the LED repetition rate can be very close to the detector
30 frame rate.

In one example embodiment, illumination source 110 includes a single spatially modulated light emitter 170a. In this example, focusing element 130 can

be an optical component within an optical train (not shown), such that light emitter 170a is spatially modulated by the optical train. In another example, light emitter 170a can be movable.

Another example of the present invention is a method of detecting relative motion of an object and an illumination source. Referring to FIG. 2A, to detect the relative motion, position tags (x_1, y_1) , (x_2, y_2) , and (x_3, y_3) and time tags (t_1) , (t_2) , and (t_3) are assigned to each of at least three spatially distinct images 204, 206, and 210, respectively, of the illumination source captured in a spatial sequence and a temporal sequence in a first frame 202 of focal plane 200 of detector 120. The assigned tags are then compared to each other as well as to reference position tags and reference time tags. As used herein, "comparing" the tag refers to numerically comparing and analyzing (a) the positional coordinates (x_i, y_i) of the captured images and the reference images, and (b) the values of time (t_i) assigned to each image. Based on this comparing, the relative motion of object 150 and illumination source 110 can be detected and measured.

In certain examples, the reference position tags and the reference time tags are based on prior knowledge of the positional sequence and the temporal sequence of the at least three images. In other examples, the reference position tags and the reference time tags are the position tags and time tags assigned to at least three images of the illumination source captured in a second frame. For example, images 204, 206, and 210 of frame 202 can serve as reference images for images 224, 226 and 230 of frame 222.

The operation of the above-described method is further explained with reference to the flow diagram depicted in FIG. 2C. The process 250 includes four operations. In operation 252, at least three images of the illumination source reflected, diffracted or refracted from an object are captured in a single frame. In operation 254, position tag and time tag to representations of each of at least three images captured in a single frame are assigned. In operation 254, corresponding assigned tags are compared to each other and to reference tags. In operation 258, the relative motion of the object and the illumination source are detected.

In certain examples, the methods described herein can be used to determine relative motion of not only object 150 of FIG. 1, but also at least one additional

object (not shown) and illumination source 110.

In other examples, the devices and methods described herein can be used to compute an object's position as a function of time and the object's velocity as the function of time. In particular, the methods and devices described herein can be
5 used to compute the object's angular velocity.

Another example embodiment of the present invention can be used to detect saccades. This example embodiment is a method of detecting saccades in a subject. In this example, referring to FIG. 1, object 150 can be an eye of a human or an animal. The devices and methods described herein can be used to detect the
10 saccades along at least two axes. In other examples, the methods and devices described herein can be used to both distinguish large saccades from small saccades, and further, to quantify saccade magnitude and duration. Small versus large saccades can be distinguished based on both positional variance as well as duration. First, the motion axis is defined as the axis normal to the line defined by the images
15 of at least two illumination sources. Next, positional variance is defined as the variance of the source image locations from their mean position along the motion axis in a single frame. Finally, saccade duration is defined as the number of frames in which the change in positional variance is greater than or equal to one pixel. Small saccades can be defined as the set of frames where positional variance per
20 frame is less than or equal to one pixel and saccade duration is less than or equal to one frame. Large saccades can be defined as the set of consecutive frames such that positional variance per frame is greater than one pixel and saccade duration is greater than or equal to two frames. These criteria can be adjusted as needed, based upon the pixel angular subtense of the image sensor. A linear measure of saccade
25 magnitude and duration is also available from the devices and methods described herein.

Either visible or infrared (IR) LEDs can be used, dependent on the spectral bandpass of the camera and the perception of the subject. The relatively low corneal irradiance minimizes distractions. No electrical connection is required between the
30 illumination source and the imaging device. Simple user-adjustable timing combined with advanced image processing methods eliminates the need for absolute

synchronization. The system requires no specialized head mount as derivable information from the imagery data allows for effective near real-time registration.

The devices and methods described herein can be employed in a number of applications.

5 For example, the devices and methods described herein can be used to capture high-speed saccade and microsaccades to assist in clinical diagnosis.

Potential clinical applications include:

- Ancillary or first phase assessment of such conditions as traumatic brain injury, concussion;
- 10 - Psychiatric disorders such as ADD, autism assessment;
- Dyslexia;
- Multiple sclerosis,
- Ocular palsies or flutters,
- Brain lesions or tumors affecting vision or eye motion,
- 15 - Sobriety assessment and compliance.

Further applications include the use of the devices and methods described herein in telemedicine. Examples include self-monitoring by the subjects with limited mobility or without accessibility to immediate medical care.

20 Further applications include the use of the devices and methods described herein in human-machine interfaces, for example, for eye tracking in video games, or for technologies enabling gestureless communication.

Further application of the devices and methods described herein is for low resolution mapping of corneal curvature via eye movement.

25 EXEMPLIFICATION

Example 1: Temporal Structured-Illumination Saccade System (TeSS)

A TeSS system was built using two hardware components: the strobed light sources and a PDA or cell phone containing a standard CCD or CMOS imager with a recording capability. One example of such a device is shown in FIG. 3. Another
30 example, used in the experiments described below, is shown in FIG. 4. The TeSS system included a software component for image processing and strobe rate tuning. The software component includes a processing module that performs robust source

image detection, identifies key eye features such as the pupil and iris to derive and estimate gaze direction, and a novel temporal deconvolution component that associates source image location with interframe time stamps. This derived per-frame spatial-time tag association, along with estimated gaze angle, is used to
5 generate a time-varying scan of eye motion at a temporal resolution greater than the native frame-capture rate of the camera.

In this example, a linear, curved, or otherwise spatially defined pattern of discrete light sources generated a light signal that reflected off of a curved corneal surface of the eye to reach the imager. A linear array of ten LEDs separated far
10 enough apart to create discrete points of light on the imager were used as an illumination source.

The LEDs were activated in a sequential, alternating, or otherwise temporally unique strobing sequence, generating a series of separate corneal reflections on the imager focal plane. In one example, a linear “1-of-n” strobe
15 sequence, similar to the approach lighting system used at airport runways, was used. The spatial pattern in combination with the temporal sequencing of the light sources was designed so that the physical locations of the illuminated points on the imager contain both temporal and spatially encoded information concerning the motion of the eye.

20 Numerical methods designed to first deconvolve the temporal information encoded in each of the discrete image frames, and then to recombine the data from a sequence of image frames to construct a spatial time course for the eye position as a function of time were used. The process of deconvolving the temporally encoded information includes identifying the source image associated with the first
25 illumination source that appears during the frame acquisition time. If the LED sequence and camera frame rate is synchronous, the first source image location is associated with the start of the LED sequence. If the LED sequence and camera rate is asynchronous or plesiochronous, the uncertain delay during camera capture and readout will lead to low intensity or missing source images. The first source image
30 location during acquisition of a single frame, and thus the start or first time tag of the temporal sequence, will then be associated with the dimmest or missing source image location. Subsequent source images are then identified in a cyclic sequence,

beginning from the first source image location, and are associated with consecutive interframe time tags.

The device shown in FIG. 4 was used to track eye movements of a human subject. During ocular motion, the temporally multiplexed LED image sequence
5 reflected from the corneal surface and appeared spatially shifted in the resultant video image frame. The rate of ocular motion was directly correlated to the location and degree of the reflected source shift. The multiplicative improvement in temporal sampling was directly related to the number of LEDs along each axis. For example, if ten discrete LEDs were used, then the effective ocular sampling rate was
10 ten times the camera frame rate.

The system consisted of a video camera running at 15 fps to image an eye undergoing motion in the presence of temporal structured illumination. A sequence of ten LED sources were positioned linearly and cycled once during each frame, providing the equivalent of 150 fps sampling of eye motion, tagged in time by the
15 LED source corneal reflectance position. FIG. 5A and FIG. 5B show the resultant output images for a stationary eye and one with multiple inter-frame saccades. Note the deviation from the almost linear pattern displayed in FIG. 5A that resulted from rapid eye movement, shown in FIG 5B. This deviation is even more pronounced during larger eye motions as shown in FIG. 6.

20 In FIG. 6, large eye movements were tracked via spline fit of the corneal reflection distribution. Timing for initiation of large eye movements was possible at effective time samples much higher than collection video rates. In Frame 4 of FIG. 6, for instance, the start time for eye movement to the subject's right occurred at approximately 0.02 seconds after the start time for acquiring the frame.

25 FIG. 7A, FIG. 7B, and FIG. 7C illustrate how the deviation from a linear pattern of reflection was used to detect eye saccades. FIG. 7A shows corneal reflection in the presence of inter-frame saccade. FIG. 7B and FIG. 7C show reflection location and offset indicating amount and timing of saccade. The dark pixel corresponded to sequence start. In this case, an inter-frame saccades began at
30 t_6 , or 0.04 seconds after frame 25 acquisition time.

FIGs. 7A through 7C demonstrate that the resultant deviation from the stationary reflectance pattern can be used to indicate inter-frame saccade time and

amplitude during a single frame acquisition time at relatively low video sample rates. FIG. 8 shows an output saccade detection product. In FIG. 8, saccade detection at 150 fps was derived from 15 fps video. Note that in Frame 25 of FIG. 8, an interframe saccades has taken place.

5 Data collected with the iPhone2 using external line lighting indicates that there was sufficient resolution in mobile devices to be able to detect saccades effectively via the pixel deviation. As shown in FIG. 9, sample data was taken with a hand-held iPhone 2, which possessed sufficient resolution and contrast.

10 While this invention has been particularly shown and described with references to example embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the scope of the invention encompassed by the appended claims.

CLAIMS

What is claimed is:

1. A device, comprising:
 - a detector, configured to capture frames according to a frame
 - 5 acquisition time;
 - a focusing element; and
 - an illumination source configured, in cooperation with the focusing element and the detector, to generate at least first and second images of the illumination source on the detector within a given frame,
 - 10 the first image and the second images forming a spatial sequence and being spatially separated from each other on the focal plane of the detector by at least one pixel,
 - the first and the second images being generated in a temporal sequence, the illumination source having a time delay between generating the first image and the second image, the time delay being less than or equal to
 - 15 the frame acquisition time of the detector.
2. The device of Claim 1, further including a processing module configured to determine motion of the object based on the spatial sequence and the
- 20 temporal sequence of the first image and the second image.
3. The device of Claim 1, further including a transmitter configured to transmit at least the first and the second images to a remote storage site.
- 25 4. The device of Claim 1, wherein the illumination source is located on the object.
5. The device of Claim 1, wherein the illumination source is configured to emit electromagnetic energy at the object causing the electromagnetic energy to
- 30 reflect, refract or diffract from the object to the detector.

6. The device of Claim 5, wherein the detector, the focusing element, and the illumination source are integrated in a handheld device.
7. The device of Claim 1, wherein the illumination source is further configured,
5 in cooperation with the focusing element and the detector, to generate a third image of the illumination source on the detector within the given frame, the first image, the second image, and the third image each being spatially separated from each other on the focal plane of the detector by at least one pixel,
10 the illumination source having a first time delay between generating the first image and the second image, and a second time delay between generating the second image and the third image, wherein the first time delay and the second time delay are each less than or equal to the frame acquisition time of the detector.
15
8. The device of Claim 1, wherein the illumination source includes at least two light emitters.
9. The device of Claim 8, wherein the illumination source includes an array of
20 sequentially activated light emitters.
10. The device of Claim 9, wherein the light emitters are activated in a sequence that is free-running, synchronous, or plesiochrnoous with respect to the detector.
25
11. The device of Claim 1, wherein the illumination source includes a single spatially modulated light emitter.
12. The device of Claim 11, wherein the focusing element is an optical
30 component within an optical train, and wherein the light emitter is spatially modulated by the optical train.

13. The device of Claim 11, wherein the light emitter is movable.
14. A method of detecting relative motion of an object and an illumination source, the method comprising:
- 5 assigning a position tag and a time tag to representations of each of at least three spatially distinct images of the illumination source captured in a spatial sequence and a temporal sequence in a single frame of a detector;
- comparing corresponding position tags and the time tags to each other and to reference position tags and reference time tags; and
- 10 detecting relative motion of the object and the illumination source based on the comparing.
15. The method of Claim 14, wherein the illumination source is located on the object.
- 15
16. The method of Claim 14, wherein the illumination source is configured to emit electromagnetic radiation at the object, causing the electromagnetic radiation to reflect, refract or diffract from the object.
- 20 17. The method of Claim 14, wherein the reference position tags and the reference time tags are based on prior knowledge of the positional sequence and the temporal sequence of the at least three images.
18. The method of Claim 14, wherein the reference position tags and the reference time tags are the position tags and time tags assigned to at least
- 25 three images of the illumination source captured in a second frame.
19. The method of Claim 14, further including determining relative motion of at least one additional object and the illumination source.
- 30
20. The method of Claim 14, further including computing the object's position as a function of time and the object's velocity as the function of time.


21. The method of Claim 14, further including computing the object's angular velocity.
- 5 22. A method of detecting saccades in a subject, the method comprising:
generating at least a first image and a second image of a reflection of
an illumination source in at least one eye of the subject by the illumination
source in cooperation with a focusing element, the first and second images
generated in a temporal sequence;
10 detecting by a detector the first and second images, the first and
second images being detected within a given frame, the first and second
images being disposed on the focal plane of the detector in a spatial
sequence; and
determining the motion of the at least one eye based on the spatial
15 sequence and the temporal sequence of the first image and the second image,
the detector having a frame acquisition time, the illumination source
having a time delay between generating the first image and the second
image, the first image and the second image being spatially separated from
each other on the focal plane of the detector by at least one pixel,
20 wherein the time delay of the illuminating source is less than or equal
to the frame acquisition time of the detector.
23. The method of Claim 22, wherein detecting the saccades includes detecting
saccades along at least two axes.
- 25 24. The method of Claim 22, further including distinguishing large saccades
from small saccades.
25. The method of Claim 22, further including saccades magnitude and saccades
30 duration.
26. A method of detecting saccades in a subject, the method comprising:


assigning a position tag and a time tag to representations of each of at least three spatially distinct images of a reflection of an illumination source from an eye of the subject captured in a spatial sequence and a temporal sequence in a single frame of a detector;

- 5 comparing the corresponding position tags and time tags to each other and to reference position tags and reference time tags; and
 detecting saccades in the subject based on the comparing.

27. The method of Claim 26, wherein detecting the saccades includes detecting
10 saccades along at least two axes.

28. The method of Claim 26, further including distinguishing large saccades from small saccades.

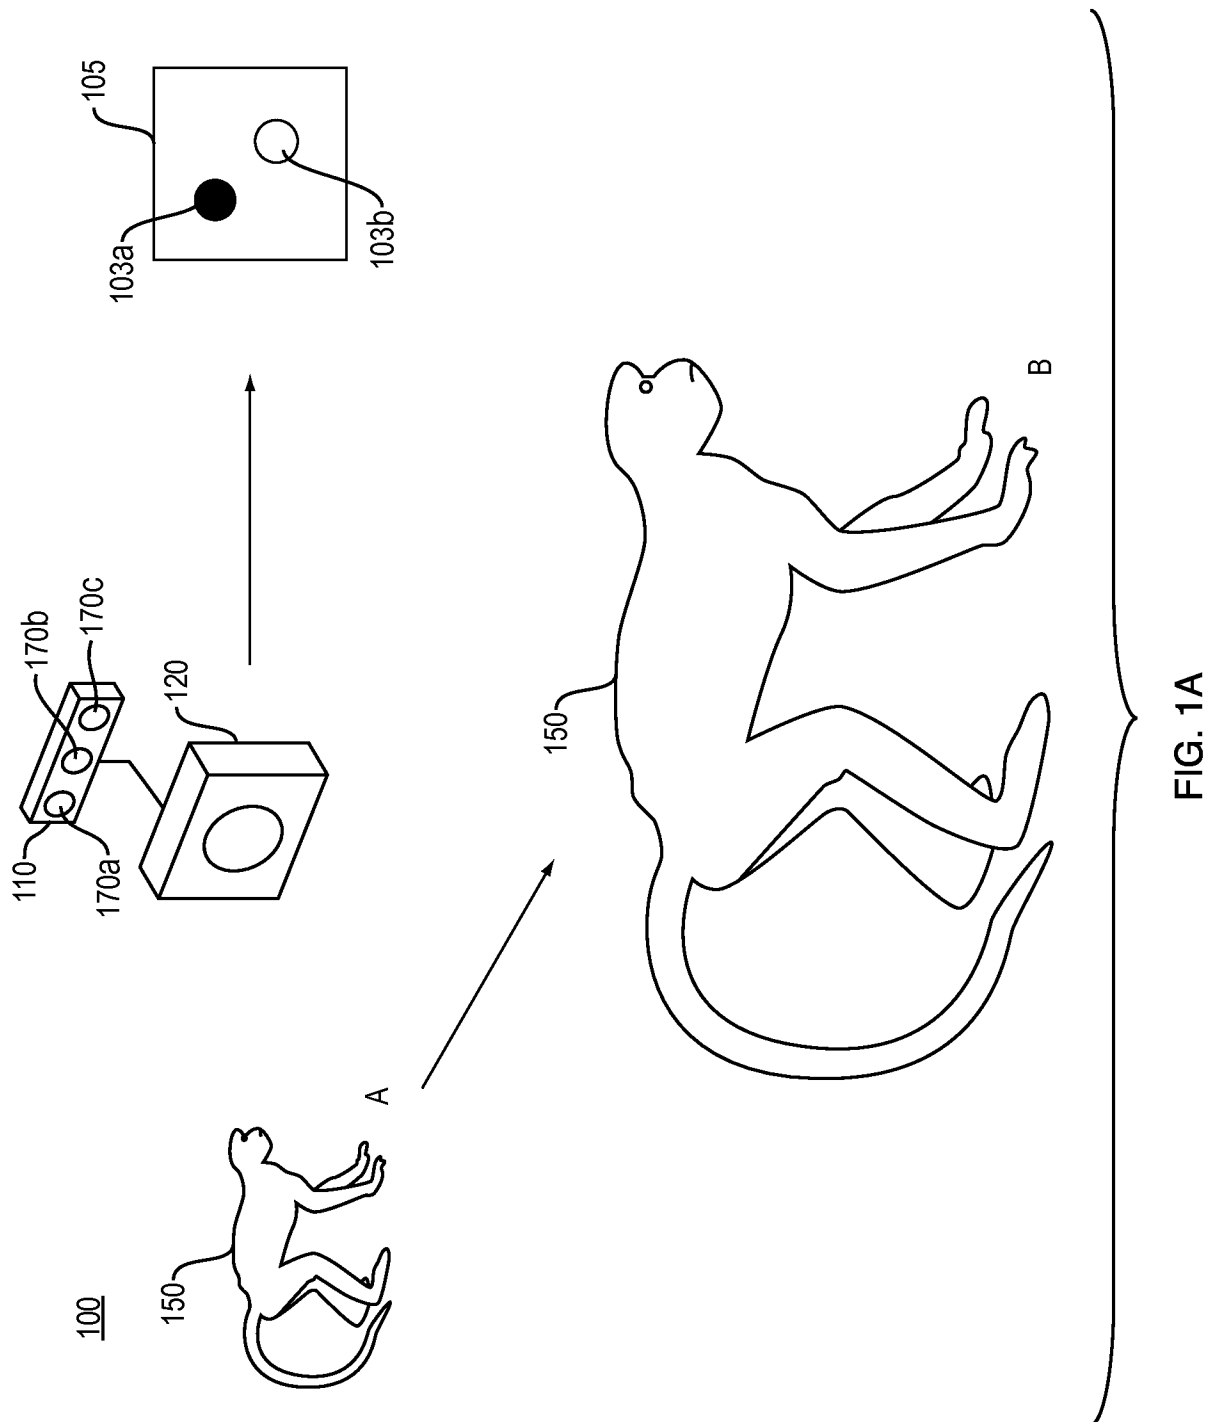

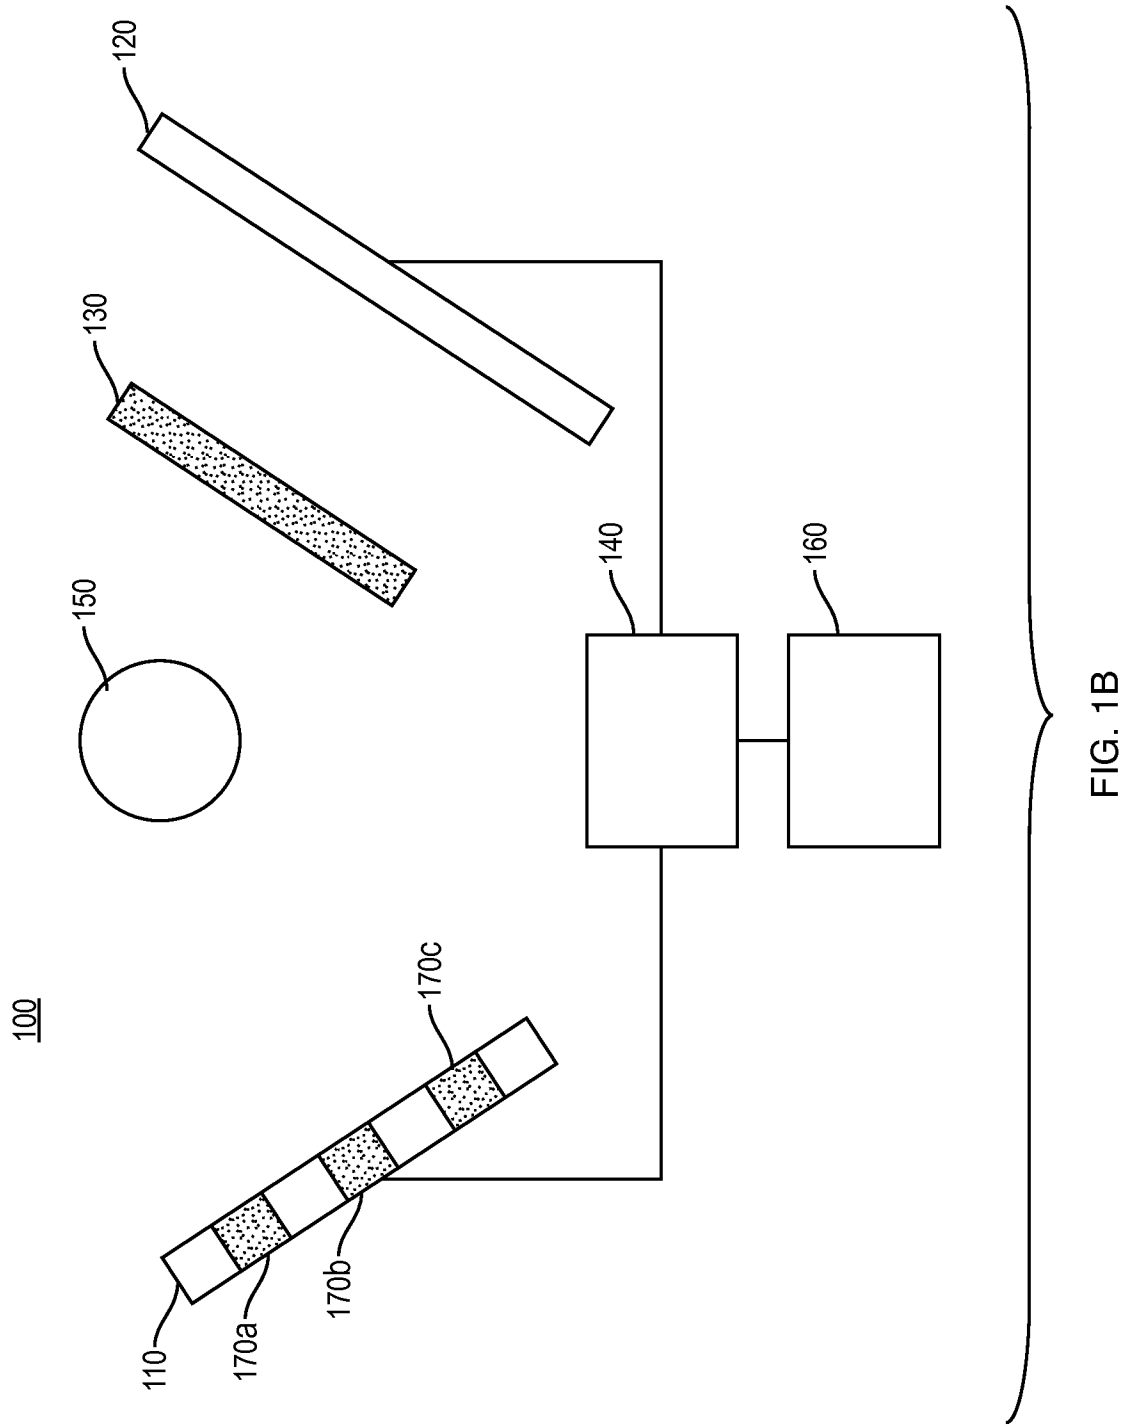

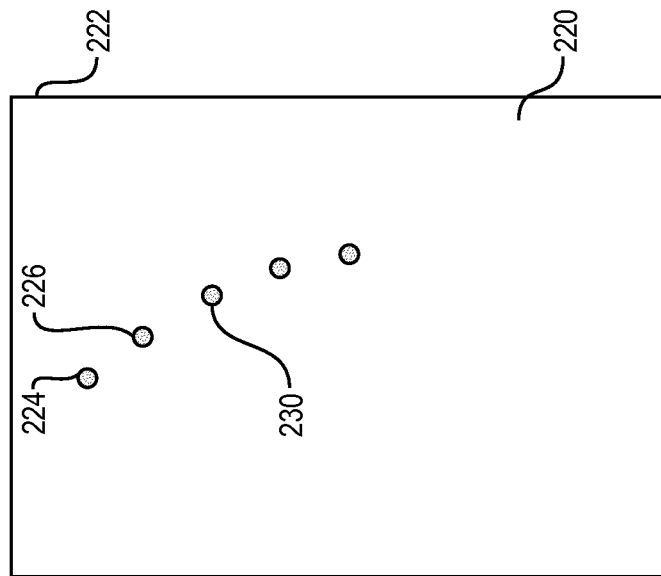


FIG. 2B

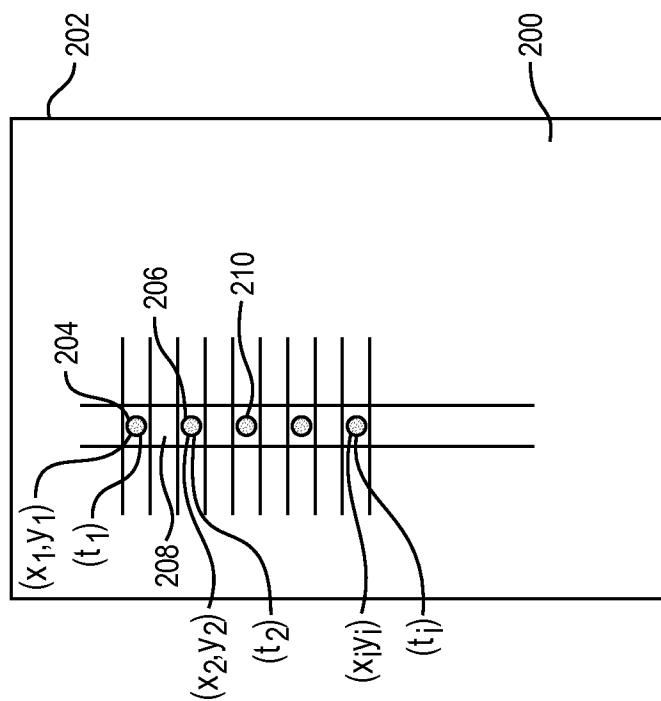


FIG. 2A

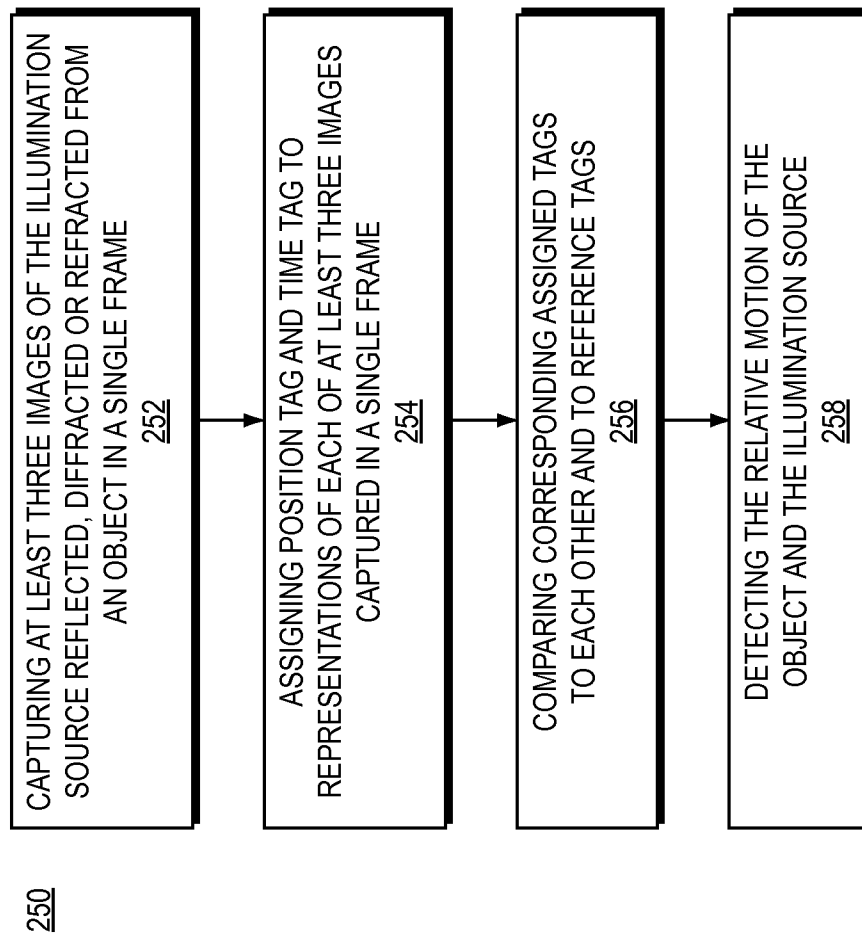


FIG. 2C

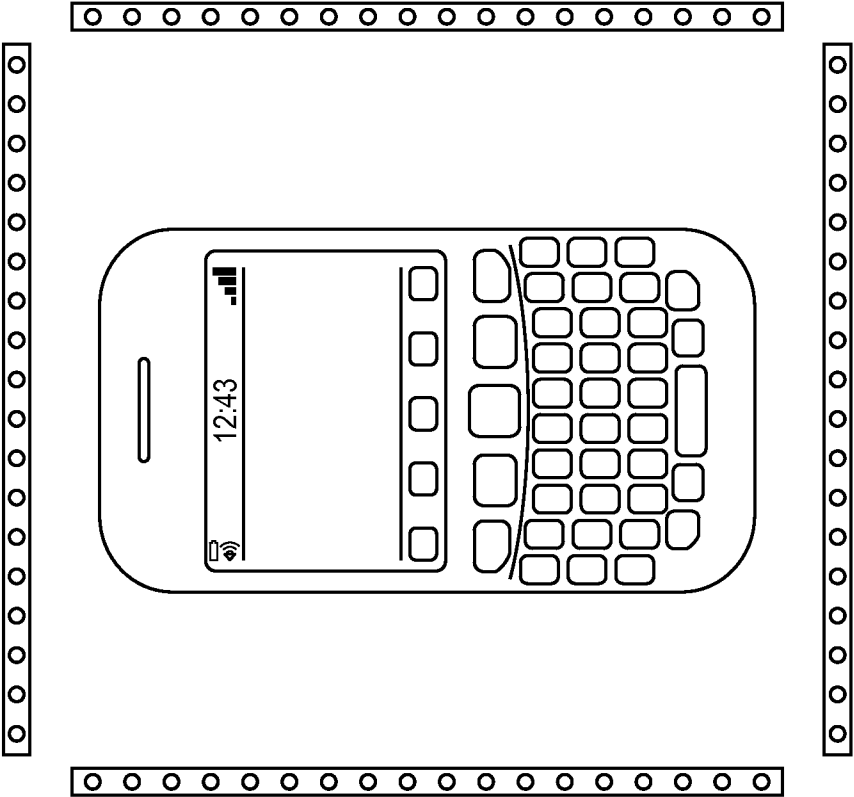


FIG. 3

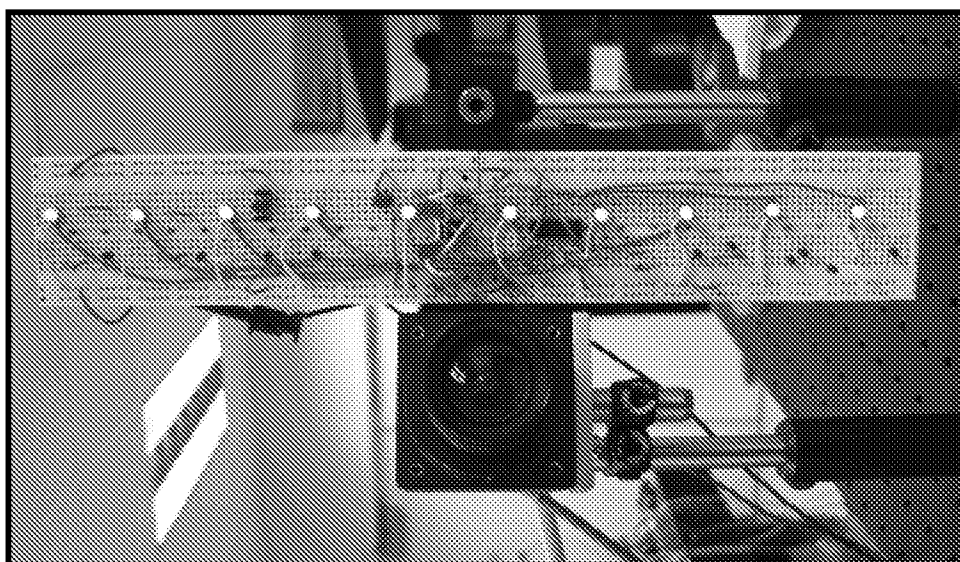


FIG. 4

7/11

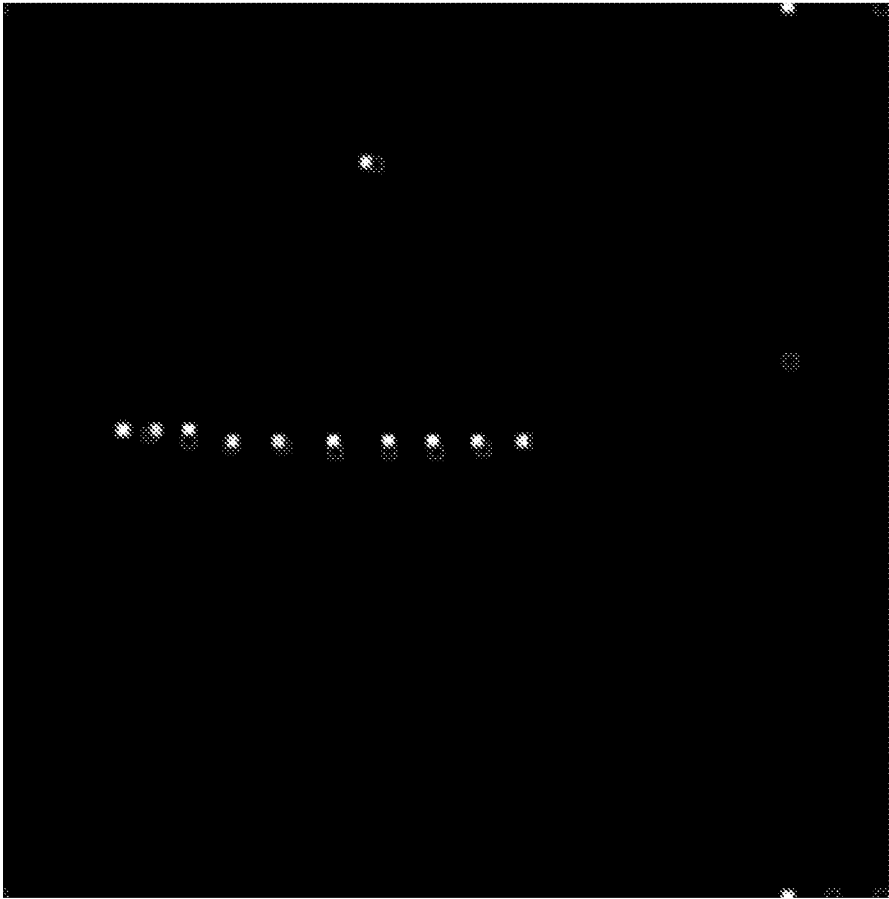


FIG. 5B

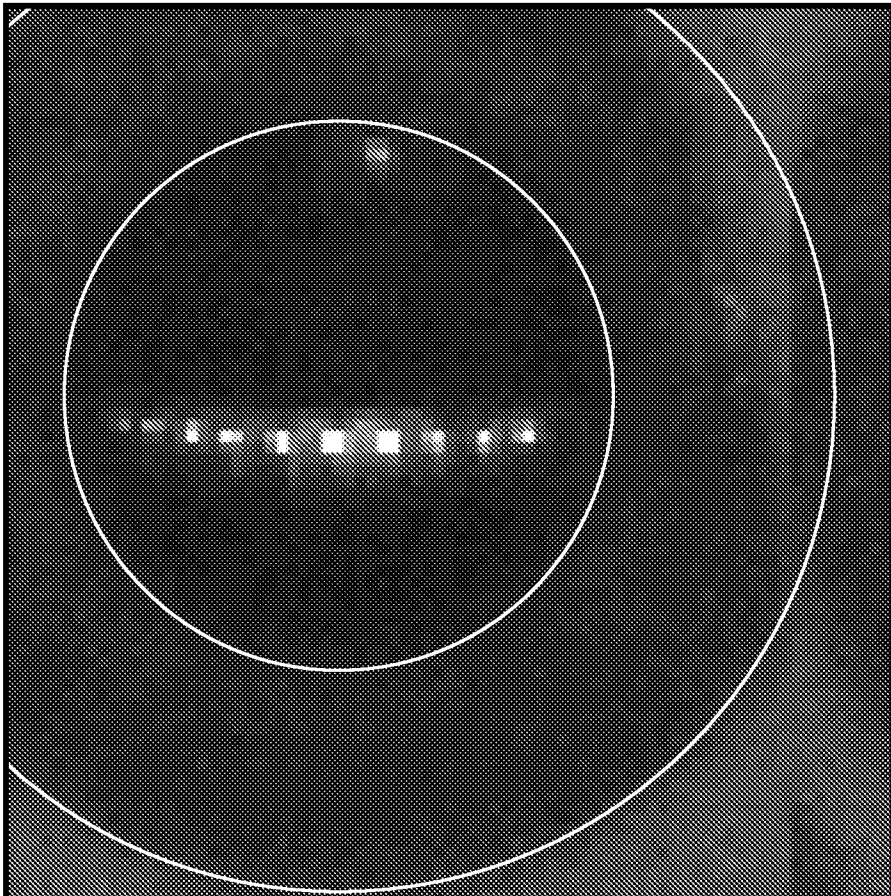


FIG. 5A




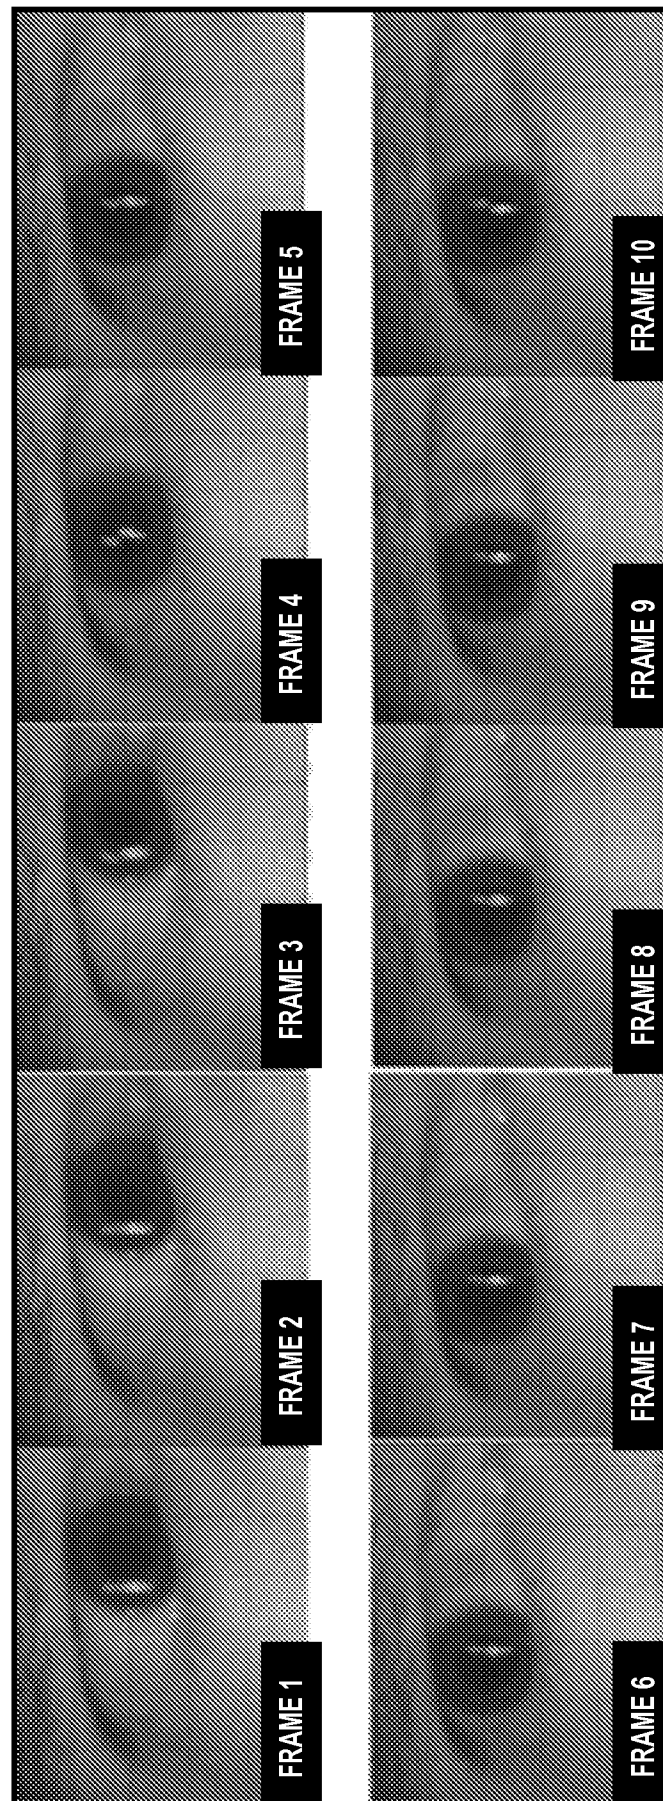


FIG. 6

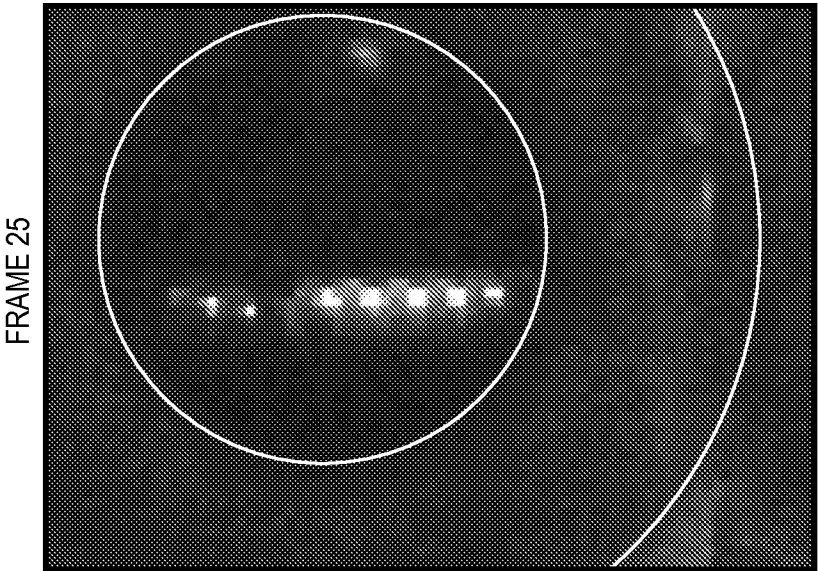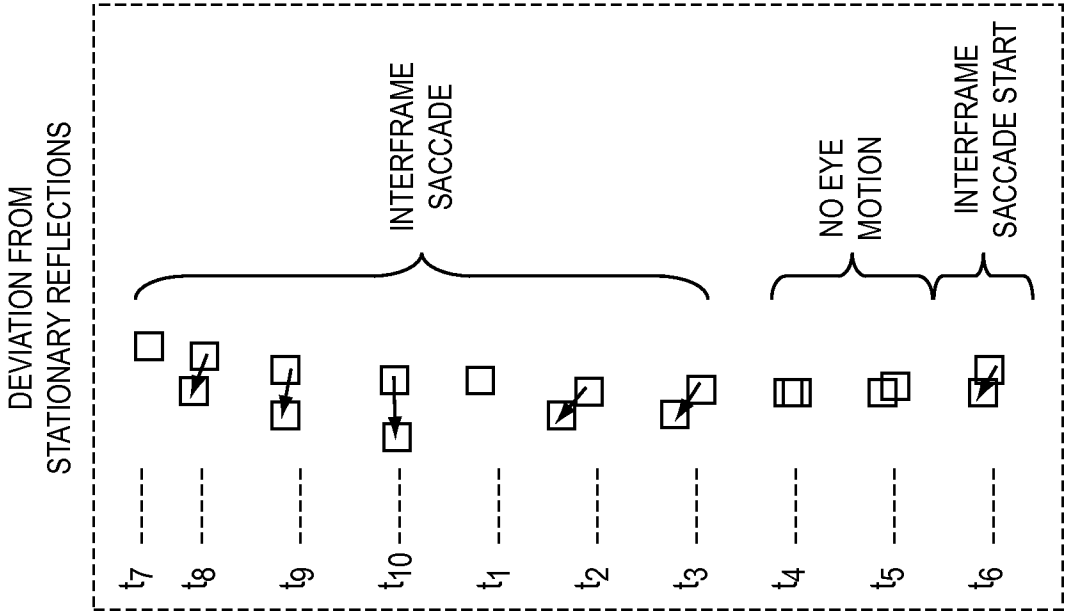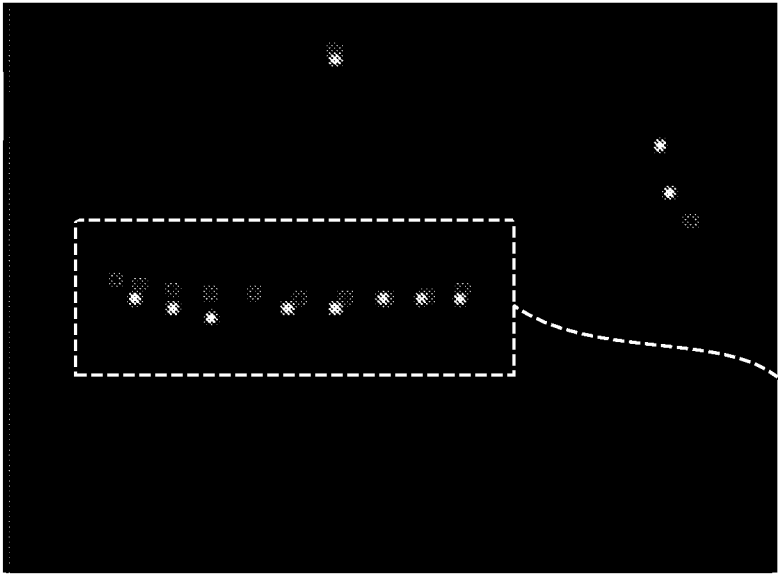

DETECTION



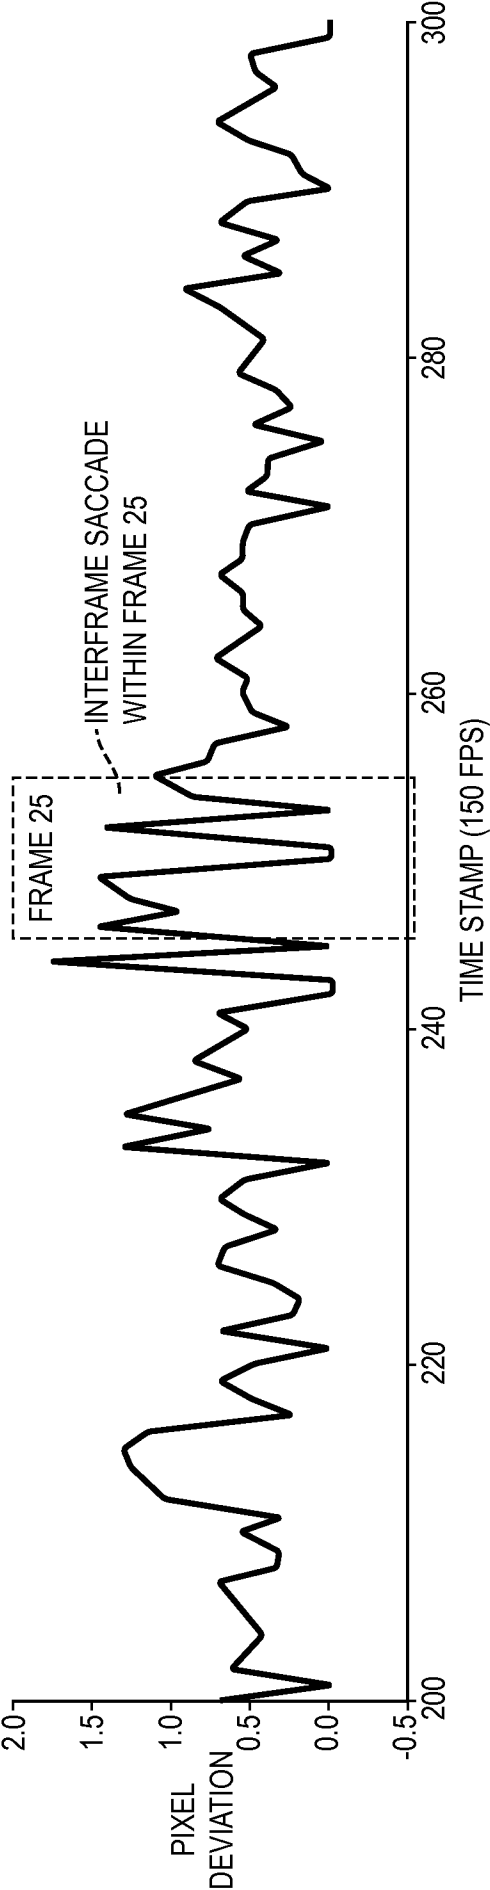
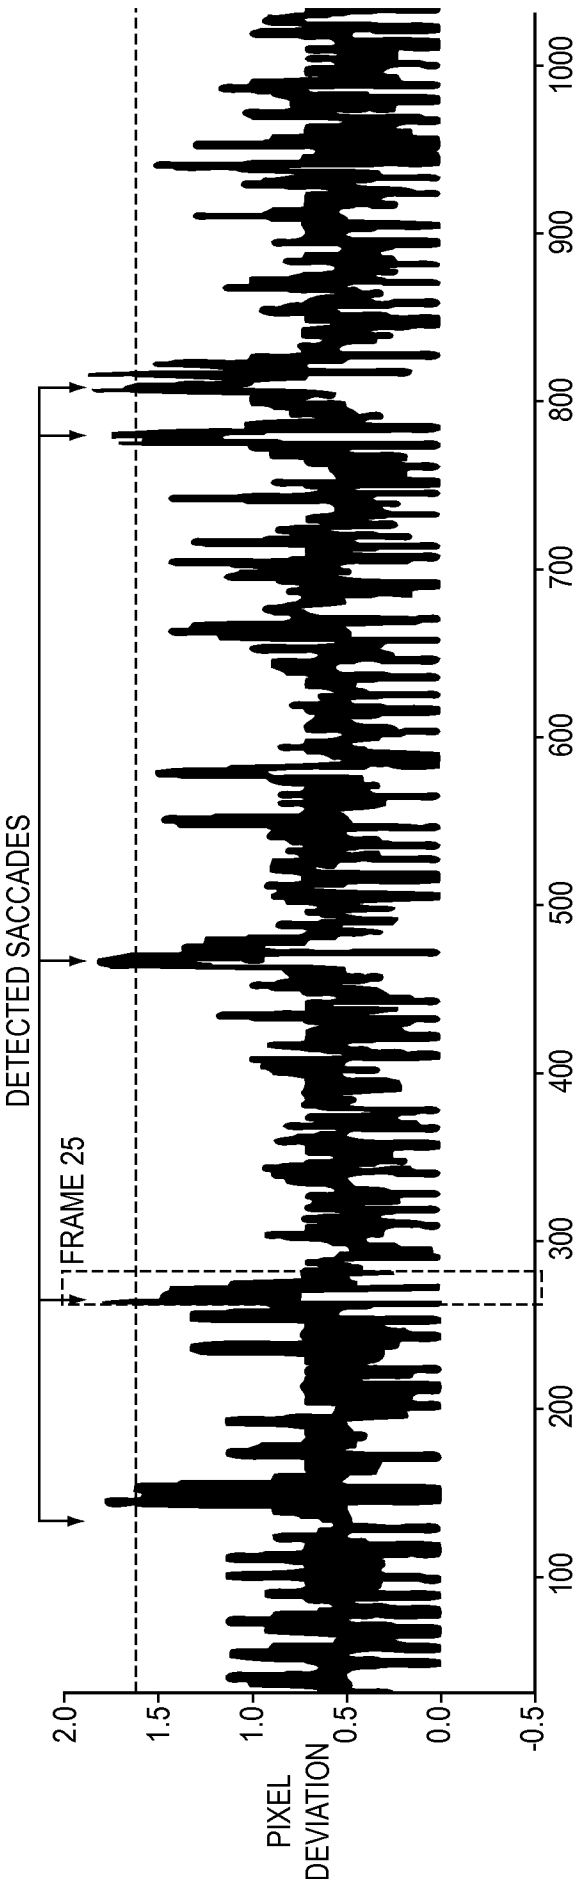


FIG. 8

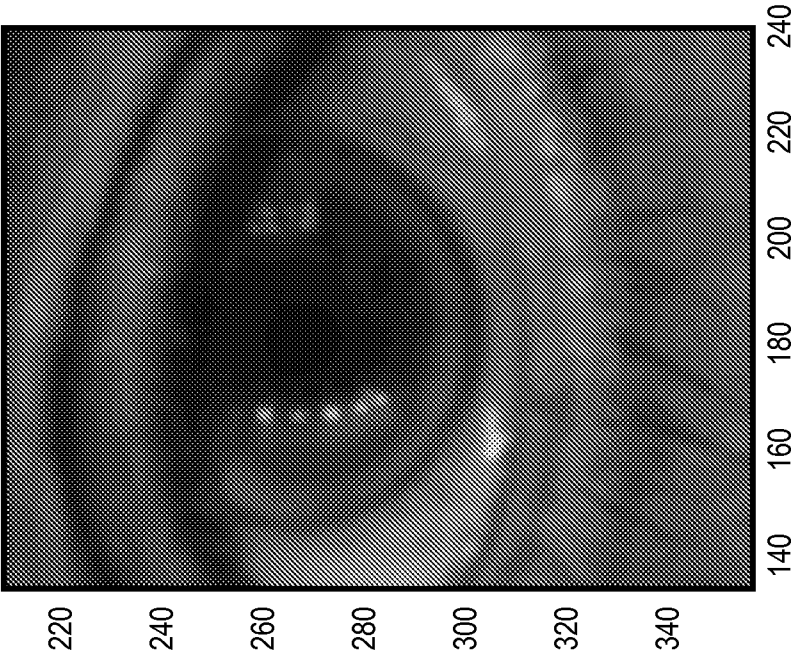


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/030441

A. CLASSIFICATION OF SUBJECT MATTER

INV. G06T7/20 A61B5/11 A61B3/113
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06T A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011/069199 A1 (YAMAZAKI) 24 March 2011 (2011-03-24) paragraphs [0141], [0146] -----	1,14,22, 26
A	US 2009/174701 A1 (COTTER ET AL) 9 July 2009 (2009-07-09) column 23, line 27 - column 24, line 13 -----	1,14,22, 26



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 June 2013

Date of mailing of the international search report

08/07/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Martelli, Luca

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/030441

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011069199 A1	24-03-2011	CN 102245078 A EP 2347692 A1 JP 4728450 B2 US 2011069199 A1 WO 2010131620 A1	16-11-2011 27-07-2011 20-07-2011 24-03-2011 18-11-2010
US 2009174701 A1	09-07-2009	AU 2007281536 A1 CA 2659572 A1 CN 101517568 A EP 2062158 A2 JP 2009545818 A KR 20090041417 A NZ 574599 A US 2009174701 A1 WO 2008016645 A2	07-02-2008 07-02-2008 26-08-2009 27-05-2009 24-12-2009 28-04-2009 24-02-2012 09-07-2009 07-02-2008